



# **RADIO TEST REPORT**

**Test Report No. : 4786000715H-A**

**Applicant** : Toyota Motor Corporation  
**Type of Equipment** : Smart LF Oscillator  
**Model No.** : TMLF10-50  
**FCC ID** : NI4TMLF10-50  
**Test regulation** : FCC Part 15 Subpart C 2012  
Section 15.207, Section 15.209  
**Test Result** : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

**Date of test:** November 15, 2012

**Representative test engineer:**

*T. Sasagawa*  
Tomotaka Sasagawa  
Engineer of WiSE Japan,  
UL Verification Service

**Approved by:**

Shinya Watanabe  
Leader of WiSE Japan,  
UL Verification Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

13-EM-F0429

| <b>CONTENTS</b>                                                               | <b>PAGE</b> |
|-------------------------------------------------------------------------------|-------------|
| <b>SECTION 1: Customer information .....</b>                                  | <b>3</b>    |
| <b>SECTION 2: Equipment under test (E.U.T.).....</b>                          | <b>3</b>    |
| <b>SECTION 3: Test specification, procedures &amp; results .....</b>          | <b>4</b>    |
| <b>SECTION 4: Operation of E.U.T. during testing .....</b>                    | <b>7</b>    |
| <b>SECTION 5: Radiated emission (Fundamental and Spurious Emission) .....</b> | <b>8</b>    |
| <b>SECTION 6: -26dB Bandwidth.....</b>                                        | <b>10</b>   |
| <b>SECTION 7: 99% Occupied Bandwidth.....</b>                                 | <b>10</b>   |
| <b>APPENDIX 1: Photographs of test setup .....</b>                            | <b>11</b>   |
| Radiated Emission.....                                                        | 11          |
| Worst Case Position .....                                                     | 14          |
| <b>APPENDIX 2: Data of EMI test.....</b>                                      | <b>16</b>   |
| Radiated Emission below 30MHz (Fundamental and Spurious Emission) .....       | 16          |
| Radiated Emission above 30MHz (Spurious Emission).....                        | 20          |
| -26dB Bandwidth and 99% Occupied Bandwidth .....                              | 24          |
| <b>APPENDIX 3: Test instruments .....</b>                                     | <b>27</b>   |

## **SECTION 1: Customer information**

Company Name : Toyota Motor Corporation  
Address : 1, Toyota-Cho, Toyota, Aichi, 471-8572 Japan  
Telephone Number : +81-565-94-1007  
Facsimile Number : +81-565-94-1192  
Contact Person : Tetsuya Matsuo

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Smart LF Oscillator  
Model No. : TMLF10-50  
Serial No. : Refer to Section 4, Clause 4.2  
Rating : DC12.0V (Max 0.5A)  
Receipt Date of Sample : November 7, 2012  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product Description**

Smart LF Oscillator, model: TMLF10-50 is a transmitter that is installed in a motor vehicle and is used as part of Smart System.

#### **Radio Specification**

Radio Type : Transmitter  
Frequency of Operation : 134.2kHz  
Modulation : ASK  
Method of Frequency Generation : Crystal  
Antenna type : Coil Antenna  
Duty Cycle : up to 100 %

Smart LF Oscillator(model: TMLF10-50) consists of the following parts:

- Computer Assy, Smart Key (ECU)
- Door Antenna
- Trunk Antenna
- Room Antenna / Luggage Antenna

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C: 2012, final revised on August 13, 2012 and effective September 12, 2012

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted Emission  
Section 15.209 Radiated emission limits, general requirements

#### **FCC 15.31 (e)**

The stable voltage(DC2.3 to 6.2V\*) is constantly provided to RF Part through the regulator regardless of voltage fluctuation of car battery(DC12V). Therefore, this EUT complies with the requirement.

\*The regulated voltage value differs depending on connected LF antennas.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the vehicle. Therefore, the equipment complies with the antenna requirement of Section 15.203.

### **3.2 Procedures and results**

| No. | Item                                               | Test Procedure                                                                                             | Specification                                                     | Remarks  | Deviation | Worst margin                                               | Results  |
|-----|----------------------------------------------------|------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------|----------|-----------|------------------------------------------------------------|----------|
| 1   | Conducted Emission                                 | <FCC><br>ANSI C63.4:2003<br>7. AC powerline<br>conducted emission<br>measurements<br><IC><br>RSS-Gen 7.2.4 | <FCC><br>Section 15.207<br><IC><br>RSS-Gen 7.2.4                  | -        | N/A *1)   | N/A                                                        | N/A      |
| 2   | Electric Field Strength<br>of Fundamental Emission | <FCC><br>ANSI C63.4:2003<br>13. Measurement of<br>intentional radiators<br><IC><br>RSS-Gen 4.8, 4.11       | <FCC><br>Section 15.209<br><IC><br>RSS-210 2.5.1<br>RSS-Gen 7.2.5 | Radiated | N/A       | 22.9dB<br>0.13420MHz,<br>AV<br>(Room / Luggage<br>Antenna) | Complied |
| 3   | Electric Field Strength<br>of Spurious Emission    | <FCC><br>ANSI C63.4:2003<br>13. Measurement of<br>intentional radiators<br><IC><br>RSS-Gen 4.9, 4.11       | <FCC><br>Section 15.209<br><IC><br>RSS-210 2.5.1<br>RSS-Gen 7.2.5 | Radiated | N/A       | 3.1dB<br>32.242MHz,<br>Vertical, QP<br>(Trunk Antenna)     | Complied |
| 4   | -26dB Bandwidth                                    | <FCC><br>ANSI C63.4:2003<br>13. Measurement of<br>intentional radiators<br><IC><br>-                       | <FCC><br>Reference data<br><IC><br>-                              | Radiated | N/A       | N/A                                                        | N/A      |

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

| No. | Item                    | Test Procedure | Specification | Remarks  | Deviation | Worst margin | Results |
|-----|-------------------------|----------------|---------------|----------|-----------|--------------|---------|
| 1   | 99% Occupied Band Width | RSS-Gen 4.6.1  | RSS-Gen 4.6.1 | Radiated | N/A       | N/A          | N/A     |

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

| Test room<br>(semi-anechoic chamber) | Radiated emission |                  |                 |                |                 |                   |                   |
|--------------------------------------|-------------------|------------------|-----------------|----------------|-----------------|-------------------|-------------------|
|                                      | (3m*)(+dB)        |                  |                 |                | (1m*)(+dB)      |                   | (0.5m*)(+dB)      |
|                                      | 9kHz<br>-30MHz    | 30MHz<br>-300MHz | 300MHz<br>-1GHz | 1GHz<br>-10GHz | 10GHz<br>-18GHz | 18GHz<br>-26.5GHz | 26.5GHz<br>-40GHz |
| No.1                                 | 4.3dB             | 5.0dB            | 5.1dB           | 4.9dB          | 5.8dB           | 4.4dB             | 4.3dB             |
| No.2                                 | 4.3dB             | 5.2dB            | 5.1dB           | 5.0dB          | 5.7dB           | 4.3dB             | 4.2dB             |
| No.3                                 | 4.6dB             | 5.0dB            | 5.1dB           | 5.0dB          | 5.7dB           | 4.5dB             | 4.2dB             |
| No.4                                 | 4.8dB             | 5.2dB            | 5.0dB           | 5.0dB          | 5.7dB           | 5.2dB             | 4.2dB             |

\*3m/1m/0.5m = Measurement distance

#### Radiated emission test(3m)

[Electric Field Strength of Fundamental Emission]

The data listed in this test report has enough margin, more than the site margin.

[Electric Field Strength of Spurious Emission]

The data listed in this report meets the limits unless the uncertainty is taken into consideration.

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

|                            | FCC Registration Number | IC Registration Number | Width x Depth x Height (m) | Size of reference ground plane (m) / horizontal conducting plane | Other rooms            |
|----------------------------|-------------------------|------------------------|----------------------------|------------------------------------------------------------------|------------------------|
| No.1 semi-anechoic chamber | 313583                  | 2973C-1                | 19.2 x 11.2 x 7.7m         | 7.0 x 6.0m                                                       | No.1 Power source room |
| No.2 semi-anechoic chamber | 655103                  | 2973C-2                | 7.5 x 5.8 x 5.2m           | 4.0 x 4.0m                                                       | -                      |
| No.3 semi-anechoic chamber | 148738                  | 2973C-3                | 12.0 x 8.5 x 5.9m          | 6.8 x 5.75m                                                      | No.3 Preparation room  |
| No.3 shielded room         | -                       | -                      | 4.0 x 6.0 x 2.7m           | N/A                                                              | -                      |
| No.4 semi-anechoic chamber | 134570                  | 2973C-4                | 12.0 x 8.5 x 5.9m          | 6.8 x 5.75m                                                      | No.4 Preparation room  |
| No.4 shielded room         | -                       | -                      | 4.0 x 6.0 x 2.7m           | N/A                                                              | -                      |
| No.5 semi-anechoic chamber | -                       | -                      | 6.0 x 6.0 x 3.9m           | 6.0 x 6.0m                                                       | -                      |
| No.6 shielded room         | -                       | -                      | 4.0 x 4.5 x 2.7m           | 4.75 x 5.4 m                                                     | -                      |
| No.6 measurement room      | -                       | -                      | 4.75 x 5.4 x 3.0m          | 4.75 x 4.15 m                                                    | -                      |
| No.7 shielded room         | -                       | -                      | 4.7 x 7.5 x 2.7m           | 4.7 x 7.5m                                                       | -                      |
| No.8 measurement room      | -                       | -                      | 3.1 x 5.0 x 2.7m           | N/A                                                              | -                      |
| No.9 measurement room      | -                       | -                      | 8.0 x 4.5 x 2.8m           | 2.0 x 2.0m                                                       | -                      |
| No.10 measurement room     | -                       | -                      | 2.6 x 2.8 x 2.5m           | 2.4 x 2.4m                                                       | -                      |
| No.11 measurement room     | -                       | -                      | 3.1 x 3.4 x 3.0m           | 2.4 x 3.4m                                                       | -                      |

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test set up, Data of EMI, and Test instruments

Refer to APPENDIX 1 to 3.


## SECTION 4: Operation of E.U.T. during testing

### 4.1 Operating Modes

The mode is used :  
1) Transmitting mode (Tx) 134.2kHz (Door Antenna, Trunk Antenna, Room Antenna / Luggage Antenna, Maximum Output)  
2) Transmitting mode (Tx) 134.2kHz (Room Antenna / Luggage Antenna only, Minimum Output)  
\* LF output power is controlled by Component Assy, Smart Key.

Justification : The system was configured in typical fashion (as a customer would normally use it) for testing.

### 4.2 Configuration and peripherals

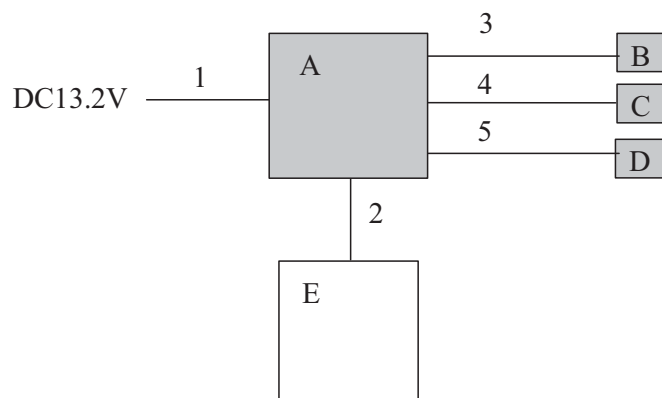

\* Cabling and setup were taken into consideration and test data was taken under worse case conditions.  
\* The test was performed with the representative component which constitute a system.

#### Description of EUT and Support equipment

| No. | Item                           | Model number | Serial number      | Manufacturer | Remarks |
|-----|--------------------------------|--------------|--------------------|--------------|---------|
| A   | Computer Assy, Smart Key (ECU) | -            | 001 *1)<br>002 *2) | -            | EUT     |
| B   | Door Antenna                   | -            | 001                | -            | EUT     |
| C   | Room Antenna / Luggage Antenna | -            | 001                | -            | EUT     |
| D   | Trunk Antenna                  | -            | 001                | -            | EUT     |
| E   | Jig Box                        | -            | -                  | -            | -       |

\*1) Used for Operation mode “1”).

\*2) Used for Operation mode “2”).

#### List of cables used

| No. | Name                         | Length (m) | Shield     |            | Remarks |
|-----|------------------------------|------------|------------|------------|---------|
|     |                              |            | Cable      | Connector  |         |
| 1   | DC Cable                     | 2.5        | Unshielded | Unshielded | -       |
| 2   | ECU Cable                    | 2.0        | Unshielded | Unshielded | -       |
| 3   | Door Ant Cable               | 2.0        | Unshielded | Unshielded | -       |
| 4   | Room Ant / Luggage Ant Cable | 2.0        | Unshielded | Unshielded | -       |
| 5   | Trunk Ant Cable              | 2.0        | Unshielded | Unshielded | -       |

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 5: Radiated emission (Fundamental and Spurious Emission)**

### **Test Procedure**

The Radiated Electric Field Strength intensity has been measured on No 3 semi anechoic chamber with a ground plane and at a distance of 3m.

Frequency : From 9kHz to 30MHz at distance 3m

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0deg., 45deg., 90deg., 135 deg., and 180deg.)

and horizontal polarization.

\*Refer to Figure 1 about Direction of the Loop Antenna.

Frequency : From 30MHz to 1GHz at distance 3m

The measuring antenna height varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization.

Measurements were performed with a QP, PK, and AV detector.

The radiated emission measurements were made with the following detector function of the test receiver (below 1GHz).

|               | From 9kHz<br>to 90kHz<br>and<br>From 110kHz<br>to 150kHz | From<br>90kHz<br>to 110kHz | From<br>150kHz<br>to 490kHz | From<br>490kHz<br>to 30MHz | From<br>30MHz to<br>1GHz |
|---------------|----------------------------------------------------------|----------------------------|-----------------------------|----------------------------|--------------------------|
| Detector Type | PK/AV                                                    | QP                         | PK/AV                       | QP                         | QP                       |
| IF Bandwidth  | 200Hz                                                    | 200Hz                      | 9kHz                        | 9kHz                       | 120kHz                   |

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

With the position, the noise levels of all the frequencies were measured.

\* Part 15 Section 15.31 (f)(2) (9kHz-30MHz)

[Limit at 3m]=[Limit at 300m]-40 x log (3[m]/300[m])

[Limit at 3m]=[Limit at 30m]-40 x log (3[m]/30[m])

**Test data : APPENDIX 2**

**Test result : Pass**

Date: November 15, 2012

Test engineer: Motoya Imura and Tomotaka Sasagawa

---

**UL Japan, Inc.**

**Head Office EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124


**Figure 1: Direction of the Loop Antenna**

*Side View (Vertical)*

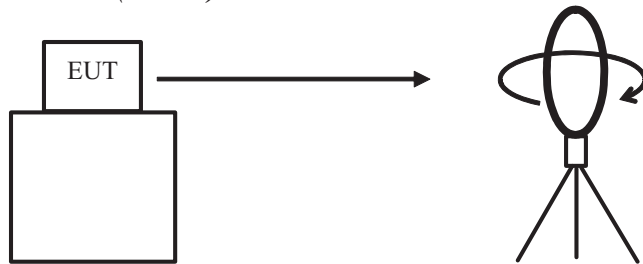

---


*Top View (Horizontal)*

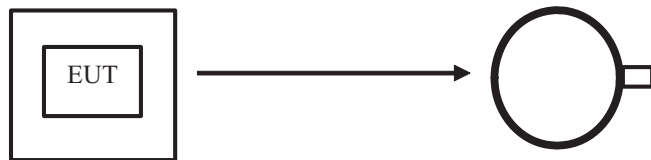

Antenna was not rotated.

---

*Top View (Vertical)*

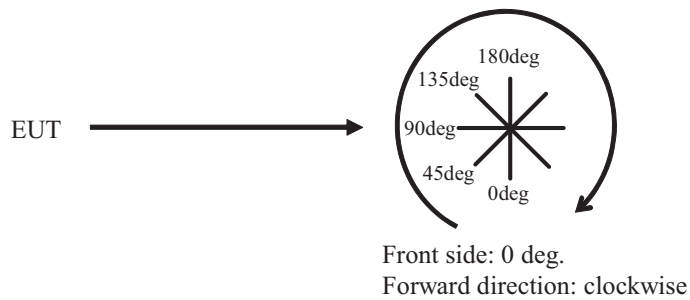

---

**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## **SECTION 6: -26dB Bandwidth**

### **Test Procedure**

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

Test data : APPENDIX 2  
Test result : Pass

## **SECTION 7: 99% Occupied Bandwidth**

### **Test Procedure**

The measurement was performed in the antenna height to gain the maximum of Electric field strength.


Test data : APPENDIX 2  
Test result : Pass

## **APPENDIX 1: Photographs of test setup**

### **Radiated Emission** **Door Antenna**



**Photo 1**

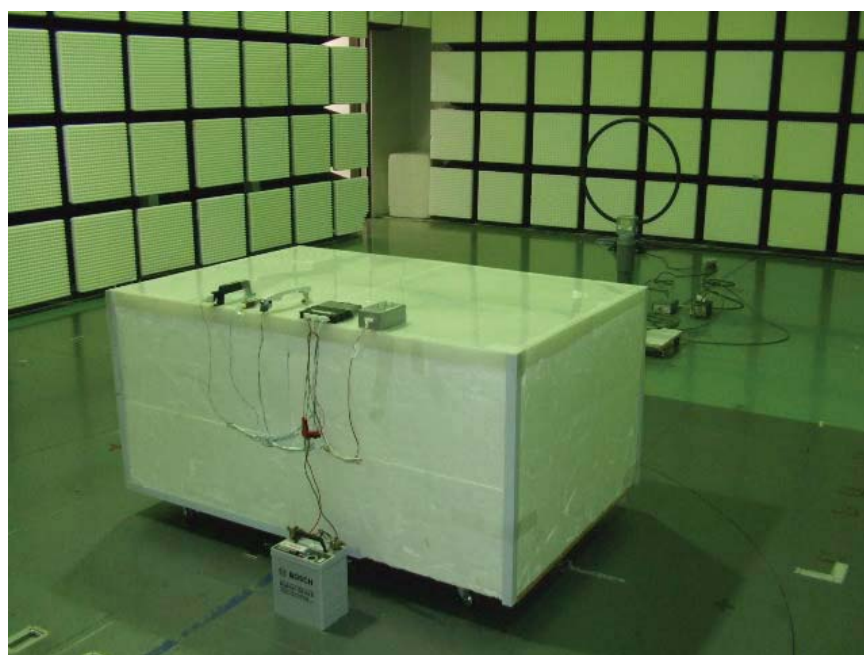


**Photo 2**

**Radiated Emission**  
**Trunk Antenna**




**Photo 1**

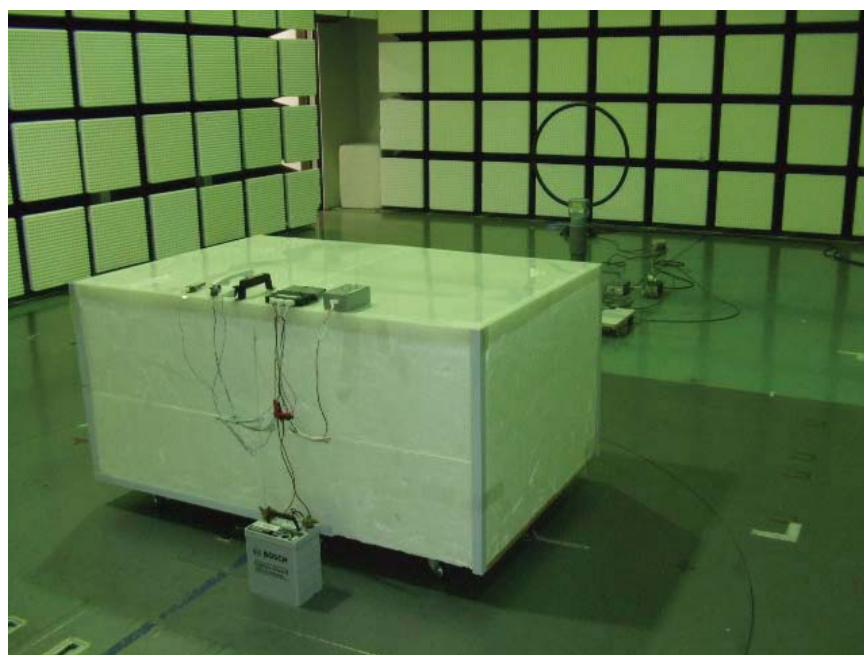


**Photo 2**

**Radiated Emission**  
**Room Antenna / Luggage Antenna**

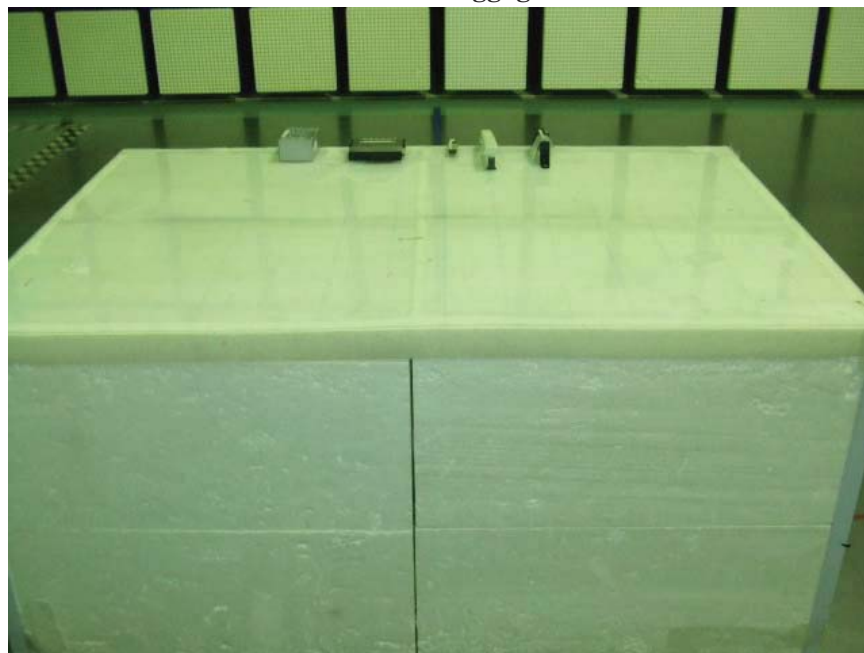

**Photo 1**

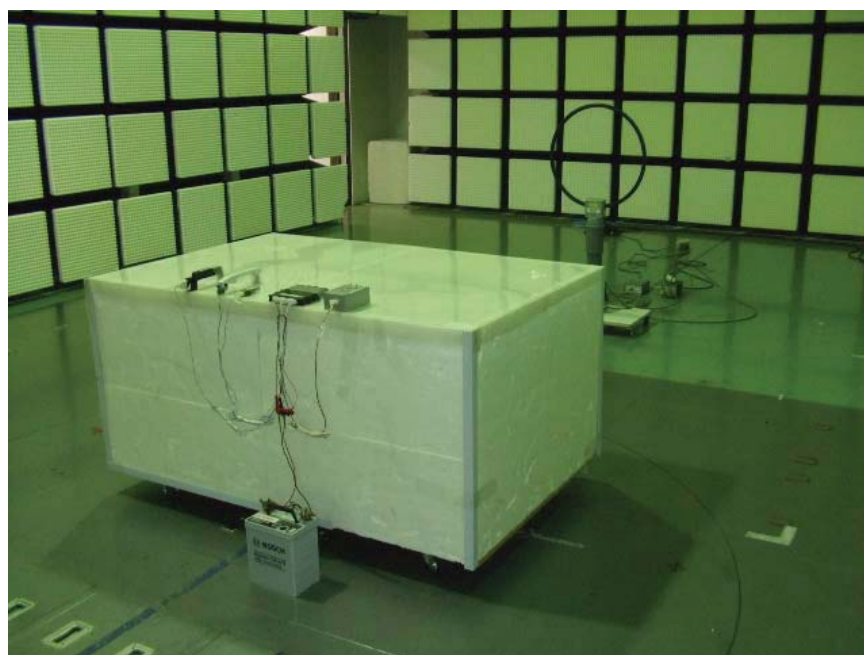

**Photo 2**

**Worst Case Position**

**Door Antenna**  
**Below 30MHz:X-axis**  
**Above 30MHz(Hori:X-axis /Vert:X-axis)**  
**X-axis**



**Y-axis**



**Z-axis**



**Trunk Antenna**  
**Below 30MHz:X-axis**  
**Above 30MHz(Hori:X-axis /Vert:X-axis)**  
**X-axis**



**Y-axis**



**Z-axis**



---

**UL Japan, Inc.**

**Head Office EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

**Worst Case Position**


**Room Antenna / Luggage Antenna**  
**Below 30MHz:Z-axis**  
**Above 30MHz(Hori:X-axis /Vert:X-axis)**  
**X-axis**

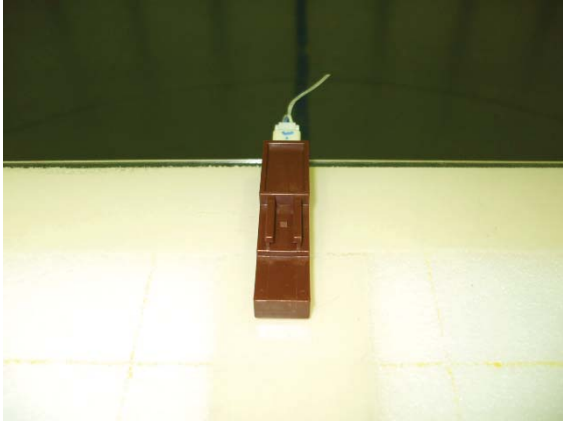

**Y-axis**



**Z-axis**

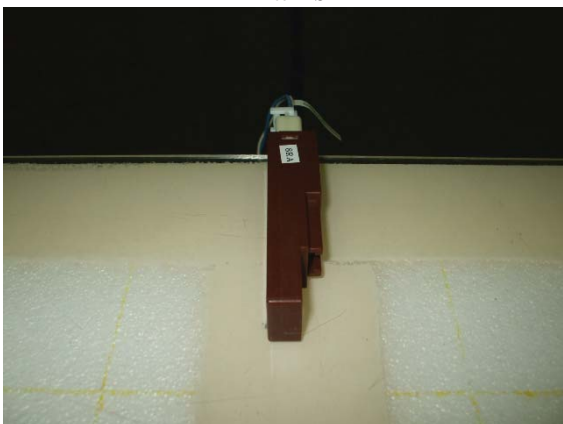

**ECU**  
**Below 30MHz:X-axis**  
**Above 30MHz(Hori:X-axis /Vert:X-axis)**  
**X-axis**



**Y-axis**



**Z-axis**



**UL Japan, Inc.**

**Head Office EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

## APPENDIX 2: Data of EMI test

### Radiated Emission below 30MHz (Fundamental and Spurious Emission) Door Antenna

#### DATA OF RADIATED EMISSION TEST


UL Japan, Inc. Head Office EMC Lab. No. 3 Semi Anechoic Chamber  
Date : 2012/11/15

Report No. : 4786000715H

Temp./ Humi. : 22deg. C / 41% RH  
Engineer : Tomotaka Sasagawa

Mode / Remarks : Tx 134.2kHz, Normal Modulation, Door Antenna, Worst axis (Antenna: X)

LIMIT : FCC15.209(a) 3m, 9-90kHz:PK, 110-490kHz:PK, other:QP  
FCC15.209(a) 3m, 9-90kHz:AV, 110-490kHz:AV, other:QP

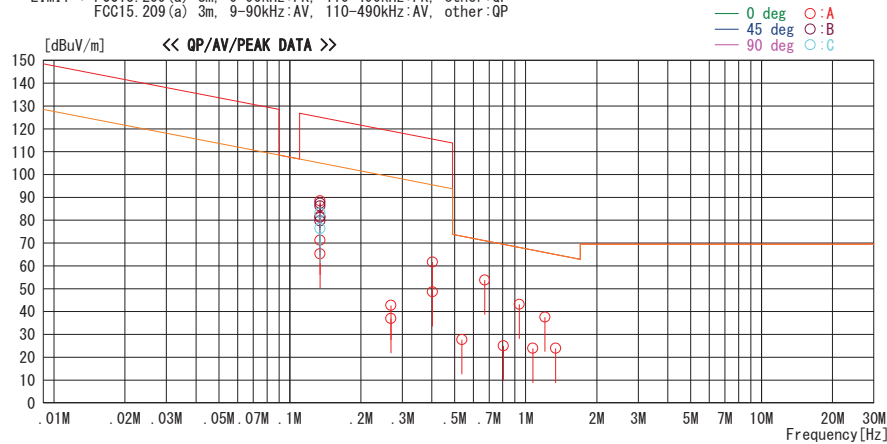

| Freq.   | Reading | DET  | Ant. Fac | Loss | Gain | Result   | Limit    | Margin | Antenna | Table | Comment |
|---------|---------|------|----------|------|------|----------|----------|--------|---------|-------|---------|
| [MHz]   | [dBuV]  |      | [dB/m]   | [dB] | [dB] | [dBuV/m] | [dBuV/m] | [dB]   | [deg]   | [deg] |         |
| 0.13420 | 93.2    | PEAK | 19.2     | 6.0  | 32.2 | 86.2     | 125.1    | 38.9   | 45      | B     | 16      |
| 0.13420 | 90.2    | PEAK | 19.2     | 6.0  | 32.2 | 83.2     | 125.1    | 41.9   | 90      | C     | 221     |
| 0.13420 | 95.5    | PEAK | 19.2     | 6.0  | 32.2 | 88.5     | 125.1    | 36.6   | 0       | A     | 2       |
| 0.13420 | 86.7    | AV   | 19.2     | 6.0  | 32.2 | 79.7     | 105.1    | 25.4   | 45      | B     | 16      |
| 0.13420 | 83.4    | AV   | 19.2     | 6.0  | 32.2 | 76.4     | 105.1    | 28.7   | 90      | C     | 221     |
| 0.13420 | 88.7    | AV   | 19.2     | 6.0  | 32.2 | 81.7     | 105.1    | 23.4   | 0       | A     | 2       |
| 0.13420 | 94.5    | PEAK | 19.2     | 6.0  | 32.2 | 87.5     | 125.1    | 37.6   | 135     | B     | 16      |
| 0.13420 | 88.2    | AV   | 19.2     | 6.0  | 32.2 | 81.2     | 105.1    | 23.9   | 135     | B     | 16      |
| 0.13420 | 78.2    | PEAK | 19.2     | 6.0  | 32.2 | 71.2     | 125.1    | 53.9   | 0       | A     | 2       |
| 0.13420 | 72.3    | AV   | 19.2     | 6.0  | 32.2 | 65.3     | 105.1    | 39.8   | 0       | A     | 2       |
| 0.26840 | 43.9    | AV   | 19.1     | 6.1  | 32.1 | 37.0     | 99.0     | 62.0   | 0       | A     | 0       |
| 0.26840 | 49.7    | PEAK | 19.1     | 6.1  | 32.1 | 42.8     | 119.0    | 76.2   | 0       | A     | 0       |
| 0.40260 | 55.6    | AV   | 19.1     | 6.1  | 32.1 | 48.7     | 95.5     | 46.8   | 0       | A     | 355     |
| 0.40260 | 68.6    | PEAK | 19.1     | 6.1  | 32.1 | 61.7     | 115.5    | 53.8   | 0       | A     | 355     |
| 0.53680 | 34.6    | QP   | 19.1     | 6.1  | 32.1 | 27.7     | 73.0     | 45.3   | 0       | A     | 6       |
| 0.67100 | 60.6    | QP   | 19.2     | 6.1  | 32.1 | 53.8     | 71.1     | 17.3   | 0       | A     | 1       |
| 0.80520 | 31.8    | QP   | 19.2     | 6.1  | 32.1 | 25.0     | 69.5     | 44.5   | 0       | A     | 24      |
| 0.93940 | 50.0    | QP   | 19.2     | 6.1  | 32.1 | 43.2     | 68.1     | 24.9   | 0       | A     | 1       |
| 1.07360 | 30.9    | QP   | 19.1     | 6.1  | 32.1 | 24.0     | 66.9     | 42.9   | 0       | A     | 243     |
| 1.20780 | 44.4    | QP   | 19.1     | 6.2  | 32.1 | 37.6     | 65.9     | 28.3   | 0       | A     | 243     |
| 1.34200 | 30.8    | QP   | 19.1     | 6.2  | 32.1 | 24.0     | 65.0     | 41.0   | 0       | A     | 243     |

CHART: WITH FACTOR, ANT TYPE: LOOP Except for the data below: adequate margin data below the limits.  
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATTEN.) - GAIN(AMP.)

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission below 30MHz (Fundamental and Spurious Emission)**  
**Trunk Antenna**

**DATA OF RADIATED EMISSION TEST**


UL Japan, Inc. Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2012/11/15

Report No. : 4786000715H

Temp./ Humi. : 22deg. C / 41% RH  
Engineer : Tomotaka Sasagawa

Mode / Remarks : Tx 134.2kHz, Normal Modulation, Trunk Antenna, Worst axis (Antenna: X)

LIMIT : FCC15.209(a) 3m, 9-90kHz:PK, 110-490kHz:PK, other:QP  
FCC15.209(a) 3m, 9-90kHz:AV, 110-490kHz:AV, other:QP

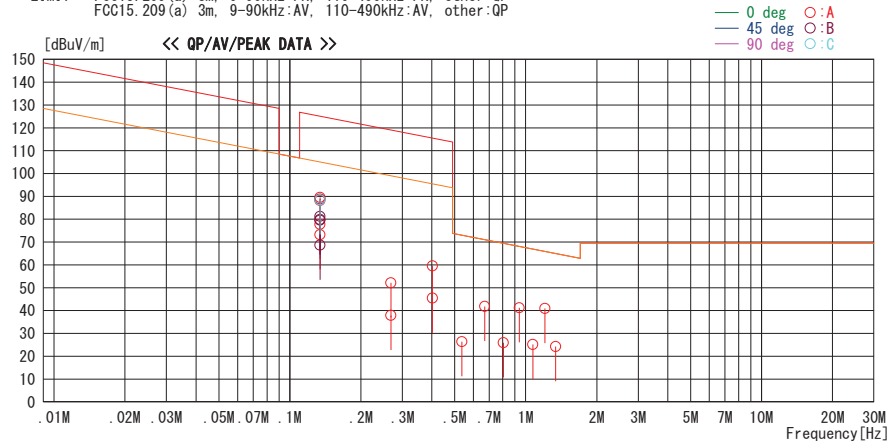

| Freq.   | Reading | DET  | Ant. Fac | Loss | Gain | Result   | Limit    | Margin | Antenna | Table | Comment |
|---------|---------|------|----------|------|------|----------|----------|--------|---------|-------|---------|
| [MHz]   | [dBuV]  |      | [dB/m]   | [dB] | [dB] | [dBuV/m] | [dBuV/m] | [dB]   | [deg]   | [deg] |         |
| 0.13420 | 96.5    | PEAK | 19.2     | 6.0  | 32.2 | 89.5     | 125.1    | 35.6   | 0       | A     | 3       |
| 0.13420 | 95.8    | PEAK | 19.2     | 6.0  | 32.2 | 88.8     | 125.1    | 36.3   | 45      | B     | 322     |
| 0.13420 | 95.5    | PEAK | 19.2     | 6.0  | 32.2 | 88.5     | 125.1    | 36.6   | 90      | C     | 49      |
| 0.13420 | 95.2    | PEAK | 19.2     | 6.0  | 32.2 | 88.2     | 125.1    | 36.9   | 135     | A     | 3       |
| 0.13420 | 88.2    | AV   | 19.2     | 6.0  | 32.2 | 81.2     | 105.1    | 23.9   | 0       | B     | 322     |
| 0.13420 | 86.5    | AV   | 19.2     | 6.0  | 32.2 | 79.5     | 105.1    | 25.6   | 45      | B     | 322     |
| 0.13420 | 84.7    | AV   | 19.2     | 6.0  | 32.2 | 77.7     | 105.1    | 27.4   | 90      | A     | 3       |
| 0.13420 | 86.9    | AV   | 19.2     | 6.0  | 32.2 | 79.9     | 105.1    | 25.2   | 135     | B     | 322     |
| 0.13420 | 80.2    | PEAK | 19.2     | 6.0  | 32.2 | 73.2     | 125.1    | 51.9   | 135     | A     | 3       |
| 0.13420 | 75.6    | AV   | 19.2     | 6.0  | 32.2 | 68.6     | 105.1    | 36.5   | 135     | B     | 322     |
| 0.26840 | 59.2    | PEAK | 19.1     | 6.1  | 32.2 | 52.2     | 119.0    | 66.8   | 0       | A     | 5       |
| 0.26840 | 44.9    | AV   | 19.1     | 6.1  | 32.2 | 37.9     | 99.0     | 61.1   | 0       | A     | 5       |
| 0.40260 | 66.5    | PEAK | 19.1     | 6.1  | 32.2 | 59.5     | 115.5    | 56.0   | 0       | A     | 8       |
| 0.40260 | 52.4    | AV   | 19.1     | 6.1  | 32.2 | 45.4     | 95.5     | 50.1   | 0       | A     | 8       |
| 0.53680 | 33.4    | QP   | 19.1     | 6.1  | 32.2 | 26.4     | 73.0     | 46.6   | 0       | A     | 9       |
| 0.67100 | 48.7    | QP   | 19.2     | 6.1  | 32.2 | 41.8     | 71.1     | 29.3   | 0       | A     | 356     |
| 0.80520 | 32.9    | QP   | 19.2     | 6.1  | 32.2 | 26.0     | 69.5     | 43.5   | 0       | A     | 347     |
| 0.93940 | 48.1    | QP   | 19.2     | 6.1  | 32.2 | 41.2     | 68.1     | 26.9   | 0       | A     | 21      |
| 1.07360 | 32.1    | QP   | 19.1     | 6.1  | 32.2 | 25.1     | 66.9     | 41.8   | 0       | A     | 26      |
| 1.20780 | 47.9    | QP   | 19.1     | 6.2  | 32.2 | 41.0     | 65.9     | 24.9   | 0       | A     | 31      |
| 1.34200 | 31.1    | QP   | 19.1     | 6.2  | 32.2 | 24.2     | 65.0     | 40.8   | 0       | A     | 31      |

CHART: WITH FACTOR, ANT TYPE: LOOP. Except for the data below: adequate margin data below the limits.  
CALCULATION: RESULT = READING + ANT FACTOR + LOSS(CABLE + ATTEN.) - GAIN(AMP.)

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission below 30MHz (Fundamental and Spurious Emission)**  
**Room Antenna / Luggage Antenna Maximum Output**

**DATA OF RADIATED EMISSION TEST**


UL Japan, Inc. Head Office EMC Lab. No. 3 Semi Anechoic Chamber  
Date : 2012/11/15

Report No. : 4786000715H

Temp./ Humi. : 22deg. C / 41% RH  
Engineer : Tomotaka Sasagawa

Mode / Remarks : Tx 134.2kHz, Normal Modulation, Room Antenna, Worst axis (Antenna: X)

LIMIT : FCC15.209(a) 3m, 9-90kHz:PK, 110-490kHz:PK, other:QP  
FCC15.209(a) 3m, 9-90kHz:AV, 110-490kHz:AV, other:QP

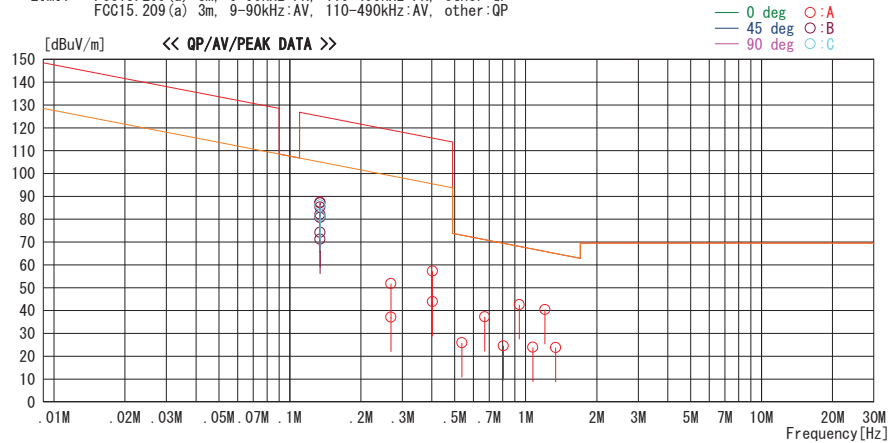

| Freq.   | Reading | DET  | Ant. Fac | Loss | Gain | Result   | Limit    | Margin | Antenna | Table | Comment |
|---------|---------|------|----------|------|------|----------|----------|--------|---------|-------|---------|
| [MHz]   | [dBuV]  |      | [dB/m]   | [dB] | [dB] | [dBuV/m] | [dBuV/m] | [dB]   | [deg]   | [deg] |         |
| 0.13420 | 94.5    | PEAK | 19.2     | 6.0  | 32.2 | 87.5     | 125.1    | 37.6   | 0       | A     | 94      |
| 0.13420 | 94.1    | PEAK | 19.2     | 6.0  | 32.2 | 87.1     | 125.1    | 38.0   | 45      | B     | 133     |
| 0.13420 | 93.2    | PEAK | 19.2     | 6.0  | 32.2 | 86.2     | 125.1    | 38.9   | 90      | C     | 81      |
| 0.13420 | 88.2    | AV   | 19.2     | 6.0  | 32.2 | 81.2     | 105.1    | 23.9   | 90      | C     | 81      |
| 0.13420 | 89.2    | AV   | 19.2     | 6.0  | 32.2 | 82.2     | 105.1    | 22.9   | 45      | B     | 133     |
| 0.13420 | 88.0    | AV   | 19.2     | 6.0  | 32.2 | 81.0     | 105.1    | 24.1   | 0       | A     | 94      |
| 0.13420 | 92.3    | PEAK | 19.2     | 6.0  | 32.2 | 85.3     | 125.1    | 39.8   | 135     | B     | 132     |
| 0.13420 | 87.8    | AV   | 19.2     | 6.0  | 32.2 | 80.8     | 105.1    | 24.3   | 135     | B     | 132     |
| 0.13420 | 81.2    | PEAK | 19.2     | 6.0  | 32.2 | 74.2     | 125.1    | 50.9   | 135     | B     | 133     |
| 0.13420 | 78.2    | AV   | 19.2     | 6.0  | 32.2 | 71.2     | 105.1    | 33.9   | 135     | B     | 133     |
| 0.26840 | 58.9    | PEAK | 19.1     | 6.1  | 32.2 | 51.9     | 119.0    | 67.1   | 0       | A     | 0       |
| 0.26840 | 44.2    | AV   | 19.1     | 6.1  | 32.2 | 37.2     | 99.0     | 61.8   | 0       | A     | 0       |
| 0.40260 | 64.3    | PEAK | 19.1     | 6.1  | 32.2 | 57.3     | 115.5    | 58.2   | 0       | A     | 357     |
| 0.40260 | 51.0    | AV   | 19.1     | 6.1  | 32.2 | 44.0     | 95.5     | 51.5   | 0       | A     | 357     |
| 0.53680 | 32.9    | QP   | 19.1     | 6.1  | 32.2 | 25.9     | 73.0     | 47.1   | 0       | A     | 4       |
| 0.67100 | 44.2    | QP   | 19.2     | 6.1  | 32.2 | 37.3     | 71.1     | 33.8   | 0       | A     | 30      |
| 0.80520 | 31.4    | QP   | 19.2     | 6.1  | 32.2 | 24.5     | 69.5     | 45.0   | 0       | A     | 355     |
| 0.93940 | 49.5    | QP   | 19.2     | 6.1  | 32.2 | 42.6     | 68.1     | 25.5   | 0       | A     | 241     |
| 1.07360 | 30.9    | QP   | 19.1     | 6.1  | 32.2 | 23.9     | 66.9     | 43.0   | 0       | A     | 218     |
| 1.20780 | 47.3    | QP   | 19.1     | 6.2  | 32.2 | 40.4     | 65.9     | 25.5   | 0       | A     | 218     |
| 1.34200 | 30.7    | QP   | 19.1     | 6.2  | 32.2 | 23.8     | 65.0     | 41.2   | 0       | A     | 218     |

CHART: WITH FACTOR, ANT TYPE: LOOP. Except for the data below: adequate margin data below the limits.  
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE + ATTEN.) - GAIN (AMP.)

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission below 30MHz (Fundamental and Spurious Emission)**  
**Room Antenna / Luggage Antenna Minimum Output**

**DATA OF RADIATED EMISSION TEST**


UL Japan, Inc. Head Office EMC Lab. No. 3 Semi Anechoic Chamber  
Date : 2012/11/15

Report No. : 4786000715H

Temp./ Humi. : 22deg. C / 41% RH  
Engineer : Tomotaka Sasagawa

Mode / Remarks : Tx 134.2kHz, Normal Modulation, Room Antenna, Worst axis (Antenna: X)

LIMIT : FCC15.209(a) 3m, 9-90kHz:PK, 110-490kHz:PK, other:QP  
FCC15.209(a) 3m, 9-90kHz:AV, 110-490kHz:AV, other:QP

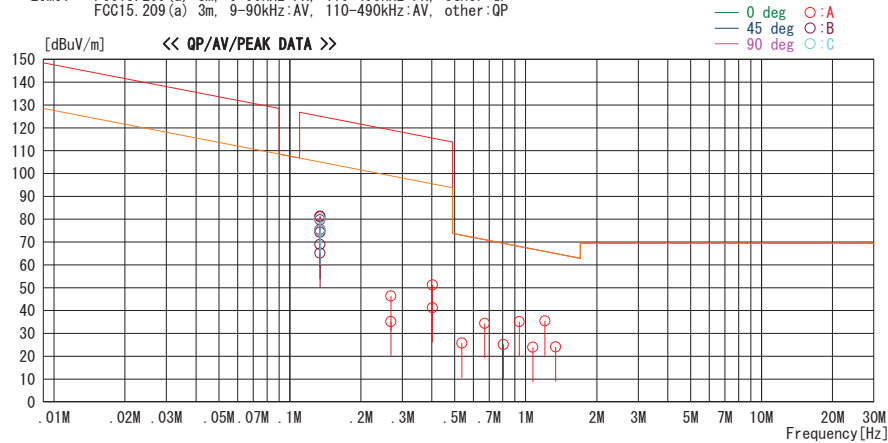

| Freq.   | Reading | DET  | Ant. Fac | Loss | Gain | Result   | Limit    | Margin | Antenna | Table | Comment |
|---------|---------|------|----------|------|------|----------|----------|--------|---------|-------|---------|
| [MHz]   | [dBuV]  |      | [dB/m]   | [dB] | [dB] | [dBuV/m] | [dBuV/m] | [dB]   | [deg]   | [deg] |         |
| 0.13420 | 88.4    | PEAK | 19.2     | 6.0  | 32.2 | 81.4     | 125.1    | 43.7   | 0       | A     | 94      |
| 0.13420 | 88.1    | PEAK | 19.2     | 6.0  | 32.2 | 81.1     | 125.1    | 44.0   | 45      | B     | 133     |
| 0.13420 | 87.2    | PEAK | 19.2     | 6.0  | 32.2 | 80.2     | 125.1    | 44.9   | 90      | C     | 81      |
| 0.13420 | 82.1    | AV   | 19.2     | 6.0  | 32.2 | 75.1     | 105.1    | 30.0   | 90      | C     | 81      |
| 0.13420 | 82.4    | AV   | 19.2     | 6.0  | 32.2 | 75.4     | 105.1    | 29.7   | 45      | B     | 133     |
| 0.13420 | 82.0    | AV   | 19.2     | 6.0  | 32.2 | 75.0     | 105.1    | 30.1   | 0       | A     | 94      |
| 0.13420 | 86.7    | PEAK | 19.2     | 6.0  | 32.2 | 79.7     | 125.1    | 45.4   | 135     | B     | 132     |
| 0.13420 | 81.2    | AV   | 19.2     | 6.0  | 32.2 | 74.2     | 105.1    | 30.9   | 135     | B     | 132     |
| 0.13420 | 76.0    | PEAK | 19.2     | 6.0  | 32.2 | 69.0     | 125.1    | 56.1   | 135     | B     | 133     |
| 0.13420 | 72.2    | AV   | 19.2     | 6.0  | 32.2 | 65.2     | 105.1    | 39.9   | 135     | B     | 133     |
| 0.26840 | 53.3    | PEAK | 19.1     | 6.1  | 32.1 | 46.4     | 119.0    | 72.6   | 0       | A     | 0       |
| 0.26840 | 42.0    | AV   | 19.1     | 6.1  | 32.1 | 35.1     | 99.0     | 63.9   | 0       | A     | 0       |
| 0.40260 | 58.2    | PEAK | 19.1     | 6.1  | 32.1 | 51.3     | 115.5    | 64.2   | 0       | A     | 357     |
| 0.40260 | 48.2    | AV   | 19.1     | 6.1  | 32.1 | 41.3     | 95.5     | 54.2   | 0       | A     | 357     |
| 0.53680 | 32.7    | QP   | 19.1     | 6.1  | 32.1 | 25.8     | 73.0     | 47.2   | 0       | A     | 4       |
| 0.67100 | 41.2    | QP   | 19.2     | 6.1  | 32.1 | 34.4     | 71.1     | 36.7   | 0       | A     | 30      |
| 0.80520 | 31.9    | QP   | 19.2     | 6.1  | 32.1 | 25.1     | 69.5     | 44.4   | 0       | A     | 355     |
| 0.93940 | 42.0    | QP   | 19.2     | 6.1  | 32.1 | 35.2     | 68.1     | 32.9   | 0       | A     | 241     |
| 1.07360 | 30.8    | QP   | 19.1     | 6.1  | 32.1 | 23.9     | 66.9     | 43.0   | 0       | A     | 218     |
| 1.20780 | 42.2    | QP   | 19.1     | 6.2  | 32.1 | 35.4     | 65.9     | 30.5   | 0       | A     | 218     |
| 1.34200 | 30.9    | QP   | 19.1     | 6.2  | 32.1 | 24.1     | 65.0     | 40.9   | 0       | A     | 218     |

CHART: WITH FACTOR, ANT TYPE: LOOP. Except for the data below: adequate margin data below the limits.  
CALCULATION: RESULT = READING + ANT FACTOR + LOSS (CABLE + ATTEN.) - GAIN (AMP.)

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission above 30MHz (Spurious Emission)**  
**Door Antenna**

**DATA OF RADIATED EMISSION TEST**


UL Japan, Inc. Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2012/11/15

Report No. : 4786000715H

Temp./Humi. : 22deg. C / 41% RH  
Engineer : Tomtoaka Sasagawa

Mode / Remarks : Tx 134.2KHz , Normal Moduration , Door-ANT Worst-Axis(Hori:X , Vert:X)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK  
All other spurious emissions were less than 20dB for the limit.

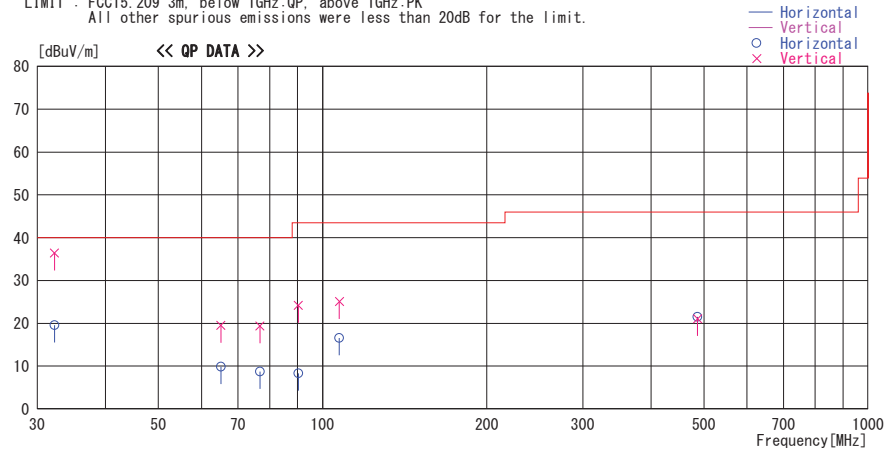

| Frequency | Reading | DET | Antenna Factor | Loss& Gain | Level    | Angle | Height | Polar. | Limit    | Margin | Comment |
|-----------|---------|-----|----------------|------------|----------|-------|--------|--------|----------|--------|---------|
| [MHz]     | [dBuV]  |     | [dB/m]         | [dB]       | [dBuV/m] | [Deg] | [cm]   |        | [dBuV/m] | [dB]   |         |
| 32.250    | 27.5    | QP  | 17.2           | -25.1      | 19.6     | 113   | 300    | Hori.  | 40.0     | 20.4   |         |
| 32.250    | 44.3    | QP  | 17.2           | -25.1      | 36.4     | 264   | 100    | Vert.  | 40.0     | 3.6    |         |
| 65.100    | 27.2    | QP  | 7.2            | -24.5      | 9.9      | 2     | 300    | Hori.  | 40.0     | 30.1   |         |
| 65.100    | 36.8    | QP  | 7.2            | -24.5      | 19.5     | 146   | 100    | Vert.  | 40.0     | 20.5   |         |
| 76.800    | 26.5    | QP  | 6.5            | -24.3      | 8.7      | 359   | 268    | Hori.  | 40.0     | 31.3   |         |
| 76.800    | 37.2    | QP  | 6.5            | -24.3      | 19.4     | 280   | 100    | Vert.  | 40.0     | 20.6   |         |
| 90.300    | 24.3    | QP  | 8.2            | -24.2      | 8.3      | 335   | 300    | Hori.  | 43.5     | 35.2   |         |
| 90.300    | 40.2    | QP  | 8.2            | -24.2      | 24.2     | 77    | 100    | Vert.  | 43.5     | 19.3   |         |
| 107.400   | 29.5    | QP  | 11.2           | -24.1      | 16.6     | 347   | 300    | Hori.  | 43.5     | 26.9   |         |
| 107.400   | 38.0    | QP  | 11.2           | -24.1      | 25.1     | 280   | 100    | Vert.  | 43.5     | 18.4   |         |
| 486.665   | 24.3    | QP  | 18.0           | -20.8      | 21.5     | 84    | 100    | Hori.  | 46.0     | 24.5   |         |
| 486.665   | 23.9    | QP  | 18.0           | -20.8      | 21.1     | 10    | 100    | Vert.  | 46.0     | 24.9   |         |

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN  
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission above 30MHz (Spurious Emission)**  
**Trunk Antenna**

**DATA OF RADIATED EMISSION TEST**


UL Japan, Inc. Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2012/11/15

Report No. : 4786000715H

Temp./Humi. : 22deg. C / 41% RH  
Engineer : Tomtoaka Sasagawa

Mode / Remarks : Tx 134.2KHz , Normal Moduration , Trunk-ANT Worst-Axis(Hori:X , Vert:X)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK  
All other spurious emissions were less than 20dB for the limit.

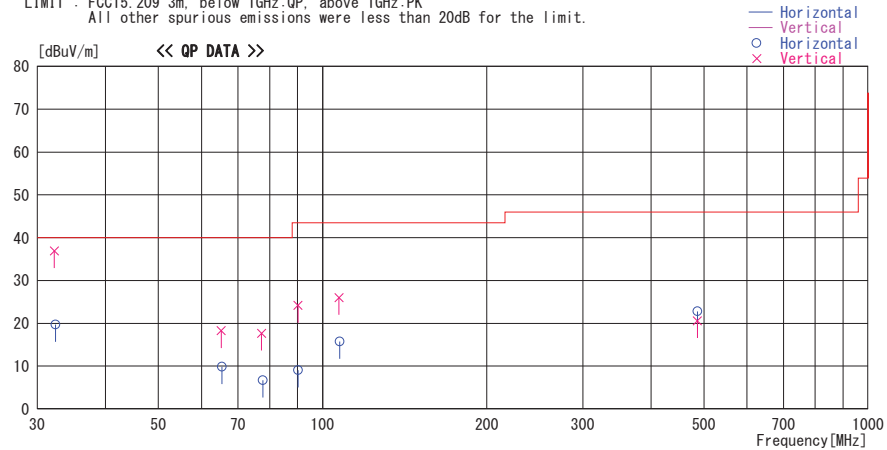

| Frequency | Reading | DET | Antenna<br>Factor | Loss&<br>Gain | Level    | Angle | Height | Polar. | Limit    | Margin | Comment |
|-----------|---------|-----|-------------------|---------------|----------|-------|--------|--------|----------|--------|---------|
| [MHz]     | [dBuV]  |     | [dB/m]            | [dB]          | [dBuV/m] | [Deg] | [cm]   |        | [dBuV/m] | [dB]   |         |
| 32.420    | 27.7    | QP  | 17.1              | -25.1         | 19.7     | 113   | 300    | Hori.  | 40.0     | 20.3   |         |
| 32.242    | 44.8    | QP  | 17.2              | -25.1         | 36.9     | 264   | 100    | Vert.  | 40.0     | 3.1    |         |
| 65.421    | 27.2    | QP  | 7.2               | -24.5         | 9.9      | 2     | 300    | Hori.  | 40.0     | 30.1   |         |
| 65.231    | 35.6    | QP  | 7.2               | -24.5         | 18.3     | 146   | 100    | Vert.  | 40.0     | 21.7   |         |
| 77.774    | 24.5    | QP  | 6.4               | -24.2         | 6.7      | 219   | 300    | Hori.  | 40.0     | 33.3   |         |
| 77.321    | 35.6    | QP  | 6.4               | -24.3         | 17.7     | 275   | 100    | Vert.  | 40.0     | 22.3   |         |
| 90.231    | 25.1    | QP  | 8.2               | -24.2         | 9.1      | 335   | 300    | Hori.  | 43.5     | 34.4   |         |
| 90.211    | 40.2    | QP  | 8.2               | -24.2         | 24.2     | 77    | 100    | Vert.  | 43.5     | 19.3   |         |
| 107.421   | 28.7    | QP  | 11.2              | -24.1         | 15.8     | 347   | 300    | Hori.  | 43.5     | 27.7   |         |
| 107.231   | 38.9    | QP  | 11.2              | -24.1         | 26.0     | 280   | 100    | Vert.  | 43.5     | 17.5   |         |
| 486.421   | 25.6    | QP  | 18.0              | -20.8         | 22.8     | 84    | 100    | Hori.  | 46.0     | 23.2   |         |
| 486.442   | 23.4    | QP  | 18.0              | -20.8         | 20.6     | 10    | 100    | Vert.  | 46.0     | 25.4   |         |

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN  
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission above 30MHz (Spurious Emission)**  
**Room Antenna / Luggage Antenna Maximum Output**

**DATA OF RADIATED EMISSION TEST**


UL Japan, Inc. Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2012/11/15

Report No. : 4786000715H

Temp./Humi. : 22deg. C / 41% RH  
Engineer : Tomtoaka Sasagawa

Mode / Remarks : Tx 134.2KHz , Normal Moduration , Room-ANT Worst-Axis(Hori:X , Vert:X)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK  
All other spurious emissions were less than 20dB for the limit.

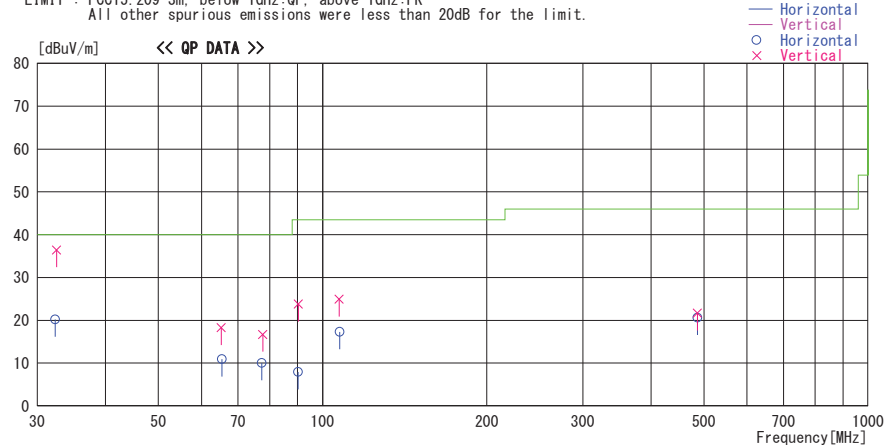

| Frequency | Reading | DET | Antenna Factor | Loss& Gain | Level    | Angle | Height | Polar. | Limit    | Margin | Comment |
|-----------|---------|-----|----------------|------------|----------|-------|--------|--------|----------|--------|---------|
| [MHz]     | [dBuV]  |     | [dB/m]         | [dB]       | [dBuV/m] | [Deg] | [cm]   |        | [dBuV/m] | [dB]   |         |
| 32.340    | 28.2    | QP  | 17.1           | -25.1      | 20.2     | 113   | 300    | Hori.  | 40.0     | 19.8   |         |
| 32.540    | 44.6    | QP  | 17.0           | -25.1      | 36.5     | 264   | 100    | Vert.  | 40.0     | 3.6    |         |
| 65.212    | 35.6    | QP  | 7.2            | -24.5      | 18.3     | 146   | 100    | Vert.  | 40.0     | 21.7   |         |
| 65.432    | 28.2    | QP  | 7.2            | -24.5      | 10.9     | 2     | 300    | Hori.  | 40.0     | 29.1   |         |
| 77.421    | 27.8    | QP  | 6.4            | -24.2      | 10.0     | 5     | 300    | Hori.  | 40.0     | 30.0   |         |
| 77.721    | 34.5    | QP  | 6.4            | -24.2      | 16.7     | 159   | 100    | Vert.  | 40.0     | 23.3   |         |
| 90.210    | 23.9    | QP  | 8.2            | -24.2      | 7.9      | 335   | 300    | Hori.  | 43.5     | 35.6   |         |
| 90.321    | 39.8    | QP  | 8.2            | -24.2      | 23.8     | 77    | 100    | Vert.  | 43.5     | 19.7   |         |
| 107.321   | 37.8    | QP  | 11.2           | -24.1      | 24.9     | 280   | 100    | Vert.  | 43.5     | 18.6   |         |
| 107.421   | 30.2    | QP  | 11.2           | -24.1      | 17.3     | 347   | 300    | Hori.  | 43.5     | 26.2   |         |
| 486.322   | 24.5    | QP  | 18.0           | -20.8      | 21.7     | 10    | 100    | Vert.  | 46.0     | 24.3   |         |
| 486.421   | 23.4    | QP  | 18.0           | -20.8      | 20.6     | 84    | 100    | Hori.  | 46.0     | 25.4   |         |

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN  
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission above 30MHz (Spurious Emission)**  
**Room Antenna / Luggage Antenna Minimum Output**

**DATA OF RADIATED EMISSION TEST**


UL Japan, Inc. Head Office EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2012/11/15

Report No. : 4786000715H

Temp./Humi. : 22deg. C / 41% RH  
Engineer : Tomtoaka Sasagawa

Mode / Remarks : Tx 134.2KHz , Normal Moduration , Room-ANT Worst-Axis(Hori:X , Vert:X)

LIMIT : FCC15.209 3m, below 1GHz:QP, above 1GHz:PK  
All other spurious emissions were less than 20dB for the limit.

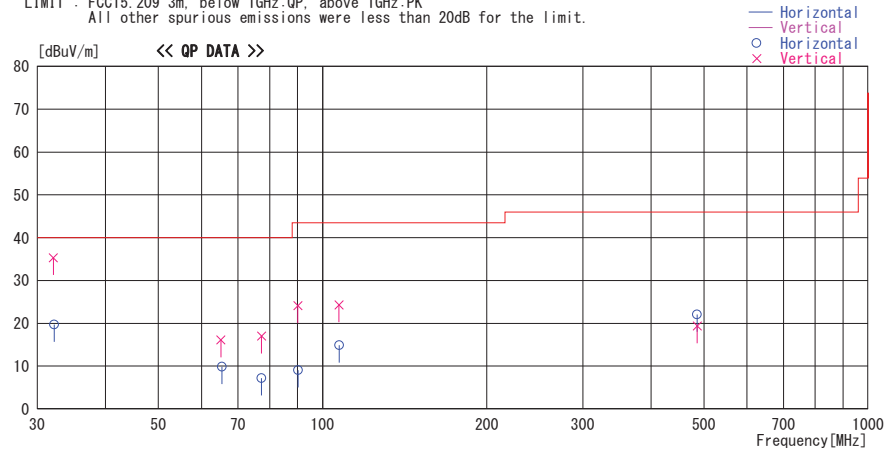

| Frequency | Reading | DET | Antenna Factor | Loss& Gain | Level    | Angle | Height | Polar. | Limit    | Margin | Comment |
|-----------|---------|-----|----------------|------------|----------|-------|--------|--------|----------|--------|---------|
| [MHz]     | [dBuV]  |     | [dB/m]         | [dB]       | [dBuV/m] | [Deg] | [cm]   |        | [dBuV/m] | [dB]   |         |
| 32.240    | 27.6    | QP  | 17.2           | -25.1      | 19.7     | 113   | 300    | Hori.  | 40.0     | 20.3   |         |
| 32.123    | 43.2    | QP  | 17.2           | -25.1      | 35.3     | 264   | 100    | Vert.  | 40.0     | 4.7    |         |
| 65.421    | 27.2    | QP  | 7.2            | -24.5      | 9.9      | 2     | 300    | Hori.  | 40.0     | 30.1   |         |
| 65.123    | 33.4    | QP  | 7.2            | -24.5      | 16.1     | 146   | 100    | Vert.  | 40.0     | 23.9   |         |
| 77.321    | 25.1    | QP  | 6.4            | -24.3      | 7.2      | 219   | 300    | Hori.  | 40.0     | 32.8   |         |
| 77.321    | 34.9    | QP  | 6.4            | -24.3      | 17.0     | 275   | 100    | Vert.  | 40.0     | 23.0   |         |
| 90.212    | 25.1    | QP  | 8.2            | -24.2      | 9.1      | 335   | 300    | Hori.  | 43.5     | 34.4   |         |
| 90.123    | 40.1    | QP  | 8.2            | -24.2      | 24.1     | 77    | 100    | Vert.  | 43.5     | 19.4   |         |
| 107.321   | 27.8    | QP  | 11.2           | -24.1      | 14.9     | 347   | 300    | Hori.  | 43.5     | 28.6   |         |
| 107.224   | 37.2    | QP  | 11.2           | -24.1      | 24.3     | 280   | 100    | Vert.  | 43.5     | 19.2   |         |
| 486.241   | 24.9    | QP  | 18.0           | -20.8      | 22.1     | 84    | 100    | Hori.  | 46.0     | 23.9   |         |
| 486.224   | 22.2    | QP  | 18.0           | -20.8      | 19.4     | 10    | 100    | Vert.  | 46.0     | 26.6   |         |

CHART:WITH FACTOR ANT TYPE: -30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN  
CALCULATION:RESULT = READING + ANT FACTOR + LOSS(CABLE+ATTEN.) - GAIN(AMP)

\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**-26dB Bandwidth and 99% Occupied Bandwidth**  
**Door Antenna**

UL Japan, Inc.  
Head Office EMC Lab. No.3 Semi Anechoic Chamber


MODEL : TMLF10-50  
S/ N : 21  
POWER : DC 12.0V  
MODE : Tx  
: Door Antenna

REPORT NO : 4786000715H  
REGULATION : -/RSS-Gen 4.6.1  
TEST DISTANCE : 3m  
DATE : 11/15/2012  
TEMPERATURE : 22deg. C  
HUMIDITY : 33% RH  
Engineer : Motoya Imura

| FREQ  | -26dB Bandwidth | 99% Occupied Bandwidth |
|-------|-----------------|------------------------|
| [kHz] | [kHz]           | [kHz]                  |
| 134.2 | 30.509          | 31.218                 |

Agilent

R T

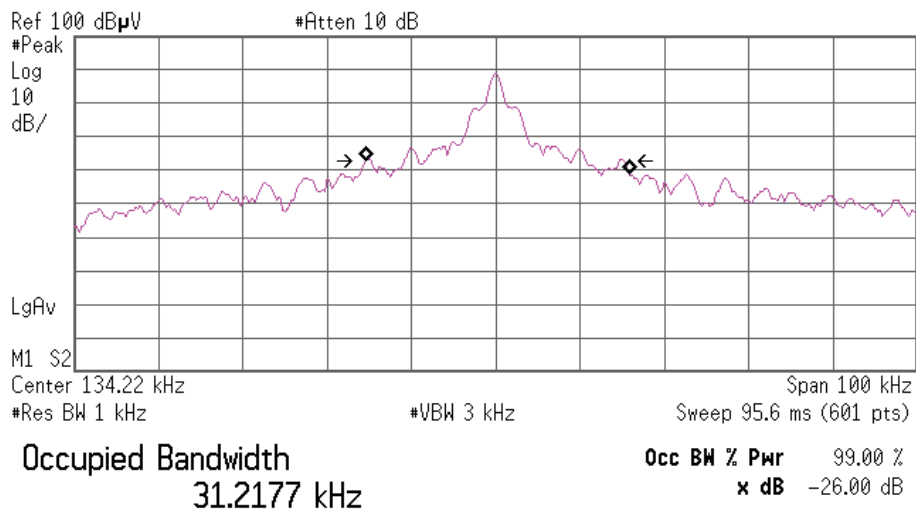

Transmit Freq Error 186.578 Hz  
Occupied Bandwidth 30.509 kHz

**-26dB Bandwidth and 99% Occupied Bandwidth**  
**Trunk Antenna**

UL Japan, Inc.  
Head Office EMC Lab. No.3 Semi Anechoic Chamber


MODEL : TMLF10-50  
S/N : 21  
POWER : DC 12.0V  
MODE : Tx  
Trunk Antenna

REPORT NO : 4786000715H  
REGULATION : -/RSS-Gen 4.6.1  
TEST DISTANCE : 3m  
DATE : 11/15/2012  
TEMPERATURE : 22deg. C  
HUMIDITY : 33% RH  
Engineer : Motoya Imura

| FREQ  | -26dB Bandwidth | 99% Occupied Bandwidth |
|-------|-----------------|------------------------|
| [kHz] | [kHz]           | [kHz]                  |
| 134.2 | 26.048          | 33.305                 |

Agilent

R T

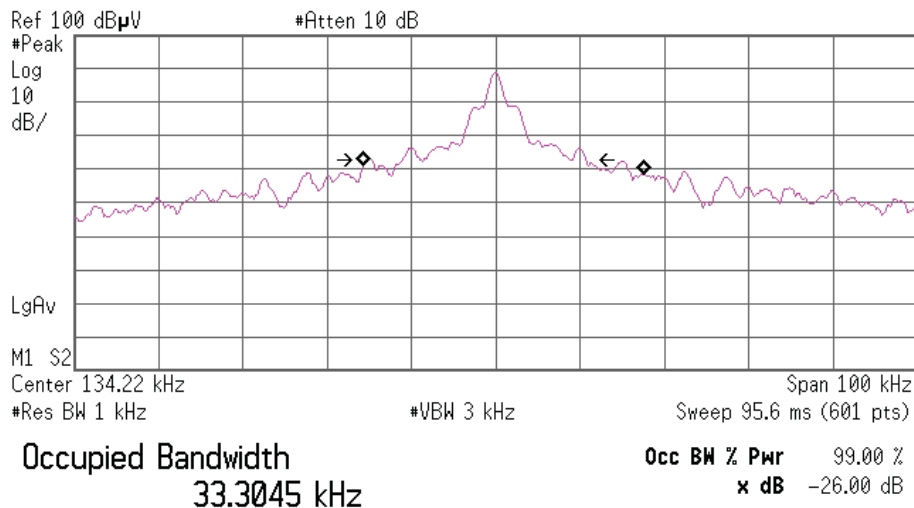

Transmit Freq Error 931.692 Hz  
Occupied Bandwidth 26.048 kHz


**-26dB Bandwidth and 99% Occupied Bandwidth**  
**Room Antenna / Luggage Antenna**

UL Japan, Inc.  
Head Office EMC Lab. No.3 Semi Anechoic Chamber

MODEL : TMLF10-50  
S/N : 21  
POWER : DC 12.0V  
MODE : Tx  
: Room / Luggage Antenna

REPORT NO : 4786000715H  
REGULATION : -/RSS-Gen 4.6.1  
TEST DISTANCE : 3m  
DATE : 11/15/2012  
TEMPERATURE : 22deg. C  
HUMIDITY : 33% RH  
Engineer : Motoya Imura

| FREQ  | -26dB Bandwidth | 99% Occupied Bandwidth |
|-------|-----------------|------------------------|
| [kHz] | [kHz]           | [kHz]                  |
| 134.2 | 21.339          | 31.109                 |

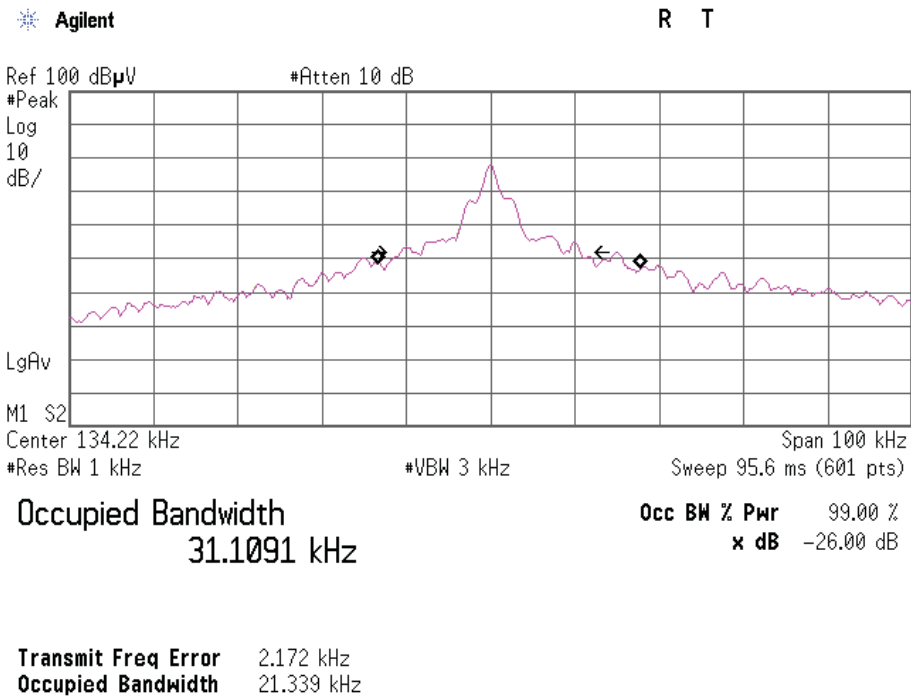

### APPENDIX 3: Test instruments

#### EMI test equipment

| Control No. | Instrument                 | Manufacturer        | Model No                                                                  | Serial No | Test Item | Calibration Date *<br>Interval(month) |
|-------------|----------------------------|---------------------|---------------------------------------------------------------------------|-----------|-----------|---------------------------------------|
| MAEC-03     | Semi Anechoic Chamber(NSA) | TDK                 | Semi Anechoic Chamber 3m                                                  | DA-10005  | RE        | 2012/02/24 * 12                       |
| MOS-13      | Thermo-Hygrometer          | Custom              | CTH-180                                                                   | -         | RE        | 2012/02/06 * 12                       |
| MJM-16      | Measure                    | KOMELON             | KMC-36                                                                    | -         | RE        | -                                     |
| COTS-MEMI   | EMI measurement program    | TSJ                 | TEPTO-DV                                                                  | -         | RE        | -                                     |
| MSA-05      | Spectrum Analyzer          | Advantest           | R3273                                                                     | 160400285 | RE        | 2011/11/23 * 12                       |
| MTR-08      | Test Receiver              | Rohde & Schwarz     | ESCI                                                                      | 100767    | RE        | 2012/08/23 * 12                       |
| MLPA-01     | Loop Antenna               | Rohde & Schwarz     | HFH2-Z2                                                                   | 100017    | RE        | 2012/10/12 * 12                       |
| MCC-112     | Coaxial cable              | Fujikura/Suhner/TSJ | 5D-2W(10m)/SFM141(3m)/sucoform141-PE(1m)/421-010(1.5m)/RFM-E321(Switcher) | -/00640   | RE        | 2012/07/12 * 12                       |
| MCC-143     | Coaxial Cable              | UL Japan            | -                                                                         | -         | RE        | 2012/07/27 * 12                       |
| MPA-13      | Pre Amplifier              | SONOMA INSTRUMENT   | 310                                                                       | 260834    | RE        | 2012/03/16 * 12                       |
| MAT-09      | Attenuator(6dB)            | Weinschel Corp      | 2                                                                         | BK7973    | RE        | 2012/11/06 * 12                       |
| MBA-03      | Biconical Antenna          | Schwarzbeck         | BBA9106                                                                   | 1915      | RE        | 2012/10/08 * 12                       |
| MLA-03      | Logperiodic Antenna        | Schwarzbeck         | USLP9143                                                                  | 174       | RE        | 2012/10/08 * 12                       |
| MCC-51      | Coaxial cable              | UL Japan            | -                                                                         | -         | RE        | 2012/07/12 * 12                       |

The expiration date of the calibration is the end of the expired month.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

Test Item:

RE: Spurious emission

End of Report

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124