



FCC ID:NI4TMLF8-15

EMI -- TEST REPORT

- FCC Part 15.209 -

Test Report No. :	T32902-00-02KG	16. November 2008
<hr/>		Date of issue

Type / Model Name : TMLF8-15

Product Description : Smart LF Oscillator

Applicant : Toyota Motor Corporation

Address : 1, Toyota-Cho

Toyota, Aichi, 471-8572 Japan

Manufacturer : Toyota Motor Corporation

Address : 1, Toyota-Cho

Toyota, Aichi, 471-8572 Japan

Licence holder : Toyota Motor Corporation

Address : 1, Toyota-Cho

Toyota, Aichi, 471-8572 Japan

Test Result according to the standards listed in clause 1 test standards:
POSITIVE



DAT-P-207/05-00

FCC ID:NI4TMLF8-15

Contents

1 TEST STANDARDS	3
2 SUMMARY	4
3 EQUIPMENT UNDER TEST	5
3.1 POWER SUPPLY SYSTEM UTILISED	5
3.2 SHORT DESCRIPTION OF THE EQUIPMENT UNDER TEST (EUT)	5
4 TEST ENVIRONMENT	6
4.1 ADDRESS OF THE TEST LABORATORY	6
4.2 ENVIRONMENTAL CONDITIONS	6
4.3 STATEMENT OF THE MEASUREMENT UNCERTAINTY	6
4.4 MEASUREMENT PROTOCOL FOR FCC, VCCI AND AUSTEL	6
4.5 DETERMINATION OF WORST CASE MEASUREMENT CONDITIONS	7
5 TEST CONDITIONS AND RESULTS	8
5.1 CONDUCTED EMISSIONS	8
5.2 FIELD STRENGTH OF THE FUNDAMENTAL WAVE	9
5.3 SPURIOUS EMISSIONS (MAGNETIC FIELD) 9 KHz – 30 MHz	12
5.4 RADIATED EMISSIONS (ELECTRIC FIELD) 30 MHz – 1 GHz	16
5.5 EMISSION BANDWIDTH	18
6 USED TEST EQUIPMENT AND ACCESSORIES	20

PHOTO DOCUMENTATION OF THE EUT

ATTACHMENT A

FCC ID:NI4TMLF8-15

1 TEST STANDARDS

The tests were performed according to following standards:

FCC Rules and Regulations Part 15 Subpart C- Intentional Radiators (October 01, 2007)

Part 15, Subpart C, Section 15.209

Radiated emissions, general requirements

mikes

FCC ID:NI4TMLF8-15

2 SUMMARY

GENERAL REMARKS:

None

FINAL ASSESSMENT:

The equipment under test **fulfills** the EMI requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : September 03, 2008

Testing concluded on : September 09, 2008

Checked by:

Thomas Weise
Dipl.-Ing.(FH)
Laboratory Manager

Tested by:

Klaus Gegenfurtner
Dipl.-Ing.(FH)

3 EQUIPMENT UNDER TEST

3.1 Power supply system utilised

Power supply voltage : 12 V / DC

3.2 Short description of the Equipment under Test (EuT)

The Smart LF Oscillator TMLF8-15 is a transmitter installed in a motor vehicle and is used as part of the Smart System. In the System, the Smart LF Oscillator has mainly following functions:

- Smart Door Unlocking
Door antennas transmit a low frequency at 134.2 kHz intermittently. An electronic key, carried by the driver, will transmit a high radio wave when recognized the signal.
- Smart Trunk Unlocking
The trunk antenna provides the signal for the electronic key to open the trunk.
- Detection of Electronic Key inside Trunk.
If the driver tries to close the trunk, the inside trunk antenna transmit a radio wave of 134.2 KHz. The key left inside the trunk will recognize the signal and transmits a high radio frequency back to alarm the driver.
- Smart Engine Start
When the driver is inside the car the inside Room Antenna transmits a radio wave of 134.2 kHz. If the electronic key recognize the signal it transmits a high radio frequency back to trigger the engine start mechanism.

The tests were performed on three antenna types in conjunction with Computer Assy (ECU):

1. Door antenna
2. Room antenna / Luggage antenna
3. Trunk antenna

Number of tested samples: 1

EuT operation mode:

The equipment under test was operated during the measurement under the following conditions:

- Transmit mode CW (unmodulated)

- Transmit mode modulated

EuT configuration:

(The CDF filled by the applicant can be viewed at the test laboratory.)

The following peripheral devices and interface cables were connected during the measurements:

- Test box
- Door antenna
- Room antenna
- Trunk antenna
-

Model : Supplied by the manufacturer

Model :

Model : 8RA and 8RB

Model : 8TA

Model :

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

mikes-testingpartners gmbh
Ohmstrasse 2-4
94342 STRASSKIRCHEN
GERMANY

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15-35 ° C

Humidity: 30-60 %

Atmospheric pressure: 86-106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader may notice that tolerances within the calibration of the equipment and facilities may cause additional uncertainty. The measurement uncertainty is calculated for all measurements listed in this test report acc. to CISPR 16-4-2 „Uncertainties, statistics and limit modelling – Uncertainty in EMC measurement“ and documented in the mikes-testingpartners gmbh quality system acc. to DIN EN ISO/IEC 17025. For all measurements shown in this report, the measurement uncertainty of the test laboratory, mikes-testingpartners gmbh, is below the measurement uncertainty as defined by CISPR. Therefore, no special measures must be taken into consideration with regard to the limits according to CISPR. Furthermore, component diversity and modifications in production process of devices may result in additional deviation. If necessary, refer to the test lab for the actual measurement uncertainty for the specific test. The manufacturer has the sole responsibility of continued compliance of the EUT.

4.4 Measurement Protocol for FCC, VCCI and AUSTEL

4.4.1 GENERAL INFORMATION

4.4.1.1 Test Methodology

Conducted and radiated disturbance testing is performed according to the procedures set out by the International Special Committee on Radio Interference (CISPR) Publication 22, European Standard EN 55022 as shown under section 1 of this report.

The test methods used comply with CISPR Publication 22, EN 55022 - "Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement" and with ANSI C63.4 - "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz."

FCC ID:NI4TMLF8-15

In compliance with 47 CFR Part 15 Subpart A Section 15.38 testing for FCC compliance may be done following the ANSI C63.4-2003 procedures and using the CISPR 22 Limits.

4.4.1.2 Justification

The Equipment Under Test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions. A cable is connected to each available port and either terminated with a peripheral using the appropriate impedance characteristic or left unterminated. Where appropriate, cables are manually manipulated with respect to each other thus obtaining maximum disturbances from the unit.

4.5 Determination of worst case measurement conditions

The tests were performed on two variants (8RA and 8RB) of the Room/Luggage antenna. The differences of the two types are the design of the external shape and the different resin type. Technically are the two types identical. The tests results of the two types were the same.

So in the report only from one Room/Luggage antenna type (8RA) the test results are described.

5 TEST CONDITIONS AND RESULTS

5.1 Conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: None

5.1.2 Photo documentation of the test set-up

5.1.3 Description of Measurement

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the EMI receiver. This level is compared directly to the FCC Limit or to the CISPR limit.

To convert between dB μ V and μ V, the following conversions apply:

$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EuT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω /50 μ H (CISPR 16) characteristics. Table top equipment is placed on a non-conducting table 80 centimeters above the floor and is positioned 40 centimeters from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are remeasured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

5.1.4 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin

Remarks: The test is not applicable because the EuT is battery powered.

5.2 Field strength of the fundamental wave

For test instruments and accessories used see section 6 Part **CPR 1**.

5.2.1 Description of the test location

Test location: OATS1
Test distance: 3 metres

5.2.2 Photo documentation of the test set-up



5.2.3 Description of Measurement

The magnetic field strength from the EuT will be measured on an open area test site in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in dB μ V/m, is arrived at by taking the reading from the EMI receiver (Level dB μ V) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	Limit (dB μ V/m)	=	Delta (dB)
1.705	5	+	20	=	25	30	=	5

5.2.4 Test result

a) Door antenna

Measurement distance: 3m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
134.2	76.4	76.3	76.2	20.0	96.4	96.3	96.2	105.0	-8.7

Calculated value at distance: 30m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
134.2	36.4	36.3	36.2	20.0	56.4	56.3	56.2	65.0	-8.7

Calculated value at distance: 300m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
134.2	-3.6	-3.7	-3.8	20.0	16.4	16.3	16.2	25.0	-8.7

FCC ID:NI4TMLF8-15
b) Room antenna
Measurement distance: 3m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
134.2	76.6	76.6	76.4	20.0	96.6	96.6	96.4	105.0	-8.4

Calculated value at distance: 30m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
134.2	36.6	36.6	36.4	20.0	56.6	56.6	56.4	65.0	-8.4

Calculated value at distance: 300m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
134.2	-3.4	-3.4	-3.6	20.0	16.6	16.6	16.4	25.0	-8.4

c) Trunk antenna
Measurement distance: 3m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
134.2	77.4	77.4	77.2	20.0	97.4	97.4	97.2	105.0	-7.6

Calculated value at distance: 30m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
134.2	37.4	37.4	37.2	20.0	57.4	57.4	57.2	65.0	-7.6

Calculated value at distance: 300m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
134.2	-2.6	-2.6	-2.8	20.0	17.4	17.4	17.2	25.0	-7.6

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of fundamental wave		Measurement distance (meters)
	(μ V/m)	dB (μ V/m)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.

Remarks: _____

5.3 Spurious emissions (Magnetic field) 9 kHz – 30 MHz


For test instruments and accessories used see section 6 Part **SER 1**.

5.3.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

5.3.2 Photo documentation of the test set-up

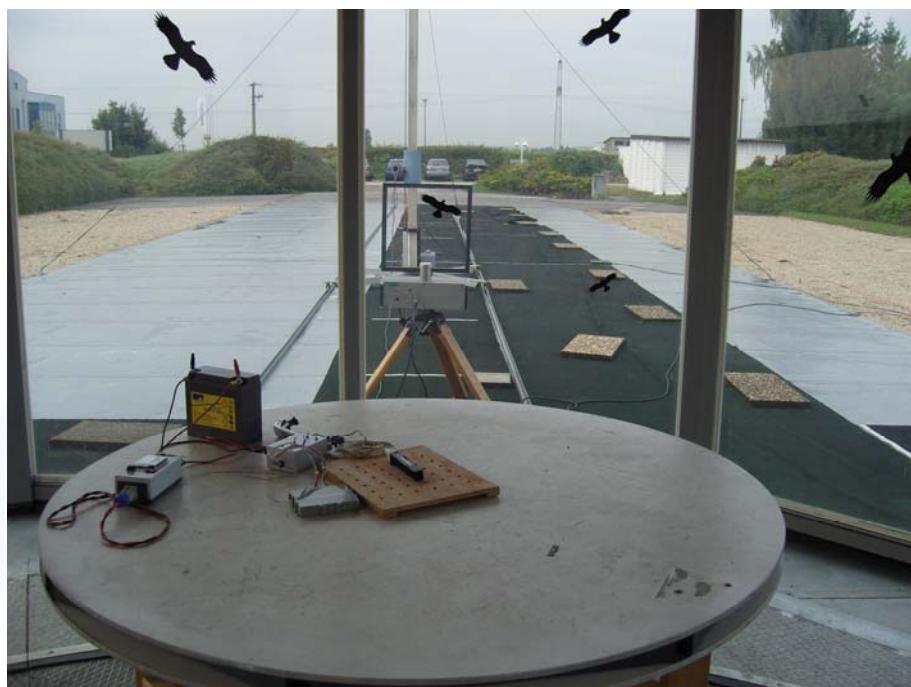

FCC ID:NI4TMLF8-15

5.3.3 Description of Measurement

The spurious emissions from the EuT will be measured on an open area test site in the frequency range of 9 kHz to 30 MHz using a tuned receiver and a shielded loop antenna. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. Measurements have been made in all three orthogonal axes and the shielded loop antenna was rotated to locate the maximum of the emissions. In the case where larger measuring distances are required the results will be extrapolated based on the values measured on the closer distances according to Section 15.31 (f) (2) [2]. The final measurement will be performed with an EMI Receiver set to Quasi Peak detector except for the frequency bands 9 kHz to 90 kHz and 110 to 490 kHz where an average detector will be used according to Section 15.209 (d) [2].

The final level, expressed in $\text{dB}\mu\text{V}/\text{m}$, is arrived at by taking the reading from the EMI receiver (Level $\text{dB}\mu\text{V}$) and adding the antenna correction factor and cable loss factor (Factor dB) to it. This result then has to be compared with the relevant FCC limit.

The resolution bandwidth during the measurement is as follows:

9 kHz – 150 kHz: ResBW: 200 Hz

150 kHz – 30 MHz: ResBW: 9 kHz

Example:

Frequency (MHz)	Level (dB μV)	+	Factor (dB)	=	Level (dB $\mu\text{V}/\text{m}$)	Limit (dB $\mu\text{V}/\text{m}$)	=	Delta (dB)
1.705	5	+	20	=	25	30	=	5

5.3.4 Test result

a) Door antenna

Measurement distance: 3m

Frequency [kHz]	L: PK [dB μV]	L: AV [dB μV]	L: QP [dB μV]	Correct. [dB]	L: PK [dB $\mu\text{V}/\text{m}$]	L: AV [dB $\mu\text{V}/\text{m}$]	L: QP [dB $\mu\text{V}/\text{m}$]	Limit [dB $\mu\text{V}/\text{m}$]	Delta [dB]
402.6	51.7	51.0	50.8	20.0	71.7	71.0	70.8	95.5	-24.5
671.0	43.2	41.3	41.3	20.0	63.2	61.3	61.3	71.1	-9.8
939.4	36.7	34.9	34.8	20.0	56.7	54.9	54.8	68.1	-13.3
1207.8	33.4	30.2	30.2	20.0	53.4	50.2	50.2	66.0	-15.8

Calculated value at distance: 30m

Frequency [kHz]	L: PK [dB μV]	L: AV [dB μV]	L: QP [dB μV]	Correct. [dB]	L: PK [dB $\mu\text{V}/\text{m}$]	L: AV [dB $\mu\text{V}/\text{m}$]	L: QP [dB $\mu\text{V}/\text{m}$]	Limit [dB $\mu\text{V}/\text{m}$]	Delta [dB]
671.0	3.2	1.3	1.3	20.0	23.2	21.3	21.3	31.1	-9.8
939.4	-3.3	-5.1	-5.2	20.0	16.7	14.9	14.8	28.1	-13.3
1207.8	-6.5	-9.8	-9.8	20.0	13.4	10.2	10.2	26.0	-15.8

Calculated value at distance: 300m

Frequency [kHz]	L: PK [dB μV]	L: AV [dB μV]	L: QP [dB μV]	Correct. [dB]	L: PK [dB $\mu\text{V}/\text{m}$]	L: AV [dB $\mu\text{V}/\text{m}$]	L: QP [dB $\mu\text{V}/\text{m}$]	Limit [dB $\mu\text{V}/\text{m}$]	Delta [dB]
402.6	-28.3	-29.0	-29.2	20.0	-8.3	-9.0	-9.2	15.5	-24.5

FCC ID:NI4TMLF8-15
b) Room antenna
Measurement distance: 3m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
402.6	48.2	46.8	46.9	20.0	68.2	66.8	66.9	95.5	-28.6
671.0	39.6	36.4	36.4	20.0	59.6	56.4	56.4	71.1	-14.7
939.4	33.5	29.5	29.5	20.0	53.5	49.5	49.5	68.1	-18.6
1207.8	27.1	24.6	24.5	20.0	47.1	44.6	44.5	66.0	-21.5

Calculated value at distance: 30m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
671.0	-0.4	-3.6	-3.6	20.0	19.6	16.4	16.4	31.1	-14.7
939.4	-6.5	-10.5	-10.5	20.0	13.5	9.5	9.5	28.1	-18.6
1207.8	-12.9	-15.4	-15.5	20.0	7.1	4.6	4.5	26.0	-21.5

Calculated value at distance: 300m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
402.6	-31.8	-33.2	-33.1	20.0	-11.8	-13.2	-13.1	15.5	-28.6

c) Trunk antenna
Measurement distance: 3m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
402.6	54.4	53.9	53.6	20.0	74.4	73.9	73.6	95.5	-21.6
671.0	45.4	43.8	43.8	20.0	65.4	63.8	63.8	71.1	-7.3
939.4	40.0	37.5	37.6	20.0	60.0	57.5	57.6	68.1	-10.5
1207.8	34.1	31.7	31.7	20.0	54.1	51.7	51.7	66.0	-14.3

Calculated value at distance: 30m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
671.0	5.4	3.8	3.8	20.0	25.4	23.8	23.8	31.1	-7.3
939.4	0.0	-2.5	-2.4	20.0	20.0	17.5	17.6	28.1	-10.5
1207.8	-5.9	-8.3	-8.3	20.0	14.1	11.7	11.7	26.0	-14.3

Calculated value at distance: 300m

Frequency [kHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
402.6	-25.6	-26.1	-26.4	20.0	-5.6	-6.1	-6.4	15.5	-21.6

FCC ID:NI4TMLF8-15

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (meters)
	(μ V/m)	dB (μ V/m)	
0.009-0.490	2400/F(kHz)	--	300
0.490-1.705	24000/F (kHz)	--	30
1.705-30.0	30	29.5	30

The requirements are **FULFILLED**.**Remarks:** All other unwanted emissions are below 10 dB μ V/m (at 30m).

mikes

5.4 Radiated emissions (electric field) 30 MHz – 1 GHz

For test instruments and accessories used see section 6 Part **SER 2**.

5.4.1 Description of the test location

Test location: OATS1

Test distance: 3 metres

5.4.2 Photo documentation of the test set-up



FCC ID:NI4TMLF8-15

5.4.3 Description of Measurement

Spurious emissions from the EuT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarized antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 meter non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. The set up of the Equipment under test will be in accordance to ANSI C63.4-2003. The Interface cables that are closer than 40 centimetres to the ground plane are bundled in the center in a serpentine fashion so they are at least 40 centimetres from the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screen room located outside the test area. The antenna was positioned 3, 10 or 30 meters horizontally from the EuT. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 meters, measurement scans are made with both horizontal and vertical antenna polarization's and the EuT are rotated 360 degrees.

The final level, expressed in dB μ V/m, is arrived by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (Factor dB) to it. This is done automatically in the EMI receiver, where the correction factors are stored. This result then has the FCC or CISPR limit subtracted from it to provide the Delta which gives the tabular data as shown in the data sheets at page.

The resolution bandwidth during the measurement is as follows:

30 MHz – 1000 MHz: ResBW: 120 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	Limit (dB μ V/m)	=	Delta (dB)
719	75	+	32.6	=	107.6	110	=	-2.4

5.4.4 Test result

Door antenna, Room antenna, Trunk antenna

Frequency [MHz]	L: PK [dB μ V]	L: AV [dB μ V]	L: QP [dB μ V]	Correct. [dB]	L: PK [dB μ V/m]	L: AV [dB μ V/m]	L: QP [dB μ V/m]	Limit [dB μ V/m]	Delta [dB]
30-1000					No unwanted emissions detected				

Limit according to FCC Part 15 Subpart 15.209(a)

Frequency (MHz)	Field strength of spurious emissions		Measurement distance (meters)
	(μ V/m)	dB (μ V/m)	
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

The requirements are **FULFILLED**.

Remarks:

FCC ID:NI4TMLF8-15


5.5 Emission Bandwidth

For test instruments and accessories used see section 6 Part **MB**.

5.5.1 Description of the test location


Test location: AREA4

5.5.2 Photo documentation of the test set-up

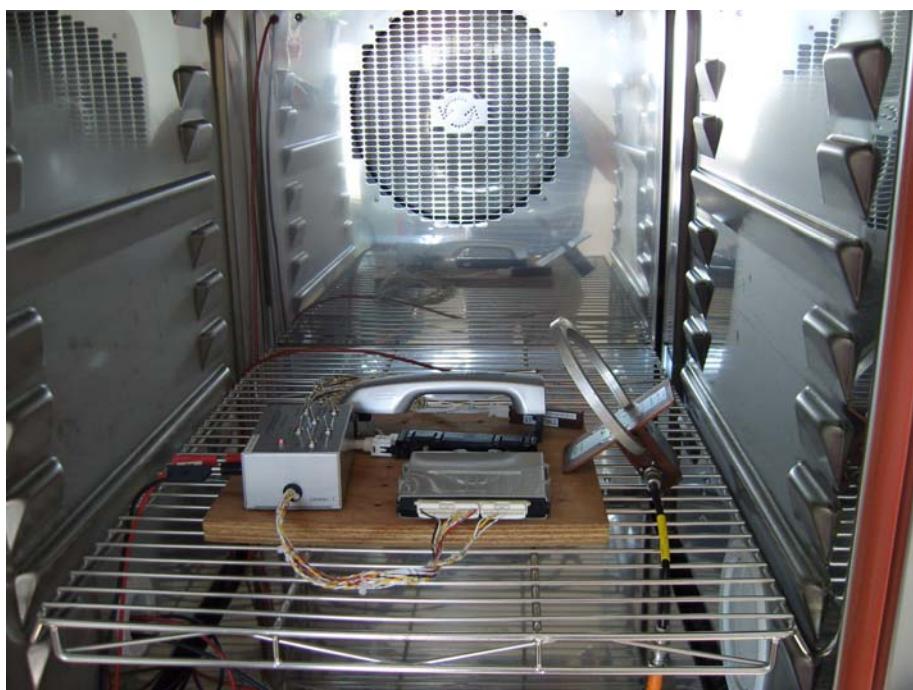


5.5.3 Test protocol


Emission Bandwidth plots Door antenna

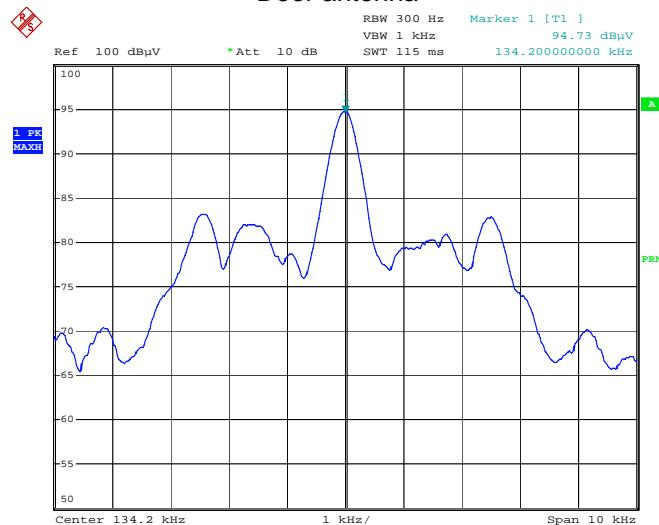

Room antenna

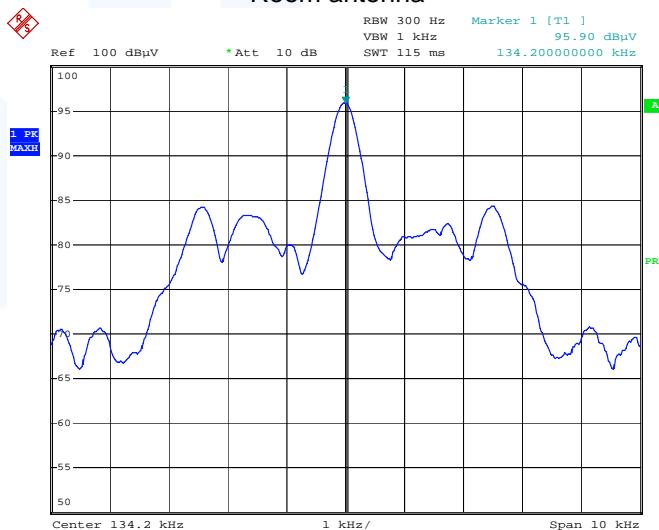

Trunk antenna

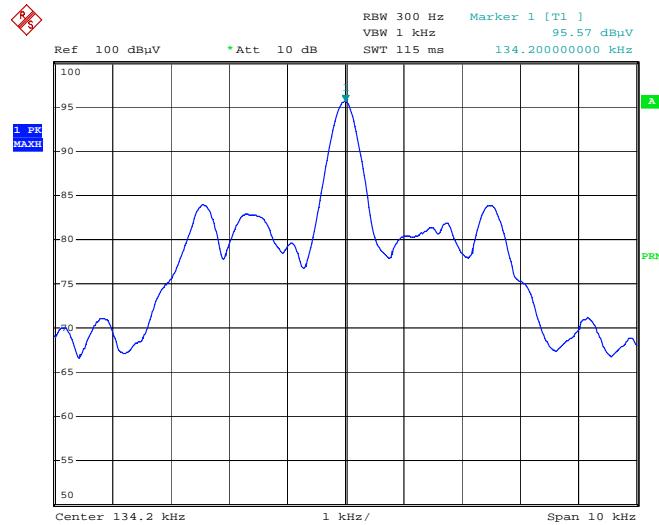

FCC ID:NI4TMLF8-15

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used, in addition to the test accessories, are calibrated and verified regularly.

The calibration intervals and the calibration history will be given out on request.

Test ID	Model / Type	Kind of Equipment	Manufacturer	Equipment No.
CPR 1	FMZB 1516 ESCI	Magnetic Field Antenna EMI Test Receiver	Schwarzbeck Mess-Elektron Rohde & Schwarz München	01-02/24-01-018 02-02/03-05-005
MB	FSP30 HZ-10 WK-340/40 6543A	Spectrum Analyser Magnetic Field Antenna Climatic Chamber Power Supply	Rohde & Schwarz München Rohde & Schwarz München Weiss Umwelttechnik GmbH HP Hewlett-Packard	02-02/11-05-001 02-02/24-05-012 02-02/45-05-001 02-02/50-05-157
SER 1	FMZB 1516 ESCI	Magnetic Field Antenna EMI Test Receiver	Schwarzbeck Mess-Elektron Rohde & Schwarz München	01-02/24-01-018 02-02/03-05-005
SER 2	ESVS 30 VULB 9168 S10162-B KK-EF393-21N-16 NW-2000-NB	EMI Test Receiver Trilog-Broadband Anten RF Cable 33m RF Cable 20m RF Cable	Rohde & Schwarz München Schwarzbeck Mess-Elektron Huber + Suhner Huber + Suhner Huber + Suhner	02-02/03-05-006 02-02/24-05-005 02-02/50-05-031 02-02/50-05-033 02-02/50-05-113

Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
01-02/24-01-018 02-02/03-05-005	01/24/2009	01/24/2008	02/20/2009	02/20/2008
02-02/11-05-001 02-02/24-05-012 02-02/45-05-001 02-02/50-05-157	04/08/2009 09/01/2010	04/08/2008 09/01/2005	12/17/2009	12/17/2008
01-02/24-01-018 02-02/03-05-005	01/24/2009	01/24/2008	02/20/2009	02/20/2008
02-02/03-05-006 02-02/24-05-005 02-02/50-05-031 02-02/50-05-033 02-02/50-05-113	07/30/2009 06/05/2011	07/30/2008 05/06/2008	02/28/2009	02/28/2008