

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

TEST REPORT

Trio Datacom ER450 E Series Remote Data Radio (Modem)

tested for compliance with the

Code of Federal Regulations (CFR) 47

Part 90 –Private Land Mobile Services


and

Part 15 – Radio Frequency Devices

for

Trio DataCom Pty Ltd

This Test Report is issued with the authority of:



Andrew Cutler - General Manager



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 1 of 31

EMC Technologies (NZ) Ltd

Test Report No **40939.2**

Report date: 4 October 2004

Table of Contents

1. CLIENT INFORMATION	3
2. DESCRIPTION OF TEST SAMPLE	3
3. COMPLIANCE STATEMENT AND RESULT SUMMARY	5
4. TEST SAMPLE DESCRIPTION	6
5. TEST CONDITIONS	7
6. ATTESTATION	8
7. TEST RESULTS	9
8. TEST EQUIPMENT USED	25
9. ACCREDITATIONS	25
10. PHOTOGRAPH (S)	26

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

1. CLIENT INFORMATION

Company Name Trio DataCom Pty Ltd

Address 41 Aster Avenue
Carrum Downs

State Victoria 3201

Country Australia

Contact Mr Henk van Hoek

2. DESCRIPTION OF TEST SAMPLE

Brand Name Trio DataCom

Model Number ER450-51F01

Product E Series Remote Data Radio (Modem)

Manufacturer Trio DataCom Pty Ltd

Country of Origin Australia

Serial Number Full duplex version: 52511
Half duplex version: 52399

FCC ID NI8ER450-XXF01

Testing of this device has been carried as the following changes have been made:

- New VCO. Now built on the main board which gives improved phase noise.
- New power control loop. Analog power control loop replaces a digital control loop for improved ramp control.
- Improved receiver front end

The transmitter low pass filter and modulation circuitry / method are unchanged.

Two versions of this device have been supplied:

- A half duplex version has been supplied which has been tested fully.
- A full duplex version which has had limited testing carried out on the standalone receiver port

EMC Technologies (NZ) Ltd

Test Report No **40939.2**

Report date: 4 October 2004

The model tested (ER450-51F01) is representative of a range of radios that this client is wishing to have certified.

The product model coding is ER450-xxF01 where:

xx = model type number

F = FCC approved model

01 = 12.5 kHz channeling

The range is known as the ER450 Series, which cover the range from 370 – 520, MHz.

The radio will only operate on one transmit and one receive frequency at a time as selected by the Tview + Programmer Software.

This band is covered with the following model numbers.

- Type 46 370 to 388 MHz
- Type 47 380 to 396 MHz
- Type 48 395 to 406 MHz
- Type 50 403 to 417 MHz
- Type 56 418 to 435 MHz
- Type 57 428 to 443 MHz
- Type 55 436 to 450 MHz
- Type 51 450 to 465 MHz
- Type 52 465 to 480 MHz
- Type 53 480 to 494 MHz
- Type 60 490 to 505 MHz
- Type 54 505 to 518 MHz

A number of SuperTypes are available which allow custom frequency ranges.

For example, to cover the range 455-470 MHz SuperType C2 (450-487 MHz) would be custom tuned by the manufacturer.

Supertypes are:

- | | | |
|-----------|--------------------|-------------------|
| - Type A6 | TX: 370 to 400 MHz | RX:370 to 400 MHz |
| - Type B3 | TX: 395 to 450MHz | RX:395 to 426 MHz |
| - Type B4 | TX: 395 to 450MHz | RX:413 to 447 MHz |
| - Type B5 | TX: 395 to 450MHz | RX:433 to 450 MHz |
| - Type C1 | TX: 436 to 518MHz | RX:436 to 467 MHz |
| - Type C2 | TX: 436 to 518MHz | RX:450 to 487 MHz |
| - Type C3 | TX: 436 to 518MHz | RX:473 to 518 MHz |

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

3. COMPLIANCE STATEMENT AND RESULT SUMMARY

The Trio Datacom ER450 E-Series Remote Data Radio (Modem) complies with the limits defined in 47CFR 15, 47 CFR Part 90 and 47 CFR Part 2 when tested in accordance with the test methods described in 47 CFR Part 2.

<u>CLAUSE</u>	<u>TEST PERFORMED</u>	<u>RESULT</u>
2.1041	Measurement procedures	Noted
2.1046	RF power output	Noted
90.205	Power and antenna height limits	Complies
2.1047	Modulation Characteristics	Noted
2.1047(a)	Low pass filter response	Complies
2.1047(b)	Modulation limiting characteristics	Complies
90.211(a)	Modulation characteristics	Complies
2.1049	Occupied bandwidth	Noted
2.202	Bandwidths	Noted
90.207	Types of emissions	Complies
90.209	Bandwidth limitations	Complies
90.210	Emission masks	Complies
2.1051	Spurious emissions at antenna terminals	Complies
2.1053	Field strength of spurious radiation	Complies
2.1055	Frequency stability	Noted
90.213	Frequency stability	Complies
90.214	Transient frequency behaviour	Complies
2.1057	Frequency spectrum to be investigated	Noted
15.109	Radiated emission limits	Complies
15.111	Antenna conducted power measurement	Complies
1.1310	Radio frequency radiation exposure limits	Complies

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

4. TEST SAMPLE DESCRIPTION

The sample tested has the following specifications:

Rated Transmitter Output Power

5.0 Watts (37.0 dBm)

Transmitter frequency range

450 – 465 MHz

Test frequencies

Transmit: 457.500 MHz Receive: 457.500 MHz

Channel Spacing

12.5 kHz

FCC Bands

Part 90: 421 – 512 MHz

Emission Designators / Modes of operation

11k2F1D – FM 9600 bps data (4 level GMSK)
11k2F1D – FM 9600 bps data (2 level GMSK)
11k2F1D – FM 19200 bps data (4 level GMSK)
11k2F1D – FM 9600 bps data (3 level GMSK)

Power Supply

External 10 – 16 Vdc supply. Typically 13.8 Vdc

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

5. TEST CONDITIONS

Standard Temperature and Humidity

Temperature: +25°C \pm 4° maintained.

Relative Humidity: 60% \pm 10% observed.

Standard Test Power Source

Standard Test Voltage: 13.8 Vdc.

Extreme Temperature

High Temperature: + 50°C maintained.

Low Temperature: - 30 °C maintained.

Extreme Test Voltages

High Voltage: 15.9 Vdc

Low Voltage: 11.7 Vdc

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

6. ATTESTATION

The **Trio Datacom ER450 E-Series Remote Data Radio (Modem)** complies with the Code of Federal Regulations (CFR) 47 Part 90 –Private Land Mobile Services and 47 Part 15 – Radio Frequency Devices.

This report describes the tests and measurements performed for the purpose of determining compliance with the specification with the following conditions:

The client selected the test sample.

The report relates only to the sample tested.


This report does not contain corrections or erasures.

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

In addition this equipment has been tested in accordance with the requirements contained in the appropriate Commission regulations.

To the best of my knowledge, these tests were performed using measurement procedures that are consistent with industry or Commission standards and demonstrate that the equipment complies with the appropriate standards.

I further certify that the necessary measurements were made by EMC Technologies NZ Ltd, 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand.



Andrew Cutler
General Manager
EMC Technologies NZ Ltd

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

7. TEST RESULTS

RF power output

Measurements were carried out at the RF output terminals of the transmitter using a 30 dB power attenuator and a 50 Ω dummy load.

Measurements were carried out when the transmitter was not being modulated.

Measurements were made with the input voltage set to 13.8 Vdc.

RF power output (dBm)			
Frequency	Supply voltage	Rated	Measured
457.5000	11.7	37.0	36.9
457.5000	13.8	37.0	36.9
457.5000	15.8	37.0	36.9

Testing was carried out at maximum power output.

The output power of the transmitter is continuously variable from the value listed above (5 watts) to 2% of the value listed (100 mW).

Limits:

Clause 90.205(g) of Part 90 specifies that in the band 450 – 470 MHz the maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and the required service area.

Result: Complies

Measurement Uncertainty: ± 0.5 dB

EMC Technologies (NZ) Ltd

Test Report No **40939.2**

Report date: 4 October 2004

Modulation Characteristics

The transmitter tested has been designed to transmit digital data on frequencies between 450.000 MHz and 465.000 MHz using a standard 12.5 kHz channel allocation.

(a) Frequency response of the audio frequency low pass filter between 100 Hz and 5000 Hz.

Testing was not carried out to this clause as this transmitter is a digital transmitter.

(b) A family of curves showing the percentage of modulation versus the modulation input voltage.

Testing was not carried out to this clause as this transmitter is a digital transmitter.

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Emission type:

In accordance with Part 90.207 the following emission type has been used:

- F1D: Frequency modulation with a single channel containing digital information, without a subcarrier, used for the transmission of data.

Occupied Bandwidth

The spectrum masks are defined in:

Section 90.210(d) – Mask D has been applied as the transmitter can operate in the band 421 – 512 MHz using an authorised bandwidth of 11.25 kHz as per Section 90.209(b)(5).

The reference level for the following emission mask measurements has been determined using a resolution bandwidth of 30 kHz with the transmitter not being modulated.

Measurements were made with the spectrum analyser operating in peak hold centred on the allocated frequency.

The transmitter was modulated using the following forms of modulation that was generated using software supplied by the client.

- FM 9600 bps data (2 level GMSK)
- FM 9600 bps data (4 level GMSK)
- FM 19200 bps data (4 level GMSK)
- FM 9600 bps data (3 level GMSK)

All measurements were made at 457.5.000 MHz.


Result: Complies

EMC Technologies (NZ) Ltd


Test Report No 40939.2

Report date: 4 October 2004

FM 9600 bps data (4 level)

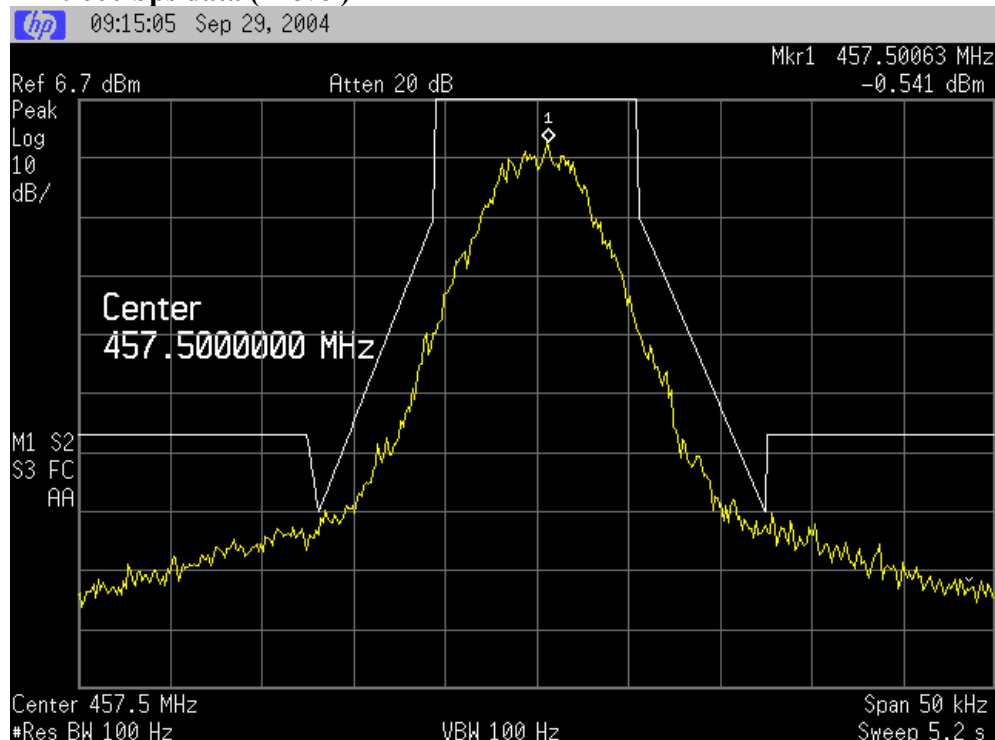

FM 19200 bps data (4 level)

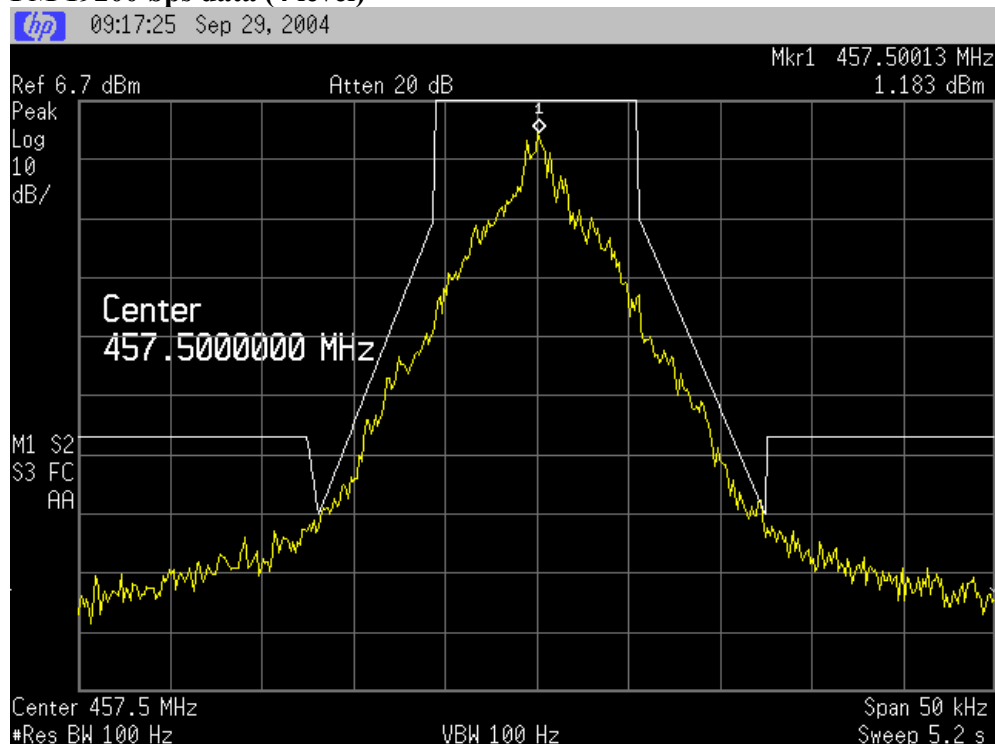

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au


Page 12 of 31

EMC Technologies (NZ) Ltd


Test Report No 40939.2

Report date: 4 October 2004

FM 9600 bps data (2 level)

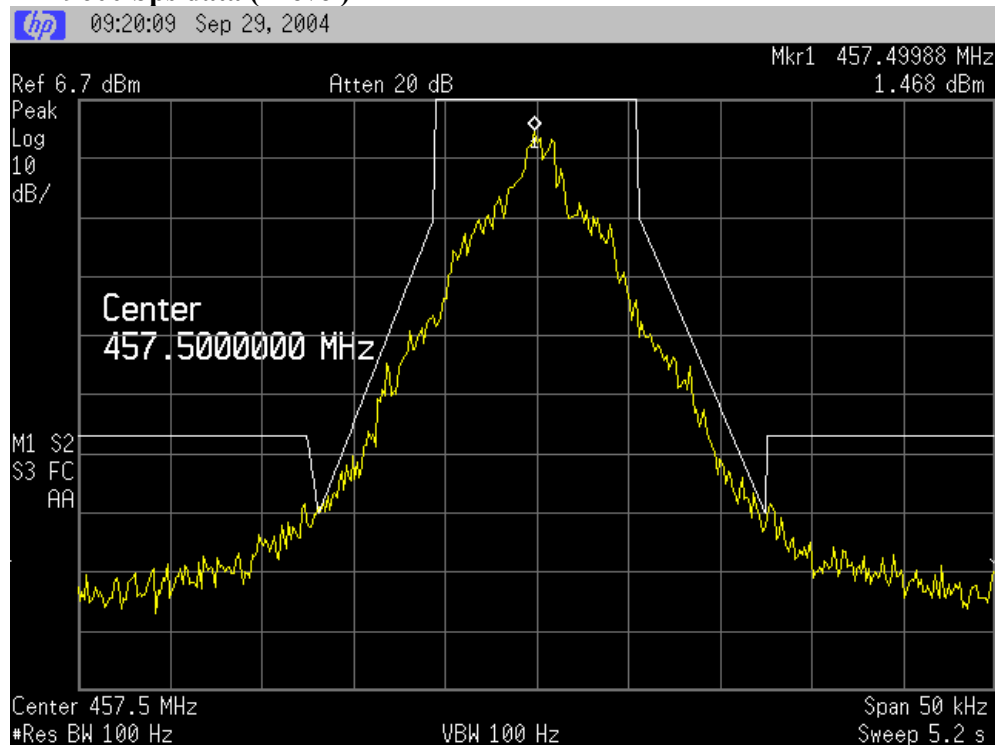

FM 9600 bps data (3 level GMSK)

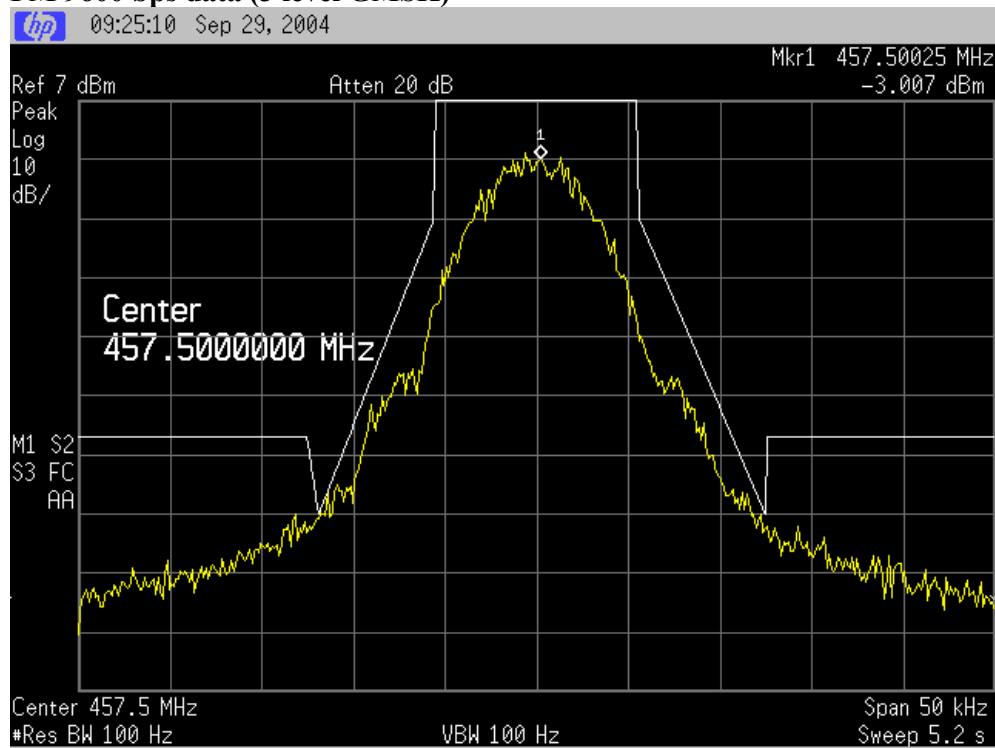

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 13 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Bandwidth limitations:

The client has declared an authorised bandwidth of 11.25 kHz for this transmitter, which is used, where a 12.5 kHz channel plan is used.

In this instance the authorised bandwidth is taken to be the necessary bandwidth.

A bandwidth for the F1D emissions could not be determined easily using the tables in Part 2.202 – Bandwidth.


Measurements of the authorised / occupied bandwidth at the 99% power level have been carried out.

This was carried out at the –23 dB points with the spectrum analyser in peak hold mode.

A plot of this measurement is attached.

A bandwidth of 10.050 kHz has been measured.

This is confirmed in the emission designation, 11k2F1D, as declared by the client.

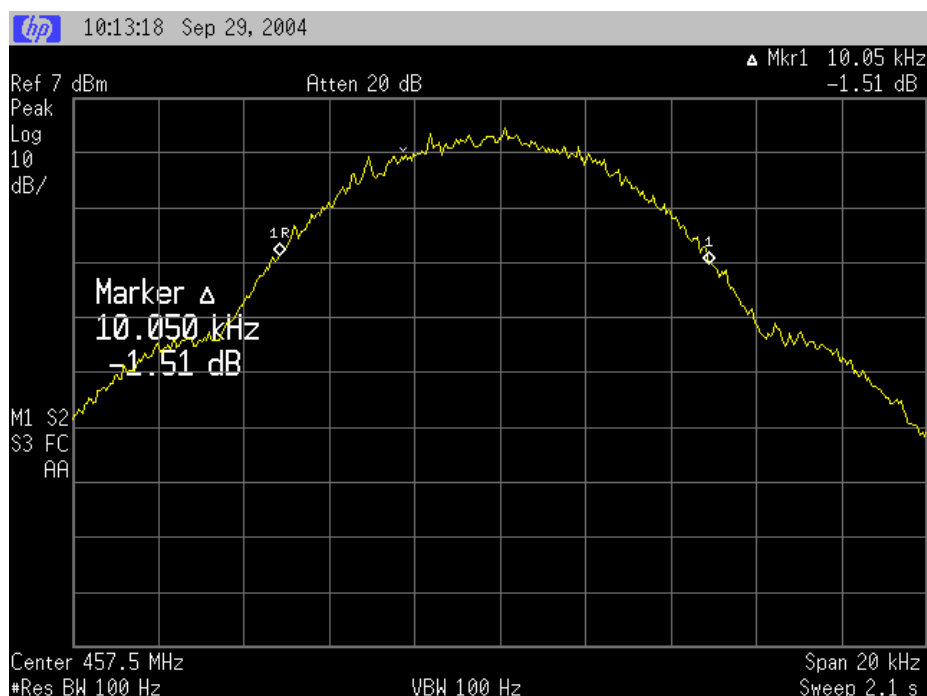

Result: Complies

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: auckland@ihug.co.nz

Web Site: www.emctech.com.au

Page 14 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Transmitter spurious emissions at the antenna terminals

Frequency: 457.500 MHz

Measured Spurious Emission		
Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
915.000	-41.9	-20.0
1372.500	-54.2	-20.0
1830.000	less than -60.0	-20.0
2287.500	less than -60.0	-20.0
2745.000	less than -60.0	-20.0
3202.500	less than -60.0	-20.0
3660.000	less than -60.0	-20.0
4117.500	less than -60.0	-20.0
4575.000	less than -60.0	-20.0
446.800	-46.4	-20.0

Limit:

Part 90.210(d) Mask D, (3) on any frequency removed from the centre of the authorised bandwidth by a displacement frequency of more than 12.5 kHz shall be attenuated by at least $50 + 10 \log (P)$ or 70 dB whichever is the lesser attenuation.

The spurious emission limit defined by Mask D has been applied as this transmitter can operate using channel spacings of 12.5 kHz.

Part 2.1051 states that emissions greater than 20 dB below the limit need not be specified.

Part 2.1057 states that the spectrum should be investigated up to the 10th harmonic if the transmitter operates below 10 GHz.

A rated power of 5 watts gives a limit of -20 dBm.

Emissions less than -40 dBm have been reported for completeness.

No measurements were made above the 10th harmonic.

Result: Complies

Measurement Uncertainty: ± 3.3 dB

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Receiver Spurious emissions at antenna terminals

Receive frequency: 457.500 MHz

Intermediate frequency: 83.1625 MHz

Half Duplex Sample:

Measured Spurious Emission		
Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
540.6628	-98.3	-57.0
1621.9878	-102.0	-57.0
2162.6499	-101.2	-57.0

Full Duplex Sample:

Measured Spurious Emission		
Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
540.6660	-98.7	-57.0
1081.3320	-100.9	-57.0
1621.9910	-98.7	-57.0
2162.6540	-105.4	-57.0

All other emissions observed less than -100.0 dBm.

Limit:

In accordance with CFR 47 Part 15, section 15.111 the power of any emission at the antenna terminal should not exceed 2 nW.

This gives a limit of -57.0 dBm.

Result: Complies

Measurement Uncertainty: ± 3.3 dB

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Field strength of the transmitter spurious emissions

Frequency: 457.500 MHz

Frequency (MHz)	Level (dBuV/m)	Power (dBm)	Limit (dBm)	Margin (dB)	Polarity
915.000	44.2	-53.1	-20.0	Horizontal	33.1
915.000	50.2	-47.1	-20.0	Vertical	27.1
1372.500	44.1	-53.2	-20.0	Horizontal	33.2
1372.500	47.5	-49.8	-20.0	Vertical	29.8
1830.000	57.3	-40.0	-20.0	Horizontal	20.0
1830.000	56.9	-40.4	-20.0	Vertical	20.4
2287.500	46.7	-50.6	-20.0	Horizontal	30.6
2287.500	47.2	-50.1	-20.0	Vertical	30.1
2745.000	32.0	-65.3	-20.0	Horizontal	45.3
2745.000	35.0	-62.3	-20.0	Vertical	42.3
3202.500	43.4	-53.9	-20.0	Horizontal	33.9
3202.500	42.4	-54.9	-20.0	Vertical	34.9
3660.000	-	-	-20.0	Horizontal	-
3660.000	-	-	-20.0	Vertical	-
4117.500	-	-	-20.0	Horizontal	-
4117.500	-	-	-20.0	Vertical	-
4575.000	-	-	-20.0	Horizontal	-
4575.000	-	-	-20.0	Vertical	-

Device was tested on an open area test site at a distance of 3 metres.

Testing was carried out at EMC Technologies NZ Ltd Open Area Test Site, which is located at Driving Creek, Orere Point, Auckland. Details of this site have been filed with the Commission, Registration Number: 90838, which was last updated on February 17th, 2004.

The transmitter was tested while transmitting continuously while attached to a dummy load.

The power level of each emission was determined by replacing the transmitter with a dipole antenna that was connected to a signal generator. The signal generator output level was increased until the same field strength level was observed at each emission frequency.

The level recorded is the signal generator output level in dBm less any gains / losses due to the coax cable and the dipole antenna.

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 17 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Limit:

All spurious emissions are to be attenuated by at least $50 + 10 \log (P)$.

The rated power of 5 watts gives a limit of -20 dBm.

No measurements were made above the 10th harmonic.

Result: Complies

Measurement Uncertainty: ± 4.1 dB

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Receiver spurious emissions field strength

Receive frequency: 457.500 MHz

Intermediate frequency: 83.1625 MHz

Half Duplex Sample:

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Polarisation	Margin (dB)
540.657	27.7	46.0	Horizontal	18.3
540.657	32.1	46.0	Vertical	13.9
1621.987	44.8	54.0	Horizontal	9.2
1621.987	48.7	54.0	Vertical	5.3

Full Duplex Sample:

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Polarisation	Margin (dB)
540.663	29.7	46.0	Horizontal	16.3
540.663	35.1	46.0	Vertical	10.9
1081.326	38.5	54.0	Horizontal	15.5
1081.326	43.1	54.0	Vertical	10.9
1621.987	41.0	54.0	Horizontal	13.0
1621.987	43.8	54.0	Vertical	10.2

Device was tested on an open area test site at a distance of 3 metres.

Testing was carried out at EMC Technologies NZ Ltd Open Area Test Site, which is located at Driving Creek, Orere Point, Auckland. Details of this site have been filed with the Commission, Registration Number: 90838, which was last updated on February 17th, 2004.

Limit:

The limits described in 47CFR 15 Section 15.109 have been applied.

Result: Complies

Measurement Uncertainty: ± 4.1 dB

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Frequency Stability

Frequency stability measurements were between - 30 °C and + 50°C in 10°C increments.

At each temperature the transmitter was given a period of 30 minutes to stabilise. The transmitter was then turned on and the frequency error measured after a period of 1 minute.

Measurements were made with the supply varied between 115% and 85% of the nominal supply voltage (13.8 Vdc).

Nominal Frequency: 457.5000 MHz

Voltage Temp.	Frequency Error (Hz)		
	11.7 Vdc	13.8 Vdc	15.9 Vdc
+50°C	-470.0	-470.0	-470.0
+40°C	-350.0	-350.0	-350.0
+30°C	-290.0	-290.0	-290.0
+20°C	-260.0	-260.0	-260.0
+10°C	-110.0	-110.0	-110.0
0°C	-185.0	-185.0	-185.0
-10°C	-390.0	-390.0	-390.0
-20°C	-560.0	-560.0	-560.0
-30°C	-470.0	-470.0	-470.0

Limit:

Part 90.213 states that base station transmitters operating between 421 – 512 MHz with 12.5 kHz spacing are required to have frequency tolerance of 1.5 ppm.

This transmitter operates on 450.0 MHz. $1.5 \text{ ppm} = 1.5 \times 450 = 675.0 \text{ Hz}$.

Result: Complies

Measurement Uncertainty: $\pm 30 \text{ Hz}$

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Transient frequency behaviour

Transient frequency behaviour measurements are applicable to wide band and narrow band transmitters operating in the frequency band 421 – 512 MHz.

Measurements were carried out at 457.500 MHz using the method described in TIA-603 and EN 300-086.

In summary this method calls for the use of an external signal generator tuned to 457.500 MHz with a output level 0.1 % (-30 dB) of the level from the transmitter with a 1 kHz tone with a frequency deviation of 12.5 kHz being applied to the input of a modulation analyser along with the output from the transmitter.

The modulation analyser produces an amplitude difference signal and a frequency difference signal, which are applied to the input of a storage oscilloscope.

The unmodulated transmitter is then keyed which produces a trigger pulse that is AC coupled to the oscilloscope that produces a display on the screen.

The result of the change in the ratio of power between the test signal from the signal generator and the transmitter output will produce 2 separate sides on the oscilloscope picture. One will show the 1000 Hz test modulation and the other will be the frequency difference of the transmitter versus time.

Measured Transient Deviation		
Period t_1 (ms)	period t_2 (ms)	period t_3 (ms)
10.0	25.0	10.0
Frequency Difference from the Nominal Frequency (kHz)		
nil	nil	nil

Limits:

The maximum frequency difference:

Channel Spacing (kHz)	Transmitter Period t_1 (kHz)	Transmitter Period t_2 (kHz)	Transmitter Period t_3 (kHz)
12.5	± 12.5	± 6.25	± 12.5

Result: Complies

Measurement Uncertainty: Frequency difference ± 1.6 kHz
Time period ± 1 ms

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

12.5 kHz transmitter turn on


Green Trace = 1 kHz tone with FM deviation of 12.5 kHz.
Black trace = transmitter amplitude response (AC coupled).

Green trace has been maximised to give full screen indication of a ± 12.5 kHz.
Therefore each Y axis division = 3.125 kHz per division.
The X axis has been set to a sweep rate of 10 mS/division.

Triggering has been set to occur 2 divisions from the left hand edge (20 mS).
This is position t_{on} .

t_1 occurs between 2.0 and 3.0 divisions from the left-hand edge.
 t_2 occurs between 3.0 and 5.5 divisions from the left-hand edge.

No transient responses can be observed after t_{on} .

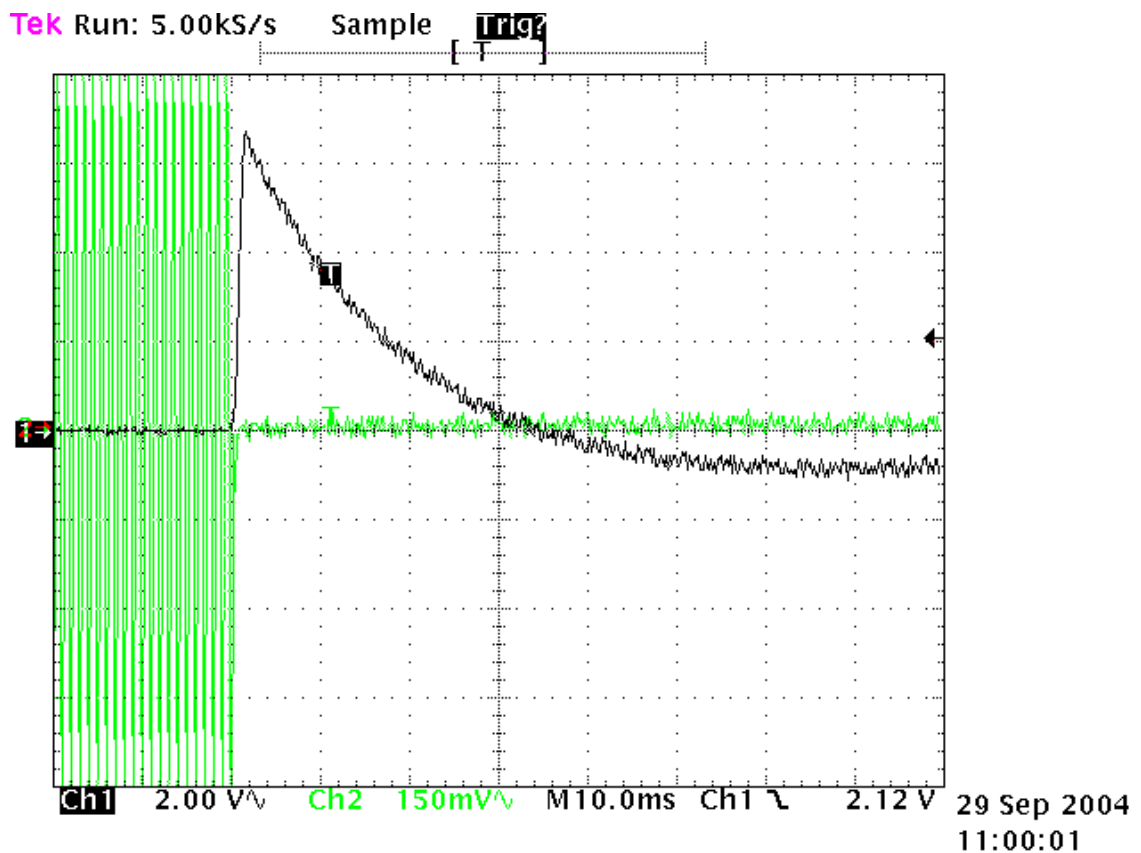

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: auckland@ihug.co.nz

Web Site: www.emctech.com.au

Page 22 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

12.5 kHz transmitter turn off

Green Trace = 1 kHz tone with FM deviation of 12.5 kHz.

Black trace = transmitter amplitude response (AC coupled).

Green trace has been maximised to give full screen indication of a ± 12.5 kHz.

Therefore each Y axis division = 3.125 kHz per division.


The X axis has been set to a sweep rate of 10 mS/division.

The display of the 1 kHz signal rising has been positioned 5 divisions from the left hand edge (50 mS).

This is position *toff*.

t3 occurs between 4.0 and 5.0 divisions from the left hand edge.

No transient responses can be observed before *toff*.

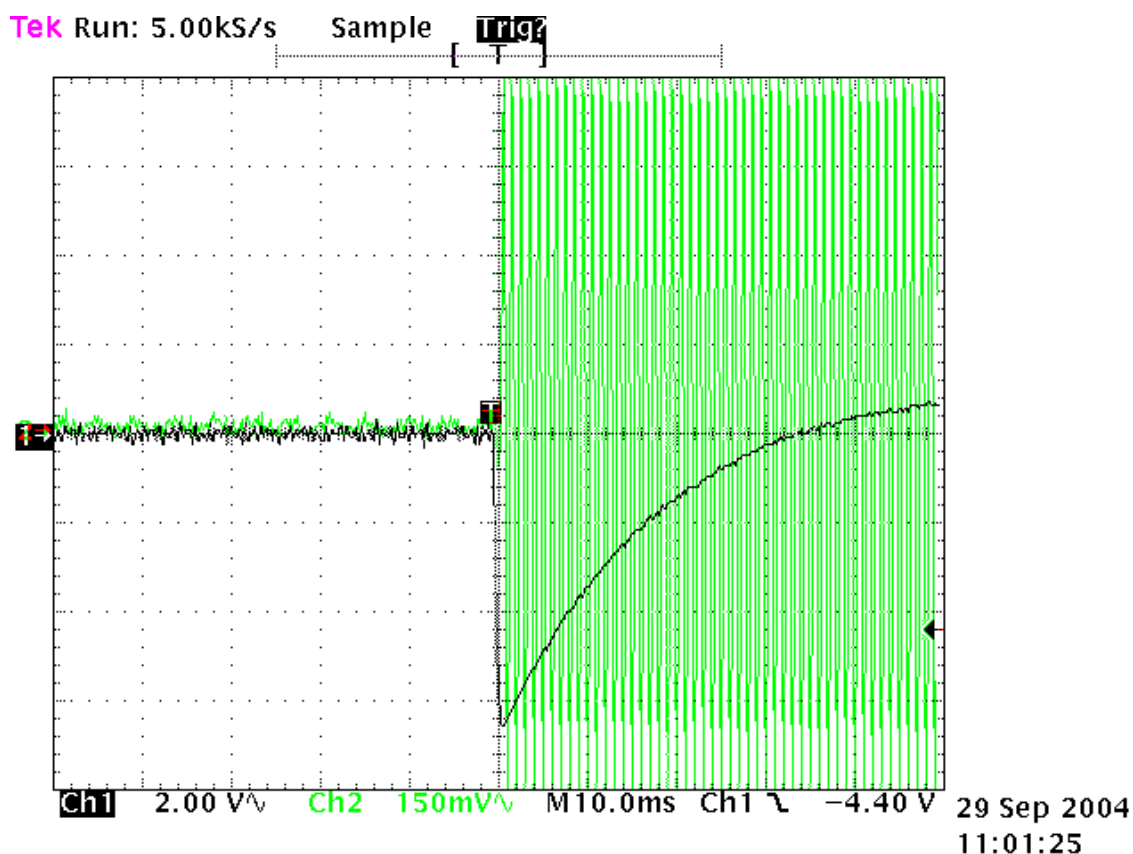

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 23 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Radio Frequency Hazard Information

As per Section 1.1310 and Section 2.1091 transmitters are required to be operated in a manner that ensures that the public is not exposed to RF energy levels in accordance with OST/OET Bulletin Number 65.

A minimum safe distance between the user / general public and the device has been calculated below.

In accordance with Section 1.1310 the Maximum Permissible Exposure (MPE) power density limit for the General Population / Uncontrolled Exposure of 0.32 mW/m² (f/1500 = 485 MHz/1500) has been applied.

The minimum distance from the antenna at which the MPE is met is calculated from the equation relating field strength in V/m, transmit power in watts, transmit antenna gain and separation distance in metres:

$$E, \text{ V/m} = (\sqrt{30 * P * G}) / d$$

$$\begin{aligned} \text{Power density} &= 0.32 \text{ mW/m}^2 = E^2/3770 \\ E &= \sqrt{0.32 * 3770} \\ E &= \underline{34.9 \text{ V/m}} \end{aligned}$$

The maximum transmitter power = 5 watts.

This transmitter is sold without an antenna and therefore the manufacturer has no control over the gain of the antenna applied.

If an antenna with a gain of 6 dBi is used (gain = 4.0) the following will apply:

$$\begin{aligned} d &= \sqrt{30 * P * G} / E \\ &= \sqrt{30 * 5.0 * 4.0} / 34.9 \\ &= \underline{0.70 \text{ metres or } 70 \text{ cm}} \end{aligned}$$

The minimum theoretical safe distance is therefore 70 cm.

However as the transmitter can be used in a fixed installation a minimum safe distance of 2.0 m is required.

The manufacturer has inserted a statement in the user manual that a minimum safe distance of 6 metres should be maintained from the front of the antenna.

Result: Complies

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

8. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial #	Asset
Aerial Controller	EMCO	1090	9112-1062	RFS 3710
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708
Attenuator 10 dB	Hewlett Packard	HP8491A	24838	E1329
Attenuator 20 dB	Weinschel	49-20-43	GC-104	E1308
Audio Analyzer	Hewlett Packard	8903A	2216A01713	E1146
Biconical Antenna	Schwarzbeck	BBA 9106		RFS 3612
Frequency Counter	Hewlett Packard	HP 5342A	1916A01713	E1224
Level generator	Anritsu	MG443B	M61689	E1143
Log Periodic Antenna	Schwarzbeck	VUSLP 9111	9111-228	RFS 3785
Measurement Receiver	Rohde & Schwarz	ESCS 30	847124/020	E1595
Horn Antenna	EMCO	3115	9511-4629	E1526
Pre amplifier	Mini Circuits	ZHL-42	060484	RFS 3784
Modulation Analyzer	Rohde & Schwarz	FMA	837807/020	E1552
Modulation Analyzer	Hewlett Packard	8901B	2608A00782	E1090
Oscilloscope	Tektronics	745A	B010643	1569
Power Attenuator	Weinschel	49-20-43	GC104	E1308
Power Supply	Hewlett Packard	6032A	2743A-02859	E1069
RF Power Meter	Hewlett Packard	HP 436A	2512A22439	E1198
Rubidium Oscillator	Ball Efratom	FRS - C	4287	E1053
Selective Level Meter	Anritsu	ML422C	M35386	E1140
Signal Generator	Rohde & Schwarz	SMHU.58	838923/028	E1493
Spectrum Analyzer	Hewlett Packard	E7405A	US39150142	3776
Thermal chamber	Contherm	M180F	86025	E1129
Thermometer	DSIR	RT200	035	E1049
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709
Variac	General Radio	1592	-	3690

9. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies NZ Ltd registration with the Federal Communications Commission as a listed facility, Registration Number: 90838, which was last updated on February 17th, 2004.

All testing has been carried out in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

All measurement equipment has been calibrated in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

International Accreditation New Zealand has Mutual Recognition Arrangements for testing and calibration with 46 accreditation bodies in 34 economies. This includes NATA (Australia), UKAS (UK), SANAS (South Africa), NVLAP (USA), A2LA (USA), SWEDAC (Sweden). Further details can be supplied on request.

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 25 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

10. PHOTOGRAPH (S)

Remote Half Duplex Label



Remote Half Duplex external view



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: auckland@ihug.co.nz

Web Site: www.emctech.com.au


Page 26 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Remote half duplex internal views

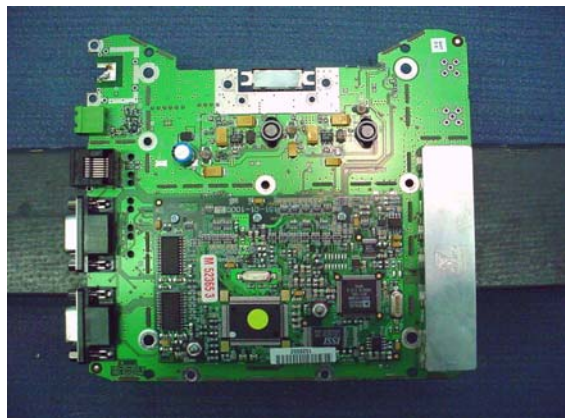

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: auckland@ihug.co.nz

Web Site: www.emctech.com.au

Page 27 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Remote full duplex label



Remote full duplex external views



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: auckland@ihug.co.nz

Web Site: www.emctech.com.au

Page 28 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Remote full duplex internal views



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 29 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Remote half duplex radiated emissions testing



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: auckland@ihug.co.nz

Web Site: www.emctech.com.au


Page 30 of 31

EMC Technologies (NZ) Ltd

Test Report No 40939.2

Report date: 4 October 2004

Remote full duplex radiated emissions testing

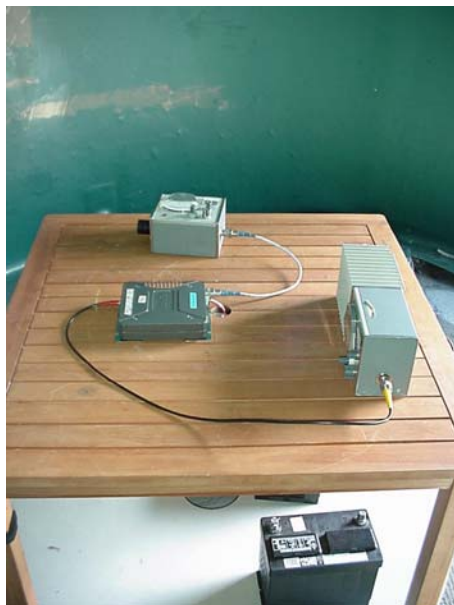

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: auckland@ihug.co.nz

Web Site: www.emctech.com.au

Page 31 of 31