

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

TEST REPORT

Trio Datacom MR450-H003 Remote Data Radio (Modem)

tested for compliance with the

Code of Federal Regulations (CFR) 47

Part 90 –Private Land Mobile Services


and

Part 15 – Radio Frequency Devices

for


Trio DataCom Pty Ltd

This Test Report is issued with the authority of:



Andrew Cutler - General Manager

Prepared By:



Cecilia Lam - Office Administrator



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 1 of 26

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Table of Contents

1.	CLIENT INFORMATION	3
2.	DESCRIPTION OF TEST SAMPLE	3
3.	SUMMARY OF TEST RESULTS	4
4.	TEST SAMPLE DESCRIPTION	5
5.	TEST CONDITIONS	6
6.	ATTESTATION	7
7.	TEST RESULTS	8
8.	TEST EQUIPMENT USED	23
9.	ACCREDITATIONS	23
10.	PHOTOGRAPH (S)	24

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

1. CLIENT INFORMATION

Company Name Trio DataCom Pty Ltd
Address 41 Aster Avenue
Carrum Downs
State Victoria 3201
Country Australia
Contact Mr Henk van Hoek

2. DESCRIPTION OF TEST SAMPLE

Brand Name Trio DataCom
Model Number MR450-H003-D0
Product Remote Data Radio (Modem)
Manufacturer Trio DataCom Pty Ltd
Country of Origin Australia
Serial Number 80015
FCC ID NI8MR450-X003

The MR450 Series of radios covers the frequency range 380 – 520 MHz.

The model tested (MR450-H003) is representative of a range of radios that this client is wishing to have certified.

The product model coding is MR450-x003 where:

x = M or H

003 = An FCC approved model

Type H covers the range 450 – 520 MHz

Type M covers the range 395 – 465 MHz

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

3. COMPLIANCE STATEMENT AND RESULT SUMMARY

The Trio Datacom MR450-H003 Remote Data Radio (Modem) complies with the limits defined in 47CFR 15, 47 CFR Part 90 and 47 CFR Part 2 when tested in accordance with the test methods described in 47 CFR Part 2.

<u>CLAUSE</u>	<u>TEST PERFORMED</u>	<u>RESULT</u>
2.1041	Measurement procedures	Noted
2.1046	RF power output	Noted
90.205	Power and antenna height limits	Complies
2.1047	Modulation Characteristics	Noted
2.1047(a)	Low pass filter response	Complies
2.1047(b)	Modulation limiting characteristics	Complies
90.211(a)	Modulation characteristics	Complies
2.1049	Occupied bandwidth	Noted
2.202	Bandwidths	Noted
90.207	Types of emissions	Complies
90.209	Bandwidth limitations	Complies
90.210	Emission masks	Complies
2.1051	Spurious emissions at antenna terminals	Complies
2.1053	Field strength of spurious radiation	Complies
2.1055	Frequency stability	Noted
90.213	Frequency stability	Complies
90.214	Transient frequency behaviour	Complies
2.1057	Frequency spectrum to be investigated	Noted
15.109	Radiated emission limits	Complies
15.111	Antenna conducted power measurement	Complies
1.1310	Radio frequency radiation exposure limits	Complies

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

4. TEST SAMPLE DESCRIPTION

The sample tested has the following specifications:

Rated Transmitter Output Power

5.0 Watts (37.0 dBm)

Transmitter frequency range

450 – 520 MHz

Test frequencies

Transmit: 485.000 MHz Receive: 485.000 MHz

Channel Spacing

12.5 kHz

FCC Bands

Part 90: 421 – 512 MHz

Emission Designators / Modes of operation

11k2F1D – FM 9600 bps data (2 level GMSK)

Power Supply

External 10 – 16 Vdc supply. Typically 13.8 Vdc

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

5. TEST CONDITIONS

Standard Temperature and Humidity

Temperature: +25°C ± 4° maintained.

Relative Humidity: 60% ± 10% observed.

Standard Test Power Source

Standard Test Voltage: 13.8 Vdc.

Extreme Temperature

High Temperature: + 50°C maintained.

Low Temperature: - 30 °C maintained.

Extreme Test Voltages

High Voltage: 15.9 Vdc

Low Voltage: 11.7 Vdc

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

6. ATTESTATION

The **Trio Datacom MR450-H003 Remote Data Radio (Modem)** complies with the Code of Federal Regulations (CFR) 47 Part 90 –Private Land Mobile Services and 47 Part 15 – Radio Frequency Devices.

This report describes the tests and measurements performed for the purpose of determining compliance with the specification with the following conditions:

The client selected the test sample.

The report relates only to the sample tested.


This report does not contain corrections or erasures.

Measurement uncertainties with statistical confidence intervals of 95% are shown below test results. Both Class A and Class B uncertainties have been accounted for, as well as influence uncertainties where appropriate.

In addition this equipment has been tested in accordance with the requirements contained in the appropriate Commission regulations.

To the best of my knowledge, these tests were performed using measurement procedures that are consistent with industry or Commission standards and demonstrate that the equipment complies with the appropriate standards.

I further certify that the necessary measurements were made by EMC Technologies NZ Ltd, 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand.



Andrew Cutler
General Manager
EMC Technologies NZ Ltd

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

7. TEST RESULTS

RF power output

Measurements were carried out at the RF output terminals of the transmitter using a 30 dB power attenuator and a 50 Ω dummy load.

Measurements were carried out when the transmitter was not being modulated.

Measurements were made with the input voltage set to 13.8 Vdc and when varied +/- 15%.

RF power output (dBm)			
Frequency	Supply voltage	Rated	Measured
485.000	11.7	37.0	36.7
485.000	13.8	37.0	36.8
485.000	15.8	37.0	36.8

Testing was carried out at maximum power output.

The output power of the transmitter is continuously variable from the value listed above (5 watts) to 2% of the value listed (100 mW).

Limits:

Clause 90.205(g) of Part 90 specifies that in the band 450 – 470 MHz the maximum allowable station effective radiated power (ERP) is dependent upon the station's antenna HAAT and the required service area.

Result: Complies

Measurement Uncertainty: ± 0.5 dB

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Modulation Characteristics

The transmitter tested has been designed to transmit digital data on frequencies between 450.000 MHz and 520.000 MHz using a standard 12.5 kHz channel allocation.

(a) Frequency response of the audio frequency low pass filter between 100 Hz and 5000 Hz.

Testing to this requirement was not carried out as the device is a digital transmitter.

(b) A family of curves showing the percentage of modulation versus the modulation input voltage.

Testing to this requirement was not carried out as the device is a digital transmitter.

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Occupied Bandwidth

The spectrum masks are defined in:

Section 90.210(d) – Mask D has been applied as the transmitter can operate in the band 421 – 512 MHz using an authorised bandwidth of 11.25 kHz as per Section 90.209(b)(5).

The reference level for the following emission mask measurements has been determined using a resolution bandwidth of 30 kHz with the transmitter not being modulated.

Measurements were made with the spectrum analyser operating in peak hold centred on the allocated frequency.

The transmitter was modulated using the following forms of modulation that was generated using software supplied by the client.

- FM 9600 bps data (2 level GMSK)


All measurements were made at 485.000 MHz.

Result: Complies

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

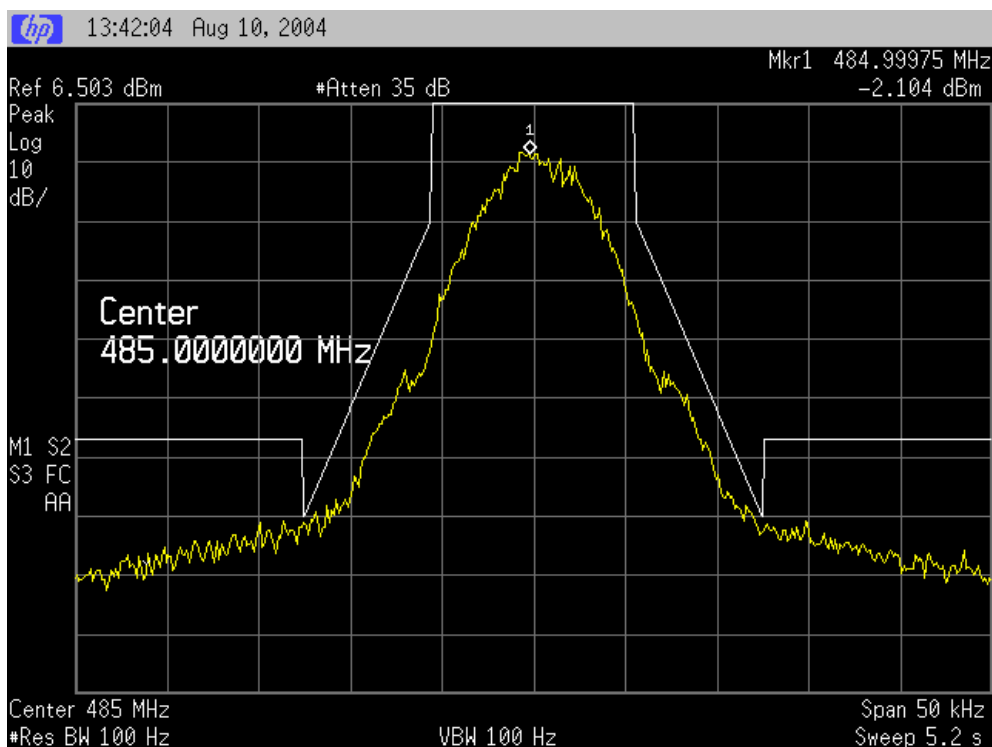

Part 90.207 – Emission types:

The following emission type has been used:

- F1D: Frequency modulation with a single channel containing digital information, without a subcarrier, used for the transmission of data.

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Part 90.209 – Bandwidth limitations:

The client has declared an authorised bandwidth of 11.25 kHz for this transmitter, which is used, where a 12.5 kHz channel plan is used.

In this instance the authorised bandwidth is taken to be the necessary bandwidth.

A bandwidth for the F1D emissions could not be determined easily using the tables in Part 2.202 – Bandwidth.


Measurements of the authorised / occupied bandwidth at the 99% power level have been carried out.

This was carried out at the –23 dB points with the spectrum analyser in peak hold mode.

Plots of these measurements are attached.

A bandwidth of 9.7 kHz has been measured.

This is confirmed in the emission designation, 11k2F1D, as declared by the client.

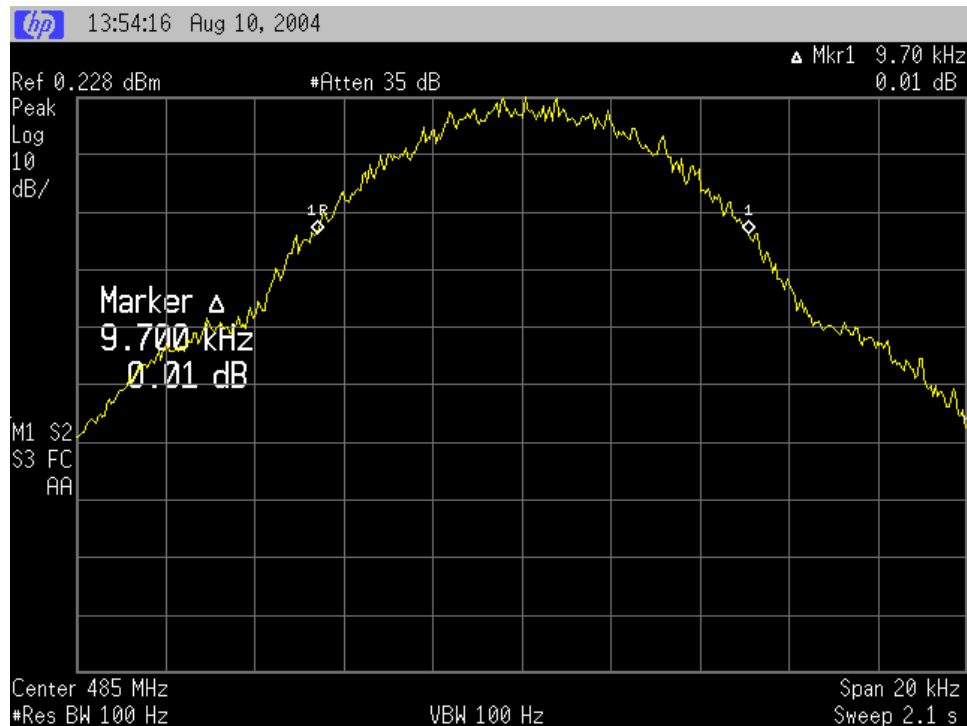

Result: Complies

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 12 of 26

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Transmitter spurious emissions at the antenna terminals

Frequency: 485.000 MHz

Measured Spurious Emission		
Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
474.300	> -50.0	-20.0
970.000	> -55.0	-20.0
1455.000	> -55.0	-20.0
1940.000	-53.2	-20.0
2425.000	> -60.0	-20.0
2910.000	-42.1	-20.0
3395.000	-53.8	-20.0
3880.000	>-60.0	-20.0
4365.000	-61.1	-20.0
4850.000	> -60.0	-20.0

Limit:

Part 90.210(d) Mask D, (3) on any frequency removed from the centre of the authorised bandwidth by a displacement frequency of more than 12.5 kHz shall be attenuated by at least $50 + 10 \log (P)$ or 70 dB whichever is the lesser attenuation.

The spurious emission limit defined by Mask D has been applied as this transmitter can operate using channel spacings of 12.5 kHz.

Part 2.1051 states that emissions greater than 20 dB below the limit need not be specified.

Part 2.1057 states that the spectrum should be investigated up to the 10th harmonic if the transmitter operates below 10 GHz.

A rated power of 5 watts gives a limit of -20 dBm.

Emissions less than -40 dBm have been reported for completeness.

No measurements were made above the 10th harmonic.

Result: Complies

Measurement Uncertainty: ± 3.3 dB

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Receiver Spurious emissions at antenna terminals

Receive frequency: 485.000 MHz

Intermediate frequency: 83.1625 MHz

Measured Spurious Emission		
Spurious emission (MHz)	Emission level (dBm)	Limit (dBm)
568.1638	-80.4	-57.0
1704.4902	-78.1	-57.0
3408.9778	-75.1	-57.0

All other emissions observed less than -90.0 dBm.

Limit:

In accordance with CFR 47 Part 15, section 15.111 the power of any emission at the antenna terminal should not exceed 2 nW.

This gives a limit of -57.0 dBm.

Result: Complies

Measurement Uncertainty: ± 3.3 dB

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Field strength of the transmitter spurious emissions

Frequency: 485.000 MHz

Frequency (MHz)	Level (dBuV/m)	Power (dBm)	Limit (dBm)	Polarity	Margin (dB)
970.000	51.1	-46.3	-20.0	Horizontal	26.3
970.000	53.3	-44.1	-20.0	Vertical	24.1
1455.000	63.2	-34.2	-20.0	Horizontal	14.2
1455.000	67.5	-29.9	-20.0	Vertical	9.9
1940.000	69.5	-27.9	-20.0	Horizontal	7.9
1940.000	62.8	-34.6	-20.0	Vertical	14.6
2425.000	53.9	-43.5	-20.0	Horizontal	23.5
2425.000	54.6	-42.8	-20.0	Vertical	22.8
2910.000	53.2	-44.2	-20.0	Horizontal	24.2
2910.000	54.1	-43.3	-20.0	Vertical	23.3
3395.000	-	-	-20.0	Horizontal	-
3395.000	-	-	-20.0	Vertical	-
3880.000	-	-	-20.0	Horizontal	-
3880.000	-	-	-20.0	Vertical	-
4365.000	-	-	-20.0	Horizontal	-
4365.000	-	-	-20.0	Vertical	-
4850.000	-	-	-20.0	Horizontal	-
4850.000	-	-	-20.0	Vertical	-

Device was tested on an open area test site at a distance of 3 metres.

Testing was carried out at EMC Technologies NZ Ltd Open Area Test Site, which is located at Driving Creek, Orere Point, Auckland. Details of this site have been filed with the Commission, Registration Number: 90838, which was last updated on February 17th, 2004.

The transmitter was tested while transmitting continuously while attached to a dummy load.

The power level of each emission was determined by replacing the transmitter with a dipole antenna that was connected to a signal generator. The signal generator output level was increased until the same field strength level was observed at each emission frequency.

The level recorded is the signal generator output level in dBm less any gains / losses due to the coax cable and the dipole antenna.

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 15 of 26

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Limit:

All spurious emissions are to be attenuated by at least $50 + 10 \log (P)$.

The rated power of 5 watts gives a limit of -20 dBm.

No measurements were made above the 10th harmonic.

Result: Complies

Measurement Uncertainty: ± 4.1 dB

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Field strength of the receiver spurious emissions

Frequency: 485.000 MHz Intermediate frequency: 83.1625 MHz

Frequency (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Polarity	Margin (dB)
568.160	31.2	46.0	Vertical	14.8
568.160	26.4	46.0	Horizontal	19.6
1136.320	32.3	54.0	Horizontal	21.7
1136.320	-	54.0	Vertical	-
1704.485	39.0	54.0	Horizontal	15.0
1704.485	42.6	54.0	Vertical	11.4
2272.645	44.1	54.0	Horizontal	9.9
2272.645	47.0	54.0	Vertical	7.0
2840.800	-	54.0	Horizontal	-
2840.800	-	54.0	Vertical	-

Device was tested on an open area test site at a distance of 3 metres.

Testing was carried out at EMC Technologies NZ Ltd Open Area Test Site, which is located at Driving Creek, Orere Point, Auckland. Details of this site have been filed with the Commission, Registration Number: 90838, which was last updated on February 17th, 2004.

The receiver was tested while receiving continuously while attached to a dummy load.

Limit:

The field strength limits as per CFR 47 Part 15, section 15.109 have been applied.

Result: Complies

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Frequency Stability

Frequency stability measurements were between - 30 °C and + 50°C in 10°C increments.

At each temperature the transmitter was given a period of 30 minutes to stabilise. The transmitter was then turned on and the frequency error measured after a period of 1 minute.

Measurements were made with the supply varied between 115% and 85% of the nominal supply voltage (13.8 Vdc).

Nominal Frequency: 485.0000 MHz

Voltage Temp.	Frequency Error (Hz)		
	11.7 Vdc	13.8 Vdc	15.9 Vdc
+50°C	-29.0	-29.0	-29.0
+40°C	-50.0	-49.0	-49.0
+30°C	-71.0	-71.0	-72.0
+20°C	-90.0	-90.0	-90.0
+10°C	-101.0	-100.0	-102.0
0°C	+10.0	+10.0	+10.0
-10°C	+47.0	+47.0	+48.0
-20°C	+87.0	+87.0	+87.0
-30°C	+116.0	+116.0	+117.0

Limit:

Part 90.213 states that base station transmitters operating between 421 – 512 MHz are required to have frequency tolerance of 2.5 ppm.

This transmitter operates on 450.0 MHz. $2.5 \text{ ppm} = 2.5 \times 450 = 1125 \text{ Hz}$.

Result: Complies

Measurement Uncertainty: $\pm 30 \text{ Hz}$

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Transient frequency behaviour

Transient frequency behaviour measurements are applicable to wide band and narrow band transmitters operating in the frequency band 421 – 512 MHz.

Measurements were carried out at 485.0000 MHz using the method described in TIA-603 and EN 300-086.

In summary this method calls for the use of an external signal generator tuned to 485.0000 MHz with a output level 0.1 % (-30 dB) of the level from the transmitter with a 1 kHz tone with a frequency deviation of 12.5 kHz being applied to the input of a modulation analyser along with the output from the transmitter.

The modulation analyser produces an amplitude difference signal and a frequency difference signal, which are applied to the input of a storage oscilloscope.

The unmodulated transmitter is then keyed which produces a trigger pulse that is AC coupled to the oscilloscope that produces a display on the screen.

The result of the change in the ratio of power between the test signal from the signal generator and the transmitter output will produce 2 separate sides on the oscilloscope picture. One will show the 1000 Hz test modulation and the other will be the frequency difference of the transmitter versus time.

Measured Transient Deviation		
Period t ₁ (ms)	period t ₂ (ms)	period t ₃ (ms)
10.0	25.0	10.0
Frequency Difference from the Nominal Frequency (kHz)		
Less than 6.25 kHz	nil	nil

Limits:

The maximum frequency difference:

Channel Spacing (kHz)	Transmitter Period t ₁ (kHz)	Transmitter Period t ₂ (kHz)	Transmitter Period t ₃ (kHz)
12.5	± 12.5	± 6.25	± 12.5

Result: Complies

Measurement Uncertainty: Frequency difference ±1.6 kHz
Time period ±1 ms

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

12.5 kHz transmitter turn on


Green Trace = 1 kHz tone with FM deviation of 12.5 kHz.
Black trace = transmitter amplitude response (AC coupled).

Green trace has been maximised to give full screen indication of a ± 12.5 kHz.
Therefore each Y axis division = 3.125 kHz per division.
The X axis has been set to a sweep rate of 10 mS/division.

Triggering has been set to occur 2 divisions from the left hand edge (20 mS).
This is position *ton*.

t1 occurs between 2.0 and 3.0 divisions from the left-hand edge.
t2 occurs between 3.0 and 5.5 divisions from the left-hand edge.

A transient response can be observed just after *ton* during *t1*.

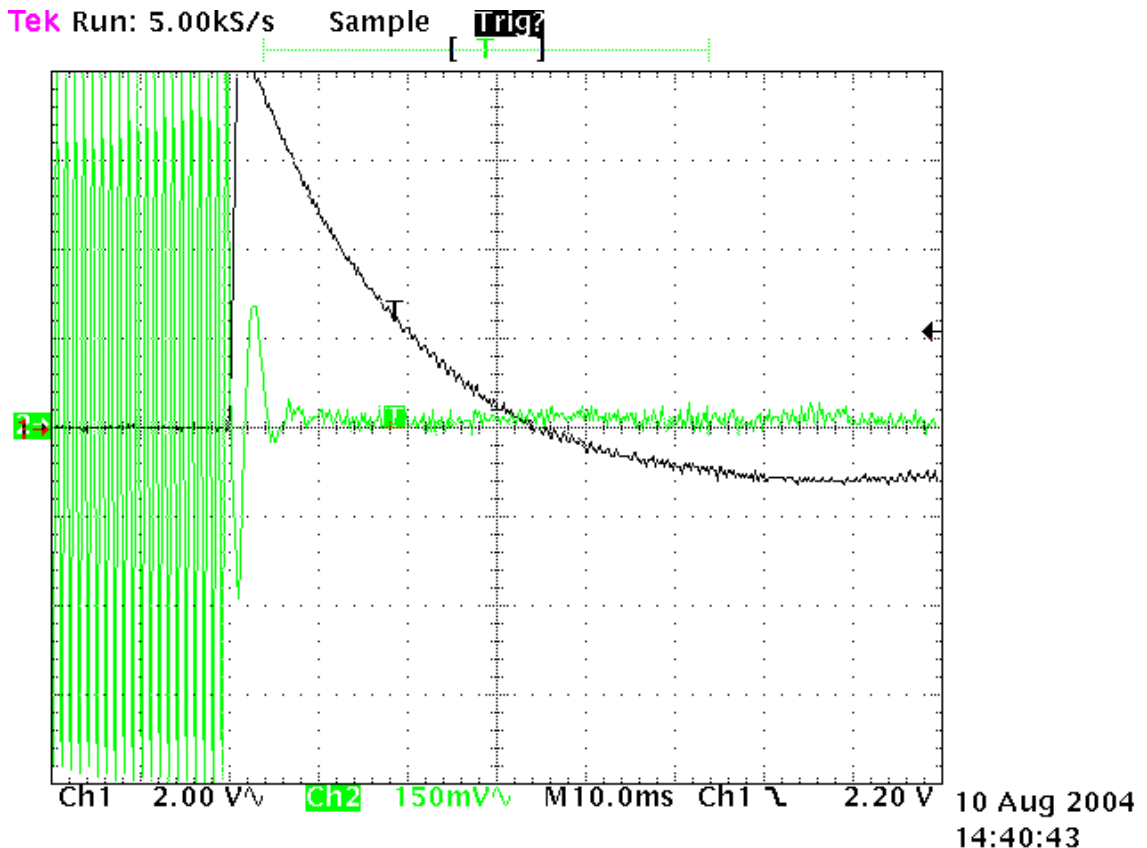

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

12.5 kHz transmitter turn off

Green Trace = 1 kHz tone with FM deviation of 12.5 kHz.
Black trace = transmitter amplitude response (AC coupled).

Green trace has been maximised to give full screen indication of a ± 12.5 kHz.
Therefore each Y axis division = 3.125 kHz per division.
The X axis has been set to a sweep rate of 10 mS/division.

The display of the 1 kHz signal rising has been positioned 5 divisions from the left hand edge (50 mS).

This is position *toff*.


t_3 occurs between 4.0 and 5.0 divisions from the left hand edge.

No transient responses can be observed before *toff*.

Tek Run: 5.00kS/s

Sample

Trigger

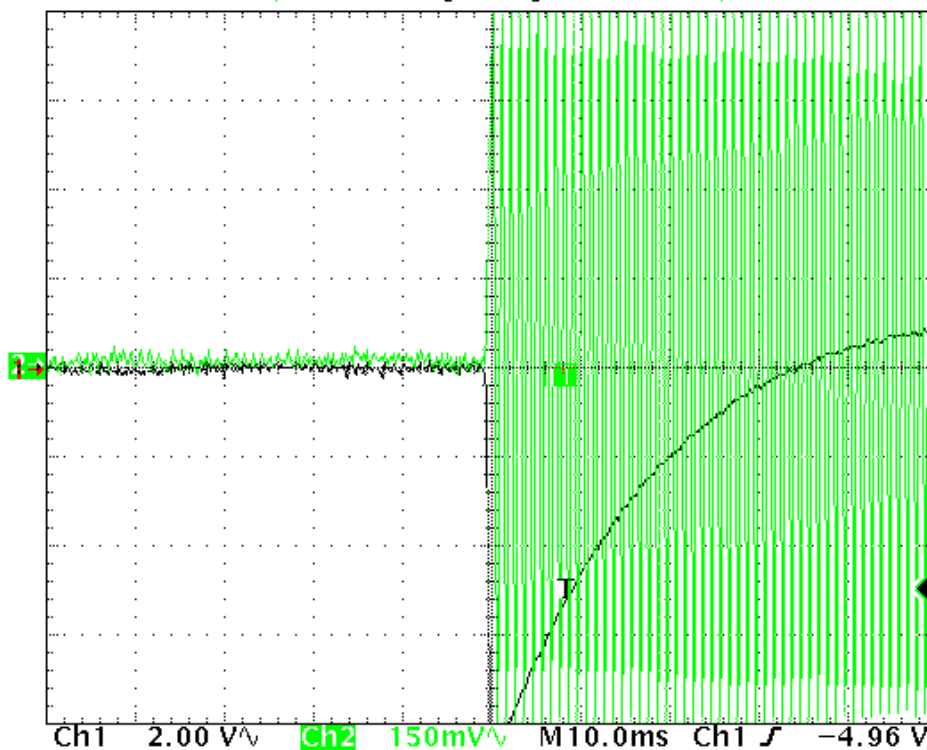

10 Aug 2004
14:42:38

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 21 of 26

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

Radio Frequency Hazard Information

As per Section 1.1310 and Section 2.1091 transmitters are required to be operated in a manner that ensures that the public is not exposed to RF energy levels in accordance with OST/OET Bulletin Number 65.

A minimum safe distance between the user / general public and the device has been calculated below.

In accordance with Section 1.1310 the Maximum Permissible Exposure (MPE) power density limit for the General Population / Uncontrolled Exposure of 0.32 mW/m² (f/1500 = 485 MHz/1500) has been applied.

The minimum distance from the antenna at which the MPE is met is calculated from the equation relating field strength in V/m, transmit power in watts, transmit antenna gain and separation distance in metres:

$$E, \text{ V/m} = (\sqrt{30 * P * G}) / d$$

$$\begin{aligned} \text{Power density} &= 0.32 \text{ mW/m}^2 = E^2/3770 \\ E &= \sqrt{0.32*3770} \\ E &= \underline{34.9 \text{ V/m}} \end{aligned}$$

The maximum transmitter power = 5 watts.

This transmitter sold without an antenna and therefore the manufacturer has no control over the gain of the antenna applied.

If an antenna with a gain of 6 dBi is used (gain = 4.0) the following will apply:

$$\begin{aligned} d &= \sqrt{(30 * P * G) / E} \\ &= \sqrt{(30 * 5.0 * 4.0) / 34.9} \\ &= \underline{0.70 \text{ metres or } 70 \text{ cm}} \end{aligned}$$

A safe distance of 70 cm should therefore be inserted in the installation manual for the device.

An instruction should also be supplied whereby the manufacturer should be contacted if an antenna gain of greater than 6 dBi is to be utilised in order that an alternative minimum safe distance can be calculated

Result: Complies

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

8. TEST EQUIPMENT USED

Instrument	Manufacturer	Model	Serial #	Asset
Aerial Controller	EMCO	1090	9112-1062	RFS 3710
Aerial Mast	EMCO	1070-1	9203-1661	RFS 3708
Attenuator 10 dB	Hewlett Packard	HP8491A	24838	E1329
Attenuator 20 dB	Weinschel	49-20-43	GC-104	E1308
Audio Analyzer	Hewlett Packard	8903A	2216A01713	E1146
Biconical Antenna	Schwarzbeck	BBA 9106		RFS 3612
Frequency Counter	Hewlett Packard	HP 5342A	1916A01713	E1224
Level generator	Anritsu	MG443B	M61689	E1143
Log Periodic Antenna	Schwarzbeck	UHALP 9107		RFS 3702
Measurement Receiver	Rohde & Schwarz	ESCS 30	839873/1	
Modulation Analyzer	Rohde & Schwarz	FMA	837807/020	E1552
Modulation Analyzer	Hewlett Packard	8901B	2608A00782	E1090
Oscilloscope	Tektronics	745A	B010643	1569
Power Attenuator	Weinschel	49-20-43	GC104	E1308
Power Supply	Hewlett Packard	6032A	2743A-02859	E1069
RF Power Meter	Hewlett Packard	HP 436A	2512A22439	E1198
Rubidium Oscillator	Ball Efratom	FRS - C	4287	E1053
Selective Level Meter	Anritsu	ML422C	M35386	E1140
Signal Generator	Rohde & Schwarz	SMHU.58	838923/028	E1493
Spectrum Analyzer	Hewlett Packard	E7405A	US39150142	3776
Thermal chamber	Contherm	M180F	86025	E1129
Thermometer	DSIR	RT200	035	E1049
Turntable	EMCO	1080-1-2.1	9109-1578	RFS 3709
Variac	General Radio	1592	-	3690

9. ACCREDITATIONS

Testing was carried out in accordance with EMC Technologies NZ Ltd registration with the Federal Communications Commission as a listed facility, Registration Number: 90838, which was last updated on February 17th, 2004.

All testing has been carried out in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

All measurement equipment has been calibrated in accordance with the terms of EMC Technologies (NZ) Ltd's International Accreditation New Zealand (IANZ) Accreditation to ISO/IEC 17025.

International Accreditation New Zealand has Mutual Recognition Arrangements for testing and calibration with 46 accreditation bodies in 34 economies. This includes NATA (Australia), UKAS (UK), SANAS (South Africa), NVLAP (USA), A2LA (USA), SWEDAC (Sweden). Further details can be supplied on request.

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand
POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 23 of 26


EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

10. PHOTOGRAPH (S)

Label

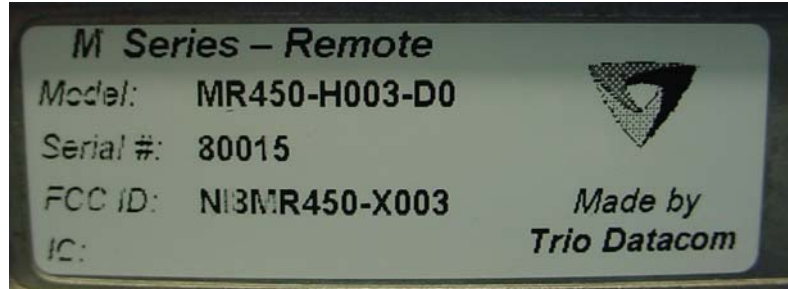

External view



EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 24 of 26

EMC Technologies (NZ) Ltd


Test Report No 40747.1

Report date: 12th August 2004

Internal Views



Radiated emissions test setup photos

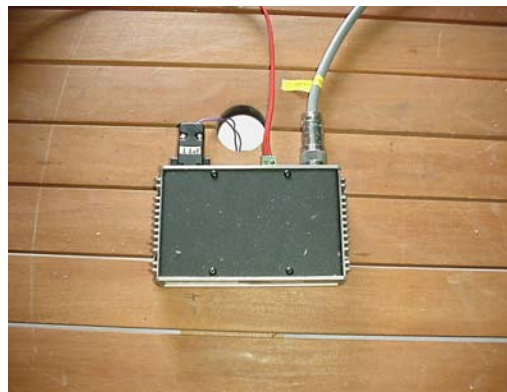

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz


Web Site: www.emctech.com.au

Page 25 of 26

EMC Technologies (NZ) Ltd

Test Report No 40747.1

Report date: 12th August 2004

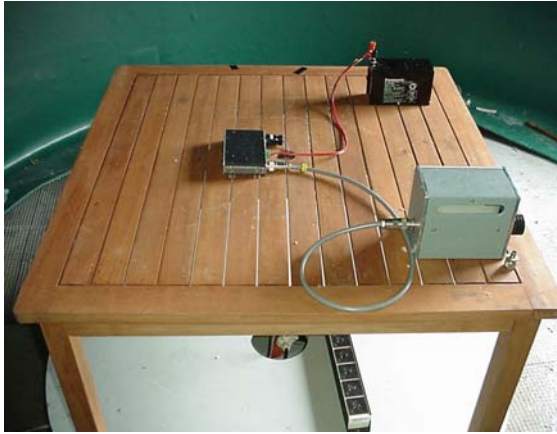

EMC Technologies (NZ) Ltd

STREET ADDRESS - 47 MacKelvie Street, Grey Lynn, Auckland, New Zealand

POSTAL ADDRESS - PO Box 68 307, Newton, Auckland, New Zealand

This report may not be reproduced except in full

Telephone: +64 9 360 0862 Fax: +64 9 360 0861

E-mail: aucklab@ihug.co.nz

Web Site: www.emctech.com.au

Page 26 of 26