

# FCC Part 15 EMI TEST REPORT

of

E.U.T. : Bluetooth Laser Mouse  
Model : BX700, MBL167\_AA6I  
FCC ID : NIYBX700

for

APPLICANT : Dexin Corporation

ADDRESS : 14F-8, No.258, Lian-Cheng Rd., Chung-Ho City,  
Taipei Hsien 235, Taiwan R.O.C.

Test Performed by

**ELECTRONICS TESTING CENTER, TAIWAN**

NO.34, LIN 5, DINGFU TSUEN, LINKOU SHIANG  
TAIPEI COUNTY, TAIWAN, 24442, R.O.C.

Tel:(02)26023052 Fax:(02)26010910

<http://www.etc.org.tw> ; e-mail : [emc@etc.org.tw](mailto:emc@etc.org.tw)

Report Number : 09-07-RBF-117-04

# TEST REPORT CERTIFICATION

Applicant : Dexin Corporation  
14F-8, No.258, Lian-Cheng Rd., Chung-Ho City, Taipei Hsien 235,  
Taiwan R.O.C.

Manufacture : DEXIN ELECTRONIC  
Shi Tan Pu Industrial, Tangxia Town, Dongguan, Guangdong, China.

Description of Device :

- a) Type of EUT : Bluetooth Laser Mouse
- b) Trade Name : ASUS, DEXIN
- c) Model No. : BX700, MBL167\_AA6I
- d) Power Supply : DC 1.5V battery x 2

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C (2008)

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.  
2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Date Test Item Received : Jul. 22, 2009  
Date Test Campaign Completed : Jul. 29, 2009  
Date of Issue : Jul. 31, 2009

Test Engineer


:



( falcon Shi, Engineer )

Check By

:

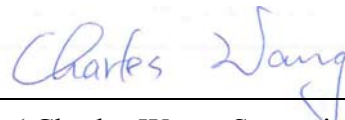

( Charles Wang, Supervisor )

Approve & Authorized

:



Will Yauo, Manager  
EMC Dept. II of ELECTRONICS  
TESTING CENTER, TAIWAN

<b>Table of Contents</b>	<b>Page</b>
<b>1 GENERAL INFORMATION .....</b>	<b>1</b>
1.1 Product Description.....	1
1.2 Test Methodology .....	1
1.3 Test Facility.....	1
<b>2 PROVISIONS APPLICABLE .....</b>	<b>2</b>
2.1 Definition .....	2
2.2 Requirement for Compliance .....	3
2.3 Restricted Bands of Operation .....	5
2.4 Labeling Requirement.....	6
2.5 User Information .....	6
<b>3 SYSTEM TEST CONFIGURATION .....</b>	<b>7</b>
3.1 Justification .....	7
3.2 Devices for Tested System.....	7
<b>4 RADIATED EMISSION MEASUREMENT .....</b>	<b>8</b>
4.1 Applicable Standard .....	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument .....	10
4.4 Radiated Emission Data .....	11
4.5 Field Strength Calculation.....	19
4.6 Photos of Radiation Measuring Setup.....	20
<b>5 CONDUCTED EMISSION MEASUREMENT .....</b>	<b>21</b>
5.1 Description .....	21
<b>6 ANTENNA REQUIREMENT .....</b>	<b>22</b>
6.1 Standard Applicable .....	22
6.2 Antenna Construction.....	22
<b>7 HOPPING CHANNEL SEPARATION.....</b>	<b>23</b>
7.1 Standard Applicable .....	23
7.2 Measurement Procedure.....	23
7.3 Measurement Equipment .....	24
7.4 Measurement Data .....	24
<b>8 NUMBER OF HOPPING FREQUENCY USED.....</b>	<b>31</b>
8.1 Standard Applicable .....	31
8.2 Measurement Procedure.....	31
8.3 Measurement Equipment .....	31

8.4 Measurement Data .....	32
<b>9 CHANNEL BANDWIDTH .....</b>	<b>39</b>
9.1 Standard Applicable .....	39
9.2 Measurement Procedure .....	39
9.3 Measurement Equipment .....	40
9.4 Measurement Data .....	40
<b>10 DWELL TIME ON EACH CHANNEL.....</b>	<b>47</b>
10.1 Standard Applicable .....	47
10.2 Measurement Procedure .....	47
10.3 Measurement Equipment .....	47
10.4 Measurement Data .....	48
<b>11 OUTPUT POWER MEASUREMENT .....</b>	<b>56</b>
11.1 Standard Applicable .....	56
11.2 Measurement Procedure .....	56
11.3 Measurement Equipment .....	56
11.4 Measurement Data .....	57
<b>12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT .....</b>	<b>64</b>
12.1 Standard Applicable .....	64
12.2 Measurement Procedure .....	64
12.3 Measurement Equipment .....	64
12.4 Measurement Data .....	65
<b>13 OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT.....</b>	<b>70</b>
13.1 Standard Applicable .....	70
13.2 Measurement Procedure .....	70
13.3 Measurement Equipment .....	70
13.4 Measurement Data .....	71
<b>14 PEAK POWER SPECTRAL DENSITY MEASUREMENT .....</b>	<b>85</b>
14.1 Standard Applicable .....	85
14.2 Measurement Procedure .....	85
14.3 Measurement Equipment .....	85
14.4 Measurement Data .....	86

# 1 GENERAL INFORMATION

## 1.1 Product Description

- a) Type of EUT : Bluetooth Laser Mouse
- b) Trade Name : ASUS, DEXIN
- c) Model No. : BX700, MBL167\_AA6I
- d) Power Supply : DC 1.5V battery x 2

## 1.2 Test Methodology

For Bluetooth Laser Mouse, both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (2003). Other required measurements were illustrated in separate sections of this test report for details.

## 1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at NO.34, LIN 5, DINGFU TSUEN, LINKOU SHIANG TAIPEI COUNTY, TAIWAN, 24442, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Aug. 05, 2008.

## 2 PROVISIONS APPLICABLE

### 2.1 Definition

**Unintentional radiator:**

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

**Class A Digital Device:**

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

**Class B Digital Device :**

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business of industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

**Intentional radiator:**

A device that intentionally generates and emits radio frequency energy by radiation or induction.

## 2.2 Requirement for Compliance

### (1) Conducted Emission Requirement

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 $\mu$ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency MHz	Quasi Peak dB $\mu$ V	Average dB $\mu$ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

\* Decreases with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

### (2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB $\mu$ V/m	Radiated $\mu$ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.



**(3) Antenna Requirement**

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

**(4) Hopping Channel Separation**

According to 15.247(a)(1), frequency hopping system shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

**(5) Number of Hopping frequencies used**

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

**(6) Hopping Channel Bandwidth**

According to 15.247(a)(1)(ii), for frequency hopping system operating in the 5725-5850 MHz band, the maximum 20dB bandwidth of the hopping channel is 1MHz.

**(7) Dwell Time of each frequency**

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 MHz band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

**(8) Output Power Requirement**

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

**(9) 100 kHz Bandwidth of Frequency Band Edges Requirement**

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

**(10) Out-of-Band Conducted Emission Requirement**

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

**(11) Peak Power Spectral Density Requirement**

According to 15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

**2.3 Restricted Bands of Operation**

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

\*\* : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

## 2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

### 3 SYSTEM TEST CONFIGURATION

#### 3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT (if applicable) to maximize the emission from EUT.

For conducted and radiated emissions, whichever RF channel is operated, the digital circuits' function identically. As the reason, measurement of emissions from digital circuits is performed with the highest, middle and the lowest channel by transmitting mode.

#### 3.2 Devices for Tested System

Device	Manufacture	Model / FCC ID.	Description
Bluetooth Laser Mouse	DEXIN ELECTRONIC	BX700, MBL167_AA6I /NIYBX700	----

Remark “\*” means equipment under test.

## 4 RADIATED EMISSION MEASUREMENT

### 4.1 Applicable Standard

For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

### 4.2 Measurement Procedure

1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration


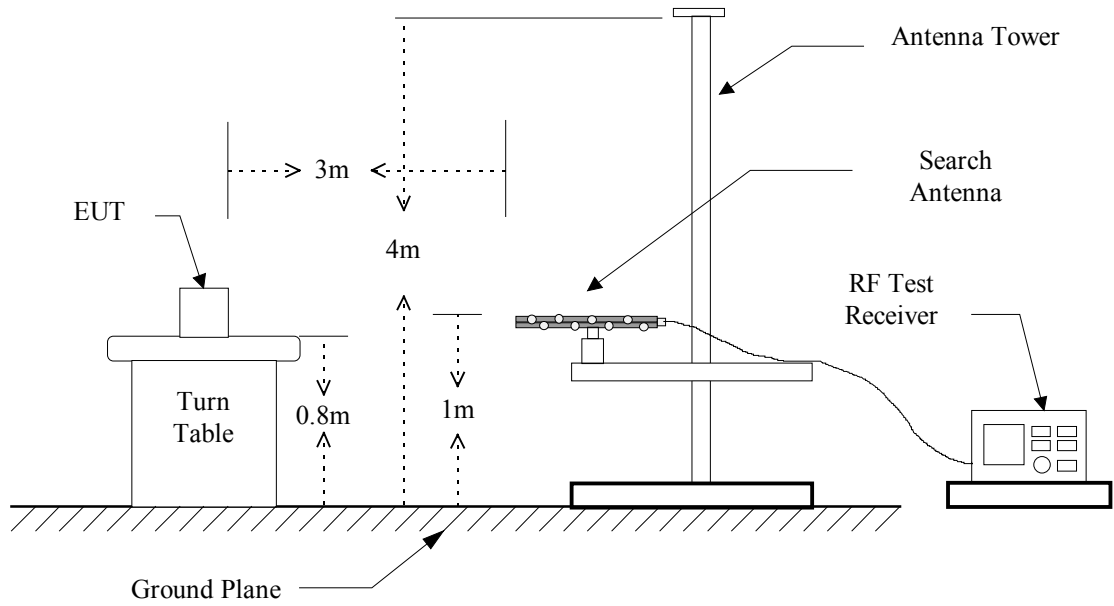


Figure 2 : Frequencies measured above 1 GHz configuration

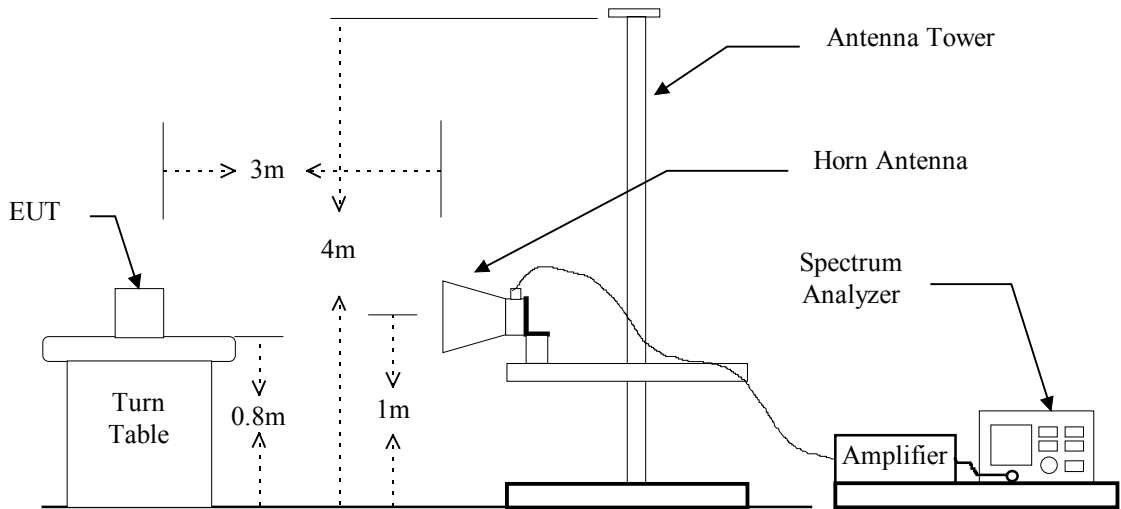

### 4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESVS30	2009/05/07	2010/05/07
Spectrum	Advantest	R3162	2009/02/03	2010/02/03
Bi-Log Antenna	Schaffner	CBL 6111	2009/05/06	2010/05/06
Log-periodic Antenna	EMCO	3146	2008/10/08	2009/10/08
Biconical Antenna	EMCO	3110B	2008/09/16	2009/09/16
Double Ridged Antenna	EMCO	3115	2009/05/12	2010/05/11
Amplifier	HP	8449B	2008/12/05	2009/12/04
Amplifier	HP	83051A	2009/05/11	2010/05/10
Amplifier	HP	8447D	2009/05/07	2010/05/06
Spectrum	Rohde & Schwarz	FSP40	2008/09/11	2009/09/11

Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

### 4.4 Radiated Emission Data

#### 4.4.1 Tx Portion

Test Mode: 8DPSK

#### A. Channel Low

Operation Mode : Transmitting

Fundamental Frequency : 2402.000 MHz

Test Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBUV)				Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
4804.032	48.1	***	47.1	***	-0.9	47.2	***	74.0	54.0	-26.8	67	1.1
7206.048	---	---	---	---	5.7	---	---	74.0	54.0	---	---	---
9608.064	---	---	---	---	7.2	---	---	74.0	54.0	---	---	---
12010.080	---	---	---	---	9.2	---	---	74.0	54.0	---	---	---
14412.096	---	---	---	---	11.5	---	---	74.0	54.0	---	---	---
16814.112	---	---	---	---	11.8	---	---	74.0	54.0	---	---	---
19216.128	---	---	---	---	8.9	---	---	74.0	54.0	---	---	---
21618.144	---	---	---	---	9.7	---	---	74.0	54.0	---	---	---
24020.160	---	---	---	---	10.3	---	---	74.0	54.0	---	---	---

Operation Mode : Receiving

Fundamental Frequency : Local Frequency : 2402.000 MHz

Test Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBUV)				Factor (dB) Corr.	Result @3m (dBUV/m)		Limit @3m (dBUV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
* 2402.000	---	---	---	---	-3.1	---	---	74.0	54.0	---	---	---
* 4804.000	---	---	---	---	2.5	---	---	74.0	54.0	---	---	---
* 7206.000	---	---	---	---	5.7	---	---	74.0	54.0	---	---	---
* 9608.000	---	---	---	---	7.2	---	---	74.0	54.0	---	---	---
* 12010.000	---	---	---	---	9.2	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “\*\*\*” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Remark “\*” means the local oscillator frequency and its harmonics.
5. Item “Margin” referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.



**B. Channel Middle**Operation Mode : TransmittingFundamental Frequency : 2441.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
4882.014	48.6	***	47.9	****	-0.7	47.9	***	74.0	54.0	-26.1	66	1.0
7323.021	---	---	---	---	5.9	---	---	74.0	54.0	---	---	---
9764.028	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
12205.035	---	---	---	---	9.3	---	---	74.0	54.0	---	---	---
14646.042	---	---	---	---	11.6	---	---	74.0	54.0	---	---	---
17087.049	---	---	---	---	13.3	---	---	74.0	54.0	---	---	---
19528.056	---	---	---	---	8.5	---	---	74.0	54.0	---	---	---
21969.063	---	---	---	---	9.9	---	---	74.0	54.0	---	---	---
24410.070	---	---	---	---	10.7	---	---	74.0	54.0	---	---	---

Operation Mode : ReceivingFundamental Frequency : Local Frequency : 2441.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
* 2441.000	---	---	---	---	-2.9	---	---	74.0	54.0	---	---	---
* 4882.000	---	---	---	---	2.7	---	---	74.0	54.0	---	---	---
* 7323.000	---	---	---	---	5.9	---	---	74.0	54.0	---	---	---
* 9764.000	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
* 12205.000	---	---	---	---	9.3	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “\*\*\*” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Remark “\*” means the local oscillator frequency and its harmonics.
5. Item “Margin” referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

**C. Channel High**Operation Mode : TransmittingFundamental Frequency : 2480.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
4959.988	47.6	***	48.2	***	-0.5	47.7	***	74.0	54.0	-26.3	72	1.1
7439.982	---	---	---	---	6.1	---	---	74.0	54.0	---	---	---
9919.976	---	---	---	---	7.4	---	---	74.0	54.0	---	---	---
12399.970	---	---	---	---	9.4	---	---	74.0	54.0	---	---	---
14879.964	---	---	---	---	11.5	---	---	74.0	54.0	---	---	---
17359.958	---	---	---	---	15.2	---	---	74.0	54.0	---	---	---
19839.952	---	---	---	---	8.6	---	---	74.0	54.0	---	---	---
22319.946	---	---	---	---	10.2	---	---	74.0	54.0	---	---	---
24799.940	---	---	---	---	11.0	---	---	74.0	54.0	---	---	---

Operation Mode : ReceivingFundamental Frequency : Local Frequency : 2480.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
* 2480.000	---	---	---	---	-2.8	---	---	74.0	54.0	---	---	---
* 4960.000	---	---	---	---	2.8	---	---	74.0	54.0	---	---	---
* 7440.000	---	---	---	---	6.1	---	---	74.0	54.0	---	---	---
* 9920.000	---	---	---	---	7.4	---	---	74.0	54.0	---	---	---
* 12400.000	---	---	---	---	9.4	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "\*\*\*" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Remark "\*" means the local oscillator frequency and its harmonics.
5. Item "Margin" referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

**Test Mode: GFSK****A. Channel Low**Operation Mode : TransmittingFundamental Frequency : 2402.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave			
4803.842	47.7	***	46.5	***	-0.9	46.8	***	74.0	54.0	-27.2	69	1.2
7205.763	---	---	---	---	5.7	---	---	74.0	54.0	---	---	---
9607.684	---	---	---	---	7.2	---	---	74.0	54.0	---	---	---
12009.605	---	---	---	---	9.2	---	---	74.0	54.0	---	---	---
14411.526	---	---	---	---	11.5	---	---	74.0	54.0	---	---	---
16813.447	---	---	---	---	11.8	---	---	74.0	54.0	---	---	---
19215.368	---	---	---	---	8.9	---	---	74.0	54.0	---	---	---
21617.289	---	---	---	---	9.7	---	---	74.0	54.0	---	---	---
24019.210	---	---	---	---	10.3	---	---	74.0	54.0	---	---	---

Operation Mode : ReceivingFundamental Frequency : Local Frequency : 2402.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
	Peak	Ave	Peak	Ave		Peak	Ave	Peak	Ave			
* 2402.000	---	---	---	---	-3.1	---	---	74.0	54.0	---	---	---
* 4804.000	---	---	---	---	2.5	---	---	74.0	54.0	---	---	---
* 7206.000	---	---	---	---	5.7	---	---	74.0	54.0	---	---	---
* 9608.000	---	---	---	---	7.2	---	---	74.0	54.0	---	---	---
* 12010.000	---	---	---	---	9.2	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “\*\*\*” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Remark “\*” means the local oscillator frequency and its harmonics.
5. Item “Margin” referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

**B. Channel Middle**Operation Mode : TransmittingFundamental Frequency : 2441.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
4882.067	48.2	***	47.2	****	-0.7	47.5	***	74.0	54.0	-26.5	58	1.1
7323.101	---	---	---	---	5.9	---	---	74.0	54.0	---	---	---
9764.135	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
12205.169	---	---	---	---	9.3	---	---	74.0	54.0	---	---	---
14646.203	---	---	---	---	11.6	---	---	74.0	54.0	---	---	---
17087.237	---	---	---	---	13.3	---	---	74.0	54.0	---	---	---
19528.271	---	---	---	---	8.5	---	---	74.0	54.0	---	---	---
21969.305	---	---	---	---	9.9	---	---	74.0	54.0	---	---	---
24410.339	---	---	---	---	10.7	---	---	74.0	54.0	---	---	---

Operation Mode : ReceivingFundamental Frequency : Local Frequency : 2441.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
* 2441.000	---	---	---	---	-2.9	---	---	74.0	54.0	---	---	---
* 4882.000	---	---	---	---	2.7	---	---	74.0	54.0	---	---	---
* 7323.000	---	---	---	---	5.9	---	---	74.0	54.0	---	---	---
* 9764.000	---	---	---	---	7.3	---	---	74.0	54.0	---	---	---
* 12205.000	---	---	---	---	9.3	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "\*\*\*\*" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Remark "\*" means the local oscillator frequency and its harmonics.
5. Item "Margin" referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

**C. Channel High**Operation Mode : TransmittingFundamental Frequency : 2480.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
4959.942	47.9	***	47.3	***	-0.5	47.4	***	74.0	54.0	-26.6	47	1.2
7439.913	---	---	---	---	6.1	---	---	74.0	54.0	---	---	---
9919.884	---	---	---	---	7.4	---	---	74.0	54.0	---	---	---
12399.855	---	---	---	---	9.4	---	---	74.0	54.0	---	---	---
14879.826	---	---	---	---	11.5	---	---	74.0	54.0	---	---	---
17359.797	---	---	---	---	15.2	---	---	74.0	54.0	---	---	---
19839.768	---	---	---	---	8.6	---	---	74.0	54.0	---	---	---
22319.739	---	---	---	---	10.2	---	---	74.0	54.0	---	---	---
24799.710	---	---	---	---	11.0	---	---	74.0	54.0	---	---	---

Operation Mode : ReceivingFundamental Frequency : Local Frequency : 2480.000 MHzTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
* 2480.000	---	---	---	---	-2.8	---	---	74.0	54.0	---	---	---
* 4960.000	---	---	---	---	2.8	---	---	74.0	54.0	---	---	---
* 7440.000	---	---	---	---	6.1	---	---	74.0	54.0	---	---	---
* 9920.000	---	---	---	---	7.4	---	---	74.0	54.0	---	---	---
* 12400.000	---	---	---	---	9.4	---	---	74.0	54.0	---	---	---

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "\*\*\*\*" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Remark "\*" means the local oscillator frequency and its harmonics.
5. Item "Margin" referred to Average limit while there is only peak result.
6. The expanded uncertainty of the radiated emission tests is 3.53 dB.

**4.4.2 Radiated Emissions in Restricted Bands****Test Mode: 8PDSK**Operation Mode : Receiving /TransmittingTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %**Operation Mode : CH Low Restricted Frequency band : 2310MHz-2390MHz**

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
2382.064	50.1	***	51.1	***	-0.5	50.6	***	74.0	54.0	-23.4	33	1.0
2388.513	49.8	***	48.7	***	-3.1	46.7	***	74.0	54.0	-27.3	24	1.1

**Operation Mode : CH Hiigh Restricted Frequency band : 2483.5MHz-2500MHz**

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
2483.678	50.1	***	49.8	***	-2.8	47.3	***	74.0	54.0	-26.7	83	1.0
2485.120	49.6	***	49.4	***	-2.8	46.8	***	74.0	54.0	-27.2	27	1.1

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark “\*\*\*” means that Peak result is meet average limit.
3. Remark “---” means that the emissions level is too low to be measured.
4. Item “Margin” referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

**Test Mode: GFSK**Operation Mode : Receiving /TransmittingTest Date : Jul. 23, 2009 Temperature : 22 °C Humidity : 58 %**Operation Mode : CH Low Restricted Frequency band : 2310MHz-2390MHz**

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
2379.610	50.6	***	50.8	***	-0.5	50.3	***	74.0	54.0	-23.7	34	1.1
2382.880	49.9	***	50.2	***	-3.1	47.1	***	74.0	54.0	-26.9	67	1.2

**Operation Mode : CH Hiigh Restricted Frequency band : 2483.5MHz-2500MHz**

Frequency (MHz)	Reading (dBuV)				Factor (dB) Corr.	Result @3m (dBuV/m)		Limit @3m (dBuV/m)		Margin (dB)	Table Deg. (Deg.)	Ant. High (m)
	H		V			Peak	Ave	Peak	Ave			
2483.917	50.6	***	50.8	***	-2.8	48.0	***	74.0	54.0	-26.7	27	1.1
2484.620	50.2	***	50.1	***	-2.8	47.4	***	74.0	54.0	-27.2	58	1.1

Note :

1. Item of margin shown in above table refer to average limit.
2. It is considered that the results of average comply with average limit when measuring data with a peak function detector meet the average limit. Mark "\*\*\*\*" means that Peak result is meet average limit.
3. Remark "---" means that the emissions level is too low to be measured.
4. Item "Margin" referred to Average limit while there is only peak result.
5. The expanded uncertainty of the radiated emission tests is 3.53 dB.

### 4.4.3 Other Emissions

a) Emission frequencies below 1 GHz

Operation Mode : Bluetooth Mode

Test Date : Jul. 23, 2009      Temperature : 22 °C      Humidity : 58 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
194.970	V	31.8	-7.8	24.0	43.5	-19.5	112	1.0
217.380	H	30.6	-6.0	24.6	46.0	-21.4	27	1.5
234.660	H	31.0	-4.8	26.2	46.0	-19.8	96	1.5
247.890	H	31.3	-4.0	27.3	46.0	-18.7	54	1.1
268.140	H	32.7	-3.7	29.0	46.0	-17.0	88	1.1
287.850	H	32.0	-2.2	29.8	46.0	-16.2	128	1.0

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

b) Emission frequencies above 1 GHz

Radiated emission frequencies above 1 GHz to 25 GHz were too low to be measured with a pre-amplifier of 35 dB.

## 4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss (if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$



#### 4.6 Photos of Radiation Measuring Setup



## **5 CONDUCTED EMISSION MEASUREMENT**

### **5.1 Description**

This EUT is excused from investigation of conducted emission, for it is powered by DC only. According to § 15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

## **6 ANTENNA REQUIREMENT**

### **6.1 Standard Applicable**

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

### **6.2 Antenna Construction**

The antenna is permanently mounted on RF Board, no consideration of replacement. Please see photos submitted in Exhibit B.

## 7 HOPPING CHANNEL SEPARATION


### 7.1 Standard Applicable

According to 15.247(a)(1), frequency hopping system shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

### 7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peaks of two adjacent channels
  - Resolution (or IF) Bandwidth (RBW)  $\geq 1\%$  of the span
  - Video (or Average) Bandwidth (VBW)  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Figure 4 : Measurement configuration.



### 7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2008/09/11	2009/09/11
Attenuator	Weinschel Engineering	1	N/A	N/A

### 7.4 Measurement Data

Test Date : Jul. 23, 2009      Temperature : 25 °C      Humidity : 65 %

**Test Mode: 8DPSK**

- a) Channel Low : Adjacent Hopping Channel Separation is 1000 kHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1000 kHz
- c) Channel High : Adjacent Hopping Channel Separation is 1000 kHz

**Test Mode: GFSK**

- a) Channel Low : Adjacent Hopping Channel Separation is 1000 kHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1000 kHz
- c) Channel High : Adjacent Hopping Channel Separation is 1000 kHz


**Note : The expanded uncertainty of the hopping channel separation tests is 2dB.**

**Test Mode: 8DPSK/Channel Low**



\*RBW 30 kHz      Delta 1 [T1 ]  
\*VBW 100 kHz      0.00 dB  
SWT 15 ms      1.000000000 MHz

Ref 10 dBm      Att 5 dB

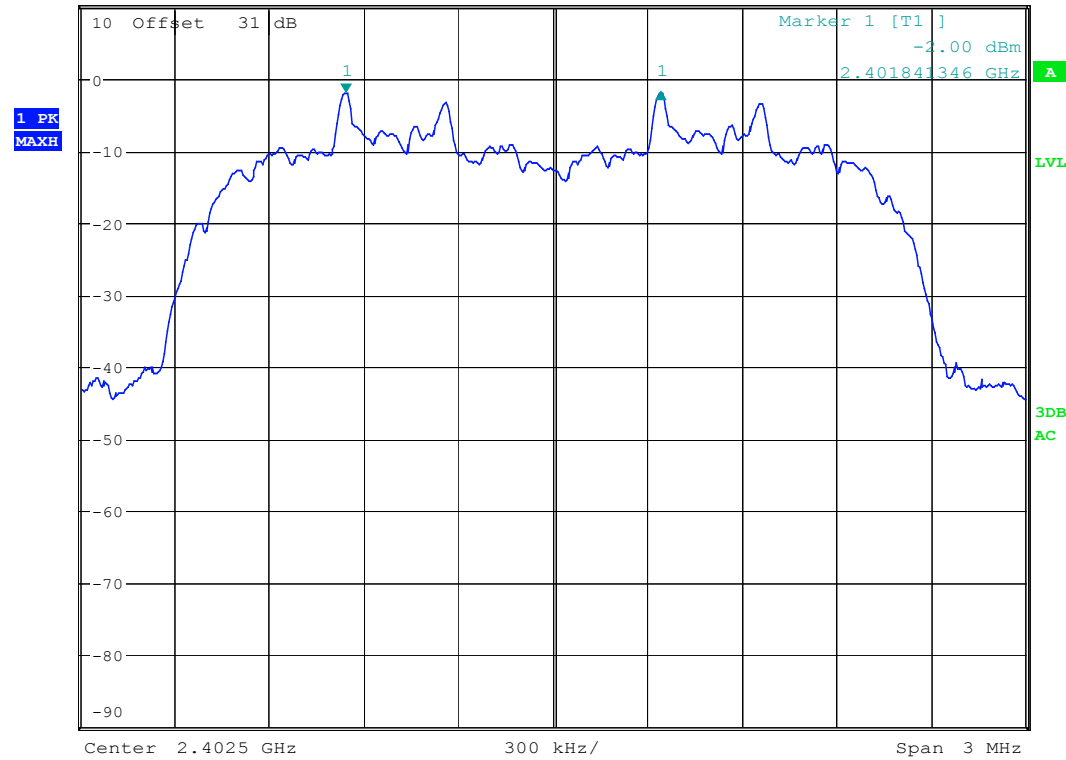


Date: 24.JUL.2009 16:14:24

**Test Mode: 8DPSK/Channel Middle**



\*RBW 30 kHz      Delta 1 [T1 ]  
\*VBW 100 kHz      -0.01 dB  
SWT 15 ms      1.000000000 MHz

Ref 10 dBm      Att 5 dB

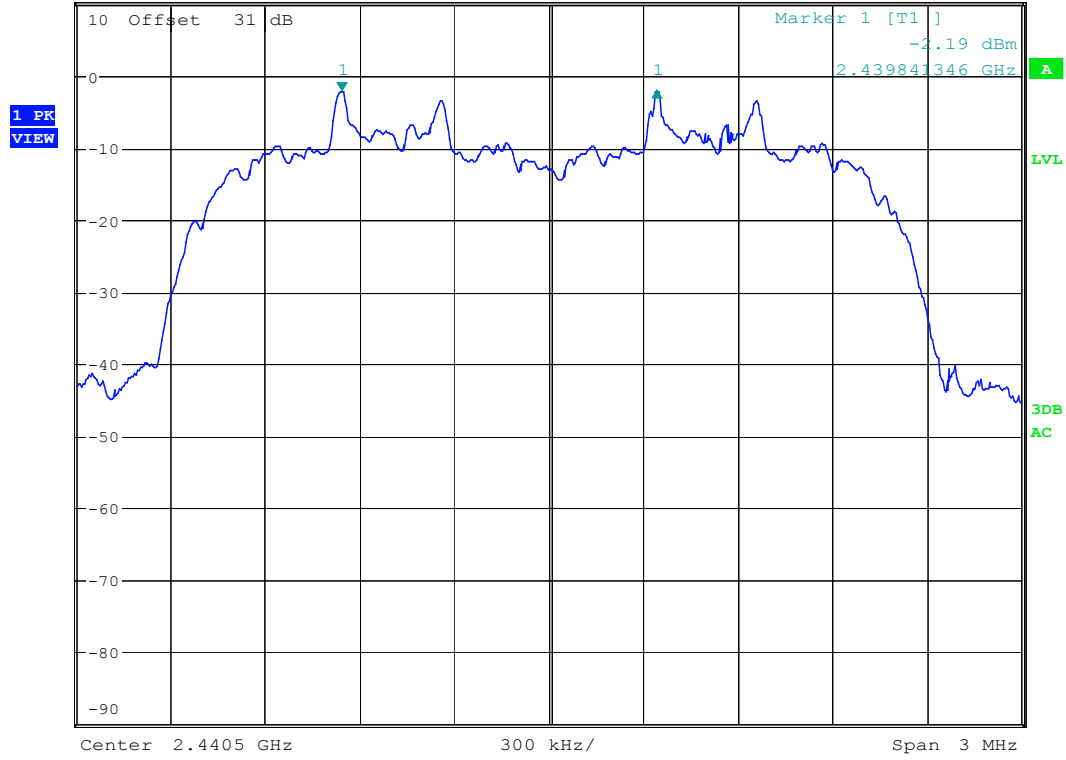

Date: 24.JUL.2009 17:04:53

**Test Mode: 8DPSK/Channel High**




\*RBW 30 kHz      Delta 1 [T1 ]  
\*VBW 100 kHz      0.10 dB  
SWT 15 ms      1.000961538 MHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

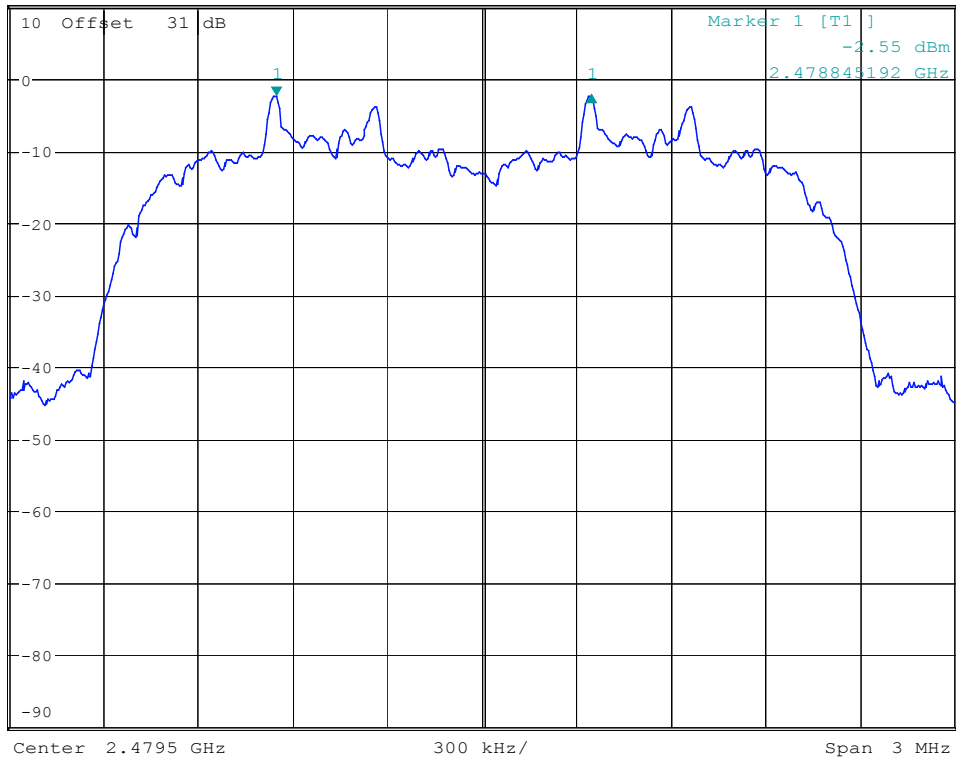

Date: 26.JUL.2009 11:49:11



**Test Mode: GFSK/Channel Low**




\*RBW 30 kHz      Delta 1 [T1 ]  
\*VBW 100 kHz      0.02 dB  
SWT 15 ms      1.000961538 MHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

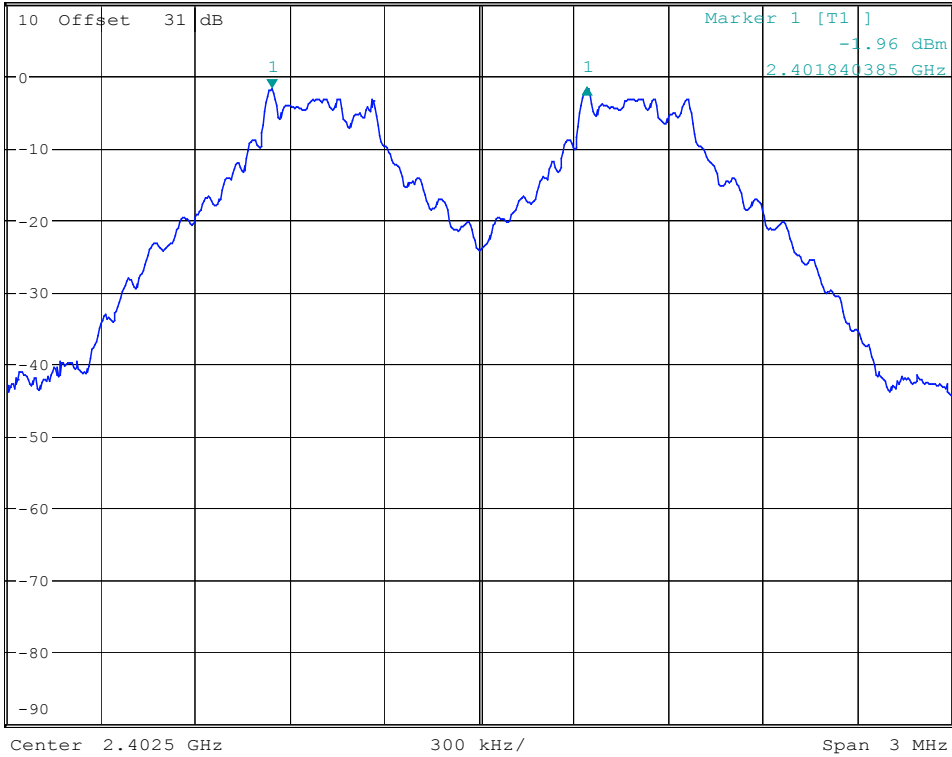

Date: 24.JUL.2009 15:23:37


**Test Mode: GFSK /Channel Middle**



\*RBW 30 kHz      Delta 1 [T1 ]  
\*VBW 100 kHz      0.02 dB  
SWT 15 ms      1.000961538 MHz

Ref 10 dBm

Att 5 dB

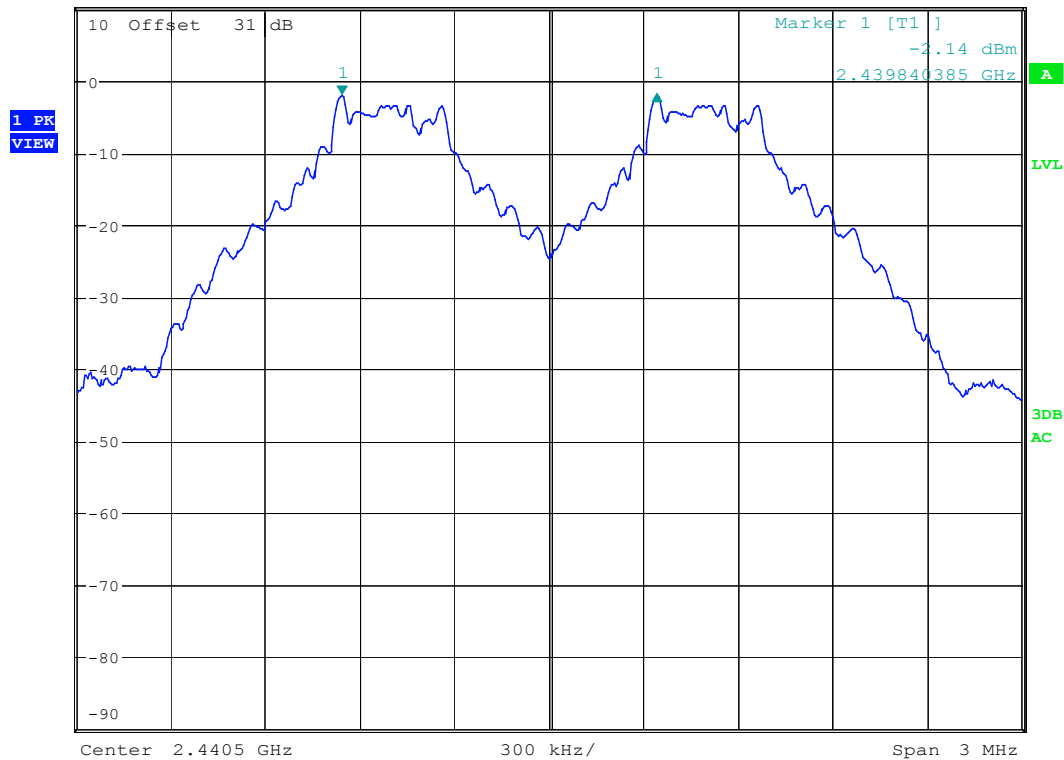

Date: 24.JUL.2009 15:20:15


**Test Mode: GFSK/Channel High**



\*RBW 30 kHz      Delta 1 [T1 ]  
\*VBW 100 kHz      -0.06 dB  
SWT 15 ms      1.000000000 MHz

Ref 10 dBm

\*Att 10 dB

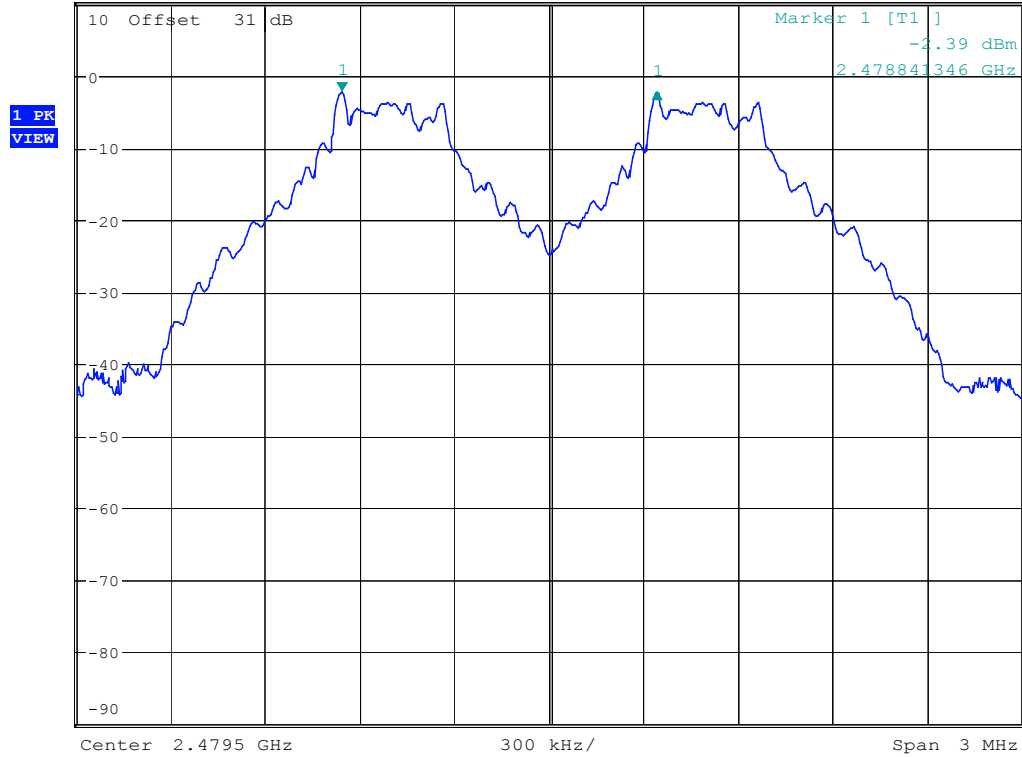

Date: 24.JUL.2009 14:49:29

## 8 NUMBER OF HOPPING FREQUENCY USED

### 8.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 non-overlapping channels.

### 8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
  - Span = the frequency band of operation
  - RBW  $\geq$  1% of the span
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2008/09/11	2009/09/11
Attenuator	Weinschel Engineering	1	N/A	N/A

## 8.4 Measurement Data

Test Date : Jul. 23, 2009      Temperature : 25 °C      Humidity : 65 %

***Test Mode: 8DPSK & GFSK***

There are 79 hopping frequencies used.

***Note : The expanded uncertainty of number of hopping frequency used tests is 2dB.***


**Test Mode: 8DPSK/Channel Low**



\* RBW 30 kHz  
\* VBW 100 kHz  
\* SWT 300 ms

Ref 10 dBm

\* Att 15 dB

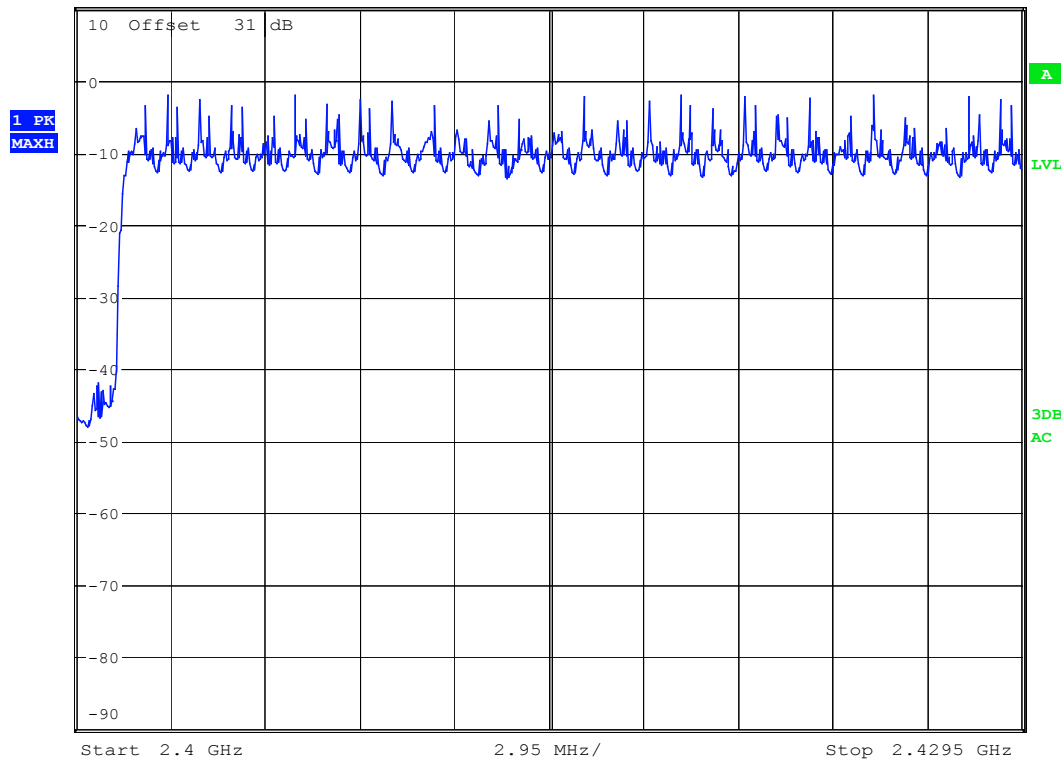

Date: 30.JUL.2009 14:31:42


### Test Mode: 8DPSK/Channel Middle



\* RBW 30 kHz  
\* VBW 100 kHz  
\* SWT 300 ms

Ref 10 dBm

\* Att 15 dB

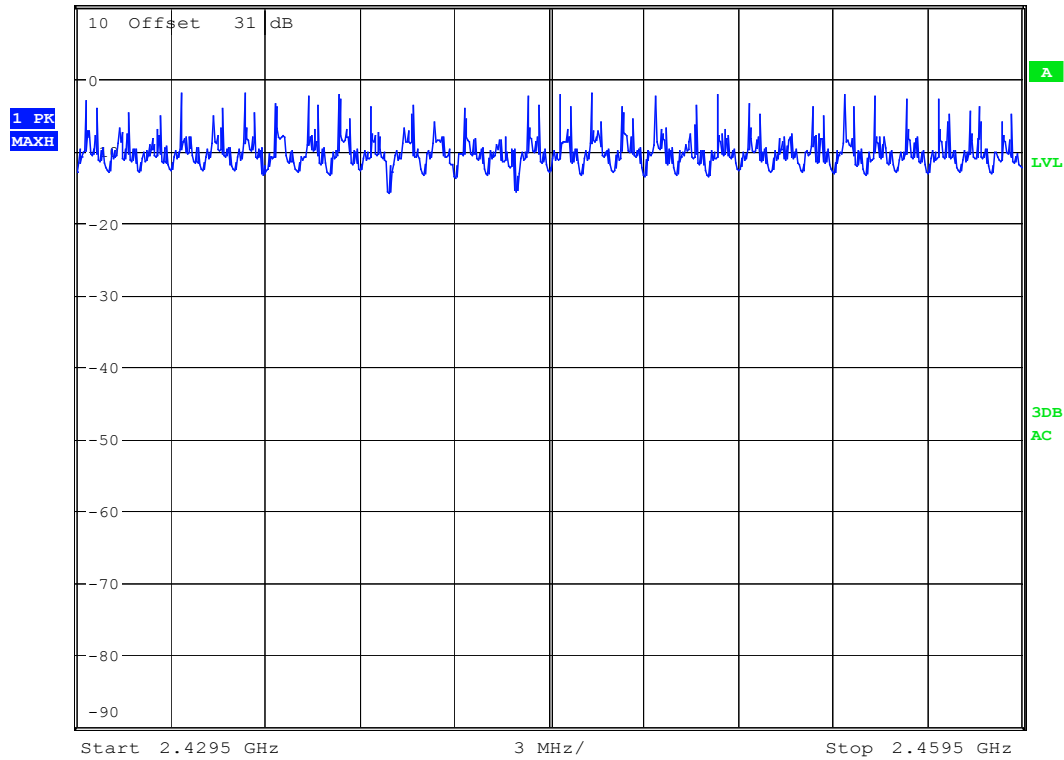

Date: 30.JUL.2009 14:35:00


### Test Mode: 8DPSK/Channel High



\* RBW 30 kHz  
\* VBW 100 kHz  
\* SWT 300 ms

Ref 10 dBm

\* Att 15 dB

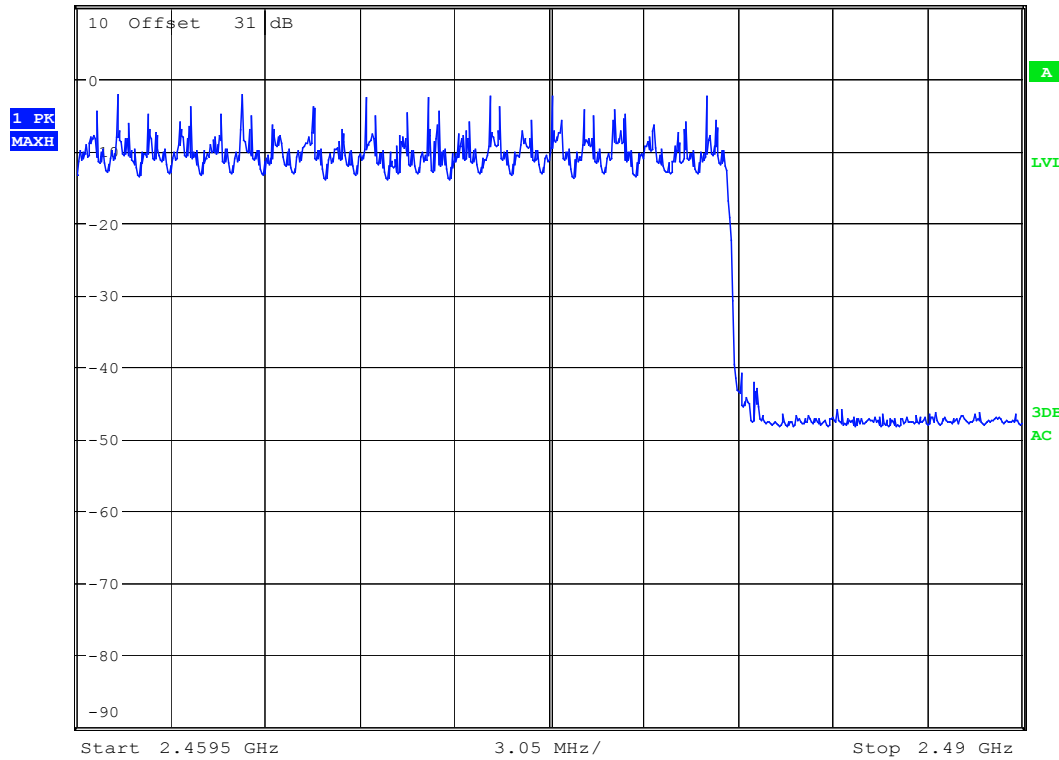

Date: 30.JUL.2009 14:28:47




**Test Mode: GFSK/Channel Low**



\* RBW 30 kHz  
\* VBW 100 kHz  
\* SWT 300 ms

Ref 10 dBm

\* Att 15 dB

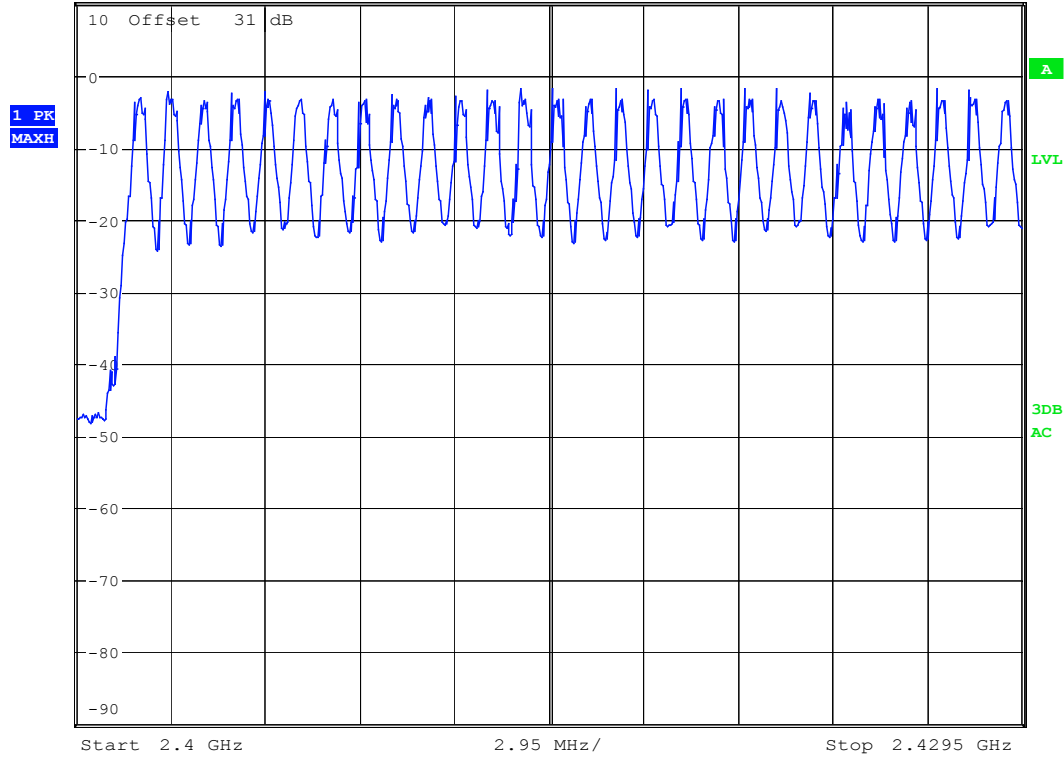


Date: 30.JUL.2009 14:14:25

**Test Mode: GFSK /Channel Middle**



Ref 10 dBm      \* Att 15 dB      \* RBW 30 kHz  
 \* VBW 100 kHz      \* SWT 300 ms

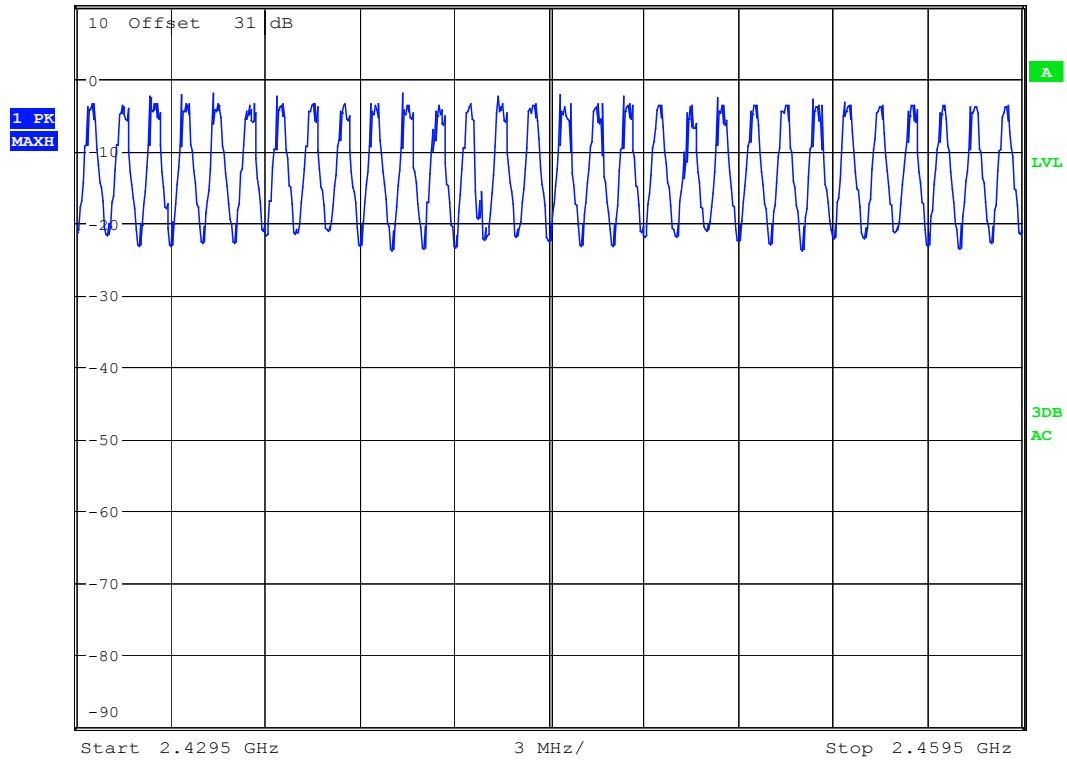

Date: 30.JUL.2009 14:17:47


**Test Mode: GFSK/Channel High**



\* RBW 30 kHz  
\* VBW 100 kHz  
\* SWT 300 ms

Ref 10 dBm

\* Att 15 dB

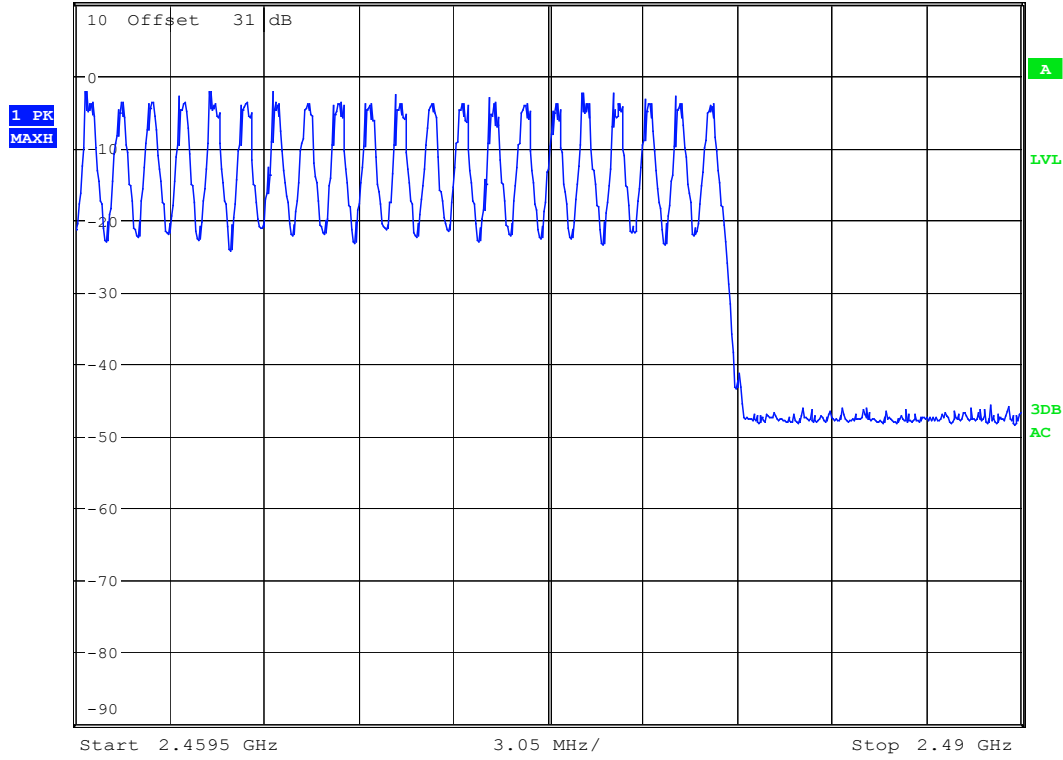

Date: 30.JUL.2009 14:21:46

## 9 CHANNEL BANDWIDTH

### 9.1 Standard Applicable

According to 15.247(a)(1), Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudorandomly ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

### 9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
  - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
  - RBW  $\geq$  1% of the 20 dB bandwidth
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2008/09/11	2009/09/11
Attenuator	Weinschel Engineering	1	N/A	N/A

### 9.4 Measurement Data

Test Date : Jul. 23, 2009      Temperature : 22 °C      Humidity : 58 %

**Test Mode: 8DPSK**

- a) Channel Low : Channel Bandwidth is 1.274 MHz
- b) Channel Middle : Channel Bandwidth is 1.284 MHz
- c) Channel High : Channel Bandwidth is 1.284 MHz

**Test Mode: GFSK**

- a) Channel Low : Channel Bandwidth is 947 kHz
- b) Channel Middle : Channel Bandwidth is 942 kHz
- c) Channel High : Channel Bandwidth is 894 kHz

*Note : The expanded uncertainty of channel bandwidth tests is 2dB.*

Test Mode: 8DPSK/Channel Low




\*RBW 30 kHz      Marker 1 [T1 ]  
VBW 100 kHz      -2.01 dBm  
SWT 15 ms      2.401841346 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

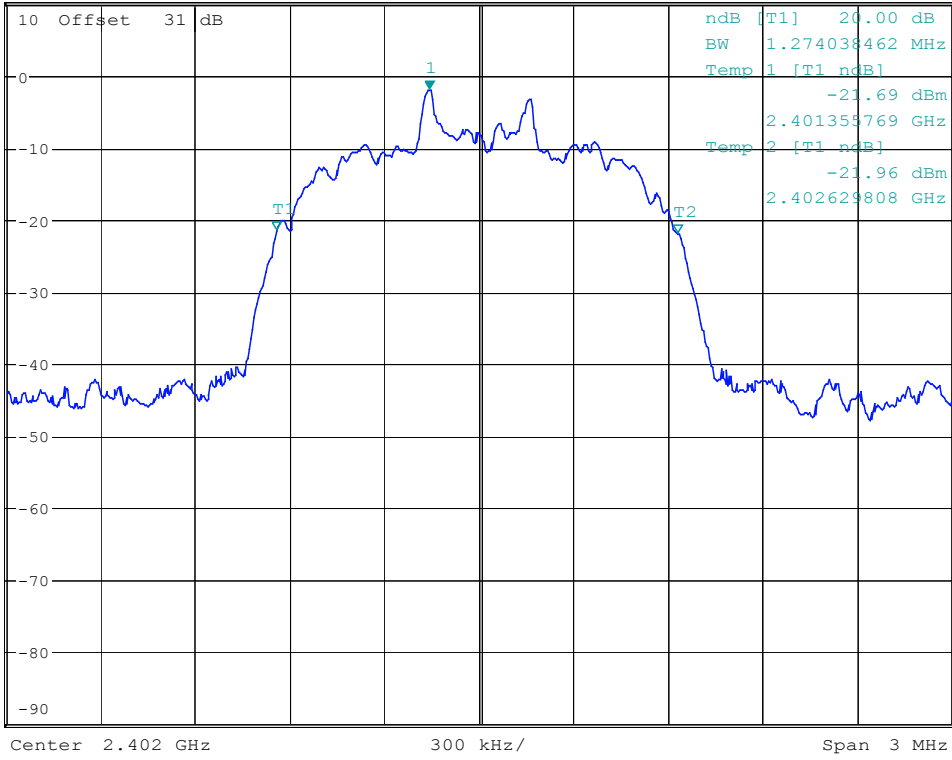

Date: 24.JUL.2009 16:01:32

Test Mode: 8DPSK/Channel Middle




\*RBW 30 kHz      Marker 1 [T1 ]  
VBW 100 kHz      -2.15 dBm  
SWT 15 ms      2.440841346 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

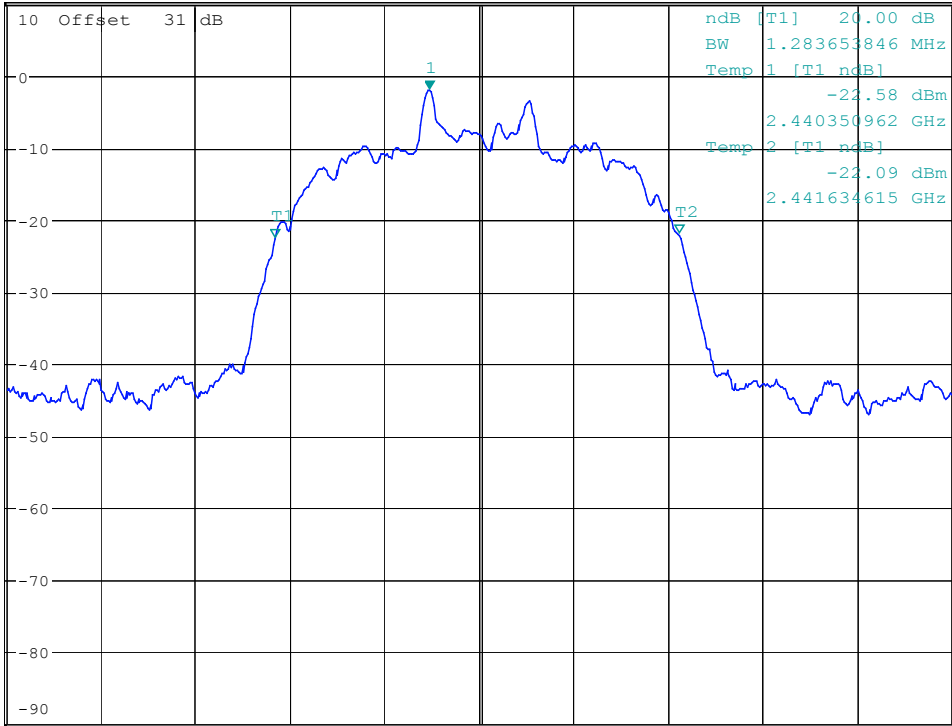

A

LVL

3DB  
AC

Center 2.441 GHz      300 kHz/      Span 3 MHz

Date: 24.JUL.2009 16:40:47

**Test Mode: 8DPSK/Channel High**




\*RBW 30 kHz      Marker 1 [T1 ]  
VBW 100 kHz      -2.43 dBm  
SWT 15 ms      2.479841346 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

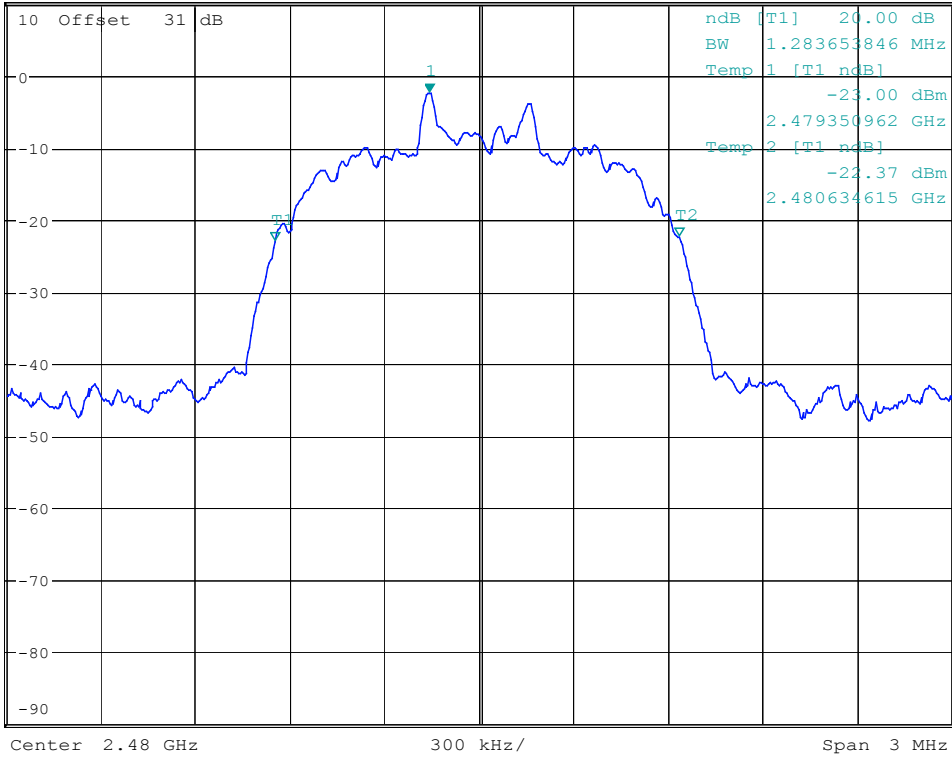

Date: 24.JUL.2009 17:10:29



**Test Mode: GFSK/Channel Low**




\*RBW 30 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -1.95 dBm  
SWT 15 ms      2.401841346 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

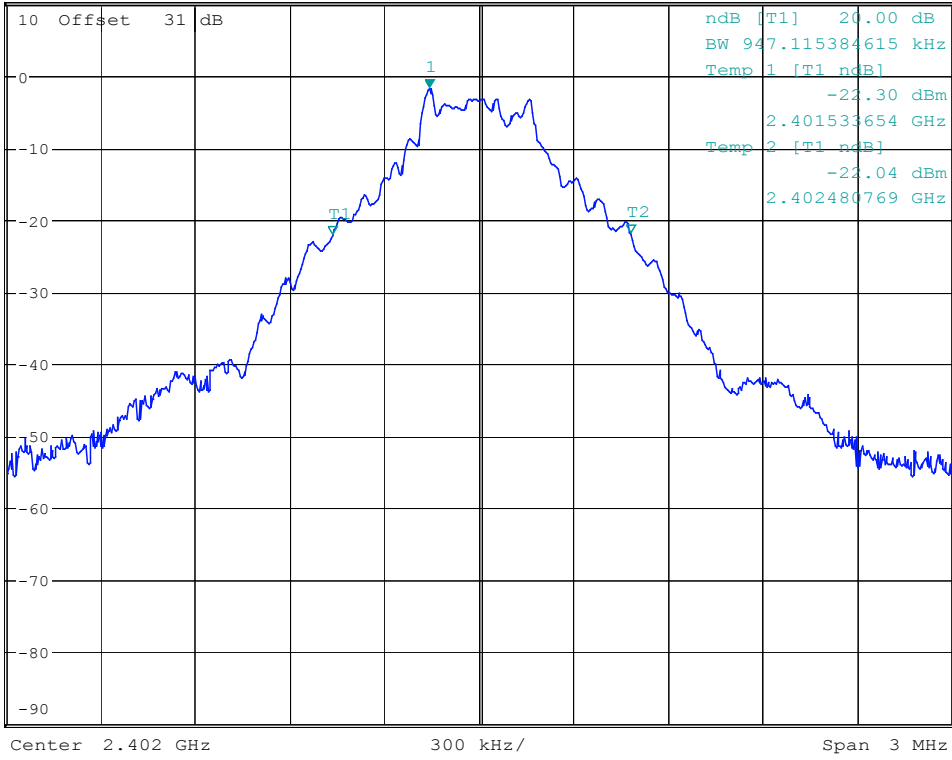

Date: 24.JUL.2009 15:24:16

**Test Mode: GFSK /Channel Middle**




\*RBW 30 kHz      Marker 1 [T1 ]  
VBW 100 kHz      -2.01 dBm  
SWT 15 ms      2.440841346 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

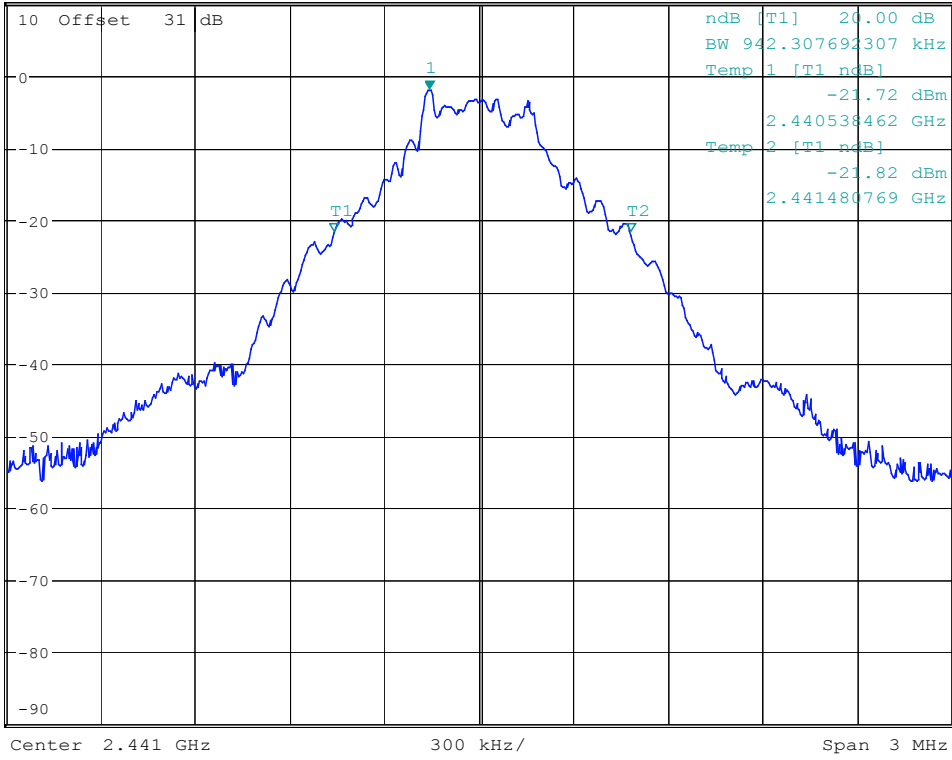


Date: 24.JUL.2009 14:56:34

**Test Mode: GFSK/Channel High**



Ref 10 dBm      \*Att 0 dB      \*RBW 30 kHz      Marker 1 [T1 ]  
 VBW 100 kHz      -2.36 dBm  
 \*SWT 20 ms      2.479841346 GHz

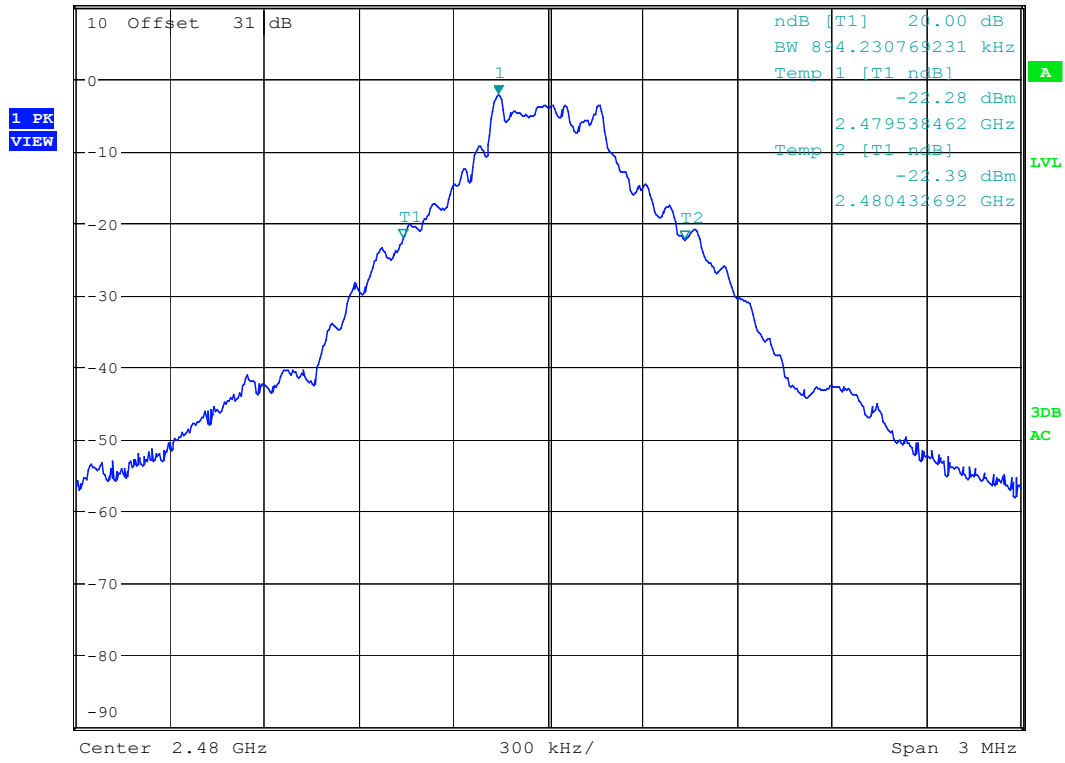

Date: 24.JUL.2009 12:35:25

## 10 DWELL TIME ON EACH CHANNEL

### 10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

### 10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
  - Span = zero span, centered on a hopping channel
  - RBW = 1 MHz
  - VBW  $\geq$  RBW
  - Sweep = as necessary to capture the entire dwell time per hopping channel
  - Detector function = peak
  - Trace = max hold
4. Use the marker-delta function to determine the dwell time. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2008/09/11	2009/09/11
Attenuator	Weinschel Engineering	1	N/A	N/A

## 10.4 Measurement Data

### Test Mode: 8DPSK

Test Date : Jul. 23, 2009      Temperature : 25 °C      Humidity : 65 %

$$\text{Period} = 0.4(\text{seconds}) \times 79(\text{channels}) = 31.6 \text{ seconds}$$

#### A. DH1 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $1600/(1+1) = 800$  transmissions per second. In one period for each particular channel there are  $10.13 \times 31.6 = 320.1$  times of transmissions.

$$\text{Channel Low} : \text{the dwell time is } 0.416\text{ms} \times 320.1 = 133.162 \text{ ms}$$

The maximum time of occupancy for a particular channel is 133.162ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

#### B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $1600/(3+1) = 400$  transmissions per second. In one period for each particular channel there are  $5.06 \times 31.6 = 159.9$  times of transmissions.

$$\text{Channel Low} : \text{the dwell time is } 1.698\text{ms} \times 159.9 = 271.510 \text{ ms}$$

The maximum time of occupancy for a particular channel is 271.510ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

#### C. DH5 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $1600/(5+1) = 266.7$  transmissions per second. In one period for each particular channel there are  $3.38 \times 31.6 = 106.81$  times of transmissions.

$$\text{a) Channel Low} : \text{the dwell time is } 2.965\text{ms} \times 106.81 = 316.692 \text{ ms}$$

The maximum time of occupancy for a particular channel is 320.430ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**Note : The expanded uncertainty of dwell time on each channel tests is 2dB.**

**Test Mode: GFSK**Test Date : Jul. 23, 2009      Temperature : 25 °C      Humidity : 65 %

$$\text{Period} = 0.4(\text{seconds}) \times 79(\text{channels}) = 31.6 \text{ seconds}$$

**A. DH1 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are  $1600/(1+1) = 800$  transmissions per second. In one period for each particular channel there are  $10.13 \times 31.6 = 320.1$  times of transmissions.

Channel Low : the dwell time is  $0.480\text{ms} \times 320.1 = 153.648 \text{ ms}$

The maximum time of occupancy for a particular channel is 153.648ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

**B. DH3 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are  $1600/(3+1) = 400$  transmissions per second. In one period for each particular channel there are  $5.06 \times 31.6 = 159.9$  times of transmissions.

Channel Low : the dwell time is  $1.763\text{ms} \times 159.9 = 281.904 \text{ ms}$

The maximum time of occupancy for a particular channel is 281.904ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

**C. DH5 Mode**

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are  $1600/(5+1) = 266.7$  transmissions per second. In one period for each particular channel there are  $3.38 \times 31.6 = 106.81$  times of transmissions.

a) Channel Low : the dwell time is  $2.949\text{ms} \times 106.81 = 314.983 \text{ ms}$

The maximum time of occupancy for a particular channel is 314.983ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.


**Note : The expanded uncertainty of dwell time on each channel tests is 2dB.**

### Mode: 8DPSK/Channel Low; DH1



RBW 1 MHz      Delta 1 [T1 ]  
VBW 3 MHz      0.35 dB  
SWT 10 ms      416.666667  $\mu$ s

Ref 10 dBm      Att 5 dB

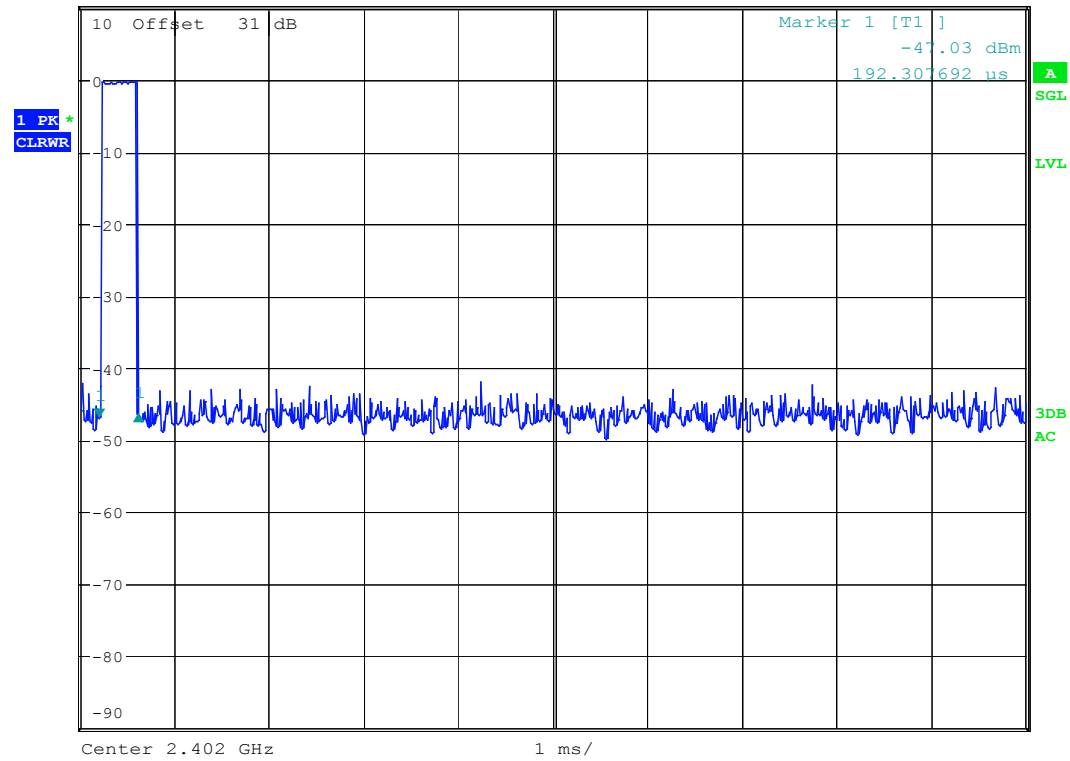


Date: 24.JUL.2009 15:53:26

### Mode: 8DPSK/Channel Low; DH3



RBW 1 MHz      Delta 1 [T1 ]  
VBW 3 MHz      1.66 dB  
SWT 20 ms      1.698718 ms

Ref 10 dBm      Att 5 dB

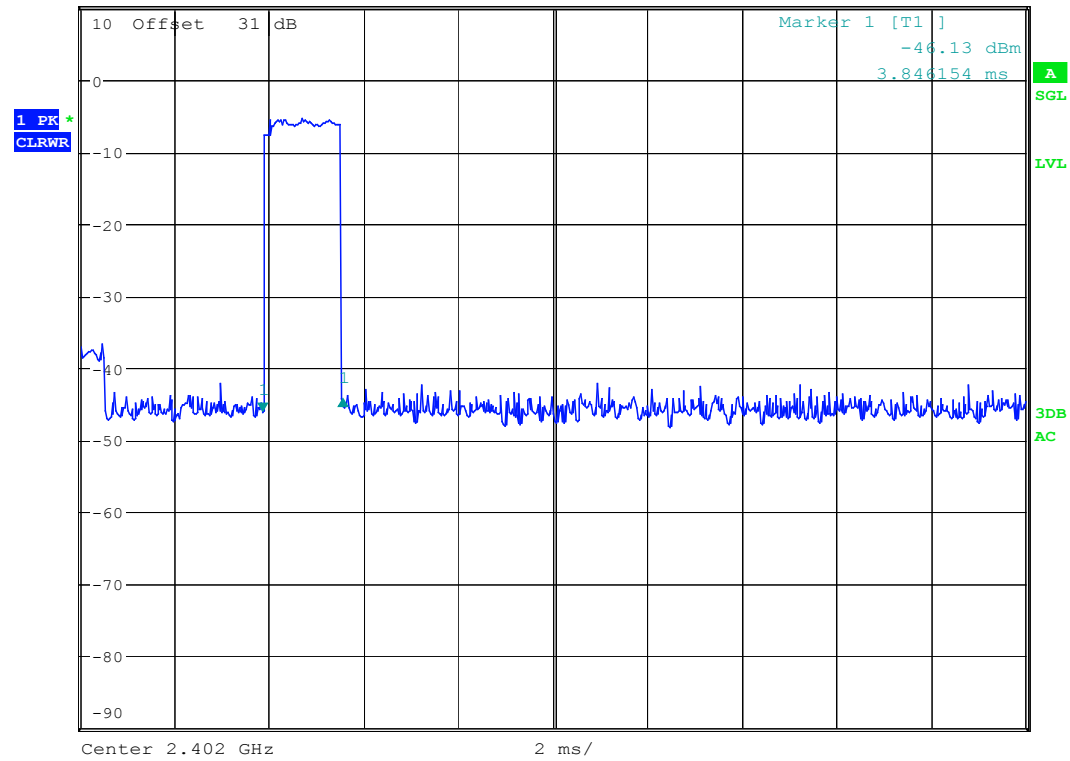

Date: 24.JUL.2009 15:52:47




**Mode: 8DPSK/Channel Low; DH5**



RBW 1 MHz      Delta 1 [T1 ]  
VBW 3 MHz      -1.02 dB  
SWT 20 ms      2.964744 ms

Ref 10 dBm      Att 5 dB

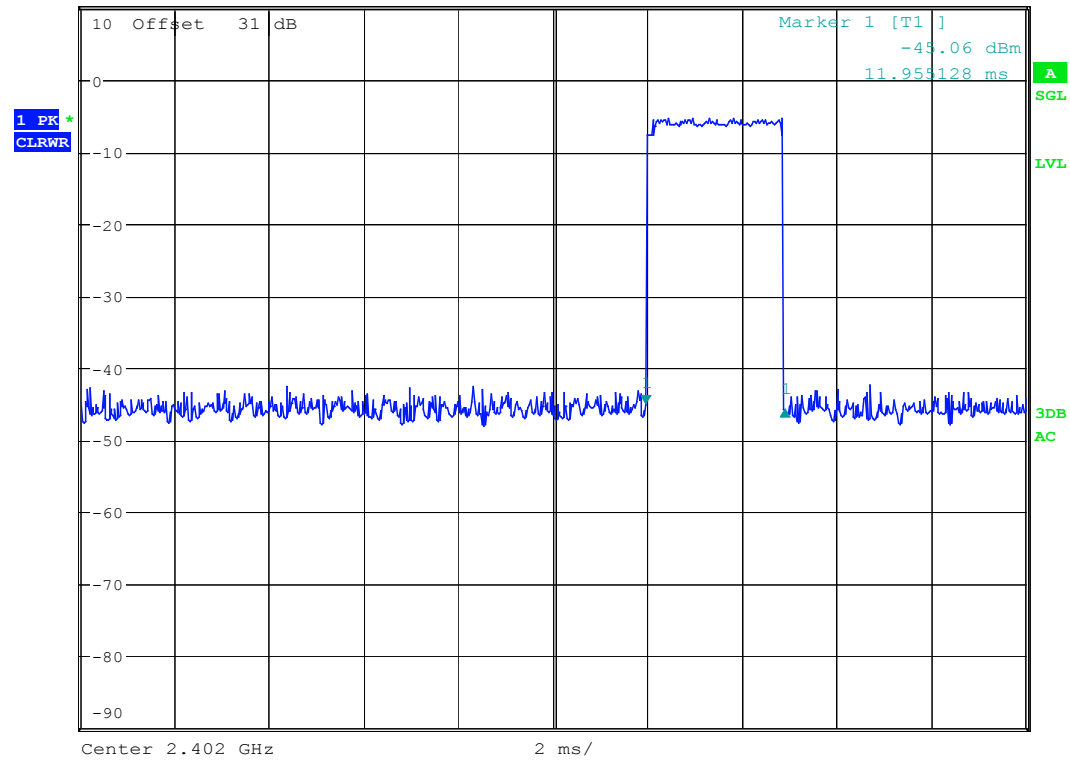


Date: 24.JUL.2009 15:52:17

**Mode: GFSK/Channel Low; DH1**



RBW 1 MHz      Delta 1 [T1 ]  
VBW 3 MHz      -0.84 dB  
SWT 10 ms      480.769231  $\mu$ s

Ref 10 dBm      Att 5 dB

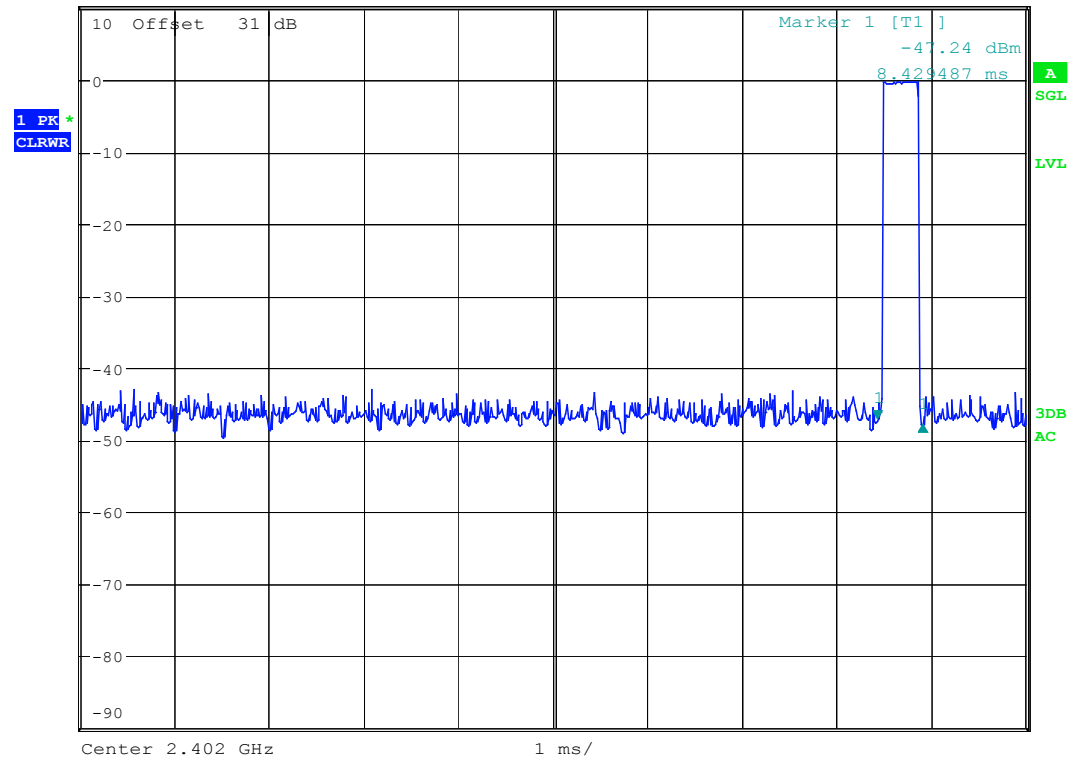


Date: 24.JUL.2009 15:33:06

### Mode: GFSK/Channel Low; DH3



RBW 1 MHz      Delta 1 [T1 ]  
VBW 3 MHz      0.03 dB  
SWT 20 ms      1.762821 ms

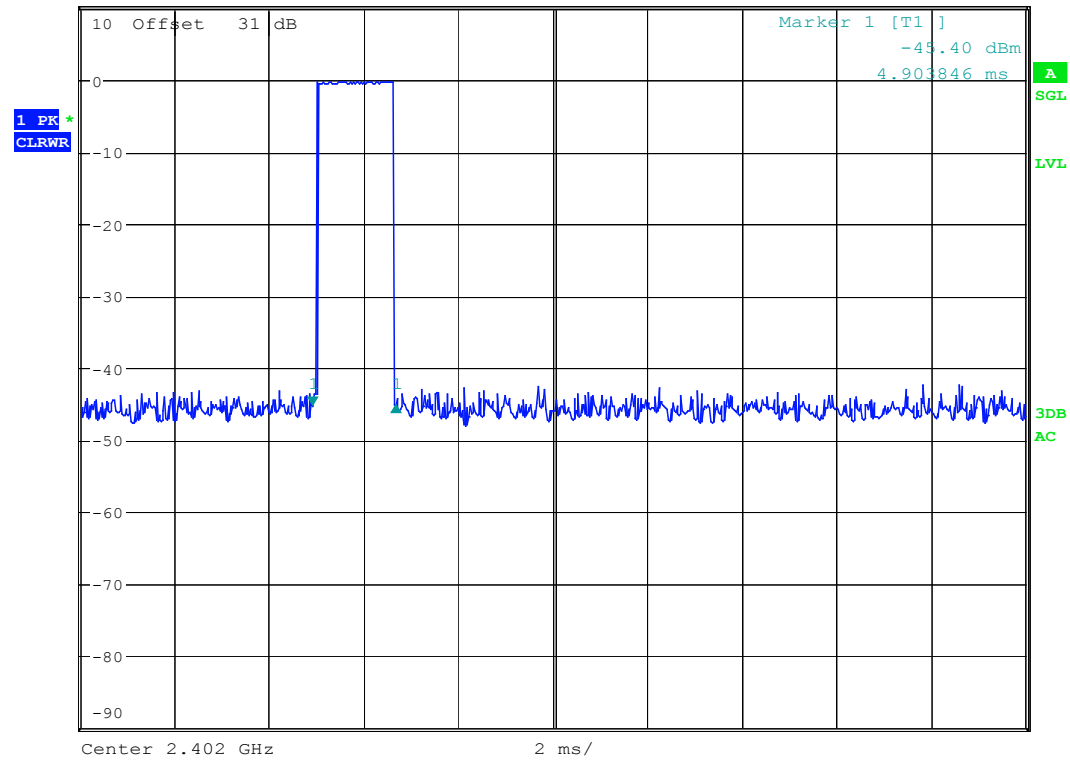


Date: 24.JUL.2009 15:32:24

### Mode: GFSK/Channel Low; DH5



RBW 1 MHz      Delta 1 [T1 ]  
VBW 3 MHz      -0.07 dB  
SWT 20 ms      2.948718 ms

Ref 10 dBm      Att 5 dB

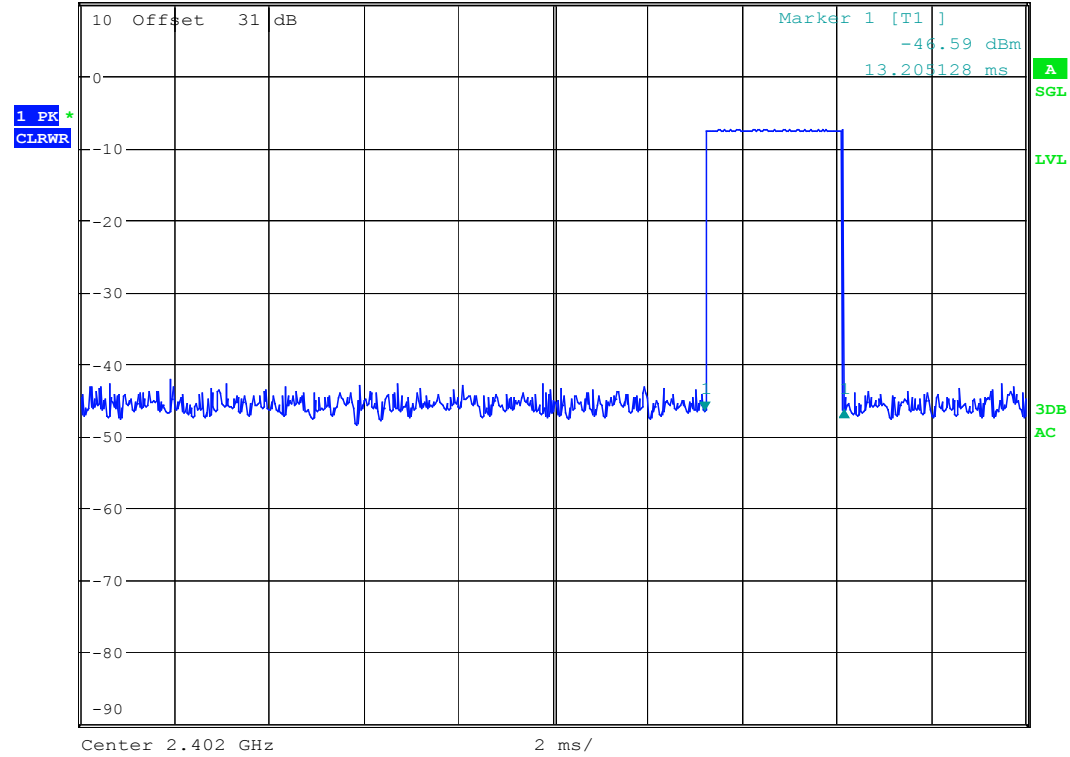

Date: 24.JUL.2009 15:31:47

## 11 OUTPUT POWER MEASUREMENT

### 11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt.

For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts.

### 11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
  - RBW > the 20 dB bandwidth of the emission being measured
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

### 11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2008/09/11	2009/09/11
Attenuator	Weinschel Engineering	1	N/A	N/A

## 11.4 Measurement Data

Test Date : Jul. 23, 2009      Temperature : 25 °C      Humidity : 65 %

### Test Mode: 8DPSK

- a) Channel Low : Output Peak Power is 0.23 dBm = **1.054** mW
- b) Channel Middle : Output Peak Power is -0.12 dBm = **0.973** mW
- c) Channel High : Output Peak Power is -0.39 dBm = **0.914** mW

### Test Mode: GFSK

- a) Channel Low : Output Peak Power is -0.05 dBm = **0.989** mW
- b) Channel Middle : Output Peak Power is -0.36 dBm = **0.920** mW
- c) Channel High : Output Peak Power is -0.61 dBm = **0.869** mW

*Note : The expanded uncertainty of output power measurement tests is 2dB.*


**Test Mode: 8DPSK/Channel Low**



\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      0.23 dBm  
SWT 2.5 ms      2.401975962 GHz

Ref 10 dBm

Att 5 dB

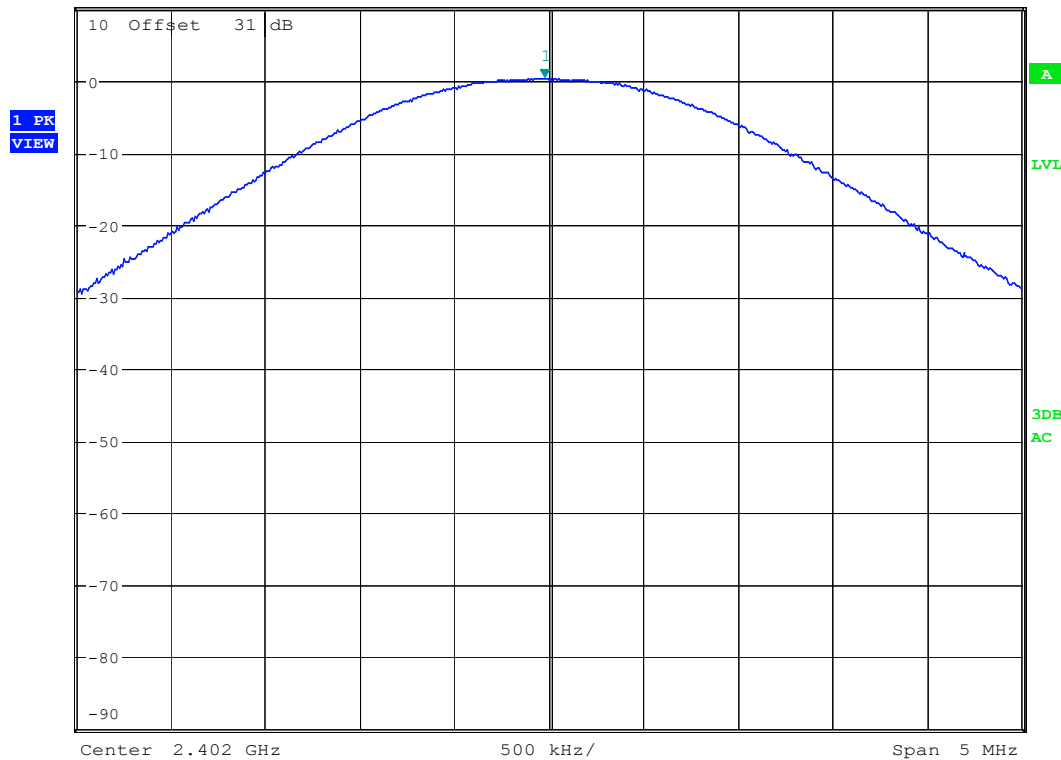

Date: 24.JUL.2009 15:56:59

**Test Mode: 8DPSK/Channel Middle**




\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      -0.12 dBm  
SWT 2.5 ms      2.440951923 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

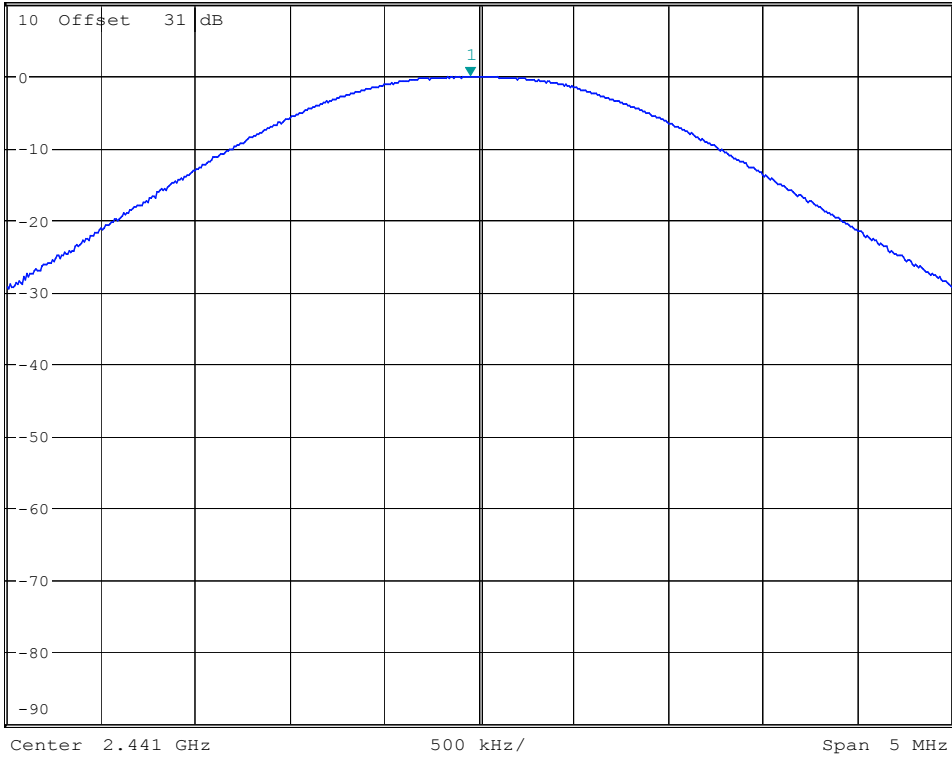

Date: 24.JUL.2009 16:17:03




**Test Mode: 8DPSK/Channel High**



\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      -0.39 dBm  
SWT 2.5 ms      2.479991987 GHz

Ref 10 dBm

Att 5 dB

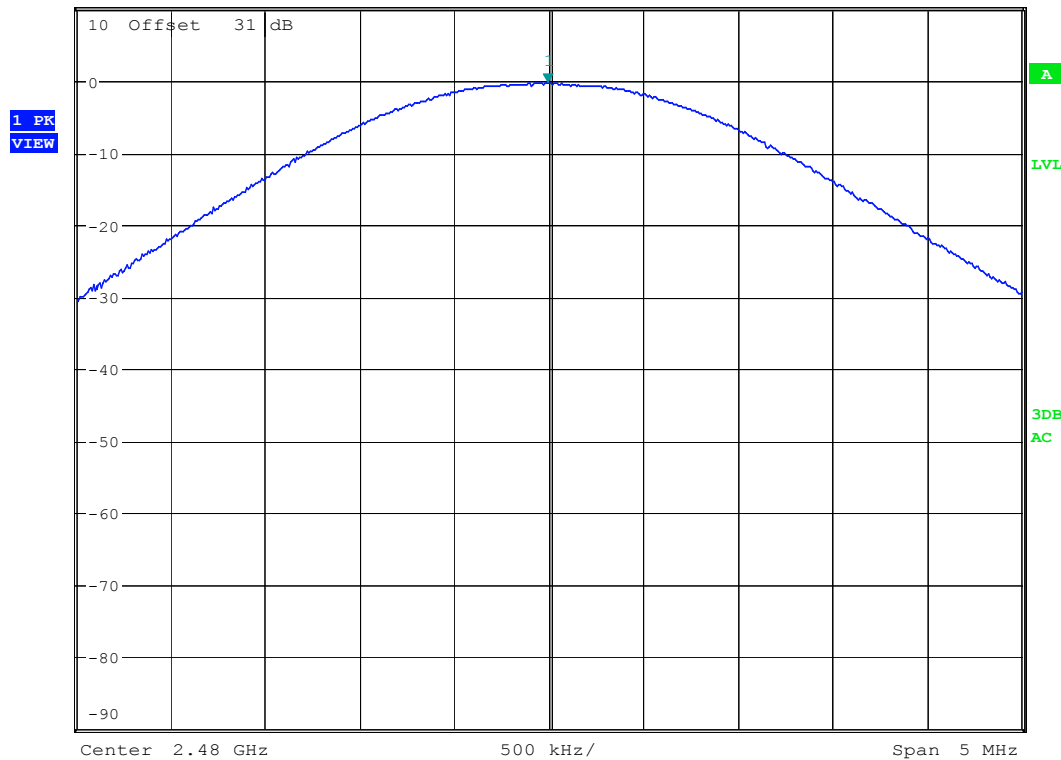

Date: 24.JUL.2009 17:09:12


**Test Mode: GFSK/Channel Low**



\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      -0.05 dBm  
\*SWT 20 ms      2.401863782 GHz

Ref 10 dBm

\*Att 0 dB

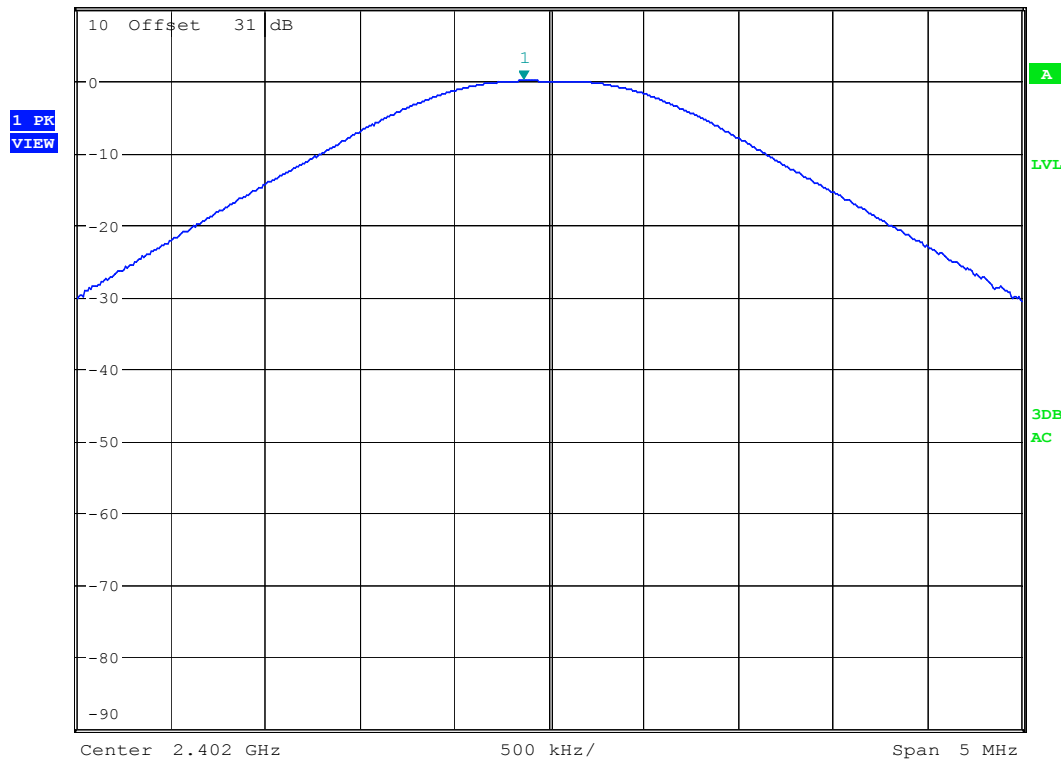

Date: 24.JUL.2009 12:33:10

**Test Mode: GFSK /Channel Middle**




\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      -0.36 dBm  
\*SWT 20 ms      2.440879808 GHz

Ref 10 dBm

\*Att 0 dB

1 PK  
VIEW

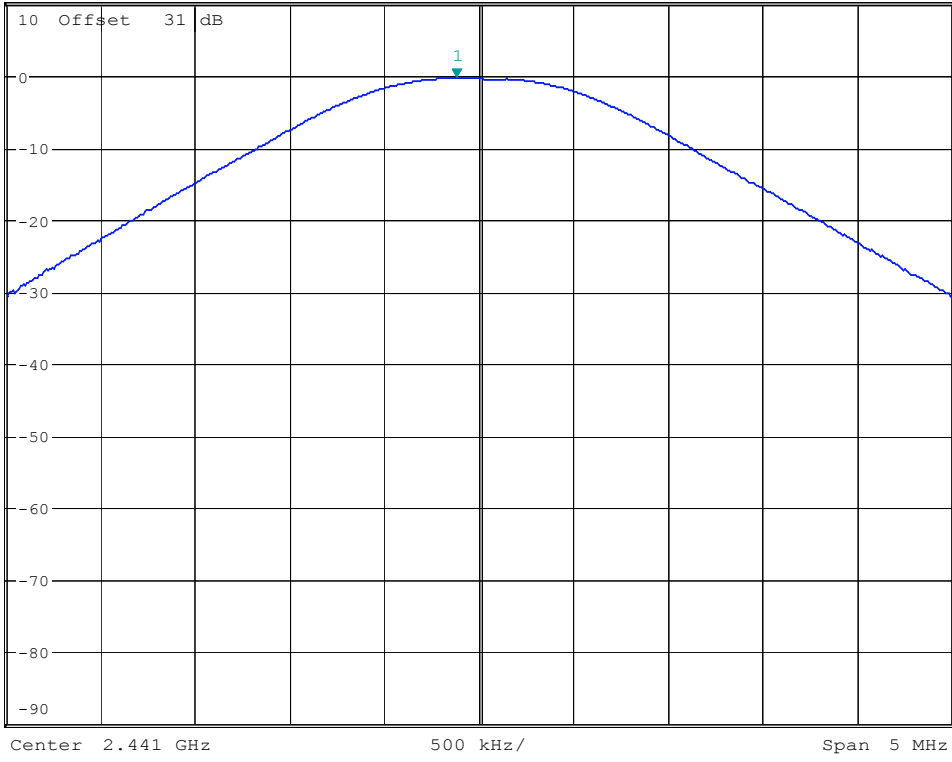

Date: 24.JUL.2009 12:33:42


### Test Mode: GFSK/Channel High



\*RBW 1 MHz      Marker 1 [T1 ]  
VBW 3 MHz      -0.61 dBm  
\*SWT 20 ms      2.479919872 GHz

Ref 10 dBm

\*Att 0 dB

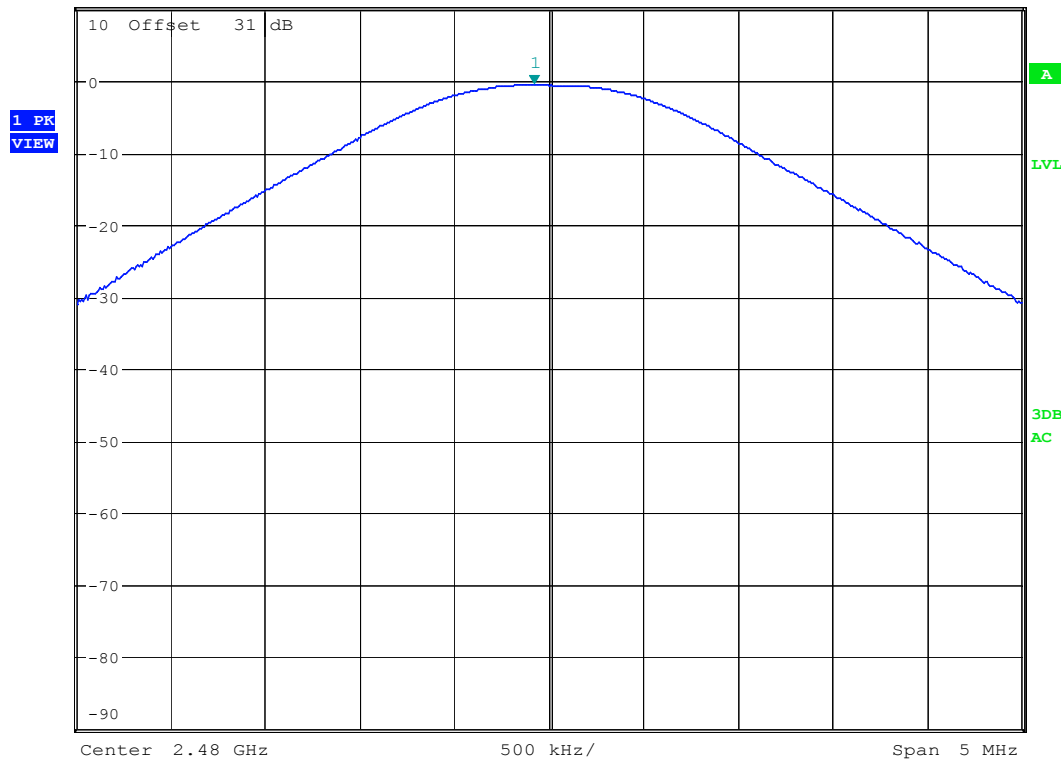

Date: 24.JUL.2009 12:34:26

## 12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

### 12.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation
  - RBW  $\geq$  1% of the span
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

### 12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2008/09/11	2009/09/11
Attenuator	Weinschel Engineering	1	N/A	N/A

## 12.4 Measurement Data

Test Date : Jul. 23, 2009      Temperature      : 25 °C      Humidity      : 65 %

**Test Mode: 8DPSK**

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

**Test Mode: GFSK**

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

**Note : *The expanded uncertainty of the 100 KHz bandwidth of band edges tests is 1000Hz.***

**Test Mode: 8DPSK/ Lower Band**




\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -50.03 dBm  
SWT 15 ms          2.392788462 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

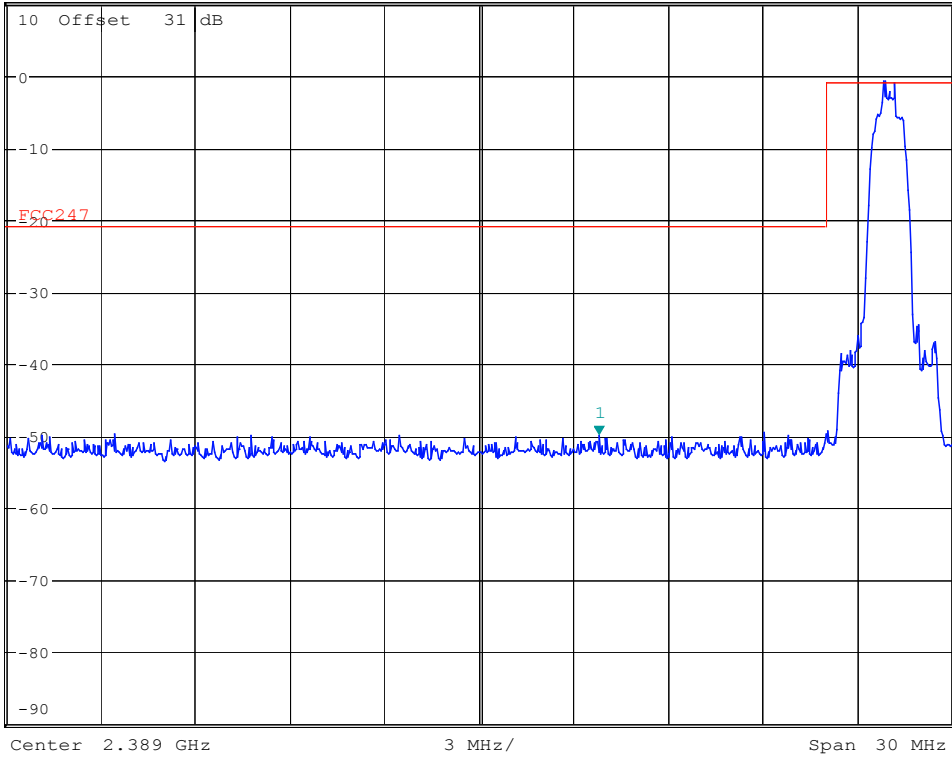

Date: 24.JUL.2009 16:10:12


**Test Mode: 8DPSK/ Upper Band**



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -50.23 dBm  
SWT 10 ms          2.484395513 GHz

Ref 10 dBm

Att 5 dB

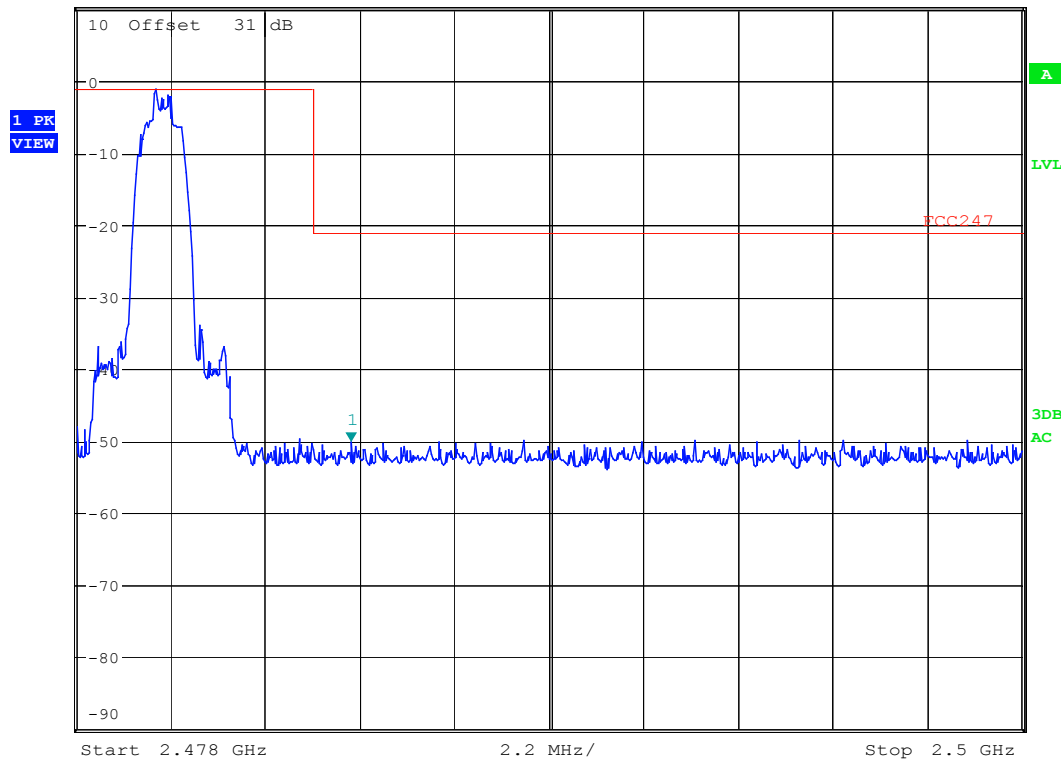

Date: 26.JUL.2009 11:43:59




**Test Mode: GFSK/Lower Band**



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -48.88 dBm  
SWT 15 ms          2.397778846 GHz

Ref 10 dBm

Att 5 dB

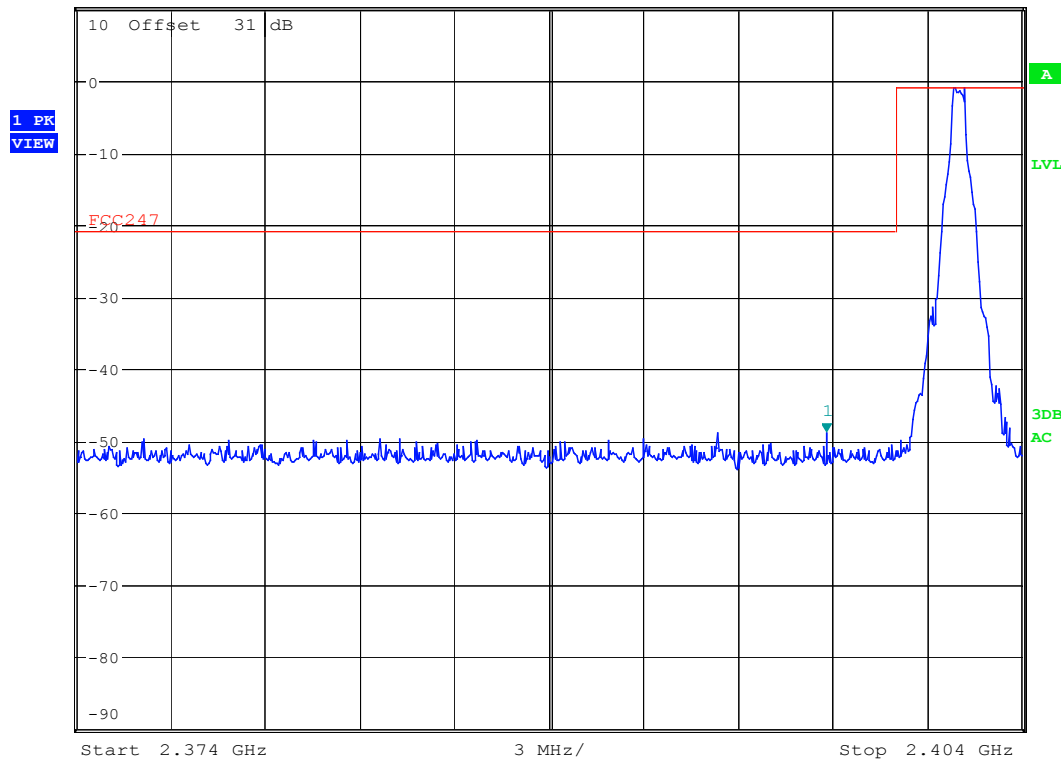

Date: 26.JUL.2009 11:52:58


**Test Mode: GFSK/Upper Band**



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -49.32 dBm  
SWT 10 ms          2.488732051 GHz

Ref 10 dBm

Att 5 dB

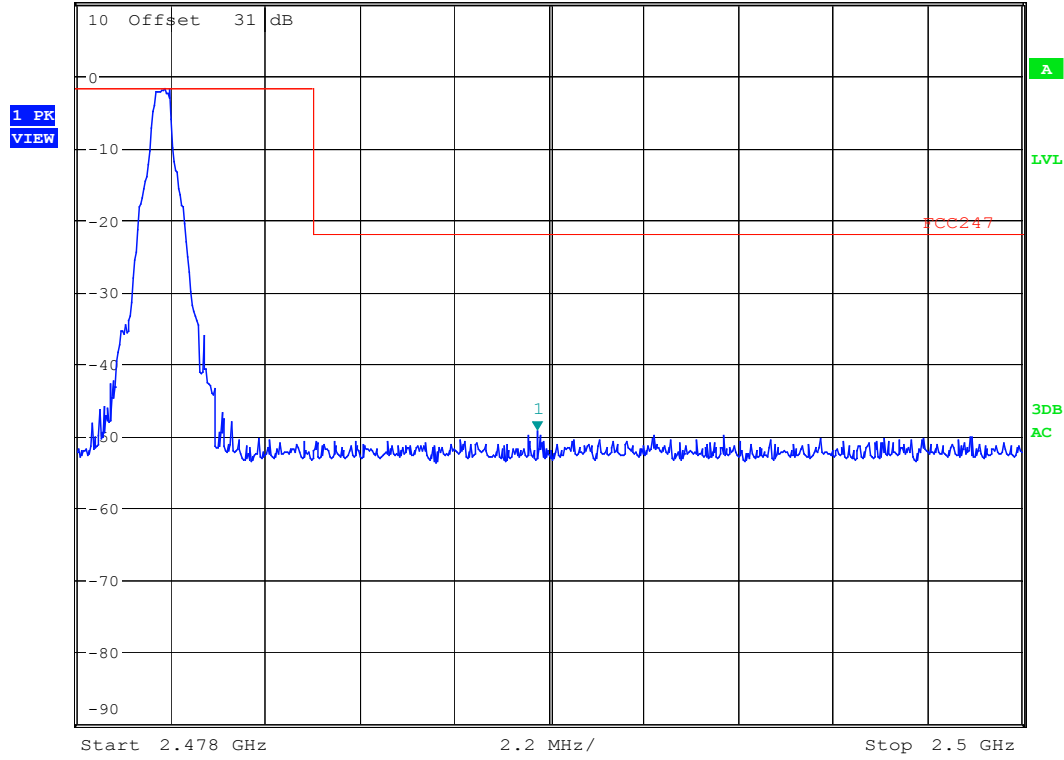

Date: 26.JUL.2009 11:51:37

## 13 OUT-OF-BAND CONDUCTED EMISSION MEASUREMENT

### 13.1 Standard Applicable

According to 15.247(c), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required.

### 13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.
  - RBW = 100 kHz
  - VBW  $\geq$  RBW
  - Sweep = auto
  - Detector function = peak
  - Trace = max hold.
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

### 13.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2008/09/11	2009/09/11
Attenuator	Weinschel Engineering	1	N/A	N/A

## 13.4 Measurement Data

Test Date : Jul. 23, 2009      Temperature : 25 °C      Humidity : 65 %

### Test Mode: 8DPSK

#### Mode : Low Channel

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

#### Mode : Mid Channel

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

#### Mode : Hi Channel

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

*Note : The expanded uncertainty of the out-of-band conducted emission tests is 2dB.*

Test Date : Jul. 23, 2009      Temperature : 25 °C      Humidity : 65 %

**Test Mode: GFSK**

**Mode : Low Channel**

- c) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- d) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

**Mode : Mid Channel**

- c) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- d) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

**Mode : Hi Channel**

- c) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- d) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

**Note :** *The expanded uncertainty of the out-of-band conducted emission tests is 2dB.*

**Mode: 8DPSK**




\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 100 kHz      -2.10 dBm  
SWT 200 ms          2.403846154 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

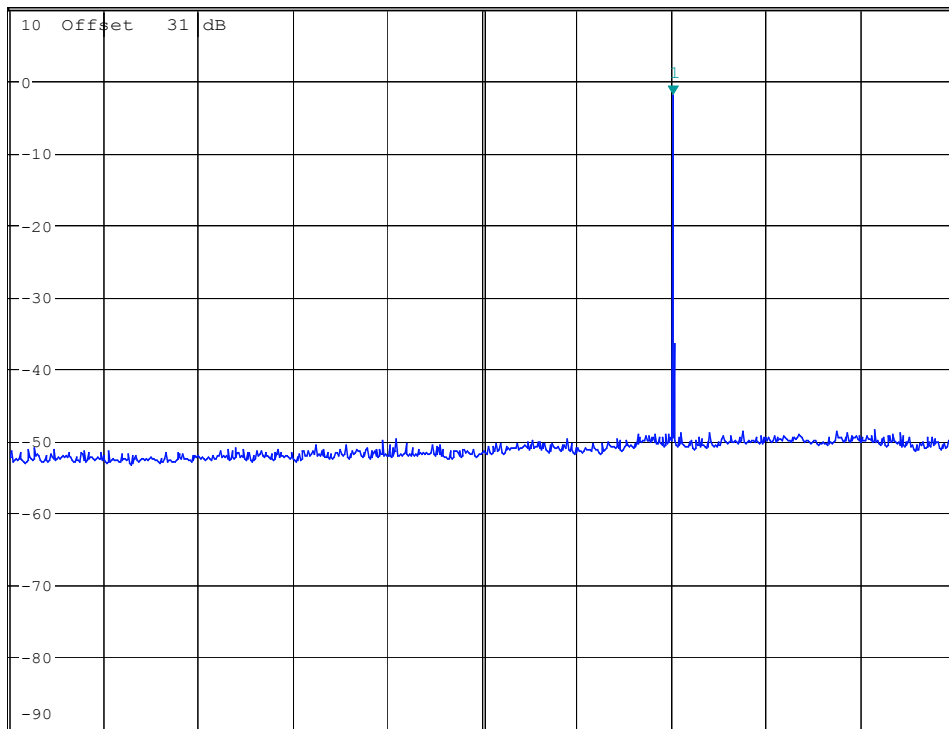

Start 1 GHz

200 MHz/

Stop 3 GHz

Date: 24.JUL.2009 16:15:57

**Mode: 8DPSK**




\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -44.77 dBm  
SWT 2.2 s          4.798076923 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

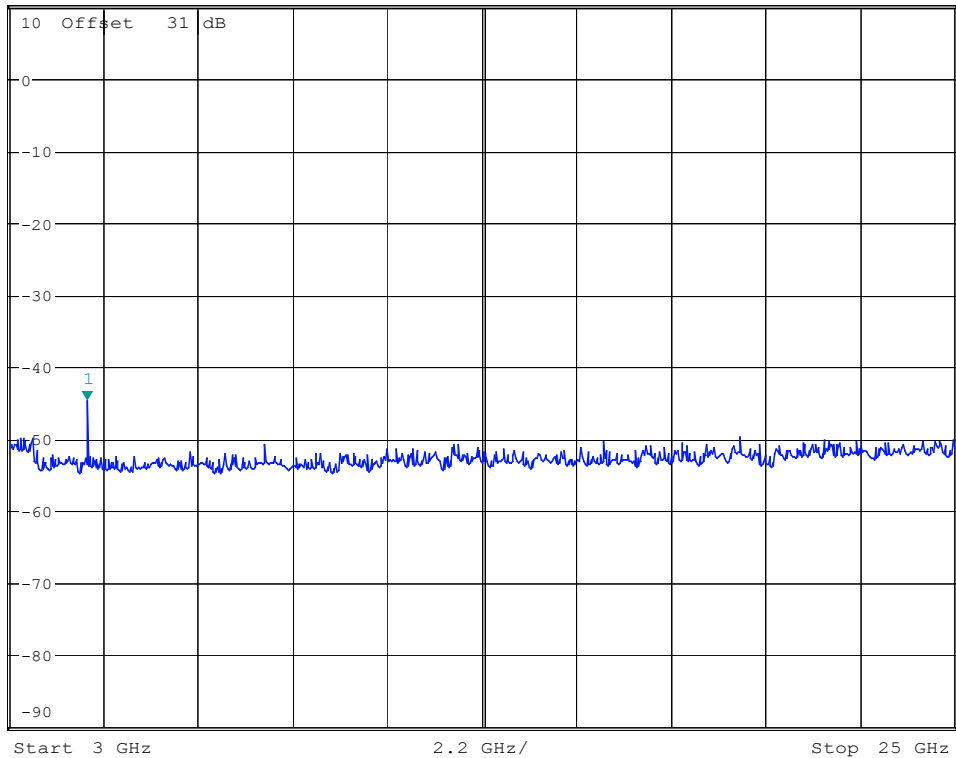

Date: 24.JUL.2009 16:16:16


Mode: 8DPSK



\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 100 kHz      -3.50 dBm  
SWT 200 ms          2.442307692 GHz

Ref 10 dBm

Att 5 dB

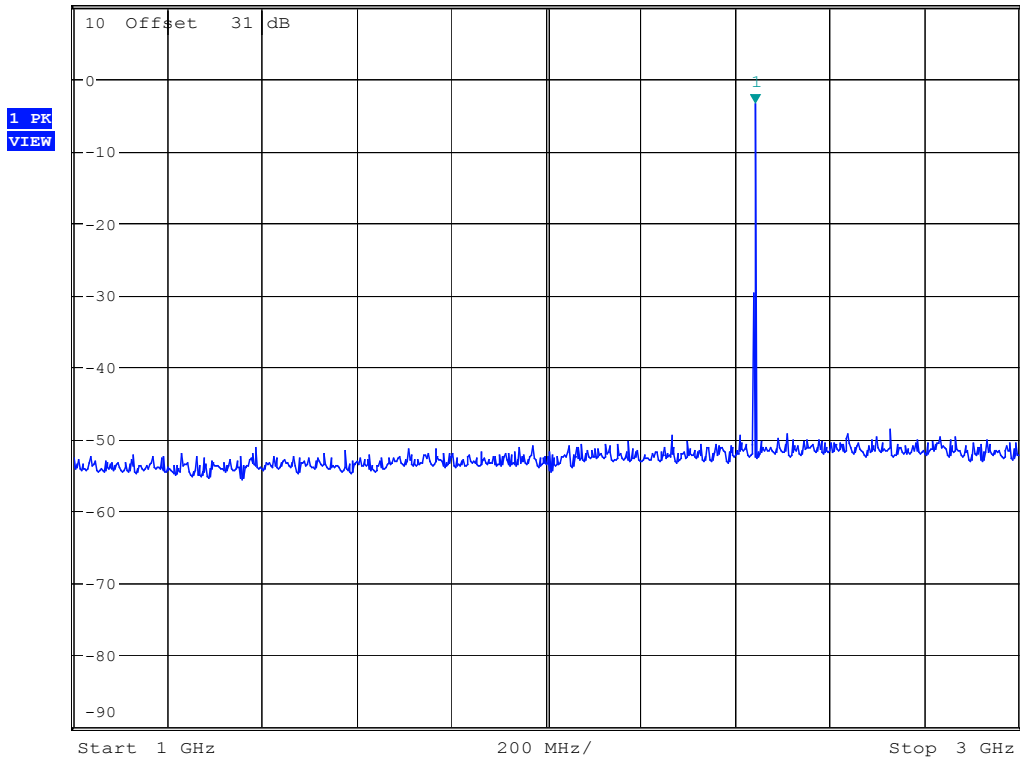

Date: 24.JUL.2009 17:05:14




**Mode: 8DPSK**



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -47.55 dBm  
SWT 2.2 s          4.868589744 GHz

Ref 10 dBm

Att 5 dB

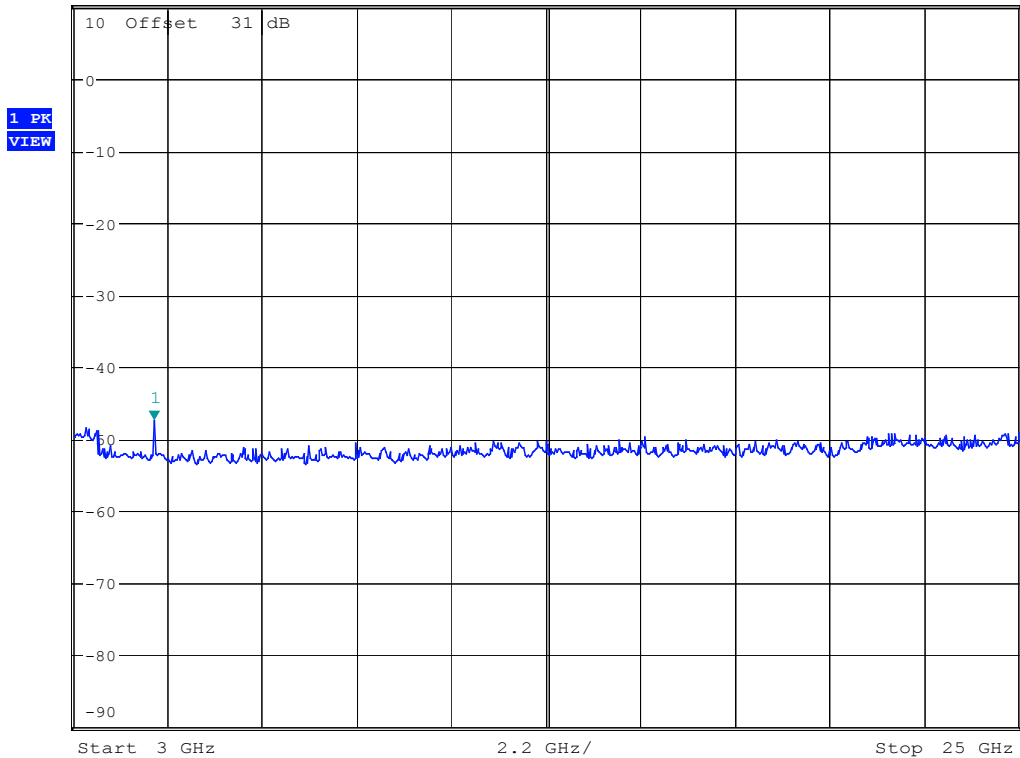

Date: 24.JUL.2009 17:06:54


Mode: 8DPSK



\* RBW 100 kHz      Marker 1 [T1 ]  
\* VBW 100 kHz      -2.22 dBm  
SWT 200 ms          2.480769231 GHz

Ref 10 dBm

Att 5 dB

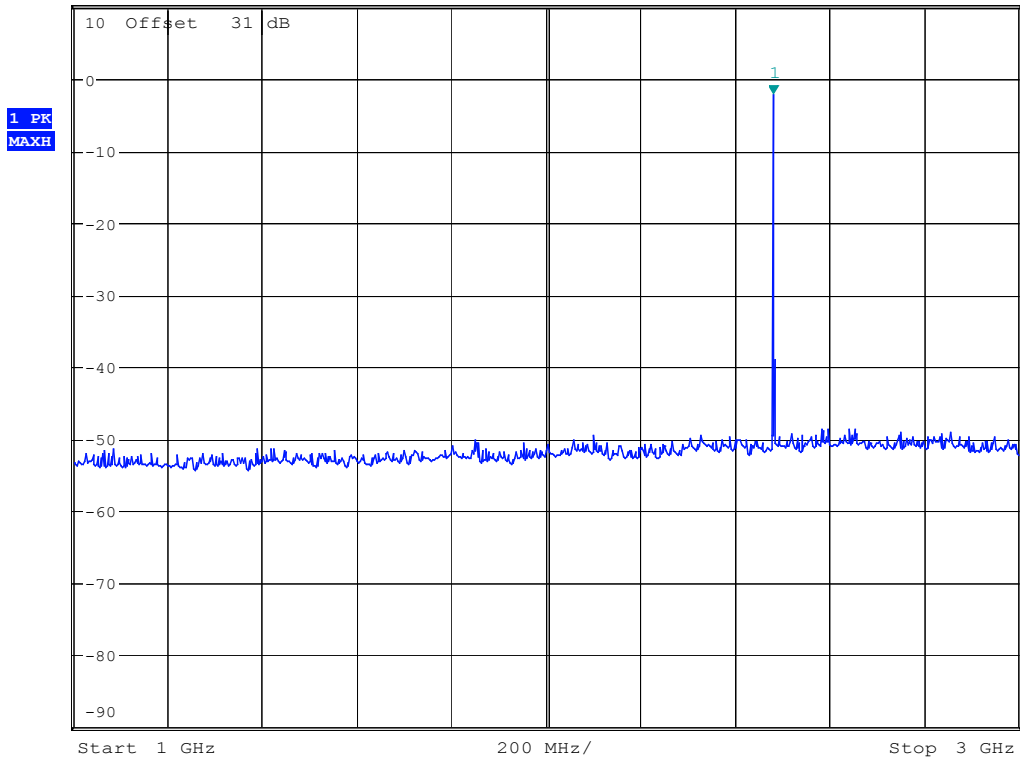

Date: 26.JUL.2009 11:49:54

**Mode: 8DPSK**




\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -47.91 dBm  
SWT 2.2 s          4.939102564 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

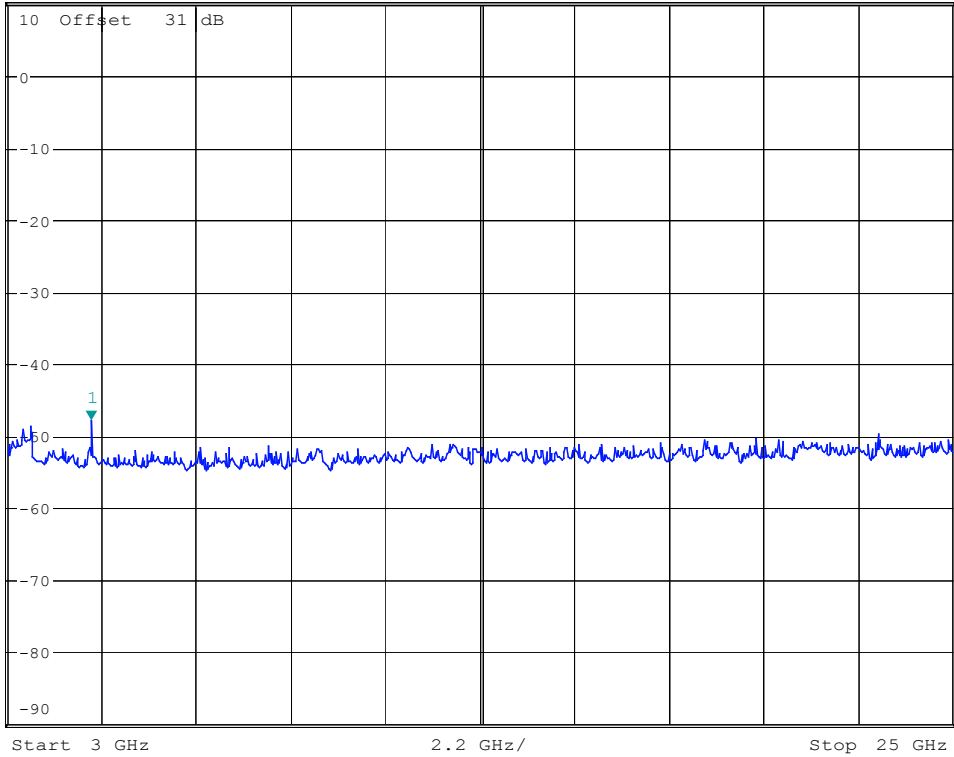

Date: 26.JUL.2009 11:50:23


Mode: GFSK



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -0.78 dBm  
SWT 200 ms      2.403846154 GHz

Ref 10 dBm

Att 5 dB

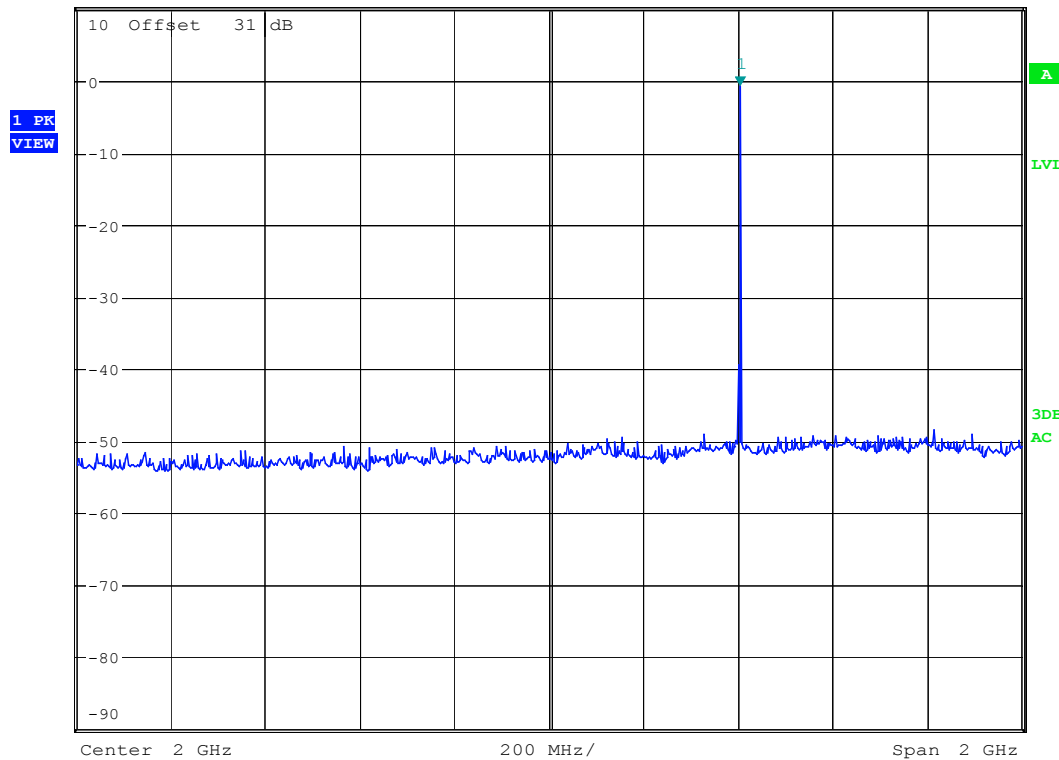

Date: 24.JUL.2009 15:30:22

**Mode: GFSK**




\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -47.18 dBm  
SWT 2.2 s          4.798076923 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

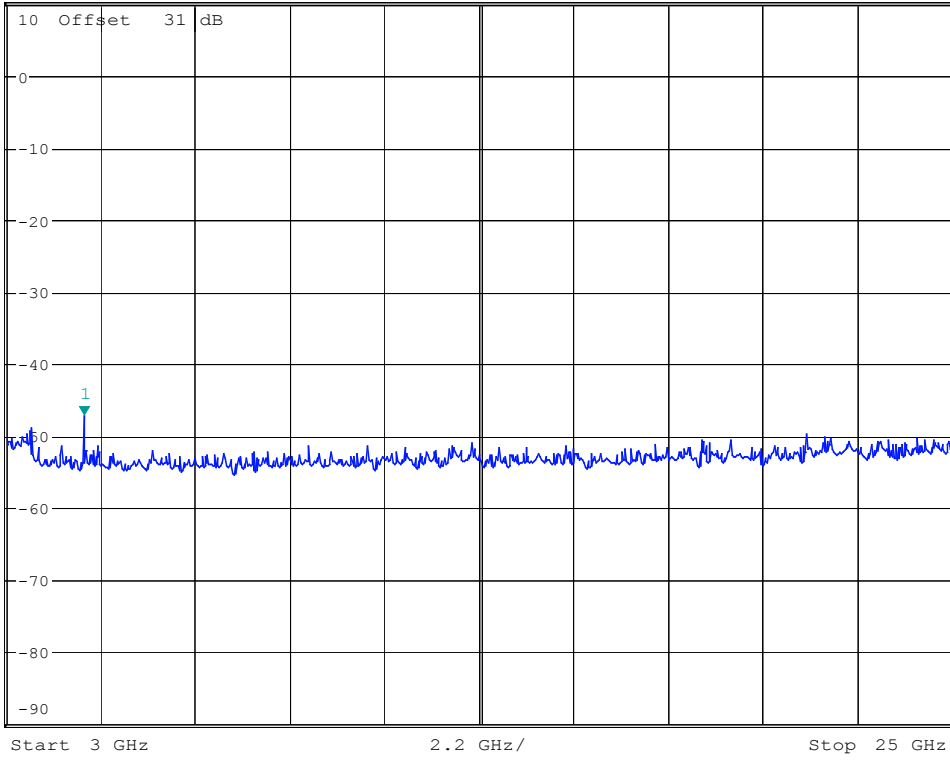

Date: 24.JUL.2009 15:30:47

Mode: GFSK




\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -0.92 dBm  
SWT 200 ms      2.442307692 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

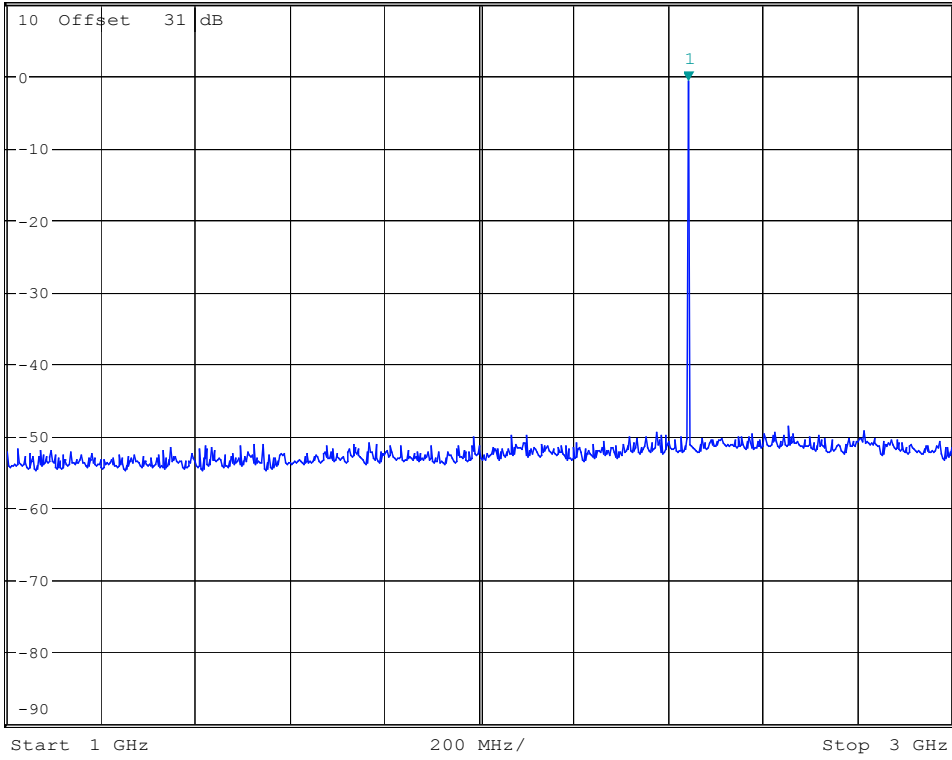

Date: 24.JUL.2009 14:55:55

Mode: GFSK




\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -44.84 dBm  
SWT 2.2 s          4.868589744 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

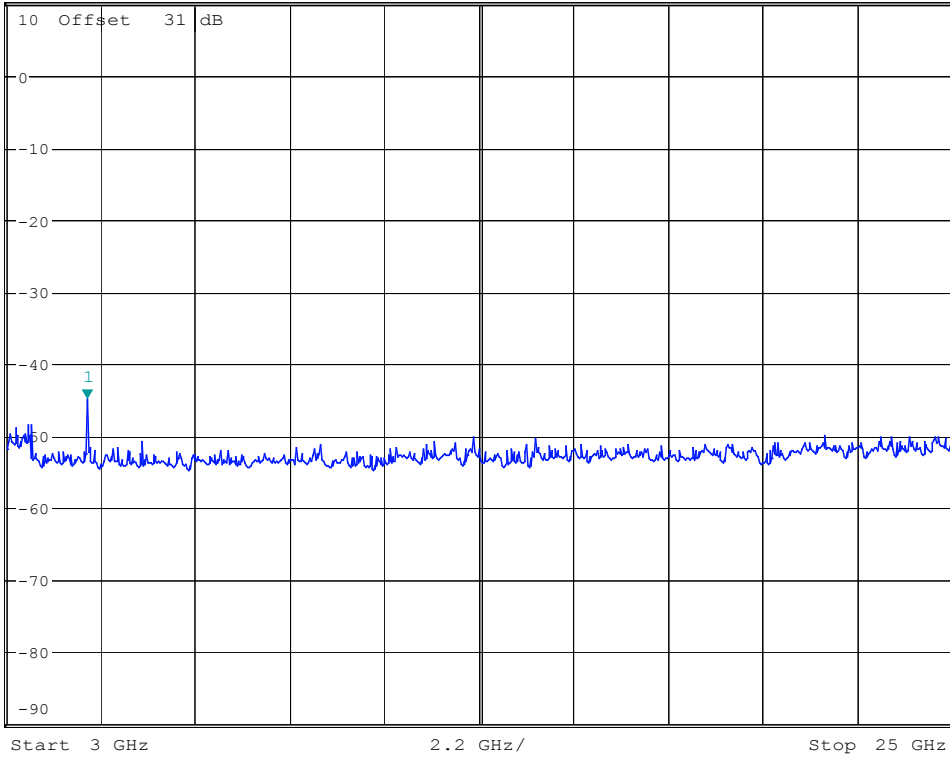

Date: 24.JUL.2009 14:55:37


Mode: GFSK



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -2.01 dBm  
SWT 200 ms      2.480769231 GHz

Ref 10 dBm

Att 5 dB

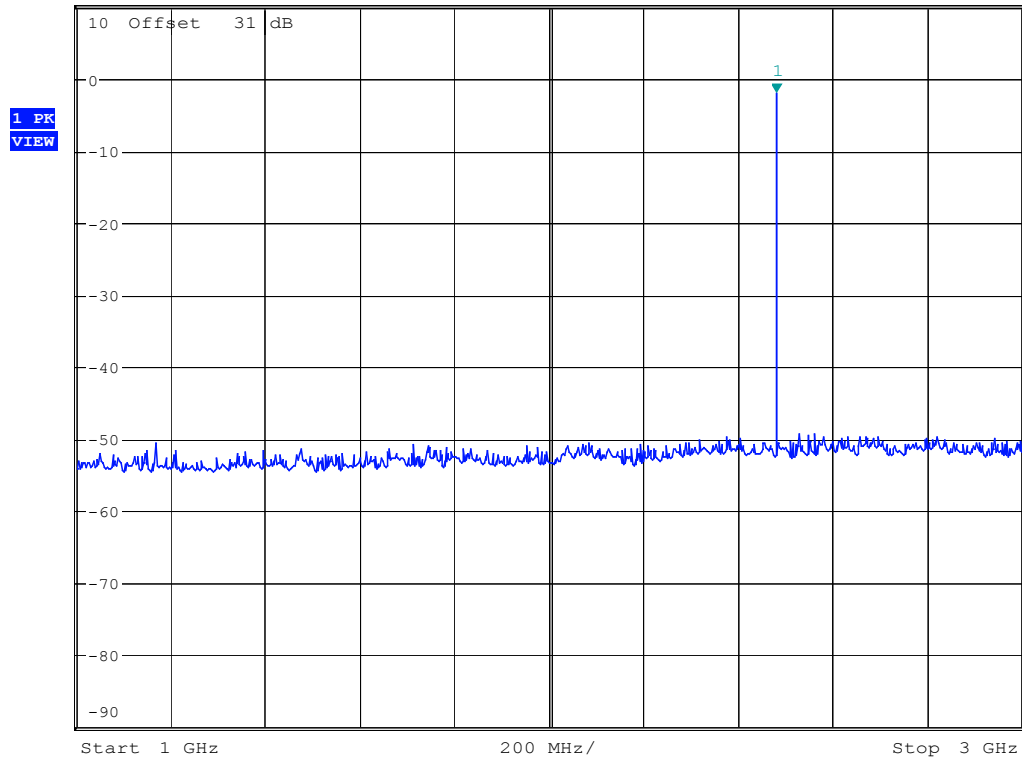

Date: 24.JUL.2009 14:50:26




Mode: GFSK



\*RBW 100 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -49.01 dBm  
SWT 2.2 s          4.939102564 GHz

Ref 10 dBm

Att 5 dB

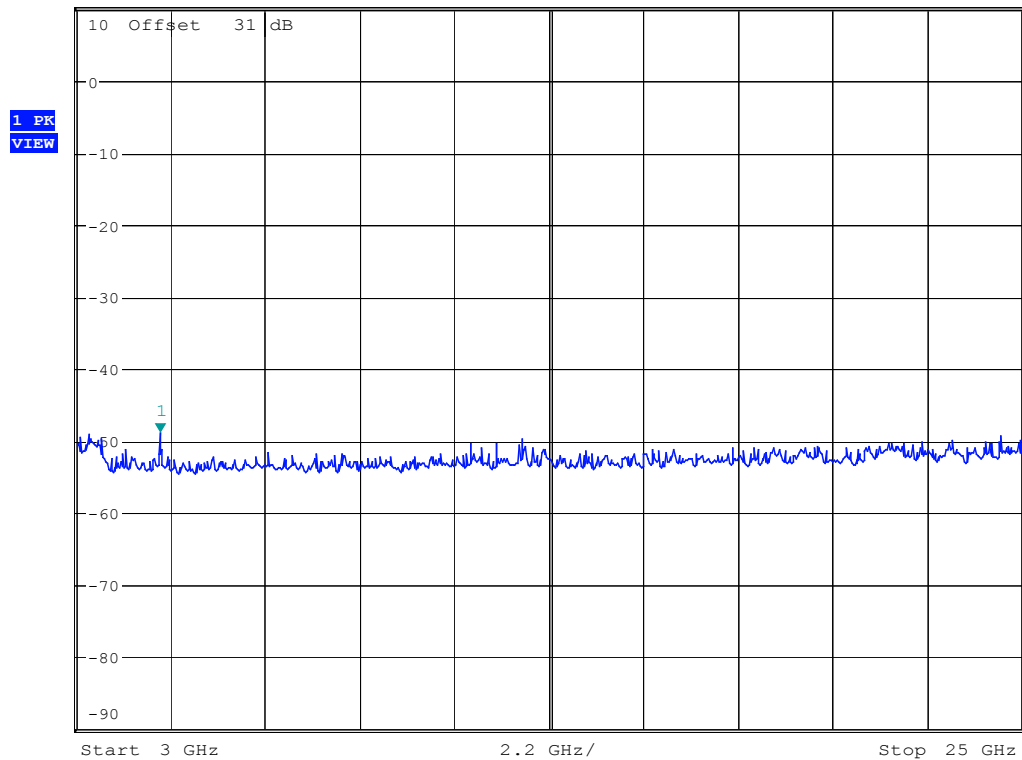

Date: 24.JUL.2009 14:50:59

## 14 PEAK POWER SPECTRAL DENSITY MEASUREMENT

### 14.1 Standard Applicable

According to 15.247(d), for digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

### 14.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set EUT to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
  - Span = 300 kHz, centered on highest level appearing on spectral display
  - RBW = 3 kHz
  - VBW  $\geq$  RBW
  - Sweep = 100 s
  - Detector function = peak
  - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

### 14.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2008/09/11	2009/09/11
Attenuator	Weinschel Engineering	1	N/A	N/A

## 14.4 Measurement Data

Test Date : Jul. 23, 2009      Temperature : 22 °C      Humidity : 58 %

### Test Mode: 8DPSK

- a) Channel Low : Maximun Power Density of 3 kHz Bandwidth is -13.89dBm
- b) Channel Middle : Maximun Power Density of 3 kHz Bandwidth is -14.03dBm
- c) Channel High : Maximun Power Density of 3 kHz Bandwidth is -14.32dBm

### Test Mode: GFSK

- a) Channel Low : Maximun Power Density of 3 kHz Bandwidth is -11.34dBm
- b) Channel Middle : Maximun Power Density of 3 kHz Bandwidth is -11.47dBm
- c) Channel High : Maximun Power Density of 3 kHz Bandwidth is -11.82dBm

*Note : The expanded uncertainty of the power density tests is 2dB.*

**Test Mode: 8DPSK/Channel Low**




\*RBW 3 kHz                   Marker 1 [T1 ]  
\*VBW 100 kHz               -13.89 dBm  
\*SWT 100 s                   2.401825160 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

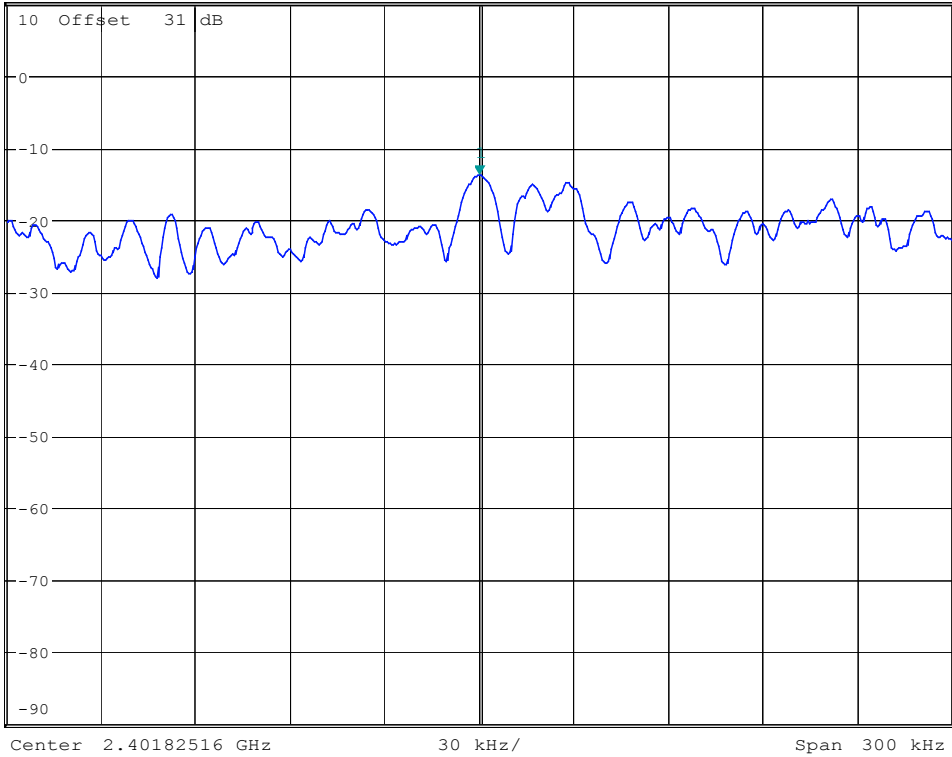

Date: 24.JUL.2009 16:08:51


**Test Mode: 8DPSK/Channel Middle**



\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -14.03 dBm  
\*SWT 100 s      2.440824679 GHz

Ref 10 dBm

Att 5 dB

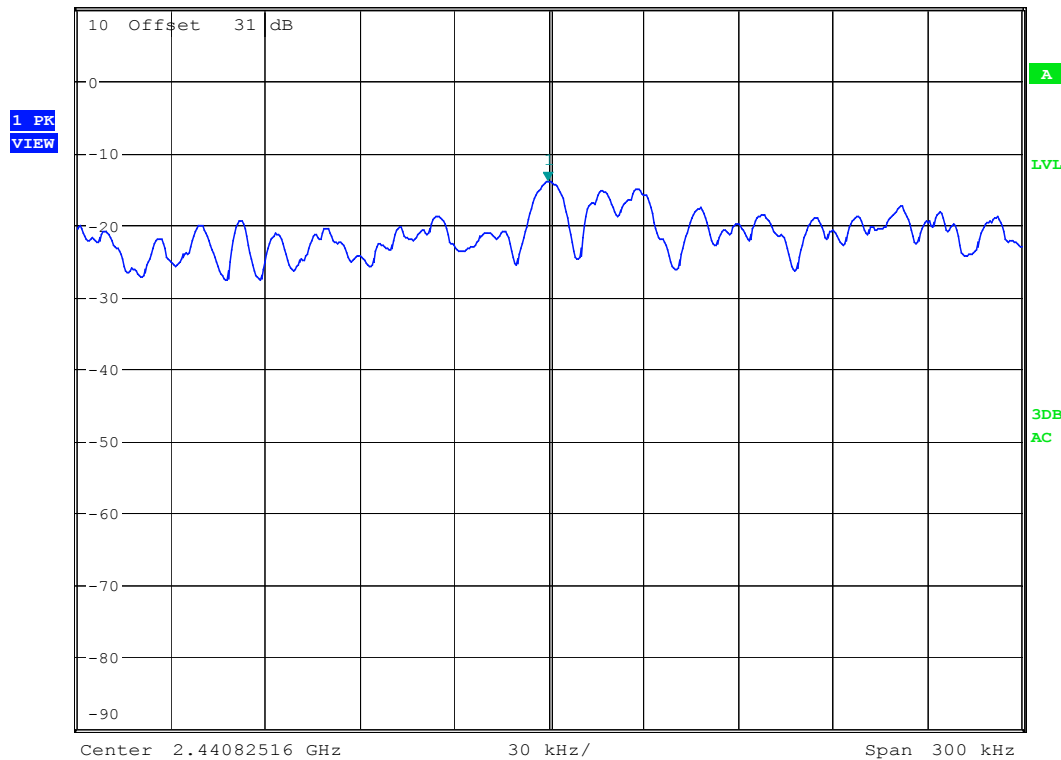

Date: 24.JUL.2009 17:03:21

**Test Mode: 8DPSK/Channel High**




\*RBW 3 kHz                   Marker 1 [T1 ]  
\*VBW 100 kHz               -14.32 dBm  
\*SWT 100 s                   2.479825000 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

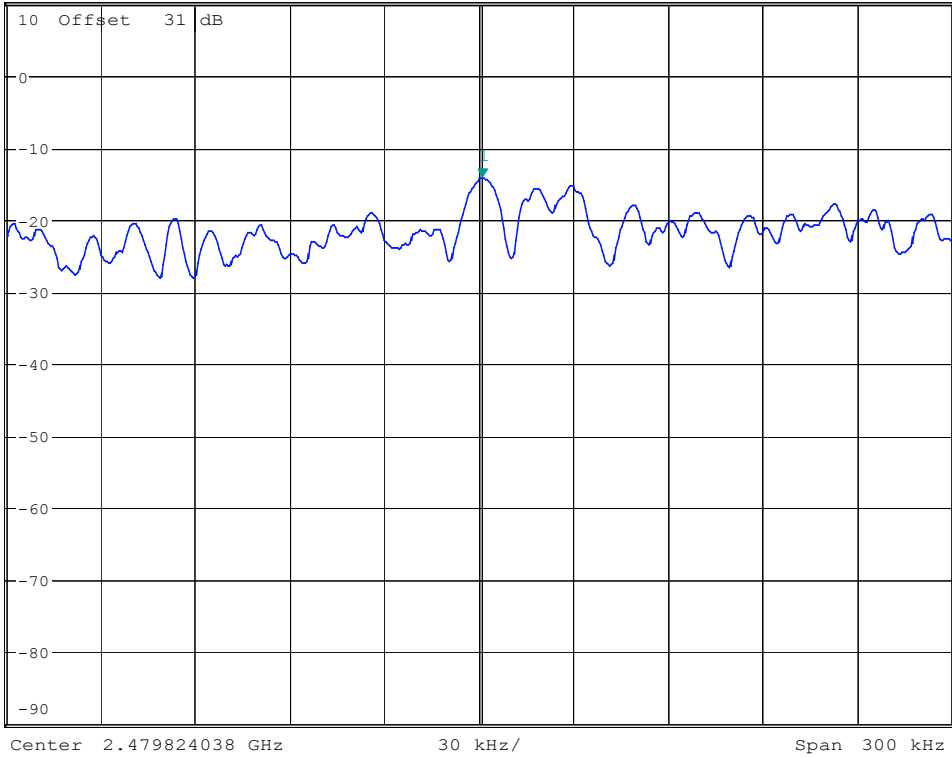

Date: 24.JUL.2009 17:23:06


**Test Mode: GFSK/Channel Low**



\*RBW 3 kHz                   Marker 1 [T1 ]  
\*VBW 100 kHz               -11.34 dBm  
\*SWT 100 s                   2.401967628 GHz

Ref 10 dBm

Att 5 dB

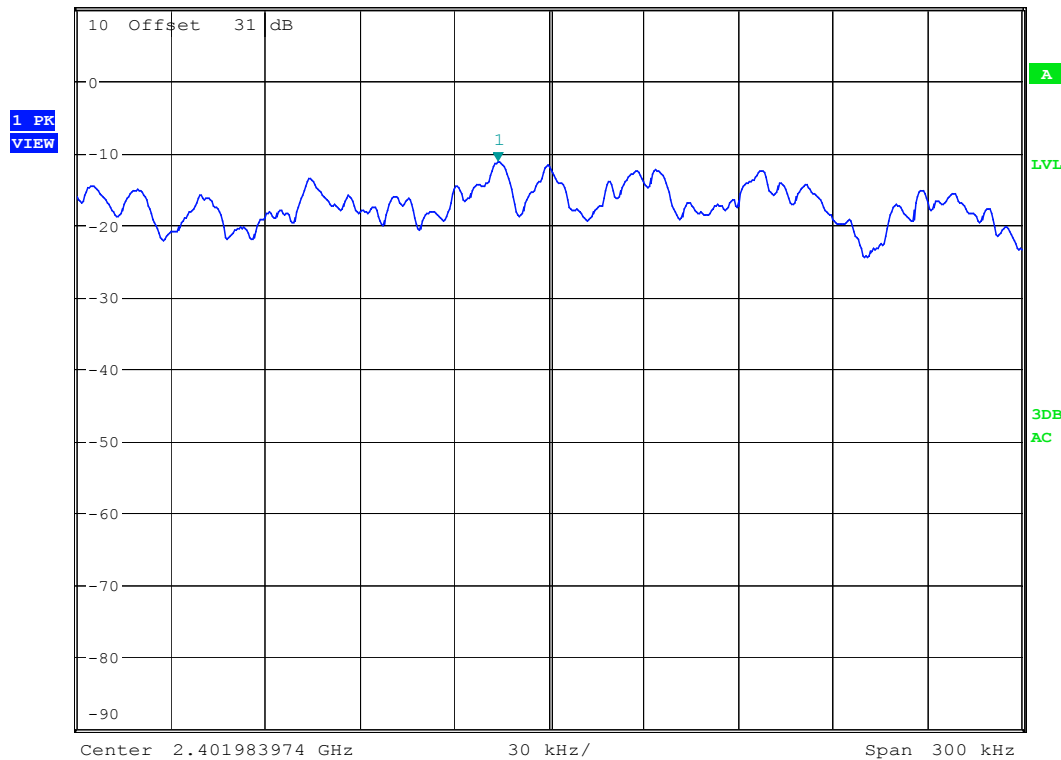

Date: 24.JUL.2009 15:27:27

**Test Mode: GFSK /Channel Middle**




\*RBW 3 kHz                   Marker 1 [T1 ]  
\*VBW 100 kHz               -11.47 dBm  
\*SWT 100 s                   2.440968590 GHz

Ref 10 dBm

Att 5 dB

1 PK  
VIEW

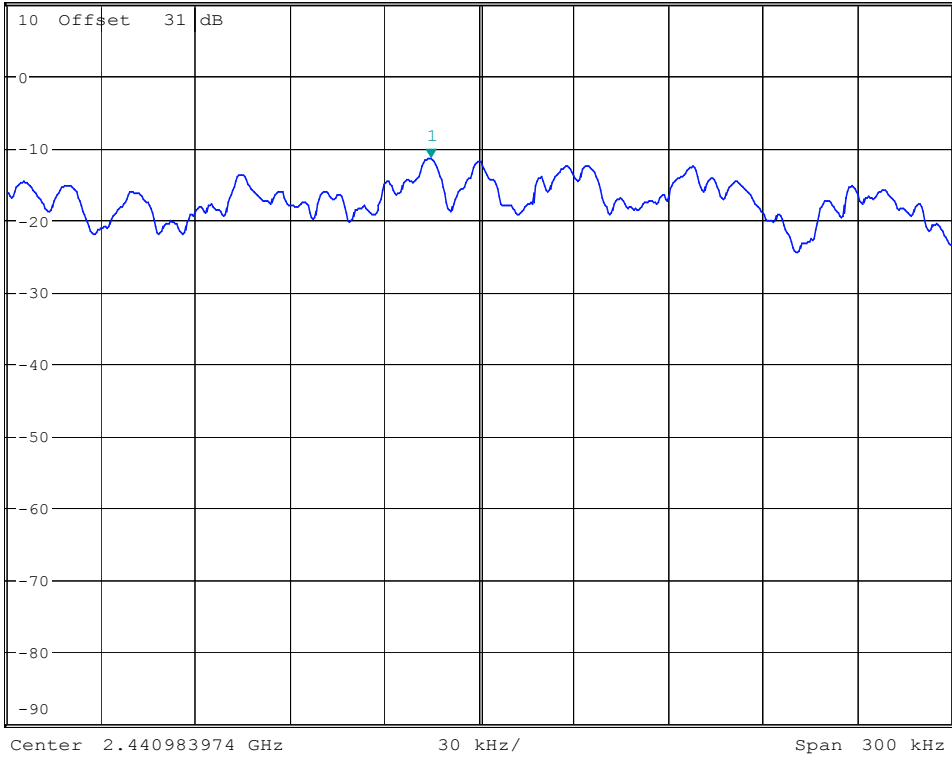

Date: 24.JUL.2009 15:18:01



**Test Mode: GFSK/Channel High**




\*RBW 3 kHz      Marker 1 [T1 ]  
\*VBW 100 kHz      -11.82 dBm  
\*SWT 100 s      2.479968429 GHz

Ref 10 dBm

\*Att 0 dB

1 PK  
VIEW

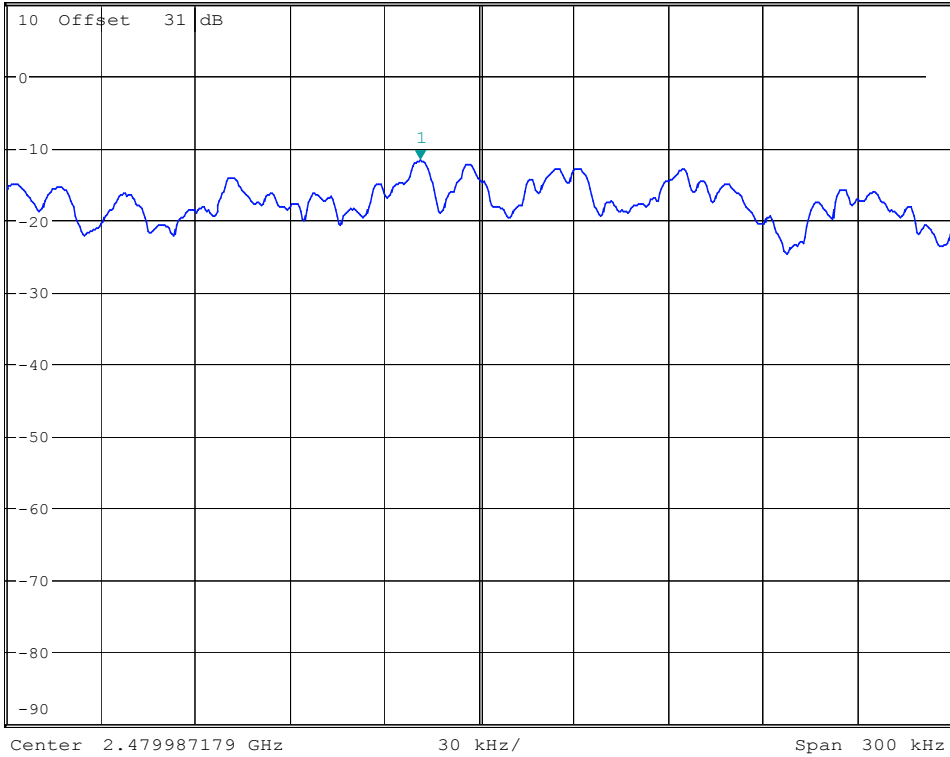

Date: 24.JUL.2009 14:45:17