

FCC Test Report

Product Name	Docking
Model No.	L701(Dock)
FCC ID	NIYL701RX

Applicant	Dexin Corp
Address	14F-8, No. 258, Lian Cheng Rd Chung Ho City, Taipei Hsien, Taiwan

Date of Receipt	Oct. 08, 2015
Issued Date	Dec. 01, 2015
Report No.	15A0132R-RFUSP15V00-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of QuieTek Corporation.

Test Report

Issued Date: Dec. 01, 2015

Report No.: 15A0132R-RFUSP15V00-A



Product Name	Docking
Applicant	Dexin Corp
Address	14F-8, No. 258, Lian Cheng Rd Chung Ho City, Taipei Hsien, Taiwan
Manufacturer	Dexin Corporation
Model No.	L701(Dock)
EUT Rated Voltage	DC 5V (Power by USB)
EUT Test Voltage	DC 5V (Power by USB)
Trade Name	ASUS
Applicable Standard	FCC CFR Title 47 Part 15 Subpart C: 2014 ANSI C63.4: 2014, ANSI C63.10: 2013
Test Result	Complied

Documented By :

Leven Huang

(Senior Adm. Specialist / Leven Huang)

Tested By :

Jack Hsu

(Engineer / Jack Hsu)

Approved By :

Vincent Lin

(Director / Vincent Lin)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION.....	4
1.1. EUT Description.....	4
1.2. Operational Description	6
1.3. Tested System Details.....	7
1.4. Configuration of Test System.....	7
1.5. EUT Exercise Software	7
1.6. Test Facility	8
2. Conducted Emission.....	9
2.1. Test Equipment.....	9
2.2. Test Setup	9
2.3. Limits	10
2.4. Test Procedure	10
2.5. Uncertainty	10
2.6. Test Result of Conducted Emission.....	11
3. Radiated Emission.....	13
3.1. Test Equipment.....	13
3.2. Test Setup	14
3.3. Limits	15
3.4. Test Procedure	16
3.5. Uncertainty	16
3.6. Test Result of Radiated Emission.....	17
4. Band Edge	26
4.1. Test Equipment.....	26
4.2. Test Setup	27
4.3. Limits	28
4.4. Test Procedure	28
4.5. Uncertainty	28
4.6. Test Result of Band Edge	29
5. Duty Cycle.....	35
5.1. Test Equipment.....	35
5.2. Test Setup	35
5.3. Uncertainty	35
5.4. Test Result of Duty Cycle.....	36
6. EMI Reduction Method During Compliance Testing	38
Attachment 1: EUT Test Photographs	
Attachment 2: EUT Detailed Photographs	

1. GENERAL INFORMATION

1.1. EUT Description

Product Name	Docking
Trade Name	ASUS
Model No.	L701(Dock)
FCC ID	NIYL701RX
Frequency Range	2406-2478MHz
Channel Number	5CH
Type of Modulation	GFSK
Channel Control	Auto
Antenna Type	Printed on PCB
Antenna Gain	Refer to the table “Antenna List”
USB Cable	Shielded, 1.8m

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	ASUS	N/A	Printed on PCB	2.11dBi for 2.4 GHz

Note: The antenna of EUT is conform to FCC 15.203

Frequency of Each Channel

Channel Frequency Channel Frequency Channel Frequency Channel Frequency
Channel 01: 2406 MHz Channel 02: 2425 MHz Channel 03: 2440 MHz Channel 04: 2470 MHz
Channel 05: 2478 MHz

Note:

1. The EUT is a Docking with a built-in 2.4GHz transceiver.
2. Regarding to the operation frequency, the lowest, middle and highest frequency are selected to perform the test.
3. These tests are conducted on a sample of the equipment for the purpose of demonstrating compliance with Part 15 Subpart C Paragraph 15.249 for spread spectrum devices.

Test Mode	Mode 1: Transmit
-----------	------------------


1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	Serial No.	Power Cord
1	Notebook PC	DELL	M65	CG098	Non-Shielded, 0.8m

	Signal Cable Type	Signal cable Description
A	USB Cable	Shielded, 1.8m

1.4. Configuration of Test System

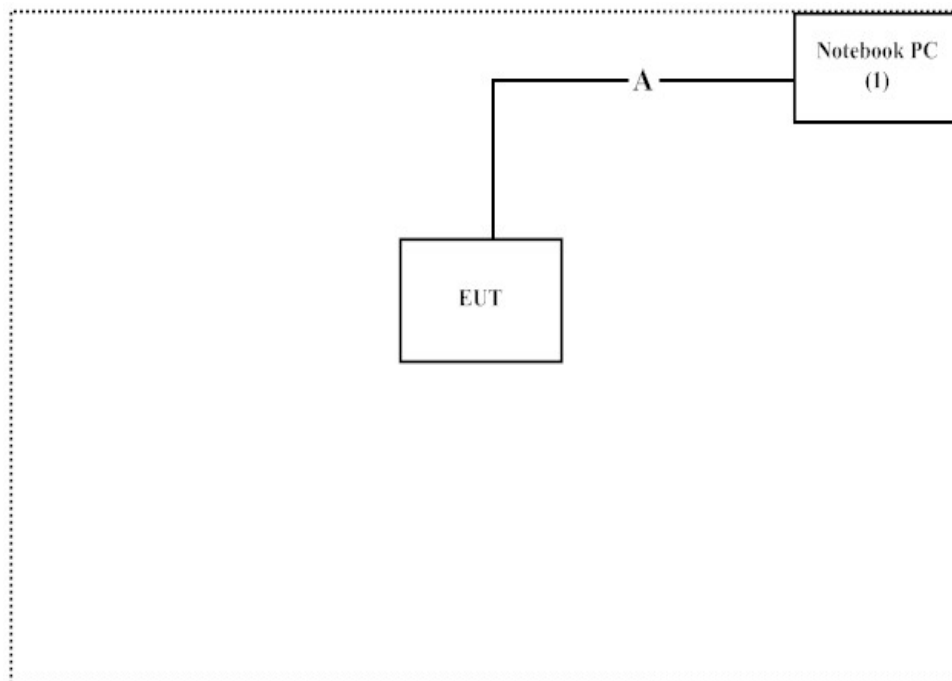

1.5. EUT Exercise Software

- (1) Setup the EUT as shown in Section 1.4.
- (2) Execute “EFROM write v3.2.5” program on the EUT.
- (3) Configure the test mode and the test channel
- (4) Press “OK” to start the continuous Transmit.
- (5) Verify that the EUT works properly.

1.6. Test Facility

Ambient conditions in the laboratory:

Items	Required (IEC 68-1)	Actual
Temperature (°C)	15-35	20-35
Humidity (%RH)	25-75	50-65
Barometric pressure (mbar)	860-1060	950-1000

The related certificate for our laboratories about the test site and management system can be downloaded from Quietek Corporation's Web Site : <http://www.quietek.com/chinese/about/certificates.aspx?bval=5>

The address and introduction of Quietek Corporation's laboratories can be founded in our Web site : <http://www.quietek.com/>

Site Description: File on
 Federal Communications Commission
 FCC Engineering Laboratory
 7435 Oakland Mills Road
 Columbia, MD 21046
 Registration Number: 92195

Site Name: Quietek Corporation
 Site Address: No.5-22, Ruishukeng, Linkou Dist.,
 New Taipei City 24451,
 Taiwan, R.O.C
 TEL: 886-2-8601-3788 / FAX : 886-2-8601-3789
 E-Mail : service@quietek.com

FCC Accreditation Number: TW1014

2. Conducted Emission


2.1. Test Equipment

	Equipment	Manufacturer	Model No. / Serial No.	Last Cal.	Remark
X	Test Receiver	R & S	ESCS 30 / 825442/018	Sep., 2015	
X	Artificial Mains Network	R & S	ENV4200 / 848411/10	Feb., 2015	Peripherals
X	LISN	R & S	ESH3-Z5 / 825562/002	Feb., 2015	EUT
	DC LISN	Schwarzbeck	8226 / 176	Mar, 2015	EUT
X	Pulse Limiter	R & S	ESH3-Z2 / 357.8810.52	Feb., 2015	
	No.1 Shielded Room				

Note:

1. All equipments are calibrated every one year.
2. The test instruments marked by “X” are used to measure the final test results.

2.2. Test Setup

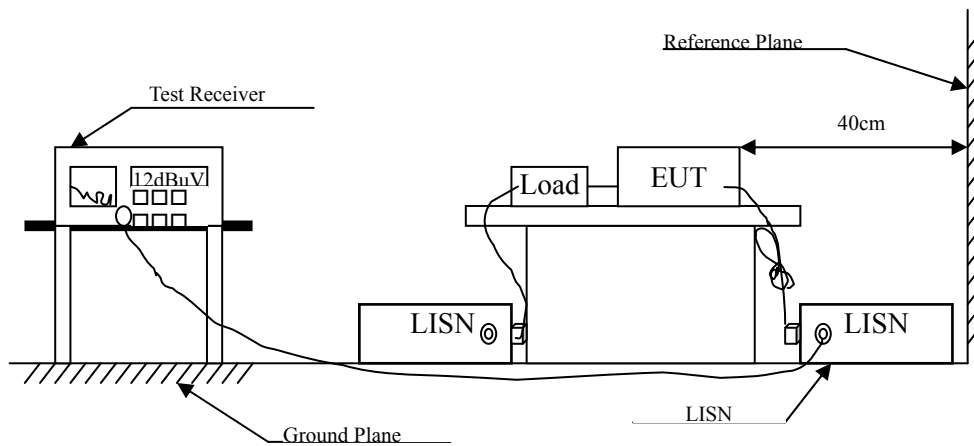

2.3. Limits

FCC Part 15 Subpart C Paragraph 15.207 (dBuV) Limit		
Frequency MHz	Limits	
	QP	AV
0.15 - 0.50	66-56	56-46
0.50-5.0	56	46
5.0 - 30	60	50

Remarks: In the above table, the tighter limit applies at the band edges.

2.4. Test Procedure

The EUT and simulators are connected to the main power through a line impedance stabilization network (L.I.S.N.). This provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm /50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs.)

Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2014 on conducted measurement.

Conducted emissions were invested over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

2.5. Uncertainty

± 2.26 dB

2.6. Test Result of Conducted Emission

Product : Docking
 Test Item : Conducted Emission Test
 Power Line : Line 1
 Test Mode : Mode 1: Transmit (2440MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 1					
Quasi-Peak					
0.162	9.761	27.970	37.731	-27.926	65.657
0.177	9.757	24.670	34.427	-30.802	65.229
0.193	9.754	22.680	32.434	-32.337	64.771
0.498	9.778	18.940	28.718	-27.339	56.057
2.615	9.927	28.080	38.007	-17.993	56.000
9.400	10.066	22.650	32.717	-27.283	60.000
Average					
0.162	9.761	14.920	24.681	-30.976	55.657
0.177	9.757	12.060	21.817	-33.412	55.229
0.193	9.754	11.740	21.494	-33.277	54.771
0.498	9.778	12.620	22.398	-23.659	46.057
2.615	9.927	22.660	32.587	-13.413	46.000
9.400	10.066	16.330	26.397	-23.603	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

Product : Docking
 Test Item : Conducted Emission Test
 Power Line : Line 2
 Test Mode : Mode 1: Transmit (2440MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV	Margin dB	Limit dBuV
Line 2					
Quasi-Peak					
0.150	9.764	28.930	38.694	-27.306	66.000
0.189	9.754	22.970	32.724	-32.162	64.886
0.216	9.756	20.030	29.786	-34.328	64.114
0.248	9.758	18.200	27.958	-35.242	63.200
2.615	9.927	25.710	35.637	-20.363	56.000
9.466	10.096	17.570	27.666	-32.334	60.000
Average					
0.150	9.764	14.440	24.204	-31.796	56.000
0.189	9.754	10.690	20.444	-34.442	54.886
0.216	9.756	10.090	19.846	-34.268	54.114
0.248	9.758	10.320	20.078	-33.122	53.200
2.615	9.927	20.510	30.437	-15.563	46.000
9.466	10.096	10.380	20.476	-29.524	50.000

Note:

1. All Reading Levels are Quasi-Peak and average value.
2. "■" means the worst emission level.
3. Measurement Level = Reading Level + Correct Factor

3. Radiated Emission

3.1. Test Equipment

The following test equipments are used during the radiated emission test:


Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input checked="" type="checkbox"/> Site # 3	X	Magnetic Loop Antenna	Teseq	HLA6121/ 37133	Sep, 2015
	X	Bilog Antenna	Schaffner Chase	CBL6112B/ 2707	Jun, 2015
	X	EMI Test Receiver	R&S	ESCS 30/838251/ 001	Jun, 2015
	X	Coaxial Cable	QTK(Armist)	RG 214/ LC003-RG	Jun, 2015
	X	Coaxial signal switch	Armist	MP59B/ 6200798682	Jun, 2015

Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
<input checked="" type="checkbox"/> CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2015
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2015


- Note:
1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
 2. The test instruments marked with "X" are used to measure the final test results.

3.2. Test Setup

Radiated Emission Below 1GHz

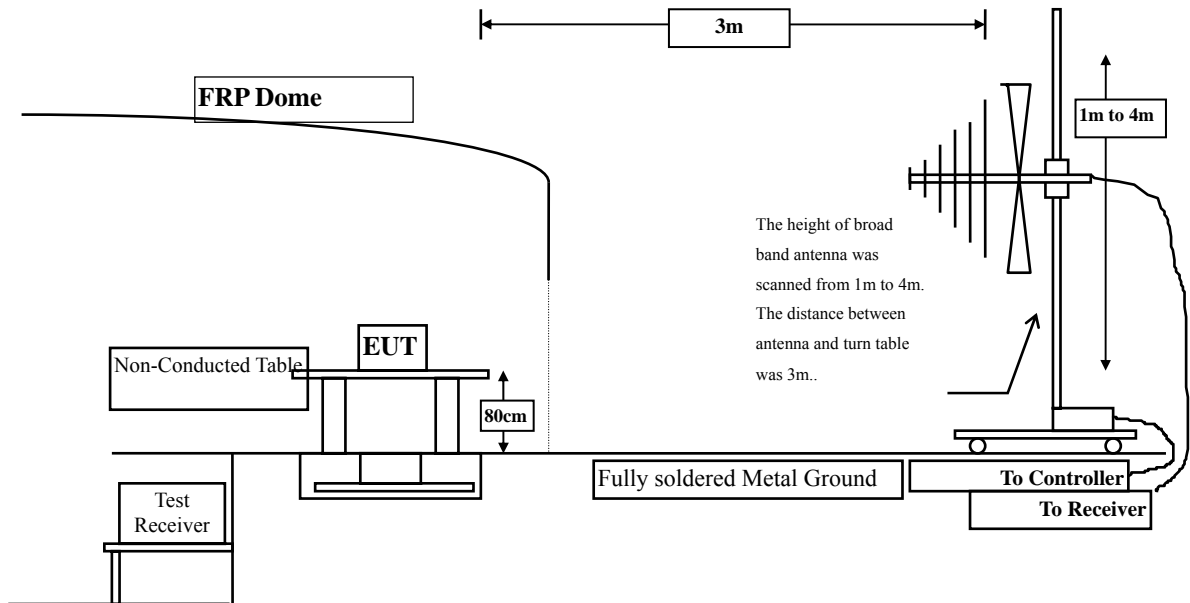

Radiated Emission Above 1GHz

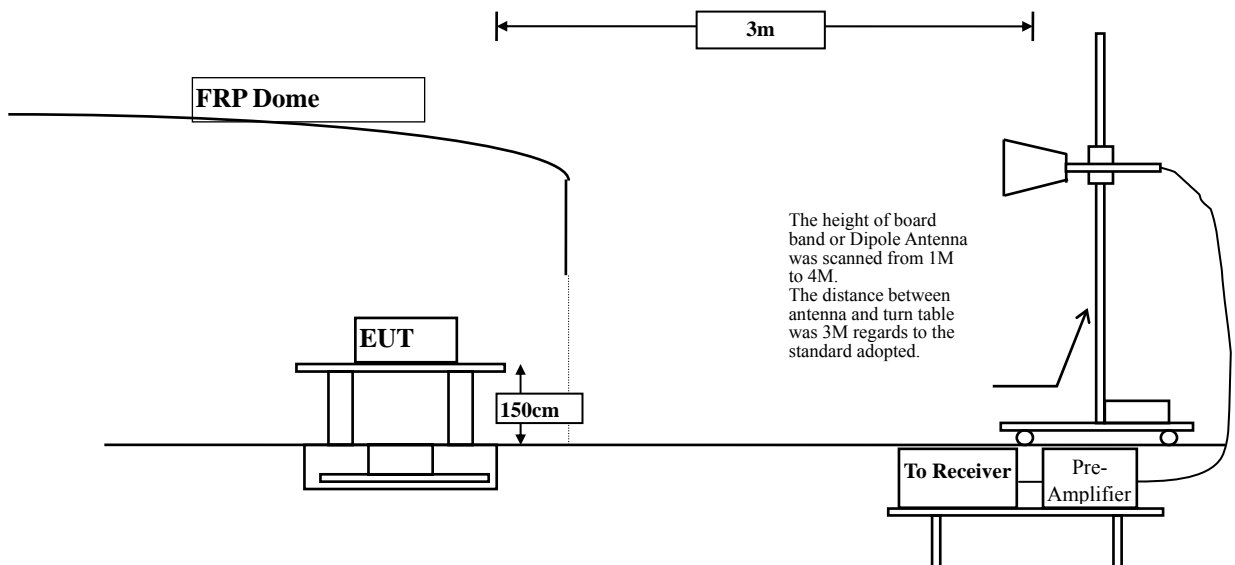

3.3. Limits

➤ Fundamental and Harmonics Emission Limits

FCC Part 15 Subpart C Paragraph 15.249 Limits				
Frequency MHz	Field Strength of Fundamental		Field Strength of Harmonics	
	(mV/m @3m)	(dBuV/m @3m)	(uV/m @3m)	(dBuV/m @3m)
902-928	50	94	500	54
2400-2483.5	50	94	500	54
5725-5875	50	94	500	54

- Remarks :
1. RF Voltage (dBuV/m) = 20 log RF Voltage (uV/m)
 2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

➤ General Radiated Emission Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

FCC Part 15 Subpart C Paragraph 15.209(a) Limits		
Frequency MHz	Field strength (microvolts/meter)	Measurement distance (meter)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Remarks: E field strength (dBuV/m) = 20 log E field strength (uV/m)

3.4. Test Procedure

The EUT was setup according to ANSI C63.10, 2013 and tested compliance to FCC 47CFR 15.249 requirements.

Measuring the frequency range below 1GHz, the EUT is placed on a turn table which is 0.8 meter above ground, when measuring the frequency range above 1GHz, the EUT is placed on a turn table which is 1.5 meter above ground.

The turn table is rotated 360 degrees to determine the position of the maximum emission level.

The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna is scanned between 1 meter and 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10: 2013 on radiated measurement.

The resolution bandwidth below 30MHz setting on the field strength meter is 9kHz and 30MHz~1GHz is 120kHz and above 1GHz is 1MHz.

Radiated emission measurements below 30MHz are made using Loop Antenna and 30MHz~1GHz are made using broadband Bilog antenna and above 1GHz are made using Horn Antennas.

The measurement is divided into the Preliminary Measurement and the Final Measurement.

The suspected frequencies are searched for in Preliminary Measurement with the measurement antenna kept pointed at the source of the emission both in azimuth and elevation, with the polarization of the antenna oriented for maximum response. The antenna is pointed at an angle towards the source of the emission, and the EUT is rotated in both height and polarization to maximize the measured emission. The emission is kept within the illumination area of the 3 dB bandwidth of the antenna.

The worst radiated emission is measured in the Open Area Test Site on the Final Measurement.

The measurement frequency range from 9kHz - 10th Harmonic of fundamental was investigated.

3.5. Uncertainty

± 3.9 dB above 1GHz

± 3.8 dB below 1GHz

3.6. Test Result of Radiated Emission

Product : Docking
 Test Item : Fundamental Radiated Emission
 Test Site : No.3OATS
 Test Mode : Mode 1: Transmit

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
2406.000	-1.051	89.914	88.864	-25.136	114.000
2440.000	-0.836	89.458	88.622	-25.378	114.000
2478.000	-0.593	88.746	88.153	-25.847	114.000
Vertical					
Peak Detector:					
2406.000	-1.721	80.374	78.653	-35.347	114.000
2440.000	-1.549	81.668	80.119	-33.881	114.000
2478.000	-1.336	79.982	78.647	-35.353	114.000

Note:

1. Measurement Level = Reading Level + Correct Factor.
2. Correct Factor = Antenna Factor + Cable Loss – PreAMP.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.

Average Detector:

Frequency MHz	Peak Measurement dBuV/m	Duty Cycle Correct Factor dB	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
------------------	-------------------------------	------------------------------------	--------------------------------	--------------	-----------------

Horizontal

Average Detector:

2406.000	88.864	-20.247	68.617	-25.383	94.000
2440.000	88.622	-20.247	68.375	-25.625	94.000
2478.000	88.153	-20.247	67.906	-26.094	94.000

Vertical


Average Detector:

2406.000	78.653	-20.247	58.406	-35.594	94.000
2440.000	80.119	-20.247	59.872	-34.128	94.000
2478.000	78.647	-20.247	58.400	-35.600	94.000

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Docking
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2406MHz)

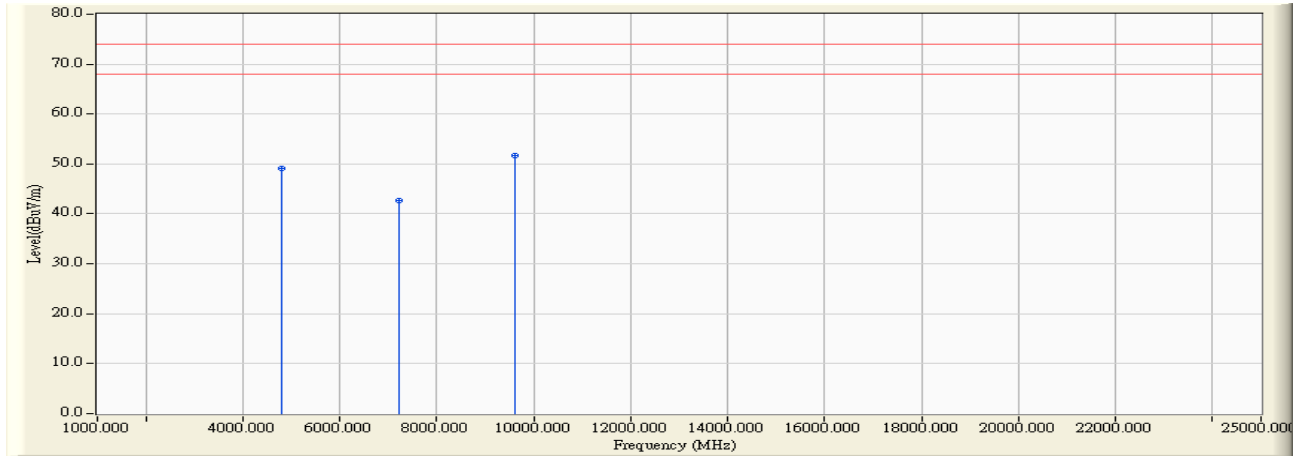


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4812.000	3.313	45.790	49.104	-24.896	74.000
7218.000	10.341	32.320	42.662	-31.338	74.000
9624.000	13.559	38.120	51.679	-22.321	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Docking
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2406MHz)

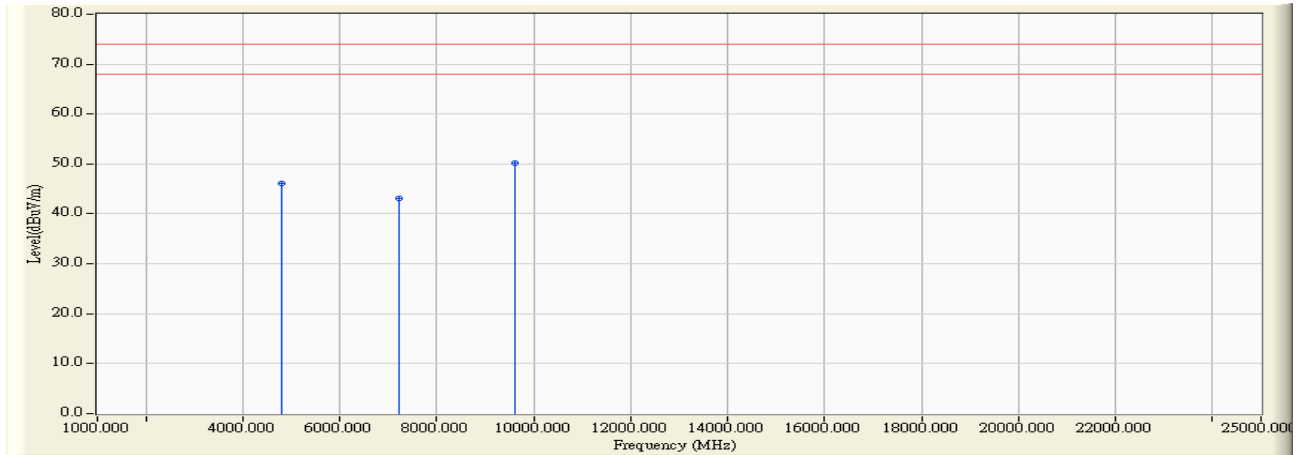


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
4812.000	6.566	39.520	46.087	-27.913	74.000
7218.000	11.201	31.810	43.011	-30.989	74.000
9624.000	13.985	36.280	50.265	-23.735	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Docking
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2440 MHz)

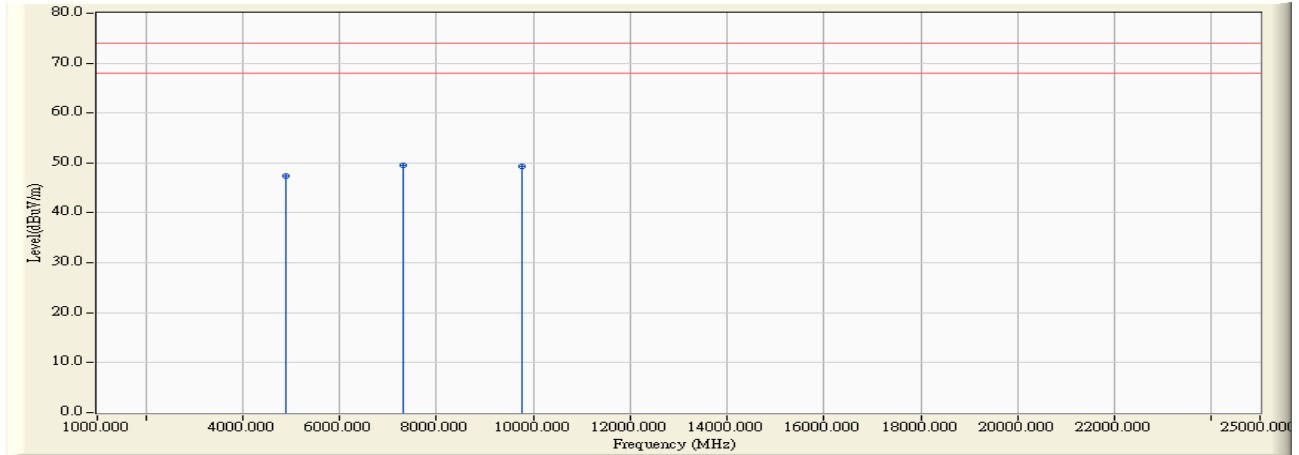


Frequency MHz	Correct Factor Db	Reading Level dBuV	Measurement Level dBuV/m	Margin Db	Limit dBuV/m
Horizontal					
Peak Detector:					
4880.000	2.976	44.360	47.335	-26.665	74.000
7320.000	11.833	37.710	49.544	-24.456	74.000
9760.000	12.580	36.670	49.251	-24.749	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Docking
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2440MHz)

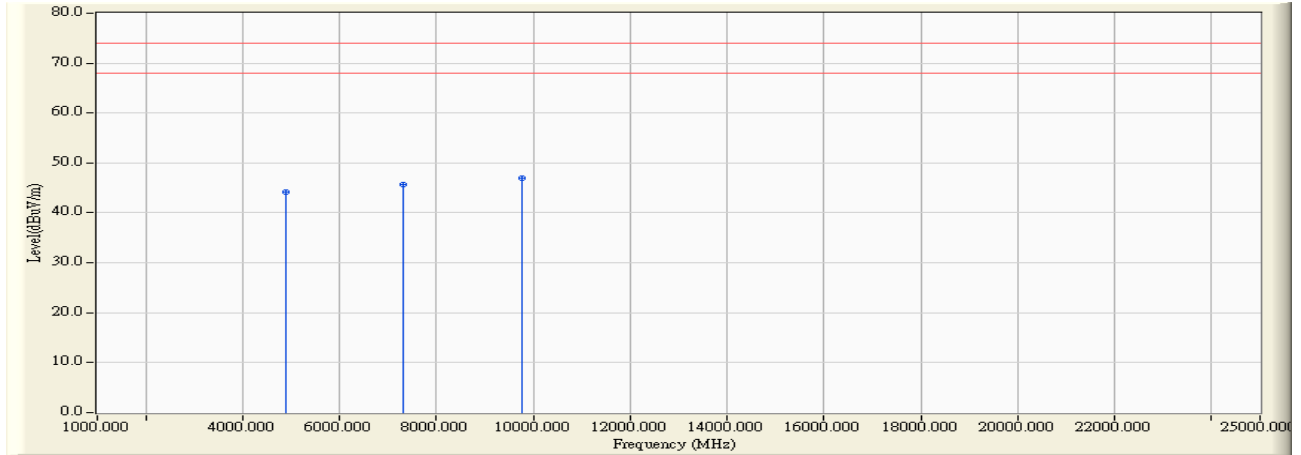


Frequency MHz	Correct Factor Db	Reading Level dBuV	Measurement Level dBuV/m	Margin Db	Limit dBuV/m
Vertical					
Peak Detector:					
4880.000	5.641	38.600	44.241	-29.759	74.000
7320.000	12.703	33.040	45.743	-28.257	74.000
9760.000	13.052	33.920	46.972	-27.028	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Docking
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2478 MHz)

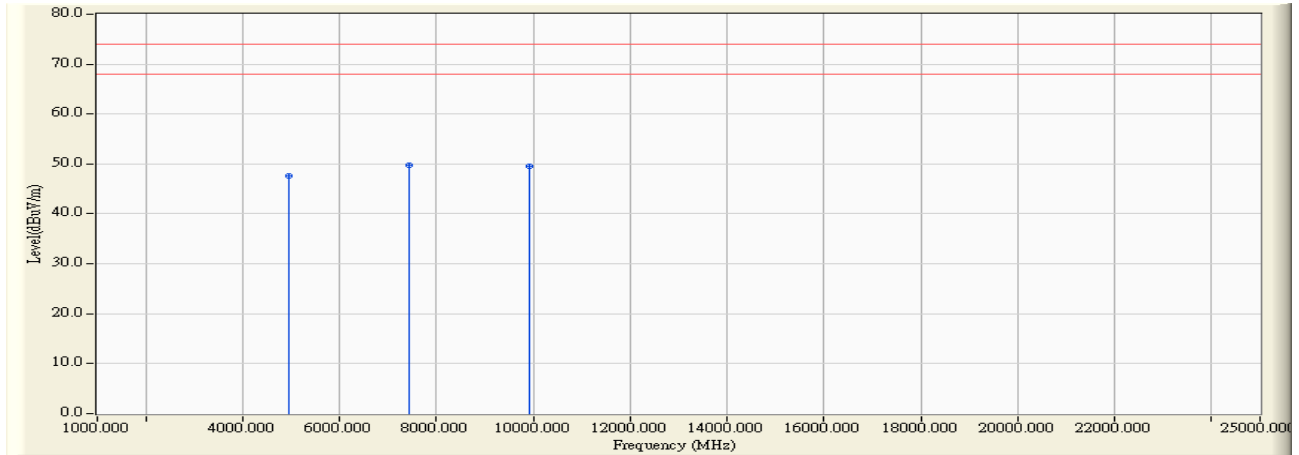


Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
Peak Detector:					
4956.000	2.771	44.910	47.681	-26.319	74.000
7434.000	12.509	37.230	49.740	-24.260	74.000
9912.000	13.411	36.200	49.611	-24.389	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Docking
 Test Item : Harmonic Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2478MHz)

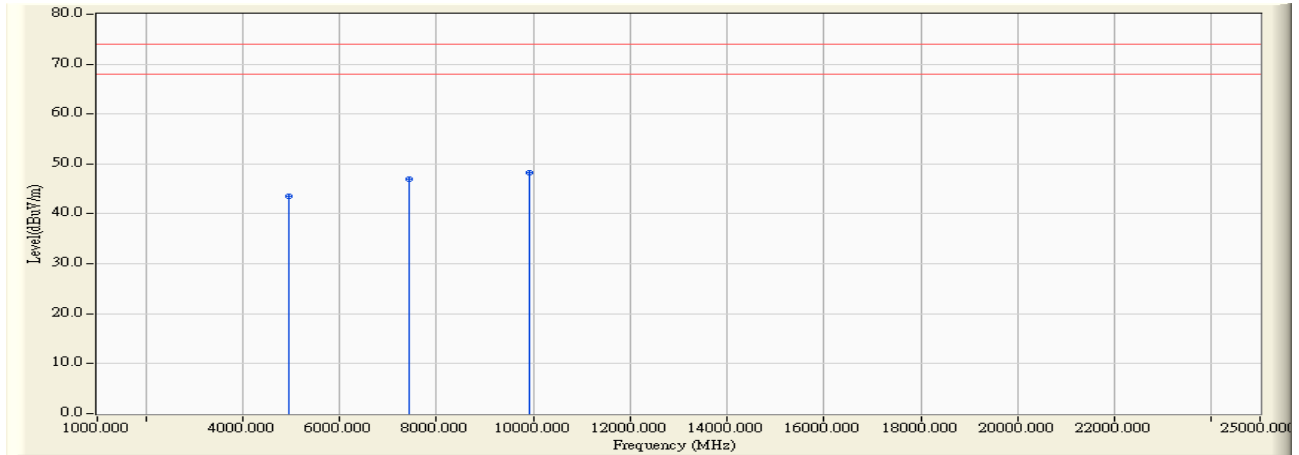

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Vertical					
Peak Detector:					
4956.000	5.553	37.880	43.434	-30.566	74.000
7434.000	13.416	33.540	46.957	-27.043	74.000
9912.000	13.964	34.190	48.155	-25.845	74.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : Docking
 Test Item : General Radiated Emission Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit (2440 MHz)

Frequency MHz	Correct Factor dB	Reading Level dBuV	Measurement Level dBuV/m	Margin dB	Limit dBuV/m
Horizontal					
65.145	-12.341	42.331	29.990	-10.010	40.000
191.667	-10.208	43.915	33.707	-9.793	43.500
380.043	-0.966	42.561	41.595	-4.405	46.000
491.101	-0.532	32.523	31.990	-14.010	46.000
703.377	2.647	27.127	29.774	-16.226	46.000
843.957	5.505	28.226	33.732	-12.268	46.000
Vertical					
119.971	-3.705	32.749	29.044	-14.456	43.500
278.826	-8.750	31.891	23.141	-22.859	46.000
443.304	-8.228	35.564	27.336	-18.664	46.000
515.000	-1.090	30.784	29.694	-16.306	46.000
626.058	-2.705	30.606	27.900	-18.100	46.000
783.507	3.022	29.162	32.184	-13.816	46.000

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. Measurement Level = Reading Level + Correct Factor.
5. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
6. The average measurement was not performed when the peak measured data under the limit of average detection.
7. The emission levels of other frequencies are very lower than the limit and not show in test report.

4. Band Edge

4.1. Test Equipment

RF Conducted Measurement

The following test equipments are used during the band edge tests:

	Equipment	Manufacturer	Model No./Serial No.	Last Cal.
	Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
	Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X	Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

Note:

1. All equipments are calibrated with traceable calibrations. Each calibration is traceable to the national or international standards.
2. The test instruments marked with “X” are used to measure the final test results.

The following test equipments are used during the band edge tests:


Test Site		Equipment	Manufacturer	Model No./Serial No.	Last Cal.
☒ CB # 8	X	Spectrum Analyzer	R&S	FSP40/ 100339	Oct, 2015
	X	Horn Antenna	ETS-Lindgren	3117/ 35205	Mar, 2015
	X	Horn Antenna	Schwarzbeck	BBHA9170/209	Jan, 2015
	X	Horn Antenna	TRC	AH-0801/95051	Aug, 2015
	X	Pre-Amplifier	EMCI	EMC012630SE/980210	Jan, 2015
	X	Pre-Amplifier	MITEQ	JS41-001040000-58-5P/153945	Jul, 2015
	X	Pre-Amplifier	NARDA	DBL-1840N506/013	Jul, 2015

Note:


1. All equipments are calibrated every one year.
2. The test equipments marked by “X” are used to measure the final test results.

4.2. Test Setup

RF Conducted Measurement

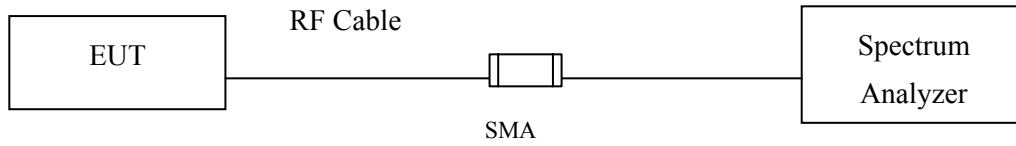

RF Radiated Measurement:

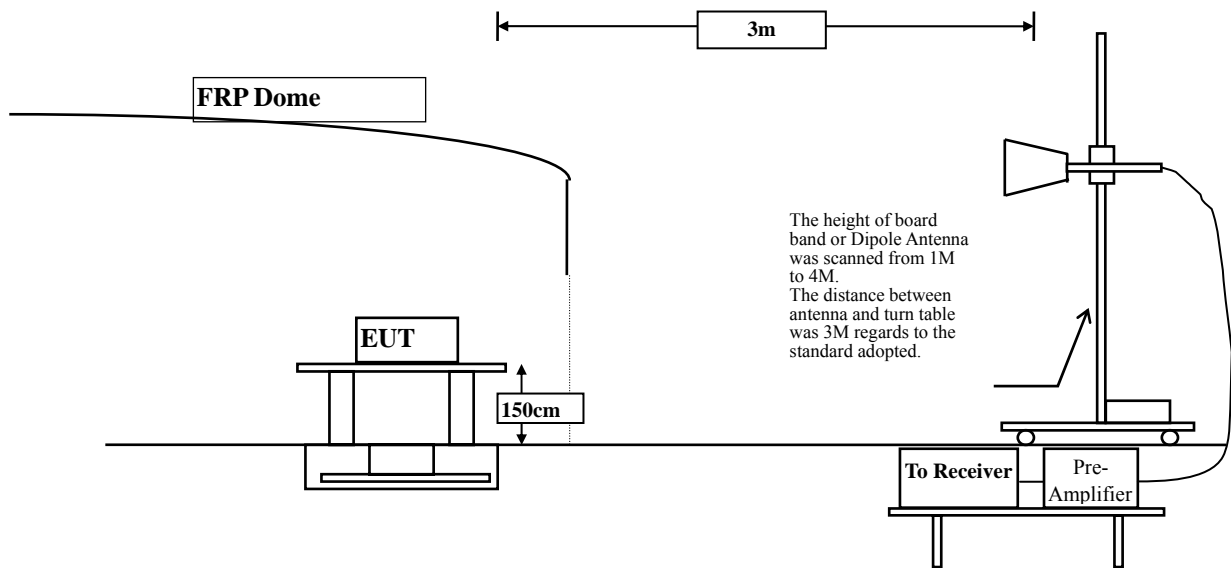

4.3. Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 50 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

4.4. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth setting below 1GHz and above 1GHz on the field strength meter is 120 kHz and 1MHz, respectively.

4.5. Uncertainty

Conducted is ± 1.27 dB

Radiated is ± 3.9 dB


4.6. Test Result of Band Edge

Product : Docking
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2390.000	31.509	27.197	58.706	74.00	54.00	Pass
01 (Peak)	2400.000	31.561	31.946	63.507	74.00	54.00	Pass
01 (Peak)	2406.087	31.599	57.265	88.864	--	--	--

Figure Channel 01: Horizontal (Peak)

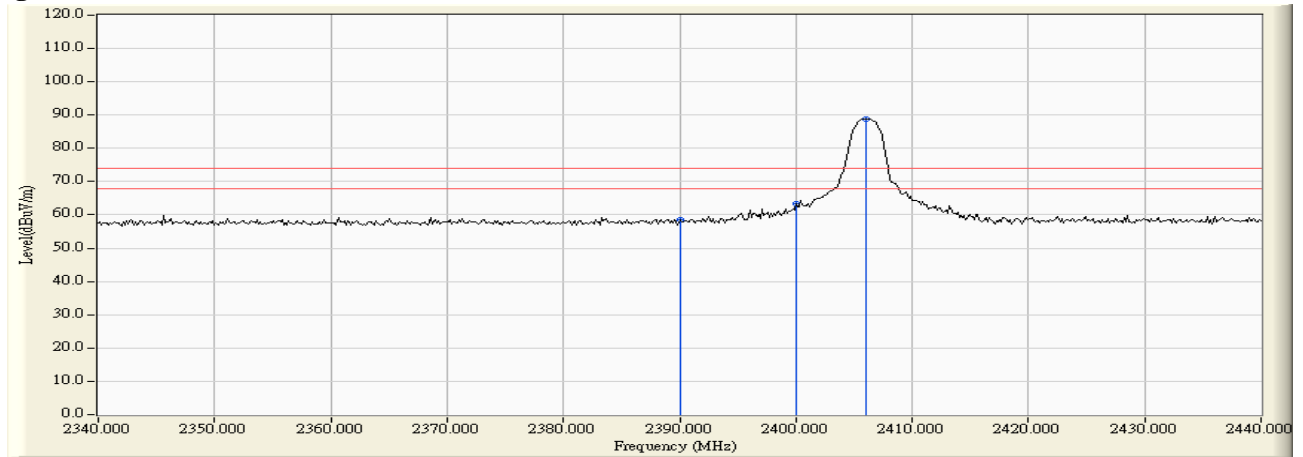

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Docking
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
01 (Peak)	2373.478	30.991	27.811	58.803	74.00	54.00	Pass
01 (Peak)	2390.000	30.915	26.103	57.018	74.00	54.00	Pass
01 (Peak)	2400.000	30.912	25.929	56.841	74.00	54.00	Pass
01 (Peak)	2405.797	30.928	47.725	78.653	--	--	--

Figure Channel 01: Vertical (Peak)

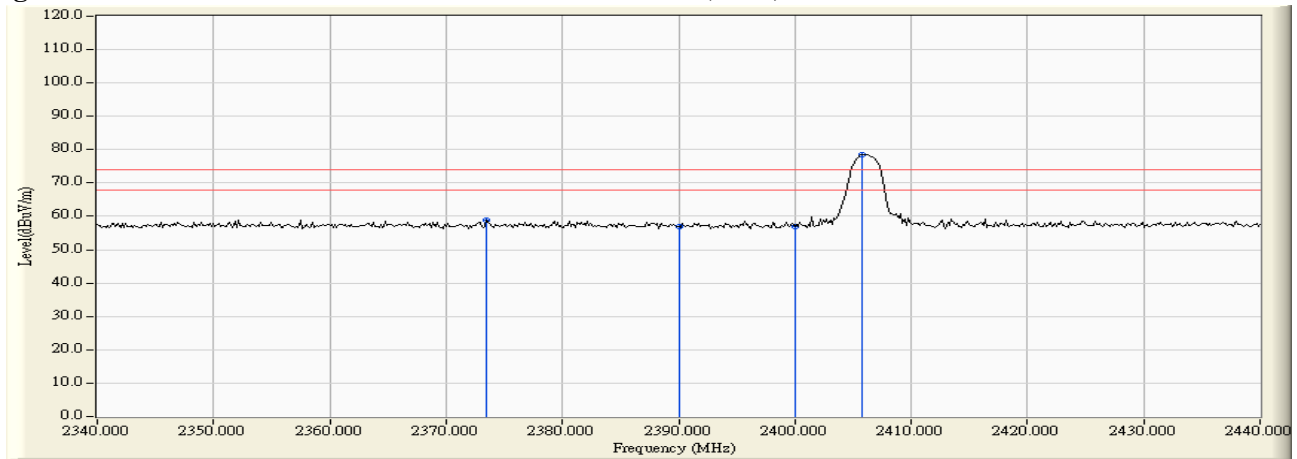

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m	Result Pass
------------------	-------------------------------------	----------------------------	--------------------------------------	--------------	-----------------------	----------------

Horizontal

Average Detector:

2390.000	58.706	-20.247	38.459	-15.541	54.000	Pass
2400.000	63.507	-20.247	43.260	-10.740	54.000	Pass

Vertical

Average Detector:

2373.478	58.803	-20.247	38.556	-15.444	54.000	Pass
2390.000	57.018	-20.247	36.771	-17.229	54.000	Pass
2400.000	56.841	-20.247	36.594	-17.406	54.000	Pass

Note:


1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

Product : Docking
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

RF Radiated Measurement (Horizontal):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
05 (Peak)	2477.848	32.139	56.014	88.153	--	--	--
05 (Peak)	2483.500	32.182	27.420	59.602	74.00	54.00	Pass
05 (Peak)	2499.297	31.527	28.629	60.155	74.00	54.00	Pass

Figure Channel 05: Horizontal (Peak)

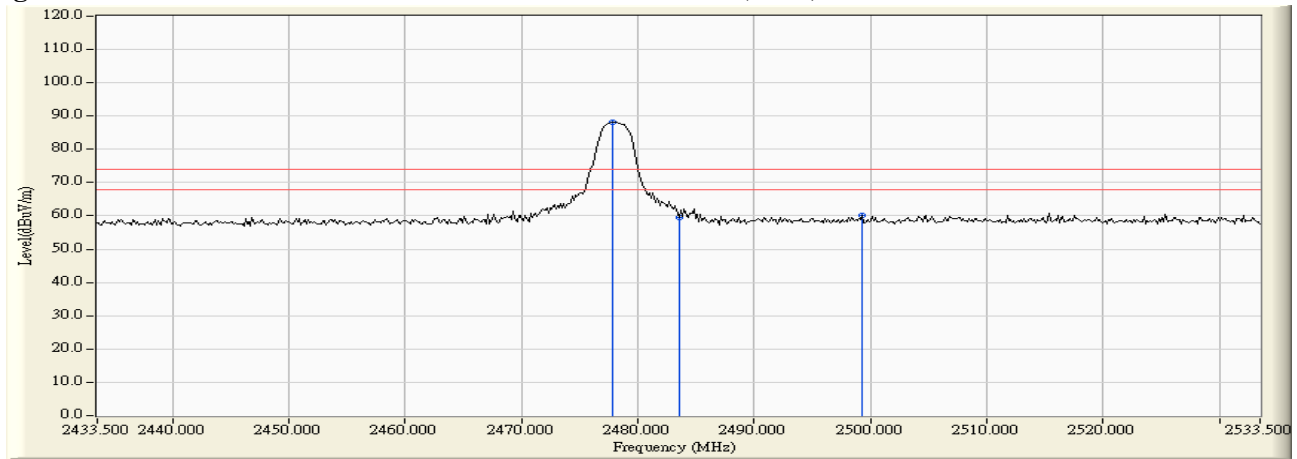

Note:


1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : Docking
 Test Item : Band Edge Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

RF Radiated Measurement (Vertical):

Channel No.	Frequency (MHz)	Correct Factor (dB)	Reading Level (dBuV)	Emission Level (dBuV/m)	Peak Limit (dBuV/m)	Average Limit (dBuV/m)	Result
05 (Peak)	2478.138	31.400	47.248	78.647	--	--	--
05 (Peak)	2483.500	31.435	27.057	58.492	74.00	54.00	Pass
05 (Peak)	2502.341	31.532	28.972	60.504	74.00	54.00	Pass

Figure Channel 05: Vertical (Peak)

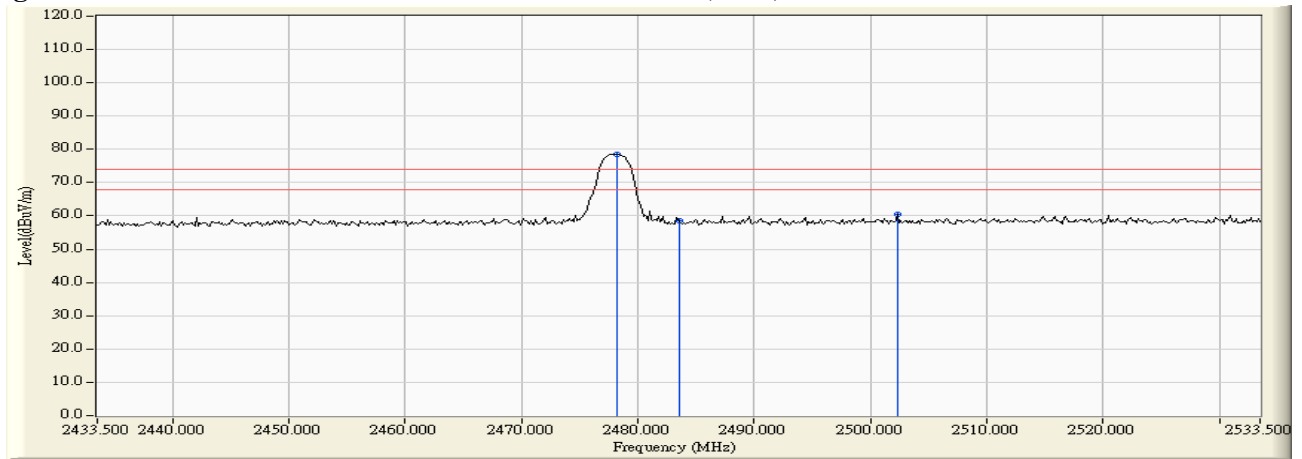

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Peak measurements: RBW = 1MHz, VBW = 3 MHz, Sweep: Auto.
3. Average measurements: RBW = 1MHz, VBW = 10 Hz, Sweep: Auto.
4. “ * ”, means this data is the worst emission level.
5. Measurement Level = Reading Level + Correct Factor.
6. The average measurement was not performed when the peak measured data under the limit of average detection.

Average Detector:

Frequency MHz	Peak Measurement dB μ V/m	Duty Cycle Factor dB	Measurement Level dB μ V/m	Margin dB	Limit dB μ V/m	Result Pass
------------------	-------------------------------------	----------------------------	--------------------------------------	--------------	-----------------------	----------------

Horizontal

Average Detector:

2483.500	59.602	-20.247	39.355	-14.645	54.000	Pass
2499.297	60.155	-20.247	39.908	-14.092	54.000	Pass

Vertical

Average Detector:

2483.500	58.492	-20.247	38.245	-15.755	54.000	Pass
2502.341	60.504	-20.247	40.257	-13.743	54.000	Pass

Note:

1. AVG Measurement=Peak Measurement + Duty Cycle Correct Factor
2. The Duty Cycle is refer to section 5.

5. Duty Cycle


5.1. Test Equipment

The following test equipments are used during the band edge tests:

Equipment	Manufacturer	Model No./Serial No.	Last Cal.
Spectrum Analyzer	R&S	FSP40 / 100170	Jun, 2015
Spectrum Analyzer	Agilent	E4407B / US39440758	Jun, 2015
X Spectrum Analyzer	Agilent	N9010A / MY48030495	Apr., 2015

- Note:
1. All equipments are calibrated every one year.
 2. The test equipments marked by "X" are used to measure the final test results.

5.2. Test Setup


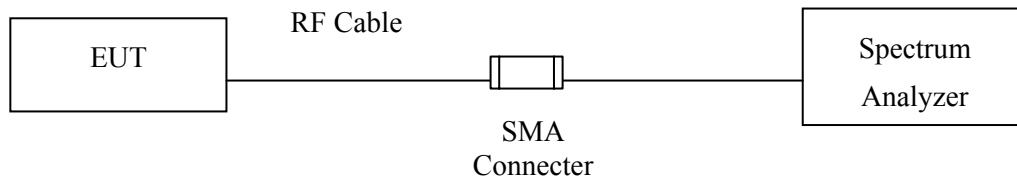


5.3. Uncertainty

$\pm 150\text{Hz}$

5.4. Test Result of Duty Cycle

Product : Docking
 Test Item : Duty Cycle Data
 Test Site : No.3 OATS
 Test Mode : Mode 1: Transmit

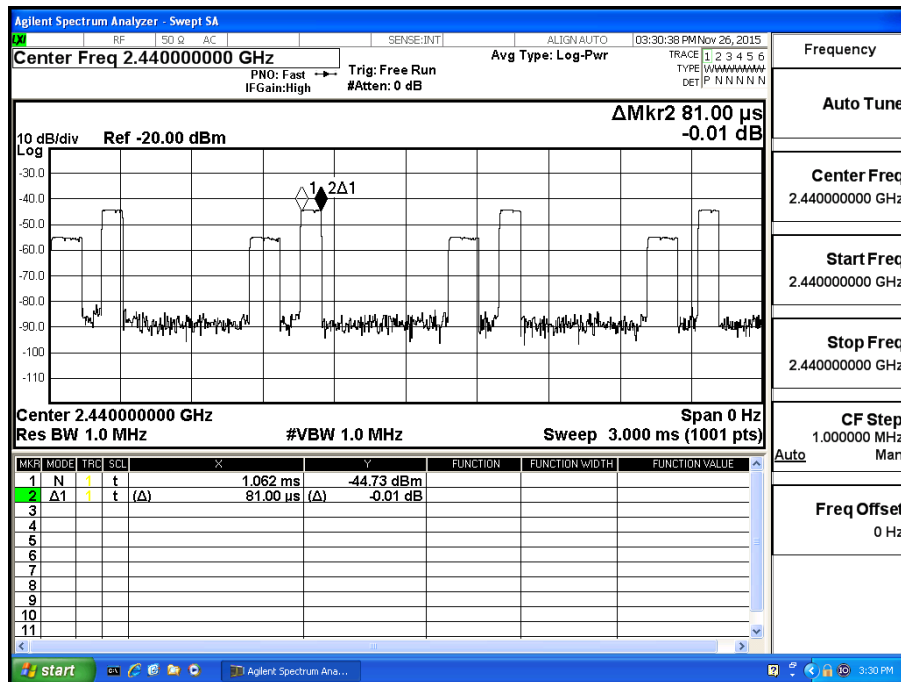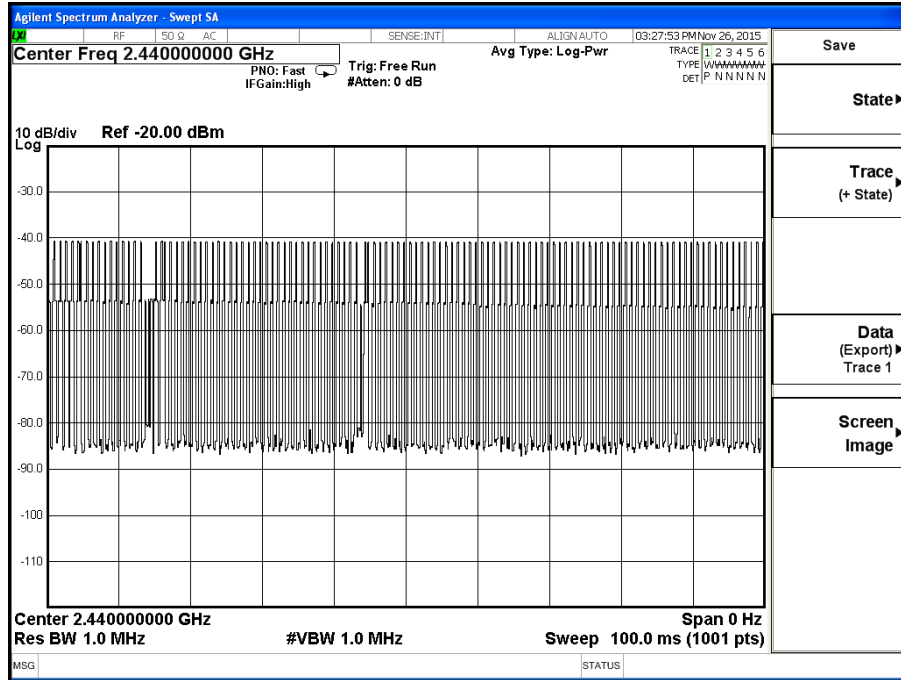

Time on of 100ms= 81.00us*120= 9.720 ms

Duty Cycle=9.72ms / 100ms= 0.0972

Duty Cycle correction factor= 20 LOG 0.0972= -20.247 dB

Duty Cycle correction factor	-20.247	dB
-------------------------------------	----------------	-----------

6. EMI Reduction Method During Compliance Testing

No modification was made during testing.