



3000 Bristol Circle,  
Oakville, Ontario,  
Canada L6H 6G4

Tel.: (905) 829-1570  
Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com)  
Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com)

Feb. 17, 2006

**TIMCO ENGINEERING INC.**

P.O. Box 370  
849 N.W. State Road 45  
Newberry, Florida  
USA 32669

**Subject: FCC Certification Authorization Application under FCC PART 15, Subpart C, Sec. 15.209 - Low Power Transmitters operating in the frequency band 24.2 - 25.2 GHz.**

**Product: SITRANS LR 460**  
**Model No.: 7ML5426**  
**FCC ID: NJA-LR460**

Dear Sir/Madam

As appointed agent for Siemens Milltronics Process Instruments Inc., we would like to submit the application for certification of the above product. Please review all required documents uploaded to your E-Filing web site.

If you have any queries, please do not hesitate to contact us.

Yours truly,



Tri Minh Luu, P. Eng.,  
V.P., Engineering

Encl



3000 Bristol Circle,  
Oakville, Ontario,  
Canada L6H 6G4

Tel.: (905) 829-1570  
Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com)  
Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com)

Feb. 17, 2006

**Siemens Milltronics Process Instruments Inc.**

1954 Technology Drive, P.O. Box 4225  
Peterborough, Ontario  
Canada, K9L 7B1

**Attn.: Mr. Enzo De Simone**

**Subject: FCC Certification Application Testing under FCC PART 15,  
Subpart C, Sec. 15.209 – Low Power Transmitters operating in the  
frequency band 24.2 - 25.2 GHz.**

**Product: SITRANS LR 460  
Model No.: 7ML5426  
FCC ID: NJA-LR460**

Dear Mr. De Simone,

The product sample, as provided by you, has been tested and found to comply with **FCC PART 15, Subpart C, Sec. 15.209 - Low Power Transmitters operating in the frequency band 24.2 - 25.2 GHz.**

Enclosed you will find copies of the engineering report. If you have any queries, please do not hesitate to contact us.


Yours truly,



Tri Minh Luu, P. Eng.,  
V.P., Engineering

Encl

# ENGINEERING TEST REPORT



**SITRANS LR 460**  
**Model No.: 7ML5426**

**FCC ID: NJA-LR460**

*Applicant:* **Siemens Milltronics Process Instruments Inc.**  
*1954 Technology Drive, P.O. Box 4225*  
*Peterborough, Ontario*  
*Canada, K9L 7B1*

*In Accordance With*

**FEDERAL COMMUNICATIONS COMMISSION (FCC)**  
**PART 15, SUBPART C, SEC. 15.209**  
**Low Power Transmitters**  
**Operating in the frequency band 24.2 - 25.2 GHz**

**UltraTech's File No.: MIL-345FCC15C-FEB1706**

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs



Date: Feb. 17, 2006

Report Prepared by: Tri Luu

Tested by: Hung Trinh

Issued Date: Feb. 17, 2006

Test Dates: Oct. 18 - Nov. 02, 2005

- *The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- *This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

## UltraTech

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4  
Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri.luu@sympatico.ca](mailto:tri.luu@sympatico.ca)



31040/SIT



C-1376



46390-2049



200093-0



SL2-IN-E-1119R



00-034



## TABLE OF CONTENTS

<b>EXHIBIT 1. INTRODUCTION .....</b>	<b>3</b>
1.1. SCOPE .....	3
1.2. RELATED SUBMITAL(S)/GRANT(S).....	3
1.3. NORMATIVE REFERENCES .....	3
<b>EXHIBIT 1. PERFORMANCE ASSESSMENT .....</b>	<b>4</b>
1.1. CLIENT INFORMATION .....	4
1.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	4
1.3. EUT'S TECHNICAL SPECIFICATIONS.....	5
1.4. LIST OF EUT'S PORTS .....	5
1.5. ANCILLARY EQUIPMENT.....	5
<b>EXHIBIT 2. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS.....</b>	<b>6</b>
2.1. CLIMATE TEST CONDITIONS.....	6
2.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS .....	6
<b>EXHIBIT 3. SUMMARY OF TEST RESULTS.....</b>	<b>7</b>
3.1. LOCATION OF TESTS .....	7
3.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS .....	7
3.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES .....	7
<b>EXHIBIT 4. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS .....</b>	<b>8</b>
4.1. TEST PROCEDURES.....	8
4.2. MEASUREMENT UNCERTAINTIES .....	8
4.3. MEASUREMENT EQUIPMENT USED:.....	8
4.4. POWERLINE CONDUCTED EMISSIONS @ FCC PART 15, SUBPARTS B & C, PARA.15.107(A) & 15.207 ..	9
4.4.1. <i>Limits</i> .....	9
4.4.2. <i>Method of Measurements</i> .....	9
4.4.3. <i>Test Equipment List</i> .....	9
4.4.4. <i>Photographs of Test Setup</i> .....	9
4.4.5. <i>Test DATA</i> .....	10
4.5. TRANSMITTER SPURIOUS EMISSIONS (RADIATED @ 3 METERS), FCC CFR 47, PARA. 15.209 & 15.205 ..	15
4.5.1. <i>Limits</i> .....	15
4.5.2. <i>Method of Measurements</i> .....	16
4.5.3. <i>Test Equipment List</i> .....	16
4.5.4. <i>Photographs of Test Setup</i> .....	16
4.5.5. <i>Test Data</i> .....	17
4.6. 20 DB OCCUPIED BANDWIDTH @ FCC 15.215(c) .....	18
4.6.1. <i>Limits</i> .....	18
4.6.2. <i>Method of Measurements</i> .....	18
4.6.3. <i>Test Equipment List</i> .....	18
4.6.4. <i>Test Data</i> .....	18
<b>EXHIBIT 5. MEASUREMENT UNCERTAINTY .....</b>	<b>19</b>
5.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY.....	19
5.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY .....	20

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

<b>Reference:</b>	FCC Part 15, Subpart C, Section 15.209
<b>Title</b>	Telecommunication - Code of Federal Regulations, CFR 47, Part 15
<b>Purpose of Test:</b>	To gain FCC Certification Authorization for Low Power Transmitters operating in the Frequency Band 24.2 - 25.2 GHz .
<b>Test Procedures</b>	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
<b>Environmental Classification:</b>	Commercial, light industry & heavy industry

### 1.2. RELATED SUBMITAL(S)/GRANT(S)

None

### 1.3. NORMATIVE REFERENCES

Publication	YEAR	Title
FCC CFR Parts 0-19	2005	Code of Federal Regulations – Telecommunication
ANSI C63.4	2004	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz
CISPR 22 +A1 EN 55022	2003-04-10 2004-10-14 2003	Limits and Methods of Measurements of Radio Disturbance Characteristics of Information Technology Equipment
CISPR 16-1-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 1-1: Measuring Apparatus
CISPR 16-2-1	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-1: Conducted disturbance measurement
CISPR 16-2-3	2003	Specification for radio disturbance and immunity measuring apparatus and methods. Part 2-3: Radiated disturbance measurement

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 1. PERFORMANCE ASSESSMENT

### 1.1. CLIENT INFORMATION

<b>APPLICANT:</b>	
<b>Name:</b>	Siemens Milltronics Process Instruments Inc.
<b>Address:</b>	1954 Technology Drive, P.O. Box 4225 Peterborough, Ontario Canada, K9L 7B1
<b>Contact Person:</b>	Mr. Enzo De Simone Phone #: 705 740 7009 Email Address: enzo.desimone@siemens.com

<b>MANUFACTURER:</b>	
<b>Name:</b>	Siemens Milltronics Process Instruments Inc.
<b>Address:</b>	1954 Technology Drive, P.O. Box 4225 Peterborough, Ontario Canada, K9L 7B1
<b>Contact Person:</b>	Mr. Enzo De Simone Phone #: 705 740 7009 Email Address: enzo.desimone@siemens.com

### 1.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

<b>Brand Name</b>	Siemens Milltronics Process Instruments Inc.
<b>Product Name</b>	SITRANS LR 460
<b>Model Name or Number</b>	7ML5426
<b>Serial Number</b>	
<b>Type of Equipment</b>	Tank Level Probing Radar (TLPR)
<b>Input Power Supply Type</b>	AC: 85 V – 265 V (47 Hz – 63 Hz) or DC: 20.4 V – 30.0 V
<b>Primary User Functions of EUT:</b>	Tank Level Probing Radar (fixed use in metal or concrete tanks)

---

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

### 1.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
<b>Equipment Type: Tank level Probing Radar</b>	Base station (fixed use in metal or concrete tanks)
<b>Intended Operating Environment:</b>	Commercial, light industry & heavy industry
<b>Power Supply Requirement:</b>	AC: 85 V – 265 V (47 Hz – 63 Hz) or DC: 20.4 V – 30.0 V
<b>RF Output Power Rating:</b>	No RF signal shall be outside of the metal or concrete tank
<b>Operating Frequency Range:</b>	24.2 GHz – 25.2 GHz (Centre Frequency: 24.7 GHz)
<b>Modulation Types (please describe all types of modulation)</b>	Interrupted FMCW radar operation; (On time: 82.5 ms RF sweep time, sweep interval: variable between 0.15 s and 10 s )
<b>Duty Cycle</b>	0.8% to 35.4%
<b>Modulation Designation:</b>	1G04F3N
<b>20 dB Occupied Bandwidth</b>	1.038 GHz
<b>Antennas:</b>	Flanged process connection (2", 3", 4" or 6" flange) with 2", 3" or 4" horn antenna with 100 mm, 200mm, 500 mm and 1000 mm waveguide extension options: <ul style="list-style-type: none"> <li>• 2" horn antenna gain: 18.1 dBi</li> <li>• 3" horn antenna gain: 21.3 dBi</li> <li>• 4" horn antenna gain: 22.7 dBi</li> </ul>

RECEIVER	
<b>Operating Frequency Range:</b>	24.2 GHz – 25.2 GHz

### 1.4. LIST OF EUT'S PORTS

Index Number	Parts Description	Parts Number/ Model Number	Serial Number	FCC/IC/CE Compliance (FCC, IC & CE)
1	Flanged process connection (2", 3", 4" or 6" flange) with 2", 3" or 4" horn antenna with 100 mm, 200mm, 500 mm and 1000 mm waveguide extension options	N/A	N/A	N/A

### 1.5. ANCILLARY EQUIPMENT

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)	Is cable length restricted to be < 3 meters?
1	Power: AC: 85 V – 265 V (47 Hz – 63 Hz) or DC: 20.4 V – 30.0 V	1	Connector terminal block	Non-shielded cable	no
2	Level: HART or Profibus	1	Connector terminal block	Non-shielded cable	no

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 2. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 2.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

Temperature:	21°C
Humidity:	51%
Pressure:	102 kPa
Power input source:	AC: 85 V – 265 V (47 Hz – 63 Hz) or DC: 20.4 V – 30.0 V

### 2.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TESTS

**SITRANS LR 460** is a Frequency Modulated Continuous Wave (FMCW) radar device. It is used for industrial level monitoring of liquids and solids in a “continuous unmonitored operation”. It operates by transmitting microwave signals from the antenna to the surface of the measuring material and the frequency of these microwave signals is continuously modulated. A receiver registers the reflection from the surface of material and links it with the simultaneously transmitted signal, the difference between the received and transmitted frequency is then analyzed and calculated to determine the distance or level of material



## EXHIBIT 3. SUMMARY OF TEST RESULTS

### 3.1. LOCATION OF TESTS

- Powerline Conducted Emissions were performed in UltraTech's shielded room, 16'(L) by 12'(W) by 12'(H).
- Test Configuration #1 – Metal tank: Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site has been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049-1). Last Date of Site Calibration: June. 20, 2005.
- Test Configuration #2 – Concrete tank: Radiated Emissions were performed at St. Marry's Cement plant located in Ontario, Canada

### 3.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC PARAGRAPH.	TEST REQUIREMENTS	COMPLIANCE (YES/NO)
15.203	Antenna Requirement	Yes. Permanently attached antenna.
15.209 & 15.205	Transmitter Radiated Emissions - Fundamental, Harmonic and Spurious	Yes
15.115(c)	20 dB Bandwidth	Yes
15.107(a) & 15.207(a)	Power Line Conducted Emissions Measurements (Transmit & Receive)	Yes
The digital circuit portion of the EUT has been tested and verified to comply with FCC Part 15, Subpart B, Class B Digital Devices, the associated Radio Receiver operating in 24.2 - 25.2 GHz is exempted from FCCs authorization . The engineering test report can be provided upon FCC requests.		

### 3.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## **EXHIBIT 4. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS**

### **4.1. TEST PROCEDURES**

This section contains test results only. Details of test methods and procedures can be found in ANSI C63.4 and ULTR-P001-2004.

### **4.2. MEASUREMENT UNCERTAINTIES**

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document LAB 34 with a confidence level of 95%. Please refer to Exhibit 5 for Measurement Uncertainties.

### **4.3. MEASUREMENT EQUIPMENT USED:**

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1.

---

#### **ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- *All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)*

#### 4.4. POWERLINE CONDUCTED EMISSIONS @ FCC PART 15, SUBPARTS B & C, PARA.15.107(A) & 15.207

##### 4.4.1. Limits

The equipment shall meet the limits of the following table:

Test Frequency Range (MHz)	CLASS B LIMITS		Measuring Bandwidth
	Quasi-Peak (dB $\mu$ V)	Average* (dB $\mu$ V)	
0.15 to 0.5	66 to 56*	56 to 46*	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average
0.5 to 5	56	46	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average
5 to 30	60	50	RBW = 9 kHz VBW $\geq$ 9 kHz for QP VBW = 1 Hz for Average

\* Decreasing linearly with logarithm of frequency

##### 4.4.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4 for measurement methods

##### 4.4.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
EMI Receiver System/Spectrum Analyzer with built-in Amplifier	Hewlett Packard	HP 8546A	3520A00248	9KHz-5.6GHz, 50 Ohms
Transient Limiter	Hewlett Packard	11947A	310701998	9 kHz – 200 MHz 10 dB attenuation
L.I.S.N.	EMCO	3825/2	89071531	9 kHz – 200 MHz 50 Ohms / 50 $\mu$ H
12'x16'x12' RF Shielded Chamber	RF Shielding	N/A	N/A	N/A

##### 4.4.4. Photographs of Test Setup

Refer to the Photographs #1 & 2 in Annex 1 for setup and arrangement of equipment under tests and its ancillary equipment.

4.4.5. Test DATA

- Test Sample: SITRANS 460, Model 7ML5426 with 4" horn antenna (maximum gain: 22.7 dBi)

**Test Configuration #1: LR 460 with AC 120V 60 Hz input voltage**

The emissions were scanned from 150 kHz to 30 MHz at AC Mains Ports via a LISN, and all emissions less than 20 dB below the limits were recorded. Please refer to Plots #1 and #2 for details of test data.

FREQUENCY (MHz)	RF LEVEL (dBuV)	RECEIVER DETECTOR (P/QP/AVG)	QP LIMIT (dBuV)	AVG LIMIT (dBuV)	MARGIN (dB)	PASS/ FAIL	LINE TESTED (L1/L2)
0.15	56.0	QP	65.9	55.9	-9.9	PASS	L1
0.15	30.8	AVG	65.9	55.9	-25.1	PASS	L1
0.16	55.0	QP	65.5	55.5	-10.5	PASS	L1
0.16	28.4	AVG	65.5	55.5	-27.1	PASS	L1
0.15	56.3	QP	65.8	55.8	<b>-9.5</b>	PASS	L2
0.15	31.4	AVG	65.8	55.8	-24.4	PASS	L2
0.17	53.9	QP	65.0	55.0	-11.1	PASS	L2
0.17	26.7	AVG	65.0	55.0	-28.3	PASS	L2

**Test Configuration #2: LR 460 with DC 24V input voltage**

The emissions were scanned from 150 kHz to 30 MHz at DC Input Ports via a LISN, and all emissions less than 30 dB below the limits were recorded. Please refer to Plots #3 and #4 for details of test data

FREQUENCY (MHz)	RF LEVEL (dBuV)	RECEIVER DETECTOR (P/QP/AVG)	QP LIMIT (dBuV)	AVG LIMIT (dBuV)	MARGIN (dB)	PASS/ FAIL	LINE TESTED (L1/L2)
0.19	36.9	QP	64.2	54.2	-27.3	PASS	L1
0.19	35.6	AVG	64.2	54.2	-18.6	PASS	L1
0.46	33.6	QP	56.7	46.7	-23.1	PASS	L1
0.46	31.4	AVG	56.7	46.7	-15.3	PASS	L1
8.77	37.6	QP	60.0	50.0	-22.4	PASS	L1
8.77	34.5	AVG	60.0	50.0	-15.5	PASS	L1
0.19	37.3	QP	64.2	54.2	-26.9	PASS	L2
0.19	35.9	AVG	64.2	54.2	-18.3	PASS	L2
0.28	35.3	QP	60.8	50.8	-25.5	PASS	L2
0.28	31.9	AVG	60.8	50.8	-18.9	PASS	L2
8.77	36.9	QP	60.0	50.0	-23.1	PASS	L2
8.77	38.5	AVG	60.0	50.0	<b>-11.5</b>	PASS	L2

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)


<b>UltraTech Group of Labs</b>	
Applicant:	Siemens Milltronic Inc.
Product:	Sitrans LR 460 Profibus AC
Serial #:	DP1-36

<b>Plot #1: AC POWER LINE CONDUCTED EMISSIONS MEASUREMENT PLOT</b>			
Detector: <input checked="" type="checkbox"/> PEAK <input type="checkbox"/> QUASI-PEAK <input type="checkbox"/> AVERAGE		Temp: 23 °C	Humidity: %
Line Tested: 1	Line Voltage: 120 V, 60Hz	Test Tech: Toan Truong	Test Date: Nov. 21, 2005
Standard: FCC15B			

177

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	QPΔL1
1	0.151900	62.7	56.0	30.8	-9.9
2	0.159638	61.3	55.0	28.4	-10.5

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 160 kHz  
 31.36 dB $\mu$ V

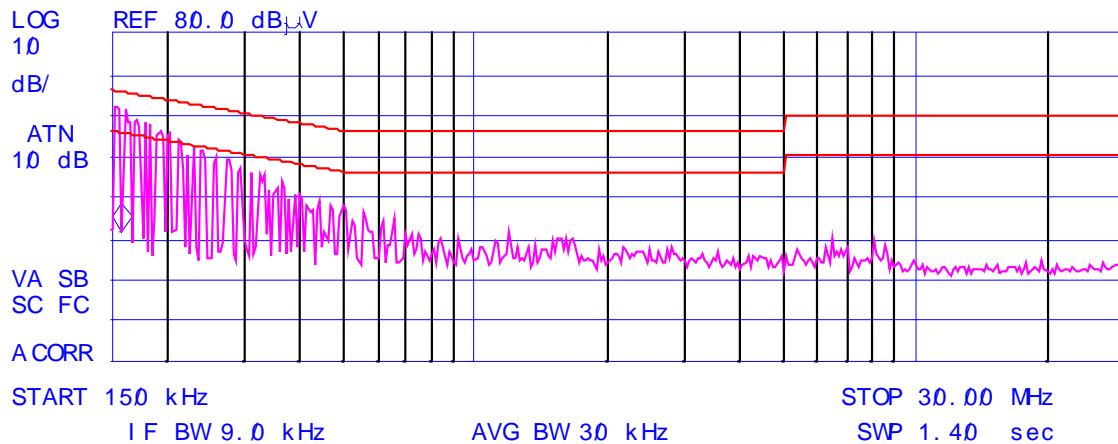

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: vic@ultratech-labs.com, Website: http://www.ultratech-labs.com

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

<b>UltraTech Group of Labs</b>	
Applicant:	Siemens Milltronic Inc.
Product:	Sitrans LR 460 Profibus AC
Serial #:	DP1-36


<b>Plot # 2: AC POWER LINE CONDUCTED EMISSIONS MEASUREMENT PLOT</b>			
Detector: <input checked="" type="checkbox"/> PEAK <input type="checkbox"/> QUASI-PEAK <input type="checkbox"/> AVERAGE		Temp: 23 °C	Humidity: %
Line Tested: 2	Line Voltage: 120 V, 60Hz	Test Tech: Toan Truong	Test Date: Nov. 21, 2005
Standard: FCC15B			

177

Signal	Fr eq (MHz)	PK Amp	QP Amp	AV Amp	QPΔL1
1	0.154570	62.8	56.3	31.4	-9.4
2	0.169395	60.5	53.9	26.7	-11.2

START  
150 kHz

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 170 kHz  
 29.54 dB $\mu$ V

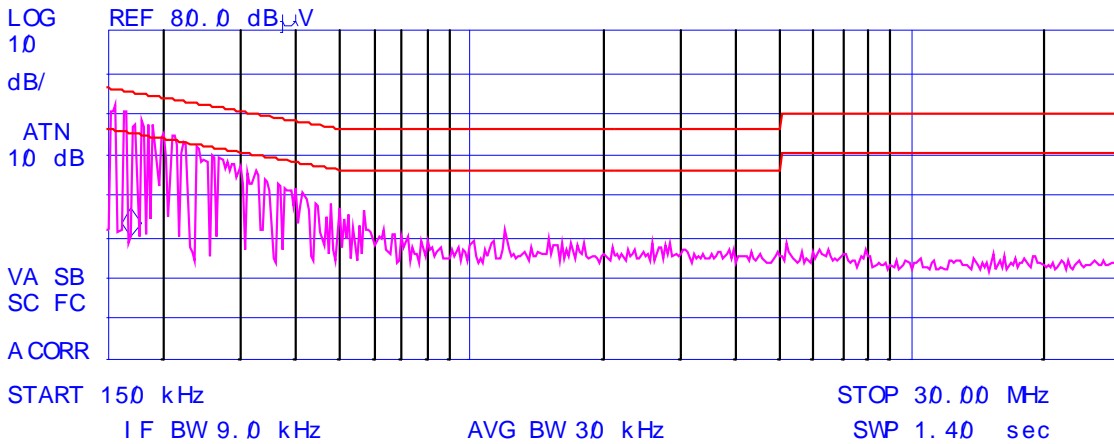


<b>UltraTech Group of Labs</b>	
Applicant:	Siemens Milltronic Inc.
Product:	SITRANS LR 460 Profibus DC
Serial #:	DP1-36

<b>Plot #3: DC POWER LINE CONDUCTED EMISSIONS MEASUREMENT PLOT</b>			
Detector: <input checked="" type="checkbox"/> PEAK <input checked="" type="checkbox"/> QUASI-PEAK <input type="checkbox"/> AVERAGE		Temp: 23 °C	Humidity: 20%
Line Tested: 1	Line Voltage: 24 Vdc	Test Tech: Quan	Test Date: Nov. 22, 2005
Standard: FCC15B			

h/p

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	AV $\Delta$ L2
1	0.186240	39.0	36.9	35.6	-18.6
2	0.462070	36.6	33.6	31.4	-15.4
3	8.768400	41.2	37.6	34.5	-15.5

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 8.82 MHz  
 38.01 dB $\mu$ V

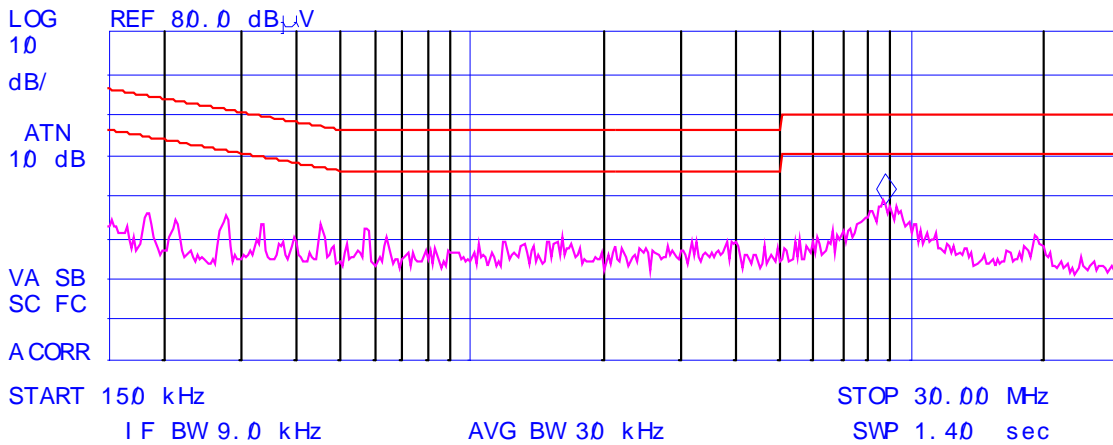


<b>UltraTech Group of Labs</b>	
Applicant:	Siemens Milltronic Inc.
Product:	SITRANS LR 460 Profibus DC
Serial #:	DP1-36

<b>Plot #4: DC POWER LINE CONDUCTED EMISSIONS MEASUREMENT PLOT</b>			
Detector: <input checked="" type="checkbox"/> PEAK <input checked="" type="checkbox"/> QUASI-PEAK <input type="checkbox"/> AVERAGE		Temp: 23 °C	Humidity: 20%
Line Tested: 2	Line Voltage: 24 Vdc	Test Tech: Quan	Test Date: Nov. 22, 2005
Standard: FCC15B			

170

Signal	Freq (MHz)	PK Amp	QP Amp	AV Amp	AV $\Delta$ L2
1	0.187150	39.8	37.3	35.9	-18.3
2	0.279305	37.8	35.3	31.9	-19.0
3	8.771375	40.4	36.9	38.5	-11.6

ACTV DET: PEAK  
 MEAS DET: PEAK QP AVG  
 MKR 8.82 MHz  
 36.79 dB $\mu$ V

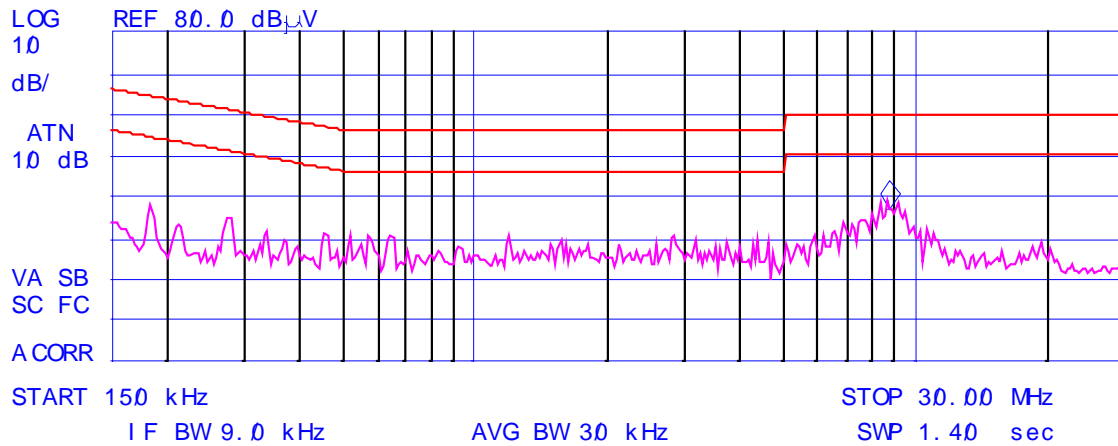



**4.5. TRANSMITTER SPURIOUS EMISSIONS (RADIATED @ 3 METERS), FCC CFR 47, PARA. 15.209 & 15.205**

**4.5.1. Limits**

The fundamental frequency shall not fall within any restricted frequency band specified in 15.205  
 All other emissions shall not exceed the general radiated emission limits specified in @ 15.209(a).

**FCC CFR 47, Part 15, Subpart C, Para. 15.205(a) - Restricted Frequency Bands**

MHz	MHz	MHz	GHz
0.090 - 0.110	162.0125 - 167.17	2310 - 2390	9.3 - 9.5
0.49 - 0.51	167.72 - 173.2	2483.5 - 2500	10.6 - 12.7
2.1735 - 2.1905	240 - 285	2655 - 2900	13.25 - 13.4
8.362 - 8.366	322 - 335.4	3260 - 3267	14.47 - 14.5
13.36 - 13.41	399.9 - 410	3332 - 3339	14.35 - 16.2
25.5 - 25.67	608 - 614	3345.8 - 3358	17.7 - 21.4
37.5 - 38.25	960 - 1240	3600 - 4400	22.01 - 23.12
73 - 75.4	1300 - 1427	4500 - 5250	23.6 - 24.0
108 - 121.94	1435 - 1626.5	5350 - 5460	31.2 - 31.8
123 - 138	1660 - 1710	7250 - 7750	36.43 - 36.5
149.9 - 150.05	1718.8 - 1722.2	8025 - 8500	Above 38.6
156.7 - 156.9	2200 - 2300	9000 - 9200	

**FCC CFR 47, Part 15, Subpart C, Para. 15.209(a)  
 -- Field Strength Limits within Restricted Frequency Bands --**

FREQUENCY (MHz)	FIELD STRENGTH LIMITS (microvolts/m)	DISTANCE (Meters)
0.009 - 0.490	2,400 / F (KHz)	300
0.490 - 1.705	24,000 / F (KHz)	30
1.705 - 30.0	30	30
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

#### 4.5.2. Method of Measurements

Refer to Ultratech Test Procedures, File # ULTR P001-2004 and ANSI C63.4 for measurement methods

The following measurement procedures were also applied:

- Applies to harmonics/spurious that fall in the restricted bands listed in Section 15.205. the maximum permitted average field strength is listed in Section 15.209. A Pre-Amp and highpass filter are used for this measurement.
- For  $9 \text{ kHz} \leq \text{frequencies} \leq 150 \text{ kHz}$ : RBW = 1 KHz, VBW  $\geq$  1 KHz, SWEEP=AUTO.
- For  $150 \text{ MHz} \leq \text{frequencies} \leq 30 \text{ MHz}$ : RBW = 10 KHz, VBW  $\geq$  10 KHz, SWEEP=AUTO.
- For  $30 \text{ MHz} \leq \text{frequencies} \leq 1 \text{ GHz}$ : RBW = 100 KHz, VBW  $\geq$  100 KHz, SWEEP=AUTO.
- For frequencies  $\geq 1 \text{ GHz}$ : RBW = 1 MHz, VBW = 1 MHz (Peak) & VBW = 10 Hz (Average), SWEEP=AUTO.
- If the emission is pulsed, modified the unit for continuous operation, then use the settings above for measurements, then correct the reading by subtracting the peak-average correction factor derived from the appropriate duty cycle calculation. See Section 15.35(b) and (c).

#### 4.5.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schawrz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer
Microwave Amplifier	Hewlett Packard	HP 83051A	3332A00471	1 GHz to 50 GHz
Biconilog Antenna	EMCO	3143	1029	20 MHz to 2 GHz
Horn Antenna	EMCO	3155	9701-5061	1 GHz – 18 GHz
Horn Antenna	EMCO	3160-09	1007	18 GHz – 26.5 GHz
Horn Antenna	EMCO	3160-10	1001	26.5 GHz – 40 GHz
Waveguide	CMT	RA42-K_F-5B-C	910074-004	18 GHz – 26.5 GHz
Waveguide	CMT	RA28-K_F-4B-C	920311-001	26.5 GHz – 40 GHz
Horn Antenna & Mixer	OML	WR-19	U30625-1	40 –60 GHz
Horn Antenna & Mixer	OML	E-Band	E30625-1	60 – 90 GHz
Horn Antenna & Mixer	OML	WR-08	F30625-1	90 –140 GHz

#### 4.5.4. Photographs of Test Setup

Refer to the Photographs #3, #4 & #5 in Annex 1 for setup and arrangement of equipment under tests and its ancillary equipment.

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

**4.5.5. Test Data**

- **Test Sample: SITRANS 460, Model 7ML5426 with 4" horn antenna (maximum gain: 22.7 dBi)**

**Test Configuration #1:** The LR 460 was mounted on top of a Metal Tank and secured to this metal tank using metal screws and nuts as instructed by the manufacturer.

FREQUENCY	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT MARGIN (dB)	PASS/ FAIL	Distance (m)
30 – 1000 MHz	Note (1)	Note (1)	Note (1)	Note (1)	Note (1)	PASS	3
1 to 100 GHz	Note (2)	Note (2)	H and V	54.00	N/A	PASS	3, 1 & 0.5

**Notes:**

1. The PEAK emissions were scanned from 30-1000 MHz at 3 m distance. No significant emissions were found from the transmitter. Refer to report File # MIL-348-FCC15 and MIL-349-FCC15 for test reports in compliance with FCC Part 15, Subpart B, Class B with AC and DC input voltages respectively.
2. The PEAK emissions were scanned from 1 GHz to 100 GHz at 3, 1 and 0.5 meters. No rf signal was found when the E-Field was search at the separation distance of 3m, 1m and 0.5 meters from the device under test and receiving antenna.
3. Refer to Photographs #3 and #4 for test setup in Semi-Anechoic Chamber

**Test Configuration #2:** The LR 460 was mounted on top of the Cement Concrete Tank located in St Mary Cement Plant in Ontario, Canada. It was secured to this concrete tank metal cover using metal screws and nuts as instructed by the manufacturer.

FREQUENCY	RF PEAK LEVEL (dBuV/m)	RF AVG LEVEL (dBuV/m)	ANTENNA PLANE (H/V)	LIMIT 15.209 (dBuV/m)	LIMIT MARGIN (dB)	PASS/ FAIL	Distance (m)
30 – 1000 MHz	Note (1)	Note (1)	Note (1)	Note (1)	Note (1)	PASS	3
1 to 100 GHz	Note (2)	Note (2)	H and V	54.00	N/A	PASS	0.5

**Notes:**

1. The PEAK emissions were scanned from 30-1000 MHz at 3 m distance. No significant emissions were found from the transmitter. Refer to report File # MIL-348-FCC15 and MIL-349-FCC15 for test reports in compliance with FCC Part 15, Subpart B, Class B with AC and DC input voltages respectively.
2. The PEAK emissions were scanned from 1 GHz to 100 GHz at 0.5 meters. No rf signal was found when the E-Field was search at the separation distance of 3m, 1m and 0.5 meters from the device under test and receiving antenna.
3. Refer to Photograph #5 for test setup at St. Mary Cement Plant

**ULTRATECH GROUP OF LABS**

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## 4.6. 20 DB OCCUPIED BANDWIDTH @ FCC 15.215(C)

### 4.6.1. Limits

The rf spectrum shall not stay in the restricted band specified in FCC 15.205

### 4.6.2. Method of Measurements

Refer to Exhibit 8, Sec. 8.4 & ANSI C63.4

The transmitter output was loosely coupled to the spectrum analyzer through a receiving antenna and the bandwidth of the fundamental frequency was measured with the spectrum analyzer with the resolution bandwidth of the spectrum analyzer set per ANSI 63.4, Sec. 13.1.6.2


### 4.6.3. Test Equipment List

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range
Spectrum Analyzer/ EMI Receiver	Rohde & Schawrz	FSEK20/B4/B21	834157/005	9 kHz – 40 GHz with external mixer

### 4.6.4. Test Data

- Test Sample: SITRANS 460, Model 7ML5426 with 4" horn antenna (maximum gain: 22.7 dBi)

CHANNEL FREQUENCY (GHz)	20 dB BANDWIDTH (GHz)	MAXIMUM LIMIT (kHz)	PASS/FAIL
24.7	1.038	N/A	N/A

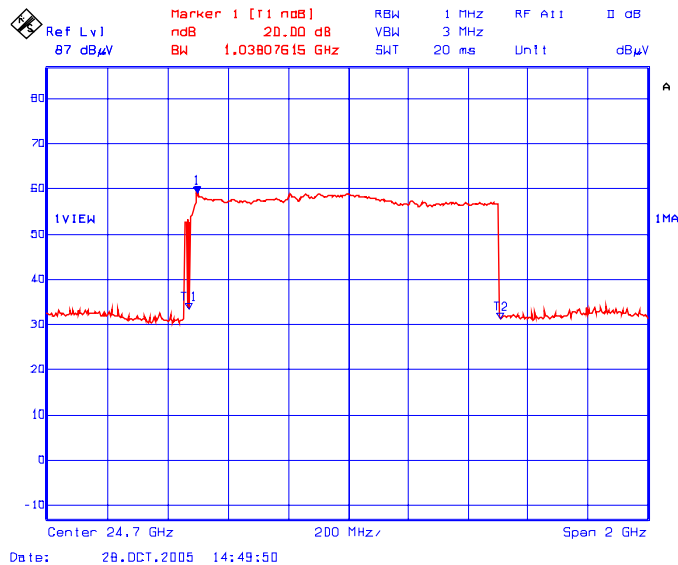

## ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
 Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706  
 Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## EXHIBIT 5. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and LAB 34

### 5.1. LINE CONDUCTED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Line Conducted)	PROBABILITY DISTRIBUTION	UNCERTAINTY (dB)	
		9-150 kHz	0.15-30 MHz
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
LISN coupling specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Cable and Input Transient Limiter calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
Mismatch: Receiver VRC $\Gamma_1 = 0.03$ LISN VRC $\Gamma_R = 0.8(9 \text{ kHz}) 0.2 (30 \text{ MHz})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	$\pm 0.2$	$\pm 0.3$
System repeatability	Std. deviation	$\pm 0.2$	$\pm 0.05$
Repeatability of EUT	--	--	--
Combined standard uncertainty	Normal	$\pm 1.25$	$\pm 1.30$
Expanded uncertainty U	Normal (k=2)	$\pm 2.50$	$\pm 2.60$

Sample Calculation for Measurement Accuracy in 450 kHz to 30 MHz Band:

$$u_c(y) = \sqrt{\sum_{i=1}^m u_i^2(y)} = \pm \sqrt{(1.5^2 + 1.5^2)/3 + (0.5/2)^2 + (0.05/2)^2 + 0.35^2} = \pm 1.30 \text{ dB}$$

$$U = 2u_c(y) = \pm 2.6 \text{ dB}$$

## 5.2. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY ( $\pm$ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	$\pm 1.0$	$\pm 1.0$
Cable Loss Calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Antenna Directivity	Rectangular	$\pm 0.5$	$\pm 0.5$
Antenna factor variation with height	Rectangular	$\pm 2.0$	$\pm 0.5$
Antenna phase center variation	Rectangular	0.0	$\pm 0.2$
Antenna factor frequency interpolation	Rectangular	$\pm 0.25$	$\pm 0.25$
Measurement distance variation	Rectangular	$\pm 0.6$	$\pm 0.4$
Site imperfections	Rectangular	$\pm 2.0$	$\pm 2.0$
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(\text{Bi}) 0.3 (\text{Lp})$ Uncertainty limits $20\text{Log}(1 \pm \Gamma_1 \Gamma_R)$	U-Shaped	+1.1 -1.25	$\pm 0.5$
System repeatability	Std. Deviation	$\pm 0.5$	$\pm 0.5$
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4

Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: MIL-345FCC15C-FEB1706

Feb. 17, 2006

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)