

# GRAPHICAL SECTION PART 1 FOR RFI TEST REPORT SERIAL NO: RFI/MPTB2/RP43166A

Test Of: Red-M (Communications) Ltd. Smart Wireless Access Server

To: F.C.C. Part 15 Subpart C: 2000 (Intentional Radiators) Section 15.247 (Requested Parts Only)



# RADIO FREQUENCY INVESTIGATION LTD.

Graphical Section Part 1 S.No: RFI/MPTB2/RP43166A

# **EMC Department**

Test Of: Red-M (Communications) Ltd.

**Smart Wireless Access Server** 

To: F.C.C. Part 15 Subpart C: 1998 (Intentional Radiators) Section 15.247

(Requested Parts Only)

# **Graphical Test Results**

Graph Reference	Title
Number	
GPH\41366JD01\001	Radiated Emissions, FCC Part 15.209, Bottom Channel (30 MHz to 1000 MHz)
GPH\41366JD01\002	Radiated Emissions, FCC Part 15.209, Middle Channel (30 MHz to 1000 MHz)
GPH\41366JD01\003	Radiated Emissions, FCC Part 15.209, Top Channel (30 MHz to 1000 MHz)
GPH\41366JD01\004	Radiated Emissions, FCC Part 15.209, Hopping Mode (30 MHz to 1000 MHz)
GPH\41366JD01\005	Radiated Emissions, FCC Part 15.209, Receiver Mode (30 MHz to 1000 MHz)
GPH\41366JD01\006	Radiated Emissions, FCC Part 15.209, Receiver Mode (1 GHz to 2 GHz)
GPH\41366JD01\007	Radiated Emissions, FCC Part 15.209, Frequency Hopping Mode (1 GHz to 2 GHz)
GPH\41366JD01\008	Radiated Emissions, FCC Part 15.209, Bottom Channel (1 GHz to 2 GHz)
GPH\41366JD01\009	Radiated Emissions, FCC Part 15.209, Middle Channel (1 GHz to 2 GHz)
GPH\41366JD01\010	Radiated Emissions, FCC Part 15.209, Top Channel (1 GHz to 2 GHz)
GPH\41366JD01\011	Radiated Emissions, FCC Part 15.209, Top Channel (2 GHz to 2.4 GHz)
GPH\41366JD01\012	Radiated Emissions, FCC Part 15.209, Top Channel (2.484 GHz to 4 GHz)
GPH\41366JD01\013	Radiated Emissions, FCC Part 15.209, Middle Channel (2 GHz to 2.4 GHz)
GPH\41366JD01\014	Radiated Emissions, FCC Part 15.209, Middle Channel (2.484 GHz to 4 GHz)
GPH\41366JD01\015	Radiated Emissions, FCC Part 15.209, Bottom Channel (2 GHz to 2.4 GHz)
GPH\41366JD01\016	Radiated Emissions, FCC Part 15.209, Bottom Channel (2.484 GHz to 4 GHz)

# RADIO FREQUENCY INVESTIGATION LTD.

Graphical Section Part 1 S.No: RFI/MPTB2/RP43166A

# **EMC** Department

Test Of: Red-M (Communications) Ltd.

**Smart Wireless Access Server** 

To: F.C.C. Part 15 Subpart C: 1998 (Intentional Radiators) Section 15.247


(Requested Parts Only)

# **Graphical Test Results (continued)**

Graph Reference Number	Title
GPH\41366JD01\017	Radiated Emissions, FCC Part 15.209, Hopping Mode (2 GHz to 2.4 GHz)
GPH\41366JD01\018	Radiated Emissions, FCC Part 15.209, Hopping Mode (2.484 GHz to 4 GHz)
GPH\41366JD01\019	Radiated Emissions, FCC Part 15.209, Receiver Mode (2 GHz to 2.4 GHz)
GPH\41366JD01\020	Radiated Emissions, FCC Part 15.209, Receiver Mode (2.484 GHz to 4 GHz)

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Bottom Channel)

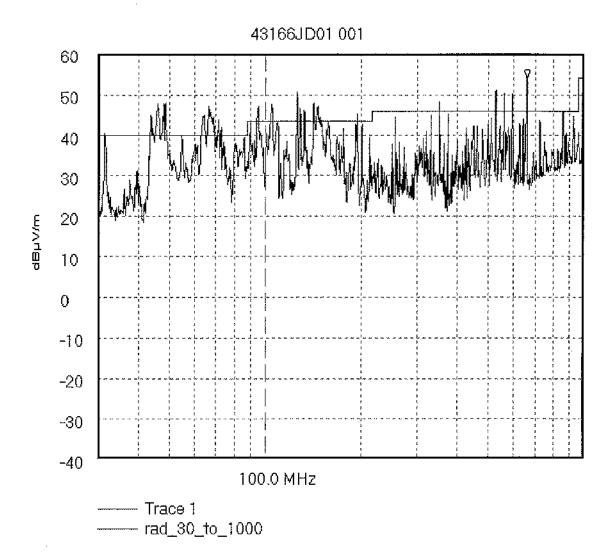


Start 30.0 MHz; Stop 1.0 GHz - Log Scale Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 120.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 380.0 mS

Peak 661,666 MHz, 54,01 dBµV/m

Limit/Mask: rad\_30\_to\_1000; Transducer Factors: A490 19/02/2002 9:50:17 AM

# GPH\43166JD01\002 Radiated Emissions. FCC Part 15.209. PreScan @ 3m. Tested For Red-M. EUT: Smart Wireless Access Server (Middle Channel)

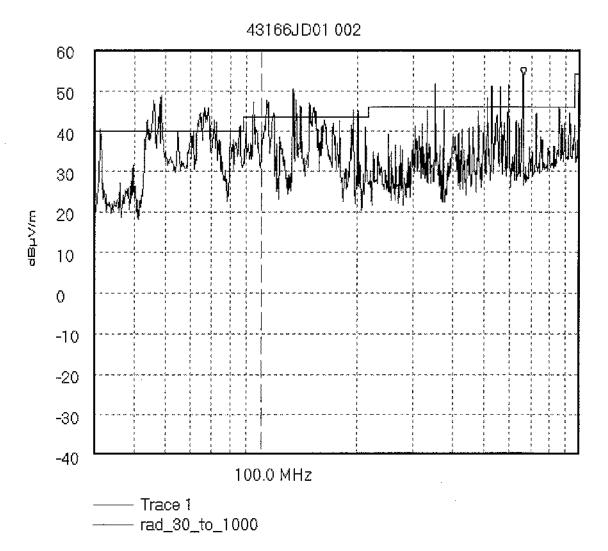


Start 30.0 MHz; Stop 1.0 GHz - Log Scale Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 120.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 80.0 mS

Peak 661.666 MHz, 53.5 dBμV/m Limit/Mask: rad\_30\_to\_1000; Transducer Factors: A490 19/02/2002 10:05:19 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Top Channel)

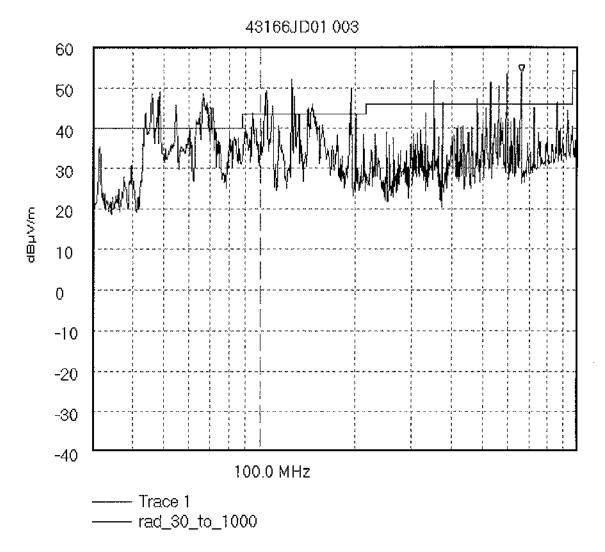

Start 30.0 MHz; Stop 1.0 GHz - Log Scale Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div


RBW 120.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 80.0 mS

Peak 661.666 MHz, 53.53 dBµV/m

Limit/Mask: rad\_30\_to\_1000 Transducer Factors: A490 19/02/2002 10:19:13 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Hopping Mode)

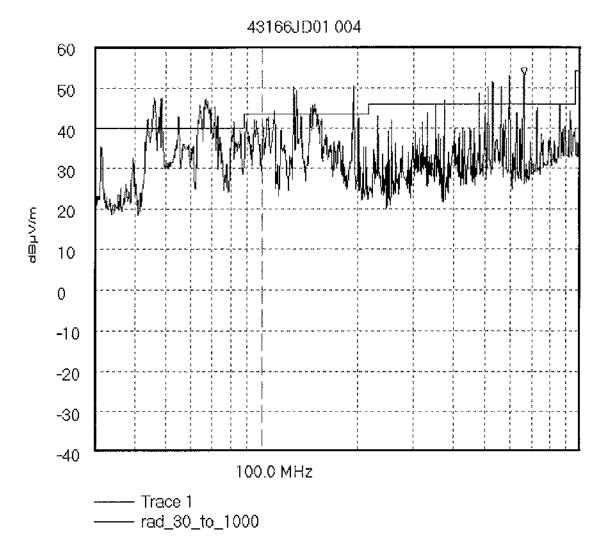


Start 30.0 MHz; Stop 1.0 GHz - Log Scale Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 120.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 380.0 mS

Peak 661.666 MHz, 52.95 dBµV/m Limit/Mask: rad\_30\_to\_1000; Transducer Factors: A490 19/02/2002 10:29:00 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Receiver Mode)

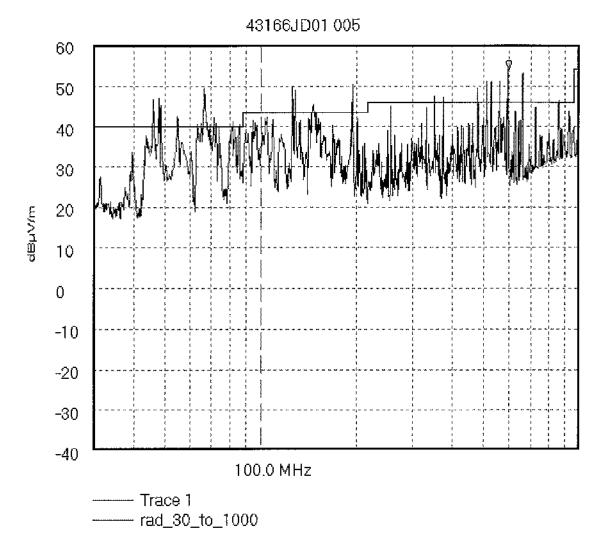

Start 30.0 MHz; Stop 1.0 GHz - Log Scale Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div


RBW 120.0 kHz; VBW 100.0 kHz; Att 0 dB; Swp 80.0 mS

Peak 597.922 MHz, 54.09 dBµV/m

Limit/Mask: rad\_30\_to\_1000; Transducer Factors: A490 19/02/2002 10:37:52 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Receiver Mode)

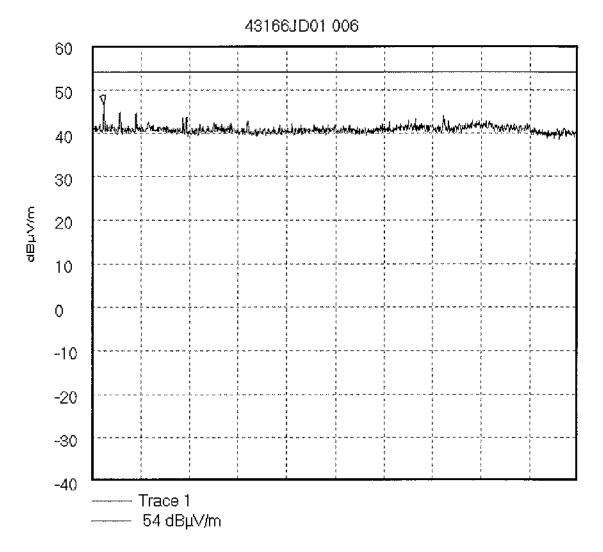

Start 1.0 GHz; Stop 2.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 1.024 GHz, 46.72 dBµV/m

Display Line: 54 dBμV/m;; Limit Test Passed

Transducer Factors: 1 to 2 19/02/2002 11:21:11 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Frequency Hopping Mode)

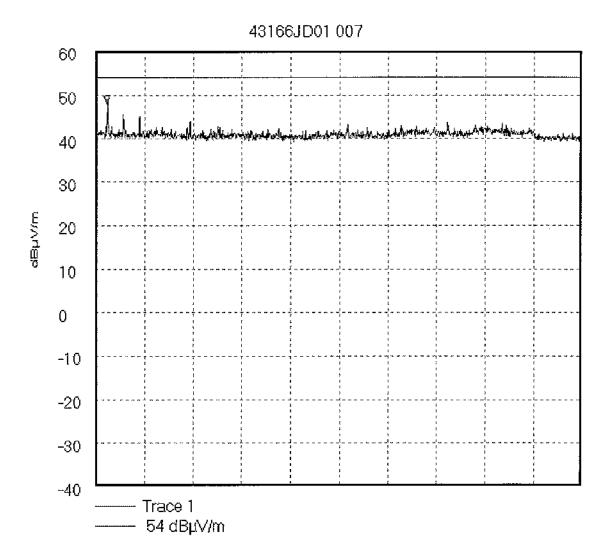

Start 1.0 GHz; Stop 2.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 1.024 GHz, 48.02 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Passed

Transducer Factors: 1 to 2 19/02/2002 11:25:08 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Bottom Channel)

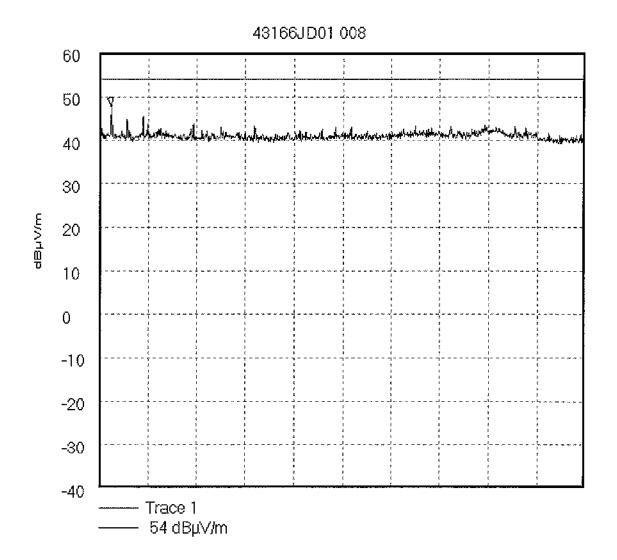

Start 1.0 GHz; Stop 2.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 1.024 GHz, 47.84 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Passed

Transducer Factors: 1 to 2 19/02/2002 11:31:47 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Middle Channel)

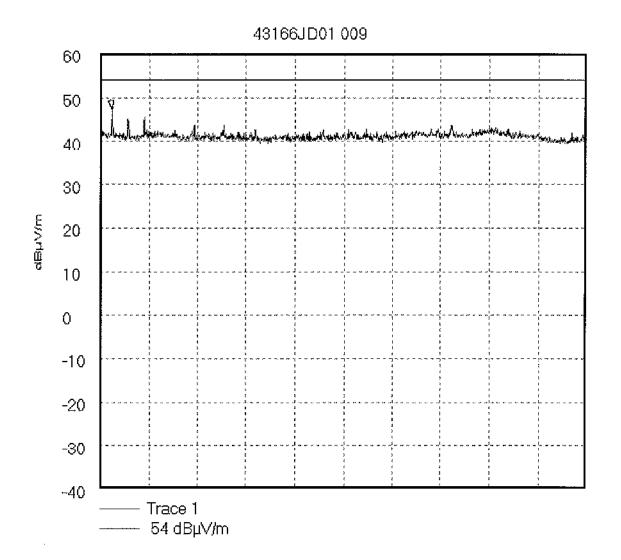

Start 1.0 GHz; Stop 2.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 1.024 GHz, 47.38 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Passed

Transducer Factors: 1 to 2 19/02/2002 11:36:23 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server Top Channel)

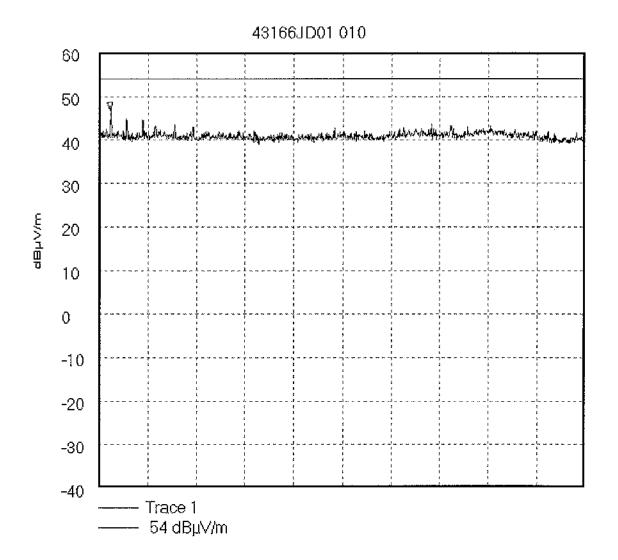

Start 1.0 GHz; Stop 2.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 1.024 GHz, 46.85 dBµV/m

Display Line: 54 dBμV/m;; Limit Test Passed

Transducer Factors: 1 to 2 19/02/2002 11:40:59 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Top Channel)

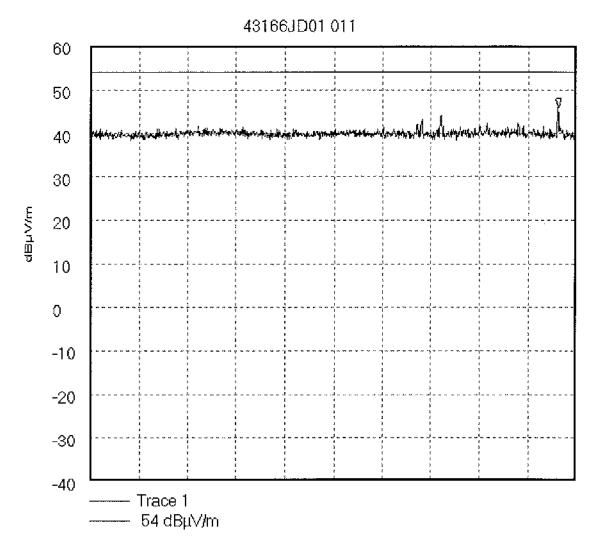

Start 2.0 GHz; Stop 2.4 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 2.385 GHz, 45.99 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Passed

Transducer Factors: 2 to 4 19/02/2002 11:50:22 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Top Channel)

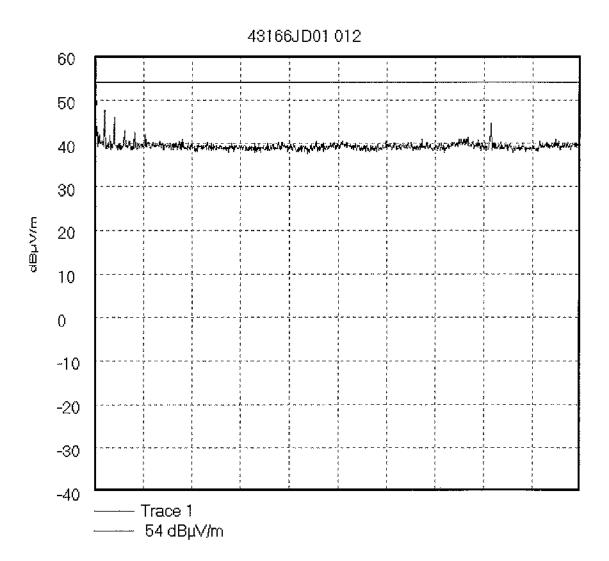

Start 2.484 GHz; Stop 4.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 2.484 GHz, 47.74 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Passed

Transducer Factors: 2 to 4 19/02/2002 11:53:33 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Middle Channel)

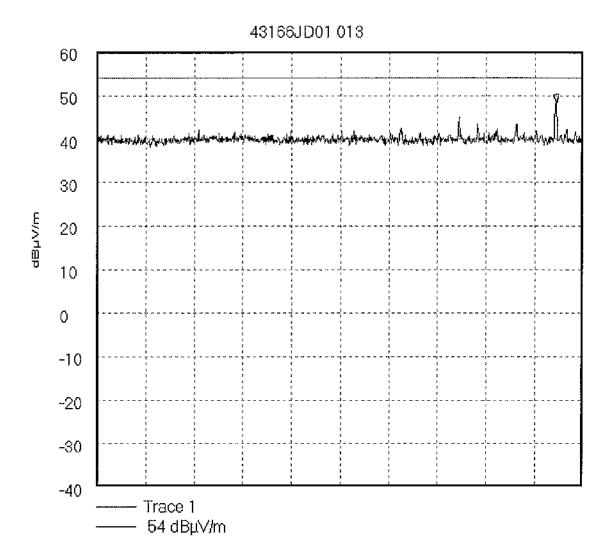

Start 2.0 GHz; Stop 2.4 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000,0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 2.378 GHz, 48.32 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Passed

Transducer Factors: 2 to 4 19/02/2002 11:57:52 AM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Middle Channel)

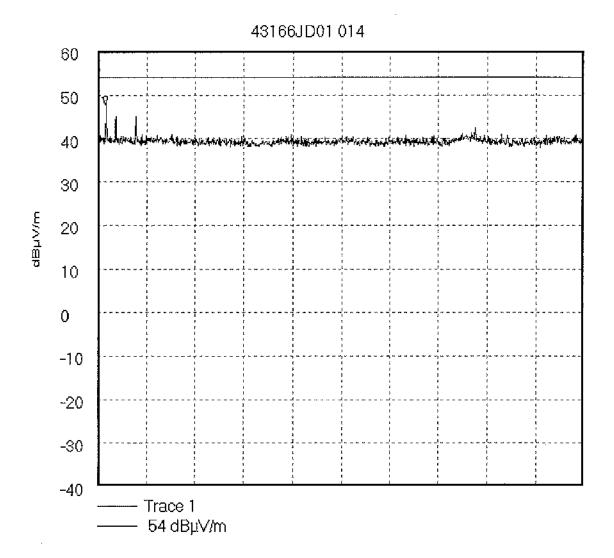

Start 2.484 GHz; Stop 4.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 2.507 GHz, 47.77 dBμV/m

Display Line: 54 dBµV/m;; Limit Test Passed

Transducer Factors: 2 to 4 19/02/2002 12:01:25 PM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Bottom Channel)

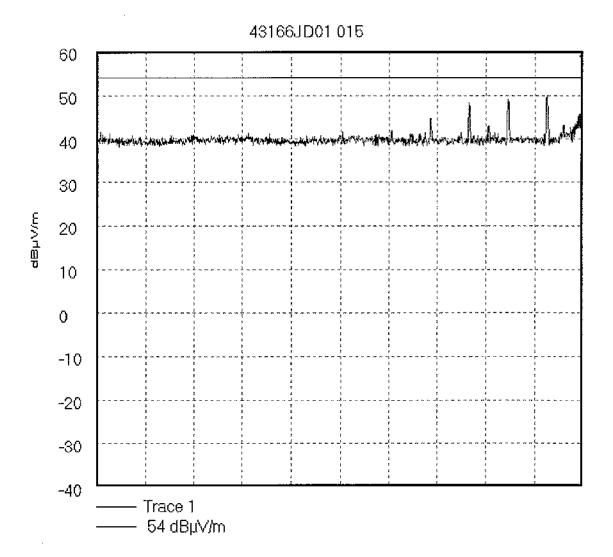

Start 2.0 GHz; Stop 2.4 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div


RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS

Peak 2.4 GHz, 57.26 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Failed

Transducer Factors: 2 to 4 19/02/2002 12:08:32 PM

# GPH\43166JD01\016 Radiated Emissions. FCC Part 15.209. PreScan @ 3m. Tested For Red-M. EUT: Smart Wireless Access Server (Bottom Channel)

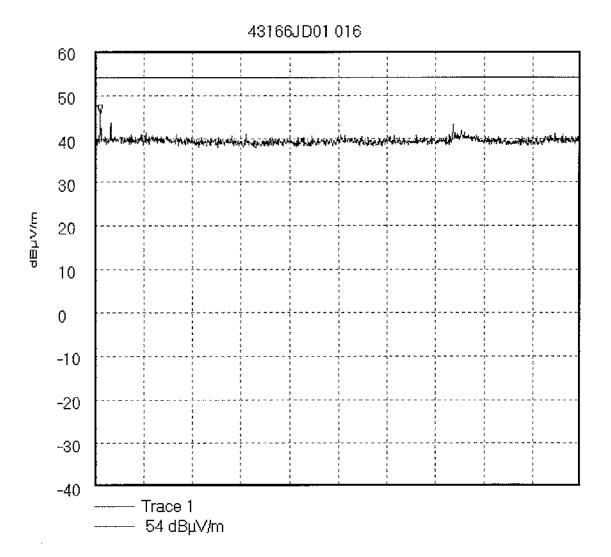

Start 2.484 GHz; Stop 4.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 2.5 GHz, 45.96 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Passed

Transducer Factors: 2 to 4 19/02/2002 12:13:01 PM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Hopping Mode)

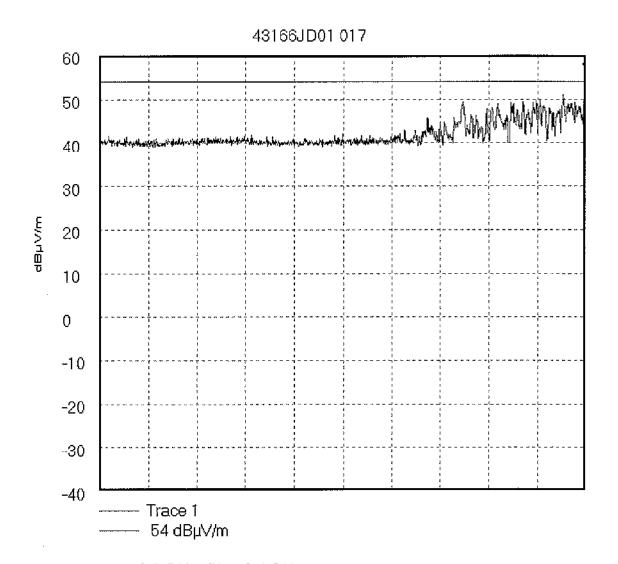

Start 2.0 GHz; Stop 2.4 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 2.4 GHz, 56.32 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Failed

Transducer Factors: 2 to 4 19/02/2002 12:19:14 PM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Hopping Mode)

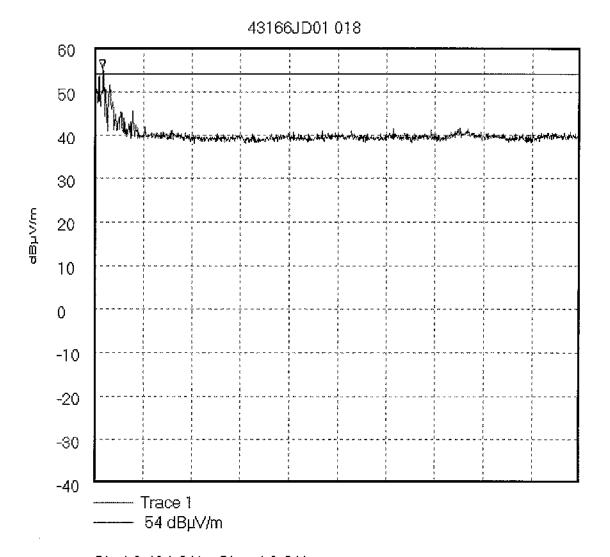

Start 2.484 GHz; Stop 4.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 2.509 GHz, 55.26 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Failed

Transducer Factors: 2 to 4 19/02/2002 12:27:24 PM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Receiver Mode)

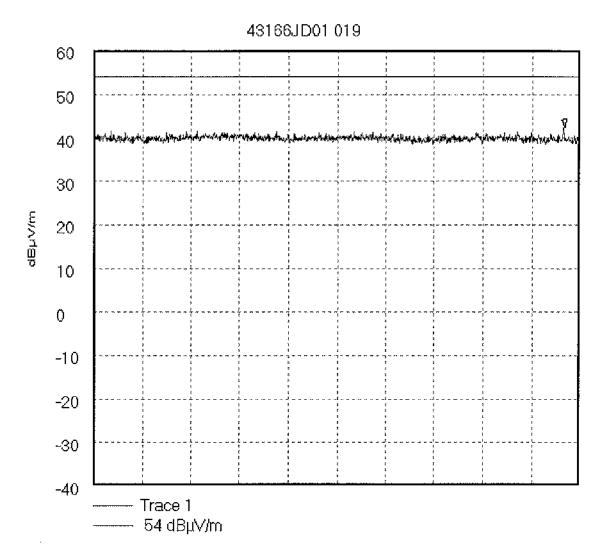

Start 2.0 GHz; Stop 2.4 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS


Peak 2.387 GHz, 42.48 dBµV/m

Display Line: 54 dBµV/m;; Limit Test Passed

Transducer Factors: 2 to 4 19/02/2002 12:31:46 PM

Radiated Emissions. FCC Part 15.209. PreScan @ 3m.

Tested For Red-M. EUT: Smart Wireless Access Server (Receiver Mode)

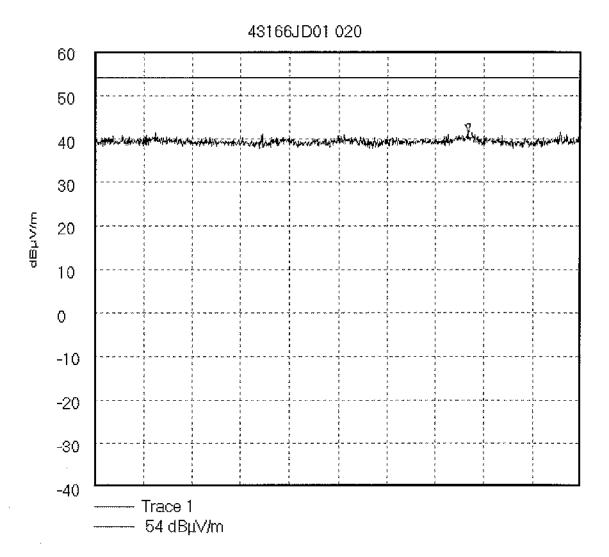

Start 2.484 GHz; Stop 4.0 GHz

Ref 60 dBµV/m; Ref Offset 0.0 dB; 10 dB/div

RBW 1000.0 kHz; VBW 1.0 MHz; Att 0 dB; Swp 20.0 mS

Peak 3.648 GHz, 41.59 dBµV/m

Display Line: 54 dBµV/m; ; Limit Test Passed

Transducer Factors: 2 to 4 19/02/2002 12:84:11 PM