



EMC TEST REPORT FCC 47 CFR Part 15B Industry Canada RSS-Gen Electromagnetic compatibility - Unintentional radiators	
Report Reference No.	G0M-1306-2916-EF01-V01
Testing Laboratory	Eurofins Product Service GmbH
Address	Storkower Str. 38c 15526 Reichenwalde Germany
Accreditation	<div style="text-align: center;">   </div> <p>A2LA Accredited Testing Laboratory, Certificate No.: 1983.01 FCC Filed Test Laboratory, Reg.-No.: 96970 IC OATS Filing assigned code: 3470A</p>
Applicant's name	Marantec
Address	5705 Centerpoint Court 60031 Gurnee USA
Test specification:	
Standard.....	47 CFR Part 15 Subpart B RSS-Gen, Issue 3, 2010-12 ANSI C63.4:2009
Equipment under test (EUT):	
Product description	Wireless Keyless Entry System
Model No.	M13-631
Additional Models	None
Hardware version	99818 V03
Firmware / Software version	Test-Software
	FCC-ID: NKPWK13315 IC: 3126A-M13631
Test result	Passed

Possible test case verdicts:

- not applicable to test object: N/A
- test object does meet the requirement.....: P (Pass)
- test object does not meet the requirement.....: F (Fail)

Testing:

Date of receipt of test item: 2013-06-18
 Date (s) of performance of tests: 2013-07-02
 Compiled by: Antje Bartusch
 Tested by (+ signature).....: Andreas Pflug
 Approved by (+ signature): Jens Zimmermann
 Date of issue: 2013-07-25
 Total number of pages: 19


General remarks:

**The test results presented in this report relate only to the object tested.
 The results contained in this report reflect the results for this particular model and serial number. It is the responsibility of the manufacturer to ensure that all production models meet the intent of the requirements detailed within this report.**

This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory.

Additional comments:

REPORT INDEX

1	EQUIPMENT (TEST ITEM) DESCRIPTION	4
1.1	Photos – Equipment external	5
1.2	Photos – Equipment internal	6
1.3	Photos – Test setup	7
1.4	Supporting Equipment Used During Testing	8
1.5	Operating Modes	9
1.6	Test Equipment Used During Testing	10
1.7	Sample emission level calculation	11
2	RESULT SUMMARY	12
3	TEST CONDITIONS AND RESULTS	13
3.1	Test Conditions and Results – Radiated emissions	13

1 Equipment (Test item) Description

Description	Wireless Keyless Entry System
Model	M13-631
Additional Models	None
Serial number	None
Hardware version	99818 V03
Software / Firmware version	Test-Software
FCC-ID	NKPWK13315
IC	3126A-M13631
Power supply	3 VDC (2 x 1.5V Battery)
AC/DC-Adaptor	None
Manufacturer	ELDAT GmbH Im Gewerbepark 14 15711 Königs Wusterhausen Germany
Highest emission frequency	315 MHz
Device classification	Class B
Equipment type	Tabletop
Number of tested samples	1

1.4 Supporting Equipment Used During Testing

Product Type*	Device	Manufacturer	Model No.	Comments
None				
<p>*Note: Use the following abbreviations:</p> <ul style="list-style-type: none"> AE : Auxiliary/Associated Equipment, or SIM : Simulator (Not Subjected to Test) CABL : Connecting cables 				

1.5 Operating Modes

Mode #	Description
1	Transmitter at maximum power continuously transmitting

1.6 Test Equipment Used During Testing

Radiated emissions					
Description	Manufacturer	Model	Identifier	Cal. Date	Cal. Due
Biconical Antenna	R&S	HK 116	EF00012	2013-02	2016-02
LPD-Antenne	R&S	HL 223	EF00187	2011-02	2014-02
LPD-Antenna	R&S	HL 025	EF00327	2013-02	2016-02
EMI Test Receiver	R&S	ESU8	EF00379	2013-03	2014-03
EMI Test Receiver	R&S	ESCS30	EF00295	2012-08	2013-08

1.7 Sample emission level calculation

The following is a description of terms and a sample calculation, as appears in the radiated emissions data table. The numbers used in the calculation are for example only. There is no direct correlation to the specific data taken for the product described in this document:

Reading:

This is the reading obtained on the spectrum analyzer in dB μ V. Any external preamplifiers used are taken into account through internal analyzer settings.

A.F.:

This is the antenna factor for the receiving antenna. It is a conversion factor, which converts electric fields strengths to voltages, which can be measured directly on the spectrum analyzer. It is treated as a loss in dB. Cable losses have been included with the A.F. to simplify the calculations. The antenna factor is used in calculations as follows:

$$\text{Reading on Analyzer (dB}\mu\text{V)} + \text{A.F. (dB)} = \text{Net field strength (dB}\mu\text{V/m)}$$

Net:

This is the net field strength measurement (as shown above).

Limit:

This is the FCC Class B radiated emission limit (in units of dB μ V/m). The FCC limits are given in units of μ V/m. The following formula is used to convert the units of μ V/m to dB μ V/m:

$$\text{Limit (dB}\mu\text{V/m)} = 20 * \log (\mu\text{V/m})$$

Margin:

This is the margin of compliance below the FCC limit. The units are given in dB. A negative margin indicates the emission was below the limit. A positive margin indicates that the emission exceeds the limit.

Example only:

$$\begin{array}{rclcl} \text{Reading} & + & \text{AF} & = & \text{Net Reading} & : & \text{Net reading - FCC limit} & = & \text{Margin} \\ 21.5 \text{ dB}\mu\text{V} & + & 26 \text{ dB} & = & 47.5 \text{ dB}\mu\text{V/m} & : & 47.5 \text{ dB}\mu\text{V/m} - 57.0 \text{ dB}\mu\text{V/m} & = & -9.5 \text{ dB} \end{array}$$

2 Result Summary

FCC 47 CFR Part 15B, Industry Canada RSS-Gen				
Product Specific Standard	Requirement – Test	Reference Method	Result	Remarks
47 CFR 15.109 RSS-Gen 4.9 & 4.10	Radiated emissions	ANSI C 63.4	PASS	
47 CFR 15.107 RSS-Gen 7.2.4	AC power line conducted emissions	ANSI C63.4	N/A	
Remarks:				

3 Test Conditions and Results

3.1 Test Conditions and Results – Radiated emissions


Radiated emissions acc. FCC 47 CFR 15.109 / IC RSS-Gen		Verdict: PASS				
Laboratory Parameters:	Required prior to the test	During the test				
Ambient Temperature	15 to 35 °C	23°C				
Relative Humidity	30 to 60 %	52%				
Test according referenced standards	Reference Method					
	ANSI C63.4					
Sample is tested with respect to the requirements of the equipment class	Equipment class					
	Class B					
Test frequency range determined from highest emission frequency	Highest emission frequency					
	315 MHz					
Fully configured sample scanned over the following frequency range	Frequency range					
	30 MHz to 5 GHz					
Operating mode	1					
Limits and results Class B						
Frequency [MHz]	Quasi-Peak [dBµV/m]	Result	Average [dBµV/m]	Result	Peak [dBµV/m]	Result
30 – 88	40	PASS	-		-	-
88 – 216	43.5	PASS	-		-	-
216 – 960	46	PASS	-		-	-
960 – 1000	54	PASS	-		-	-
> 1000	-	-	54	PASS	74	PASS
Comments:						

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1306-2916

Manufacturer:	Marantec Americ Corp.
EUT Name:	Wireless Keyless Entry System M13-631
Model:	R-- /1234567 /3212
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 3 VDC (2xAAA battery)
Antenna:	Rohde & Schwarz HK 116, Vertical
Measurement distance:	3m, converted to 10m
Mode:	transmit
Test Date:	2013-07-02
Note:	

Index 2

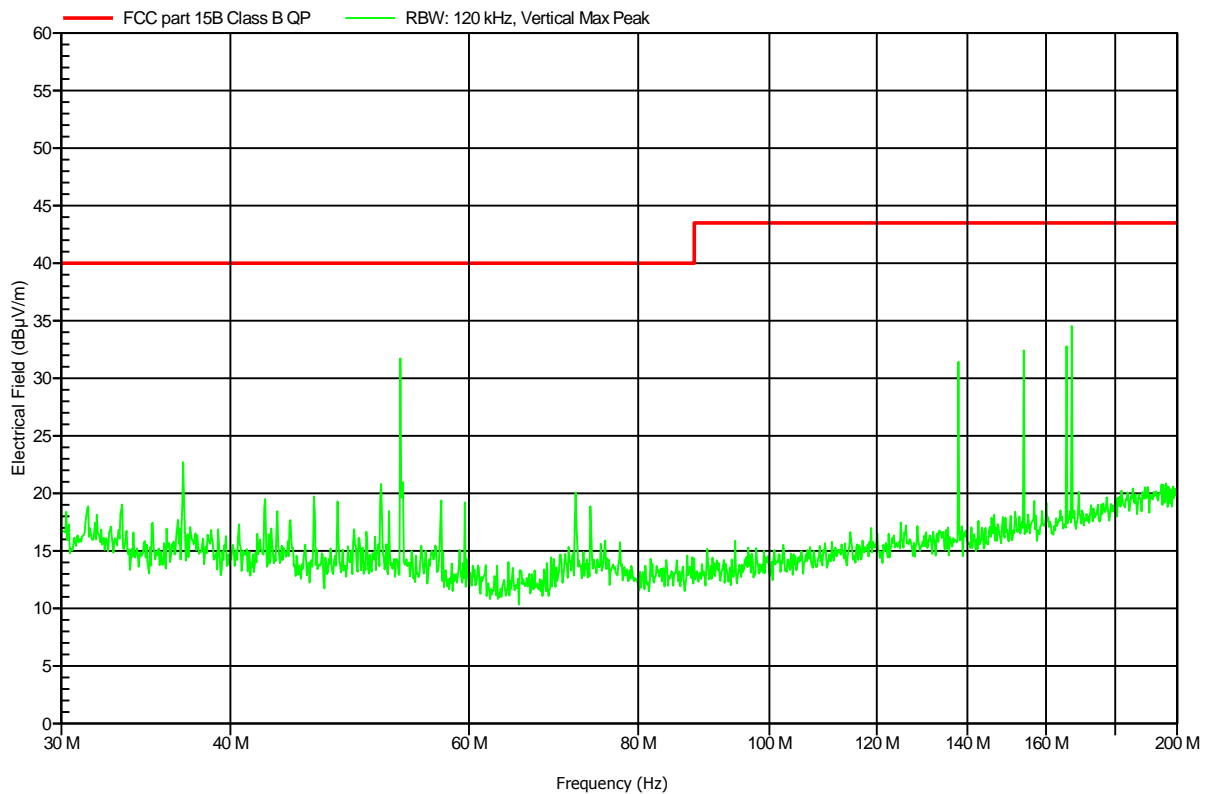


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1306-2916

Manufacturer:	Marantec Americ Corp.
EUT Name:	Wireless Keyless Entry System M13-631
Model:	R-- /1234567 /3212
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 3 VDC (2xAAA battery)
Antenna:	Rohde & Schwarz HK 116, Horizontal
Measurement distance:	3m, converted to 10m
Mode:	transmit
Test Date:	2013-07-02
Note:	

Index 1

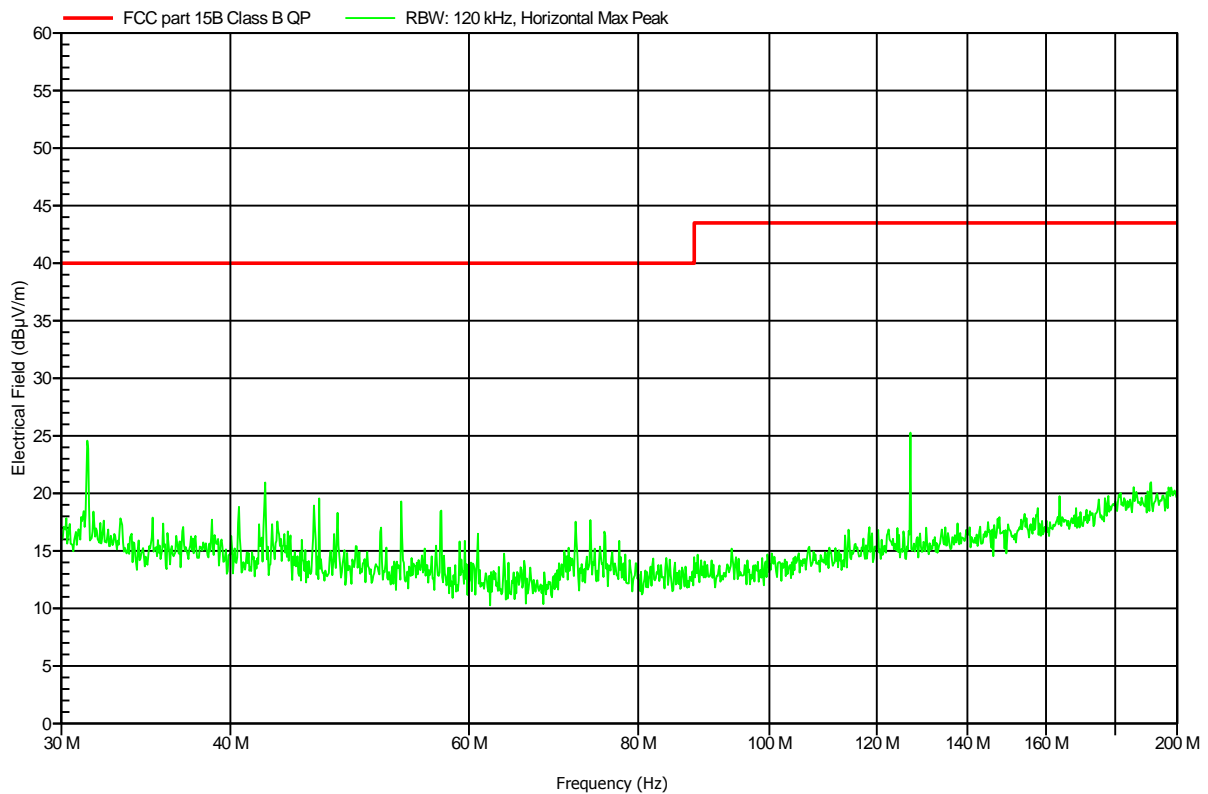


Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1306-2916

Manufacturer: Marantec Americ Corp.
 EUT Name: Wireless Keyless Entry System M13-631
 Model: R-- /1234567 /3212
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3 VDC (2xAAA battery)
 Antenna: Rohde & Schwarz HL 223, Vertical
 Measurement distance: 3m, converted to 10m
 Mode: transmit
 Test Date: 2013-07-02
 Note:

Index 3

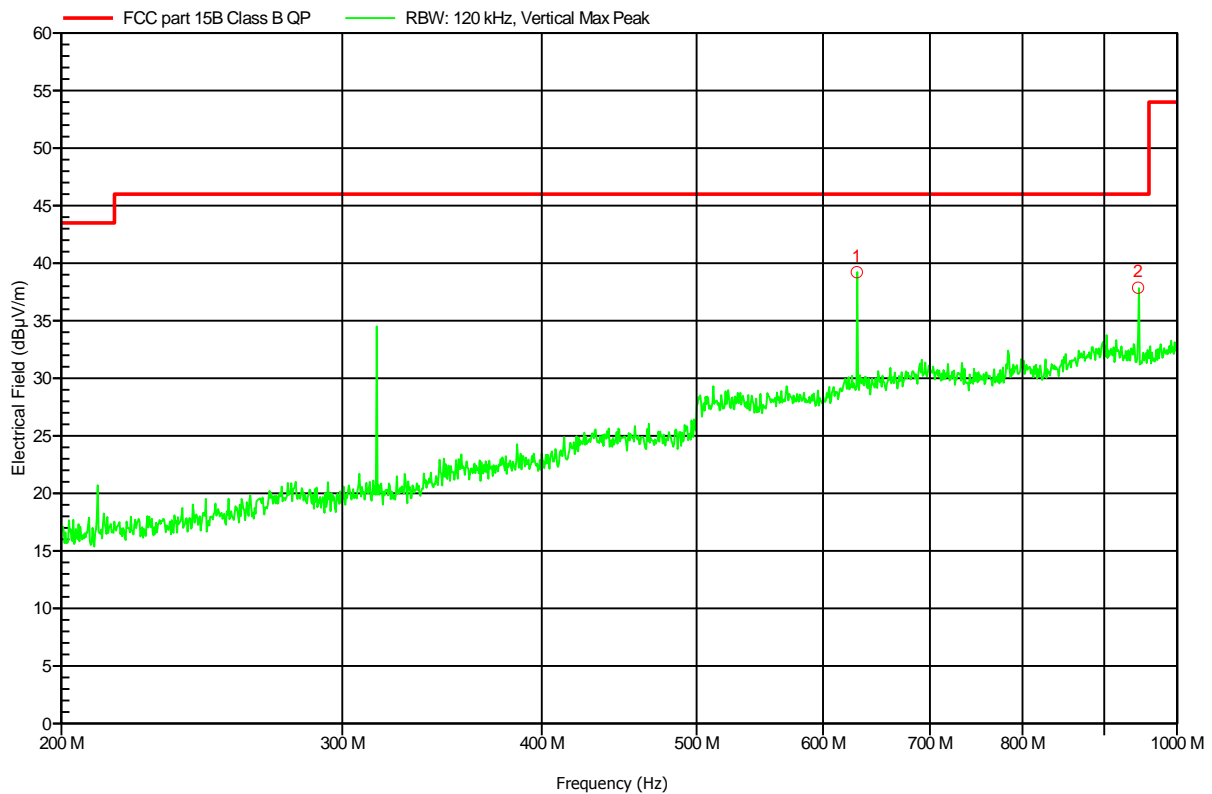


Nr	Frequency
1	630.02 MHz
2	945.02 MHz

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1306-2916

Manufacturer: Marantec Americ Corp.
 EUT Name: Wireless Keyless Entry System M13-631
 Model: R-- /1234567 /3212
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3 VDC (2xAAA battery)
 Antenna: Rohde & Schwarz HL 223, Horizontal
 Measurement distance: 3m, converted to 10m
 Mode: transmit
 Test Date: 2013-07-02
 Note:

Index 4

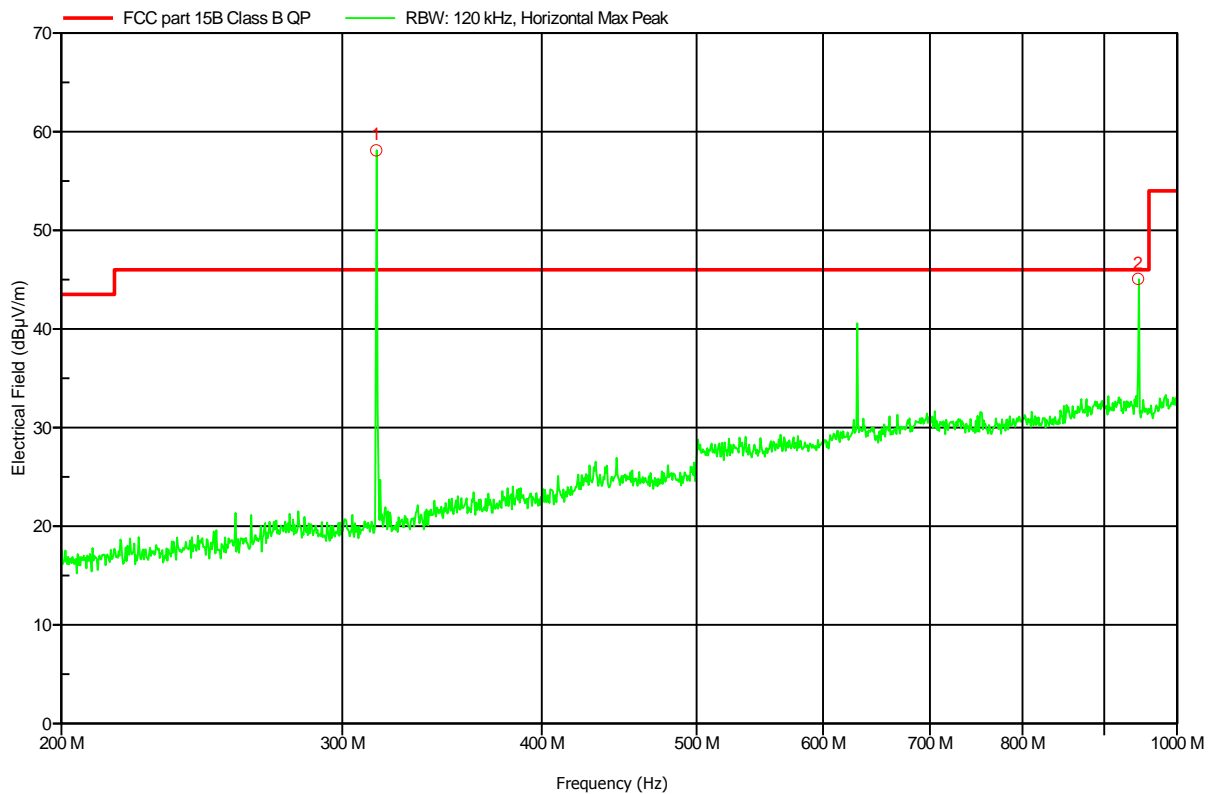


Nr	Frequency	Carrier Frequency
1	315.02 MHz	Carrier Frequency
2	945.059 MHz	2. Harmonic

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1306-2916

Manufacturer:	Marantec Americ Corp.
EUT Name:	Wireless Keyless Entry System M13-631
Model:	R-- /1234567 /3212
Test Site:	Eurofins Product Service GmbH
Operator:	Mr. Pflug
Test Conditions:	Tnom: 23°C, Unom: 3 VDC (2xAAA battery)
Antenna:	Rohde & Schwarz HL 025, Vertical
Measurement distance:	3m
Mode:	transmit
Test Date:	2013-07-02
Note:	

Index 6

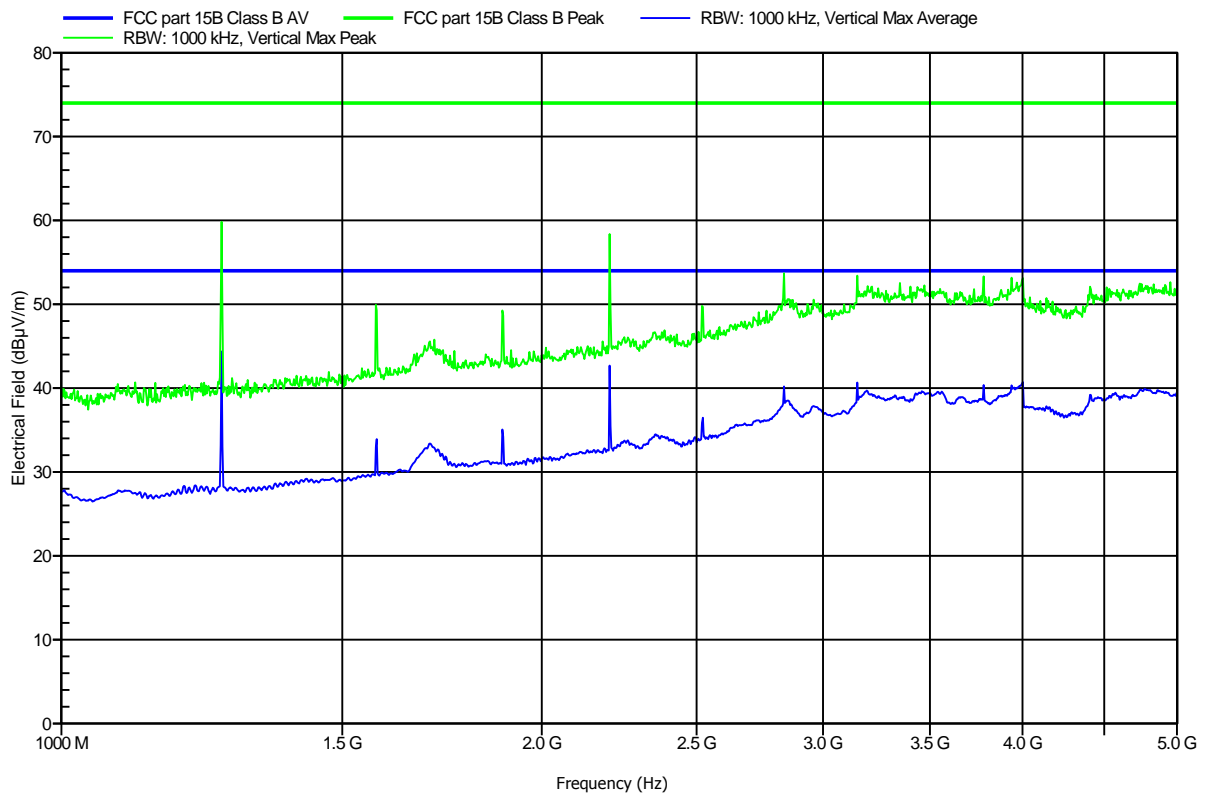

Spurious emissions under normal conditions according to FCC Part 15b

Project number: G0M-1306-2916

Manufacturer: Marantec Americ Corp.
 EUT Name: Wireless Keyless Entry System M13-631
 Model: R-- /1234567 /3212
 Test Site: Eurofins Product Service GmbH
 Operator: Mr. Pflug
 Test Conditions: Tnom: 23°C, Unom: 3 VDC (2xAAA battery)
 Antenna: Rohde & Schwarz HL 025, Horizontal
 Measurement distance: 3m
 Mode: transmit
 Test Date: 2013-07-02
 Note:

Index 5

