

Straubing, 16 October 2003

T E S T - R E P O R T

No. 50530-30654

for

Compact Keypad 345 MHz

Remote control transmitter

Applicant: ELDAT Gesellschaft für Elektronik und
Datentechnik mbH

Test Specification: FCC Code of Federal Regulations,
Part 15 Subpart C, Section 15.231

Note:

The test data of this report relate only to the individual item which has been tested.
This report shall not be reproduced except in full extent without the written approval of
the testing laboratory.

Table of Contents

1.	Administrative Data.....	3
2.	Identification of Test Laboratory	4
3.	Operation Mode of EUT.....	5
4.	Configuration	6
5.	Measuring Methods	7
5.1.	Field Strength of Emissions, Prescans in a fully-anechoic room (30 MHz – 1 GHz)	8
5.2.	Fieldstrength of Emissions, Measurement at Open Area Test Site (30 MHz – 1 GHz)	9
5.3.	Fieldstrength of Emissions above 1 GHz	10
6.	Photographs Taken During Testing	11
7.	List of Measurements	16
8.	Referenced Regulations	22
	Charts taken during testing	23

1. Administrative Data

Test item (EUT)	
Type designation	Keypad Compact 345 MHz
Serial number(s):	001
Type of equipment:	Remote Control Transmitter
Parts/accessories:	
FCC-ID:	
Technical data	
Frequency range	
Operational frequency	345 MHz
Type of modulation	10K0A1D
Pulse frequency	N/A
Pulse width	N/A
Antenna	Integrated
Power supply	2 x 1.5 V lithium battery
Applicant: (full address)	
	ELDAT Gesellschaft für Elektronik und Datentechnik mbH Im Gewerbepark 14 D-15711 Zeesen Germany
Contract identification:	---
Contact person:	Mr. Klaus Poppel
Manufacturer:	ELDAT GmbH
Application details	
Receipt of EUT:	2 October 2003
Date of test:	October 2003
Note:	
Responsible for testing:	Mr. Martin Steindl
Responsible for test report:	Mr. Martin Steindl

2. Identification of Test Laboratory

DETAILS OF THE TEST LABORATORY	
COMPANY NAME:	Senton GmbH EMI/EMC Test Center
ADDRESS:	Aeussere Fruehlingsstrasse 45 D-94315 Straubing Germany
LABORATORY ACCREDITATION:	DAR-Registration No. TTI-P-G 062/94-01
FCC TEST SITE LISTING	90926
INDUSTRY CANADA TEST SITE REGISTRATION	IC 3050
NAME FOR CONTACT PURPOSES:	Mr. Johann Roidt
TELEPHONE: (+49) (0)9421 5522-0	FAX: (+49) (0)9421 5522-99

PERSONNEL INVOLVED IN THIS TEST REPORT	
LABORATORY MANAGER:	 Mr. Johann Roidt
RESPONSIBLE FOR TESTING:	Mr. Martin Steindl
RESPONSIBLE FOR TEST REPORT:	Mr. Martin Steindl

SUMMARY OF TEST RESULTS	
The tested sample complies with the requirements set forth in the FCC Code of Federal Regulations Part 15, Subpart C, Section 15.231	

3. Operation Mode of EUT

While one button is pressed, the transmitter continuously sends the corresponding datagram. When the button is released, the transmitter stops working instantly.

4. Configuration

Configuration of the EUT

During the testing a connector was used, that switched the EUT in continuous transmitting-mode.

Cables connected to the EUT

Not applicable

Peripheral devices connected to the EUT

Not applicable

5. Measuring Methods


5.1. Field Strength of Emissions, Prescans in a fully-anechoic room (30 MHz – 1 GHz)

Rules and Specifications:	Sections 15.109 & 15.231
Guide:	ANSI C63.4 1997

Measurement Procedure:

Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz.

Measurements were made in both the horizontal and vertical planes of polarization in a fully anechoic room using a spectrum analyzer with the detector function set to peak and resolution bandwidth set to 100 kHz. All tests were performed at a test-distance of 3 meters. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing.

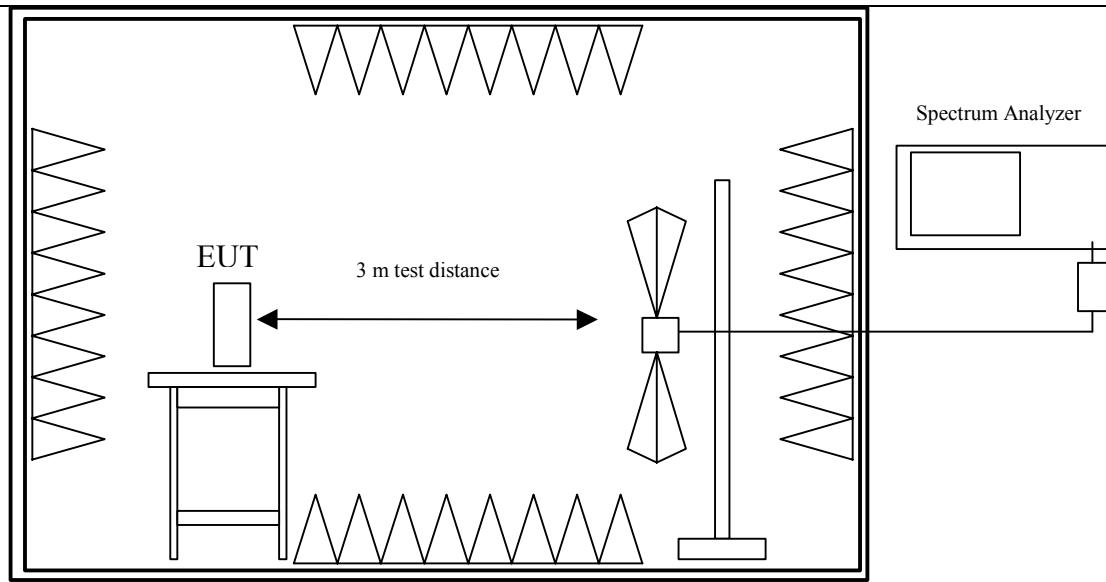

Fully anechoic chamber

Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
113	Preamplifier	CPA9231A	3393	Schaffner
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. period. antenna	3147	9112-1054	EMCO
003	Fully anechoic room	No. 2	1452	Albatross Projects

5.2. Fieldstrength of Emissions, Measurement at Open Area Test Site (30 MHz – 1 GHz)


Rules and Specifications:	Sections 15.109 & 15.231
Guide:	ANSI C63.4 1997

Measurement Procedure:

Measurement Procedure:

For final testing an open-area test-side was used. Radiated emissions are measured over the frequency range from 30 MHz to 1 GHz.

Measurements were made in both the horizontal and vertical planes of polarisation at a open area test side using a spectrum analyser with the detector function set to CISPR. All test were performed at a test distance of 3 meters. During the tests the EUT is rotated all around, and the receiving-antenna is rased and lowered from 1m to 4m to find the maximum levels of emissions. The cables and equipment were placed and moved within the range of position likely to find their maximum emissions.

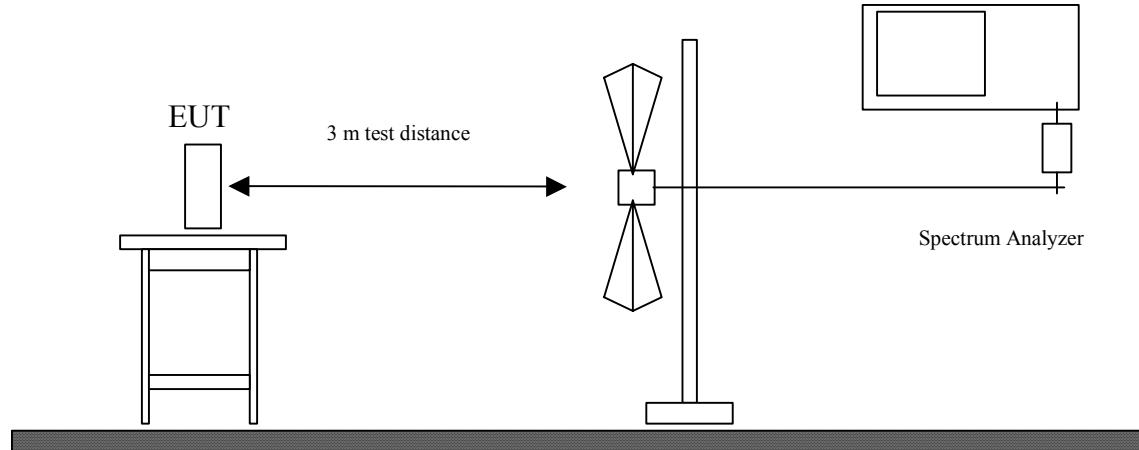

Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	EMI Receiver	ESVP	881414/009	Rohde & Schwarz
141	Biconical antenna	HK 116	829708/006	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
003	Open Field Test Site	No. 1	N/A	Senton

5.3. Fieldstrength of Emissions above 1 GHz

Rules and Specifications:	Sections 15.109 & 15.209
Guide:	ANSI C63.4 1997

Measurement Procedure:


Radiated emissions are measured in the frequency range 1 GHz to the 10th harmonic of the maximum frequency of the EUT.

Resolution and video bandwidth of the spectrum analyzer are set to 1 MHz. Hand-held or body-worn devices are rotated through three orthogonal axes to determine which attitude and configuration produces the highest emission relative to the limit and therefore shall be used for final testing. Additional measurements are performed at critical frequencies with reduced span.

EUT is rotated all around and receiving antenna is raised and lowered to find the maximum levels of emission. The cables and equipment are placed and moved within the range of position likely to find their maximum emissions.

All tests are performed in a fully-anechoic chamber with a test-distance of 3 meters.

If required preamplifiers are used for the whole frequency range. Special care is taken to avoid overload in transmit mode (using appropriate attenuators and filters if necessary).

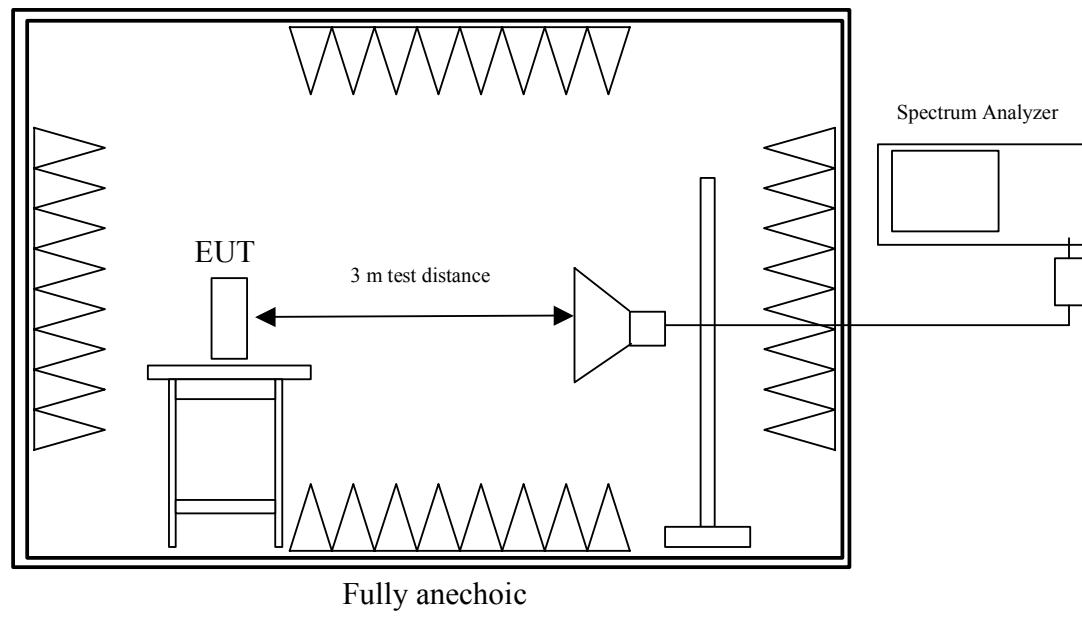

Test instruments used:

No.	Type	Model	Serial Number	Manufacturer
01	Spectrum Analyzer	FSP 30	100063	Rohde & Schwarz
143	Log. periodic antenna	3147	9112-1054	EMCO
145	Horn antenna	3115	9508-4553	EMCO
146	Horn antenna set	3160-03/-09	9112-1003	EMCO
114	Preamplifier 1-8 GHz	AFS3-00100800-32-LN	847743	Miteq
115	Preamplifier 8-18 GHz	ACO/180-3530	32641	CTT
003	Fully anechoic room	No. 2	1452	Albatross Projects

6. Photographs Taken During Testing

**Test setup for radiated emission measurement
(fully anechoic room)**







Test setup for radiated emission measurement (open-area test-side)



7. List of Measurements

FCC Part 15			
Section(s):	Test	Page(s)	Result
15.205	Restricted Bands		Pass
15.207	AC powerline emissions		Not Applicable
15.231 (a) (1)	Periodic operation		Pass
15.231 (b)	Duty Cycle Correction		
15.231 (b)	Field strength of emissions	---	Pass
15.231 (c)	Bandwidth of emissions	---	Pass

Field strength of emissions

Rules and Specifications:	15.231 (b) Radiated Emission Limits		
Guide:	ANSI C63.4		
Limit:	In addition to the provisions of Section 15.205, the field strength of emissions from intentional radiators operated under Section 15.231 shall not exceed the following:		
Fundamental Frequency (MHz)	Field Strength of Fundamental (microvolts/meter)	Field Strength of Spurious Emissions (microvolts/meter)	
40.66 – 40.70	2.250	225	
70 – 130	1.250	125	
130 - 174	1.250 to 3.750**	125 to 375 **	
174 - 260	3.750	375	
260 – 470	3750 to 12.500**	375 to 1250 **	
above 470	12.500	1250	

** linear interpolations

Test Site:	Open Area Test Site (< 1 GHz), Fully anechoic chamber (> 1 GHz)		
Distance:	3 Meter		

Frequency (MHz)	Detector	Antenna Polarization	Analyzer Reading (dB μ V)	Antenna Correction (dB/m)	Duty Cycle Correction (dB/m)	Field Strength (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
345,00	Pk	Hor	69,8	16,90	-13,99	72,71	77,25	-4,5
690,00	Pk	Hor	22,40	24,40	-13,99	32,81	57,25	-24,4
1378,00	Pk	Hor	19,1	29,18	-13,99	34,29	57,25	-23,0
3106,00	Pk	Hor	20,84	38,05	-13,99	44,90	57,25	-12,4
3454,00	Pk	Hor	22,16	39,83	-13,99	48,00	57,25	-9,3

*** = All emissions showed more than 20 dB margin to the limit
 A negative value for Margin indicates, that the limit is kept.

Sample calculation of erp values:

$$\text{Field Strength (dB}\mu\text{V/m)} = \text{Analyzer Reading (dB}\mu\text{V)} + \text{Antenna Correction (dB/m)} + \\ \text{Duty Cycle Correction (dB)}$$

Test Results:	Pass	
---------------	------	--


FCC-ID:

Test Report No.: 50530-30654


Duty Cycle Correction

Rules and Specifications:	15.231 (b) (2) Limits on the Field Strength of Emissions
Guide:	ANSI C63.4
ANSI C63.4	When average detector function limits are specified for a pulse modulated transmitter, the average level of emissions may be found by measuring the peak levels of the emissions and correcting them with the duty cycle according to ANSI C64.4, section I4 (10)


$$\text{Duty Cycle Correction} [\text{dB}] = 20 \cdot \log\left(\frac{1.48\text{ms} \cdot 5 + 0.74\text{ms} \cdot 17}{100\text{ms}}\right) = -13.99 \text{ dB}$$

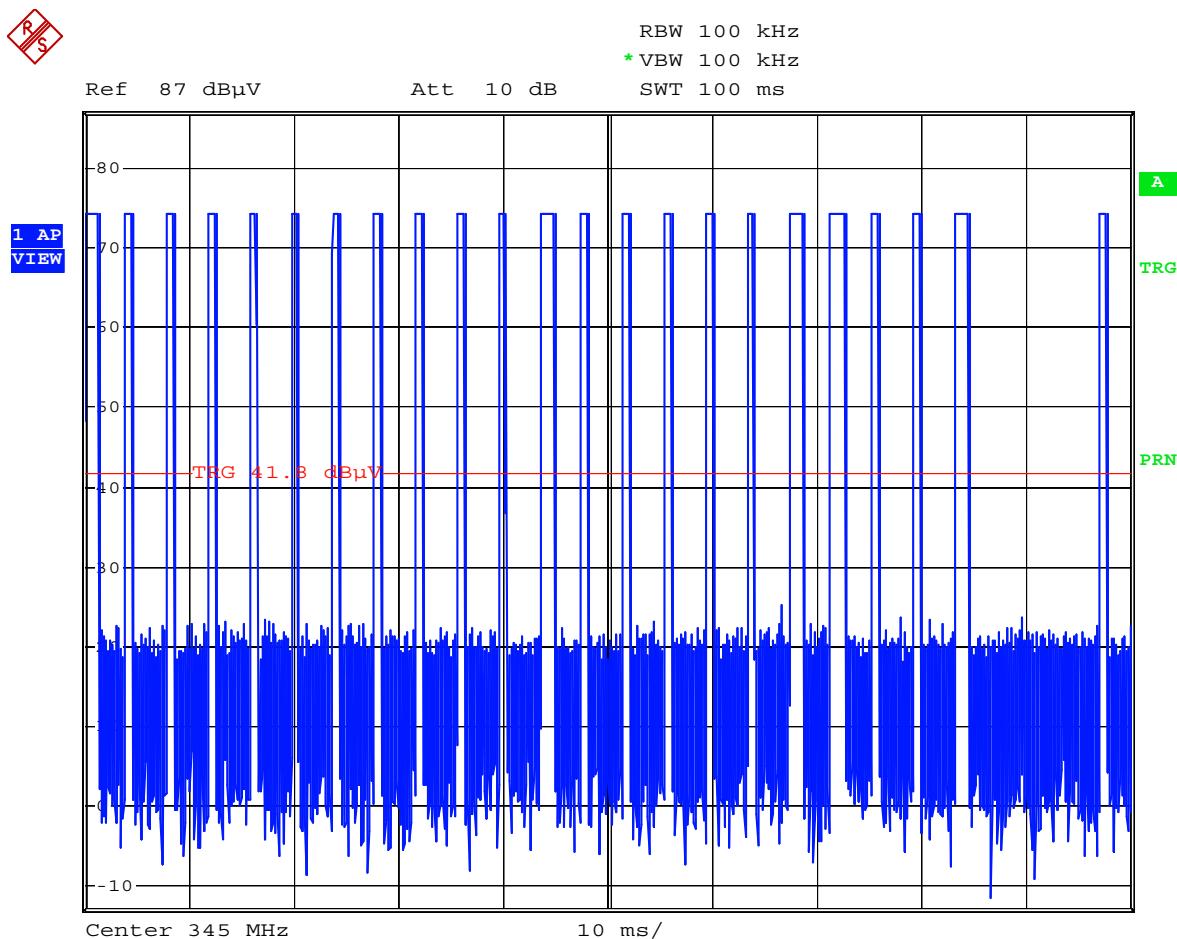

Comment A: Eldat 30654: Duty Cycle Correction
 Date: 9.OCT.2003 09:40:23

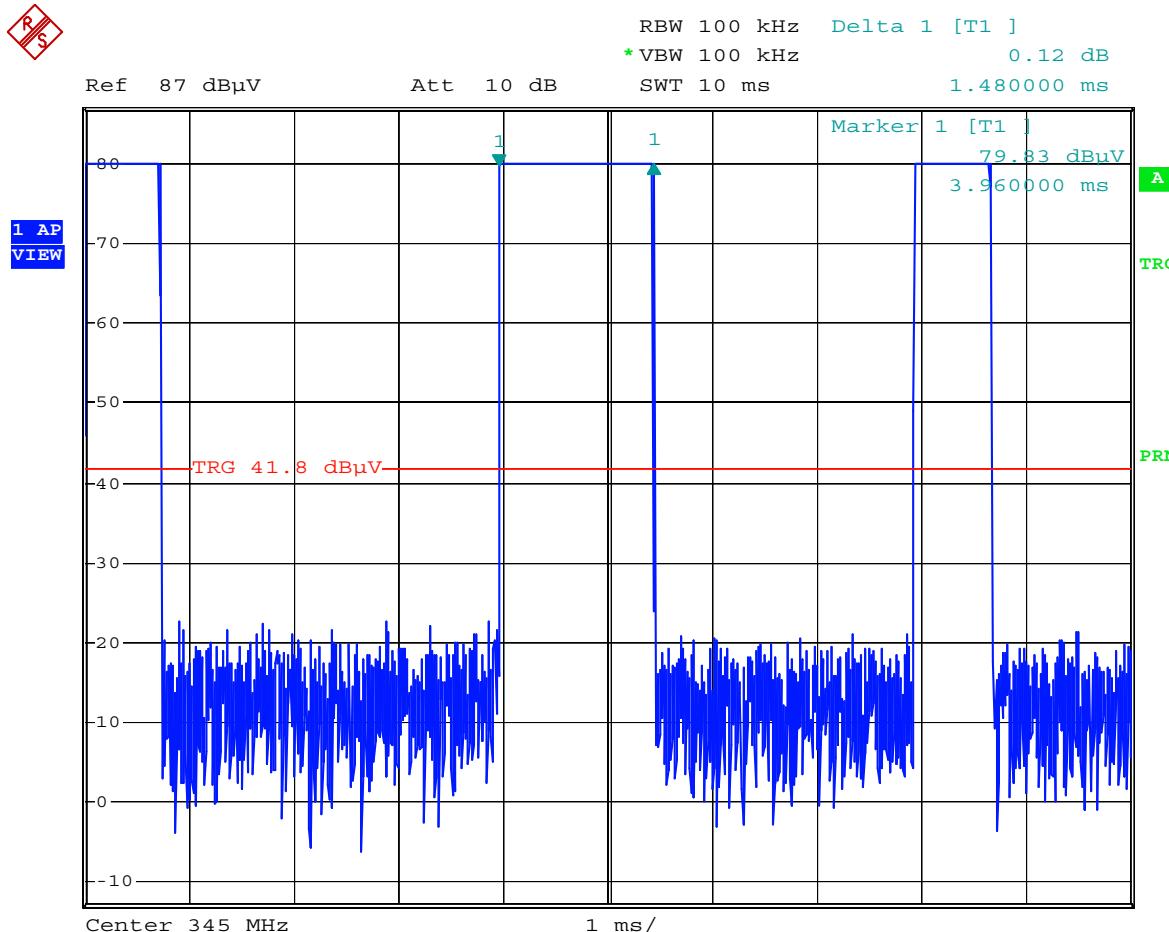


Comment A: Eldat 30654: Duty Cycle Correction
Date: 9.OCT.2003 09:35:52

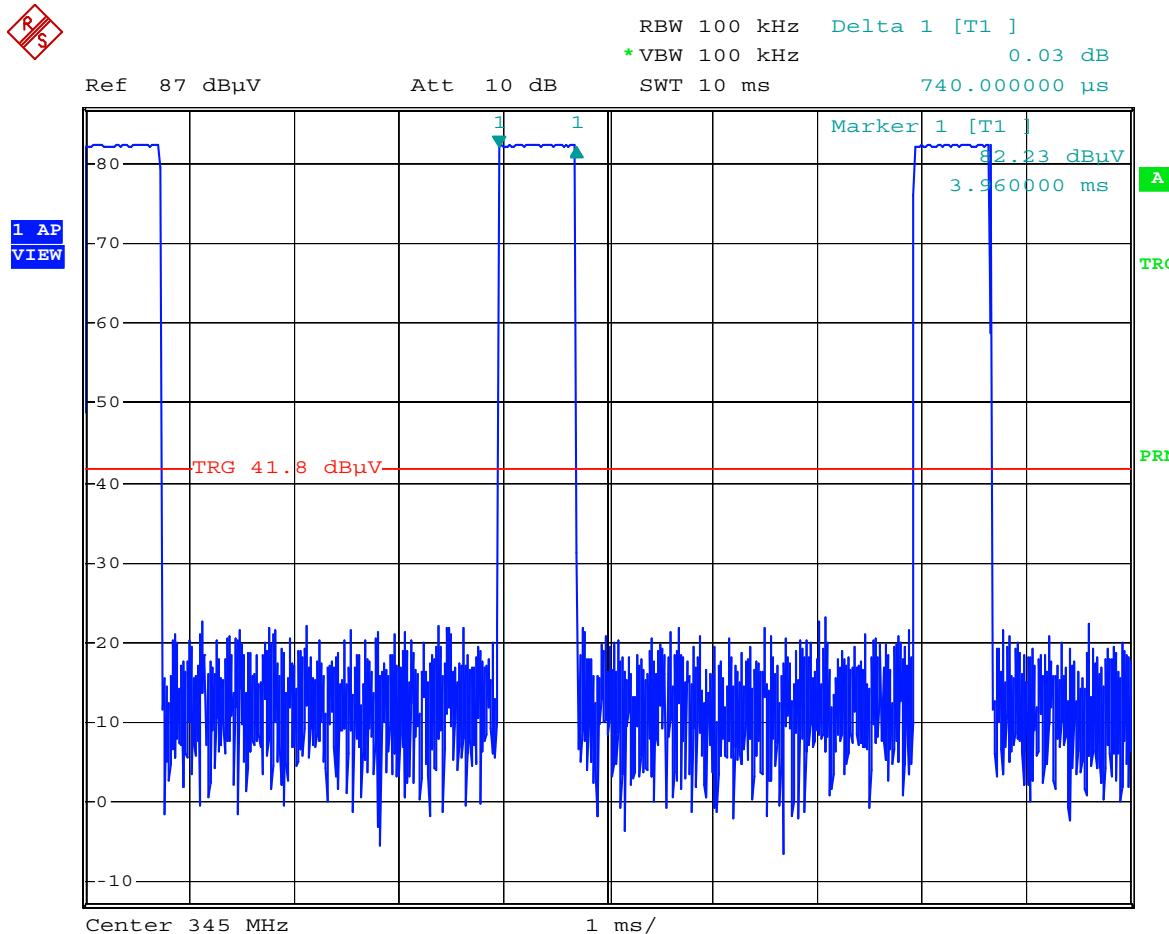

Comment A: Eldat 30654: Duty Cycle Correction
Date: 9.OCT.2003 09:37:29

Bandwidth of Emission

Rules and Specifications:	15.231 c
Guide:	ANSI C63.4
Limit:	The bandwidth of the emission shall be no wider than 0.25% of the center frequency for devices operating above 70 MHz and below 900 MHz. For devices operating above 900 MHz, the emission shall be no wider than 0.5% of the center frequency. Bandwidth is determined at the points 20 dB from the modulated carrier

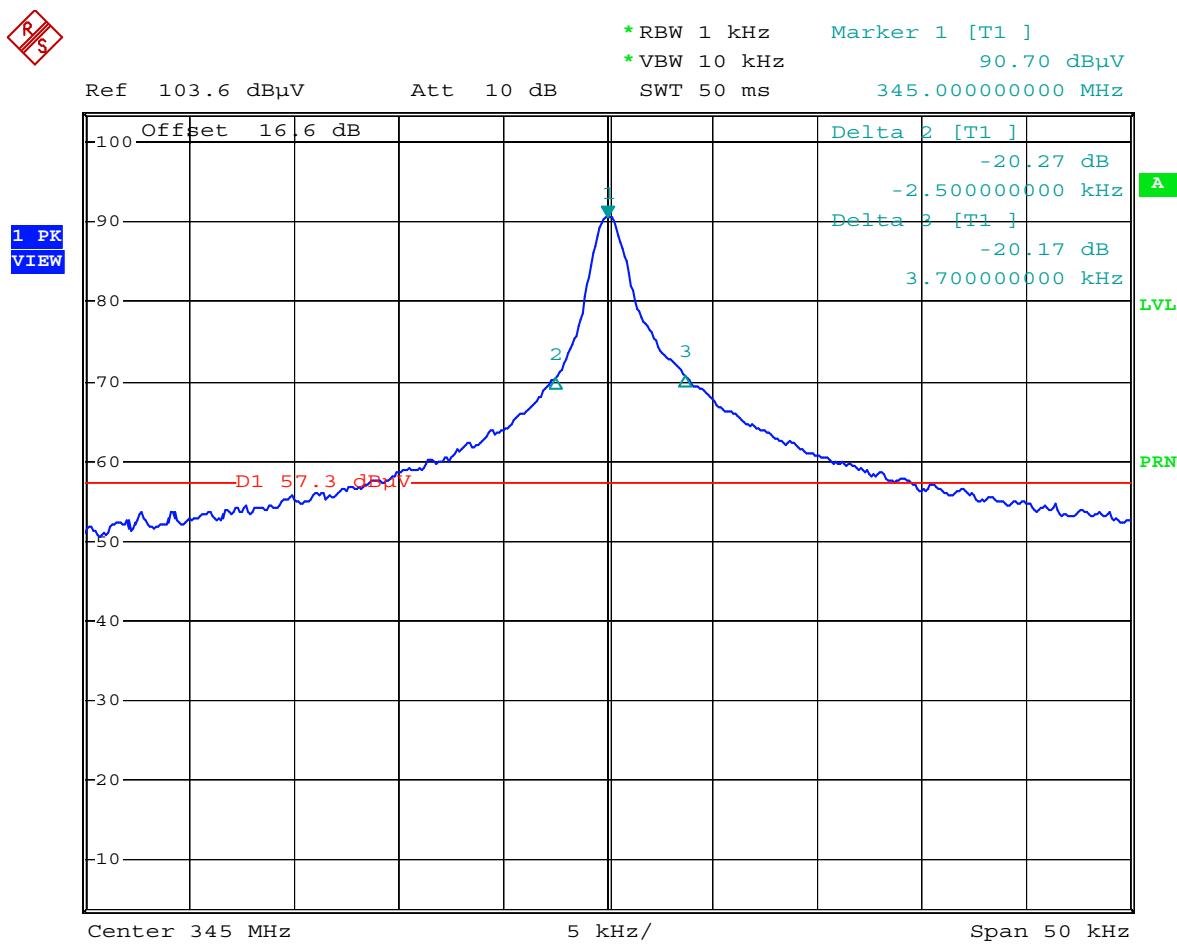

Comment A: Eldat 30654: Bandwidth of Emission
 Date: 16.OCT.2003 12:07:00

Test Results:	Pass	Bandwidth of Emission = 3.7 kHz = 0.001 %
----------------------	------	--

8. Referenced Regulations

All tests were performed with reference to the following regulations and standards:

<input checked="" type="checkbox"/>	FCC Part 2	Code of Federal Regulations Part 2 Frequency allocation and radio treaty matters; General rules and regulations	October 01, 1999
<input type="checkbox"/>	FCC Part 15 Subpart A	Code of Regulations Part 15 (Radio Frequency Devices), Subpart A (General) of the Federal Communication Commission (FCC)	May 30, 2002
<input type="checkbox"/>	FCC Part 15 Subpart B	Code of Regulations Part 15 (Radio Frequency Devices), Subpart B (Unintentional Radiators) of the Federal Communication Commission (FCC)	May 30, 2002
<input checked="" type="checkbox"/>	FCC Part 15 Subpart C	Code of Regulations Part 15 (Radio Frequency Devices), Subpart C (Intentional Radiators) of the Federal Communication Commission (FCC)	May 30, 2002
<input type="checkbox"/>	FCC Part 74 Subpart H	Code of Regulations Part 15 (Radio Frequency Devices), Subpart H (Low Power Auxiliary Stations) of the Federal Communication Commission (FCC)	October 20, 1997
<input checked="" type="checkbox"/>	ANSI C63.4	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz - 40 GHz	October, 1992
<input type="checkbox"/>	RSS-210	Radio Standards Specification RSS-210 Issue 2 for Low Power Licence-Exempt Radiocommunication Devices of Industry Canada	February 24, 1996

Charts taken during testing

Radiated Emission Test 10 kHz - 30 MHz according to FCC Part 15 Subpart C

Model:
 Keypad Compact 345 MHz

Serial no.:
 test sample

Applicant:
 Eldat GmbH

Test site:
 Shielded room, cabin no. 2

Tested on:
 Test distance 3 metres


Date of test: 12/10/2003 Operator:

Test performed: automatically File name:

Mode:
 - 2 x 3 V lithium battery supply
 - transmitting continuously
 - EUT flat on table

Detector:
 Peak / Final Results: QP

Final results:
 20 dB Margin 25 Subranges

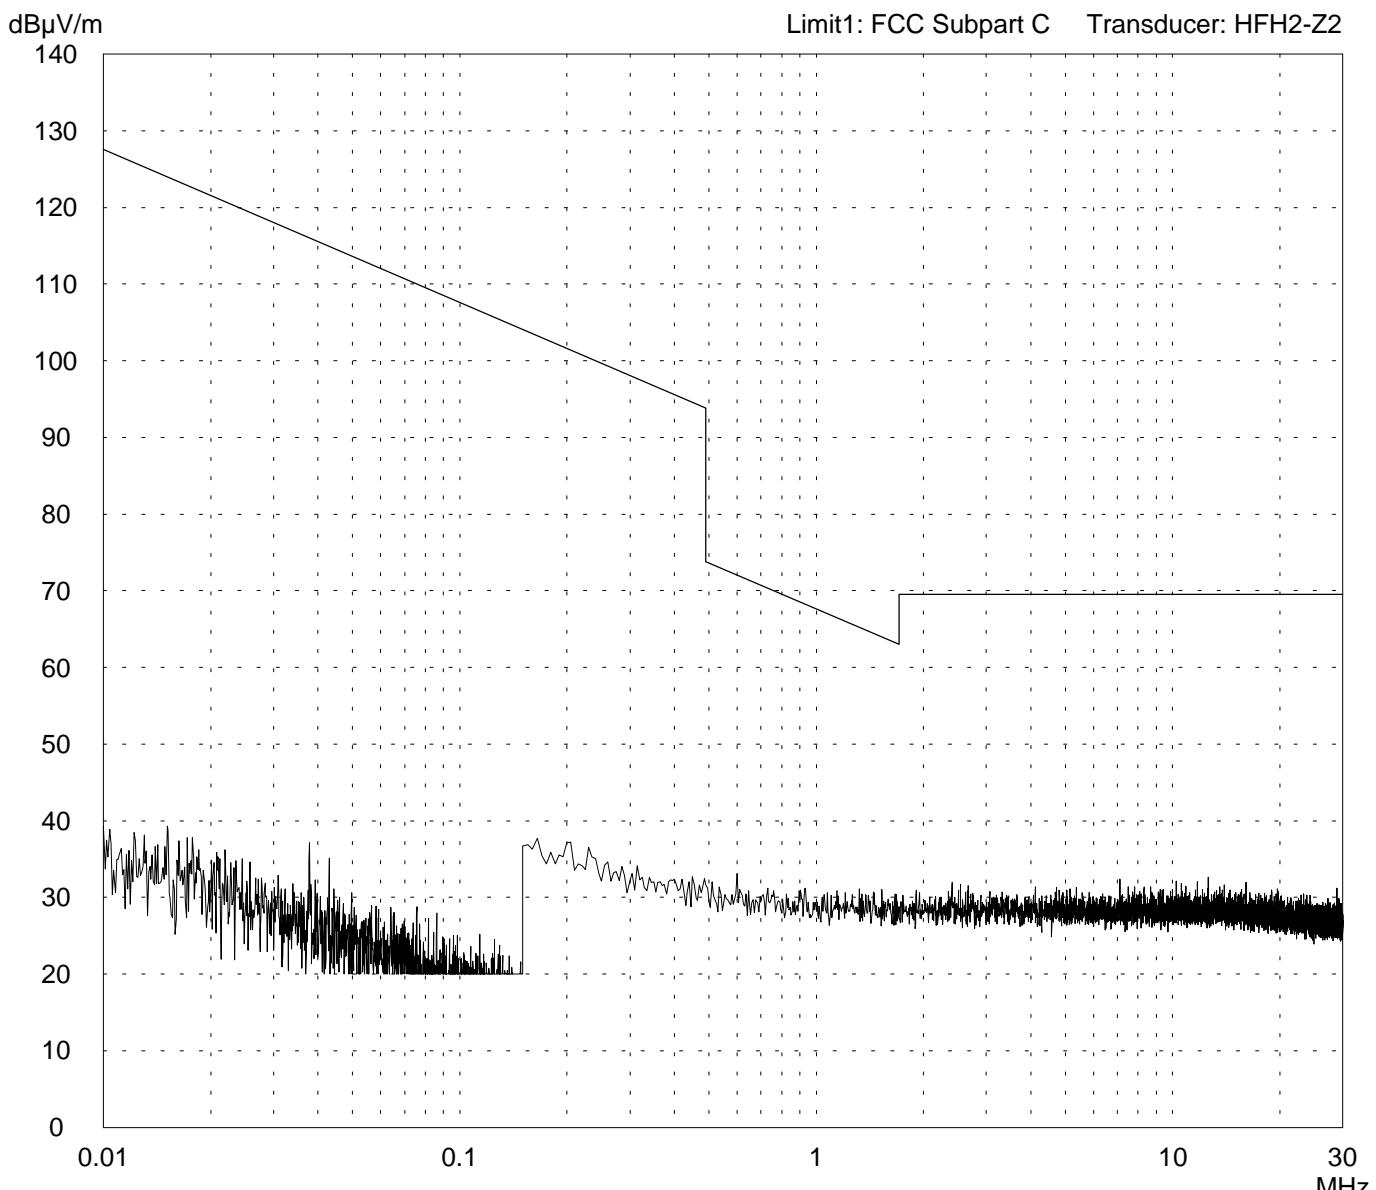

Result:
 Limit kept

Project file:
 50530-30654

Page of Pages

**Radiated Emission Test 10 kHz - 30 MHz
according to FCC Part 15 Subpart C**

Model: Keypad Compact 345 MHz	
Serial no.: test sample	
Applicant: Eldat GmbH	
Test site: Shielded room, cabin no. 2	
Tested on: Test distance 3 metres	
Date of test: 12/10/2003	Operator:
Test performed: automatically	File name:

Mode:	- 2 x 3 V lithium battery supply
	- transmitting continuously
	- EUT flat on table

Detector: Peak / Final Results: QP

Final results: 20 dB Margin	25 Subranges
--------------------------------	--------------

<i>Frequency MHz</i>	<i>Reading dBμV</i>	<i>Correction factor dB</i>	<i>Value dBμV/m</i>	<i>Limit dBμV/m</i>	<i>Limit exceeded</i>
no results					


Result: Limit kept

Project file: 50530-30654	Page of Pages
------------------------------	-------------------------

Radiated Emission Test 30 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- transmitting continuously
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin	50 Subranges
--------------------------	--	---------------------

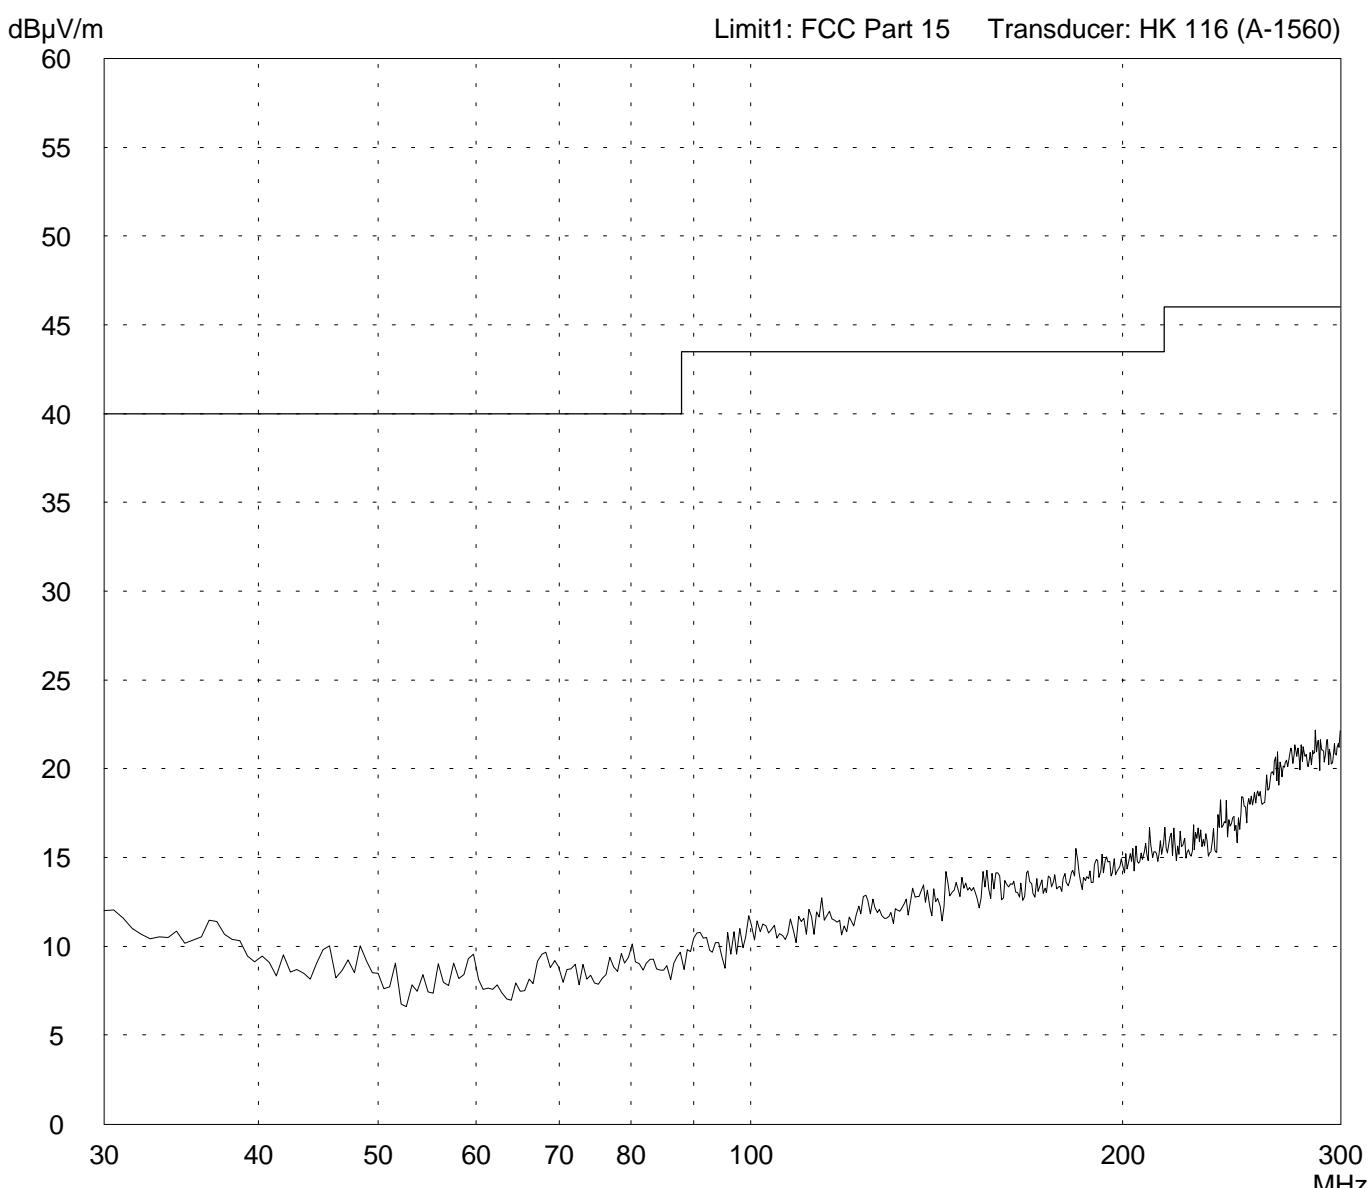


Result: Prescan	Project file: 50530-30654	Page of Pages
---------------------------	-------------------------------------	---

Radiated Emission Test 30 MHz - 300 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- transmitting continuously
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi


Detector: Peak	List of values: 10 dB Margin	50 Subranges
--------------------------	--	---------------------

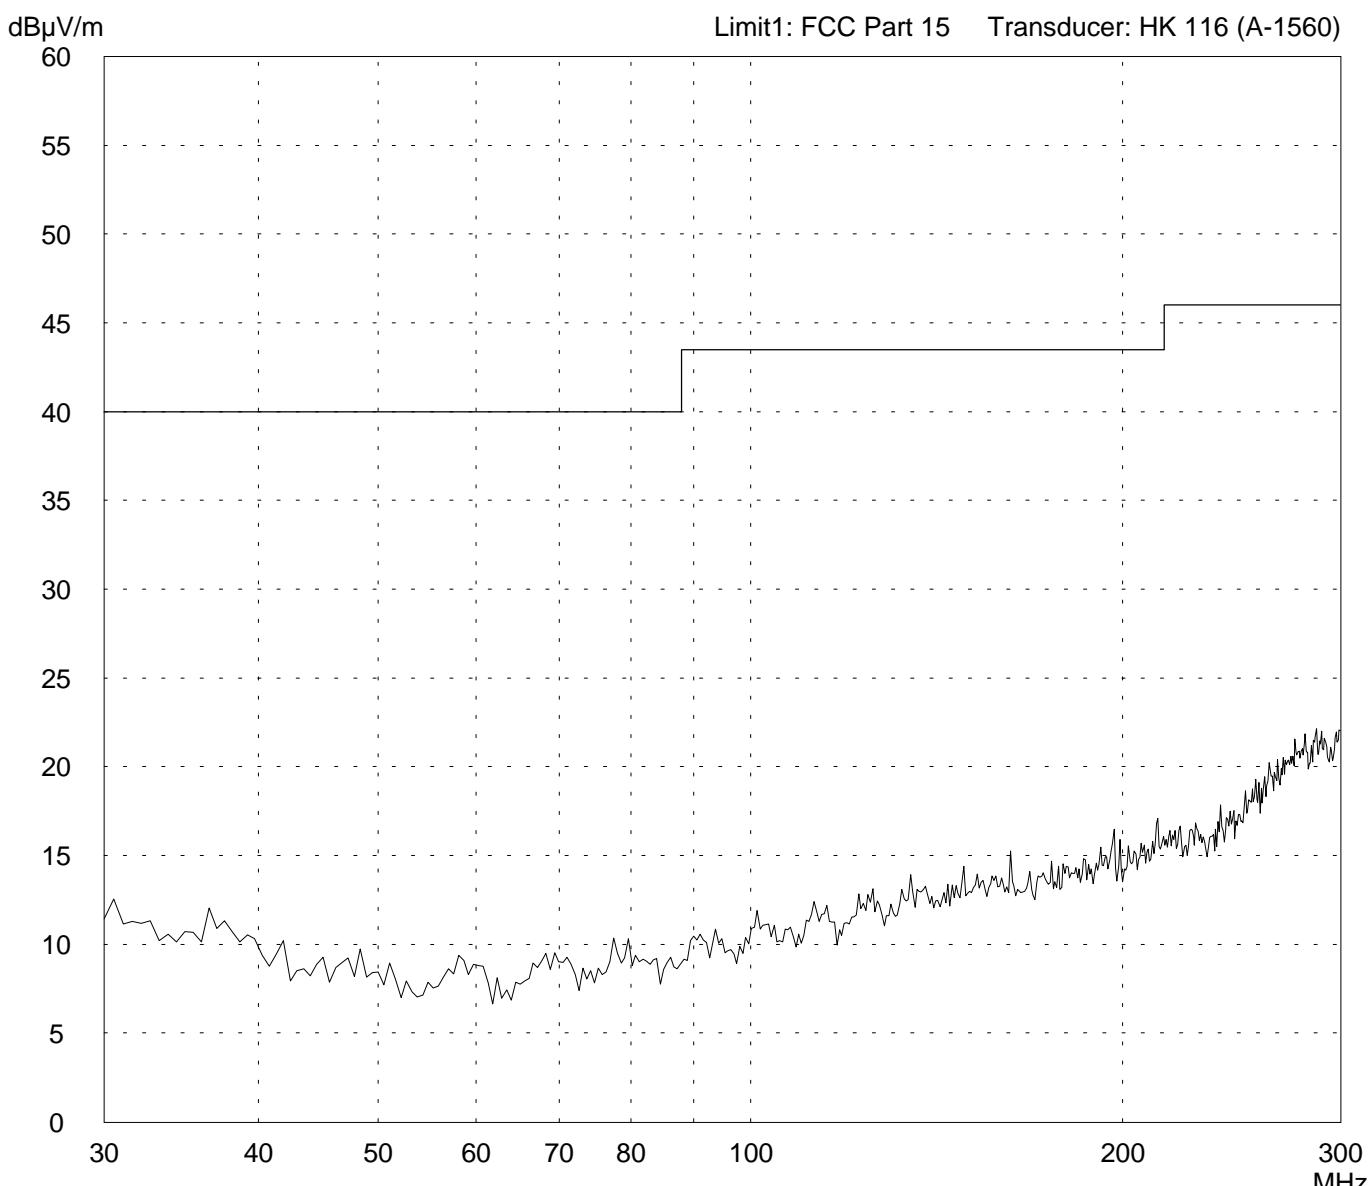

Result: Prescan	Project file: 50530-30654	Page of Pages
---------------------------	-------------------------------------	---

Radiated Emission Test 300 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT flat on table - transmitting continuously
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

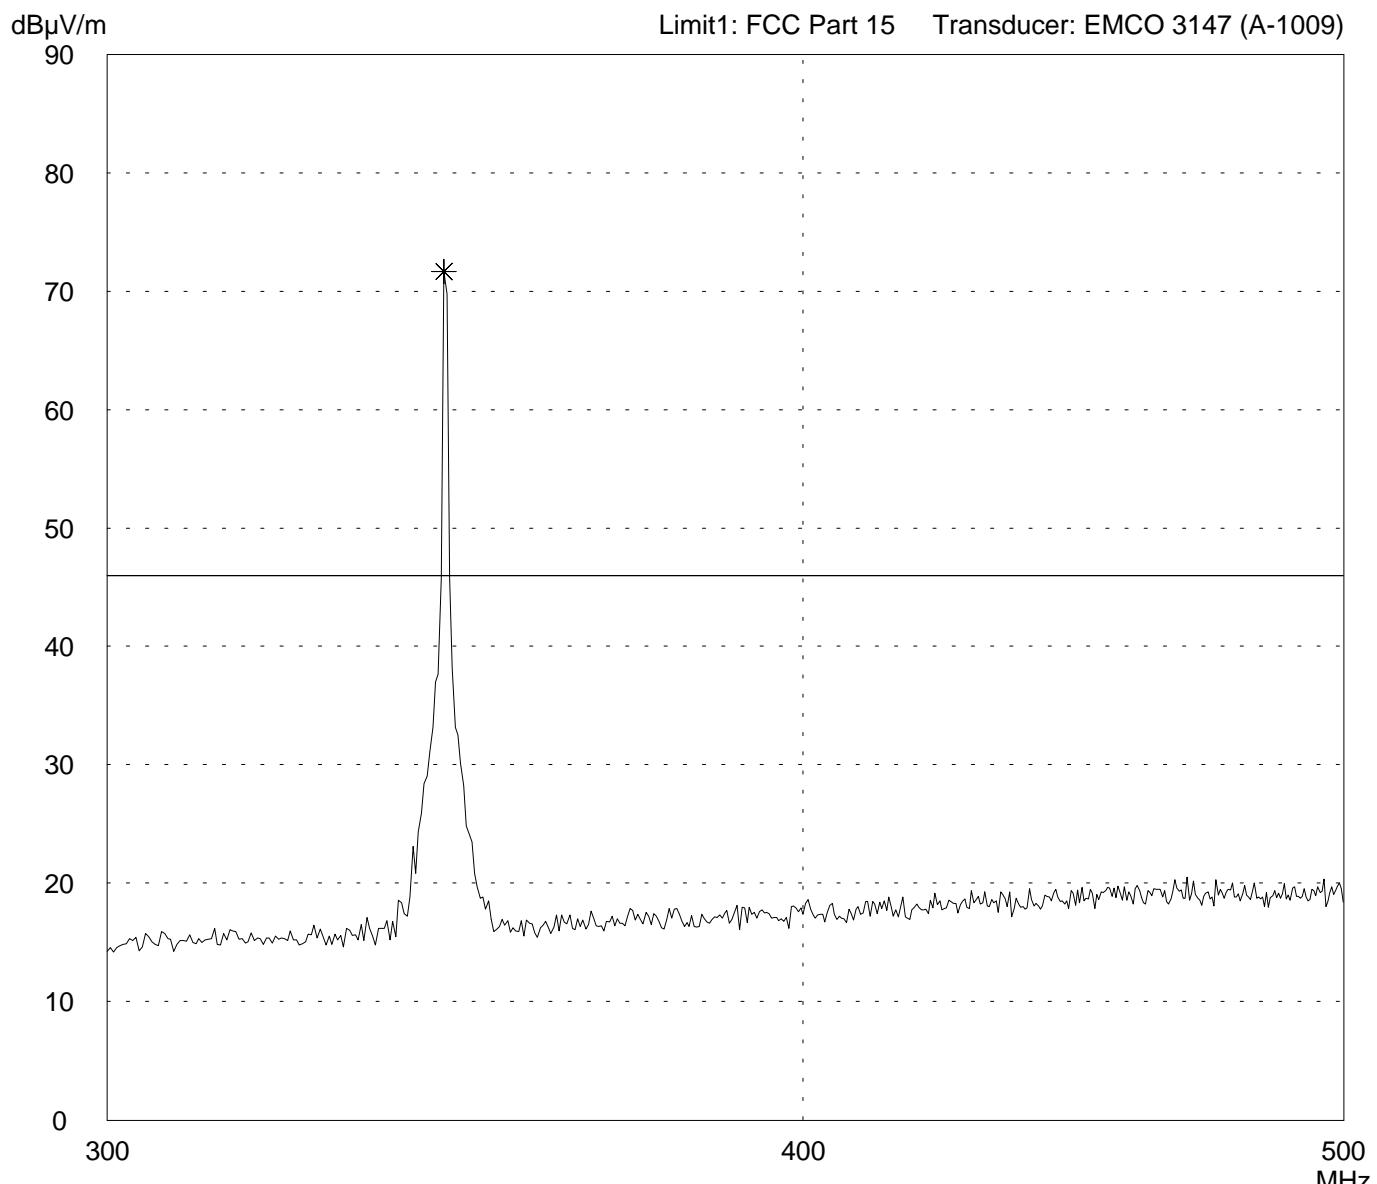

Result: Prescan Project file: 50530-30654 Page of Pages

Radiated Emission Test 300 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT flat on table - transmitting continuously
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

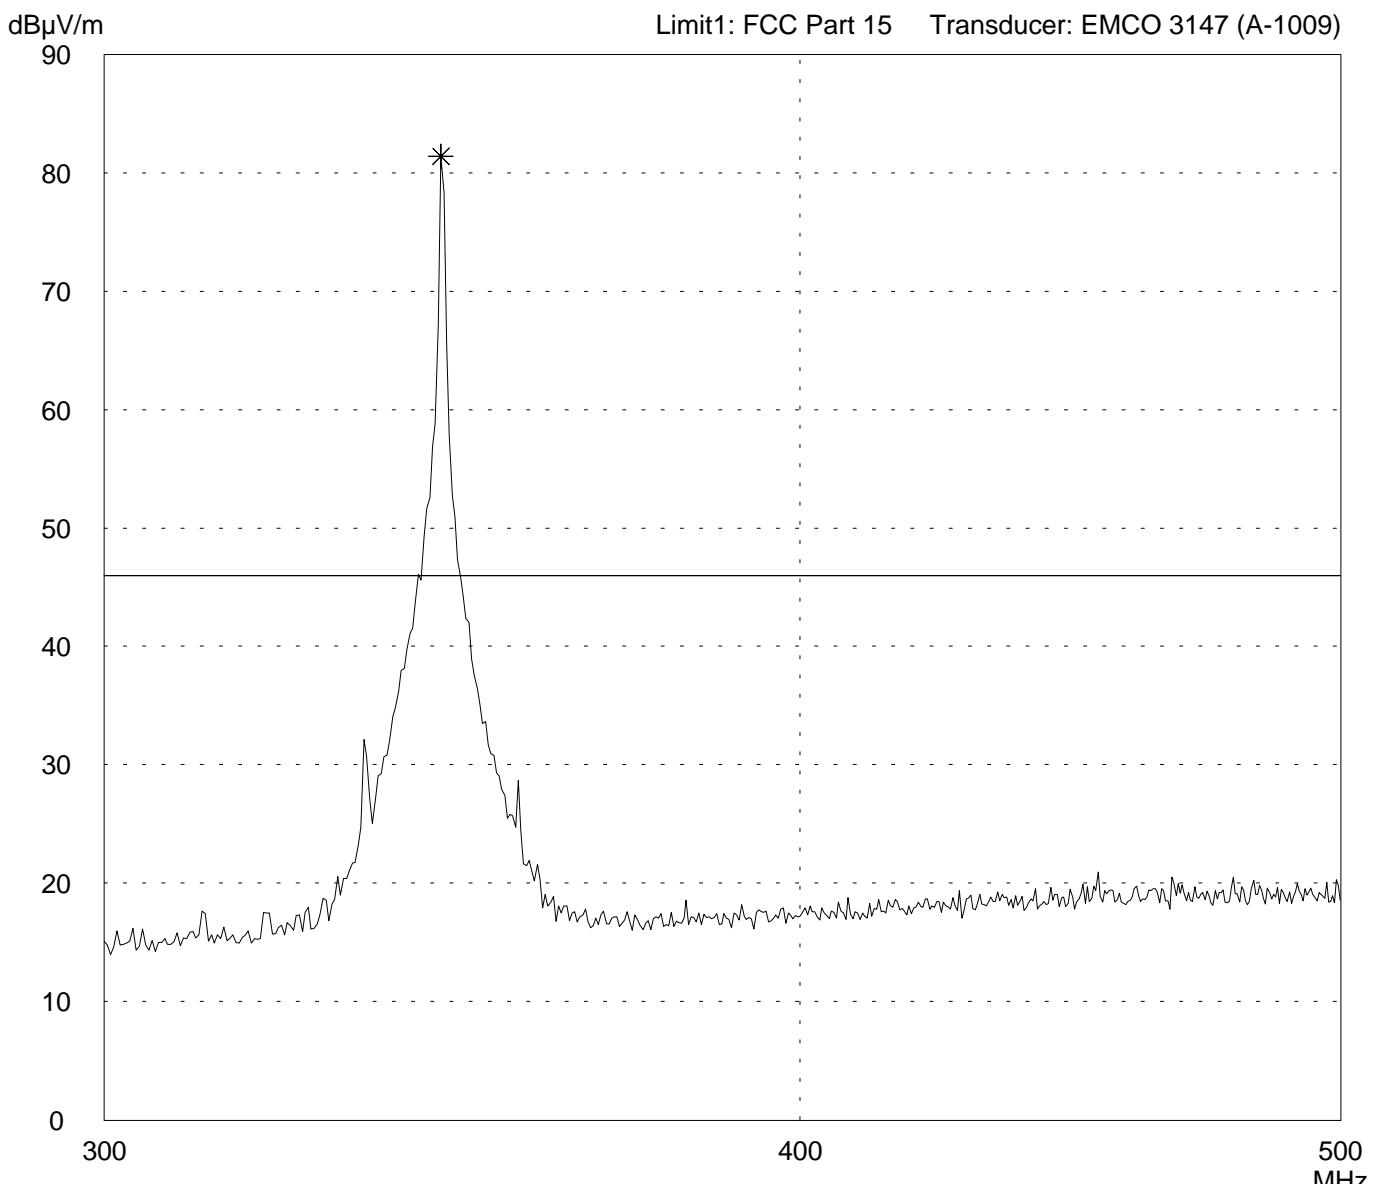

Result: Prescan	Project file: 50530-30654	Page <input type="text"/> of <input type="text"/> Pages
---------------------------	-------------------------------------	---

Radiated Emission Test 300 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT on long side - transmitting continuously
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

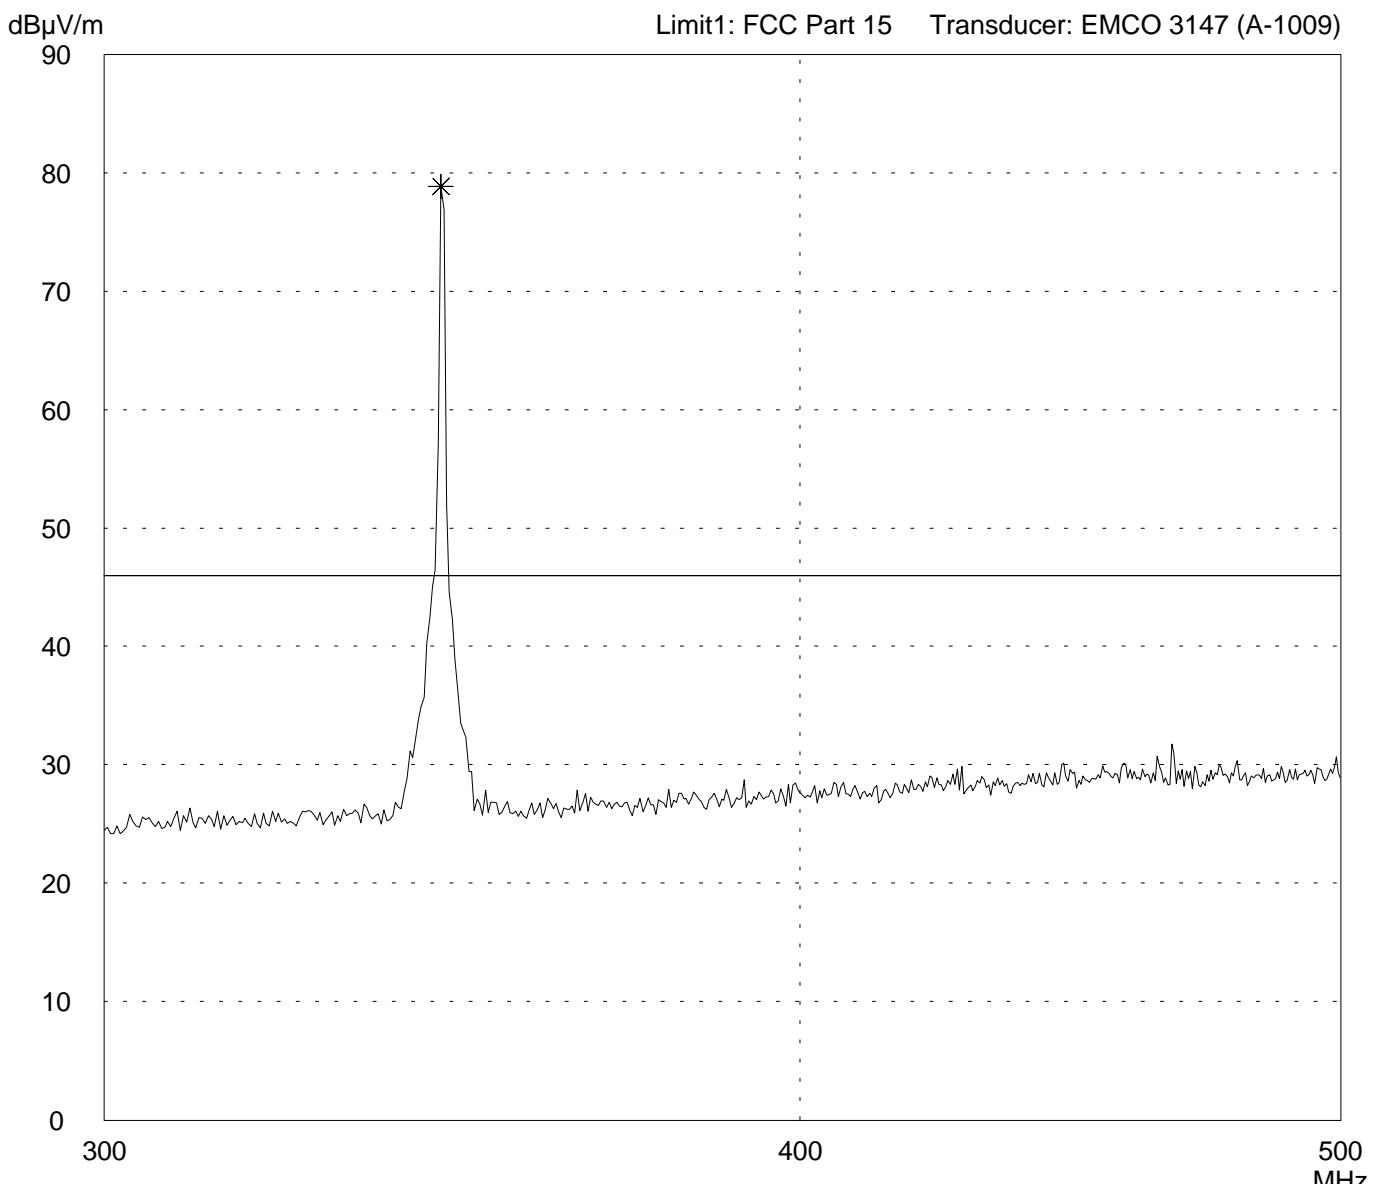

Result: Prescan	Project file: 50530-30654	Page of Pages
---------------------------	-------------------------------------	-------------------------

Radiated Emission Test 300 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT on long side - transmitting continuously
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

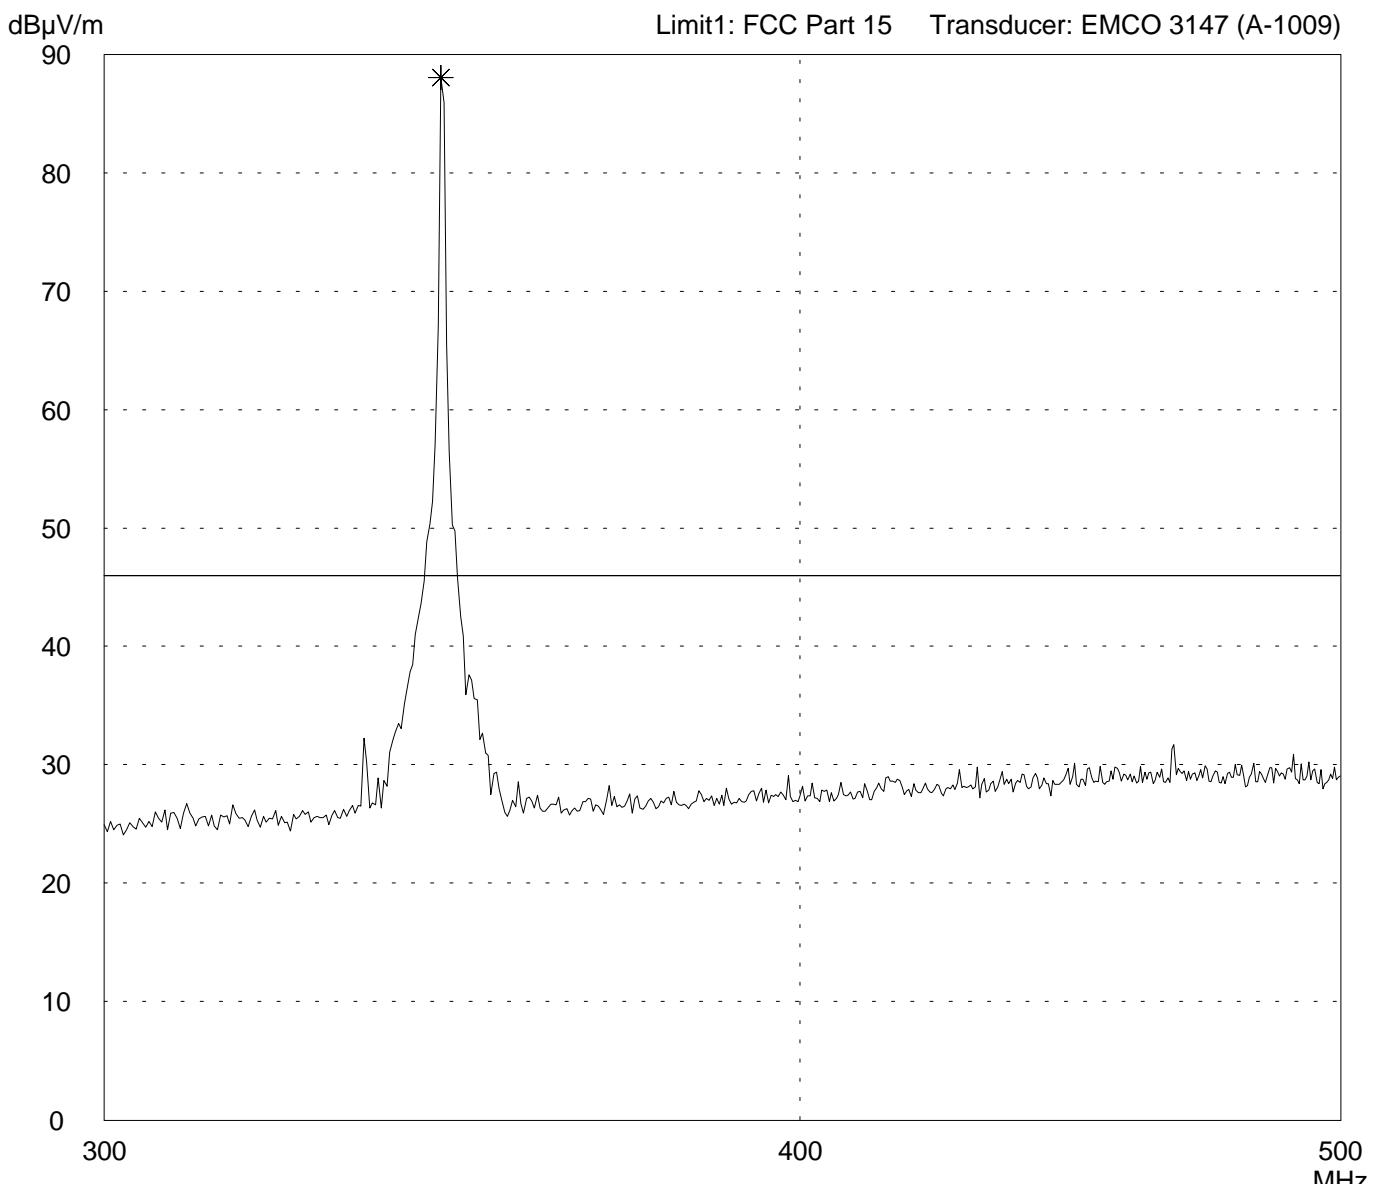

Result: Prescan	Project file: 50530-30654	Page of Pages
---------------------------	-------------------------------------	-------------------------

Radiated Emission Test 300 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)


Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT in upright position - transmitting continuously
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

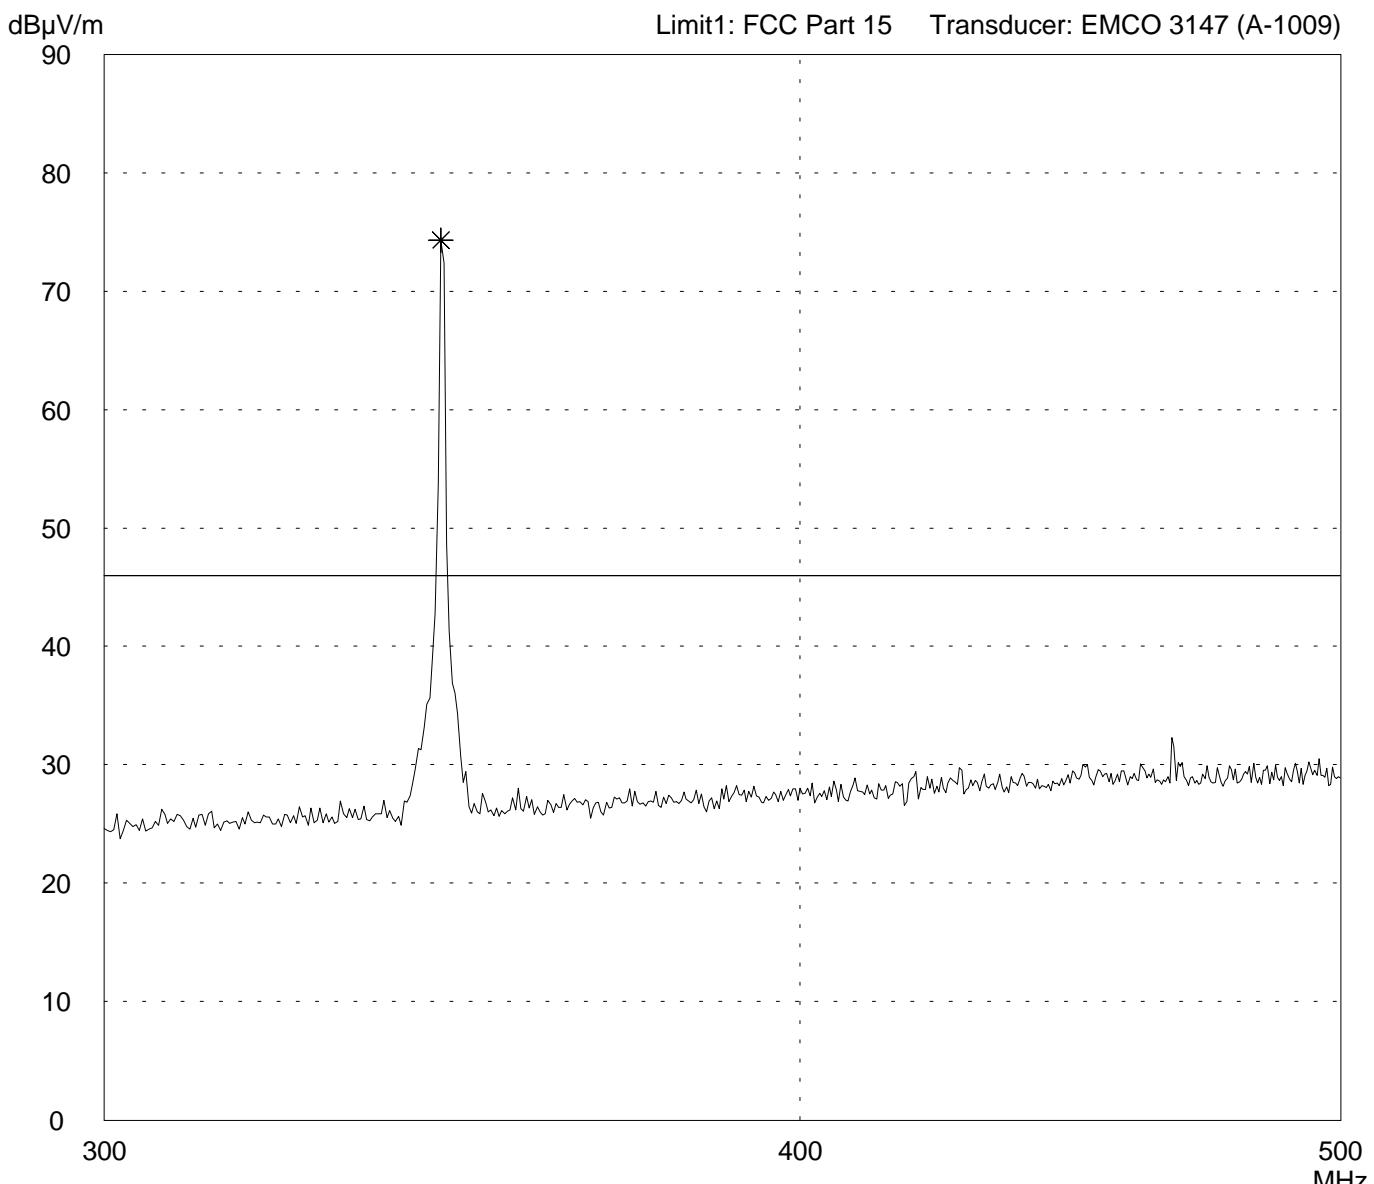

Result: Prescan	Project file: 50530-30654	Page <input type="text"/> of <input type="text"/> Pages
---------------------------	-------------------------------------	---

Radiated Emission Test 300 MHz - 500 MHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT in upright position - transmitting continuously
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

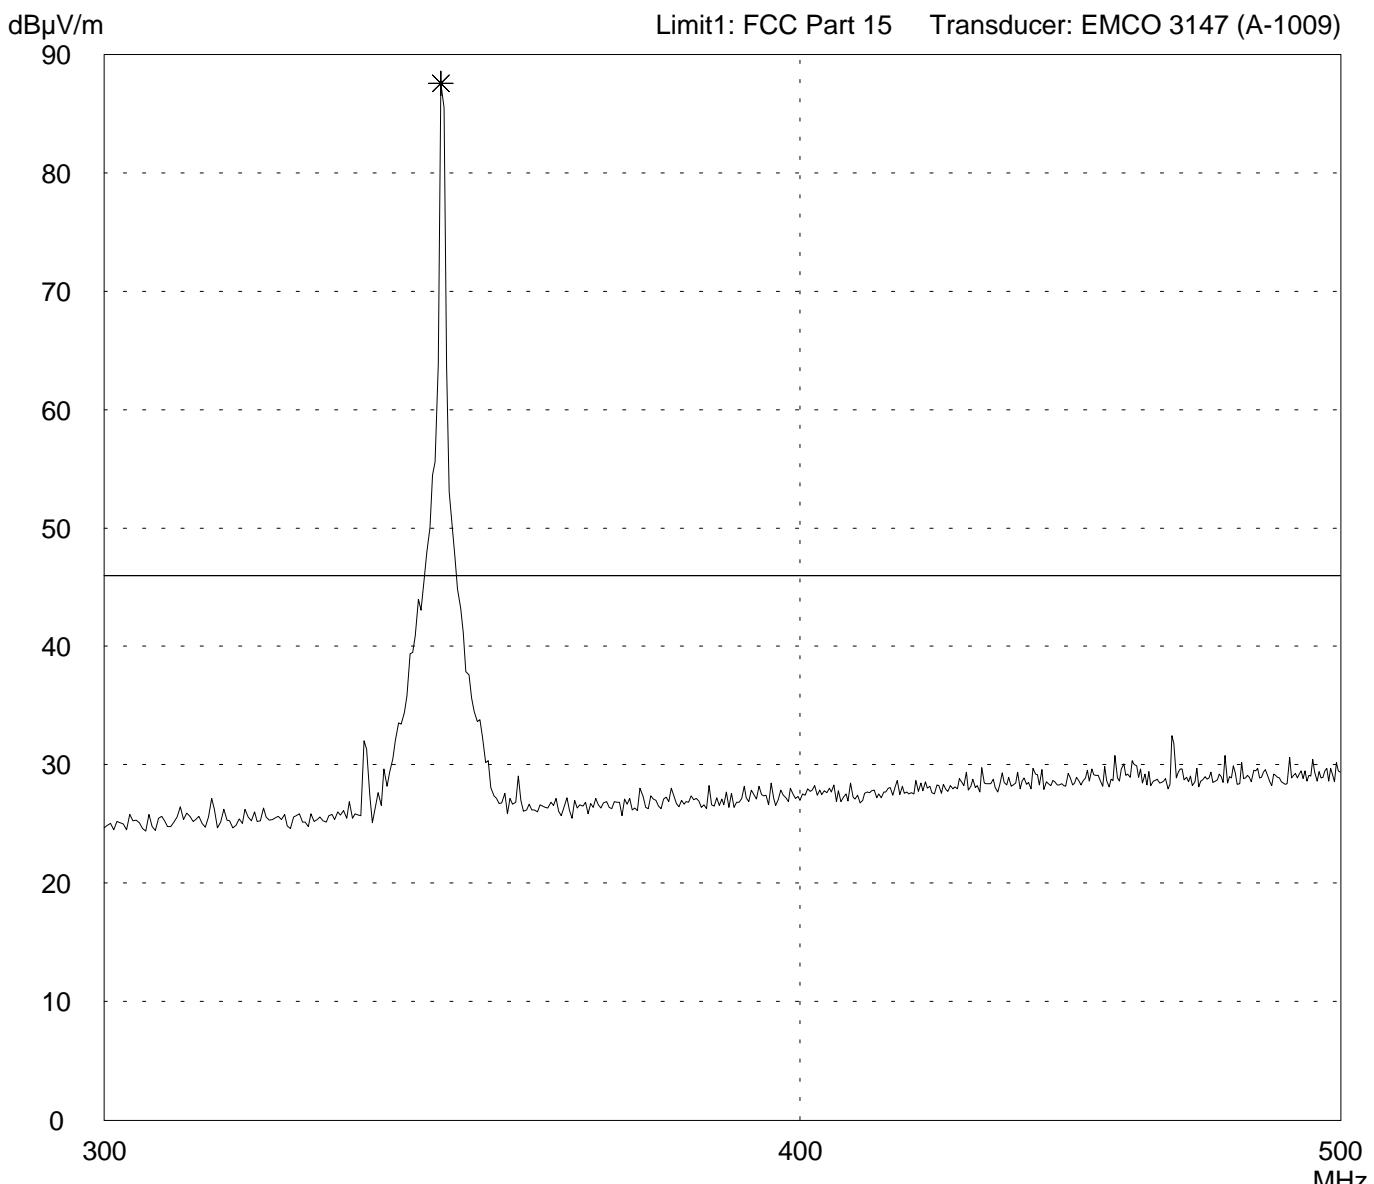


Result: Prescan	Project file: 50530-30654	Page of Pages
---------------------------	-------------------------------------	-----------------------------------

Radiated Emission Test 500 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT on long side - transmitting continuously
Applicant: Eldat GmbH	- note: with WHKS500-10SS high pass filter
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin	50 Subranges
--------------------------	--	---------------------

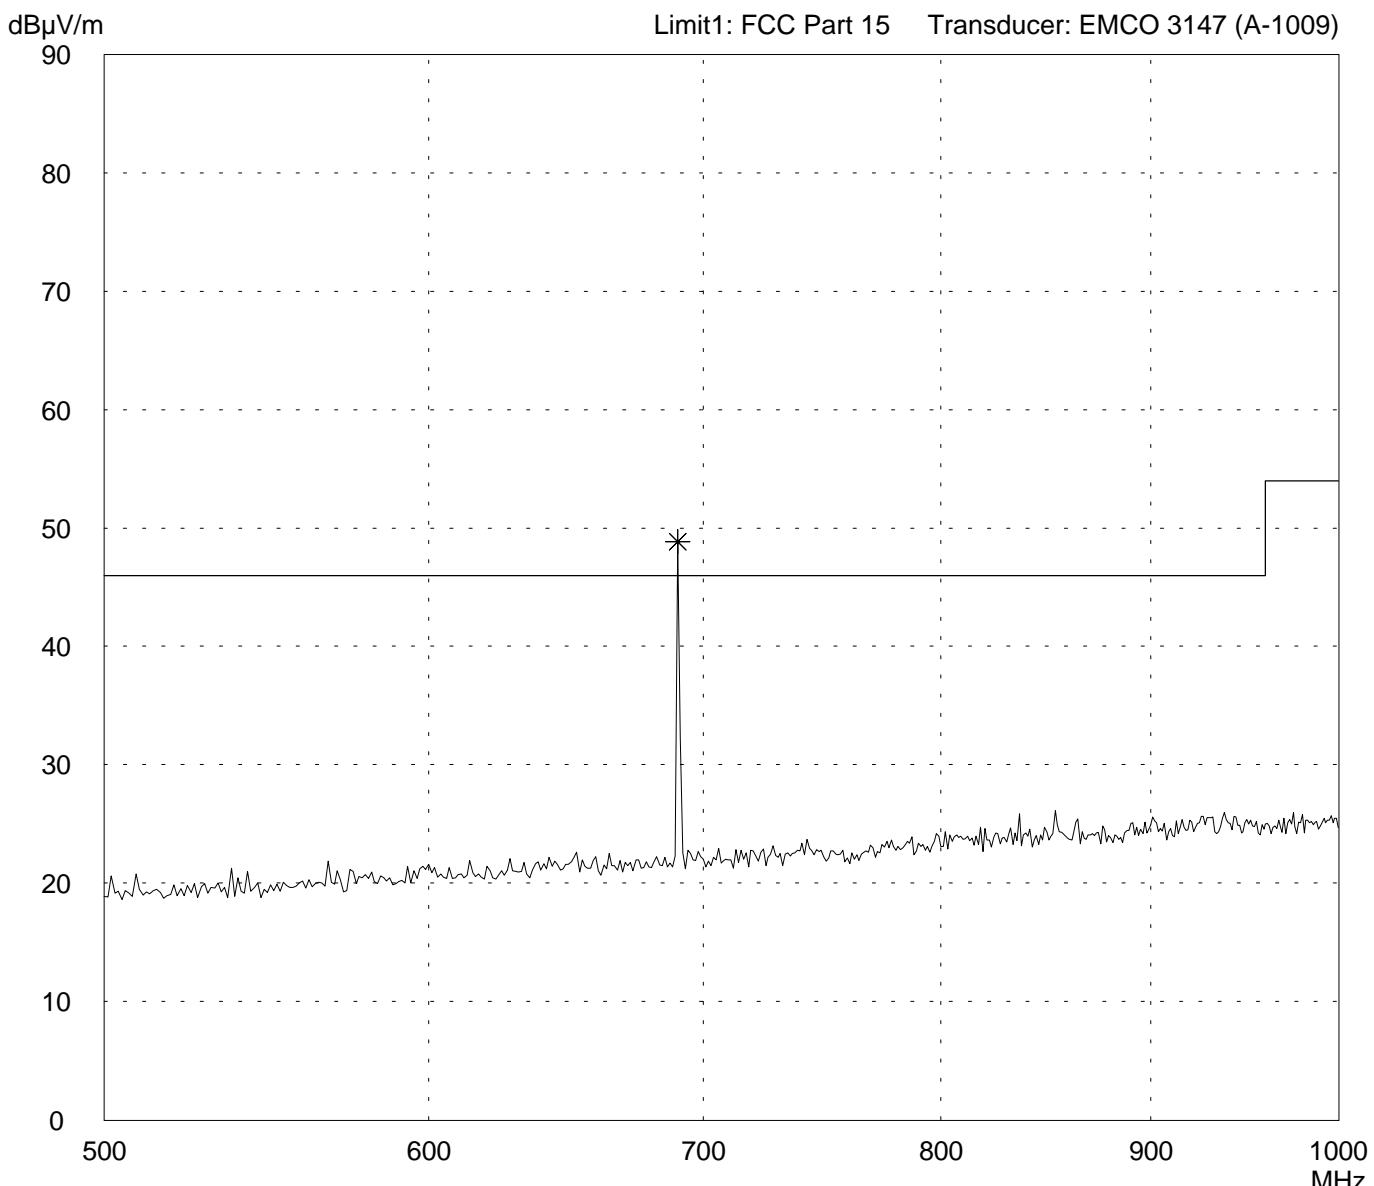

Result: Prescan	Project file: 50530-30654	Page of Pages
---------------------------	-------------------------------------	-------------------------


Radiated Emission Test 500 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment:
Serial no.:	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 01 October 2003	Operator: J. Roidt
Test performed:	File name:

Detector:
Peak

List of values:
10 dB Margin 50 Subranges

dB_UV/m Limit1: FCC Part 15 Transducer: EMCO 3147 (A-1009)

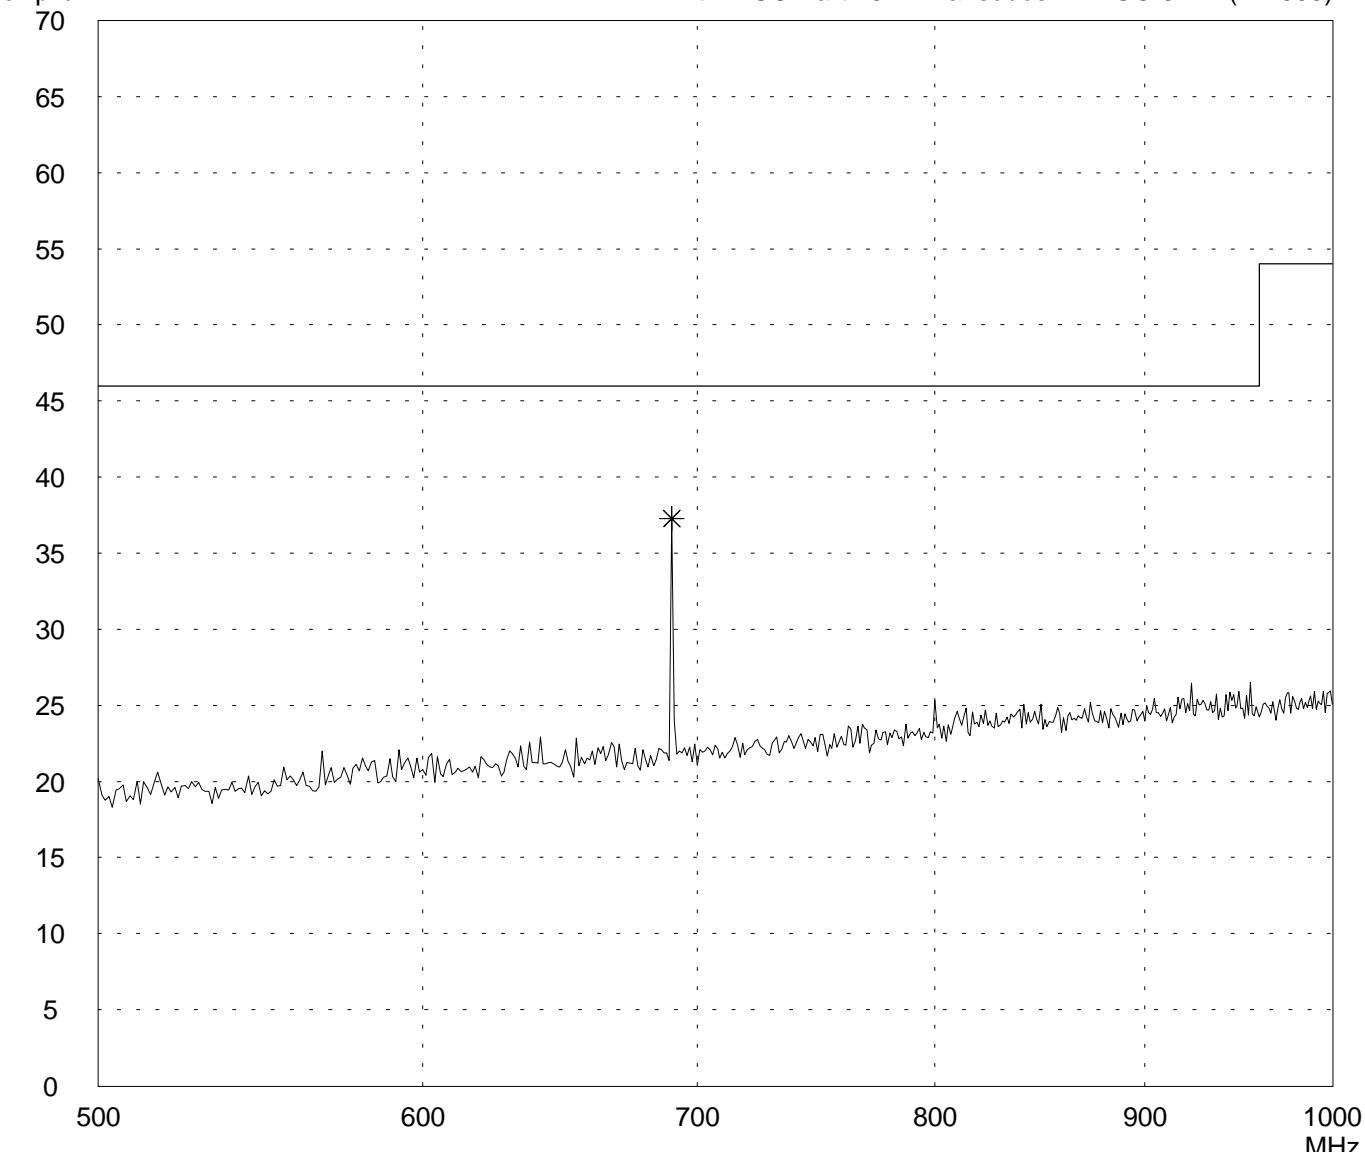

Result:

Project file:
50530-30654

Page _____ of _____ Pages

Radiated Emission Test 500 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment:
Serial no.:	
Applicant: Eldat GmbH	
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 01 October 2003	Operator: J. Roidt
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: 10 dB Margin 50 Subranges

dB_{UV}/m

Peak

List of values:


50 Subranges

dB μ V/m

70

Limit1: FCC Part 15

50 Subranges

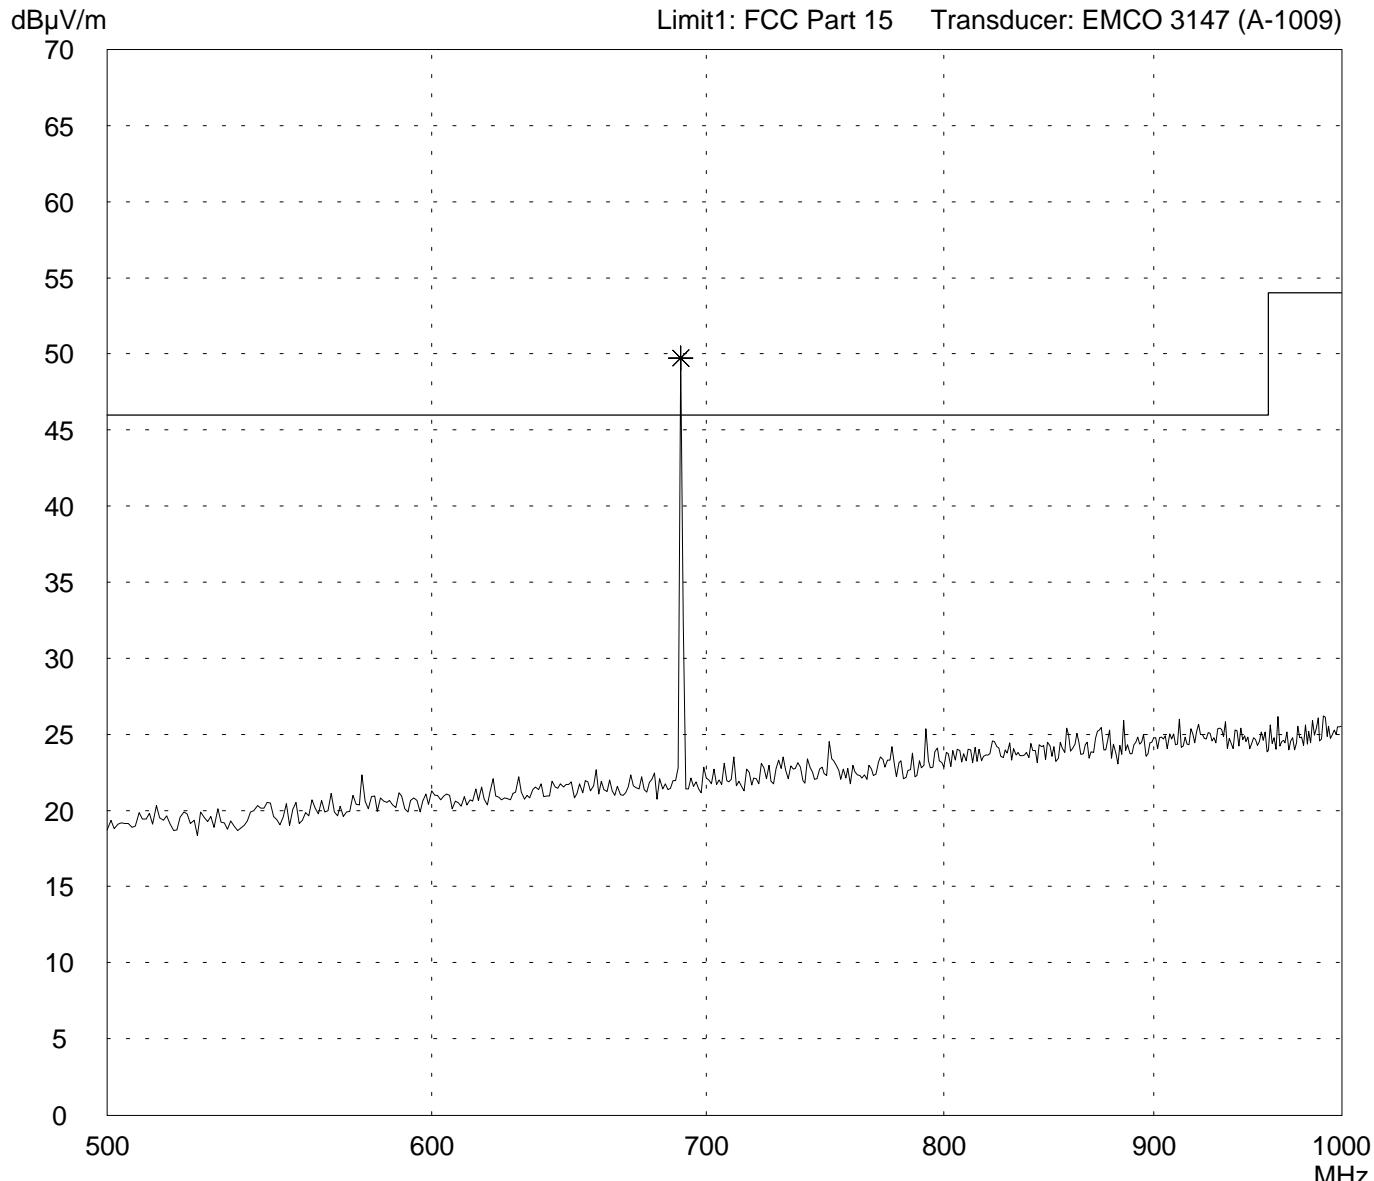

Result:

Prescan

Project file:

50530-30654


Page _____ of _____ Pages

Radiated Emission Test 500 MHz - 1 GHz

acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:	Comment:	
Keypad Compact 345 MHz	- 2 x 1.5 V lithium battery supply	
Serial no.:	- EUT on long side	
0001	- transmitting continuously	
Applicant:	- note: with WHKS500-10SS high pass filter	
Eldat GmbH		
Test site:		
Fully anechoic room, cabin no. 2		
Tested on:		
Test distance 3 metres		
Vertical Polarization		
Date of test:	Operator:	
10/08/2003	M. Steindl	
Test performed:	File name:	
automatically	default.emi	

Detector:	List of values:	
Peak	10 dB Margin	50 Subranges

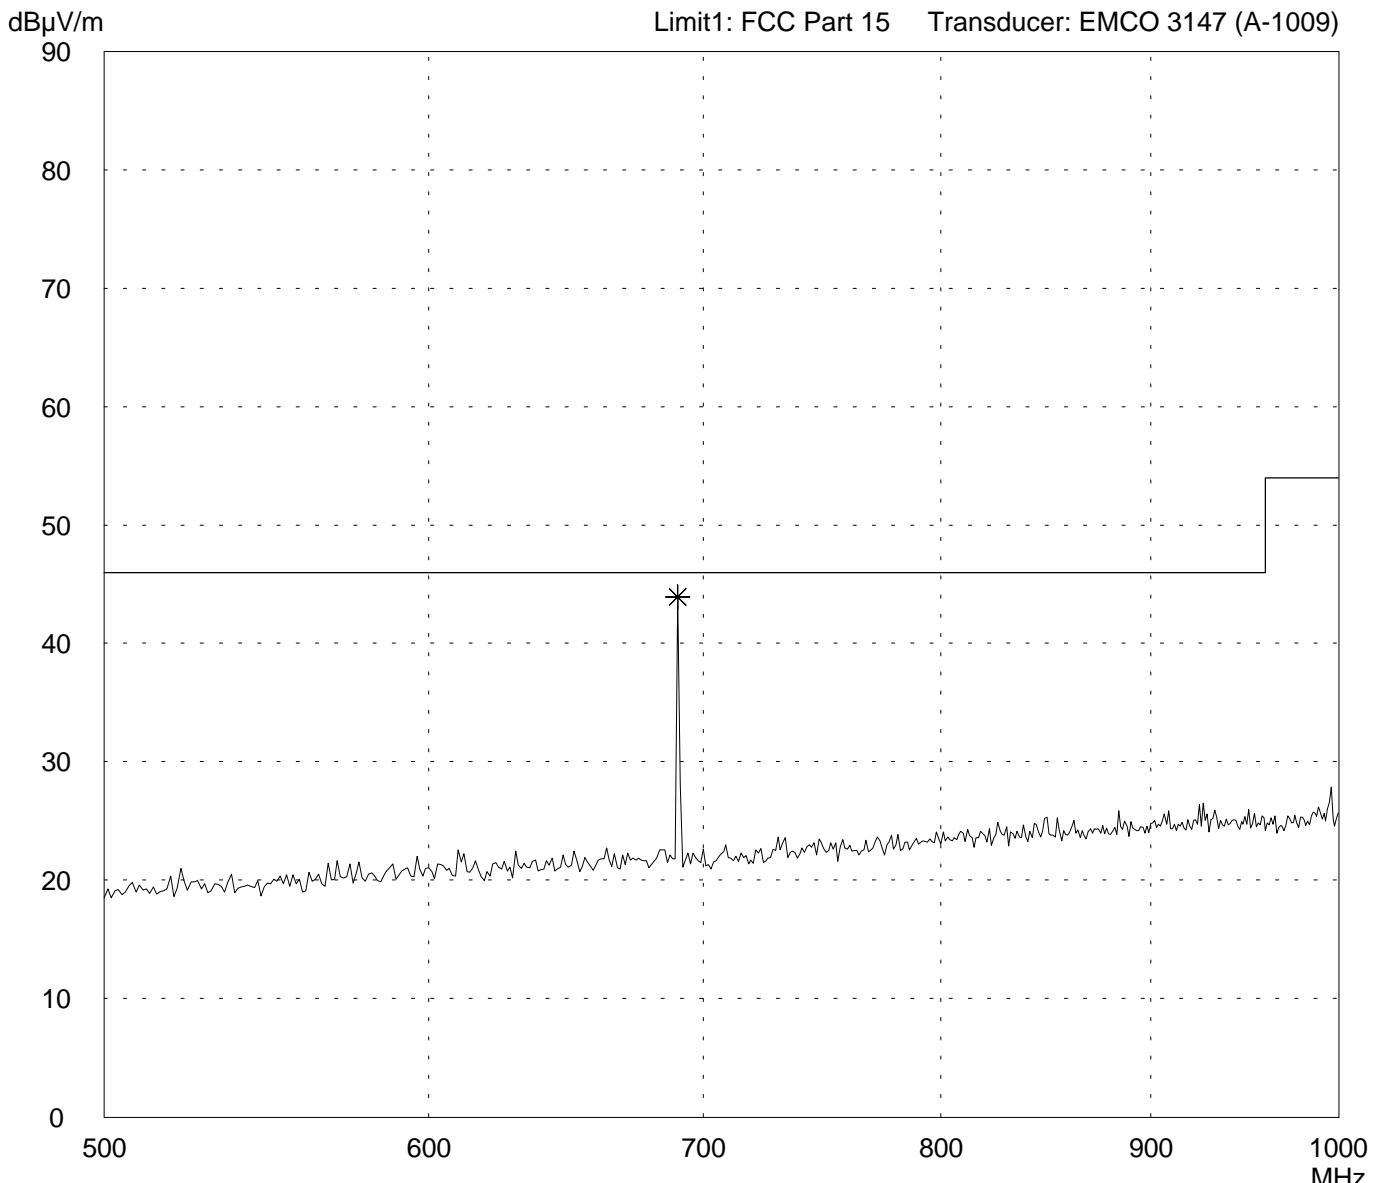


Result:	Project file:	Page	of	Pages
Prescan	50530-30654			

Radiated Emission Test 500 MHz - 1 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT in upright position - transmitting continuously
Applicant: Eldat GmbH	- note: with WHKS500-10SS high pass filter
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/08/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi

Detector: Peak	List of values: 10 dB Margin	50 Subranges
--------------------------	--	---------------------

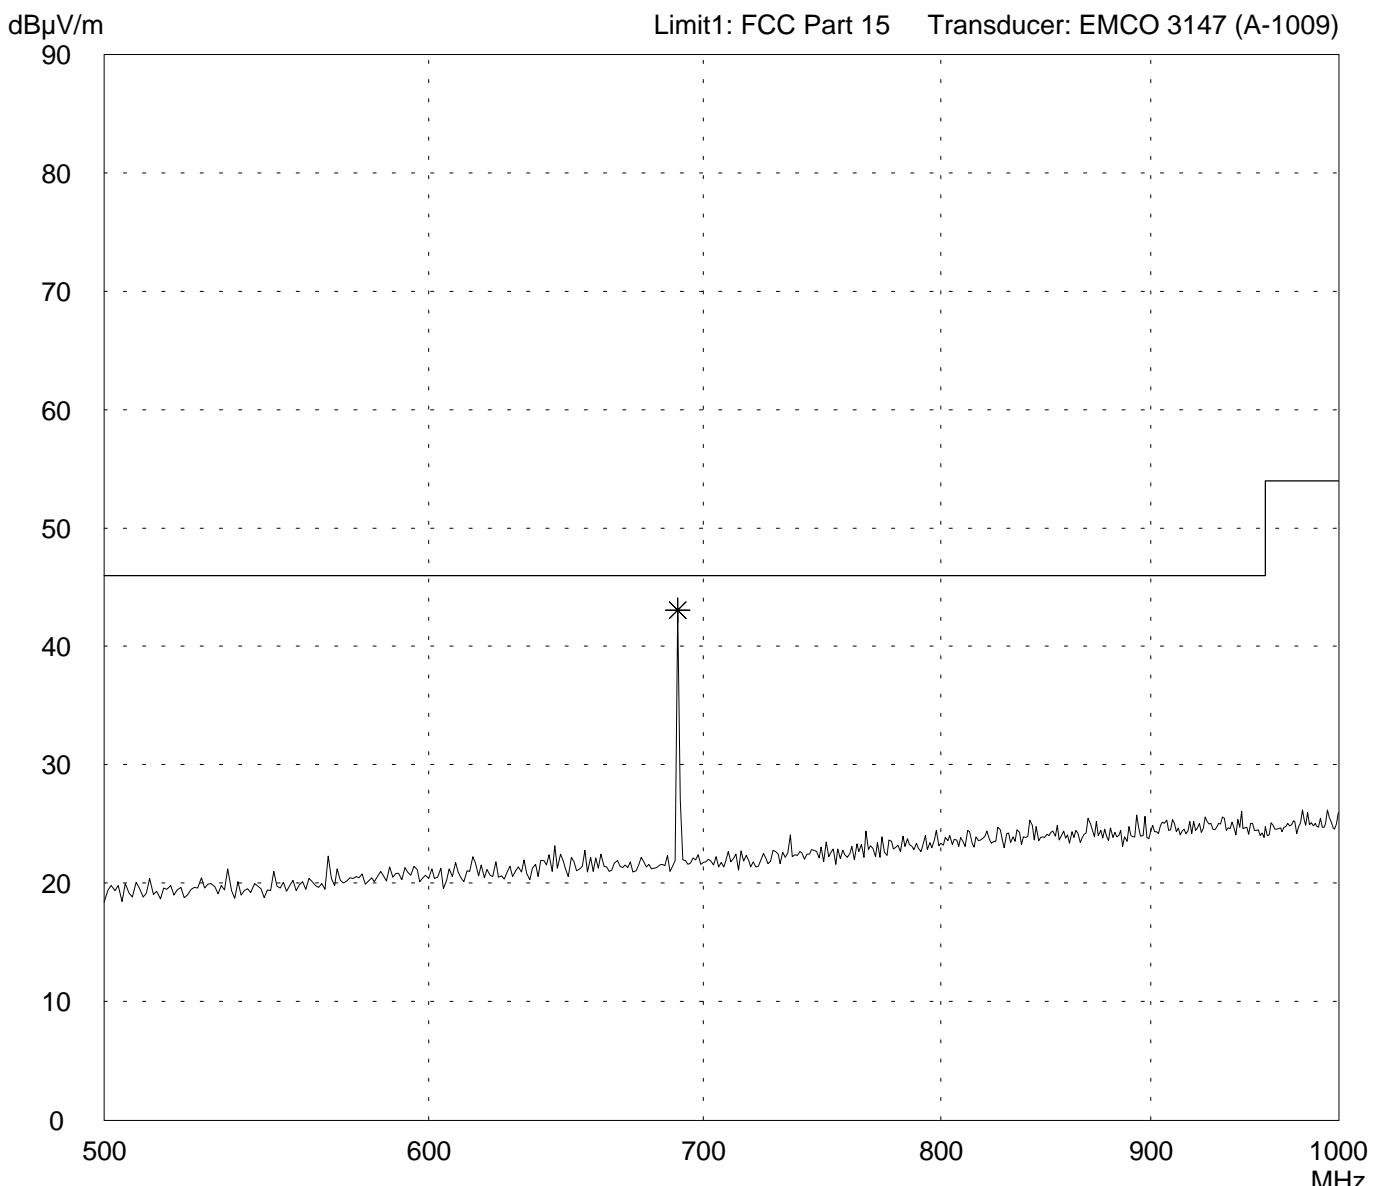


Result: Prescan	Project file: 50530-30654	Page of Pages
---------------------------	-------------------------------------	-------------------------

Radiated Emission Test 500 MHz - 1 GHz

acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:	Comment:	
Keypad Compact 345 MHz	<ul style="list-style-type: none"> - 2 x 1.5 V lithium battery supply 	
Serial no.:	<ul style="list-style-type: none"> - EUT in upright position 	
0001	<ul style="list-style-type: none"> - transmitting continuously 	
Applicant:	<ul style="list-style-type: none"> - note: with WHKS500-10SS high pass filter 	
Eldat GmbH		
Test site:		
Fully anechoic room, cabin no. 2		
Tested on:		
Test distance 3 metres		
Vertical Polarization		
Date of test:	Operator:	
10/08/2003	M. Steindl	
Test performed:	File name:	
automatically	default.emi	


Detector:	List of values:	
Peak	10 dB Margin	50 Subranges

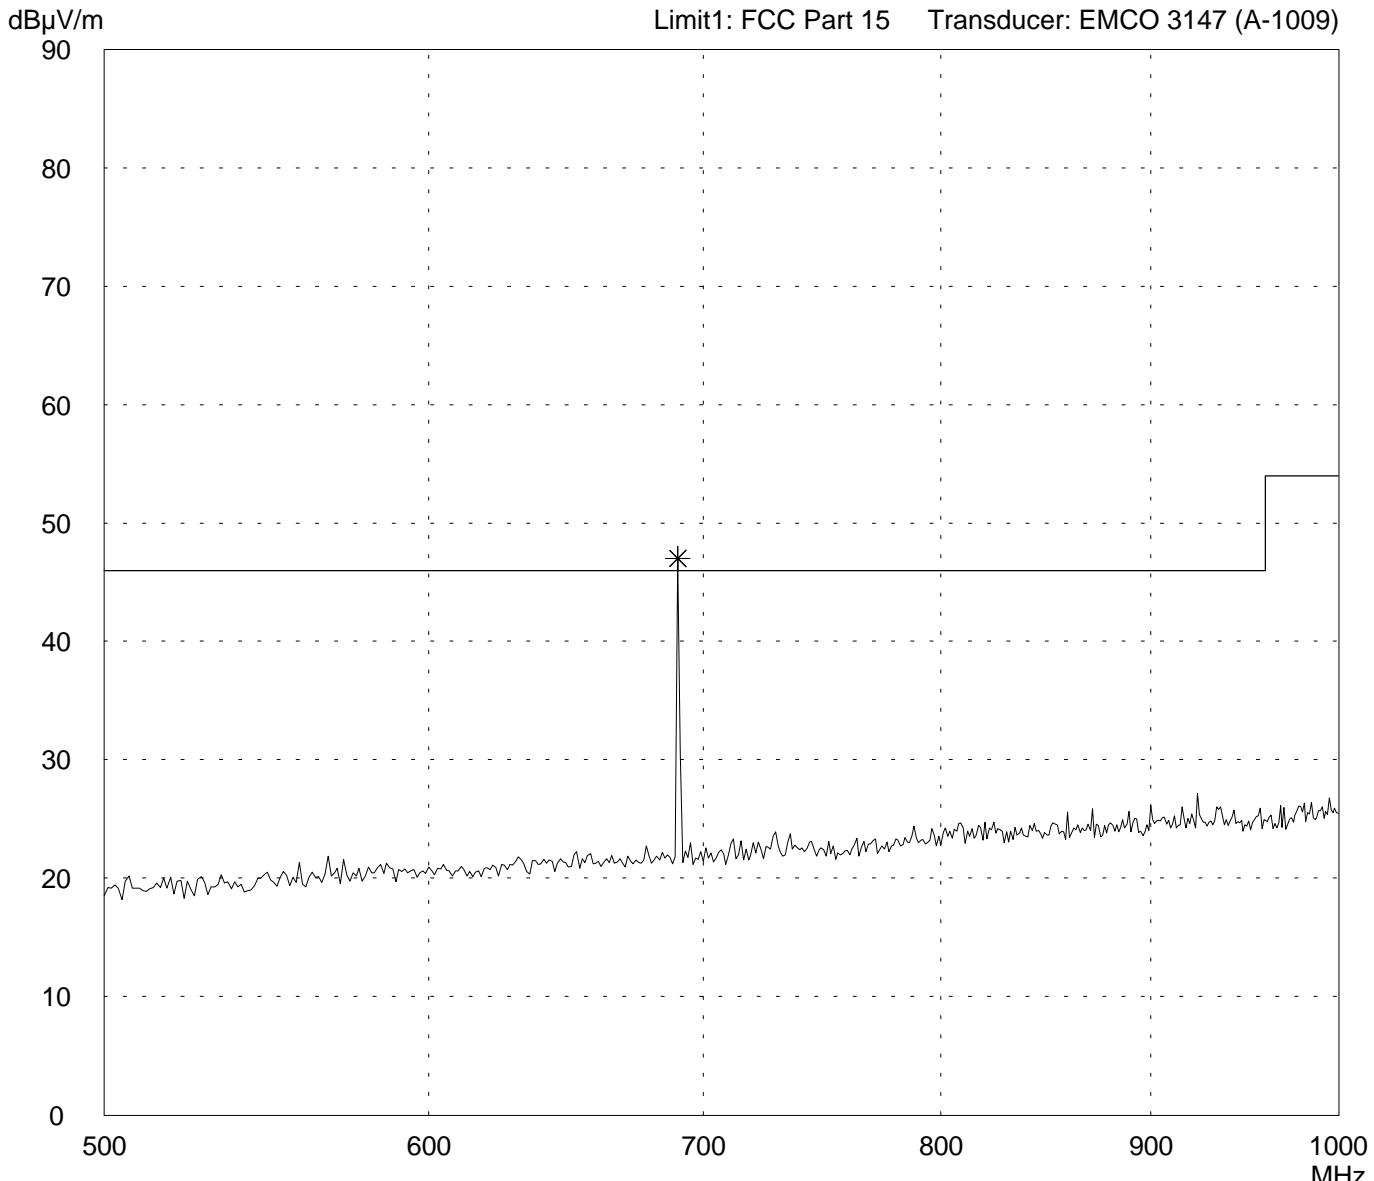

Result:	Project file:	
Prescan	50530-30654	Page of Pages

Radiated Emission Test 1 GHz - 3.5 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT on long side - transmitting continuously
Applicant: Eldat GmbH	- note: with WHKS1000-10SS high pass filter
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Vertical Polarization	
Date of test: 10/09/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

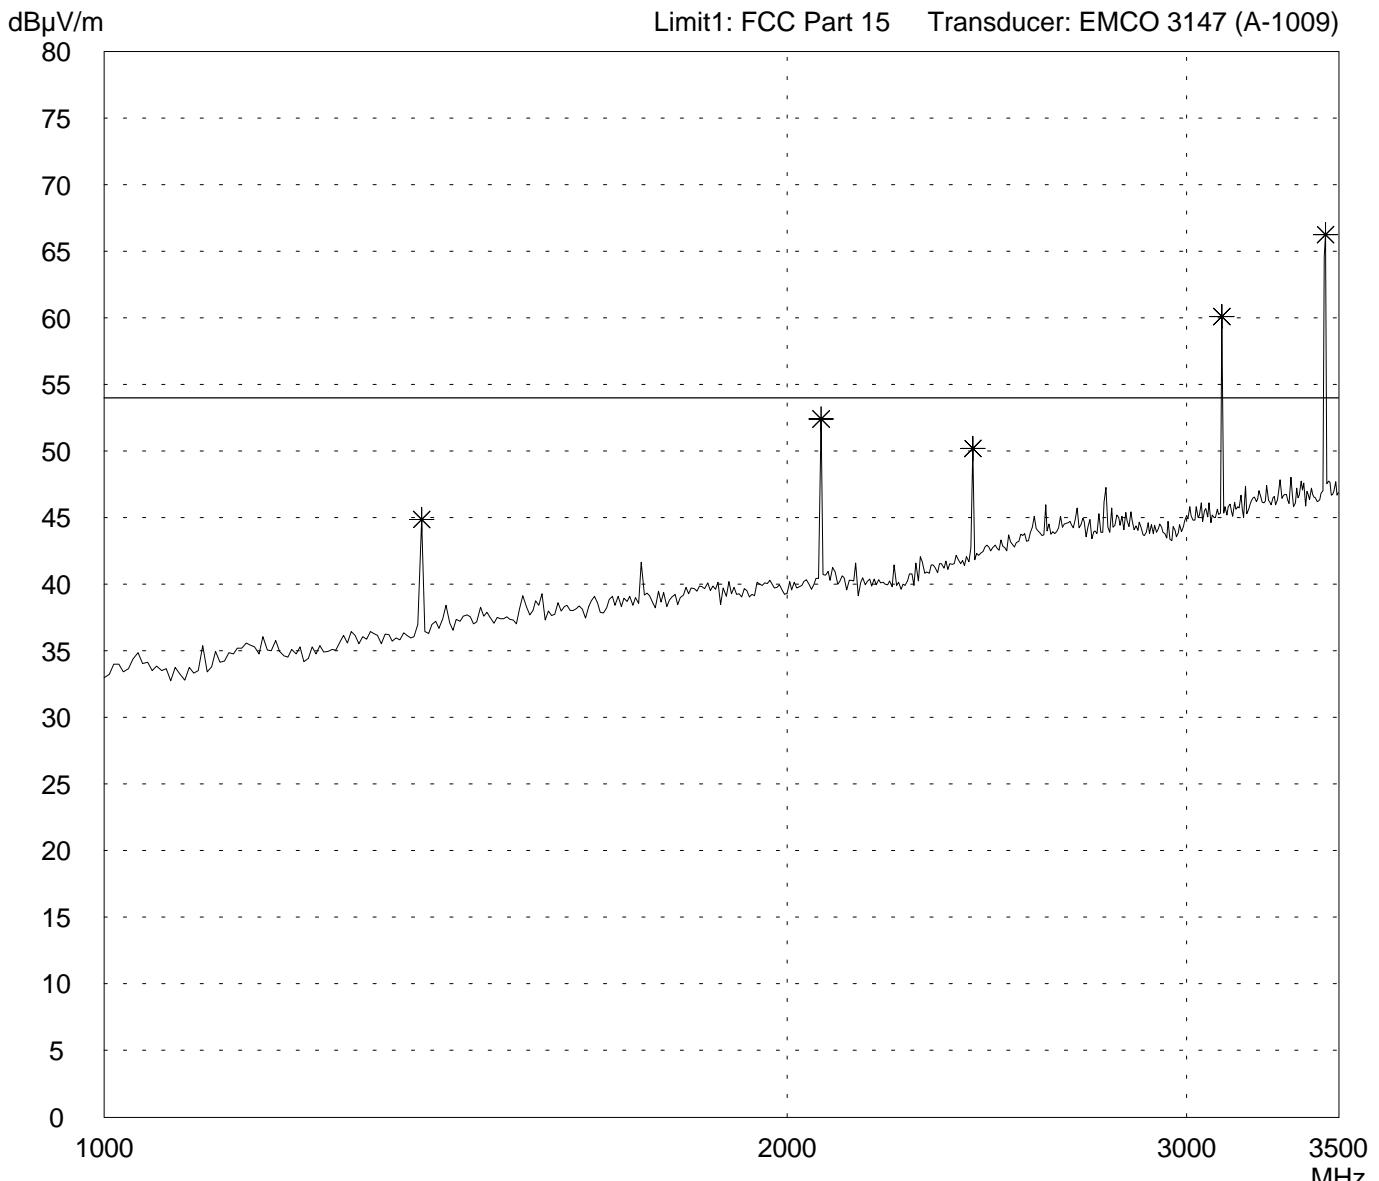

Result: Prescan	Project file: 50530-30654	Page of Pages
---------------------------	-------------------------------------	---


Radiated Emission Test 1 GHz - 3.5 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:		
Keypad Compact 345 MHz		
Serial no.:		
Applicant:		
Eldat GmbH		
Test site:		
Fully anechoic room, cabin no. 2		
Tested on:		
Test distance 3 metres		
Vertical Polarization		
Date of test:	Operator:	
01 October 2003	J. Roidt	
Test performed:	File name:	
automatically	default.emi	

Comment:

Detector:	
Peak	

List of values:
Selected by hand

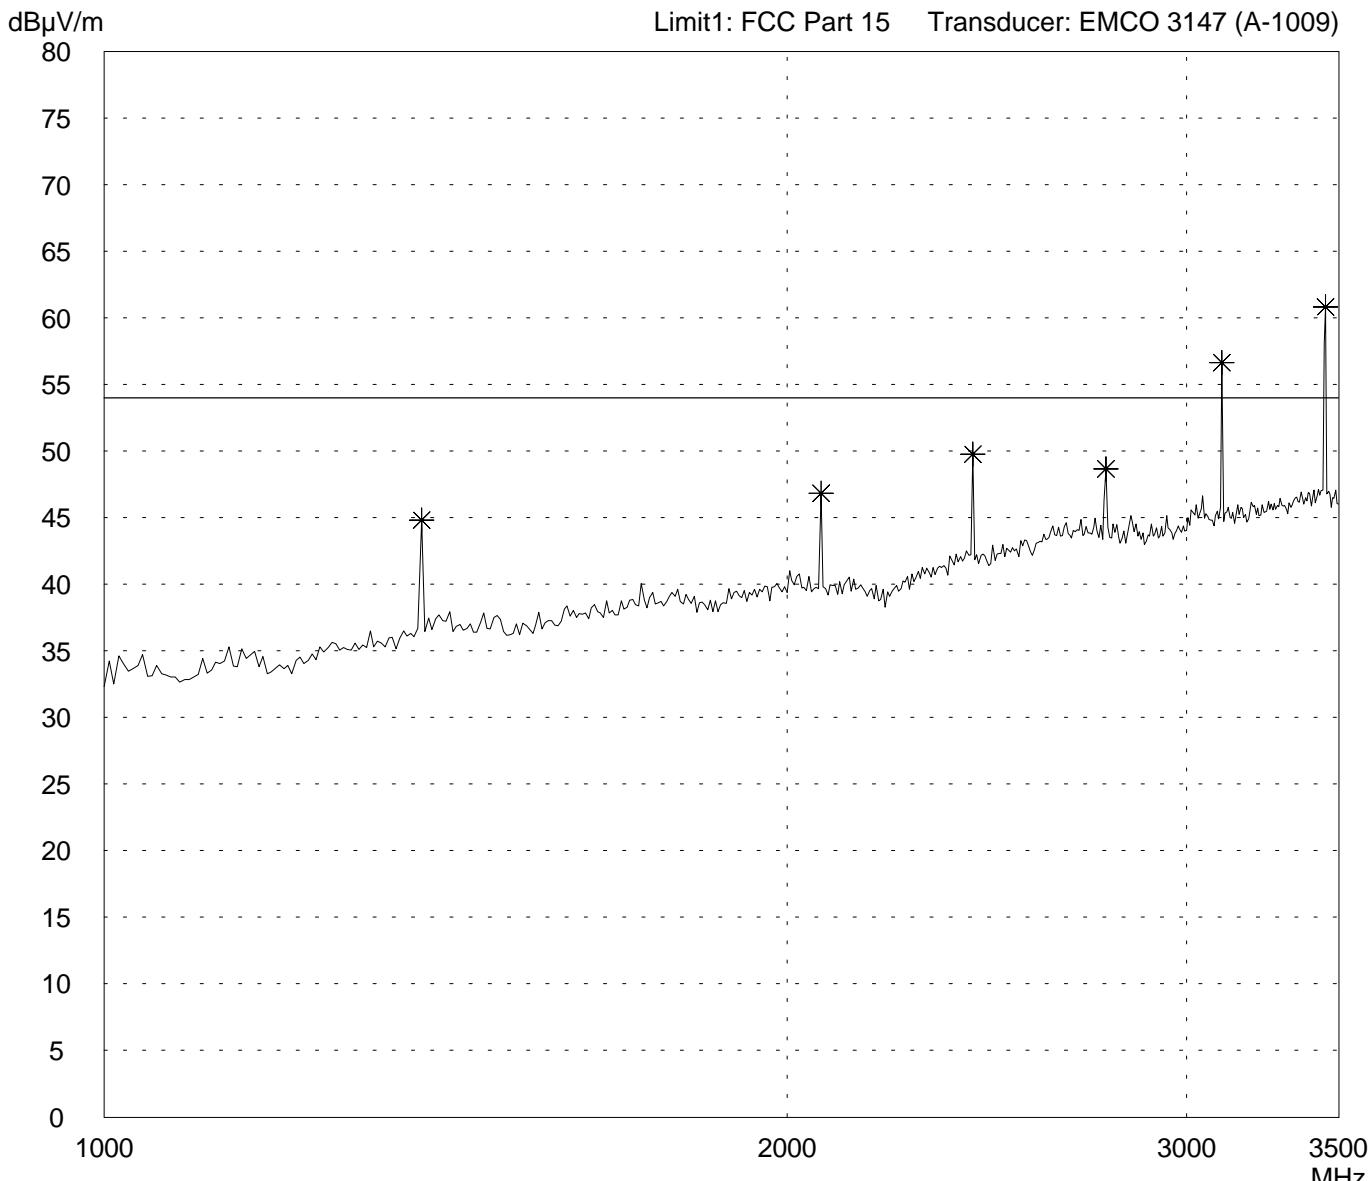


Result:
Prescan

Project file:
50530-30654

Page of Pages

Radiated Emission Test 1 GHz - 3.5 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT on long side - transmitting continuously
Applicant: Eldat GmbH	- note: with WHKS1000-10SS high pass filter
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/09/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

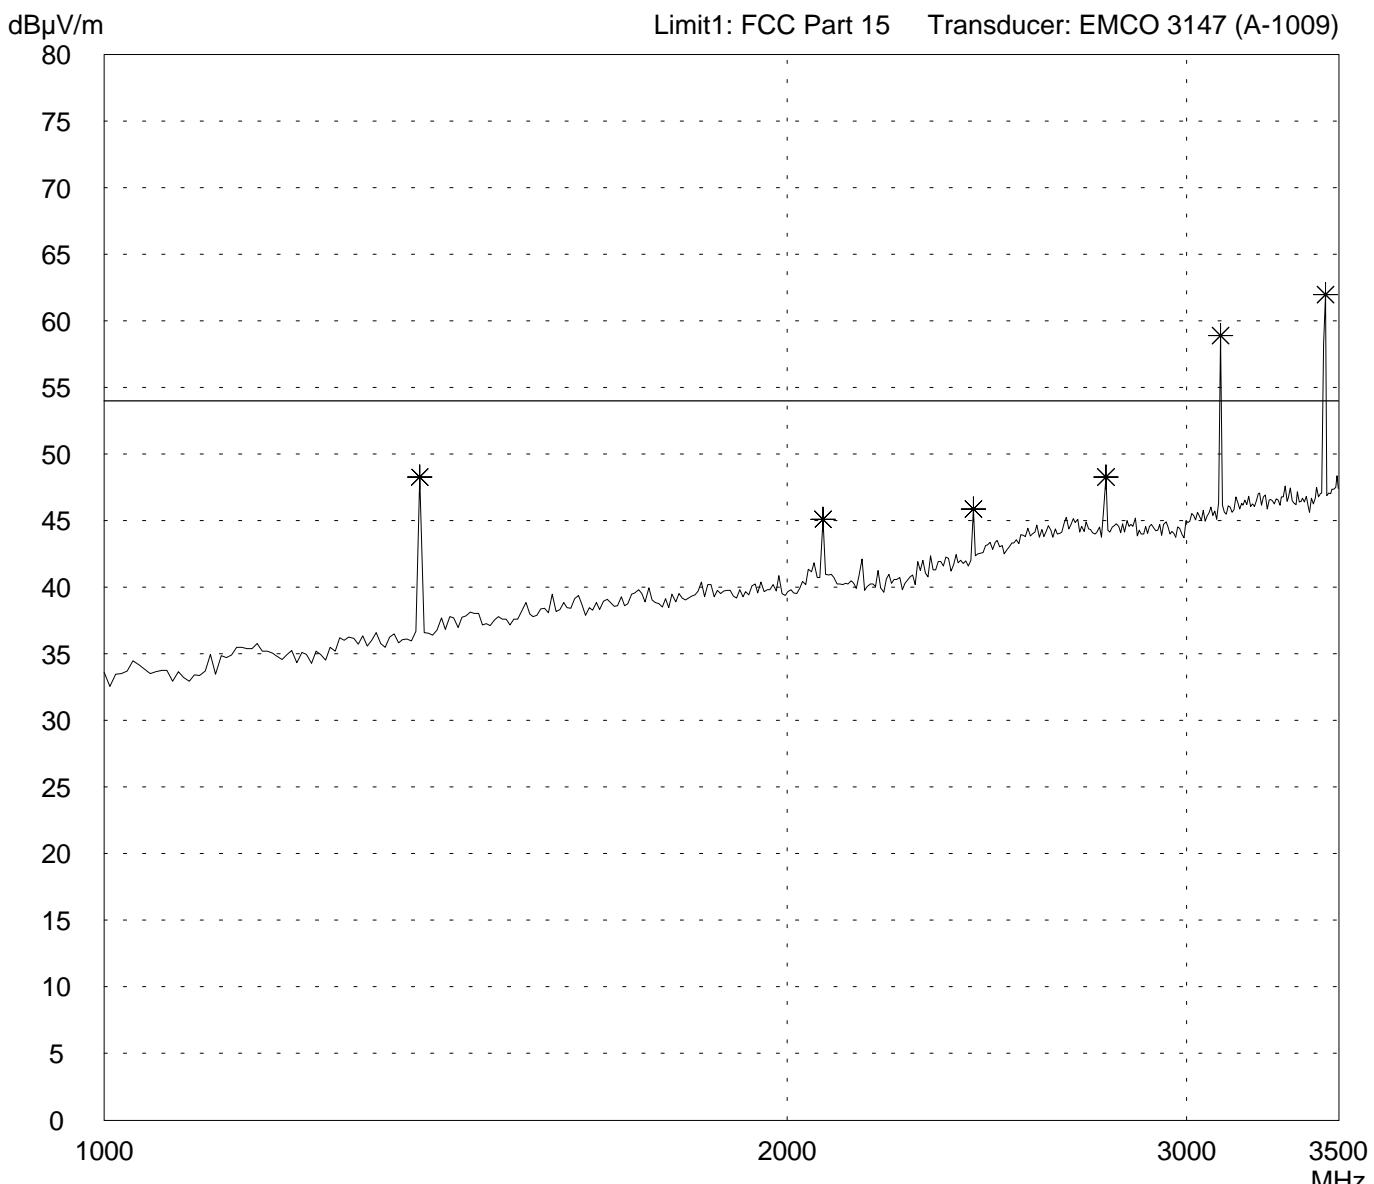

Result:
Prescan

Project file:
50530-30654

Page of Pages


**Radiated Emission Test 1 GHz - 3.5 GHz
acc. to FCC Part 15 (Fully Anechoic Chamber)**

Model:		
Keypad Compact 345 MHz		
Serial no.:		
Applicant:		
Eldat GmbH		
Test site:		
Fully anechoic room, cabin no. 2		
Tested on:		
Test distance 3 metres		
Horizontal Polarization		
Date of test:	Operator:	
01 October 2003	J. Roidt	
Test performed:	File name:	
automatically	default.emi	

Comment:

Detector:	
Peak	

List of values:
Selected by hand

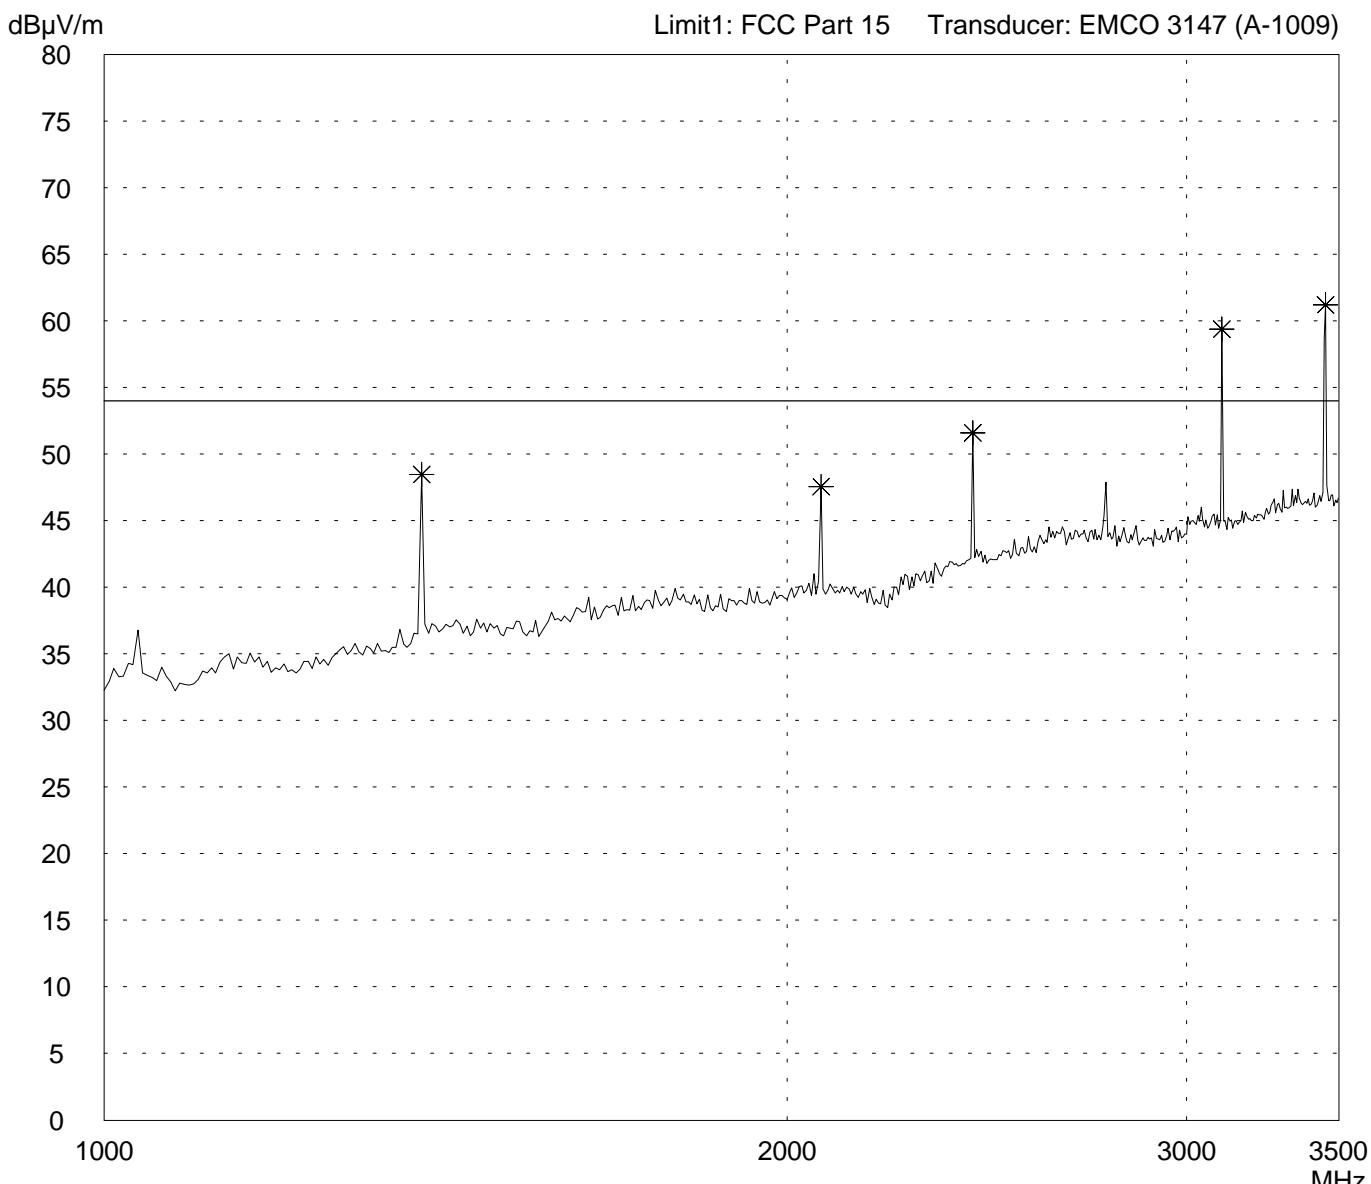


Result:			
Prescan			

Project file:
50530-30654 Page of Pages

Radiated Emission Test 1 GHz - 3.5 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model: Keypad Compact 345 MHz	Comment: - 2 x 1.5 V lithium battery supply
Serial no.: 0001	- EUT in upright position - transmitting continuously
Applicant: Eldat GmbH	- note: with WHKS1000-10SS high pass filter
Test site: Fully anechoic room, cabin no. 2	
Tested on: Test distance 3 metres Horizontal Polarization	
Date of test: 10/09/2003	Operator: M. Steindl
Test performed: automatically	File name: default.emi
Detector: Peak	List of values: Selected by hand

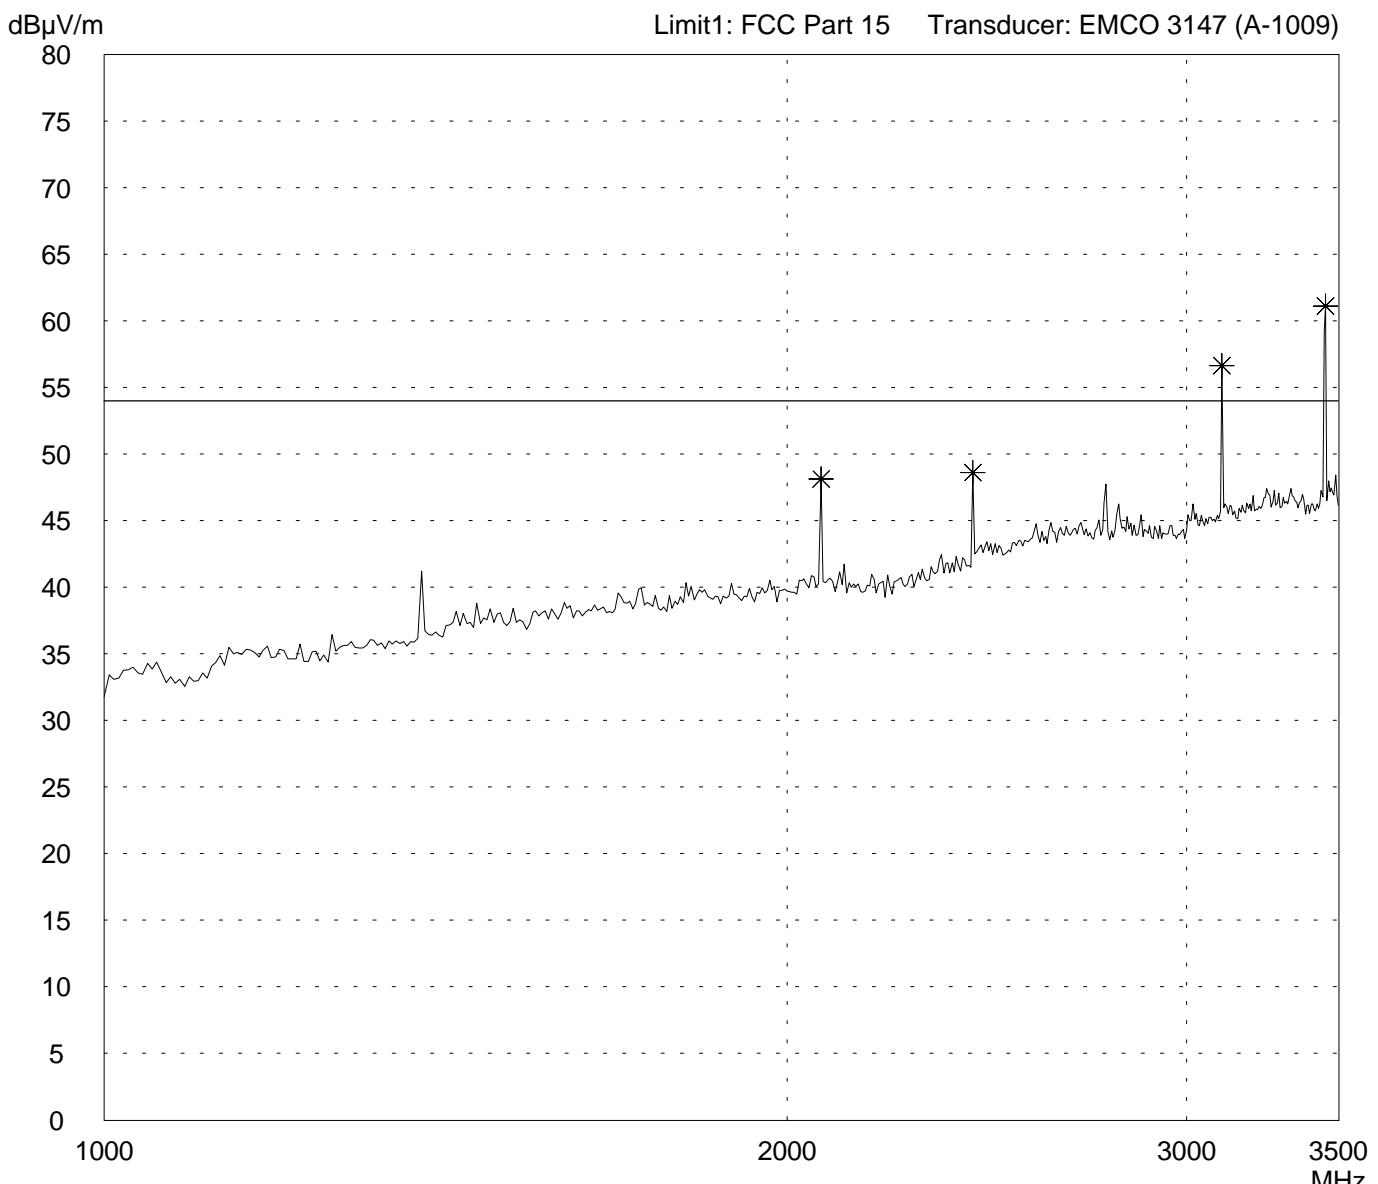


Result: Prescan	Project file: 50530-30654	Page of Pages
---------------------------	-------------------------------------	-------------------------

Radiated Emission Test 1 GHz - 3.5 GHz acc. to FCC Part 15 (Fully Anechoic Chamber)

Model:		
Keypad Compact 345 MHz		
Serial no.:		
0001		
Applicant:		
Eldat GmbH		
Test site:		
Fully anechoic room, cabin no. 2		
Tested on:		
Test distance 3 metres		
Vertical Polarization		
Date of test:	Operator:	
10/09/2003	M. Steindl	
Test performed:	File name:	
automatically	default.emi	

Comment:	
- 2 x 1.5 V lithium battery supply	
- EUT in upright position	
- transmitting continuously	
- note: with WHKS1000-10SS high pass filter	

Detector:	List of values:
Peak	Selected by hand

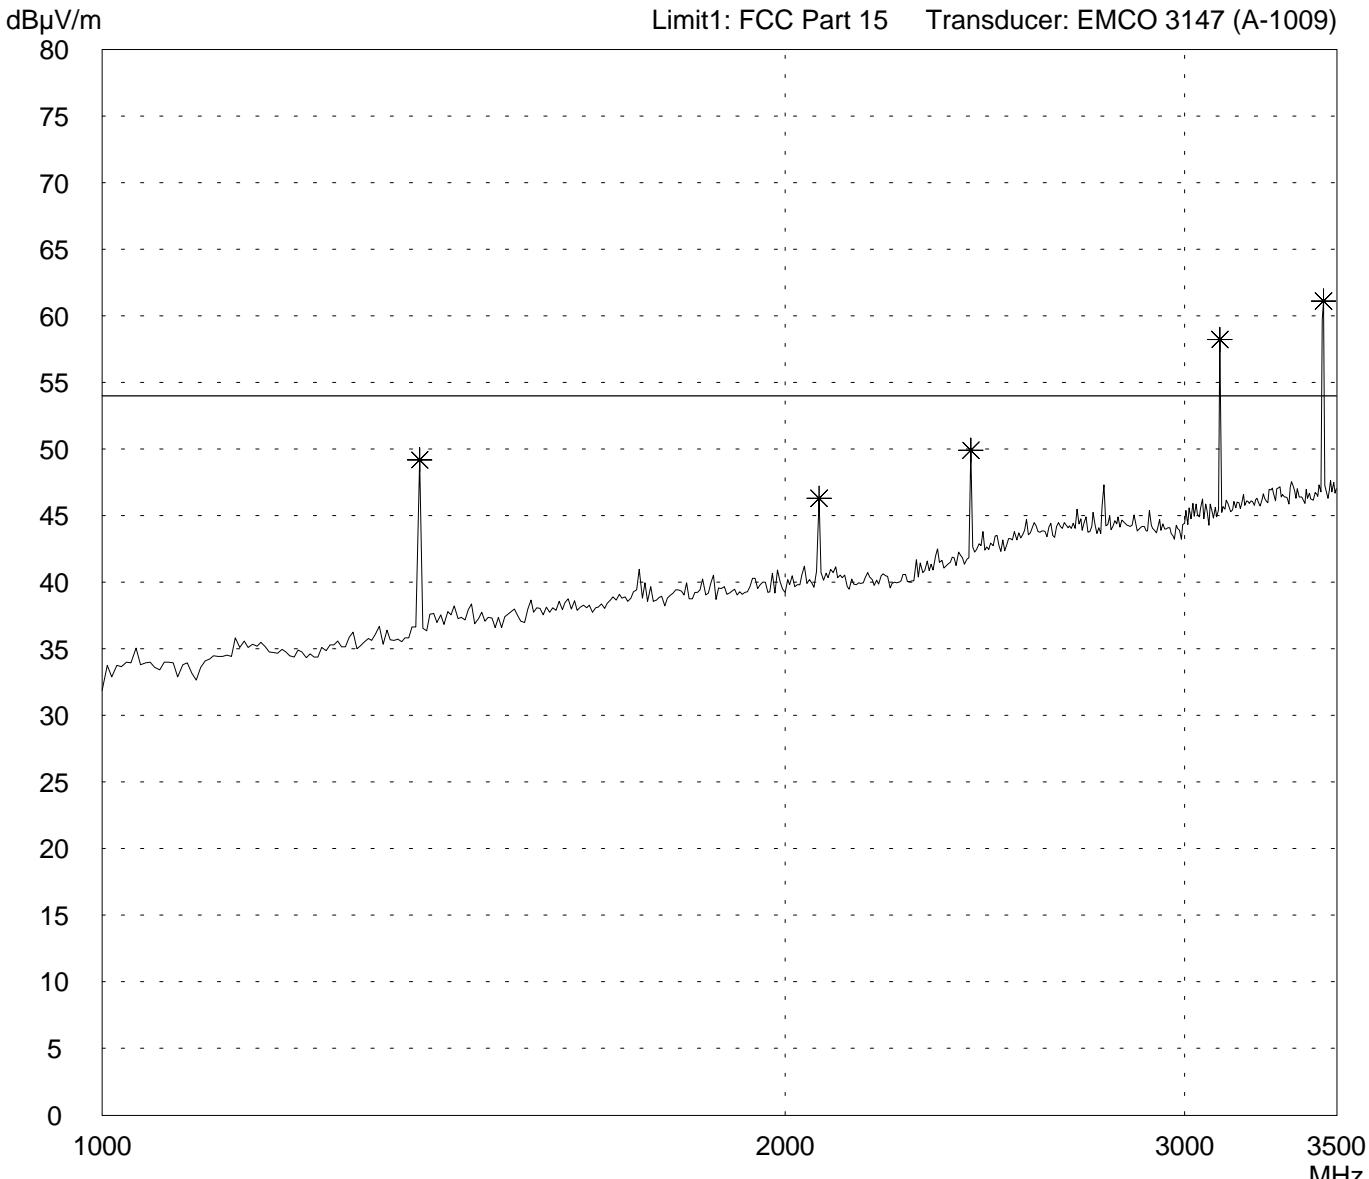

Result:	
Prescan	

Project file:	
50530-30654	

Page of Pages