



REVISIONS			
REV	DESCRIPTION	DATE	APPROVE
A	NEW RELEASE	01/07/19	EDWARD SU

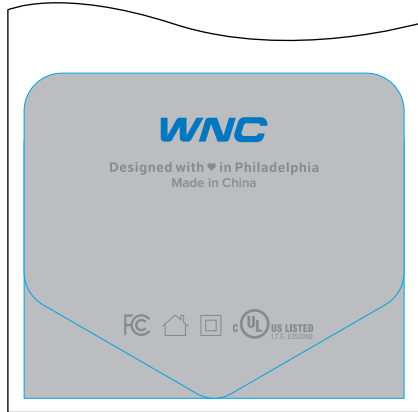

REEL DIRECTION
↓

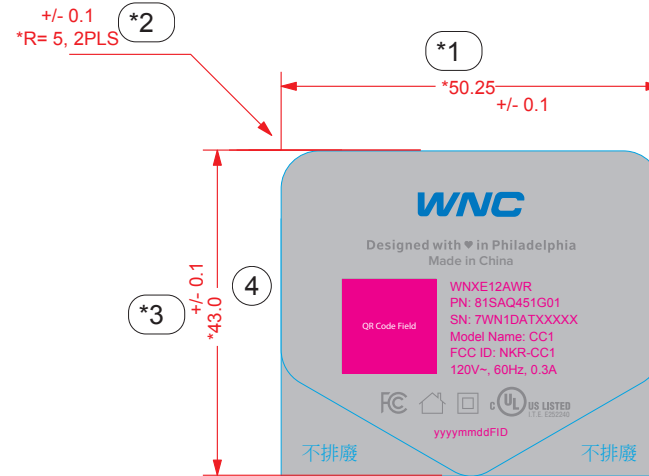

NOTES:

- MATERIAL: WHITE PET(金利宝HTYL50(EB)), t=0.05
ADHESIVE: 網紋背膠, t=0.035
FINISH: 上霧PET(廣爾納T025ATMJ(T)(30)(B), t=0.025
- COLOR:
 - 底色為白色
 - 網版印刷/印刷顏色如圖面標示
- 捲狀出貨, 無須虛刀
- 離型紙左右間距各3±0.5mm, 上下間距各3.0±0.5mm
- 被貼物材質:PC
- UL Approved,PGJ12
須搭配碳帶: Ricoh Company Ltd., Type "B110A", "B110C" or "B110CX" thermal transfer ribbons.

- 色版 C8A-S0165
- PANTONE COOL GREY 8C
- ONLINE PRINT (FOR REFERENCE ONLY)
- DIE CUT

TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1 附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5 % is affected.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION 		啟碁科技股份有限公司 Wistron NeWeb Corp. 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C. Tel: 886-3-6667799 Fax: 886-3-5788726	
DRAWN		AMANDA LAI	01/07/19	DWG TITLE	
ENGR		AMANDA LAI	01/07/19	LABEL, PR, SFINITY, XE1v2-WN, CHINA, SAQ4-CC1	
APVD		EDWARD SU	01/07/19	SIZE	REV
				A4	A
				DWG NO.	
				4L.SAQ4C.003	
				SCALE	SHEET
				1/1	1 OF 1