

ELECTROMAGNETIC EMISSIONS COMPLIANCE REPORT

INTENTIONAL RADIATOR CERTIFICATION TO FCC PART 15 SUBPART C AND INDUSTRY CANADA RSS 210 REQUIREMENT CLASS II & IV PC REPORT

	CLASS II & IV PC REPORT
Product Name:	OF NFC Module
Brand Name:	WNC
Model No.:	DFCN-4
Model Difference:	N/A
FCC ID:	NKR-DFCN4
IC:	4441A-DFCN4
Report No.:	ER/2017/30118
Issue Date:	Apr. 10, 2017
FCC Rule	§15.225
IC Rule Part:	RSS-210 issue 9 Aug.2016 Annex B
	Wistron NeWeb Corporation
Prepared for:	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.
	SGS Taiwan Ltd.
	Electronics & Communication Laboratory
Prepared by:	No.134, Wu Kung Road, New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan 24803
	Note: This report shall not be reproduced except in full, without the written approval of SGS Taiwan Ltd. This document may be altered or revised by SGS Taiwan Ltd.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

the document.

Testing Laboratory

0513

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

personnel only, and shall be noted in the revision section of



VERIFICATION OF COMPLIANCE

Applicant:	Wistron NeWeb Corporation 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.
Product Name:	NFC Module
Brand Name:	WNC
Model No.:	DFCN-4
Model Difference:	N/A
FCC ID:	NKR-DFCN4
IC:	4441A-DFCN4
File Number:	ER/2017/30118
Date of test:	Mar. 17, 2017 ~ Apr. 07, 2017
Date of EUT Received:	Mar. 17, 2017

We hereby certify that:

The above equipment was tested by SGS Taiwan Ltd. The test data, data evaluation, test procedures, and equipment configurations shown in this report were made in accordance with the procedures given in ANSI C63.10:2013 and the energy emitted by the sample EUT tested as described in this report is in compliance with conducted and radiated emission limits.

The test results of this report relate only to the tested sample identified in this report.

Test By:	louis Chen	Date:	Apr. 10, 2017
Prepared By:	Louis Chen / Engineer Tiffany Kao	Date:	Apr. 10, 2017
Approved By:	Tiffany Kao / Clerk Jim Chang Jim Chang / Asst. Manager	Date:	Apr. 10, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Revision History

Report Number	Revision	Description	Issue Date
ER/2017/30118	Rev.00	Initial creation of document	Apr. 10, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



Contents

1	GENERAL INFORMATION	5
2	SYSTEM TEST CONFIGURATION	8
3	SUMMARY OF TEST RESULTS	10
4	DESCRIPTION OF TEST MODES	11
5	MEASUREMENT UNCERTAINTY	12
6	CONDUCTED EMISSION TEST	13
7	RADIATED TEST ITEMS	17
8	FREQUENCY STABILITY	
9	99% & 20 DB OCCUPIED BANDWIDTH MEASUREMENT	42
10	ANTENNA REQUIREMENT	45

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. [No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



GENERAL INFORMATION 1

1.1 **Product Description**

General:

Product Name of Host:	Notebook	Computer	
Brand Name:	HP		
Model No. of Host:	HSN-I040	>	
Model Difference:	N/A		
Product SW/HW version:	N/A / N/A		
Radio SW/HW version:	N/A / N/A		
Test SW Version:	N/A		
RF power setting in TEST SW:	N/A		
Model No. of NFC Module:	DFCN-4		
Module FCC ID:	NKR-DFCN4		
Module IC:	4441A-DFCN4		
Scope:	The test report covers the radiated emissions requirements of the standards referenced in the report to allow system level approval of the module in this specific host.		
Class II & Class IV Permissive change:			
	11.55Vdc AC/DC Ac	from Rechargeable Li-polymer Battery or 19.5V from dapter	
Power Supply:	Battery:	Model No.: HSTNN-IB7O; Supplier: SIMPLO Technology (Chong Qing) Inc.	
	Adapter:	Model No.: HSTNN-LA15, Supplier: LITE-ON TECHNOLOGY CORP.	



NFC:

Operating Frequency:	13.56MHz
Transmit Power:	< 123.90dBuV/m at 3m.
Number of Channels:	1
Antenna Type:	Loop Antenna 1.INPAQ 2.Yageo
Modulation Type:	ASK

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



1.2 Test Methodology of Applied Standards FCC Part 15, Subpart C §15.225 IC RSS 210 issue 9 Aug.2016 Annex B RSS-Gen. issue 4 Nov. 2014 ANSI C63.10:2013

Note:

1. All test items have been performed and record as per the above standards.

1.3 Test Facility

SGS Taiwan Ltd. Electronics & Communication Laboratory No.134, Wu Kung F New Taipei Industrial Park, Wuku District, New Taipei City, Taiwan

(TAF code 0513)

FCC Registration Numbers are: 509634

Canada Registration Number: 4620A-5.

1.4 Special Accessories

There is no special accessory used while test was conducted.

1.5 Equipment Modifications

There was no modification incorporated into the EUT.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for



SYSTEM TEST CONFIGURATION 2

2.1 EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner which intends to maximize its emission characteristics in a continuous normal application.

2.2 EUT Exercise

An engineering test mode (software/firmware) that applicant provided was utilized to manipulate the EUT into transmit, selection of the test channel, and modulation scheme.

2.3 Test Procedure

2.3.1 Conducted Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz, The CISPR Quasi-Peak and Average detector mode is employed according to §15.207. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.

2.3.2 Radiated Emissions

The EUT is a placed on as turn table which is 0.8 m above ground plan. The turn table shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the max. emission, the relative positions of this hand-held transmitter (EUT) was rotated through three orthogonal axes and measurement procedures for electric field radiated emissions above 1 GHz the EUT measurement is to be made "while keeping the antenna in the 'cone of radiation' from that area and pointed at the area both in azimuth and elevation, with polarization oriented for maximum response." is still within the 3dB illumination BW of the measurement antenna.

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuation factor between EUT conducted port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly EUT RF output level.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



2.5 Configuration of Tested System

Fig. 2-1 Radiated Emission



Fig. 2-2 AC Power Line Conducted Emission




Table 2-1 Equipment Used in Tested System

ltem	Equipment	Mfr/Brand	Model / Type No.	Series No.	Data Cable	Power Cord
1.	NFC Test Software	N/A	N/A	N/A	N/A	N/A

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.



SUMMARY OF TEST RESULTS 3

FCC Rules / IC Rules	Description Of Test	Result
§15.207 RSS-Gen § 8.8	AC Power Line Conducted Emission	Compliant
§15.225 (a)-(d) RSS210 Annex B B.6	Radiated Emission	Compliant
§15.209 RSS-Gen § 8.9	Radiated Emission Limits, general requirement	Compliant
§15.225 (e) RSS-Gen § 8.11	Frequency Stability	Compliant
§2.1049 §15.215 (c) RSS-Gen § 6.6	99% & 20 dB OCCUPIED BANDWIDTH	Compliant
§15.203 RSS-Gen § 6.7, § 8.3	Antenna Requirement	Compliant

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. |No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



DESCRIPTION OF TEST MODES 4

- 4.1 The Worst Test Modes and Channel Details
 - 1. The EUT stay in continuous transmitting mode.
 - 2. The frequency 13.56 MHz is the default channel to test, where it is the only manipulative channel as this application supports.
 - 3. Investigation has been done on all the possible configurations for searching the worst case.

RADIATED EMISSION TEST					
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION		
NFC	1	1	ASK		
	FREQUENCY STABILITY				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION		
NFC	1	1	ASK		
	20dB BANDWIDTH				
MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION		
NFC	1	1	ASK		

The field strength of spurious radiation emission was measured as EUT stand-up position (H mode) and lie down position (E1, E2 mode) for NFC Transmitter for channel the worst case E2 position was reported.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



MEASUREMENT UNCERTAINTY 5

Test Items	Uncertainty
AC Power Line Conducted Emission	+/- 2.586 dB
Frequency Stability	+/- 51.33 Hz
20 dB OCCUPIED BANDWIDTH	+/- 51.33 Hz
Temperature	+/- 0.65 °C
Humidity	+/- 4.6 %
DC / AC Power Source	DC= +/- 0.13%, AC= +/- 0.2%

Radiated Spurious Emission:

	9kHz - 30MHz: +/- 2.87dB	
Measurement uncertainty	30MHz - 180MHz: +/- 3.37dB	
(Polarization : Vertical)	180MHz -417MHz: +/- 3.19dB	
	0.417GHz-1GHz: +/- 3.19dB	

	9kHz - 30MHz: +/- 2.87dB
Measurement uncertainty	30MHz - 167MHz: +/- 4.22dB
(Polarization : Horizontal)	167MHz -500MHz: +/- 3.44dB
	0.5GHz-1GHz: +/- 3.39dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6 CONDUCTED EMISSION TEST

6.1 Standard Applicable:

Frequency range within 150kHz to 30MHz shall not exceed the Limit table as below.

Frequency range	Limits dB(uV)			
MHz	Quasi-peak Average			
0.15 to 0.50	66 to 56	56 to 46		
0.50 to 5	56	46		
5 to 30	60 50			

Note

1. The lower limit shall apply at the transition frequencies

2. The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz.

6.2 Measurement Equipment Used:

Conducted Emission Test Site						
EQUIPMENT MFR		MODEL	SERIAL	LAST	CAL DUE.	
TYPE		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCI7	100760	05/10/2016	05/09/2017	
LISN	SCHWARZBECK	NSLK 8127	8127-649	05/16/2016	05/15/2017	
LISN	MESS TEC	FCC-LISN-50/250 -25-2-01	4034	05/16/2016	05/15/2017	
Coaxial Cables	N/A	WK CE Cable	N/A	11/26/2016	11/25/2017	


6.3 EUT Setup:

- 1. The conducted emission tests were performed in the test site, using the setup in accordance with the ANSI C63.10:2013.
- 2. The AC/DC Power adaptor of EUT was plug-in LISN. The EUT was placed flushed with the rear of the table.
- 3. The LISN was connected with 120Vac/60Hz power source.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



6.4 Test SET-UP (Block Diagram of Configuration)

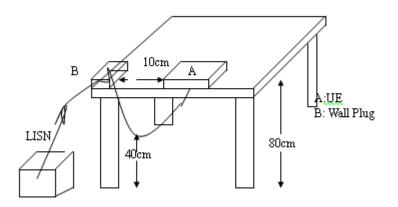

6.5 Measurement Procedure:

- 1. The EUT was placed on a table which is 0.8m above ground plan.
- 2. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 3. Repeat above procedures until all frequency measured were complete.

6.6 Measurement Result:

Note: Refer to next page for measurement data and plots. Note2: The * reveals the worst-case results that closet to the limit

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



AC POWER LINE CONDUCTED EMISSION TEST DATA

Operation Mode: Operation mode Temperature: 20

Test Date: Mar. 24, 2017

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



7

8 9 . 7.4020

20 1140

20.1140

41.30

42 70

35.50

0.10

0.10

0.10

41.40

42.80

35.60

60.00

60 00

50.00

-18.60

-17.20

-14.40

peak

QP

AVG

20 °C

Site Conduction Room Phase: N Temperature: AC 120V/60Hz Humidity: 58 % Limit: FCC Class B Conduction(QP) Power: Mode: Operation Note: Adapter: HSTNN-LA40 Conducted Emission File :Oldman Date: 2017/3/24 Data #3 Time: 下午 07:46:04 80.0 dBuV FCC Class B Conduction(OP) FCC Ch H Conde 40 0.0 0.150 0.5 (MHz) 5 30.000 Reading Measure Correct No. Mk Freq Factor Limit Over Level ment MHz dBuV dB dBuV dBuV dB Comment Detector 48.72 0.2020 0.00 48.72 -14.81 1 63.53 peak 2 46.60 0.00 0.2540 46.60 61.63 -15.03 QP 3 0.2540 31.30 0.00 31.30 51.63 -20.33 AVG 4 0.2700 45.40 0:00 45.40 -15.72 OP 61.12 5 0.2700 29.80 0.00 29.80 -21.32 AVG 51.12 6 0.3180 43.75 0.00 43.75 59.76 -16.01 peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

<mark>SGS Taiwan Ltd.</mark> [No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號


RADIATED TEST ITEMS

7.1 Measurement Procedure


- 1. Configure the EUT according to ANSI C63.10.
- 2. The EUT was placed on a turn table which is 0.8m above ground plan.
- 3. The turn table shall rotate 360 degrees to determine the position of maximum emission level.
- 4. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emission.
- 5. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 6. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 7. Repeat above procedures until all default test channel measured were complete

7.2 Test SET-UP

(A) Radiated Emission Test Set-Up, Frequency Below 30MHz

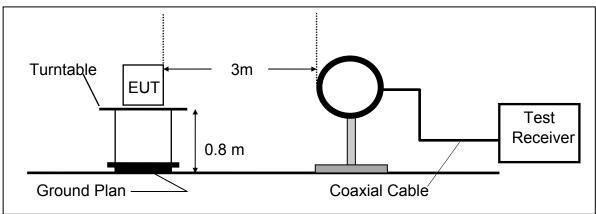

Radiated Emission Test Set-Up, Frequency Below 1000MHz (B)

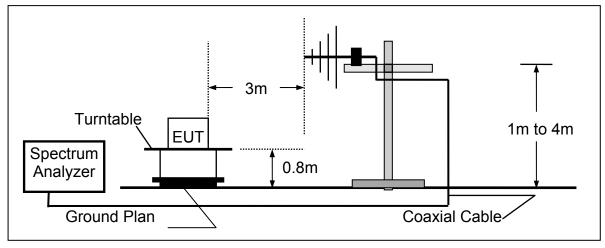

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.3 Measurement Equipment Used

SGS SAC-III						
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.	
ТҮРЕ		NUMBER	NUMBER	CAL.		
EMI Test Receiver	R&S	ESCI7	100760	05/10/2016	05/09/2017	
Spectrum Analyzer	Agilent	E4446A	MY51100003	04/21/2016	04/20/2017	
Loop Antenna	ETS-Lindgren	6502	148045	09/20/2016	09/19/2017	
Bilog Antenna	SCHWAZBECK	VULB9168	378	12/19/2016	12/18/2017	
Horn Antenna	Schwarzbeck	BBHA9120D	1441	08/01/2016	07/31/2017	
Pre-Amplifier	Agilent	8447D	2944A07676	01/05/2017	01/04/2018	
Pre-Amplifier	EMC Instruments Corp.	EMC012653 0	980038	01/05/2017	01/04/2018	
Turn Table	HD	DT420	N/A	N.C.R	N.C.R	
Antenna Tower	ChamPro	AM-BS-4500 -B	060776-ABS	N.C.R	N.C.R	
Controller	ChamPro	EM1000	60776	N.C.R	N.C.R	
Low Loss Cable	Huber Suhner	966_RX	9	01/05/2017	01/04/2018	
3m Site NSA	SGS	966 chamber	N/A	07/01/2016	06/30/2017	
Low Loss Cable	Huber Suhner	966 TX	1	01/05/2017	01/04/2018	
Horn Antenna	Schwarzbeck	BBHA9170	184	12/12/2016	12/11/2017	
Pre-Amplifier	EMC Instruments Corp.	EMC184045	980135	01/05/2017	01/04/2018	

Note: N.C.R refers to Not Calibrated Required.



7.4 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

FS = RA + AF + CL - AG

Where	FS = Field Strength	CL = Cable Attenuation Factor (Cable Loss)
	RA = Reading Amplitude	AG = Amplifier Gain
	AF = Antenna Factor	

The limit of the emission level is expressed in dBuV/m, which converts 20*log(uV/m) Actual FS(dB μ V/m) = SPA. Reading level(dB μ V) + Factor(dB)

Factor(dB) = Antenna Factor(dBµV/m) + Cable Loss(dB) – Pre Amplifier Gain(dB)

Note :

"F" : denotes Fundamental Frequency.; "H" : denotes Harmonic Frequency.

"E" : denotes Band Edge Frequency.; "S" : denotes Spurious Frequency.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



7.5 Field Strength of Fundamental Emissions and Mask Measurement

7.5.1 Standard Applicable

Limit:

Rules and specifiactions	CFR 47 Part 15 section 15.225(a)-(d)					
Frequency of Emission (MHz)	Field Strength (μV/m)at 30m	Field Strength (dBµV/m)at 30m	Field Strength (dBµV/m)at 3m			
1.705~13.110	30	29.5	69.5			
13.110~13.410	106	40.5	80.5			
13.410~13.553	334	50.5	90.47			
13.553~13.567	15848	84	123.9			
13.567~13.710	334	50.5	90.47			
13.710~14.010	106	40.5	80.5			
14.010~30.00	30	29.5	69.5			

Field strength of fundamental emissions limit:

The field strength of fundamental emissions shall not exceed 15848 micorvolts/meter at 30 meters. The Limit is converted to 124.00dBuV/m by offsetting the distance extrapolation factor as measurement distance is taken place at 3 meters.

Distance extrapolation = 40 *log (30/3) = 40 dB

Limit is re-adjusted in terms of limit taken in 3m = 20 *log (15848 uV/m) + 40 = 124.00dBuV/m

- 1. Emission level in dBuV/m=20 log (μ V/m)
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Mask for RSS 210 Annex B B6

- (a) 15.848 millivolts/m (84 dB μ V/m) at 30 m, within the band 13.553-13.567 MHz.
- (b) 334 microvolts/m (50.5 dB μ V/m) at 30 m, within the bands 13.410-13.553 MHz and 13.567-13.710 MHz.
- (c) 106 microvolts/m (40.5 dB μ V/m) at 30 m, within the bands 13.110-13.410 MHz and 13.710-14.010 MHz.
- (d) RSS-Gen general field strength limits for frequencies outside the band 13.110-14.010 MHz.

Distance extrapolation = 40 *log (30/3) = 40 dB

Limit is re-adjusted in terms of limit taken in 3m for the following frequency segment of the interest:

- a) 20 *log (15848uV/m) + 40dB = 124.00dBuV/m
- b) 20 *log(334uV/m) + 40dB = 90.47dBuV/m
- c) 20*log(106uV/m) + 40dB = 80.50dBuV/m

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document is unavful and offenders may be prosecuted to the fullest extent of the law.



7.5.2 Field Strength of Fundamental Emission Measurement Result

Antenna: INPAQ			
Operation Band	:RFID	Test Date	:2017-04-07
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:23.8 deg_C/59 RH
Operation Mode	:Main	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

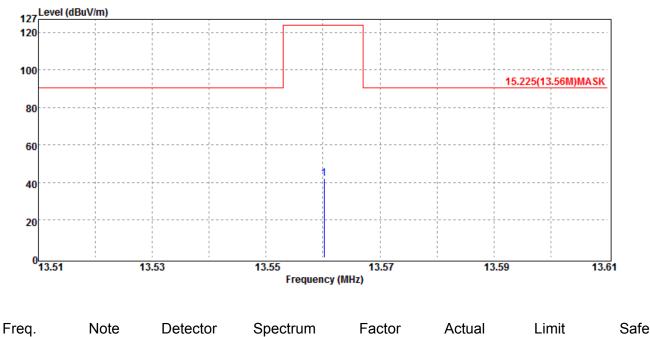

	۲ .	1010	Deteotor	opoolain	1 40(0)	7 (0(00)	2000	Curo
			Mode	Reading Level		FS	@3m	Margin
MH	z F/	/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.8	56	F	Peak	30.68	11.43	42.11	123.90	-81.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Fundamental Frequency:13.56 MHzTemp./Humi.:23.8 degOperation Mode:MainEngineer:TinEUT Pol.:H PlaneMeasurement Antenna Pol.:HORIZO	
127_Level (dBuV/m)	
120	
100 15.225(13.56M)MASK	
80	
60	
40	
20	
0 13.51 13.53 13.55 13.57 13.59 13.61 Frequency (MHz)	
Freq. Note Detector Spectrum Factor Actual Limit Sa	Safe
Mode Reading Level FS @3m Mai	argin
MHz F/H/E/S PK/QP/AV dBµV dB dBµV/m dBµV/m d	dB
13.56 F Peak 29.89 11.43 41.32 123.90 -82	32.58



Antenna: YAGEO

:RFID **Operation Band Fundamental Frequency** :13.56 MHz **Operation Mode** :Main EUT Pol. :E2 Plane

Test Date :2017-03-23 Temp./Humi. :23.8 deg_C/59 RH Engineer :Mike :VERTICAL Measurement Antenna Pol.

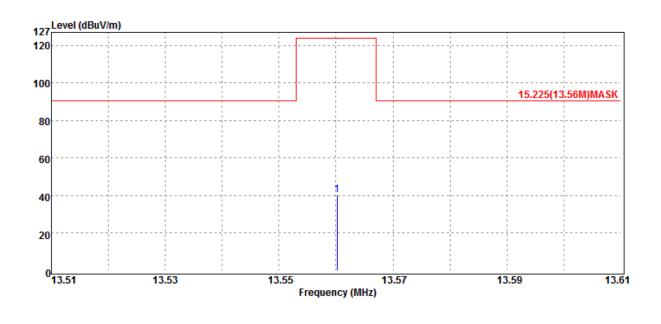

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.56	F	Peak	29.14	11.43	40.57	123.90	-83.33

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Operation Ba Fundamental Operation Mc EUT Pol.	Frequency	:RFID :13.56 MHz :Main :E2 Plane		Tem Eng	t Date Ip./Humi. ineer asurement Ante	enna Pol.	:2017-03-23 :23.8 deg_C/59 RH :Mike :HORIZONTAL
127	(dBuV/m)						
120							
100						15.225(13.56M	I)MA SK
80							
60							
40			1				
20							
0 13.51	1	3.53	13.55 Frequency (13.57 (MHz)	13.5	9	13.61
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	n dB
13.56	F	Peak	28.00	11.43	39.43	123.90	-84.47



7.5.3 Mask Measurement Result

Antenna: INPAQ			
Operation Band	:RFID	Test Date	:2017-04-07
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:23.8 deg_C/59 RH
Operation Mode	:Mask	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:VERTICAL

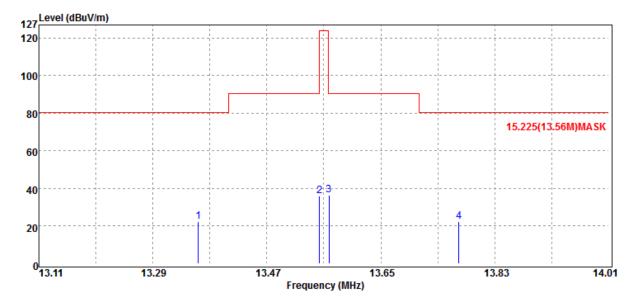

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.36	S	Peak	11.07	11.43	22.50	80.50	-58.00
13.55	S	Peak	24.62	11.43	36.05	90.47	-54.42
13.57	S	Peak	24.94	11.43	36.37	90.47	-54.10
13.77	S	Peak	11.11	11.45	22.56	80.50	-57.94

:2017-04-07



:RFID

Operation Band

13.55

13.57 13.77 S

S

S

Fundamental Operation Mc EUT Pol.	Frequency	:13.56 MHz :Mask :H Plane		Temp./Humi. Engineer Measurement Antenna Pol.			:23.8 deg_C/59 RH :Tin :HORIZONTAL	
Lovel	(dBu)//m)							
127 Level								
100					·			
]]			
80						15.225(13.56M	I)MASK	
60								
40			23					
20		1			4			
20								
0 13.11	1	3.29	13.47	13.65	13.8	3	14.01	
13.11		0.20	Frequency (I		10.0		14.01	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin	
		Mode	Reading Level		FS	@3m		
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	n dB	
13.37	S	Peak	10.39	11.43	21.82	80.50	-58.68	

Test Date

Peak

Peak

Peak

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

22.32

24.40

11.28

11.43

11.43

11.45

33.75

35.83

22.73

90.47

90.47

80.50

-56.72

-54.64


-57.77



Antenna: YAGEO

Operation Band :RFID **Fundamental Frequency** :13.56 MHz **Operation Mode** :Mask EUT Pol. :E2 Plane

Test Date :2017-03-23 Temp./Humi. :23.8 deg_C/59 RH Engineer :Mike :VERTICAL Measurement Antenna Pol.

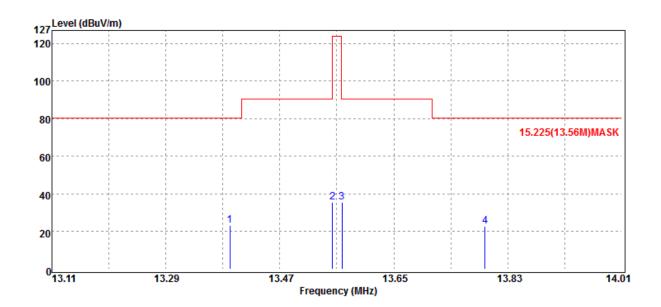

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe
		Mode	Reading Level		FS	@3m	Margin
 MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
13.39	S	Peak	11.86	11.43	23.29	80.50	-57.21
13.55	S	Peak	23.96	11.43	35.39	90.47	-55.08
13.57	S	Peak	24.20	11.43	35.63	90.47	-54.84
13.79	S	Peak	11.26	11.45	22.71	80.50	-57.79

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

:2017-03-23



:RFID

Operation Band

Fundamental Operation Mo EUT Pol.	Frequency	:13.56 MHz :Mask :E2 Plane	<u>.</u>	Engir	./Humi. heer surement Ante	enna Pol.	:23.8 deg_C/59 RH :Mike :HORIZONTAL	
127Level	(dBuV/m)							
120								
80								
60						15.225(13.56M	I)MASK	
40			23					
20		1			4			
0 13.11	1	3.29	13.47 Frequency (I	13.65 MHz)	13.83	3	14.01	
Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Safe	
		Mode	Reading Level		FS	@3m	Margin	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	n dB	
13.33	S	Peak	11.01	11.43	22.44	80.50	-58.06	

Test Date

21.90

23.43

11.33

Peak

Peak

Peak

S

S

S

13.55

13.57

13.78

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only. 除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sgs.com/terms e-document.htm</u>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

11.43

11.43

11.45

33.33

34.86

22.78

90.47

90.47

80.50

-57.14

-55.61

-57.72



7.6 Radiated Emission Measurement

7.6.1 Standard Applicable

The field strength of any emission which appear outside of 13.553~13.567MHz Band shall not exceed the general radiated emissions limits.

Frequency (MHz)	Field strength (μV/m)	Distance (meters)
0.009~0.490	2400/F(kHz)	300
0.490~1.705	24000/F(kHz)	30
1.705-30	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- 1. Emission level in $dB\mu V/m=20 \log (\mu V/m)$
- 2. Distance extrapolation factor = 40 log (required distance/ test distance) (dB)
- 3. The lower limit shall apply at the transition frequencies.
- 4. The measurement was undertaken in closer distance at 3m, where extrapolation factor is offset to convert the limit of the measurement.

According to § RSS-210 Annex B B.6

(d) 30 microvolts/m (29.4 dBµV/m) at 30 m, outside the band 13.110-14.010 MHz.

Limit is converted by adding the distance extrapolation factor as the measurement distance was to place at 3m.

20*log(30uV/m) + 40dB = 69.54 dBuV/m a)

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.


除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms_and_conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law



Radiated Emission Measurement Result

Antenna: INPAQ	
Operation Band	:RFID
Fundamental Frequency	:13.56 MHz
Operation Mode	:Tx
EUT Pol.	:H Plane

Test Date	:2017-04-07
Temp./Humi.	:23.8 deg_C/59 RH
Engineer	:Tin
Measurement Antenna Pol.	:VERTICAL

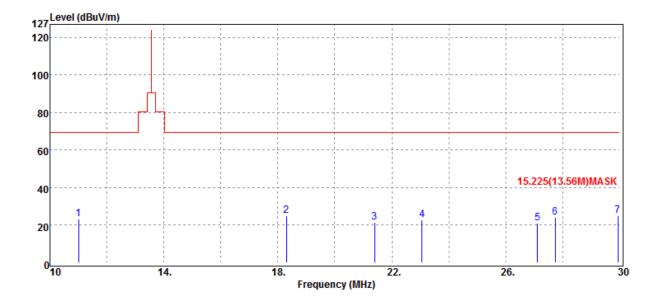

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
11.00	S	Peak	11.83	11.36	23.19	69.54	-46.35
18.30	S	Peak	13.35	11.55	24.90	69.54	-44.64
21.40	S	Peak	10.18	11.16	21.34	69.54	-48.20
23.06	S	Peak	12.32	10.69	23.01	69.54	-46.53
27.12	Н	Peak	11.32	9.70	21.02	69.54	-48.52
27.74	S	Peak	14.42	9.56	23.98	69.54	-45.56
29.94	S	Peak	16.05	9.09	25.14	69.54	-44.40




Opera Funda Opera EUT F	imer tion	ital Fr	reque	ency	:RFID :13.56 :Tx :H Pla	6 MHz			Test Date Temp./H Enginee Measure	umi.	enna Pol	:Tin	04-07 deg_C/59 RH ZONTAL
	Level	(dBuV/n	n)										
127 120							1		i				
120					1		1		1		1		
					1						1	1	
100										-!	±		
				П									
80				┙╴┕┪╴							i T	1	
				Ļ						1	1	-	
60									· +	 _!	i 4		
40							 				15.225(13	8.56M)MASK	
-10													
	1				2	3		4		5	6	7	
20		-					1						
		i i											
0	10			14			18.		22.		26.	3	0
							Frequen	cy (MHz)					

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10.70	S	Peak	12.03	11.36	23.39	69.54	-46.15
14.44	S	Peak	10.19	11.45	21.64	69.54	-47.90
16.90	S	Peak	10.30	11.51	21.81	69.54	-47.73
20.56	S	Peak	10.21	11.40	21.61	69.54	-47.93
24.00	S	Peak	10.10	10.44	20.54	69.54	-49.00
27.12	Н	Peak	10.32	9.70	20.02	69.54	-49.52
29.92	S	Peak	12.28	9.10	21.38	69.54	-48.16




Operation Band	:RFID	Test Date	:2017-04-07
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:23.8 deg_C/59 RH
Operation Mode	:Tx	Engineer	:Tin
EUT Pol.	:H Plane	Engineer Measurement Antenna Pol.	:VERTICAL

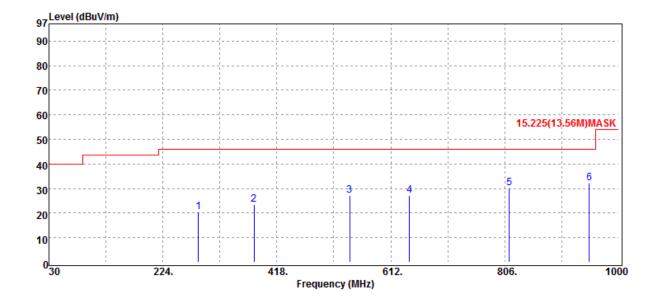

Note	Detector	Spectrum	Factor	Actual	Limit	Margin
	Mode	Reading Level		FS	@3m	
F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
S	Peak	26.54	-6.22	20.32	46.00	-25.68
S	Peak	28.03	-4.41	23.62	46.00	-22.38
S	Peak	29.04	-1.75	27.29	46.00	-18.71
S	Peak	26.57	0.65	27.22	46.00	-18.78
S	Peak	26.81	3.36	30.17	46.00	-15.83
S	Peak	27.00	5.35	32.35	46.00	-13.65
	F/H/E/S S S S S S	ModeF/H/E/SModeSPeakSPeakSPeakSPeakSPeakSPeakSPeak	ModeReading LevelF/H/E/SPK/QP/AVdBµVSPeak26.54SPeak28.03SPeak29.04SPeak26.57SPeak26.81	Mode Reading Level F/H/E/S PK/QP/AV dBμV dB S Peak 26.54 -6.22 S Peak 28.03 -4.41 S Peak 29.04 -1.75 S Peak 26.57 0.655 S Peak 26.81 3.36	Mode Reading Level FS F/H/E/S PK/QP/AV dBμV dB dBμV/m S Peak 26.54 -6.22 20.32 S Peak 28.03 -4.41 23.62 S Peak 29.04 -1.75 27.29 S Peak 26.57 0.65 27.22 S Peak 26.81 3.36 30.17	ModeReading LevelFS@3mF/H/E/SPK/QP/AVdBμVdBdBμV/mdBμV/mSPeak26.54-6.2220.3246.00SPeak28.03-4.4123.6246.00SPeak29.04-1.7527.2946.00SPeak26.570.6527.2246.00SPeak26.813.3630.1746.00



Operation Band Fundamental Frequency	:RFID :13.56 MHz	Test Date Temp./Humi.	:2017-04-07 :23.8 deg C/59 RH
Operation Mode	:Tx	Engineer	:Tin
EUT Pol.	:H Plane	Measurement Antenna Pol.	:HORIZONTAL

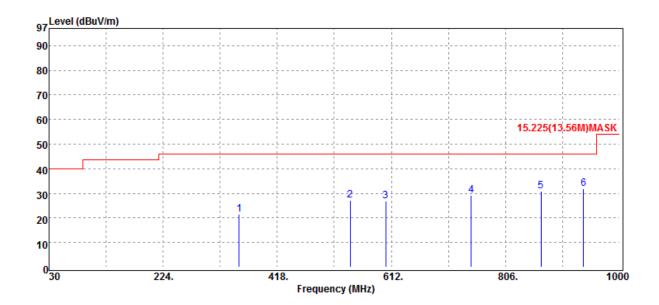


Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
353.01	S	Peak	26.22	-4.90	21.32	46.00	-24.68
542.16	S	Peak	28.79	-1.75	27.04	46.00	-18.96
602.30	S	Peak	26.72	0.05	26.77	46.00	-19.23
747.80	S	Peak	26.73	2.50	29.23	46.00	-16.77
866.14	S	Peak	26.11	4.89	31.00	46.00	-15.00
938.89	S	Peak	26.49	5.30	31.79	46.00	-14.21



Antenna: YAGEO

Operation Band :RFID **Fundamental Frequency** :13.56 MHz **Operation Mode** :Tx EUT Pol. :E2 Plane

Test Date :2017-03-23 Temp./Humi. :23.8 deg_C/59 RH Engineer :Mike :VERTICAL Measurement Antenna Pol.

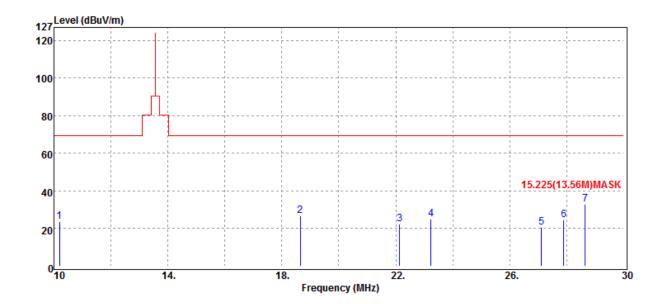

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
10.20	S	Peak	12.27	11.34	23.61	69.54	-45.93
18.64	S	Peak	15.47	11.55	27.02	69.54	-42.52
22.14	S	Peak	11.30	10.94	22.24	69.54	-47.30
23.24	S	Peak	14.42	10.64	25.06	69.54	-44.48
27.12	Н	Peak	10.94	9.70	20.64	69.54	-48.90
27.90	S	Peak	14.93	9.53	24.46	69.54	-45.08
28.64	S	Peak	23.57	9.37	32.94	69.54	-36.60
10.20 18.64 22.14 23.24 27.12 27.90	S S S H S	PK/QP/AV Peak Peak Peak Peak Peak Peak	dBμV 12.27 15.47 11.30 14.42 10.94 14.93	11.34 11.55 10.94 10.64 9.70 9.53	dBµV/m 23.61 27.02 22.24 25.06 20.64 24.46	dBµV/m 69.54 69.54 69.54 69.54 69.54 69.54	-45.9 -42.5 -47.3 -44.4 -48.9 -45.0

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

binds of the stated at the stated in the state of the s electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.




Funda	ition Band amental Freque ition Mode Pol.	ency	:RFID :13.56 MH :Tx :E2 Plane		Ē	Γest Date Γemp./Hu Engineer Measurer	ımi.	enna Pol.	:Mike	03-23 leg_C/59 RH ZONTAL
407	Level (dBuV/m)									
127										
100										
80										
60										
40					 			15.225(13.	56M)MASK	
20	1		2	3		4	5	6	7	
20										
0	10	14.	Ľ	18.	2	2.	2	6.	3)

Frequency (MHz)

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
12.44	S	Peak	12.07	11.41	23.48	69.54	-46.06
15.86	S	Peak	11.16	11.49	22.65	69.54	-46.89
18.64	S	Peak	10.68	11.55	22.23	69.54	-47.31
22.20	S	Peak	11.15	10.92	22.07	69.54	-47.47
25.34	S	Peak	10.80	10.11	20.91	69.54	-48.63
27.12	Н	Peak	9.33	9.70	19.03	69.54	-50.51
28.64	S	Peak	17.53	9.37	26.90	69.54	-42.64




Operation Band	:RFID	Test Date	:2017-03-23
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:23.8 deg_C/59 RH
Operation Mode	:Tx	Engineer	:Mike
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:VERTICAL

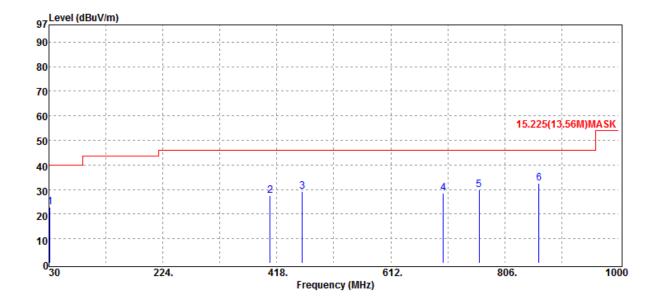

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
31.94	S	Peak	31.90	-9.11	22.79	40.00	-17.21
406.36	S	Peak	31.05	-3.59	27.46	46.00	-18.54
461.65	S	Peak	31.86	-2.60	29.26	46.00	-16.74
701.24	S	Peak	26.95	1.44	28.39	46.00	-17.61
762.35	S	Peak	26.87	2.89	29.76	46.00	-16.24
864.20	S	Peak	27.52	5.05	32.57	46.00	-13.43



Operation Band	:RFID	Test Date	:2017-03-23
Fundamental Frequency	:13.56 MHz	Temp./Humi.	:23.8 deg_C/59 RH
Operation Mode	:Tx	Engineer	:Mike
EUT Pol.	:E2 Plane	Measurement Antenna Pol.	:HORIZONTAL

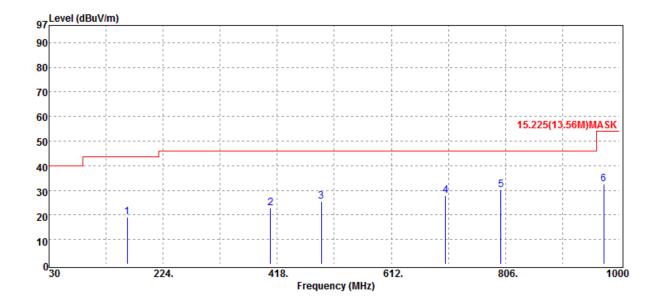

Freq.	Note	Detector	Spectrum	Factor	Actual	Limit	Margin
		Mode	Reading Level		FS	@3m	
MHz	F/H/E/S	PK/QP/AV	dBµV	dB	dBµV/m	dBµV/m	dB
162.89	S	Peak	26.57	-7.48	19.09	43.50	-24.41
406.36	S	Peak	26.47	-3.59	22.88	46.00	-23.12
492.69	S	Peak	28.08	-2.60	25.48	46.00	-20.52
704.15	S	Peak	26.62	1.27	27.89	46.00	-18.11
798.24	S	Peak	27.02	3.11	30.13	46.00	-15.87
972.84	S	Peak	26.39	6.18	32.57	54.00	-21.43



FREQUENCY STABILITY 8

8.1 Standard Applicable

The frequency tolerance of the carrier signal shall be maintained within +/- 0.01% of the operating frequency over a temperature variation of -20 degrees to +50 degrees C at normal supply voltage, and for a variation in the primary supply voltage from 85% to 115% of the rated supply voltage at a temperature of 20 degrees C. For battery operated equipment, the equipment tests shall be performed using a new battery.


Carrier frequency stability shall be maintained to $\pm 0.01\%$ (± 100 ppm).

For licence-exempt radio apparatus, the frequency stability shall be measured at temperatures of -20°C (-4°F), +20°C (+68°F) and +50°C (+122°F).

8.2 Measurement Procedure

- 1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
- 2. Set EUT as normal operation.
- 3. Turn the EUT on and couple its output to spectrum.
- Turn the EUT off and set the chamber to the highest temperature specified.
- 5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
- 6. Repeat step with the temperature chamber set to the lowest temperature.
- 7. Set spectrum Center Frequency = fundamental frequency, RBW, VBW= 10 kHz, Span =100 kHz, Detector =Max hold, Mark peak.

8.3 Test SET-UP

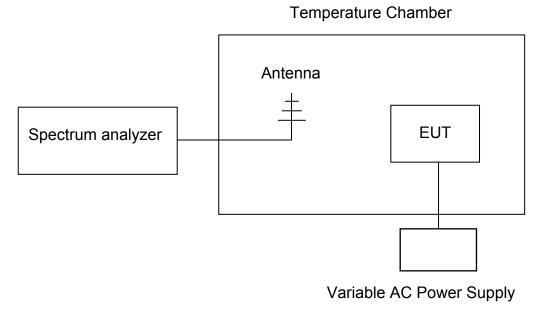

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.

除非另有說明,此報告結果僅對測試之樣品負責,同時此樣品僅保留90天。本報告未經本公司書面許可,不可部份複製。 This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <u>www.sgs.com/terms and conditions.htm</u> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <u>www.sqs.com/terms</u> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law

SGS Taiwan Ltd. No.134,WuKungRoad,NewTaipeiIndustrialPark,WukuDistrict,NewTaipeiCity,Taiwan24803/新北市五股區新北產業園區五工路134號



8.4 Measurement Equipment Used

Conducted Emission Test Site							
EQUIPMENT	MENT MFR MODEL SERIAL		LAST	CAL DUE.			
TYPE		NUMBER	NUMBER	CAL.			
Power Meter	Anritsu	ML2495A	1005007	12/15/2016	12/14/2017		
Power Sensor	Anritsu	MA2411B	917032	12/15/2016	12/14/2017		
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018		
DC Block	Mini-Circuits	BLK-18-S+	1	01/05/2017	01/04/2018		

8.5 **Measurement Results**

Antenna: INPAQ

A. Temperature Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (kHz)
Vdc	Temperature	(MHz)		
11.55	-20	13.5601342	-134.20000	+/- 1.356
11.55	-10	13.5601236	-123.60000	+/- 1.356
11.55	0	13.5601528	-152.80000	+/- 1.356
11.55	10	13.56023692	-236.92000	+/- 1.356
11.55	20	13.56	0.00000	+/- 1.356
11.55	30	13.56021245	-212.45000	+/- 1.356
11.55	40	13.56022638	-226.38000	+/- 1.356
11.55	50	13.56031263	-312.63000	+/- 1.356

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (kHz)
Vdc	Temperature	(MHz)	Deita (IIZ)	
10.4	20	13.56021232	-212.32000	+/- 1.356
11.55	20	13.56	0.00000	+/- 1.356
12.7	20	13.56023212	-232.12000	+/- 1.356



Antenna: YAGEO

A. Temperature Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (kHz)	
Vdc	Temperature	(MHz)			
11.55	-20	13.56015621	-156.21000	+/- 1.356	
11.55	-10	13.5602221	-222.10000	+/- 1.356	
11.55	0	13.56033133	-331.33000	+/- 1.356	
11.55	10	13.56053184	-531.84000	+/- 1.356	
11.55	20	13.56	0.00000	+/- 1.356	
11.55	30	13.56023672	-236.72000	+/- 1.356	
11.55	40	13.56025682	-256.82000	+/- 1.356	
11.55	50	13.56033461	-334.61000	+/- 1.356	

B. Supply Voltage Variation

Power Supply	Environment	Frequency	Delta (Hz)	Limit (kHz)	
Vdc	Temperature	(MHz)			
10.4	20	13.56025634	-256.34100	+/- 1.356	
11.55	20	13.56	0.00000	+/- 1.356	
12.7	20	13.56032474	-324.74100	+/- 1.356	



99% & 20 dB OCCUPIED BANDWIDTH MEASUREMENT 9

9.1 Standard Applicable:

The 20 dB bandwidth shall be specified in operating frequency band.

9.2 Limit:

None

9.3 Test Set-up



9.4 Measurement Procedure

- 1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak mode.
- 2. 20dB Bandwidth the resolution bandwidth of 1 kHz and the video bandwidth of 3 kHz were used.
- 3. Measured the spectrum width with power higher than 20dB below carrier.

9.5 Measurement Equipment Used

Conducted Emission Test Site								
EQUIPMENT	MFR	MODEL	SERIAL	LAST	CAL DUE.			
ТҮРЕ		NUMBER	NUMBER	CAL.				
EXA Spectrum Analyzer	Agilent	N9030A	MY53120760	03/21/2017	03/20/2018			
DC Block	Mini-Circuits	BLK-18-S+	1	01/05/2017	01/04/2018			
Attenuator	Mini-Circuit	BW-S10W2+	2	01/05/2017	01/04/2018			


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.




9.6 Measurement Result

Antenna: INPAQ

20dB Bandwidth

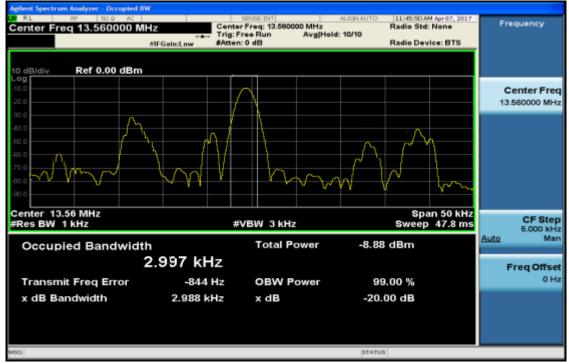


99% Bandwidth

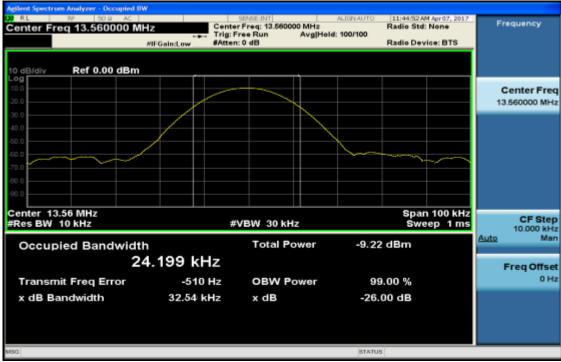


Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



Antenna: YAGEO 20dB Bandwidth

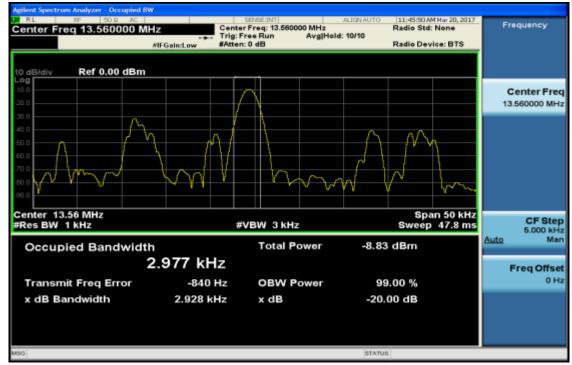

99% Bandwidth

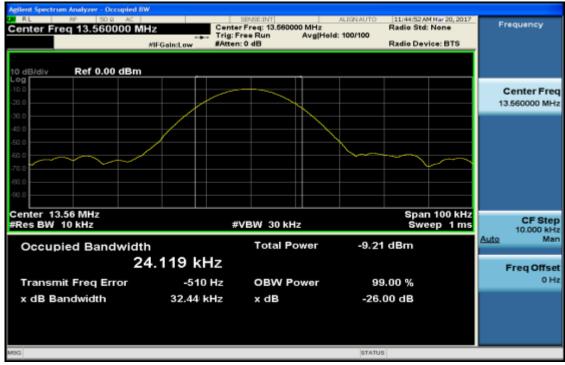

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.



10 ANTENNA REQUIREMENT

10.1. Standard Applicable

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on measurement or on data from the antenna manufacturer.

For transmitters of RF output power of 10 milliwatts or less, only the portion of the antenna gain that is in excess of 6 dBi (6 dB above isotropic gain) shall be added to the measured RF output power to demonstrate compliance with the radiated power limits specified in the applicable standard. For transmitters of output power greater than 10 milliwatts, the total antenna gain shall be added to the measured RF output power to demonstrate compliance to the specified radiated power limits.

According to RSS-GEN 8.3

The applicant for equipment certification, as per RSP-100, must provide a list of all antenna types that may be used with the licence-exempt transmitter, indicating the maximum permissible antenna gain (in dBi) and the required impedance for each antenna.

Licence-exempt transmitters that have received equipment certification may operate with different types of antennas. However, it is not permissible to exceed the maximum equivalent isotropically radiated power (e.i.r.p.) limits specified in the applicable standard (RSS) for the licence-exempt apparatus.

Testing shall be performed using the highest gain antenna of each combination of licence-exempt transmitter and antenna type, with the transmitter output power set at the maximum level.9 When a measurement at the antenna connector is used to determine RF output power, the effective gain of the device's antenna shall be stated, based on a measurement or on data from the antenna manufacturer.

10.2. Antenna Connected Construction

The antenna connector is designed with unique type RF connector and no consideration of replacement. Please see EUT photo and antenna spec. for details.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only.