

FCC Test Report

FCC ID : NKR-DHUBW69
Equipment : 802.11 abgn/ac 2x2 module with BT
Model No. : DHUB-W69
Brand Name : WNC
Applicant : Wistron NeWeb Corp.
Address : 20 Park Avenue II, Hsinchu Science Park,
Hsinchu 308, Taiwan, R.O.C.
Standard : 47 CFR FCC Part 15.247
Received Date : Dec. 16, 2015
Tested Date : Jan. 11 ~ Jan. 27, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	7
1.3	Test Setup Chart	7
1.4	The Equipment List	8
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS.....	11
3.1	Conducted Emissions.....	11
3.2	Unwanted Emissions into Restricted Frequency Bands	16
3.3	Unwanted Emissions into Non-Restricted Frequency Bands	50
3.4	Conducted Output Power	55
3.5	Number of Hopping Frequency	57
3.6	20dB and Occupied Bandwidth	59
3.7	Channel Separation.....	61
3.8	Number of Dwell Time.....	63
4	TEST LABORATORY INFORMATION	66

Release Record

Report No.	Version	Description	Issued Date
FR5D1601AD	Rev. 01	Initial issue	Feb. 05, 2016

Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.162MHz 41.40 (Margin -13.94dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]: 260.86MHz 43.90 (Margin -2.10dB) - PK	Pass
15.247(d)	Band Edge	Meet the requirement of limit	Pass
15.247(b)(1)	Conducted Output Power	Power [dBm]: 9.32	Pass
15.247(a)(1)(iii)	Number of Hopping Channels	Meet the requirement of limit	Pass
15.247(a)(1)	Hopping Channel Separation	Meet the requirement of limit	Pass
15.247(a)(1)(iii)	Dwell Time	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information				
Frequency Range (MHz)	Bluetooth Mode	Ch. Frequency (MHz)	Channel Number	Data Rate
2400-2483.5	BR	2402-2480	0-78 [79]	1 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	2 Mbps
2400-2483.5	EDR	2402-2480	0-78 [79]	3 Mbps

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.
 Note 2: Bluetooth BR uses a GFSK.
 Note 3: Bluetooth EDR uses a combination of $\pi/4$ -DQPSK and 8DPSK.

1.1.2 Antenna Details

Ant. No.	Model	Type	Connector	Gain (dBi)	Cable length (mm)
1	DHUB-W69_BT_81.EEW15.GLC	PIFA	IPEX	-1.45	500
2	DHUB-W69_BT_81.EEW15.GLE	PIFA	IPEX	-1.93	670
3	DHUB-W69_BT_81.EEW15.GLF	PIFA	IPEX	-2.01	700
4	E48u	PIFA	UFL	1.41	960
5	E55u	PIFA	UFL	2.51	510
6	M55	PIFA	UFL	2.61	460
7	M65	PIFA	UFL	2.01	720

Note:

- 1) Ant. No.1~3 will be used with Wi-Fi on board antenna.
Ant. No.1 with highest gain and No.3 with longest cable were selected for final testing.
- 2) Ant. No.4~7 will be used with Wi-Fi external antennas.
Ant. No.6 with highest gain and No.4 with longest cable were selected for final testing.

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	5Vdc from host
--------------------------	----------------

1.1.4 Accessories

N/A

1.1.5 Channel List

Frequency band (MHz)				2400~2483.5			
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461	---	---

1.1.6 Test Tool and Duty Cycle

Test Tool	Blue Tool, V1.8.8.6
-----------	---------------------


1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)		
	2402	2441	2480
GFSK/1Mbps	Specify Power Table index 0	Specify Power Table index 0	Specify Power Table index 0
$\pi/4$ QDPSK	Specify Power Table index 0	Specify Power Table index 0	Specify Power Table index 0
8DPSK/3Mbps	Specify Power Table index 0	Specify Power Table index 0	Specify Power Table index 0


1.2 Local Support Equipment List

Support Equipment List					
No.	Equipment	Brand	Model	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6440	DoC	USB, 1m non-shielded.

1.3 Test Setup Chart

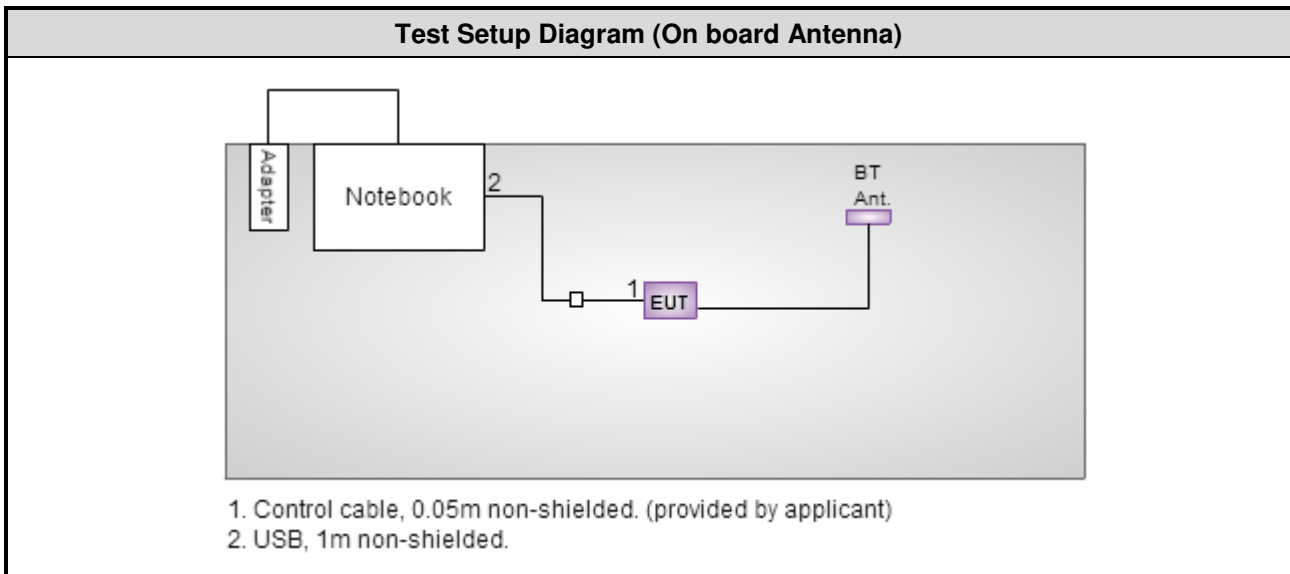

Note: The distance between Wi-Fi antenna and BT antenna is 40cm.

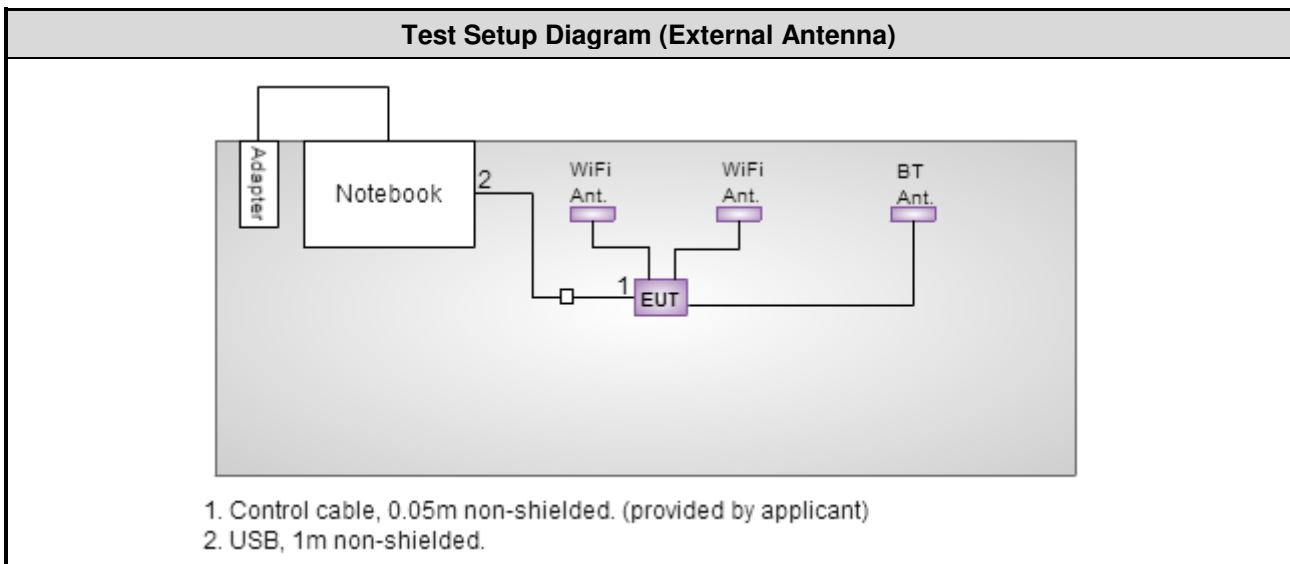

Note:

- 1) The distance between 2 Wi-Fi antennas is 15cm.
- 2) The distance between Wi-Fi antenna and BT antenna is 40cm.

1.4 The Equipment List

Test Item	Conducted Emission				
Test Site	Conduction room 1 / (CO01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
EMC Receiver	R&S	ESCS 30	100169	Oct. 21, 2015	Oct. 20, 2016
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 13, 2015	Nov. 12, 2016
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Nov. 26, 2015	Nov. 25, 2016
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 21, 2015	Dec. 20, 2016
50 ohm terminal (Support Unit)	NA	50	04	Apr. 15, 2015	Apr. 14, 2016
Measurement Software	AUDIX	e3	6.120210k	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	Radiated Emission				
Test Site	966 chamber1 / (03CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101498	Dec. 13, 2015	Dec. 12, 2016
Receiver	R&S	ESR3	101658	Nov. 04, 2015	Nov. 03, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Aug. 20, 2015	Aug. 19, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 16, 2015	Dec. 15, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Nov. 04, 2015	Nov. 03, 2016
Loop Antenna	R&S	HFH2-Z2	11900	Nov. 16, 2015	Nov. 15, 2016
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 10, 2015	Dec. 09, 2016
Preamplifier	Burgeon	BPA-530	SN:100219	Sep. 10, 2015	Sep. 09, 2016
Preamplifier	Agilent	83017A	MY39501308	Oct. 02, 2015	Oct. 01, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 10, 2015	Dec. 09, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 10, 2015	Dec. 09, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 10, 2015	Dec. 09, 2016
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 10, 2015	Dec. 09, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101063	Feb. 03, 2015	Feb. 02, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA

Note: Calibration Interval of instruments listed above is one year.

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

FCC Public notice DA 00-705

ANSI C63.10-2013

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	± 34.134 Hz
Conducted power	± 0.808 dB
Power density	± 0.463 dB
Conducted emission	± 2.670 dB
AC conducted emission	± 2.90 dB
Radiated emission ≤ 1 GHz	± 3.66 dB
Radiated emission > 1 GHz	± 5.63 dB

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	17°C / 59%	Sky Huang
Radiated Emissions	03CH01-WS	19-23°C / 60-64%	Warren Lee Aska Huang
RF Conducted	TH01-WS	22°C / 64%	Alex Huang

➤ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Mode	Test Frequency (MHz)	Data Rate (Mbps)	Test Configuration
Conducted Emissions	GFSK	2441	1Mbps	1, 3
Radiated Emissions ≤ 1GHz	GFSK	2441	1Mbps	1, 2, 3, 4
Radiated Emissions > 1GHz	GFSK	2402, 2441, 2480	1Mbps	1, 3
	8DPSK	2402, 2441, 2480	3Mbps	
Conducted Output Power	GFSK	2402, 2441, 2480	1Mbps	3
	π/4 QDPSK	2402, 2441, 2480	2Mbps	
	8DPSK	2402, 2441, 2480	3Mbps	
Number of Hopping Channels	GFSK	2402~2480	1Mbps	3
	8DPSK	2402~2480	3Mbps	
Hopping Channel Separation	GFSK	2402, 2441, 2480	1Mbps	3
	8DPSK	2402, 2441, 2480	3Mbps	
Dwell Time	GFSK	2402	1Mbps	3
	8DPSK	2402	3Mbps	

NOTE:

- The EUT and its antenna were pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The worst case for EUT and its antenna were listed below and were shown in this report.
- The following antennas are selected for final testing as below configurations:
For antennas equipped with Wi-Fi on board antenna: EUT: X-plane, Antenna: X-plane
 - Configuration 1: Ant. No.1 with highest gain (model DHUB-W69_BT_81.EEW15.GLC)
 - Configuration 2: Ant. No.3 with longest (model DHUB-W69_BT_81.EEW15.GLF)**For antennas equipped with Wi-Fi on external antennas:** EUT: X-plane, Antenna: Y-plane
 - Configuration 3: Ant. No.6 with highest gain (model M55)
 - Configuration 4: Ant. No.4 with longest cable (model E48u)

3 Transmitter Test Results

3.1 Conducted Emissions

3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: * Decreases with the logarithm of the frequency.

3.1.2 Test Procedures


1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

3.1.3 Test Setup




- Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

3.1.4 Test Result of Conducted Emissions

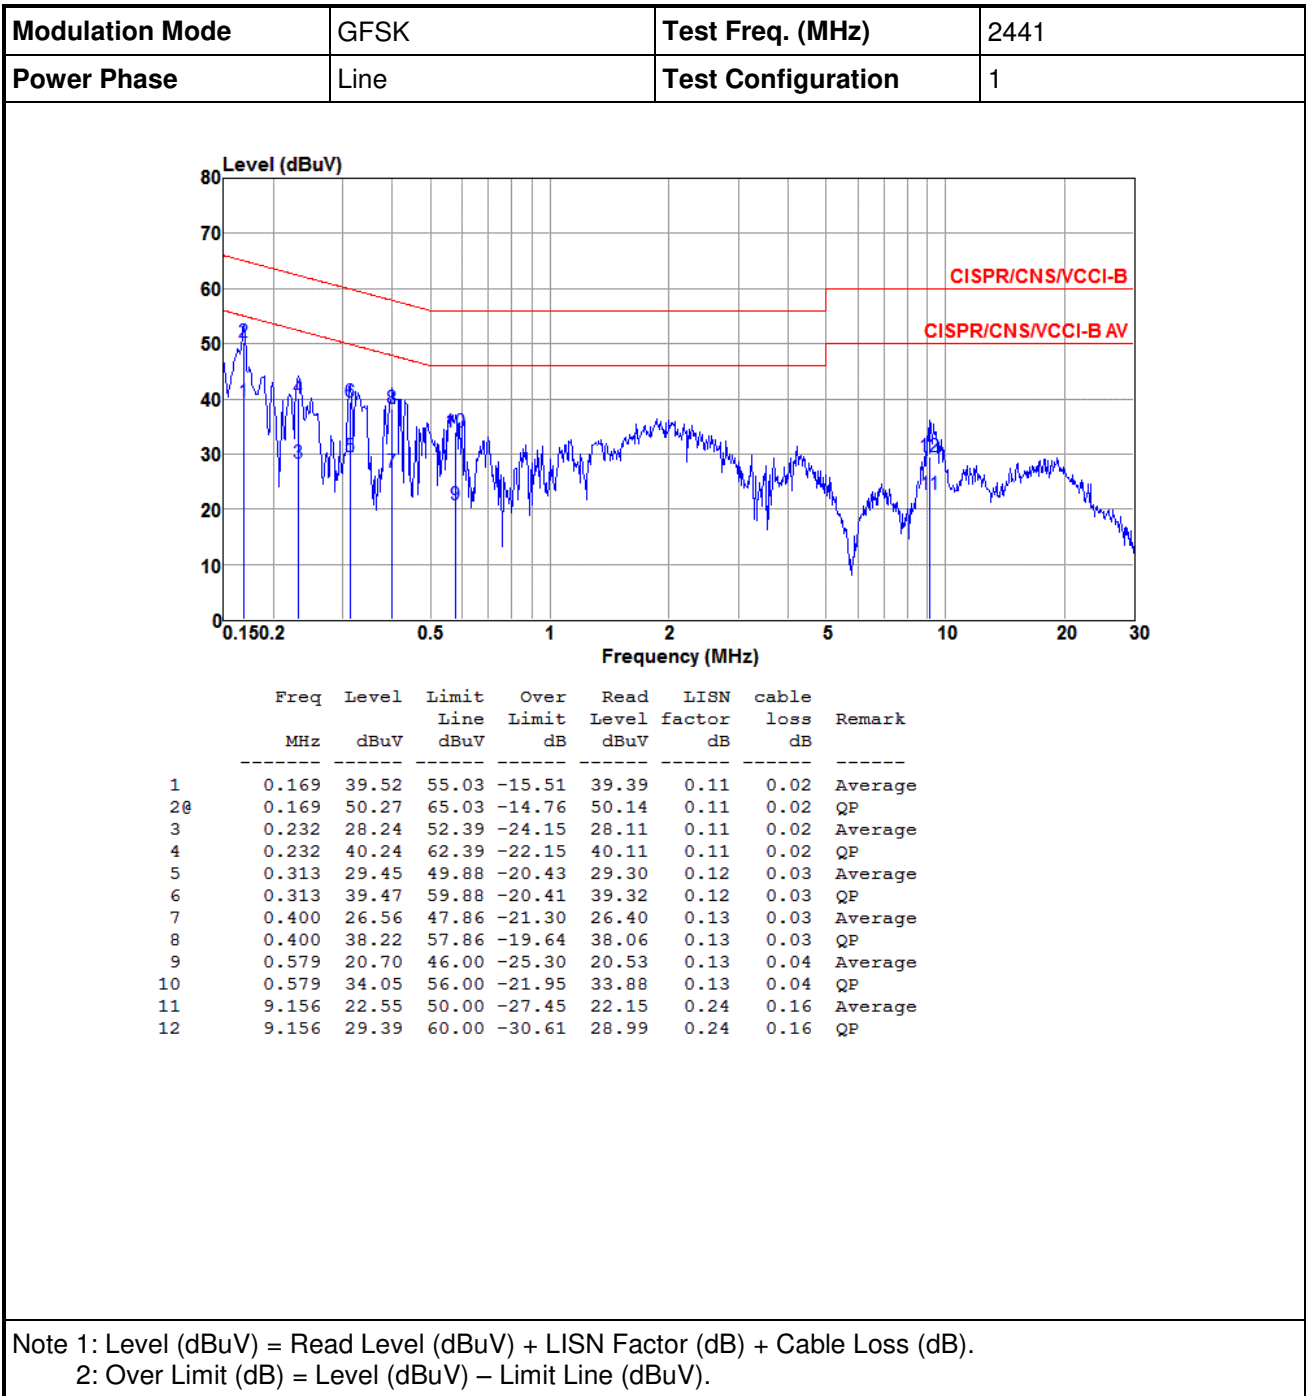


Modulation Mode	GFSK	Test Freq. (MHz)	2441
Power Phase	Neutral	Test Configuration	1

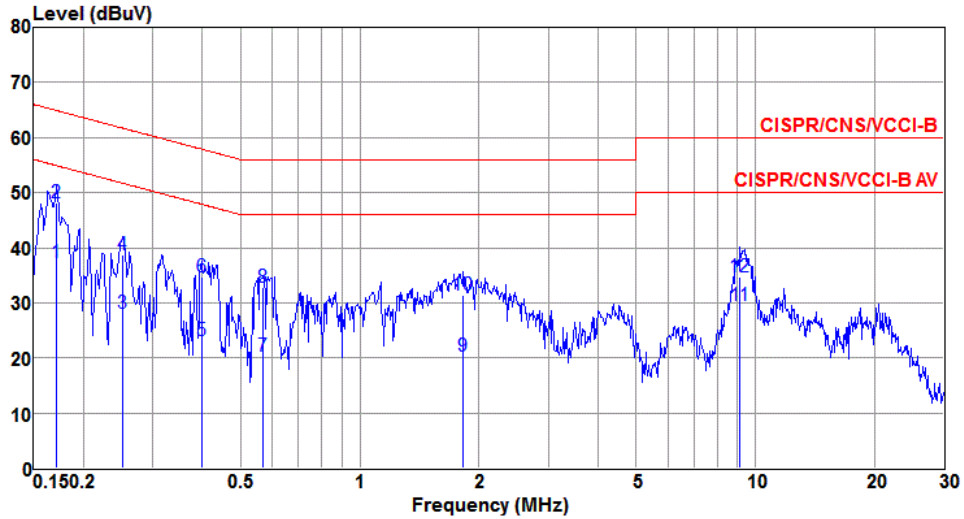

	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1	0.171	37.34	54.90	-17.56	37.20	0.12	0.02	Average
2@	0.171	48.26	64.90	-16.64	48.12	0.12	0.02	QP
3	0.252	28.13	51.69	-23.56	28.00	0.11	0.02	Average
4	0.252	38.70	61.69	-22.99	38.57	0.11	0.02	QP
5	0.398	23.25	47.90	-24.65	23.08	0.14	0.03	Average
6	0.398	34.68	57.90	-23.22	34.51	0.14	0.03	QP
7	0.570	20.30	46.00	-25.70	20.12	0.14	0.04	Average
8	0.570	32.78	56.00	-23.22	32.60	0.14	0.04	QP
9	1.829	20.37	46.00	-25.63	20.13	0.16	0.08	Average
10	1.829	31.39	56.00	-24.61	31.15	0.16	0.08	QP
11	9.156	29.54	50.00	-20.46	29.12	0.26	0.16	Average
12	9.156	34.81	60.00	-25.19	34.39	0.26	0.16	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


Modulation Mode	GFSK	Test Freq. (MHz)	2441
Power Phase	Line	Test Configuration	3

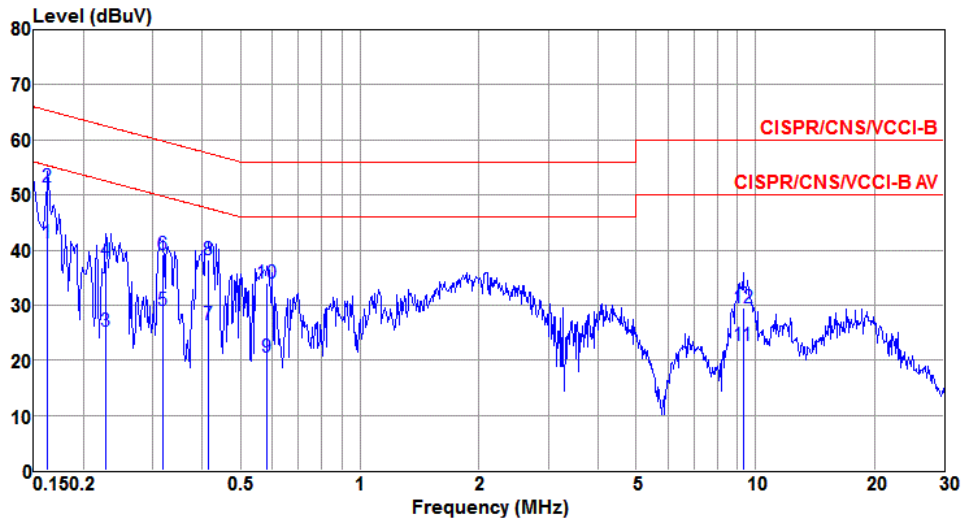

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
10	0.162	41.40	55.34	-13.94	41.27	0.11	0.02	Average
2	0.162	51.39	65.34	-13.95	51.26	0.11	0.02	QP
3	0.228	25.25	52.52	-27.27	25.12	0.11	0.02	Average
4	0.228	38.10	62.52	-24.42	37.97	0.11	0.02	QP
5	0.318	29.07	49.75	-20.68	28.92	0.12	0.03	Average
6	0.318	39.15	59.75	-20.60	39.00	0.12	0.03	QP
7	0.415	26.42	47.55	-21.13	26.26	0.13	0.03	Average
8	0.415	38.25	57.55	-19.30	38.09	0.13	0.03	QP
9	0.582	20.43	46.00	-25.57	20.26	0.13	0.04	Average
10	0.582	33.88	56.00	-22.12	33.71	0.13	0.04	QP
11	9.302	22.77	50.00	-27.23	22.37	0.24	0.16	Average
12	9.302	29.47	60.00	-30.53	29.07	0.24	0.16	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

Modulation Mode	GFSK	Test Freq. (MHz)	2441
Power Phase	Neutral	Test Configuration	3

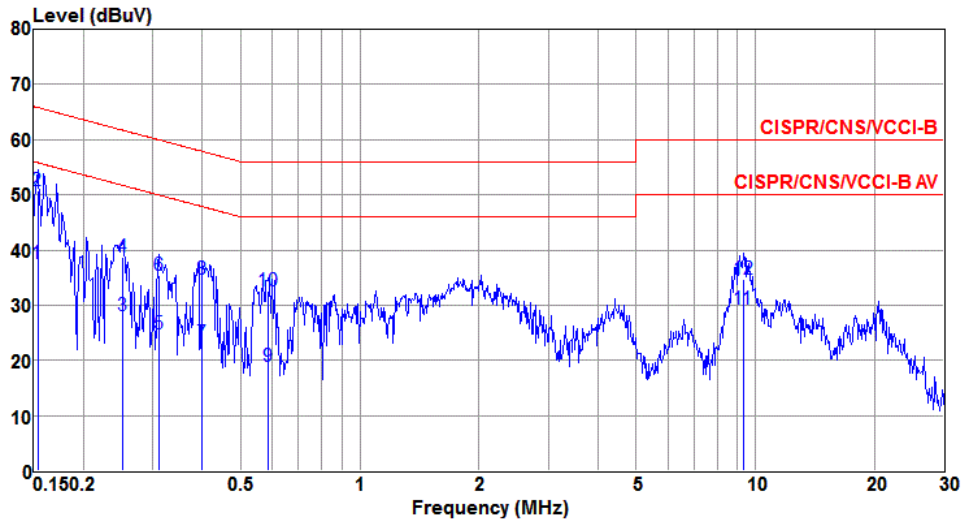

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.153	37.65	55.82	-18.17	37.50	0.13	0.02	Average
2@	0.153	50.65	65.82	-15.17	50.50	0.13	0.02	QP
3	0.252	28.13	51.69	-23.56	28.00	0.11	0.02	Average
4	0.252	38.64	61.69	-23.05	38.51	0.11	0.02	QP
5	0.310	24.74	49.97	-25.23	24.58	0.13	0.03	Average
6	0.310	35.35	59.97	-24.62	35.19	0.13	0.03	QP
7	0.400	23.24	47.86	-24.62	23.07	0.14	0.03	Average
8	0.400	34.64	57.86	-23.22	34.47	0.14	0.03	QP
9	0.589	18.78	46.00	-27.22	18.60	0.14	0.04	Average
10	0.589	32.53	56.00	-23.47	32.35	0.14	0.04	QP
11	9.302	29.39	50.00	-20.61	28.97	0.26	0.16	Average
12	9.302	34.81	60.00	-25.19	34.39	0.26	0.16	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

3.2 Unwanted Emissions into Restricted Frequency Bands

3.2.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

Note 1:
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

Note 2:
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. Radiated emission above 1GHz / Peak value
RBW=1MHz, VBW=3MHz and Peak detector
Radiated emission above 1GHz / Average value for harmonics
The average value is: Average = Peak value + 20log(Duty cycle) Where the duty factor is calculated from following formula for DH5 packet type which has worst duty factor:
3.
$$20\log(\text{Duty cycle}) = 20\log \frac{1s / 1600 * 5}{100 \text{ ms}} = -30.1\text{dB}$$
4. Radiated emission above 1GHz / Average value for other emissions
RBW=1MHz, VBW=1/T and Peak detector

3.2.3 Test Setup


Radiated Emissions below 1 GHz

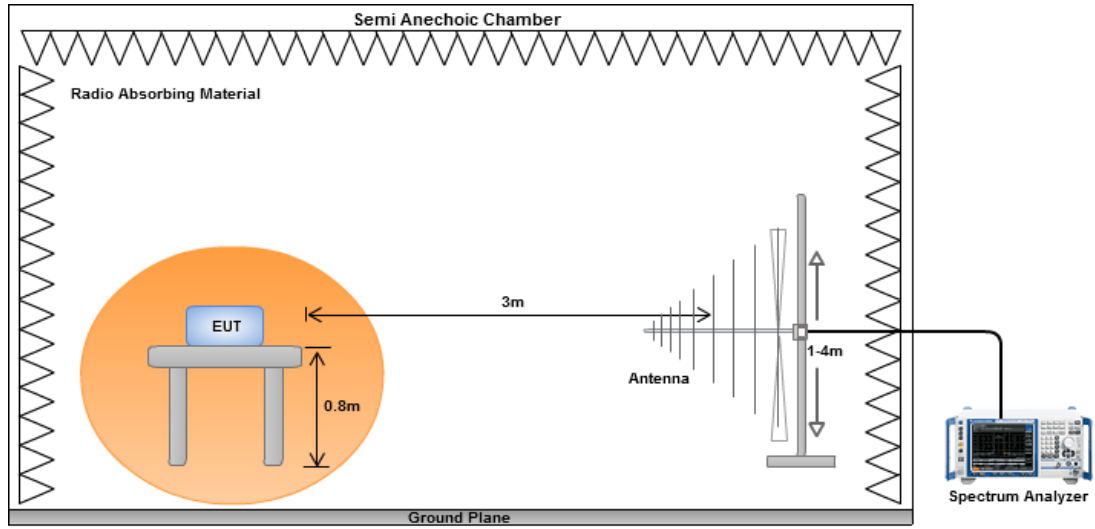


Radiated Emissions above 1 GHz

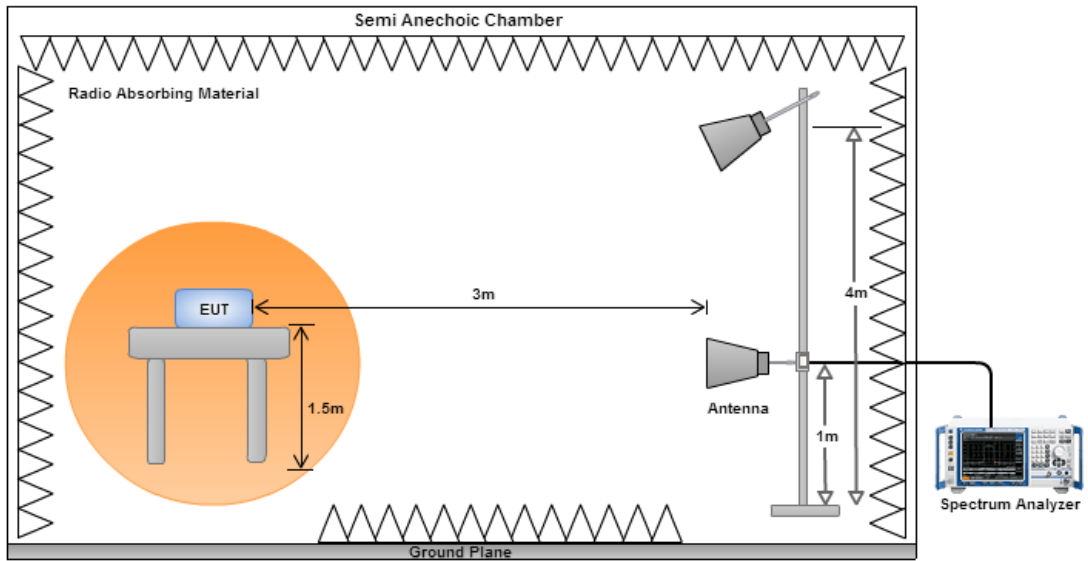

3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

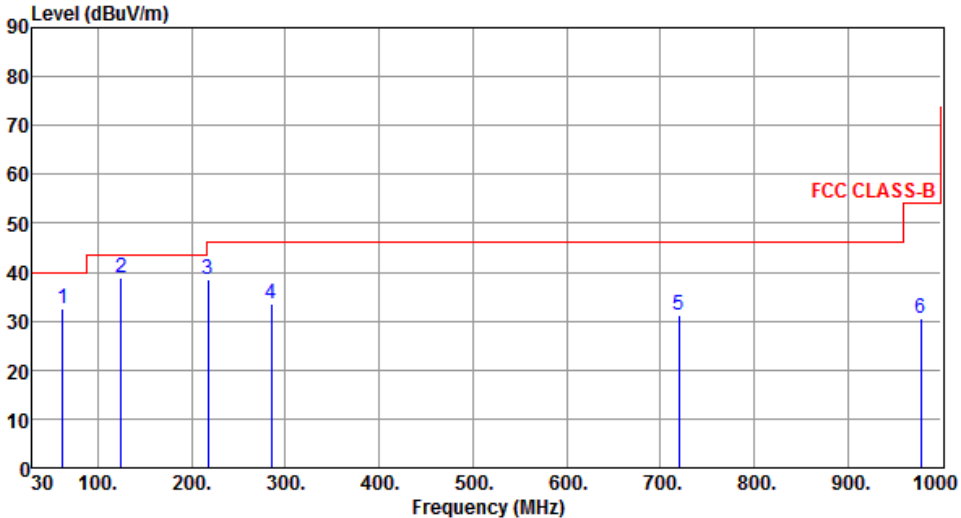Modulation	GFSK	Test Freq. (MHz)	2441																																																																								
Polarization	Horizontal	Test Configuration	1																																																																								
 <p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red line represents the FCC CLASS-B limit, which is 40 dBuV/m from 30 to 100 MHz, 43 dBuV/m from 100 to 200 MHz, 46 dBuV/m from 200 to 1000 MHz, and 54 dBuV/m from 900 to 1000 MHz. Six blue vertical lines indicate measured peaks at 62.21, 125.14, 217.47, 285.41, 719.67, and 977.69 MHz, with levels of 32.48, 38.76, 38.39, 33.45, 31.28, and 30.42 dBuV/m respectively.</p>																																																																											
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High cm</th> <th>Turn Table deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>62.21</td> <td>32.48</td> <td>40.00</td> <td>-7.52</td> <td>50.39</td> <td>-17.91</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>2</td> <td>125.14</td> <td>38.76</td> <td>43.50</td> <td>-4.74</td> <td>57.17</td> <td>-18.41</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>3</td> <td>217.47</td> <td>38.39</td> <td>46.00</td> <td>-7.61</td> <td>57.49</td> <td>-19.10</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>4</td> <td>285.41</td> <td>33.45</td> <td>46.00</td> <td>-12.55</td> <td>49.71</td> <td>-16.26</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>5</td> <td>719.67</td> <td>31.28</td> <td>46.00</td> <td>-14.72</td> <td>38.91</td> <td>-7.63</td> <td>Peak</td> <td>---</td> </tr> <tr> <td>6</td> <td>977.69</td> <td>30.42</td> <td>54.00</td> <td>-23.58</td> <td>34.68</td> <td>-4.26</td> <td>Peak</td> <td>---</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB				1	62.21	32.48	40.00	-7.52	50.39	-17.91	Peak	---	2	125.14	38.76	43.50	-4.74	57.17	-18.41	Peak	---	3	217.47	38.39	46.00	-7.61	57.49	-19.10	Peak	---	4	285.41	33.45	46.00	-12.55	49.71	-16.26	Peak	---	5	719.67	31.28	46.00	-14.72	38.91	-7.63	Peak	---	6	977.69	30.42	54.00	-23.58	34.68	-4.26	Peak	---		
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High cm	Turn Table deg																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB																																																																						
1	62.21	32.48	40.00	-7.52	50.39	-17.91	Peak	---																																																																			
2	125.14	38.76	43.50	-4.74	57.17	-18.41	Peak	---																																																																			
3	217.47	38.39	46.00	-7.61	57.49	-19.10	Peak	---																																																																			
4	285.41	33.45	46.00	-12.55	49.71	-16.26	Peak	---																																																																			
5	719.67	31.28	46.00	-14.72	38.91	-7.63	Peak	---																																																																			
6	977.69	30.42	54.00	-23.58	34.68	-4.26	Peak	---																																																																			
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m). Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.</p>																																																																											

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	1

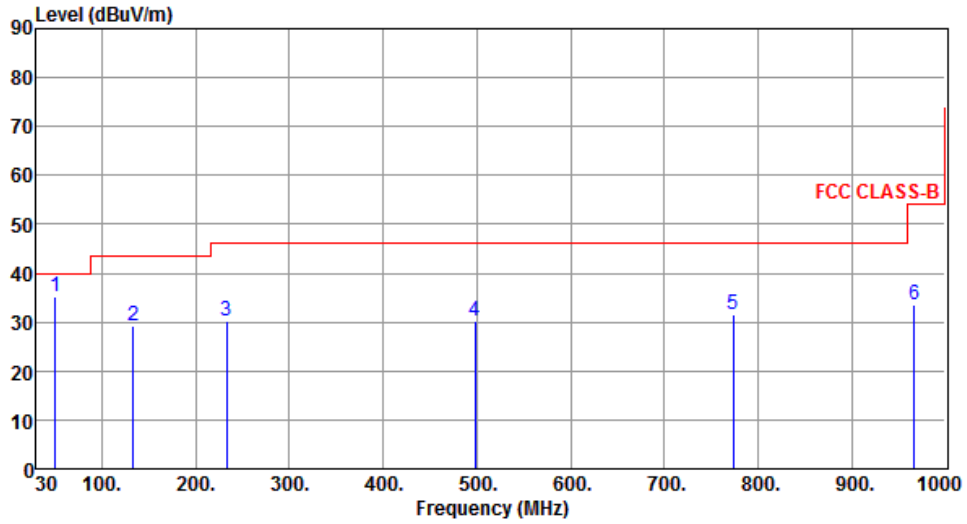

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	50.10	35.14	40.00	-4.86	51.51	-16.37	Peak	---	---
2	133.83	29.22	43.50	-14.28	46.83	-17.61	Peak	---	---
3	232.73	30.14	46.00	-15.86	48.56	-18.42	Peak	---	---
4	498.48	30.27	46.00	-15.73	41.42	-11.15	Peak	---	---
5	773.22	31.62	46.00	-14.38	38.36	-6.74	Peak	---	---
6	967.11	33.49	54.00	-20.51	37.84	-4.35	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	2

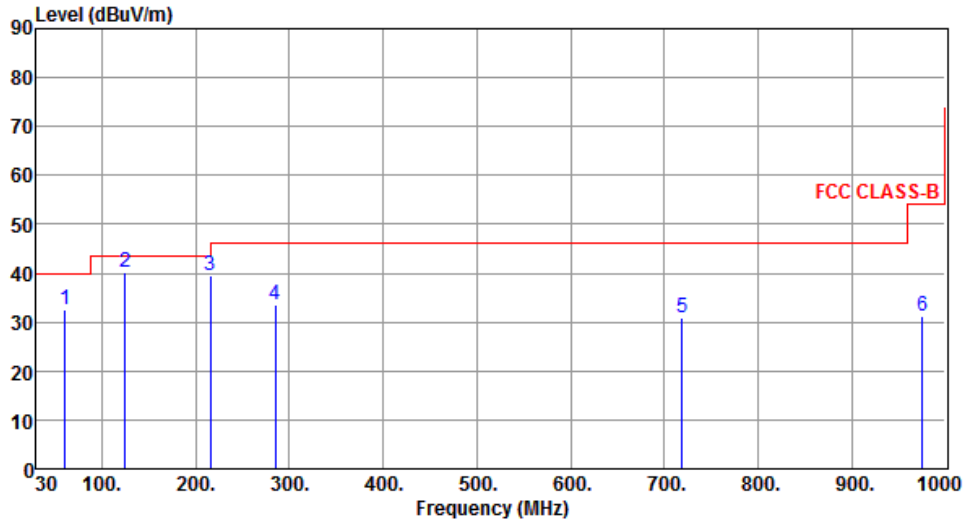

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	60.53	32.56	40.00	-7.44	50.17	-17.61	Peak	---	---
2	125.02	40.12	43.50	-3.38	58.54	-18.42	Peak	---	---
3	215.38	39.38	43.50	-4.12	58.55	-19.17	Peak	---	---
4	285.21	33.70	46.00	-12.30	49.96	-16.26	Peak	---	---
5	719.25	30.92	46.00	-15.08	38.56	-7.64	Peak	---	---
6	975.41	31.16	54.00	-22.84	35.44	-4.28	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	2

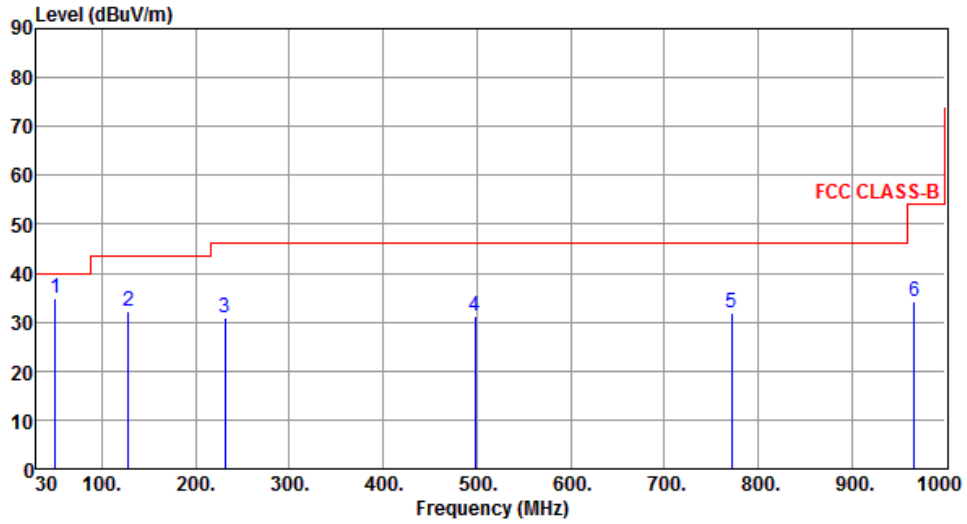

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	50.53	34.80	40.00	-5.20	51.22	-16.42	Peak	---	---
2	128.56	32.09	43.50	-11.41	50.21	-18.12	Peak	---	---
3	231.52	30.82	46.00	-15.18	49.31	-18.49	Peak	---	---
4	498.53	31.06	46.00	-14.94	42.21	-11.15	Peak	---	---
5	772.02	31.81	46.00	-14.19	38.56	-6.75	Peak	---	---
6	966.52	34.07	54.00	-19.93	38.42	-4.35	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

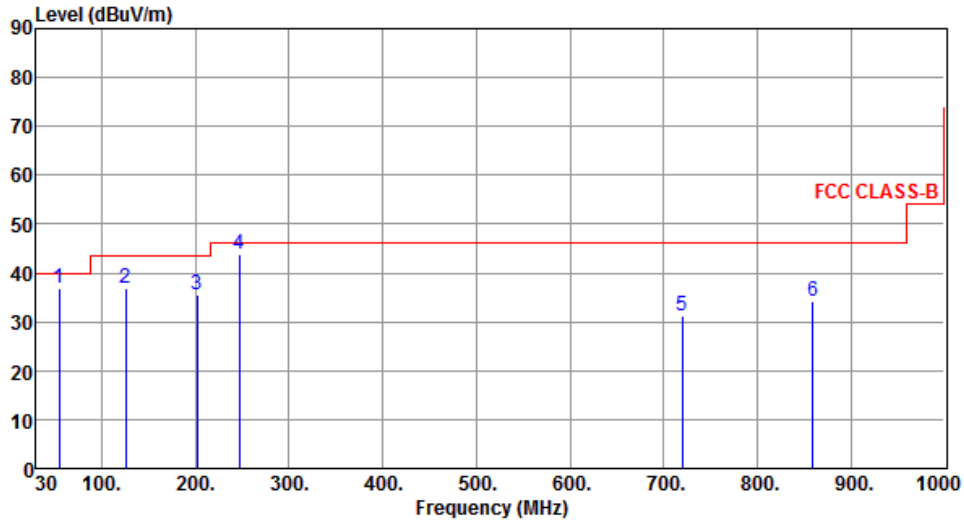

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	54.25	36.80	40.00	-3.20	53.65	-16.85	Peak	---	---
2	126.03	36.79	43.50	-6.71	55.13	-18.34	Peak	---	---
3	201.69	35.42	43.50	-8.08	54.72	-19.30	Peak	---	---
4	247.28	44.00	46.00	-2.00	61.78	-17.78	Peak	---	---
5	719.67	31.36	46.00	-14.64	38.99	-7.63	Peak	---	---
6	859.35	34.28	46.00	-11.72	40.04	-5.76	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

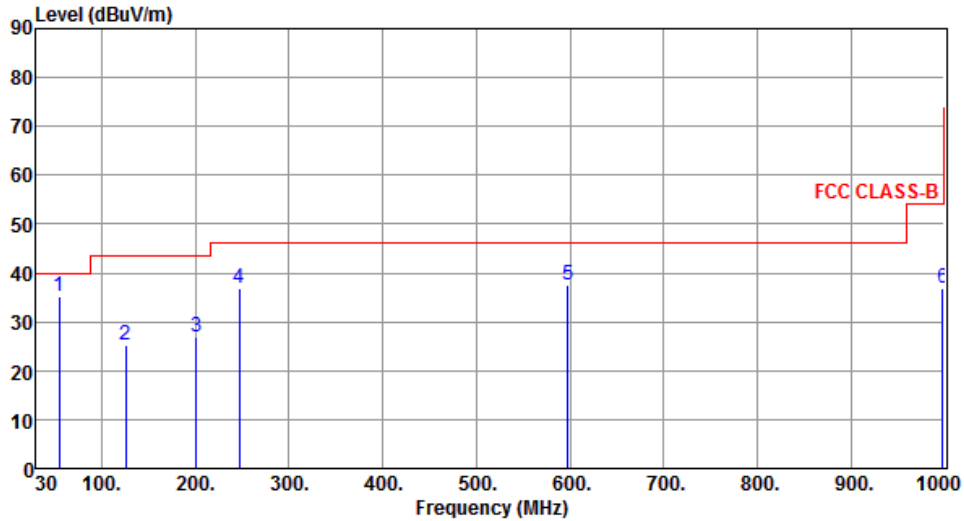

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	54.25	35.17	40.00	-4.83	52.02	-16.85	Peak	---	---
2	126.03	25.29	43.50	-18.21	43.63	-18.34	Peak	---	---
3	200.72	27.03	43.50	-16.47	46.32	-19.29	Peak	---	---
4	247.28	36.98	46.00	-9.02	54.76	-17.78	Peak	---	---
5	597.45	37.51	46.00	-8.49	47.08	-9.57	Peak	---	---
6	998.06	36.96	54.00	-17.04	41.05	-4.09	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	4

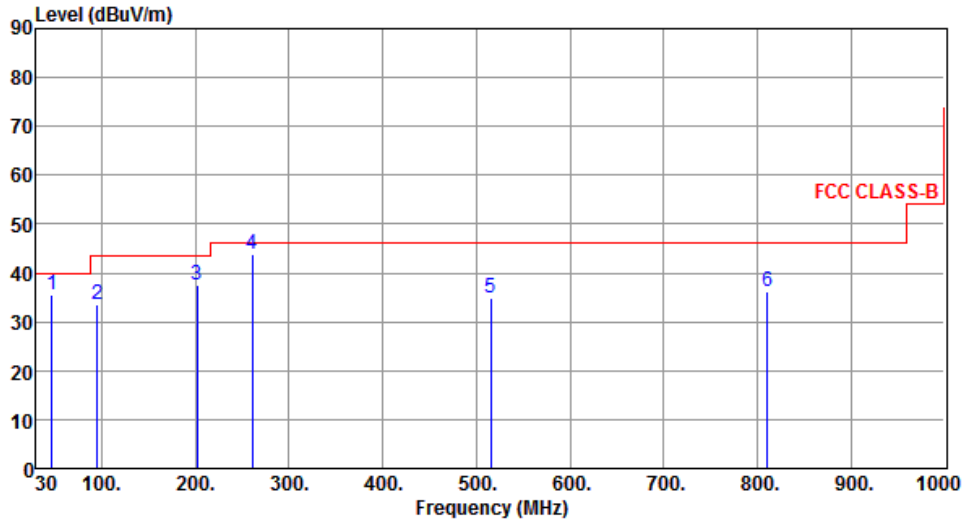

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	35.48	40.00	-4.52	51.80	-16.32	Peak	---	---
2	94.99	33.53	43.50	-9.97	55.69	-22.16	Peak	---	---
3	201.69	37.63	43.50	-5.87	56.93	-19.30	Peak	---	---
4	260.86	43.90	46.00	-2.10	61.25	-17.35	Peak	---	---
5	515.00	34.80	46.00	-11.20	45.72	-10.92	Peak	---	---
6	810.85	36.26	46.00	-9.74	42.64	-6.38	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	4

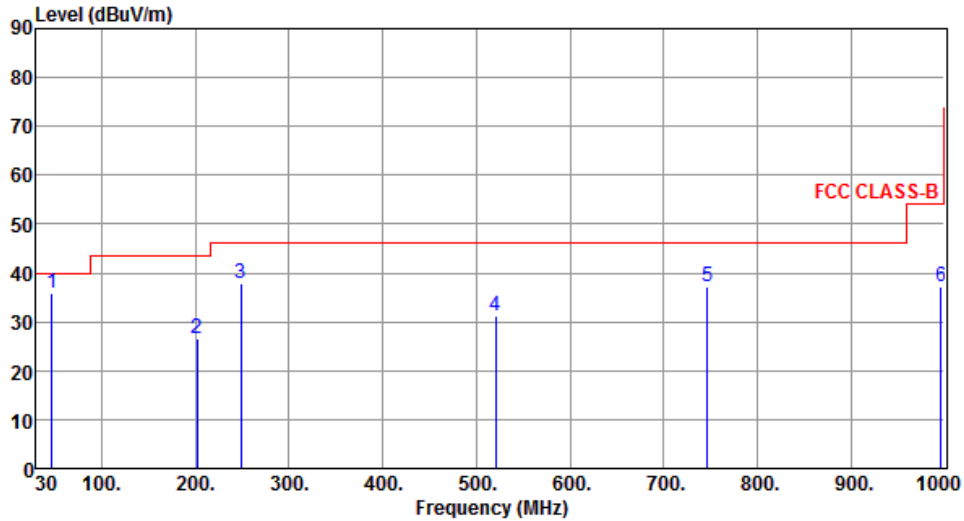

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	46.49	35.85	40.00	-4.15	52.17	-16.32	Peak	---	---
2	201.69	26.58	43.50	-16.92	45.88	-19.30	Peak	---	---
3	248.25	38.02	46.00	-7.98	55.77	-17.75	Peak	---	---
4	520.82	31.30	46.00	-14.70	42.16	-10.86	Peak	---	---
5	746.83	37.06	46.00	-8.94	44.07	-7.01	Peak	---	---
6	996.12	37.17	54.00	-16.83	41.28	-4.11	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for GFSK


Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	1

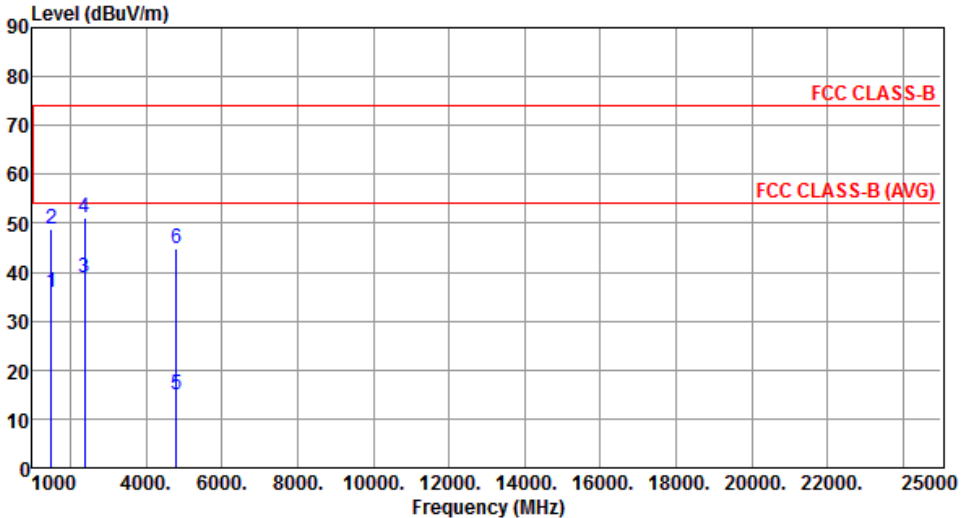

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.87	54.00	-18.13	42.70	-6.83	Average	100	156
2	1500.00	48.65	74.00	-25.35	55.48	-6.83	Peak	100	156
3	2390.00	38.77	54.00	-15.23	42.12	-3.35	Average	100	336
4	2390.00	51.26	74.00	-22.74	54.61	-3.35	Peak	100	336
5	4804.00	14.79	54.00	-39.21	11.26	3.53	Average	100	165
6	4804.00	44.89	74.00	-29.11	41.36	3.53	Peak	100	165

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	1

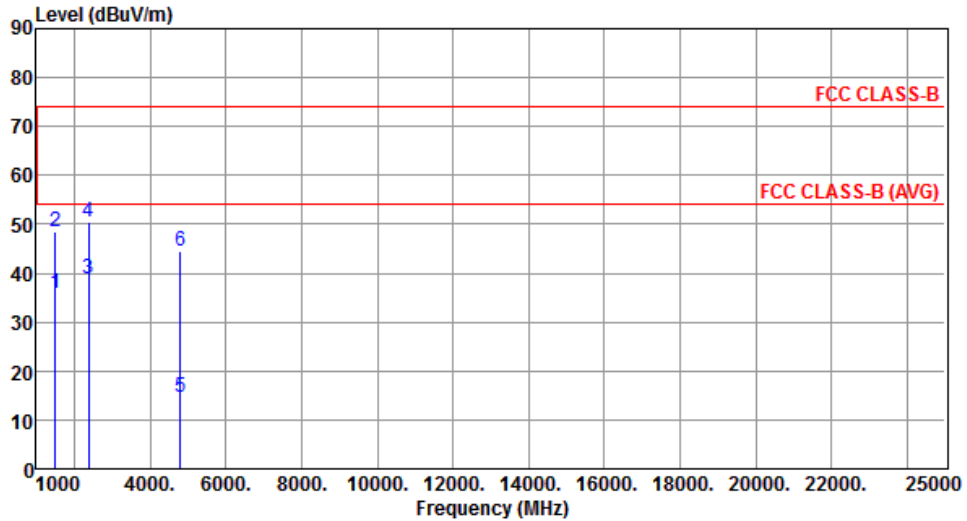


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.99	54.00	-18.01	42.82	-6.83	Average	100	160
2	1500.00	48.62	74.00	-25.38	55.45	-6.83	Peak	100	160
3	2390.00	38.98	54.00	-15.02	42.33	-3.35	Average	100	342
4	2390.00	50.58	74.00	-23.42	53.93	-3.35	Peak	100	342
5	4804.00	14.48	54.00	-39.52	10.95	3.53	Average	100	156
6	4804.00	44.58	74.00	-29.42	41.05	3.53	Peak	100	156

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	1

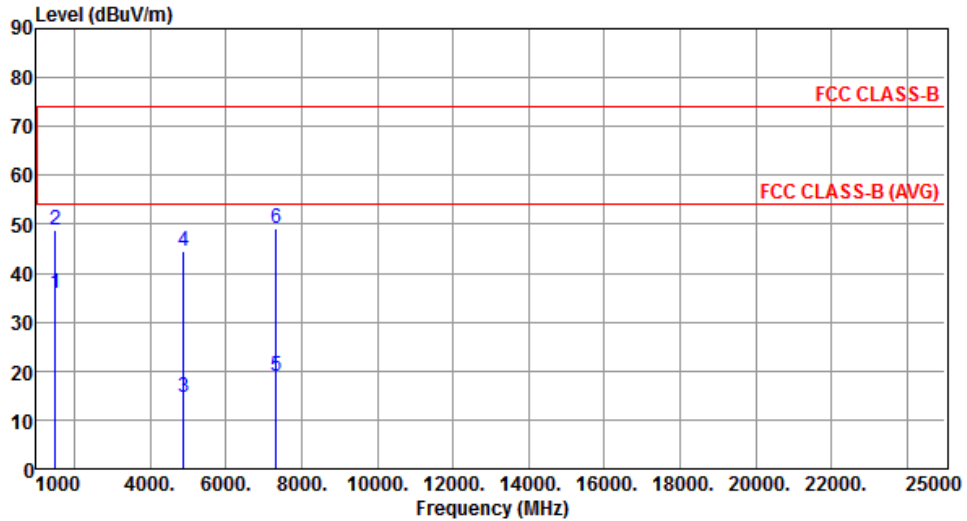


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.89	54.00	-18.11	42.72	-6.83	Average	100	155
2	1500.00	48.69	74.00	-25.31	55.52	-6.83	Peak	100	155
3	4882.00	14.53	54.00	-39.47	10.75	3.78	Average	100	165
4	4882.00	44.63	74.00	-29.37	40.85	3.78	Peak	100	165
5	7323.00	19.02	54.00	-34.98	10.59	8.43	Average	100	166
6	7323.00	49.12	74.00	-24.88	40.69	8.43	Peak	100	166

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	1

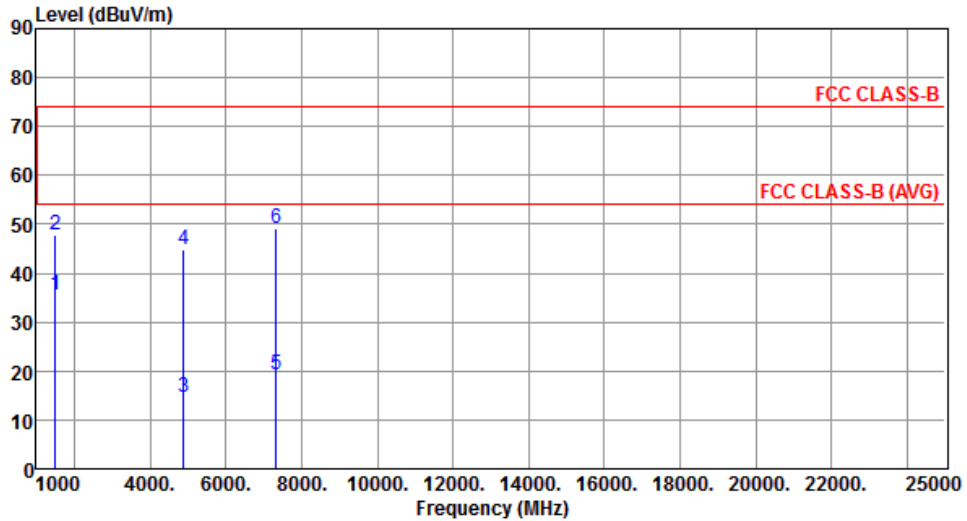


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.49	54.00	-18.51	42.32	-6.83	Average	100	162
2	1500.00	47.69	74.00	-26.31	54.52	-6.83	Peak	100	162
3	4882.00	14.63	54.00	-39.37	10.85	3.78	Average	100	158
4	4882.00	44.73	74.00	-29.27	40.95	3.78	Peak	100	158
5	7323.00	19.12	54.00	-34.88	10.69	8.43	Average	100	178
6	7323.00	49.22	74.00	-24.78	40.79	8.43	Peak	100	178

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	1

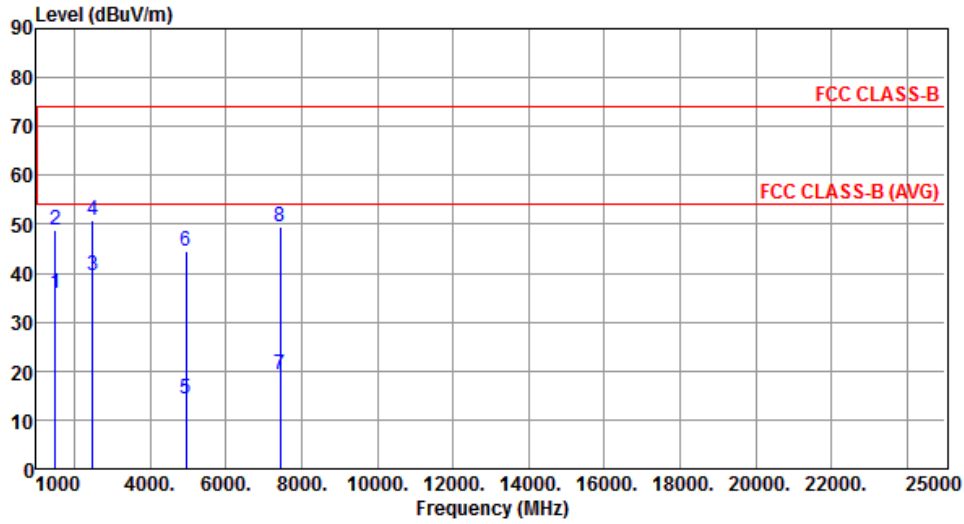


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.96	54.00	-18.04	42.79	-6.83	Average	100	153
2	1500.00	48.65	74.00	-25.35	55.48	-6.83	Peak	100	153
3	2483.50	39.42	54.00	-14.58	42.35	-2.93	Average	101	333
4	2483.50	50.86	74.00	-23.14	53.79	-2.93	Peak	101	333
5	4960.00	14.44	54.00	-39.56	10.40	4.04	Average	100	168
6	4960.00	44.54	74.00	-29.46	40.50	4.04	Peak	100	168
7	7440.00	19.39	54.00	-34.61	10.83	8.56	Average	100	196
8	7440.00	49.49	74.00	-24.51	40.93	8.56	Peak	100	196

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	1

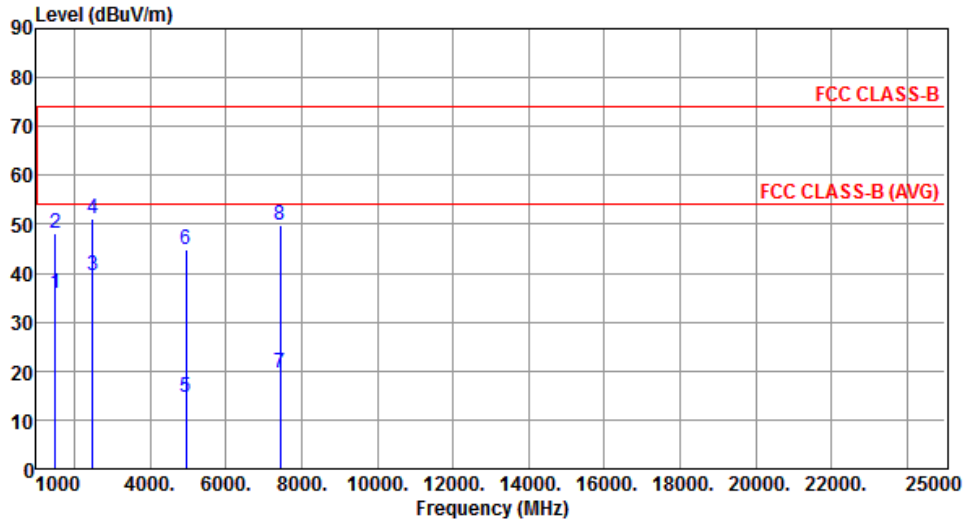


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.80	54.00	-18.20	42.63	-6.83	Average	100	160
2	1500.00	48.31	74.00	-25.69	55.14	-6.83	Peak	100	160
3	2483.50	39.35	54.00	-14.65	42.28	-2.93	Average	100	345
4	2483.50	51.25	74.00	-22.75	54.18	-2.93	Peak	100	345
5	4960.00	14.60	54.00	-39.40	10.56	4.04	Average	100	188
6	4960.00	44.70	74.00	-29.30	40.66	4.04	Peak	100	188
7	7440.00	19.67	54.00	-34.33	11.11	8.56	Average	100	215
8	7440.00	49.77	74.00	-24.23	41.21	8.56	Peak	100	215

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	3

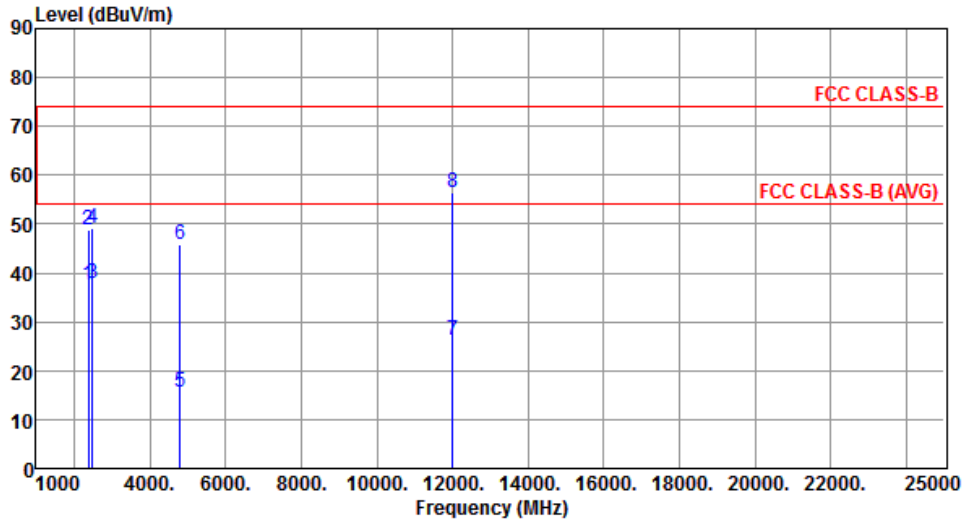


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.61	54.00	-16.39	40.96	-3.35	Average	330	276
2	2390.00	48.89	74.00	-25.11	52.24	-3.35	Peak	330	276
3	2483.50	37.91	54.00	-16.09	40.84	-2.93	Average	330	276
4	2483.50	49.15	74.00	-24.85	52.08	-2.93	Peak	330	276
5	4804.00	15.70	54.00	-38.30	12.17	3.53	Average	230	195
6	4804.00	45.80	74.00	-28.20	42.27	3.53	Peak	230	195
7	12010.00	26.21	54.00	-27.79	12.13	14.08	Average	267	187
8	12010.00	56.31	74.00	-17.69	42.23	14.08	Peak	267	187

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	3

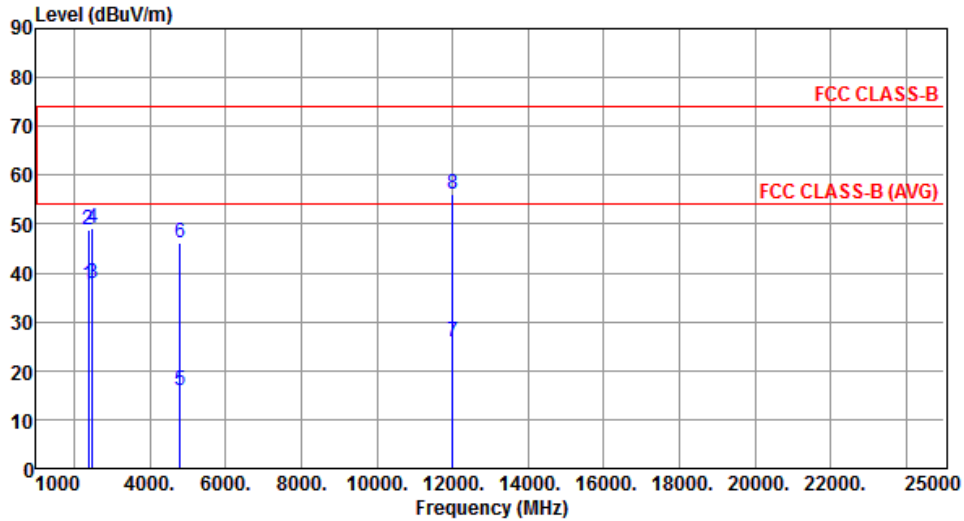


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.37	54.00	-16.63	40.72	-3.35	Average	255	271
2	2390.00	48.89	74.00	-25.11	52.24	-3.35	Peak	255	271
3	2483.50	37.88	54.00	-16.12	40.81	-2.93	Average	255	271
4	2483.50	49.24	74.00	-24.76	52.17	-2.93	Peak	255	271
5	4804.00	16.01	54.00	-37.99	12.48	3.53	Average	290	315
6	4804.00	46.11	74.00	-27.89	42.58	3.53	Peak	290	315
7	12010.00	25.95	54.00	-28.05	11.87	14.08	Average	269	172
8	12010.00	56.05	74.00	-17.95	41.97	14.08	Peak	269	172

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

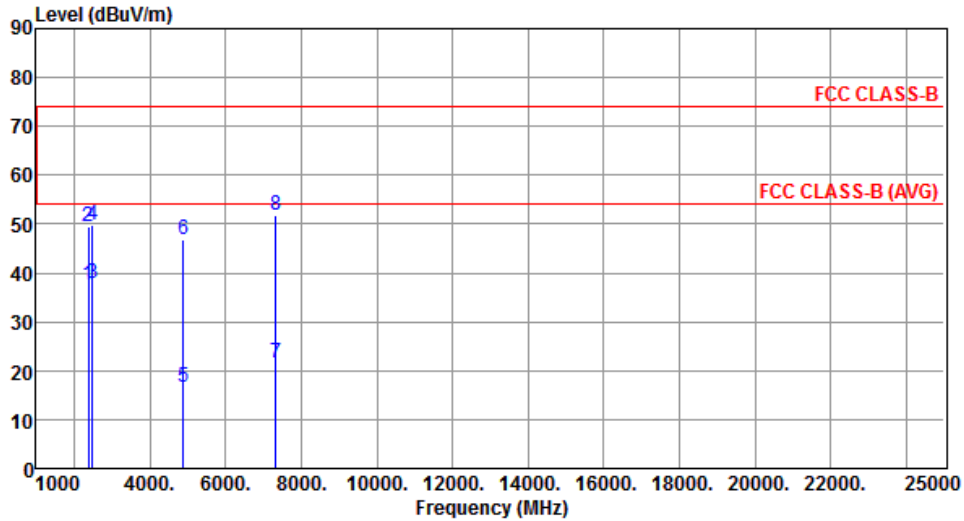


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.61	54.00	-16.39	40.96	-3.35	Average	311	311
2	2390.00	49.35	74.00	-24.65	52.70	-3.35	Peak	311	311
3	2483.50	37.95	54.00	-16.05	40.88	-2.93	Average	311	311
4	2483.50	49.90	74.00	-24.10	52.83	-2.93	Peak	311	311
5	4882.00	16.57	54.00	-37.43	12.79	3.78	Average	267	127
6	4882.00	46.67	74.00	-27.33	42.89	3.78	Peak	267	127
7	7323.00	21.56	54.00	-32.44	13.13	8.43	Average	299	271
8	7323.00	51.66	74.00	-22.34	43.23	8.43	Peak	299	271

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

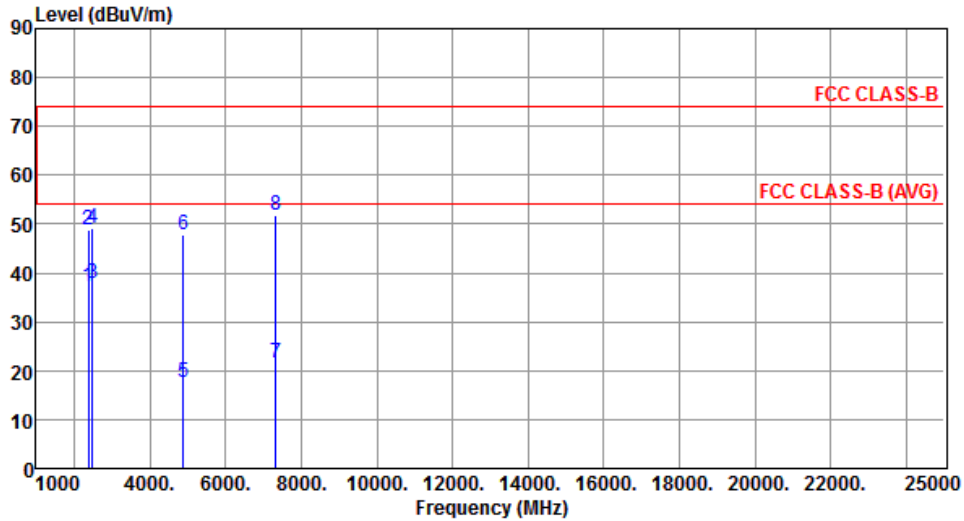


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.08	54.00	-16.92	40.43	-3.35	Average	258	287
2	2390.00	48.75	74.00	-25.25	52.10	-3.35	Peak	258	287
3	2483.50	37.90	54.00	-16.10	40.83	-2.93	Average	258	287
4	2483.50	49.17	74.00	-24.83	52.10	-2.93	Peak	258	287
5	4882.00	17.57	54.00	-36.43	13.79	3.78	Average	257	157
6	4882.00	47.67	74.00	-26.33	43.89	3.78	Peak	257	157
7	7323.00	21.62	54.00	-32.38	13.19	8.43	Average	318	157
8	7323.00	51.72	74.00	-22.28	43.29	8.43	Peak	318	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

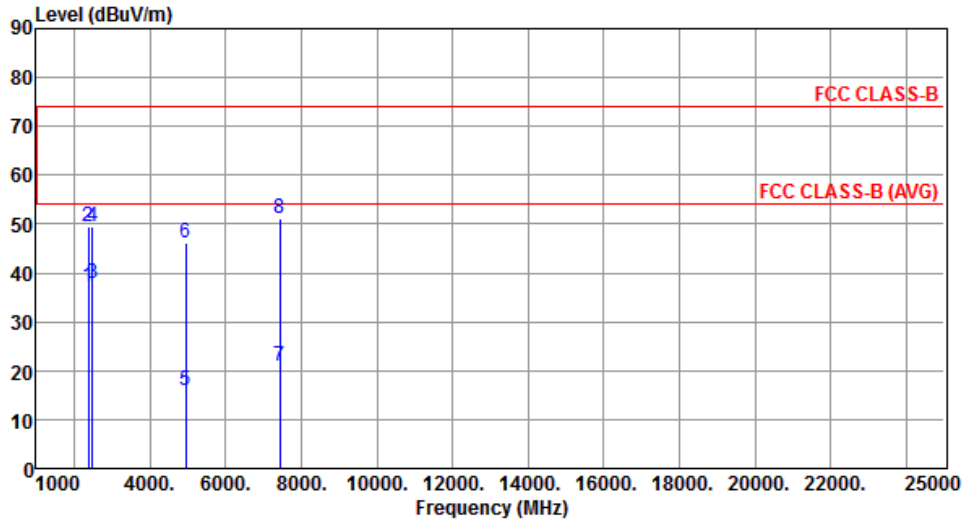


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.08	54.00	-16.92	40.43	-3.35	Average	330	297
2	2390.00	49.32	74.00	-24.68	52.67	-3.35	Peak	330	297
3	2483.50	37.87	54.00	-16.13	40.80	-2.93	Average	330	297
4	2483.50	49.60	74.00	-24.40	52.53	-2.93	Peak	330	297
5	4960.00	15.96	54.00	-38.04	11.92	4.04	Average	281	127
6	4960.00	46.06	74.00	-27.94	42.02	4.04	Peak	281	127
7	7440.00	21.07	54.00	-32.93	12.51	8.56	Average	271	229
8	7440.00	51.17	74.00	-22.83	42.61	8.56	Peak	271	229

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	GFSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

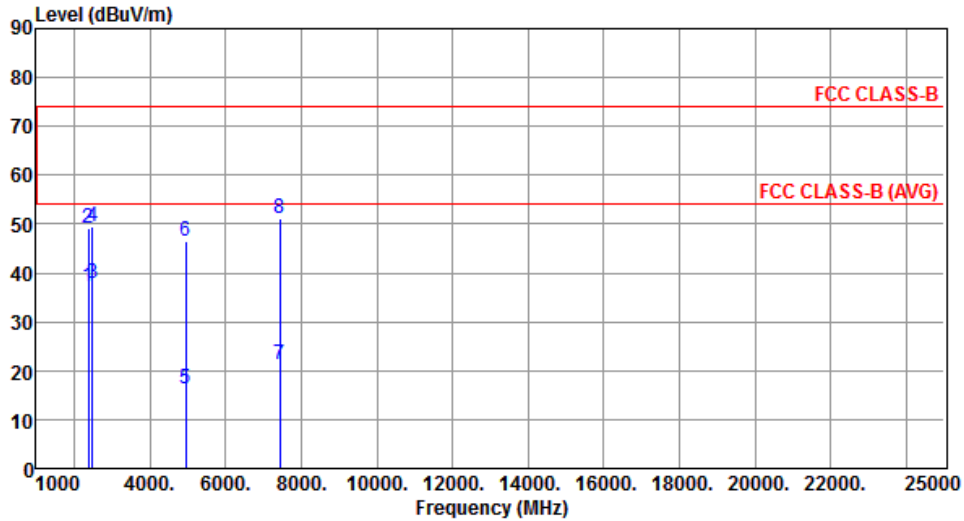


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.11	54.00	-16.89	40.46	-3.35	Average	240	336
2	2390.00	49.00	74.00	-25.00	52.35	-3.35	Peak	240	336
3	2483.50	37.69	54.00	-16.31	40.62	-2.93	Average	240	336
4	2483.50	49.33	74.00	-24.67	52.26	-2.93	Peak	240	336
5	4960.00	16.23	54.00	-37.77	12.19	4.04	Average	236	169
6	4960.00	46.33	74.00	-27.67	42.29	4.04	Peak	236	169
7	7440.00	21.18	54.00	-32.82	12.62	8.56	Average	255	174
8	7440.00	51.28	74.00	-22.72	42.72	8.56	Peak	255	174

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 8DPSK

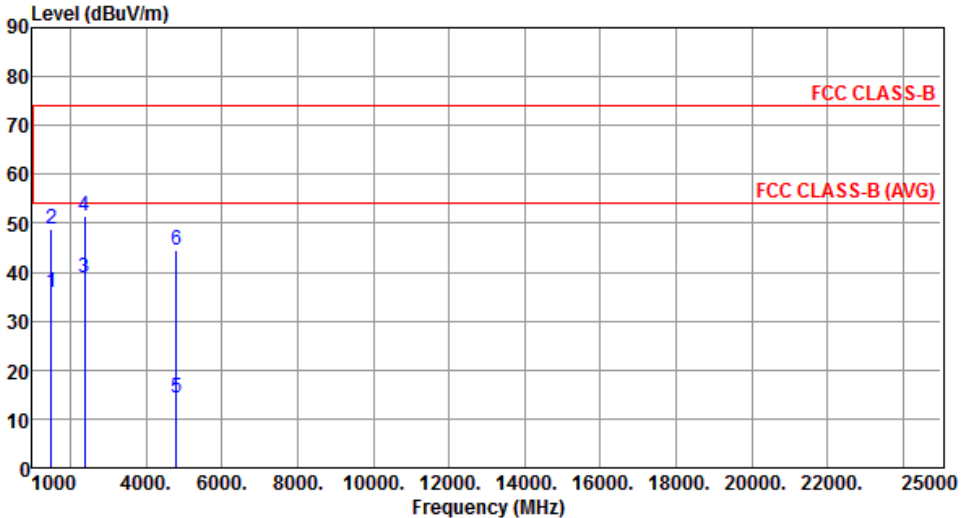Modulation	8DPSK	Test Freq. (MHz)	2402						
Polarization	Horizontal	Test Configuration	1						
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	1500.00	35.78	54.00	-18.22	42.61	-6.83	Average	100	158
2	1500.00	48.78	74.00	-25.22	55.61	-6.83	Peak	100	158
3	2390.00	38.96	54.00	-15.04	42.31	-3.35	Average	100	335
4	2390.00	51.49	74.00	-22.51	54.84	-3.35	Peak	100	335
5	4804.00	14.26	54.00	-39.74	10.73	3.53	Average	100	168
6	4804.00	44.36	74.00	-29.64	40.83	3.53	Peak	100	168
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>									

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	1

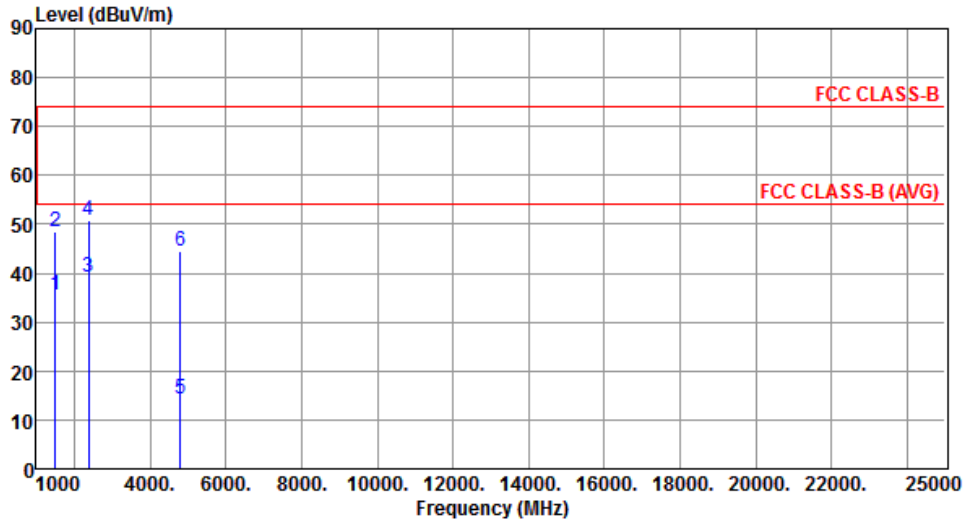


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.58	54.00	-18.42	42.41	-6.83	Average	100	158
2	1500.00	48.51	74.00	-25.49	55.34	-6.83	Peak	100	158
3	2390.00	39.06	54.00	-14.94	42.41	-3.35	Average	100	341
4	2390.00	50.89	74.00	-23.11	54.24	-3.35	Peak	100	341
5	4804.00	14.36	54.00	-39.64	10.83	3.53	Average	100	156
6	4804.00	44.46	74.00	-29.54	40.93	3.53	Peak	100	152

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	1

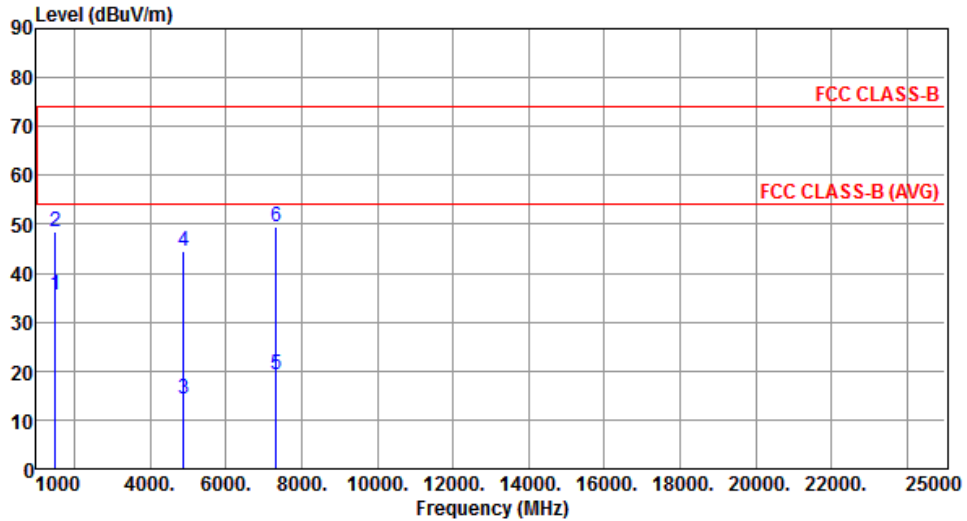


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.69	54.00	-18.31	42.52	-6.83	Average	100	154
2	1500.00	48.62	74.00	-25.38	55.45	-6.83	Peak	100	154
3	4882.00	14.39	54.00	-39.61	10.61	3.78	Average	100	163
4	4882.00	44.49	74.00	-29.51	40.71	3.78	Peak	100	163
5	7323.00	19.22	54.00	-34.78	10.79	8.43	Average	100	157
6	7323.00	49.32	74.00	-24.68	40.89	8.43	Peak	100	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	1

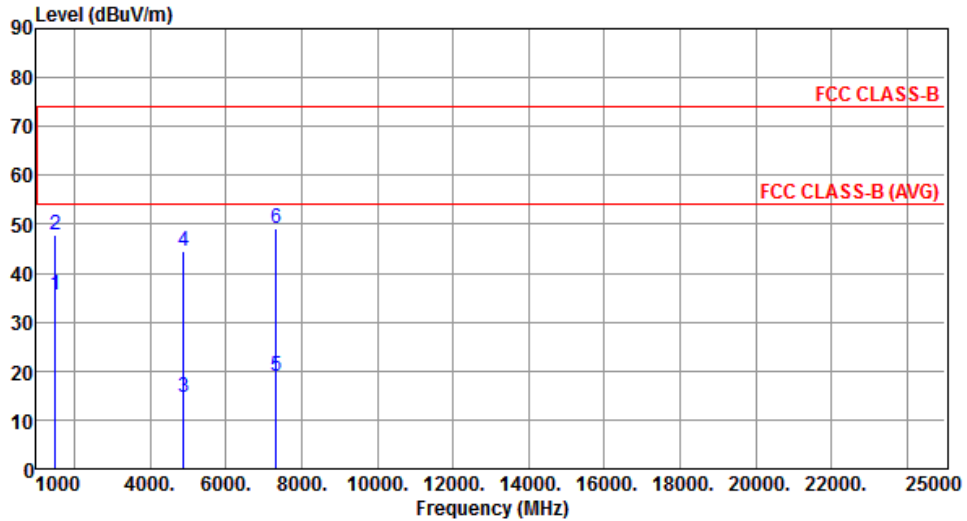


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.67	54.00	-18.33	42.50	-6.83	Average	100	159
2	1500.00	47.81	74.00	-26.19	54.64	-6.83	Peak	100	159
3	4882.00	14.53	54.00	-39.47	10.75	3.78	Average	100	158
4	4882.00	44.63	74.00	-29.37	40.85	3.78	Peak	100	155
5	7323.00	18.98	54.00	-35.02	10.55	8.43	Average	100	175
6	7323.00	49.08	74.00	-24.92	40.65	8.43	Peak	100	175

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	1

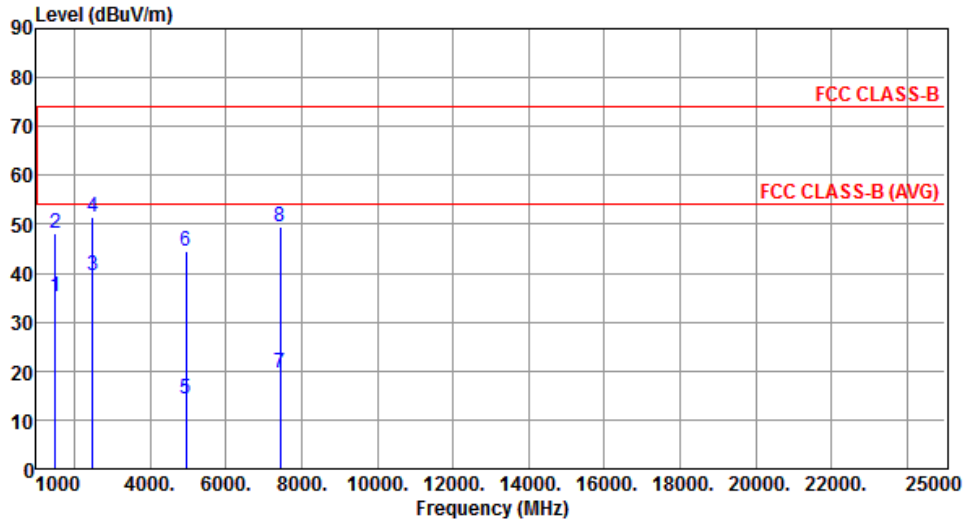


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.28	54.00	-18.72	42.11	-6.83	Average	100	148
2	1500.00	48.31	74.00	-25.69	55.14	-6.83	Peak	100	148
3	2483.50	39.53	54.00	-14.47	42.46	-2.93	Average	100	334
4	2483.50	51.32	74.00	-22.68	54.25	-2.93	Peak	100	334
5	4960.00	14.35	54.00	-39.65	10.31	4.04	Average	100	163
6	4960.00	44.45	74.00	-29.55	40.41	4.04	Peak	100	163
7	7440.00	19.53	54.00	-34.47	10.97	8.56	Average	100	183
8	7440.00	49.63	74.00	-24.37	41.07	8.56	Peak	100	183

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	1

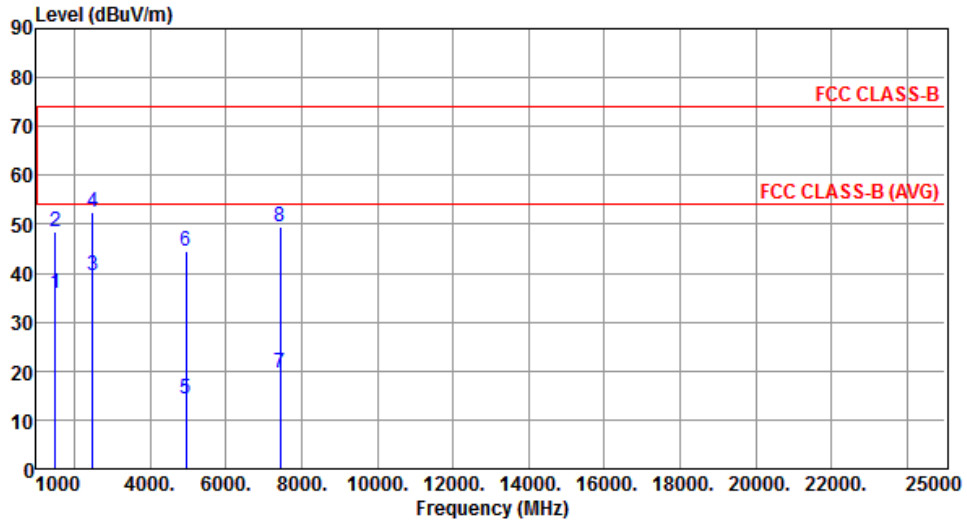


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	35.78	54.00	-18.22	42.61	-6.83	Average	100	155
2	1500.00	48.49	74.00	-25.51	55.32	-6.83	Peak	100	155
3	2483.50	39.42	54.00	-14.58	42.35	-2.93	Average	100	343
4	2483.50	52.32	74.00	-21.68	55.25	-2.93	Peak	100	343
5	4960.00	14.36	54.00	-39.64	10.32	4.04	Average	100	182
6	4960.00	44.46	74.00	-29.54	40.42	4.04	Peak	100	182
7	7440.00	19.48	54.00	-34.52	10.92	8.56	Average	100	213
8	7440.00	49.58	74.00	-24.42	41.02	8.56	Peak	100	213

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Horizontal	Test Configuration	3

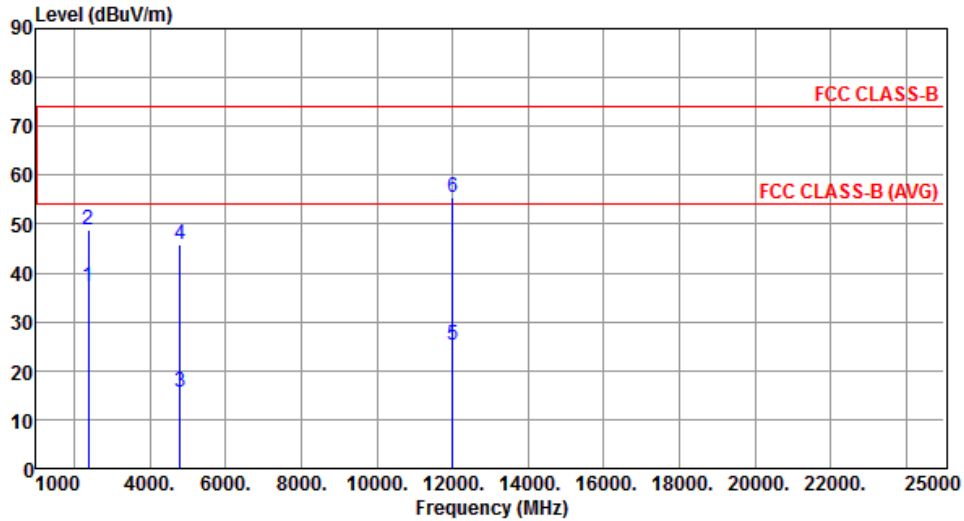


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.32	54.00	-16.68	40.67	-3.35	Average	321	307
2	2390.00	48.90	74.00	-25.10	52.25	-3.35	Peak	321	307
3	4804.00	15.70	54.00	-38.30	12.17	3.53	Average	230	195
4	4804.00	45.80	74.00	-28.20	42.27	3.53	Peak	230	195
5	12010.00	25.27	54.00	-28.73	11.19	14.08	Average	175	298
6	12010.00	55.37	74.00	-18.63	41.29	14.08	Peak	175	298

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2402
Polarization	Vertical	Test Configuration	3

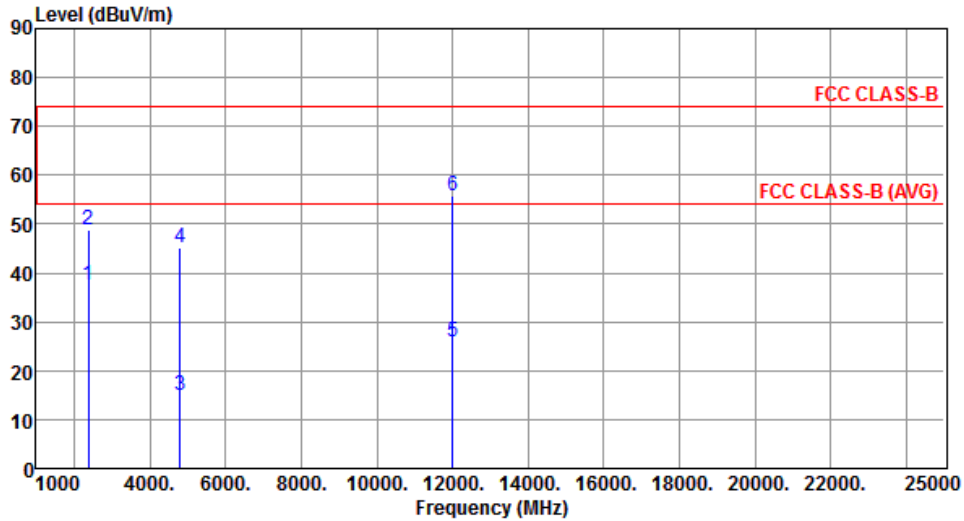


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.37	54.00	-16.63	40.72	-3.35	Average	321	275
2	2390.00	48.92	74.00	-25.08	52.27	-3.35	Peak	321	275
3	4804.00	15.07	54.00	-38.93	11.54	3.53	Average	249	159
4	4804.00	45.17	74.00	-28.83	41.64	3.53	Peak	249	159
5	12010.00	25.82	54.00	-28.18	11.74	14.08	Average	306	188
6	12010.00	55.92	74.00	-18.08	41.84	14.08	Peak	306	188

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Horizontal	Test Configuration	3

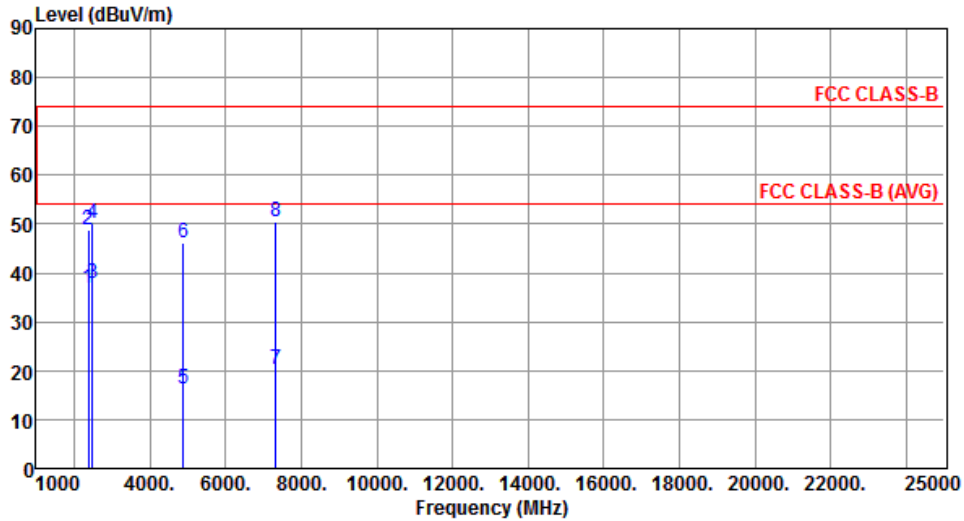


	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.92	54.00	-17.08	40.27	-3.35	Average	323	273
2	2390.00	48.92	74.00	-25.08	52.27	-3.35	Peak	323	273
3	2483.50	37.95	54.00	-16.05	40.88	-2.93	Average	323	273
4	2483.50	50.23	74.00	-23.77	53.16	-2.93	Peak	323	273
5	4882.00	16.16	54.00	-37.84	12.38	3.78	Average	127	298
6	4882.00	46.26	74.00	-27.74	42.48	3.78	Peak	127	298
7	7323.00	20.25	54.00	-33.75	11.82	8.43	Average	257	297
8	7323.00	50.35	74.00	-23.65	41.92	8.43	Peak	257	297

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Modulation	8DPSK	Test Freq. (MHz)	2441
Polarization	Vertical	Test Configuration	3

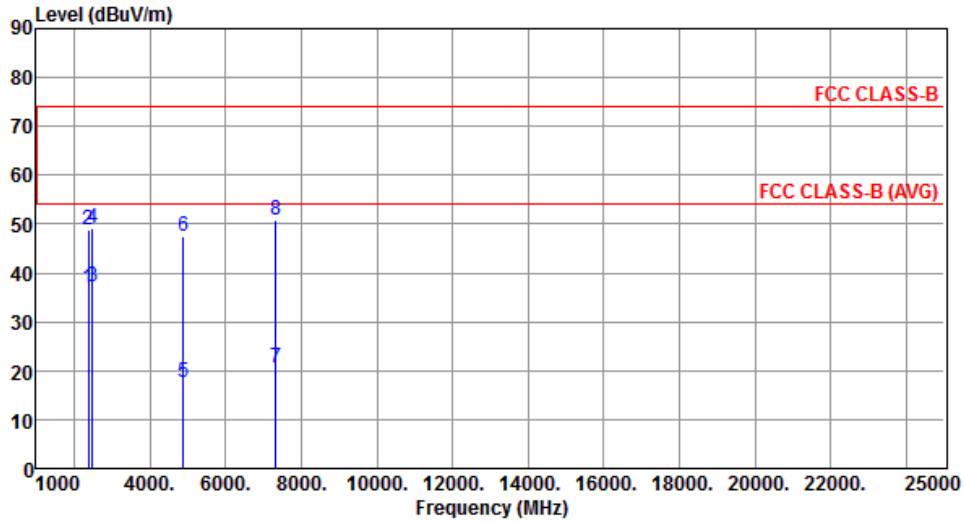


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	36.89	54.00	-17.11	40.24	-3.35	Average	258	287
2	2390.00	48.89	74.00	-25.11	52.24	-3.35	Peak	258	287
3	2483.50	37.03	54.00	-16.97	39.96	-2.93	Average	258	287
4	2483.50	49.12	74.00	-24.88	52.05	-2.93	Peak	258	287
5	4882.00	17.48	54.00	-36.52	13.70	3.78	Average	144	292
6	4882.00	47.58	74.00	-26.42	43.80	3.78	Peak	144	292
7	7323.00	20.60	54.00	-33.40	12.17	8.43	Average	271	59
8	7323.00	50.70	74.00	-23.30	42.27	8.43	Peak	271	59

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Horizontal	Test Configuration	3

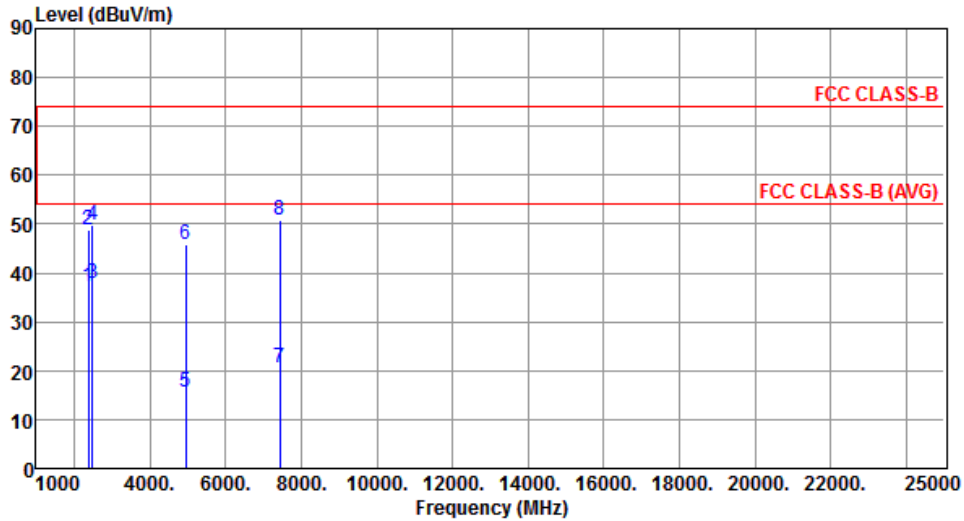


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.20	54.00	-16.80	40.55	-3.35	Average	330	303
2	2390.00	48.89	74.00	-25.11	52.24	-3.35	Peak	330	303
3	2483.50	37.95	54.00	-16.05	40.88	-2.93	Average	330	303
4	2483.50	49.66	74.00	-24.34	52.59	-2.93	Peak	330	303
5	4960.00	15.75	54.00	-38.25	11.71	4.04	Average	258	136
6	4960.00	45.85	74.00	-28.15	41.81	4.04	Peak	258	136
7	7440.00	20.67	54.00	-33.33	12.11	8.56	Average	309	179
8	7440.00	50.77	74.00	-23.23	42.21	8.56	Peak	309	179

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Modulation	8DPSK	Test Freq. (MHz)	2480
Polarization	Vertical	Test Configuration	3

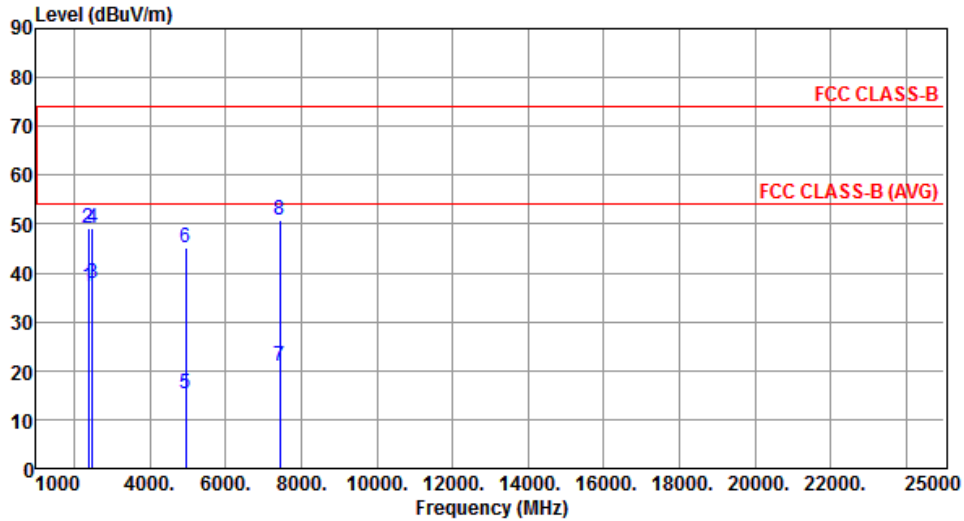

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	37.19	54.00	-16.81	40.54	-3.35	Average	243	336
2	2390.00	49.10	74.00	-24.90	52.45	-3.35	Peak	243	336
3	2483.50	37.95	54.00	-16.05	40.88	-2.93	Average	243	336
4	2483.50	49.23	74.00	-24.77	52.16	-2.93	Peak	243	336
5	4960.00	15.22	54.00	-38.78	11.18	4.04	Average	264	277
6	4960.00	45.32	74.00	-28.68	41.28	4.04	Peak	264	277
7	7440.00	20.79	54.00	-33.21	12.23	8.56	Average	246	173
8	7440.00	50.89	74.00	-23.11	42.33	8.56	Peak	246	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

3.3 Unwanted Emissions into Non-Restricted Frequency Bands

3.3.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.

3.3.2 Test Procedures


Reference Level Measurement

1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Set Sweep time = auto couple, Trace mode = max hold.
3. Allow trace to fully stabilize.
4. Use the peak marker function to determine the maximum amplitude level.

Unwanted Emissions Level Measurement


1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
2. Trace Mode = max hold, Sweep = auto couple.
3. Allow the trace to stabilize.
4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.


3.3.3 Test Setup

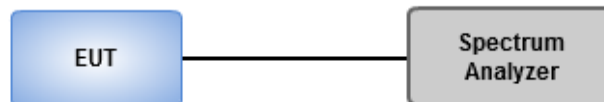


3.3.4 Unwanted Emissions into Non-Restricted Frequency Bands


GFSK

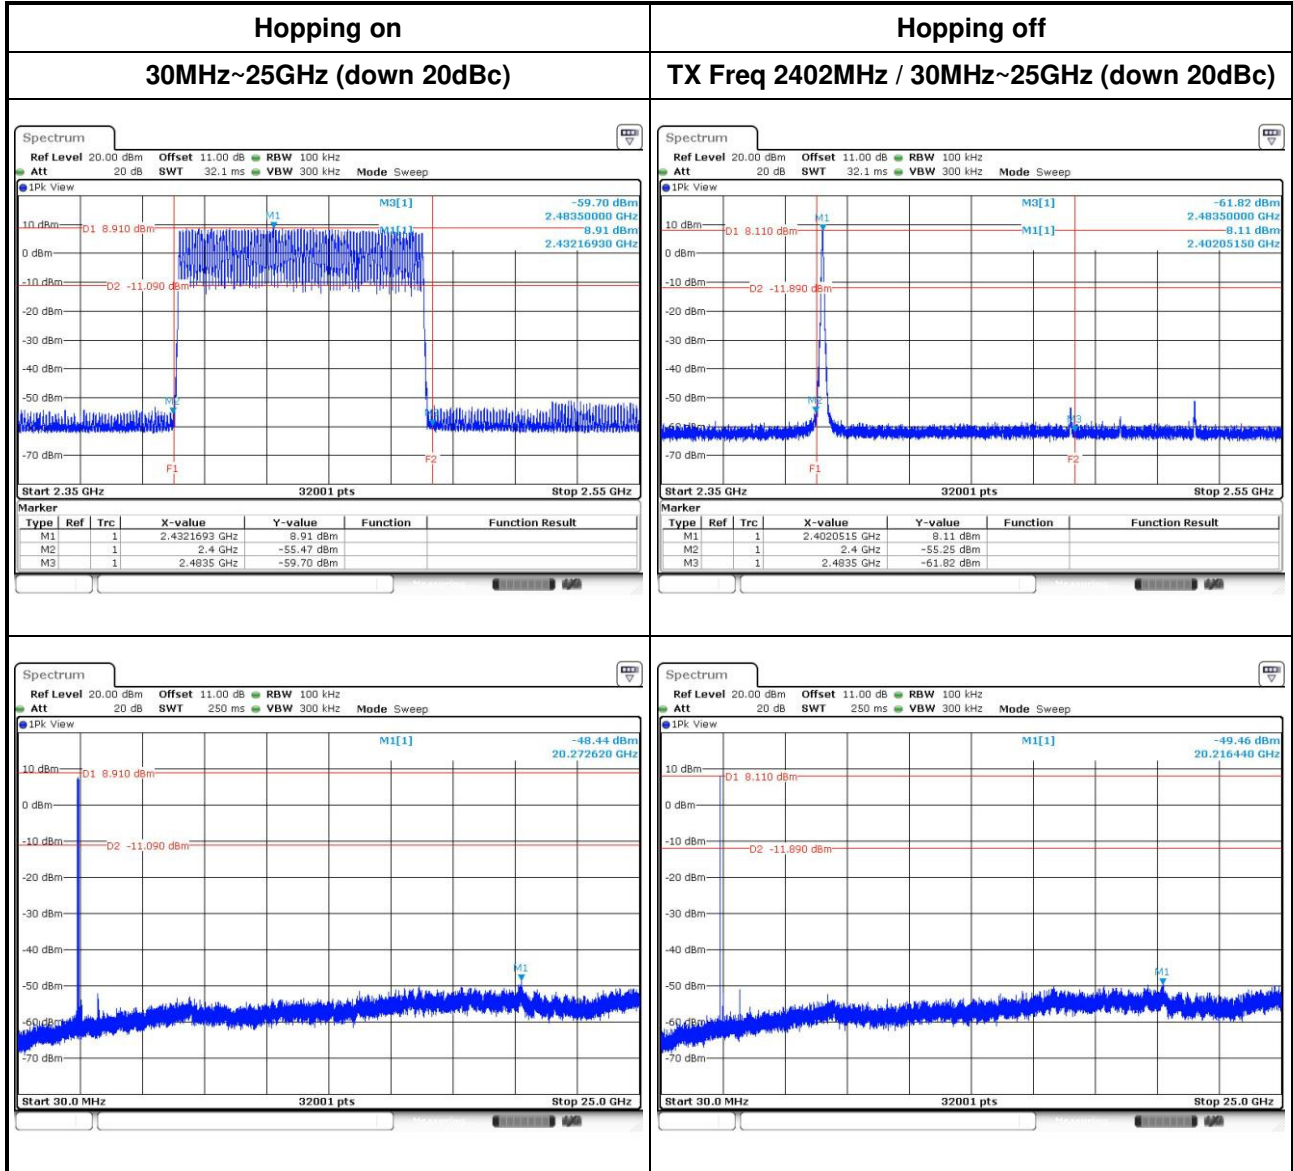

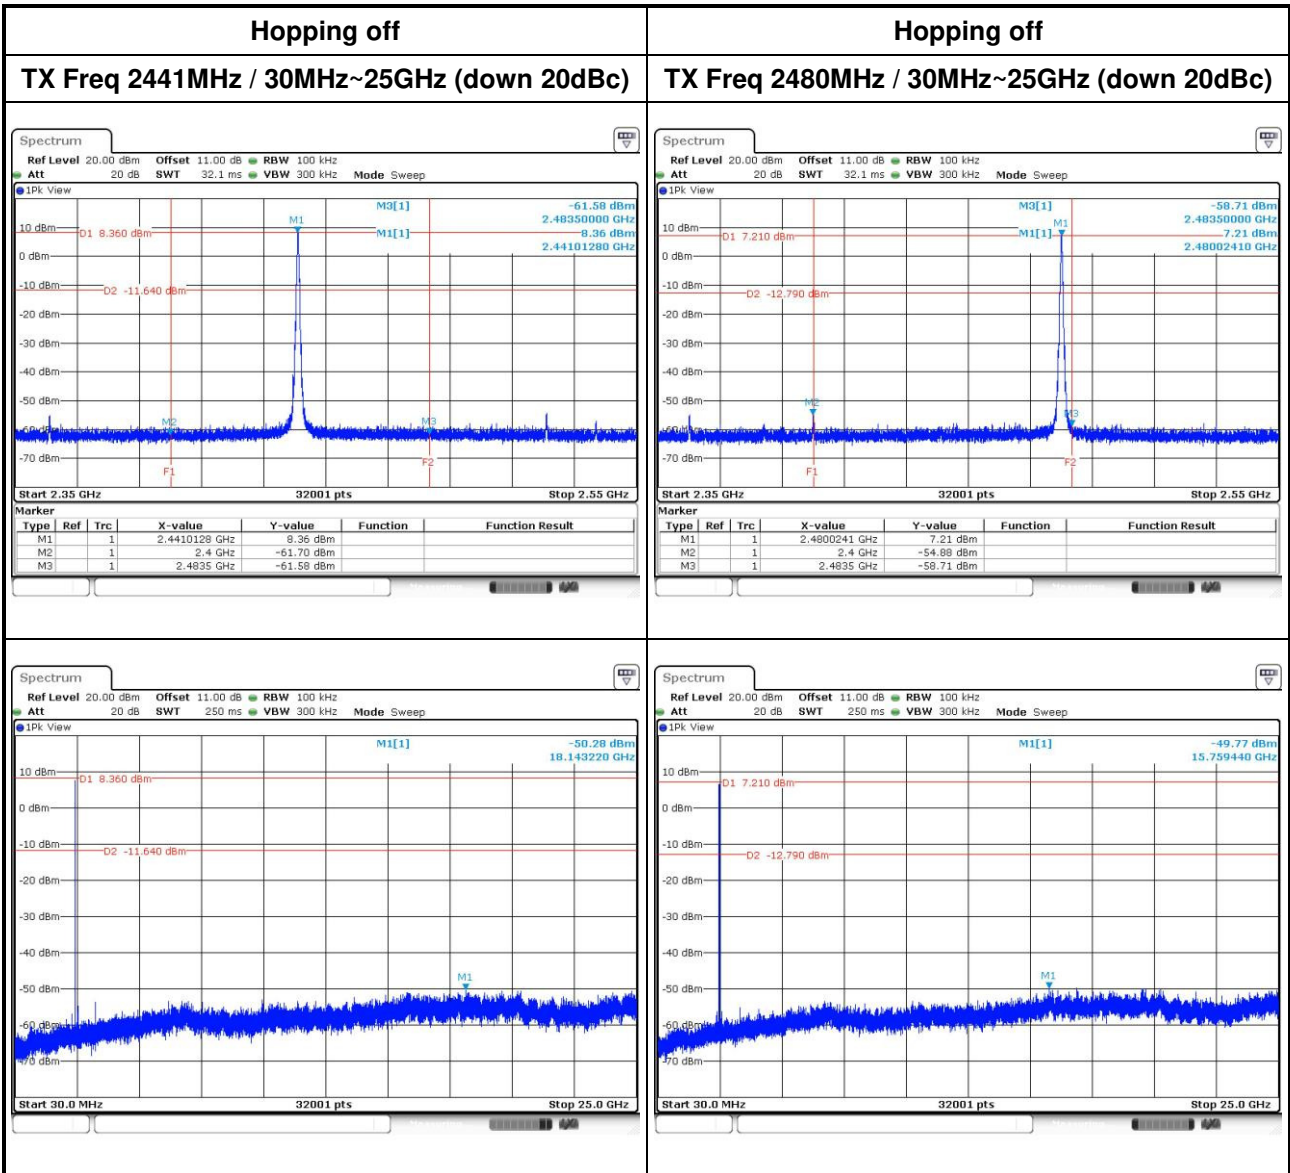

8DPSK

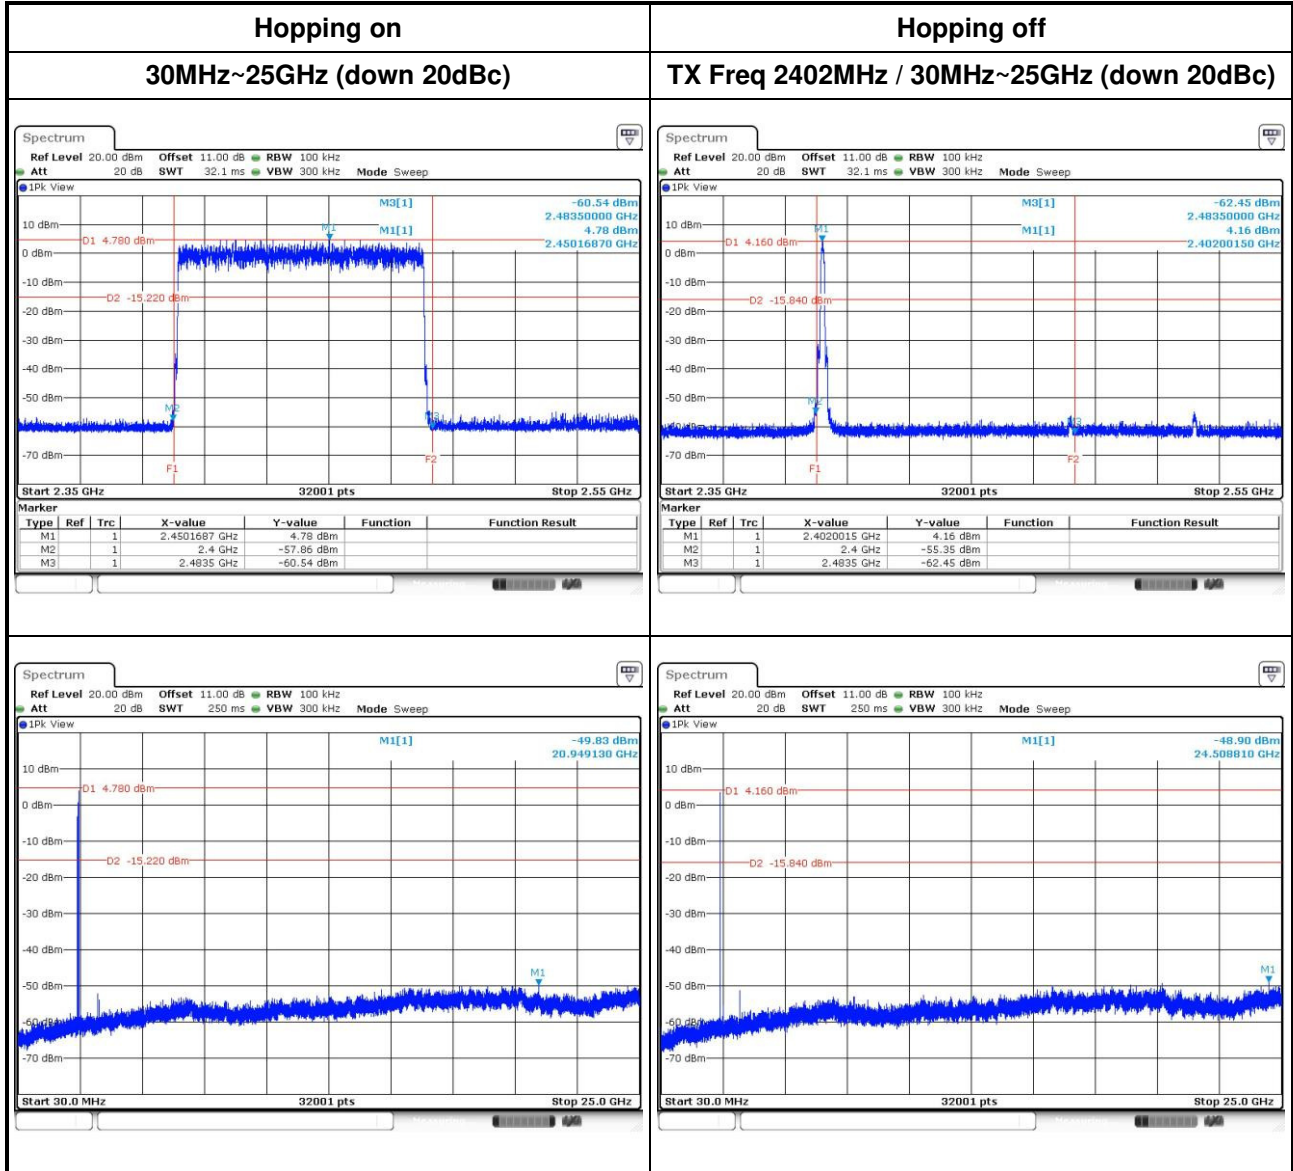

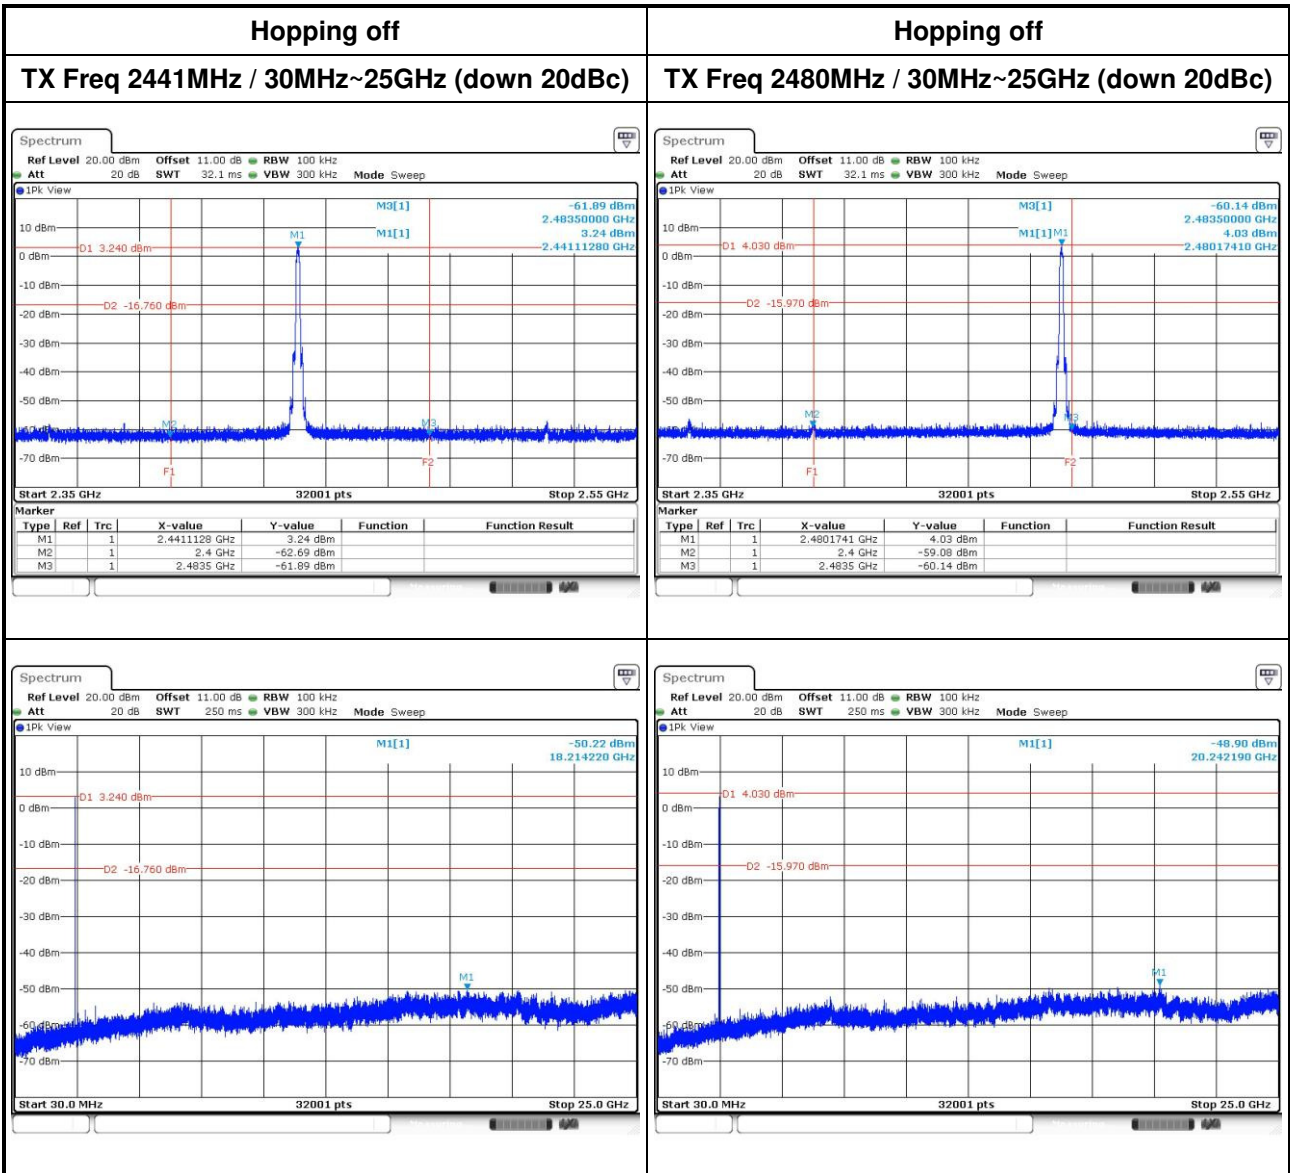

3.4 Conducted Output Power


3.4.1 Limit of Conducted Output Power

- 1 Watt
For frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band.
- 0.125 Watt
For all other frequency hopping systems in the 2400–2483.5 MHz band.
- 0.125 Watt
For Frequency hopping systems operating in the 2400–2483.5 MHz band have hopping channel carrier frequencies that are separated by two-thirds of the 20 dB bandwidth of the hopping channel.

3.4.2 Test Procedures

1. A wideband power meter is used for power measurement. Bandwidth of power sensor and meter is 50MHz
2. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power

3.4.3 Test Setup

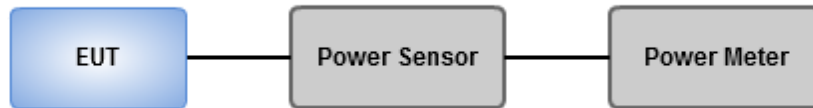

3.4.4 Test Result of Conducted Output Power

Modulation Mode	Freq. (MHz)	Output Power (mW)	Output Power (dBm)	Limit (mW)
GFSK	2402	7.96	9.01	125
GFSK	2441	8.55	9.32	125
GFSK	2480	6.78	8.31	125
π/4 DQPSK	2402	5.42	7.34	125
π/4 DQPSK	2441	6.03	7.80	125
π/4 DQPSK	2480	5.25	7.20	125
8DPSK	2402	5.68	7.54	125
8DPSK	2441	6.27	7.97	125
8DPSK	2480	5.51	7.41	125

Modulation Mode	Freq. (MHz)	AV Output Power (mW)	AV Output Power (dBm)
GFSK	2402	7.76	8.9
GFSK	2441	8.30	9.19
GFSK	2480	6.55	8.16
π/4 DQPSK	2402	3.08	4.88
π/4 DQPSK	2441	3.44	5.36
π/4 DQPSK	2480	2.91	4.64
8DPSK	2402	3.06	4.86
8DPSK	2441	3.42	5.34
8DPSK	2480	2.91	4.64

Note: Average power is for reference only.

3.5 Number of Hopping Frequency


3.5.1 Limit of Number of Hopping Frequency

Frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.


3.5.2 Test Procedures

1. Set RBW = 100kHz, VBW = 300kHz, Sweep time = Auto, Detector = Peak Trace max hold.
2. Allow trace to stabilize.

3.5.3 Test Setup

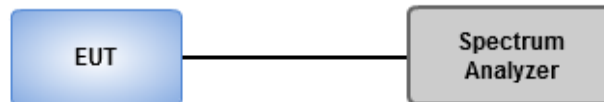

3.5.4 Test Result of Number of Hopping Frequency

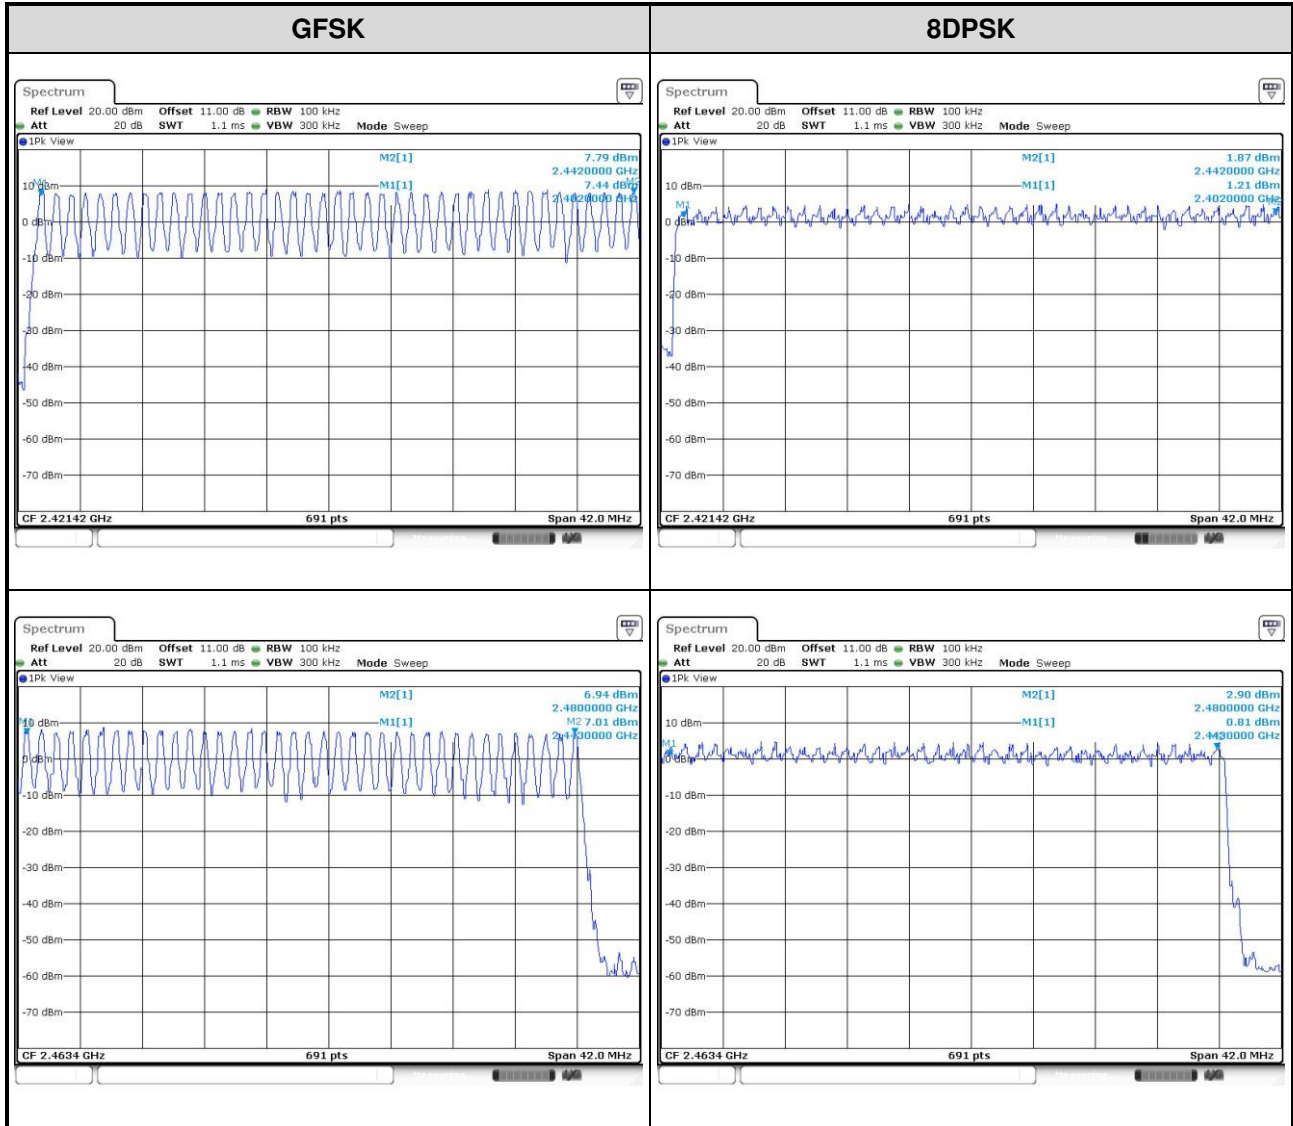


3.6 20dB and Occupied Bandwidth

3.6.1 Test Procedures


1. Set RBW=30kHz, VBW=100kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.
4. Use Occupied bandwidth function of spectrum analyzer to measuring 99% occupied bandwidth

3.6.2 Test Setup

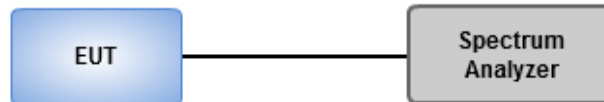

3.6.3 Test result of 20dB and Occupied Bandwidth

Modulation Mode	Freq. (MHz)	20dB Bandwidth (MHz)	Occupied Bandwidth (MHz)
GFSK	2402	0.948	0.899
GFSK	2441	0.952	0.899
GFSK	2480	1.009	0.894
8DPSK	2402	1.322	1.207
8DPSK	2441	1.322	1.207
8DPSK	2480	1.322	1.203

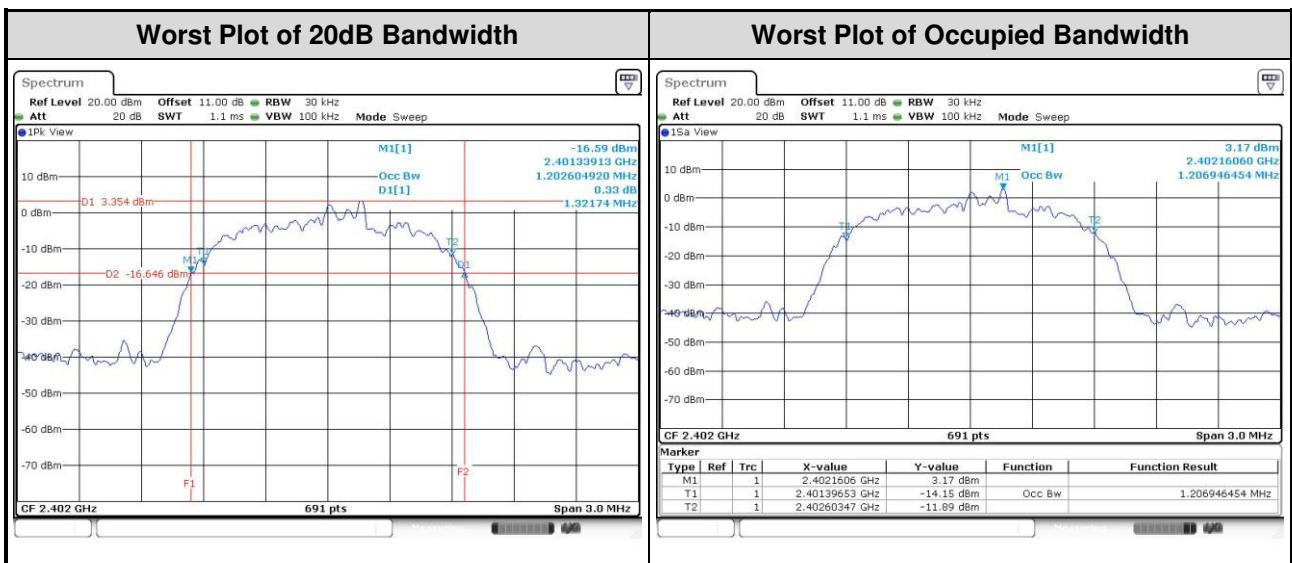

3.7 Channel Separation


3.7.1 Limit of Channel Separation

- Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.
- Frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater.

3.7.2 Test Procedures


1. Set RBW=100kHz, VBW=300kHz, Sweep time = Auto, Detector=Peak Trace max hold
2. Allow trace to stabilize
3. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The EUT shall show compliance with the appropriate regulatory limit

3.7.3 Test Setup

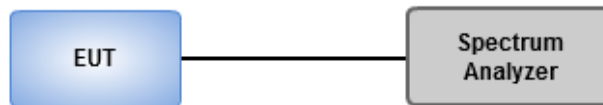

3.7.4 Test result of Channel Separation

Modulation Mode	Freq. (MHz)	Channel Separation (MHz)	20dB Bandwidth (MHz)	Minimum Limit (MHz)
GFSK	2402	1.003	0.948	0.632
GFSK	2441	1.003	0.952	0.635
GFSK	2480	1.003	1.009	0.673
8DPSK	2402	1.003	1.322	0.881
8DPSK	2441	1.003	1.322	0.881
8DPSK	2480	1.003	1.322	0.881

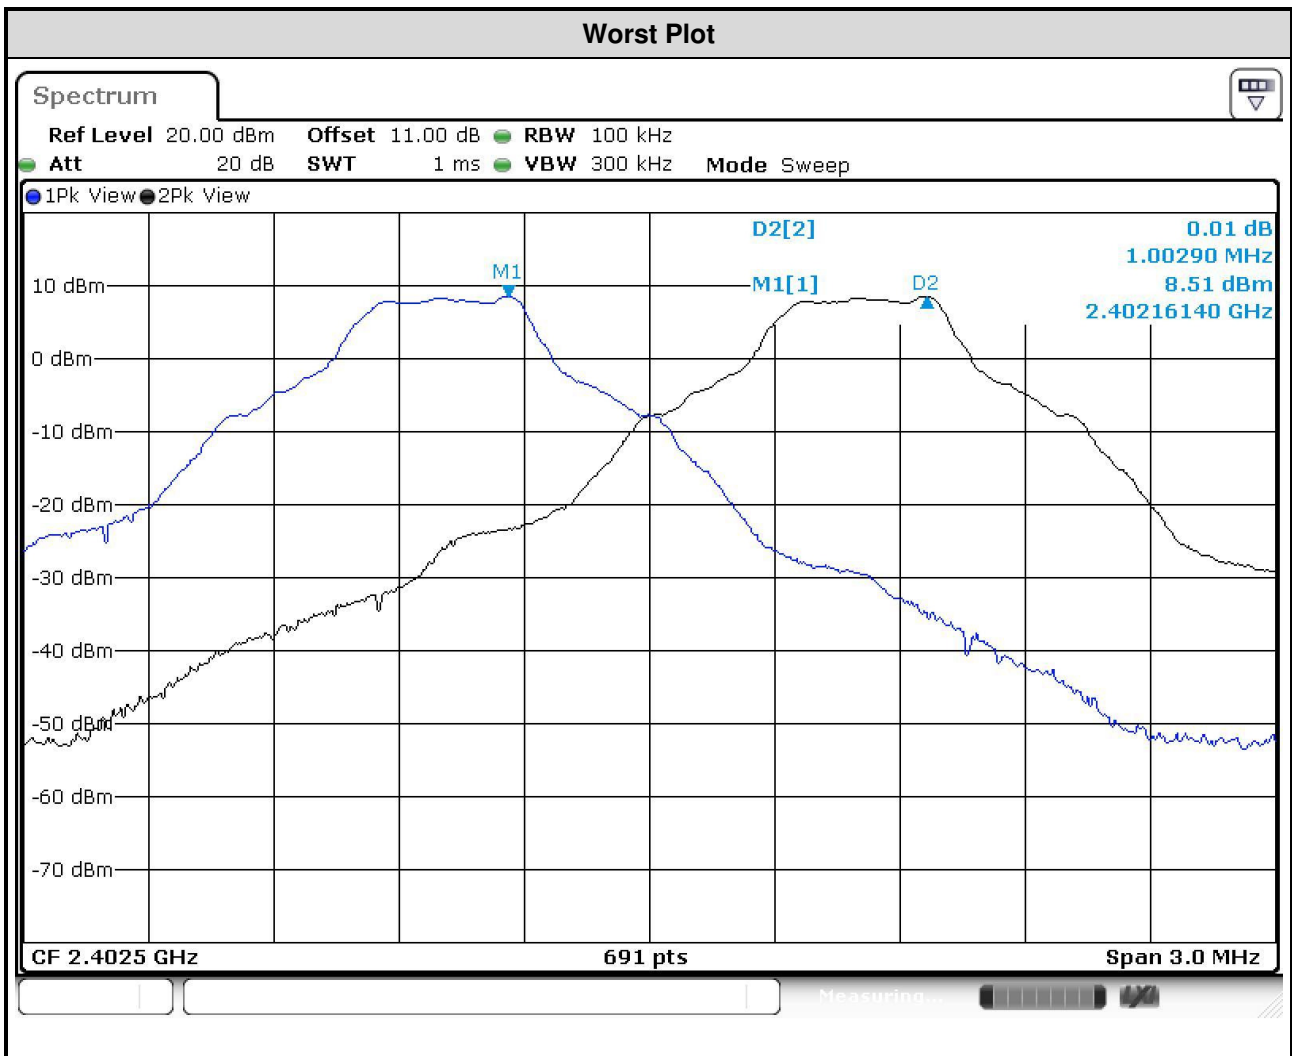

3.8 Number of Dwell Time


3.8.1 Limit of Dwell time

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

3.8.2 Test Procedures


1. Set RBW=100kHz,VBW=300kHz,Sweep time = 500us(DH1),2ms(DH3),4ms(DH5), Detector=Peak, Span=0Hz,Trace max hold
2. Enable gating and trigger function of spectrum analyzer to measure burst on time.
3. The DH1 packet can cover a single time slot. A maximum length packet has duration of 1 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 1/1600 seconds, or 0.625ms. DH1 Packet permit maximum $1600 / 79 / 2 = 10.12$ hops per second in each channel (1 time slot TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $10.12 \times 31.6 = 320$ within 31.6 seconds.
4. The DH3 packet can cover up to 3 time slots. A maximum length packet has duration of 3 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 3/1600 seconds, or 1.875ms. DH3 Packet permit maximum $1600 / 79 / 4 = 5.06$ hops per second in each channel (3 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $5.06 \times 31.6 = 160$ within 31.6 seconds.
5. The DH5 packet can cover up to 5 time slots. Operate DH5 at maximum dwell time and maximum duty cycle. A maximum length packet has duration of 5 time slots. The hopping rate is 1600 hops/second so the maximum dwell time is 5/1600 seconds, or 3.125ms. DH5 Packet permit maximum $1600 / 79 / 6 = 3.37$ hops per second in each channel (5 time slots TX, 1 time slot RX). So, the dwell time is the time duration of the pulse times $3.37 \times 31.6 = 106.6$ within 31.6 seconds


3.8.3 Test Setup

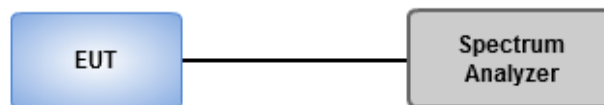

3.8.4 Test Result of Dwell Time

Modulation Mode	Freq. (MHz)	Length of Transmission Time (msec)	Number of Transmission in a 31.6 (79 Hopping*0.4)	Result (s)	Limit (s)
GFSK-DH1	2402	0.43913	320	0.141	0.4
GFSK-DH3	2402	1.69380	160	0.271	0.4
GFSK-DH5	2402	2.95435	106.6	0.315	0.4
8DPSK-DH1	2402	0.46377	320	0.148	0.4
8DPSK-DH3	2402	1.69928	160	0.272	0.4
8DPSK-DH5	2402	2.97536	106.6	0.317	0.4

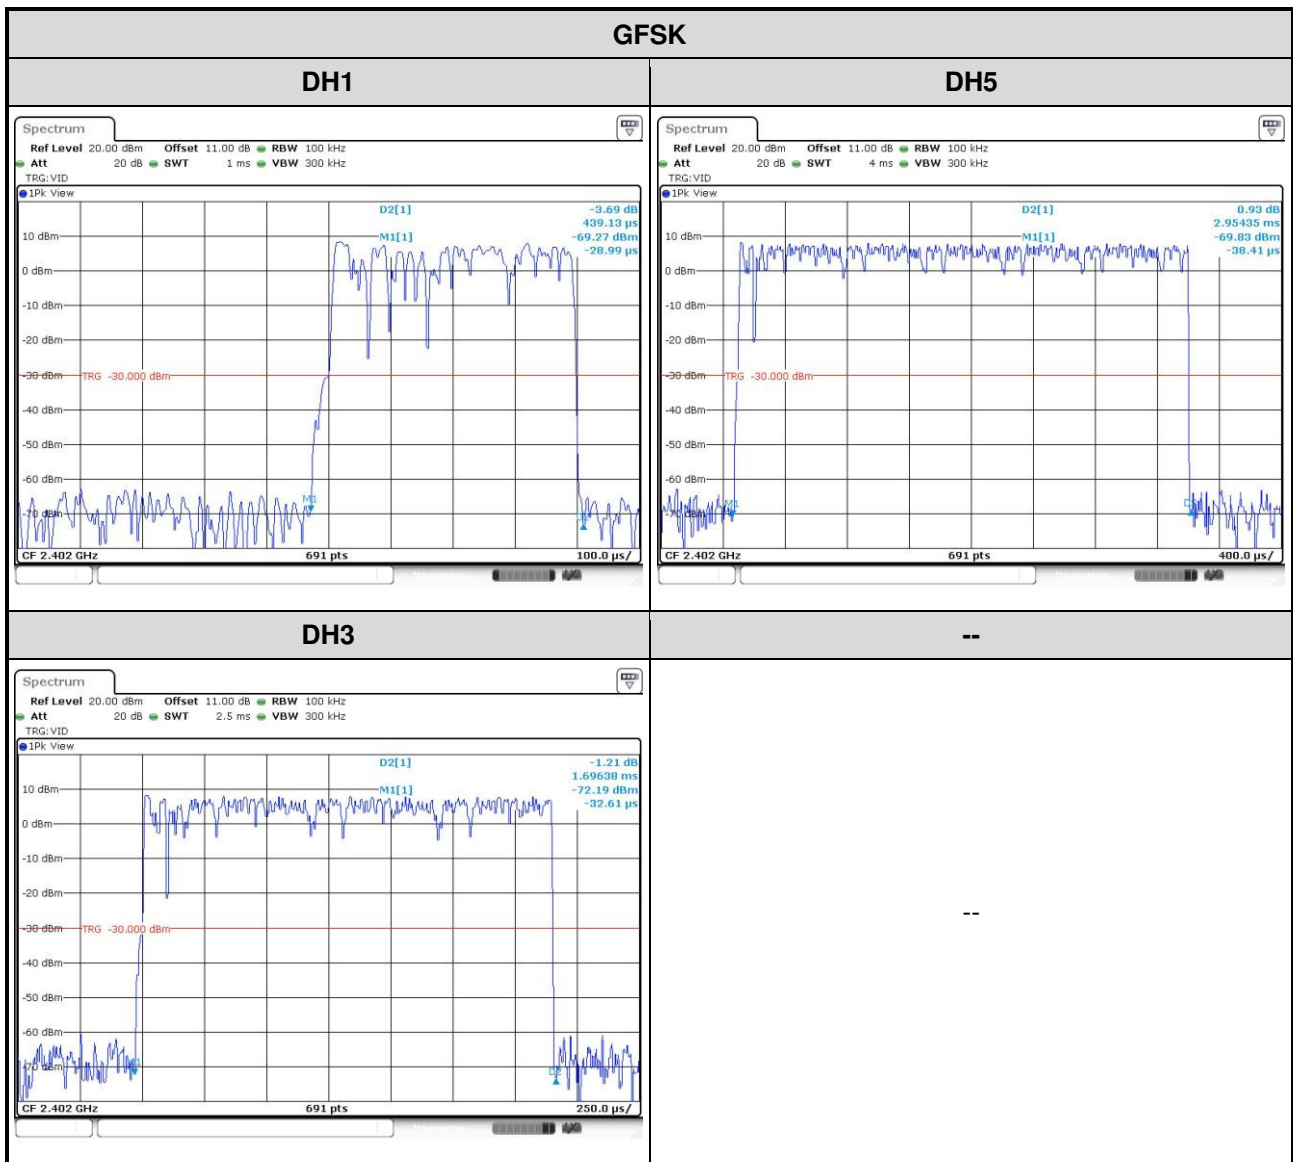

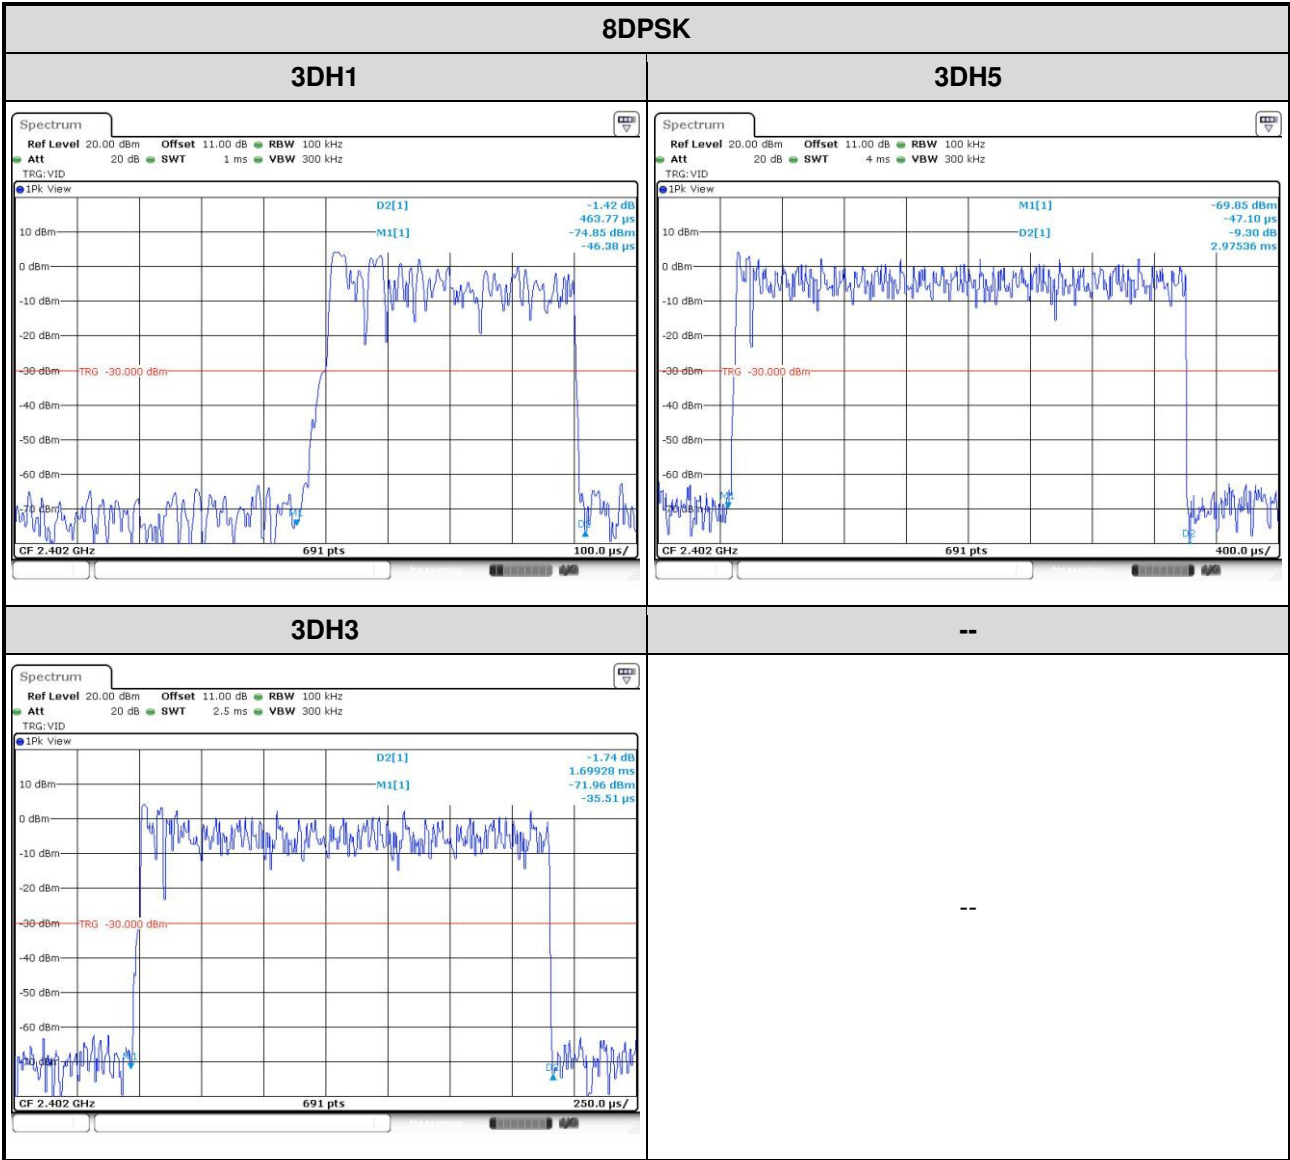

4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==