
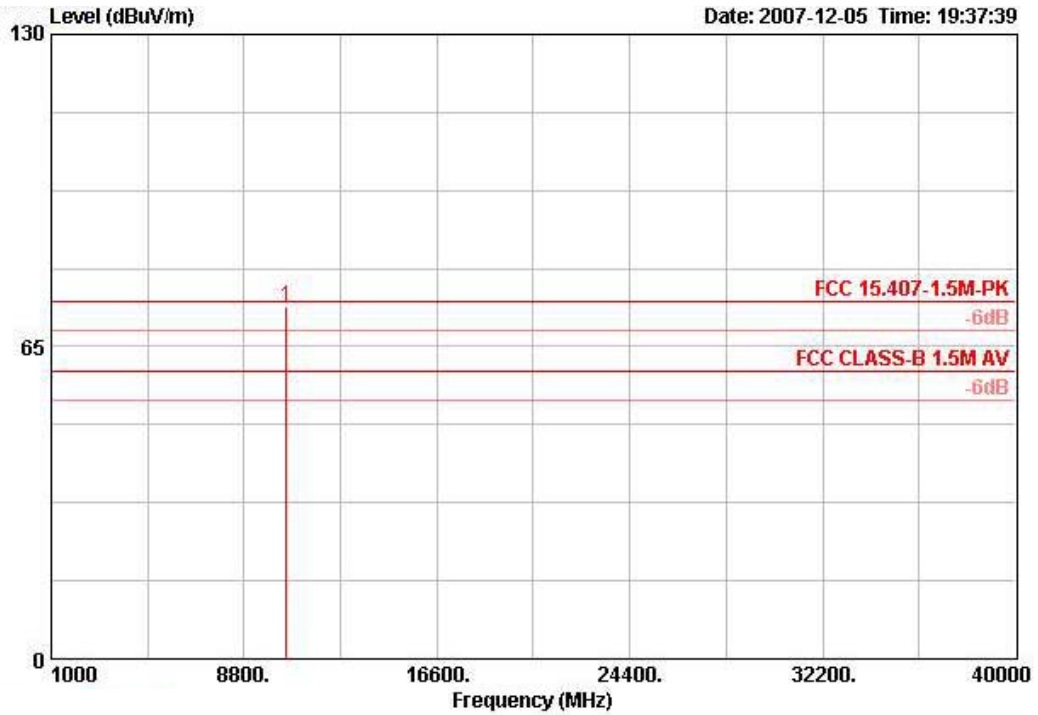


Vertical

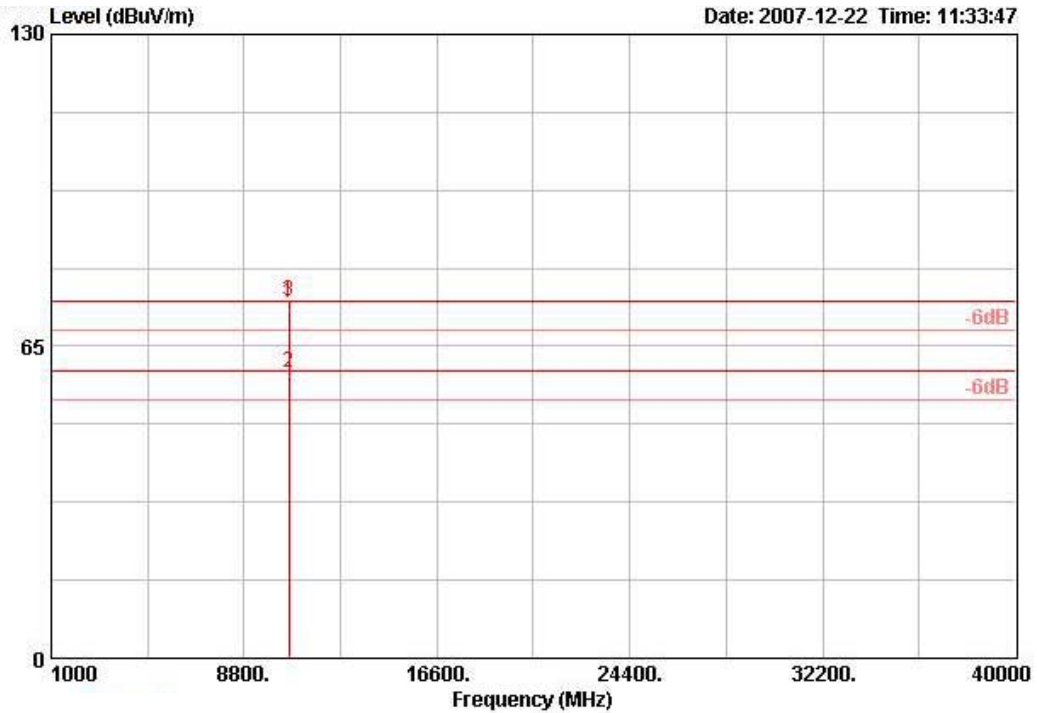

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	10520.040	73.49	-0.81	74.30	61.25	39.98	6.85	34.59	PEAK	120	300	VERTICAL


Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 20MHz Ch 60 Ant. 1 + Ant. 3

Horizontal


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	10599.800	73.86	-0.44	74.30	61.71	39.90	6.88	34.62	PEAK	130	282	HORIZONTAL
2 !	10601.000	59.50	-0.50	60.00	47.35	39.90	6.89	34.63	AVERAGE	130	282	HORIZONTAL
3 @	10603.900	74.25			62.09	39.90	6.89	34.63	PEAK	130	282	HORIZONTAL

Note: Item 3 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Vertical

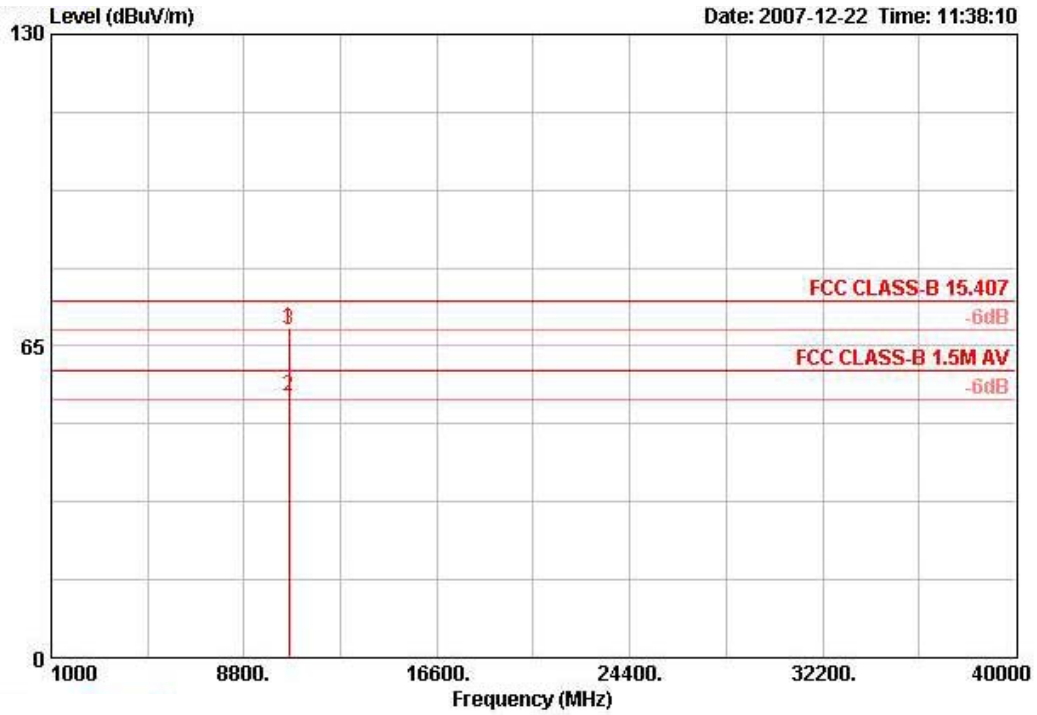


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg	
1 @	10599.400	68.61	-5.69	74.30	56.46	39.90	6.88	34.62	PEAK	118	285	VERTICAL
2 @	10600.000	54.40	-5.60	60.00	42.25	39.90	6.88	34.62	AVERAGE	118	285	VERTICAL
3 @	10600.200	68.47			56.32	39.90	6.88	34.62	PEAK	118	285	VERTICAL

Note: Item 3 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBUV/m.



Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 20MHz Ch 64 Ant. 1 + Ant. 3


Horizontal

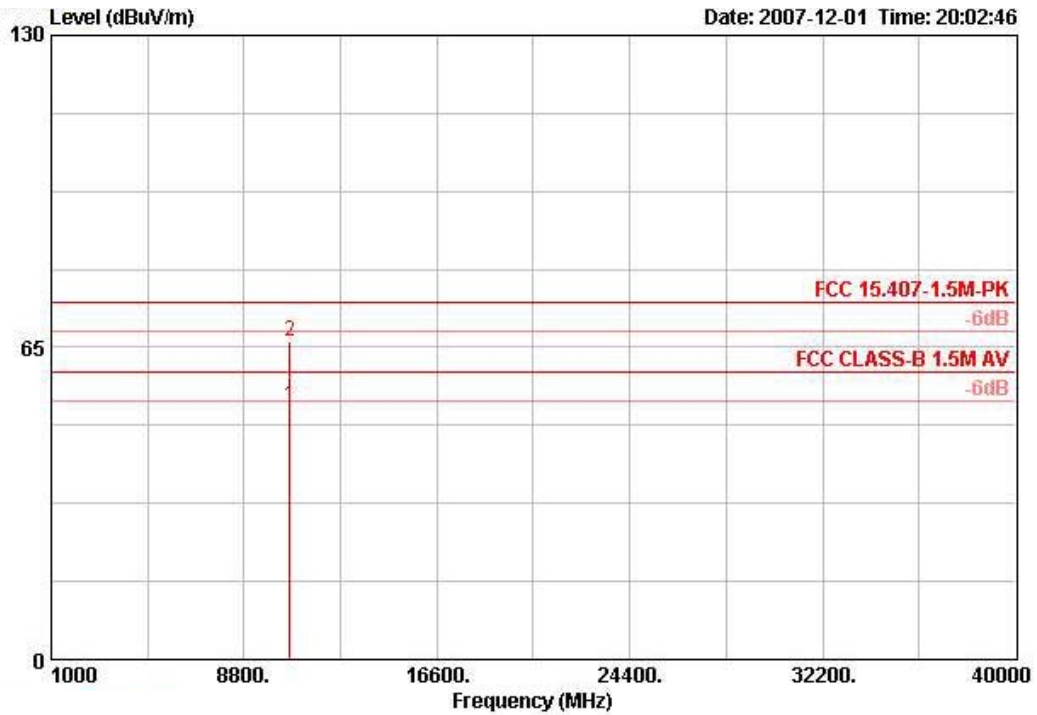

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Table Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10639.160	52.63	-7.37	60.00	40.51	39.86	6.89	34.64	AVERAGE	121	284	HORIZONTAL
2	10641.720	66.35			54.23	39.86	6.89	34.64	PEAK	121	284	HORIZONTAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Vertical

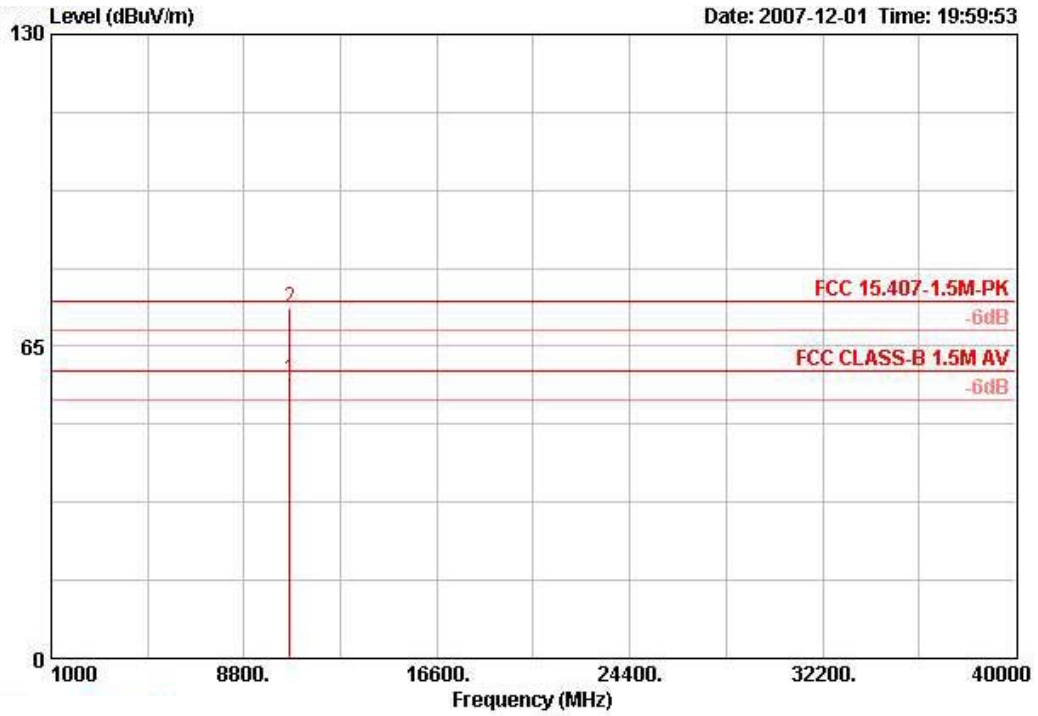


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	10639.240	58.26	-1.74	60.00	46.14	39.86	6.89	34.64	AVERAGE	117	288	VERTICAL
2 @	10639.960	72.82			60.70	39.86	6.89	34.64	PEAK	117	288	VERTICAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.



Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 20MHz Ch 100 Ant. 1 + Ant. 3


Horizontal

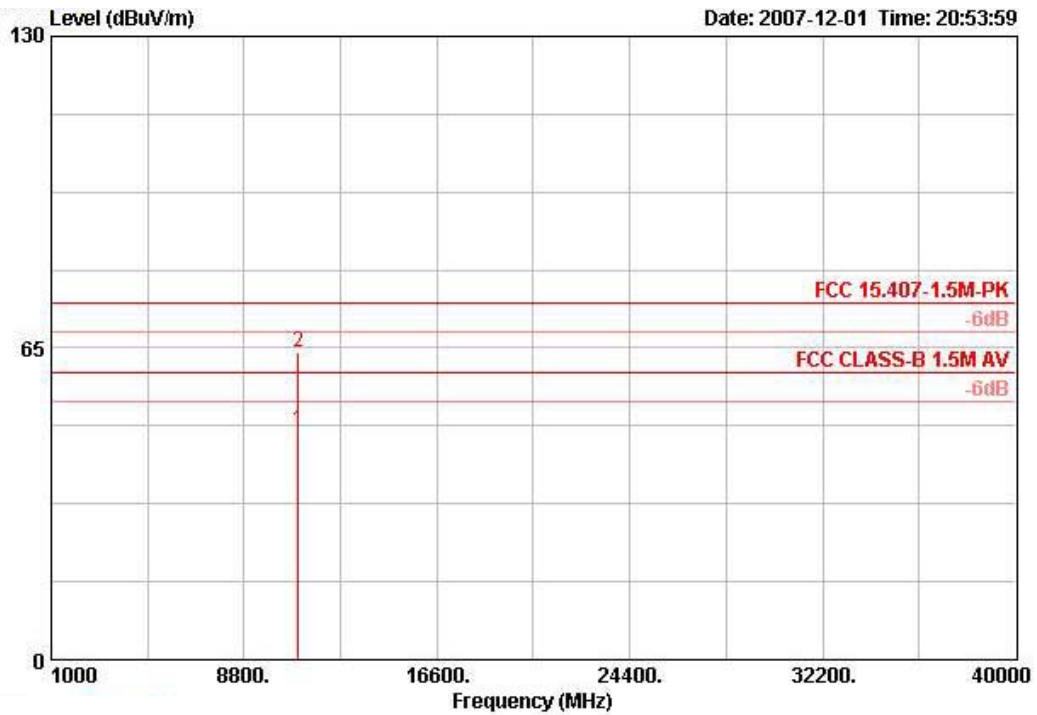

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10999.770	47.83	-12.17	60.00	36.08	39.50	7.02	34.77	AVERAGE	129	272	HORIZONTAL
2	11000.020	64.18			52.43	39.50	7.02	34.77	PEAK	129	272	HORIZONTAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBUV/m.

Vertical

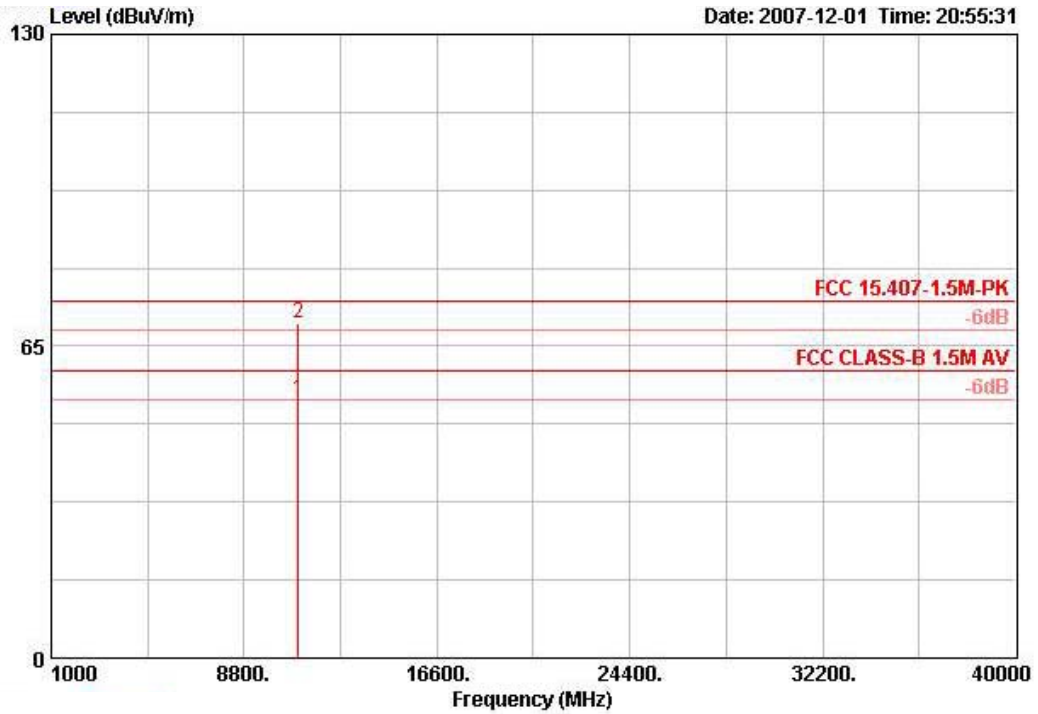


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	10999.830	54.01	-5.99	60.00	42.26	39.50	7.02	34.77	AVERAGE	122	295	VERTICAL
2 !	11000.010	69.62			57.87	39.50	7.02	34.77	PEAK	122	295	VERTICAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 20MHz Ch 120 Ant. 1 + Ant. 3


Horizontal

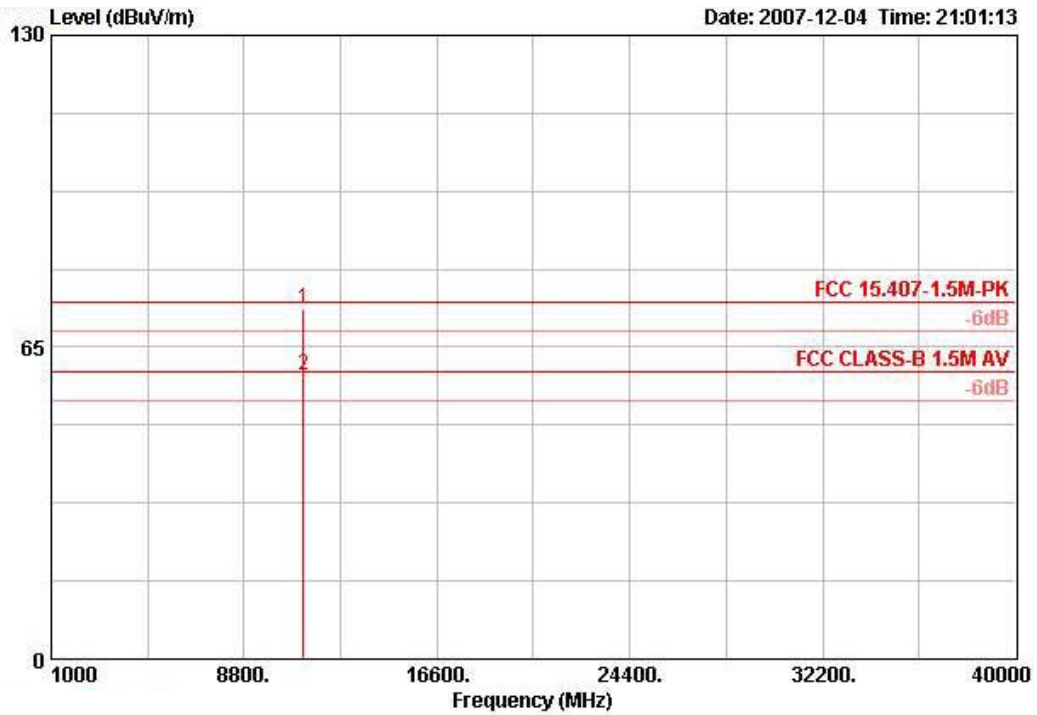

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11199.100	72.88			61.13	39.50	7.10	34.85	PEAK	115	318	HORIZONTAL
2 @	11199.200	59.11	-0.89	60.00	47.36	39.50	7.10	34.85	AVERAGE	115	318	HORIZONTAL

Note: Item 1 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Vertical

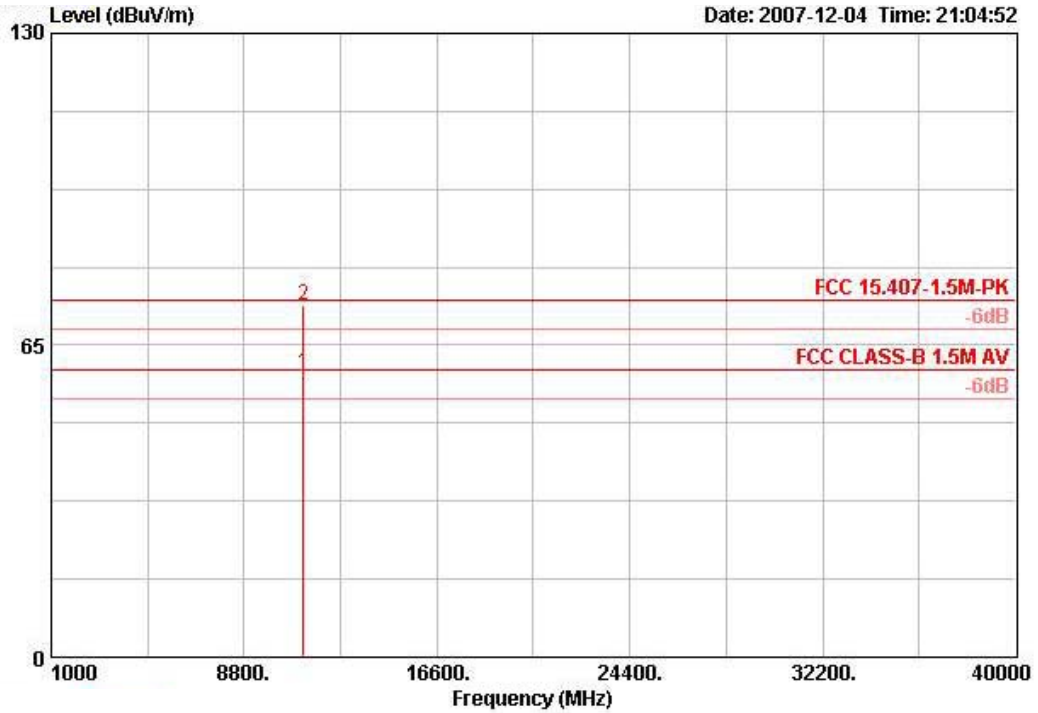


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11199.700	59.00	-1.00	60.00	47.25	39.50	7.10	34.85	AVERAGE	114	319	VERTICAL
2 @	11203.200	73.26			61.51	39.50	7.10	34.85	PEAK	114	319	VERTICAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 20MHz Ch 140 Ant. 1 + Ant. 3


Horizontal

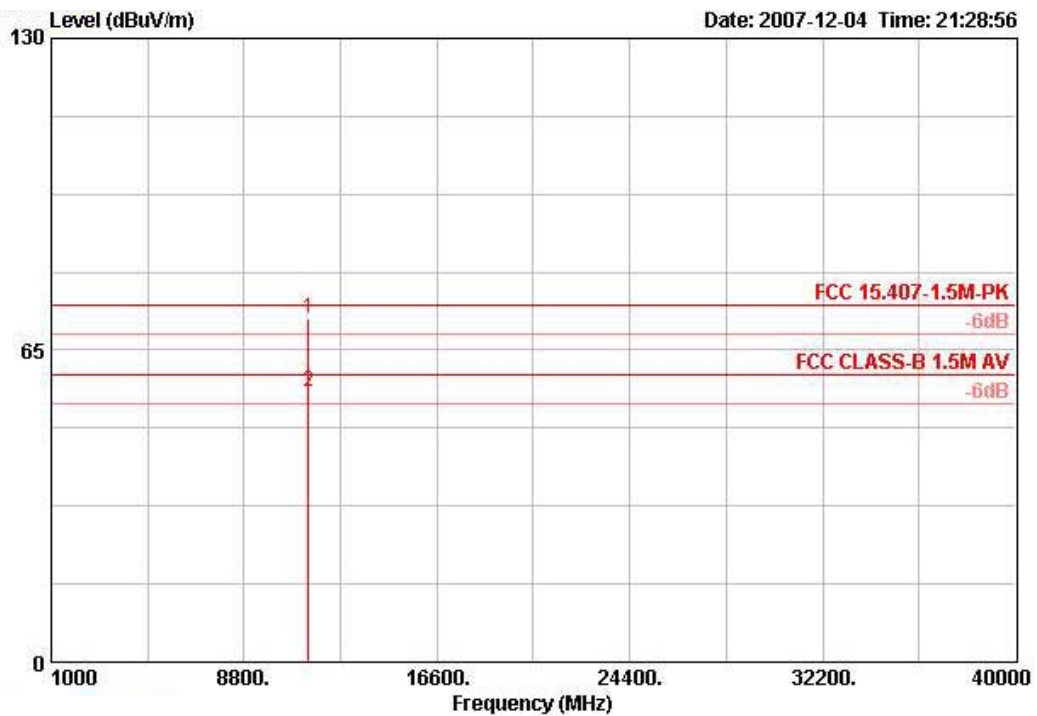

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11398.560	71.45			59.70	39.50	7.17	34.92	PEAK	114	319	HORIZONTAL
2 @	11399.440	56.44	-3.56	60.00	44.69	39.50	7.17	34.92	AVERAGE	114	319	HORIZONTAL

Note: Item 1 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Vertical

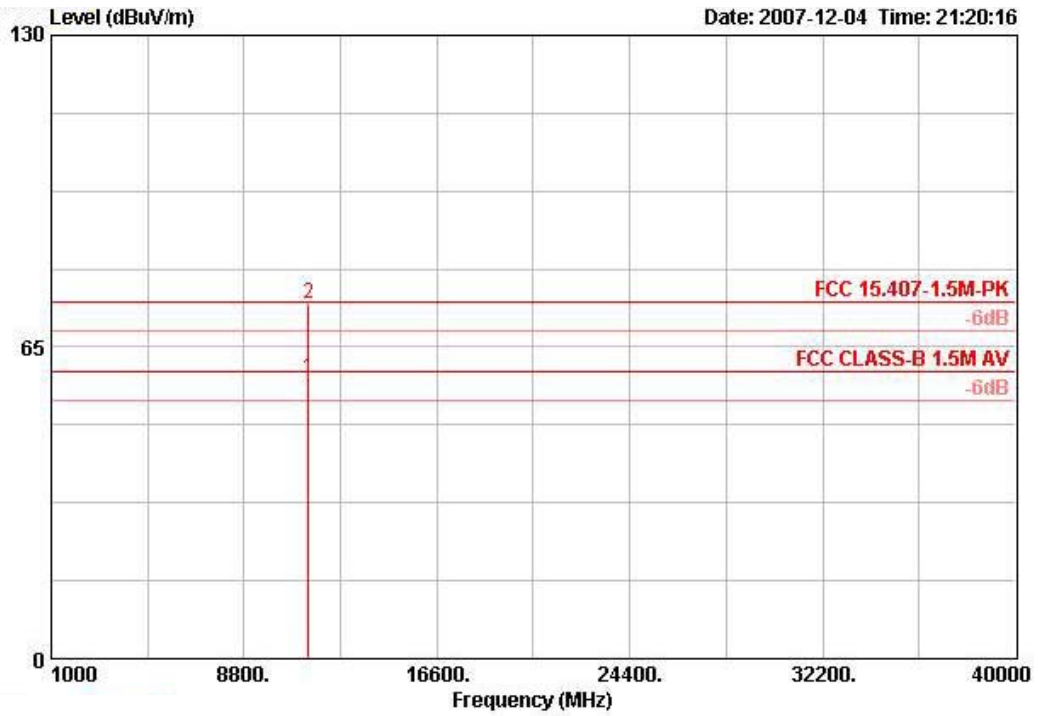


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11399.040	58.42	-1.58	60.00	46.67	39.50	7.17	34.92	AVERAGE	102	287	VERTICAL
2 @	11400.120	73.98			62.23	39.50	7.17	34.92	PEAK	102	287	VERTICAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.




Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 40MHz Ch 38 Ant. 1 + Ant. 3

Horizontal

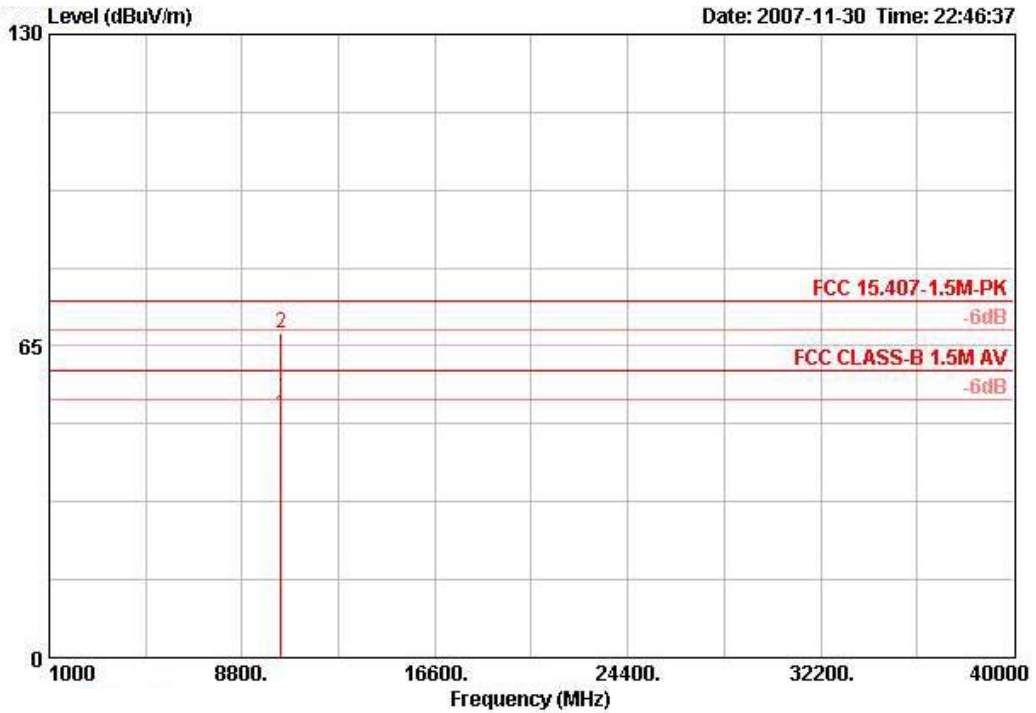

2	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
2	10380.060	67.59	-6.71	74.30	55.69	39.79	6.83	34.72	PEAK	119	279	HORIZONTAL

Vertical

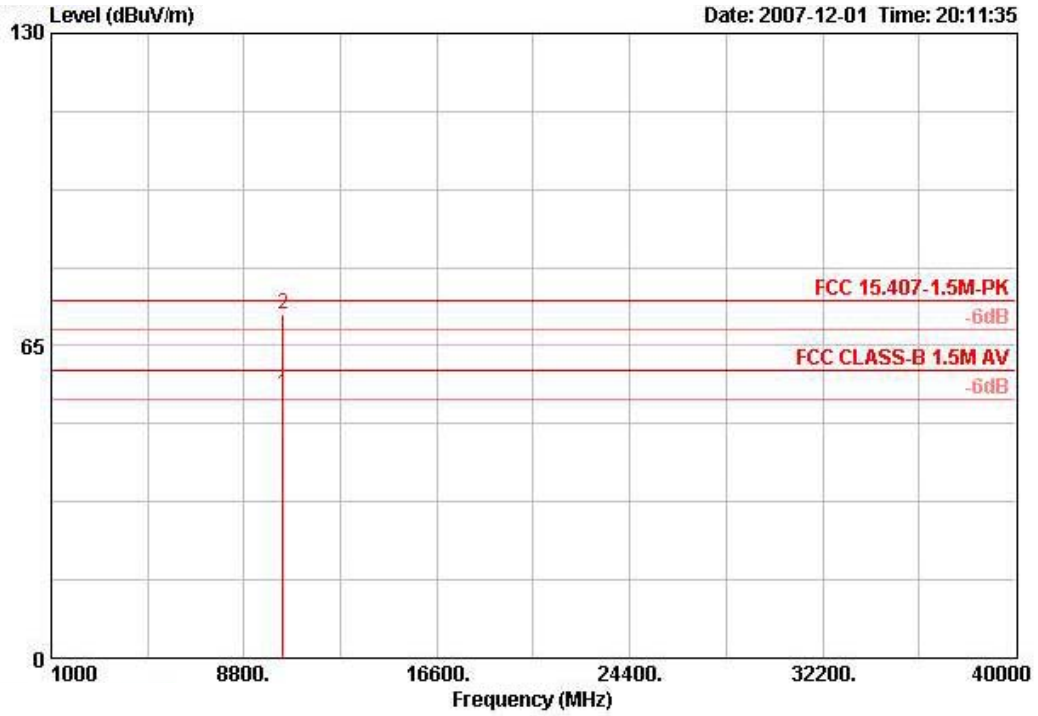


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
2 @	10380.600	71.41	-2.89	74.30	59.50	39.79	6.83	34.72	PEAK	122	269	VERTICAL




Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 20MHz Ch 46 Ant. 1 + Ant. 3

Horizontal

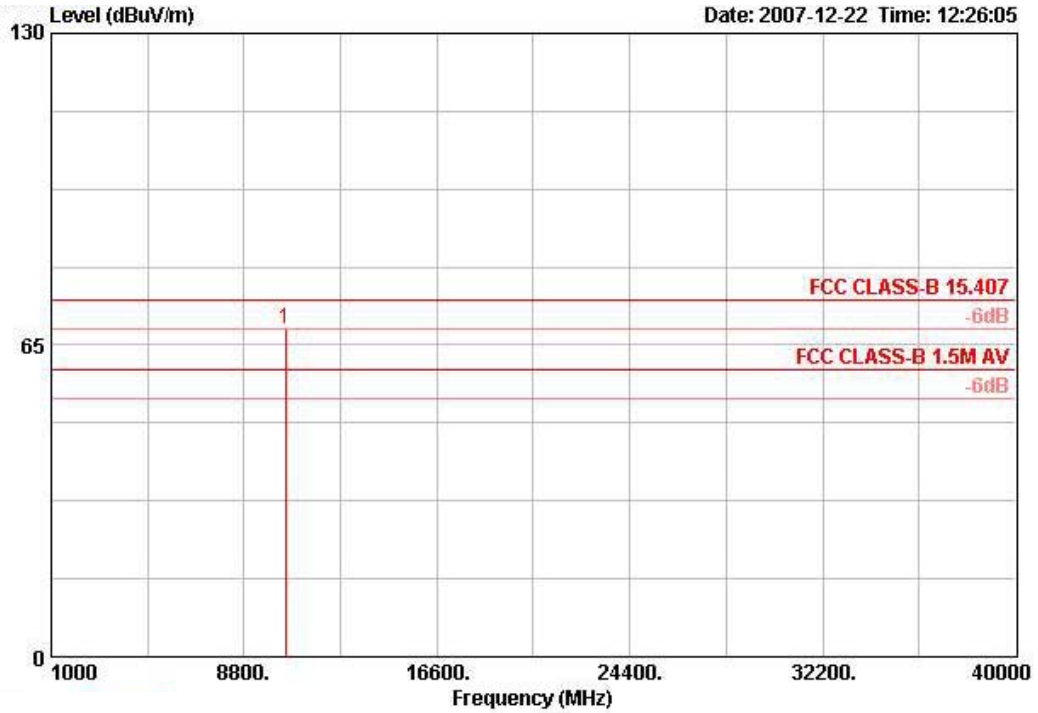

	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
Freq	Level	Limit	Level	Factor	Loss	Factor	Remark	Pos	Pos
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg
1 @ 10460.000	68.32	-5.98	74.30	56.20	39.91	6.84	34.64 PEAK	120	283 HORIZONTAL

Vertical

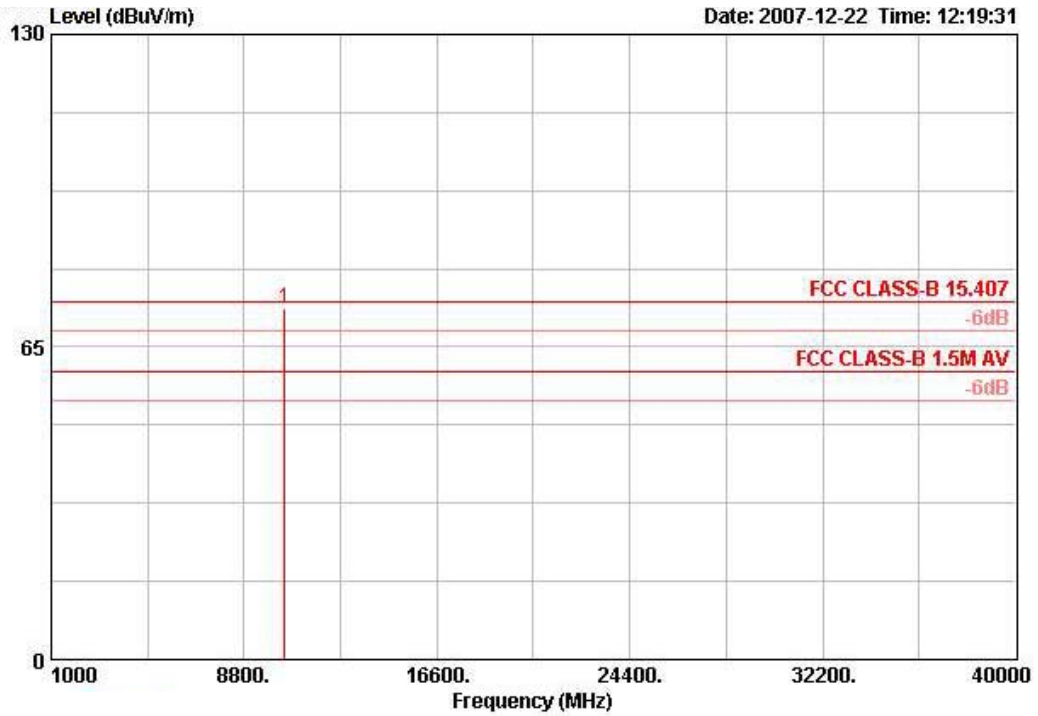


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	10456.800	73.10	-1.20	74.30	60.99	39.91	6.84	34.64	PEAK	128	282	VERTICAL




Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 40MHz Ch 54 Ant. 1 + Ant. 3

Horizontal

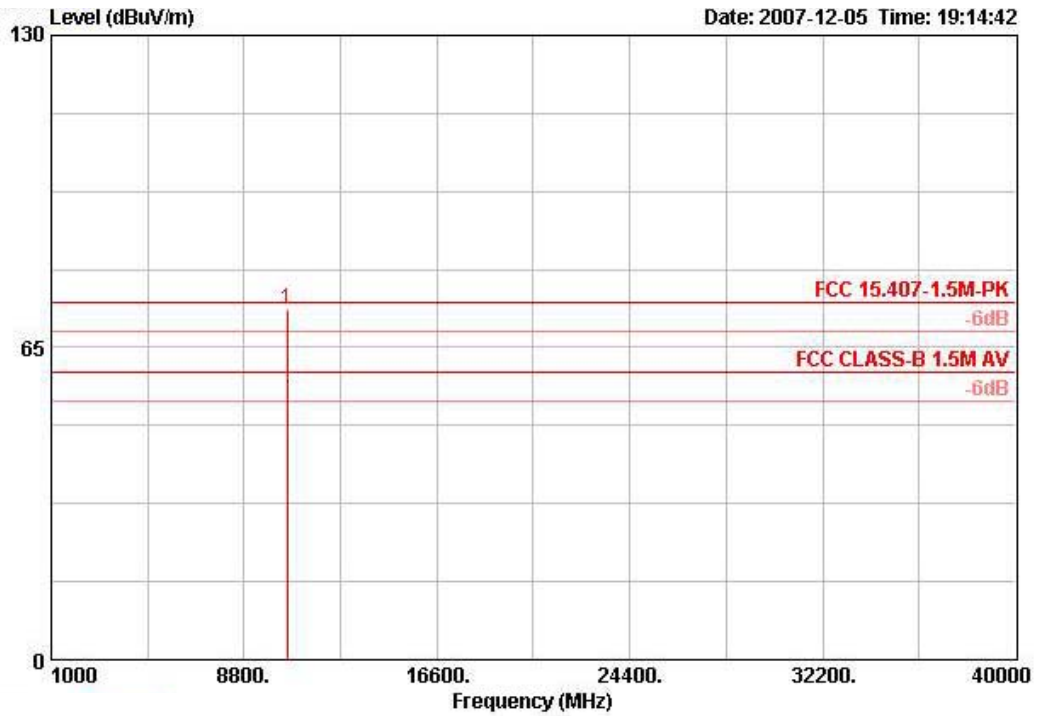

	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
1 @	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos
	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg
	-1.19	74.30	60.89	39.97	6.86	34.60	PEAK	119	300
									HORIZONTAL

Vertical

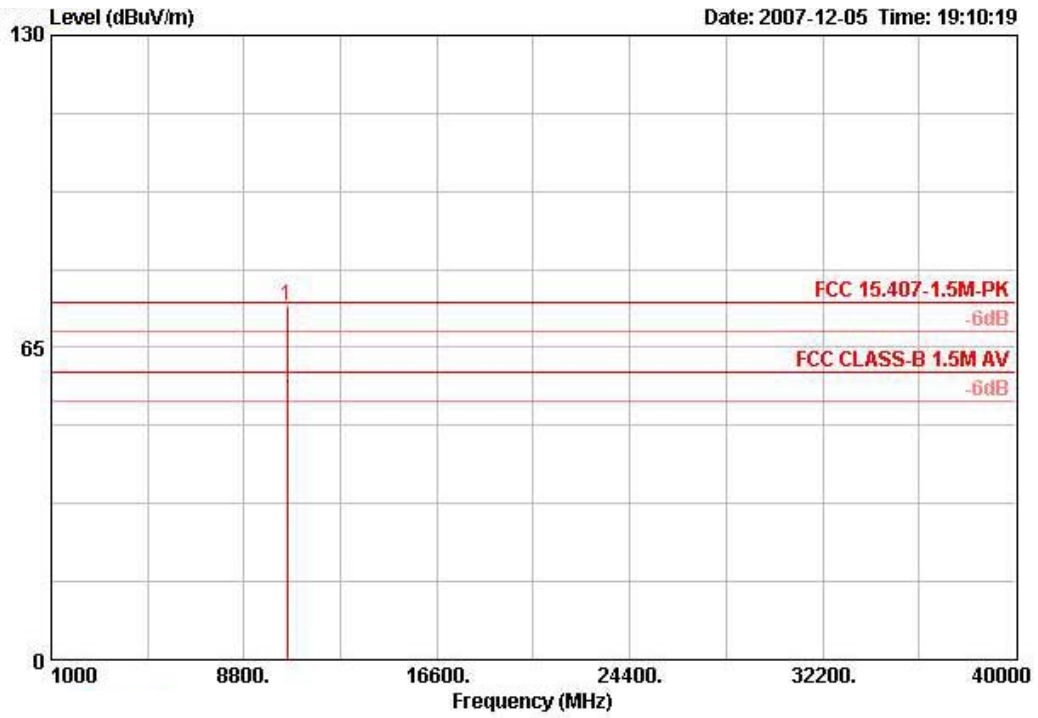


	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	10539.880	73.70	-0.60	74.30	61.48	39.97	6.86	34.60	PEAK	122	295	VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 40MHz Ch 62 Ant. 1 + Ant. 3


Horizontal

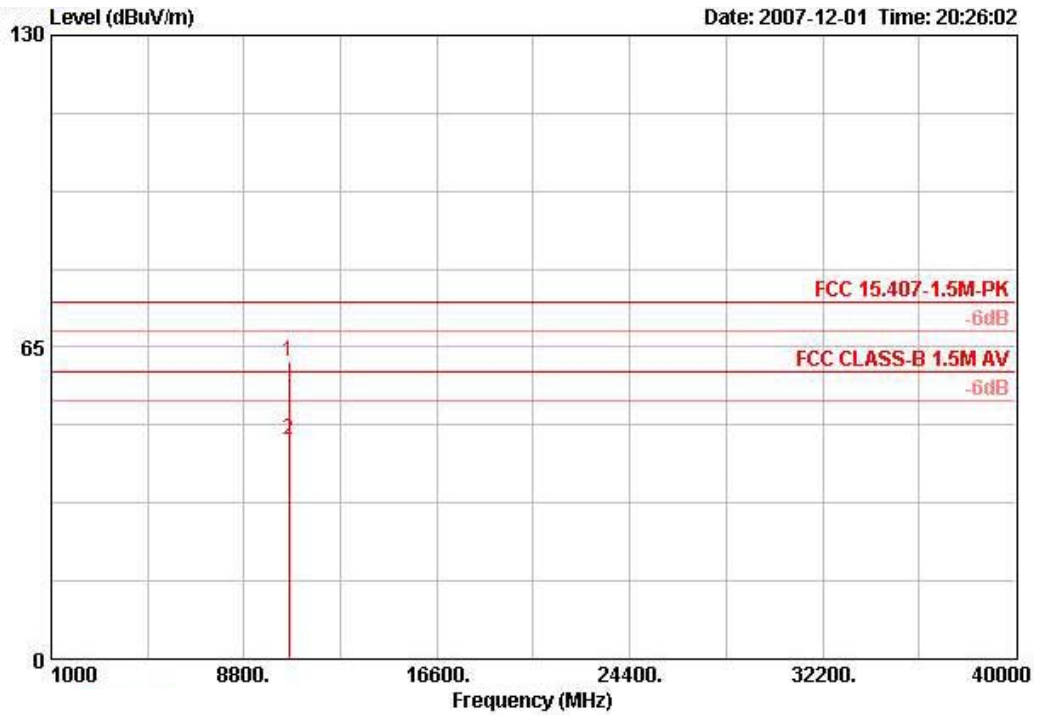

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg	
1	10619.960	62.06			49.92	39.88	6.89	34.63	PEAK	110	264	HORIZONTAL
2	10621.880	45.76	-14.24	60.00	33.63	39.88	6.89	34.63	AVERAGE	110	264	HORIZONTAL

Note: Item 1 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBUV/m.

Vertical

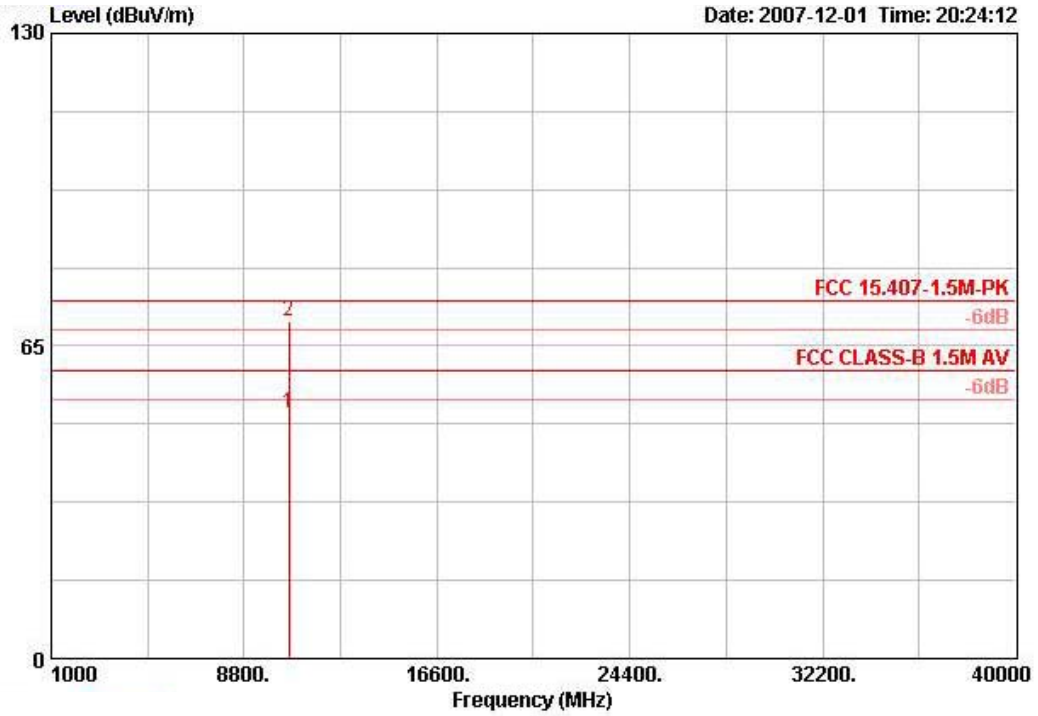


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	10610.000	51.01	-8.99	60.00	38.85	39.90	6.89	34.63	AVERAGE	111	288	VERTICAL
2 !	10620.080	70.06			57.92	39.88	6.89	34.63	PEAK	111	288	VERTICAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 40MHz Ch 102 Ant. 1 + Ant. 3


Horizontal

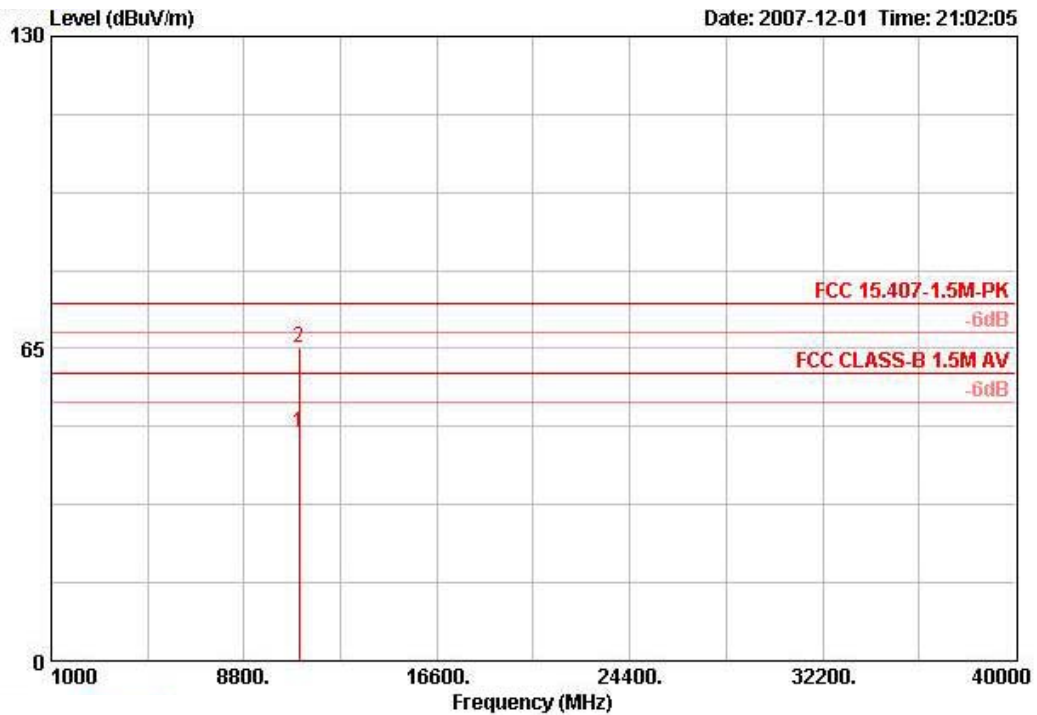

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11017.790	47.30	-12.70	60.00	35.55	39.50	7.03	34.78	AVERAGE	100	269	HORIZONTAL
2	11020.000	65.35			53.60	39.50	7.03	34.78	PEAK	100	269	HORIZONTAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Vertical

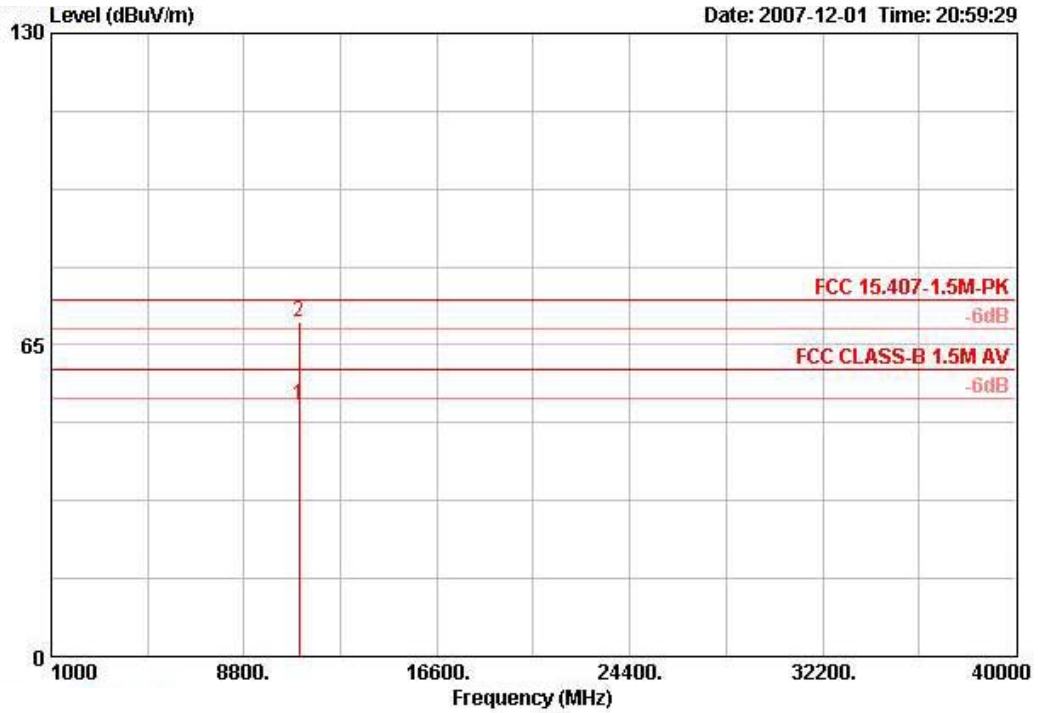


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	11019.570	52.33	-7.67	60.00	40.58	39.50	7.03	34.78	AVERAGE	117	284	VERTICAL
2 !	11019.990	69.95			58.20	39.50	7.03	34.78	PEAK	117	284	VERTICAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 40MHz Ch 118 Ant. 1 + Ant. 3


Horizontal

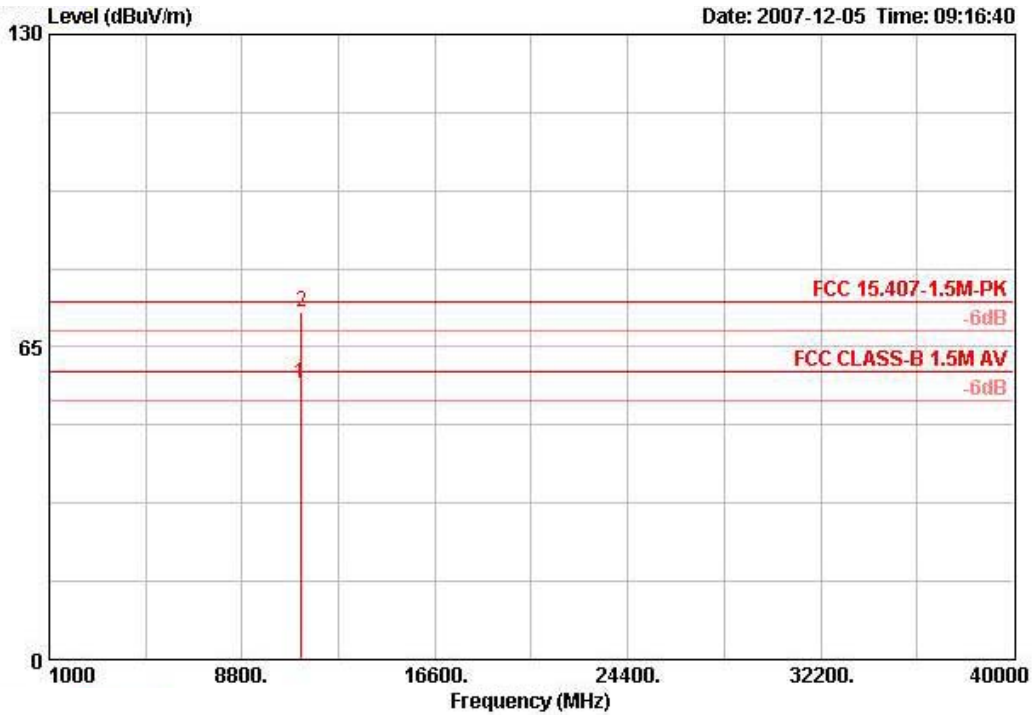

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11179.000	57.45	-2.55	60.00	45.70	39.50	7.09	34.84	AVERAGE	116	323	HORIZONTAL
2 @	11180.600	72.23			60.48	39.50	7.09	34.84	PEAK	116	323	HORIZONTAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Vertical

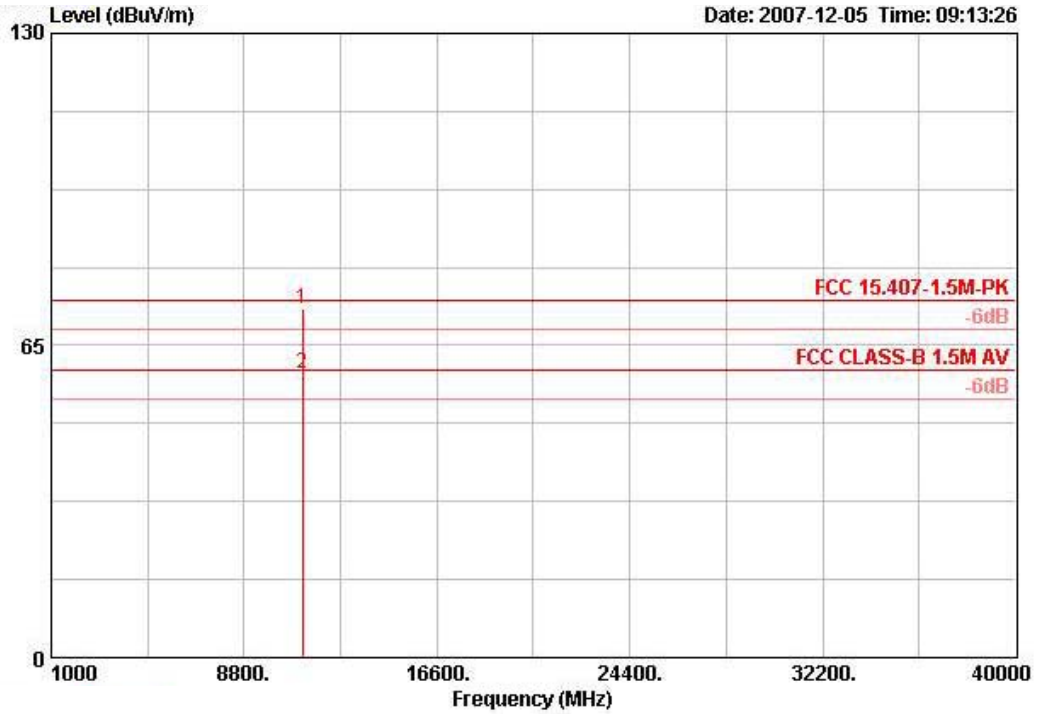


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11176.600	72.78			61.03	39.50	7.09	34.84	PEAK	104	317	VERTICAL
2 @	11178.800	59.33	-0.67	60.00	47.58	39.50	7.09	34.84	AVERAGE	104	317	VERTICAL

Note: Item 1 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 40MHz Ch 134 Ant. 1 + Ant. 3


Horizontal

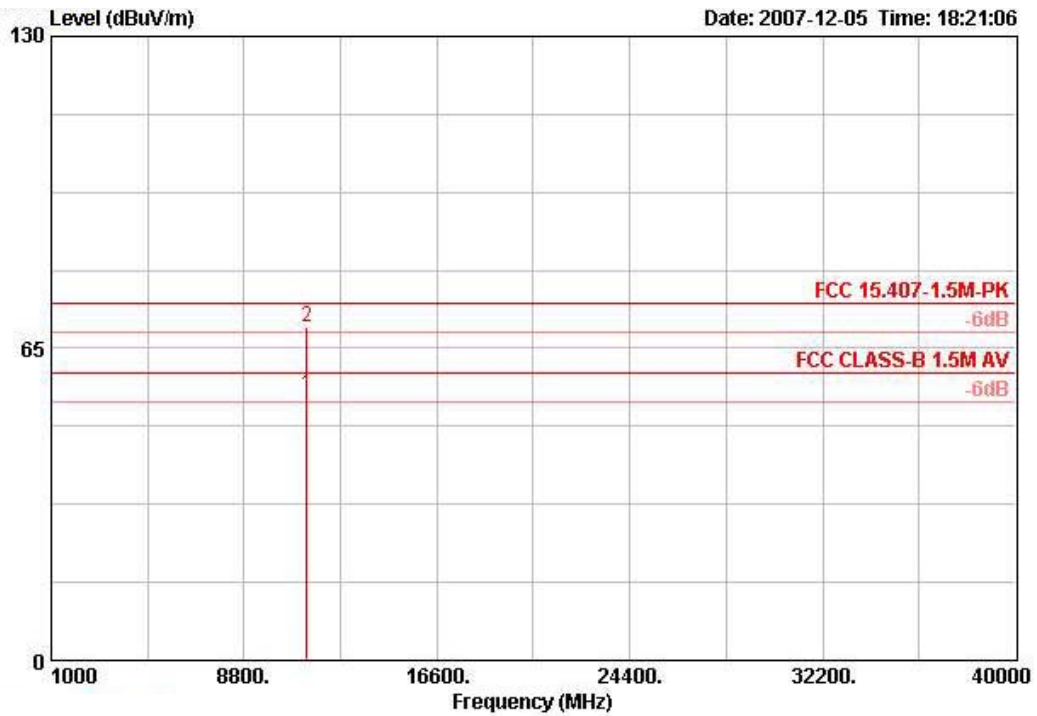

	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table	
1	Limit	Line	Level	Factor	Loss	Factor	Remark	Pos	Pos	Pol/Phase
	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 !	-4.72	60.00	43.53	39.50	7.14	34.89	AVERAGE	112	313	HORIZONTAL
2 !			57.65	39.50	7.14	34.89	PEAK	112	313	HORIZONTAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Vertical

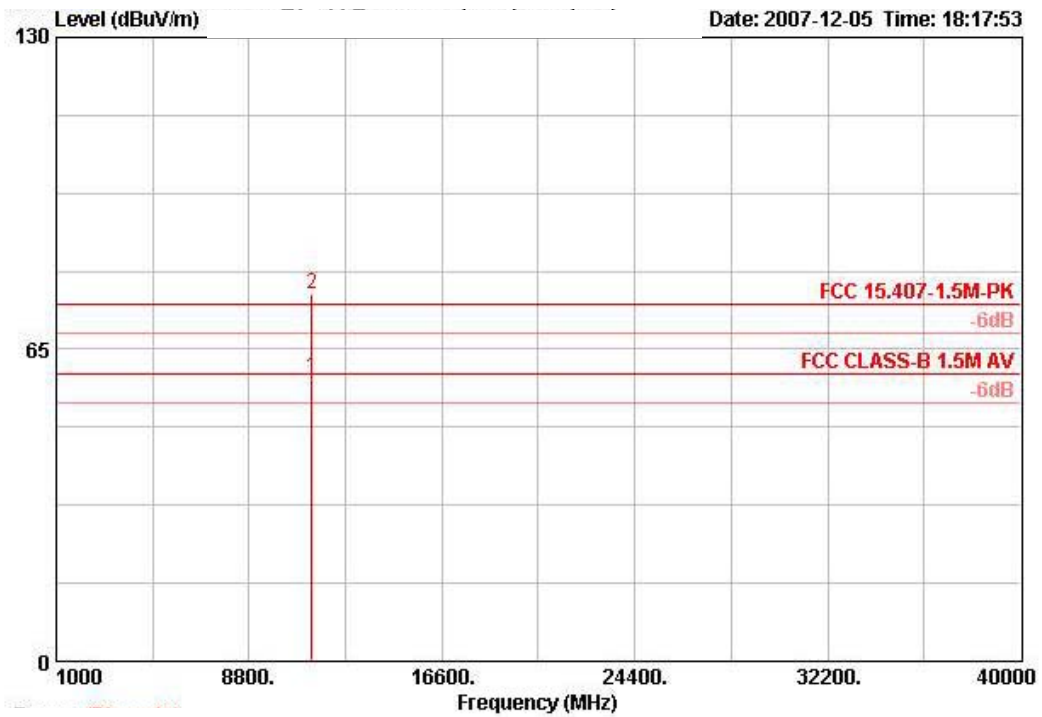

	Over	Limit	Read	Antenna	Cable	Preamp		Ant	Table
Freq	Level	Limit	Level	Factor	Loss	Factor	Remark	Pos	Pos
MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB		cm	deg
1 @	11338.800	59.14	-0.86	60.00	47.39	39.50	7.14 34.89 AVERAGE	111	283 VERTICAL
2 @	11340.000	76.59			64.84	39.50	7.14 34.89 PEAK	111	283 VERTICAL

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBUV/m.

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);

Limit line = specific limits (dBUV) + distance extrapolation factor [6 dB].

4.7. Band Edge Emissions Measurement

4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.470-5.725 GHz band: all emissions outside of the 5.470-5.725 GHz band shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of -17 dBm/MHz (78.3dBuV/m at 3m); for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed an EIRP of -27 dBm/MHz (68.3dBuV/m at 3m). In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1 MHz / 1 MHz for Peak

4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

4.7.5. Test Deviation

There is no deviation with the original standard.

4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 20MHz Ch 36, 52, 64 Ant. 1 + Ant. 3

Channel 36

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	5150.000	67.96			29.02	34.00	4.95	0.00	PEAK	136	93	VERTICAL
2 @	5150.000	56.60	-3.40	60.00	17.65	34.00	4.95	0.00	AVERAGE	136	93	VERTICAL
3 @	5180.600	119.17			80.13	34.07	4.97	0.00	PEAK	136	93	VERTICAL
4 @	5181.800	107.90			68.87	34.07	4.97	0.00	AVERAGE	136	93	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Note: Item 1 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Channel 52

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5262.800	100.55			61.28	34.23	5.04	0.00	AVERAGE	123	89	VERTICAL
2 @	5263.400	112.49			73.22	34.23	5.04	0.00	PEAK	123	89	VERTICAL

Item 1, 2 are the fundamental frequency at 5260 MHz.

Channel 64

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5318.000	117.73			78.32	34.33	5.08	0.00	PEAK	129	36	VERTICAL
2 @	5321.400	105.53			66.11	34.33	5.08	0.00	AVERAGE	129	36	VERTICAL
3 !	5350.000	70.03			30.50	34.40	5.13	0.00	PEAK	129	36	VERTICAL
4 @	5350.000	57.01	-2.99	60.00	17.49	34.40	5.13	0.00	AVERAGE	129	36	VERTICAL

Item 1, 2 are the fundamental frequency at 5320 MHz.

Note: Item 3 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 20MHz Ch 100, 120, 140 Ant. 1 + Ant. 3

Channel 100

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	5460.000	67.39			27.57	34.60	5.22	0.00	PEAK	124	38	VERTICAL
2 @	5460.000	56.74	-3.26	60.00	16.92	34.60	5.22	0.00	AVERAGE	124	38	VERTICAL
3 !	5470.000	68.31	-5.99	74.30	28.46	34.63	5.22	0.00	PEAK	124	38	VERTICAL
4 @	5497.200	104.39			64.45	34.70	5.24	0.00	AVERAGE	124	38	VERTICAL
5 @	5498.800	116.54			76.60	34.70	5.24	0.00	PEAK	124	38	VERTICAL

Item 4, 5 are the fundamental frequency at 5500 MHz.

Note: Item 1 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Channel 120

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5594.400	112.66			72.60	34.77	5.29	0.00	PEAK	136	32	VERTICAL
2 @	5596.400	100.99			60.93	34.77	5.29	0.00	AVERAGE	136	32	VERTICAL

Item 1, 2 are the fundamental frequency at 5600 MHz.

Channel 140

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5697.800	114.66			74.47	34.85	5.34	0.00	PEAK	108	104	VERTICAL
2 @	5701.400	102.32			62.12	34.87	5.34	0.00	AVERAGE	108	104	VERTICAL
3 !	5731.000	69.83	-4.47	74.30	29.58	34.88	5.37	0.00	PEAK	108	104	VERTICAL

Item 1, 2 are the fundamental frequency at 5700 MHz.

Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 40MHz Ch 38, 54, 62 Ant. 1 + Ant. 3

Channel 38

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5150.000	75.50			36.56	34.00	4.95	0.00	PEAK	100	31	VERTICAL
2 @	5150.000	59.59	-0.41	60.00	20.65	34.00	4.95	0.00	AVERAGE	100	31	VERTICAL
3 @	5188.000	113.91			74.88	34.07	4.97	0.00	PEAK	100	31	VERTICAL
4 @	5201.600	101.60			62.51	34.10	4.99	0.00	AVERAGE	100	31	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

Item 1 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Channel 54

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5260.400	106.14			66.87	34.23	5.04	0.00	PEAK	123	26	VERTICAL
2 @	5261.600	94.77			55.50	34.23	5.04	0.00	AVERAGE	123	26	VERTICAL

Item 1, 2 are the fundamental frequency at 5270 MHz.

Channel 62

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5318.400	114.32			74.91	34.33	5.08	0.00	PEAK	118	90	VERTICAL
2 @	5318.800	102.38			62.96	34.33	5.08	0.00	AVERAGE	118	90	VERTICAL
3 @	5350.000	73.62			34.09	34.40	5.13	0.00	PEAK	118	90	VERTICAL
4 @	5350.000	59.71	-0.29	60.00	20.18	34.40	5.13	0.00	AVERAGE	118	90	VERTICAL

Item 1, 2 are the fundamental frequency at 5310 MHz.

Note: Item 3 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Temperature	26°C	Humidity	60%
Test Engineer	Aric Li	Configurations	Draft n MCS8 40MHz Ch 102, 118, 134 Ant. 1 + Ant. 3

Channel 102

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5460.000	57.17	-2.83	60.00	17.36	34.60	5.22	0.00	AVERAGE	125	39	VERTICAL
2 !	5460.000	69.16			29.34	34.60	5.22	0.00	PEAK	125	39	VERTICAL
3 @	5468.000	73.15	-1.15	74.30	33.30	34.63	5.22	0.00	PEAK	125	39	VERTICAL
4 @	5494.000	113.02			73.11	34.67	5.24	0.00	PEAK	125	39	VERTICAL
5 @	5496.800	100.40			60.46	34.70	5.24	0.00	AVERAGE	125	39	VERTICAL

Item 4, 5 are the fundamental frequency at 5510MHz.

Note: Item 2 fall in restricted band, thus 15.209 limit applies. However, the test site distance has been moved to 1.5m, the corresponding limit will be adjusted to 80dBuV/m.

Channel 118

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5576.000	94.94			54.91	34.76	5.28	0.00	AVERAGE	176	55	VERTICAL
2 @	5578.000	109.71			69.66	34.76	5.29	0.00	PEAK	176	55	VERTICAL

Item 1, 2 are the fundamental frequency at 5590 MHz.

Channel 134

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	5653.600	100.51			60.37	34.82	5.32	0.00	AVERAGE	120	76	VERTICAL
2 @	5656.400	111.96			71.80	34.82	5.33	0.00	PEAK	120	76	VERTICAL
3 @	5727.000	71.52	-2.78	74.30	31.29	34.88	5.35	0.00	PEAK	120	76	VERTICAL

Item 1, 2 are the fundamental frequency at 5670 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)


Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

The limits above 5GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade form 3m to 1.5m.

Distance extrapolation factor = 20 log (specific distance [3m] / test distance [1.5m]) (dB);


Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

EIRP Emission in Band on Configuration Drafft n MCS8 20MHz Ant. 1 + Ant. 3 / 5180 MHz

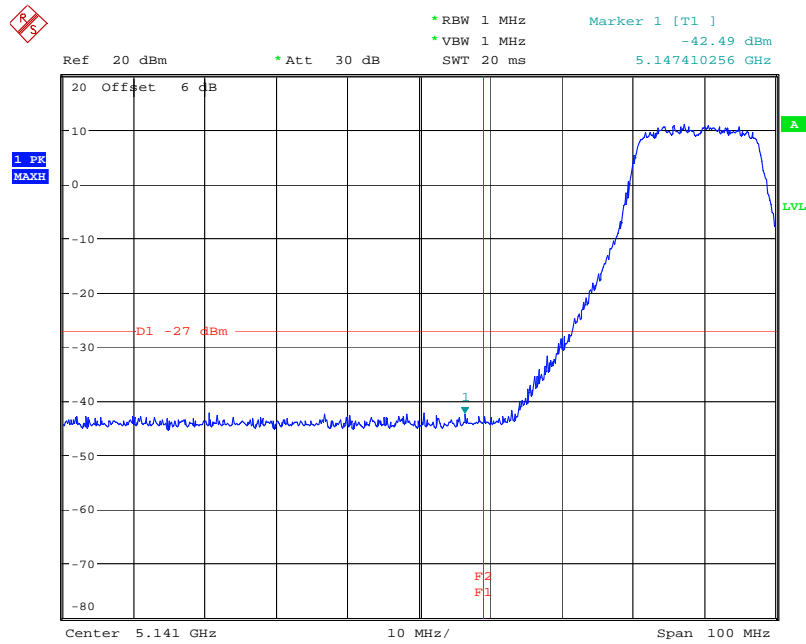


Date: 9.DEC.2007 13:46:00

EIRP Emission in Band on Configuration Drafft n MCS8 20MHz Ant. 1 + Ant. 3 / 5320 MHz

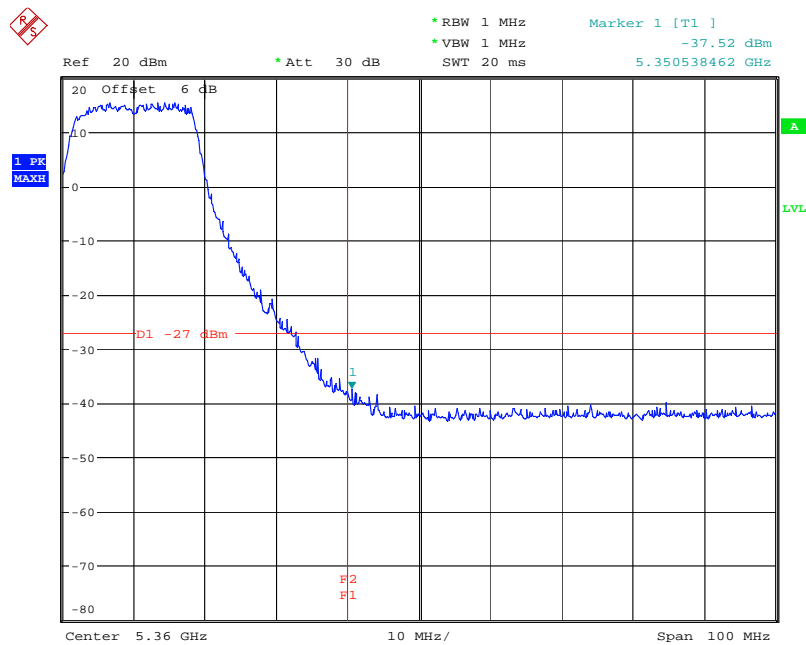


Date: 9.DEC.2007 13:44:53

EIRP Emission in Band on Configuration Drafft n MCS8 40MHz Ant. 1 + Ant. 3 / 5190 MHz

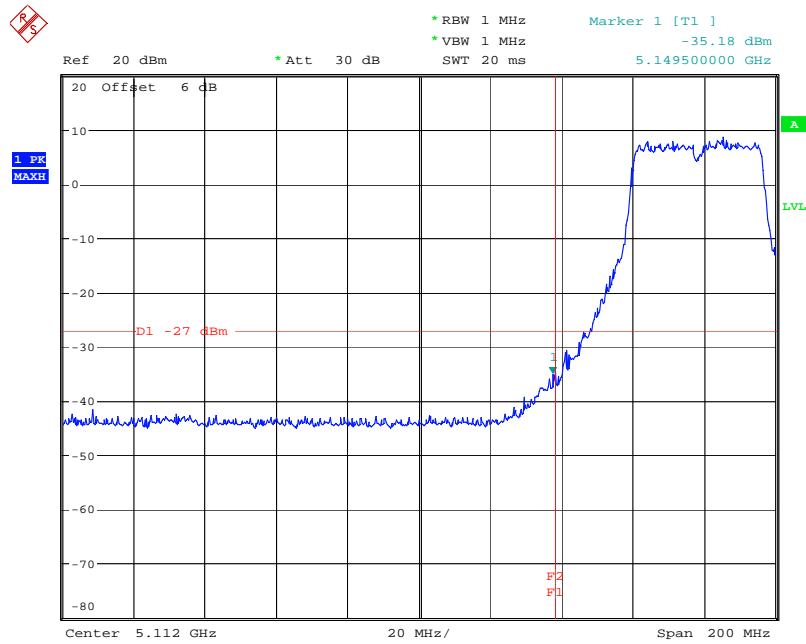


Date: 9.DEC.2007 13:32:55

EIRP Emission in Band on Configuration Drafft n MCS8 40MHz Ant. 1 + Ant. 3 / 5310 MHz

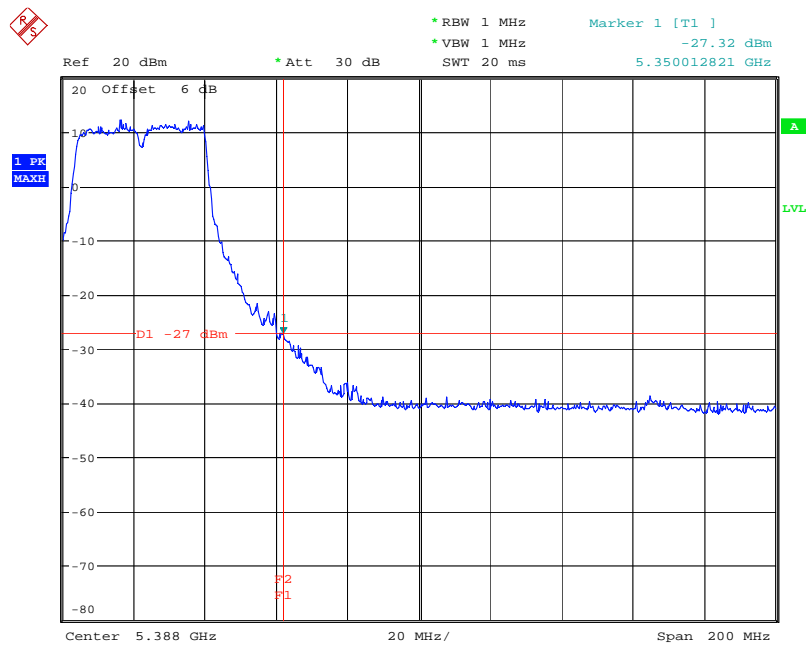


Date: 9.DEC.2007 13:35:50

EIRP Emission in Band on Configuration Drafft n MCS8 40MHz Ant. 1 + Ant. 3 / 5510MHz

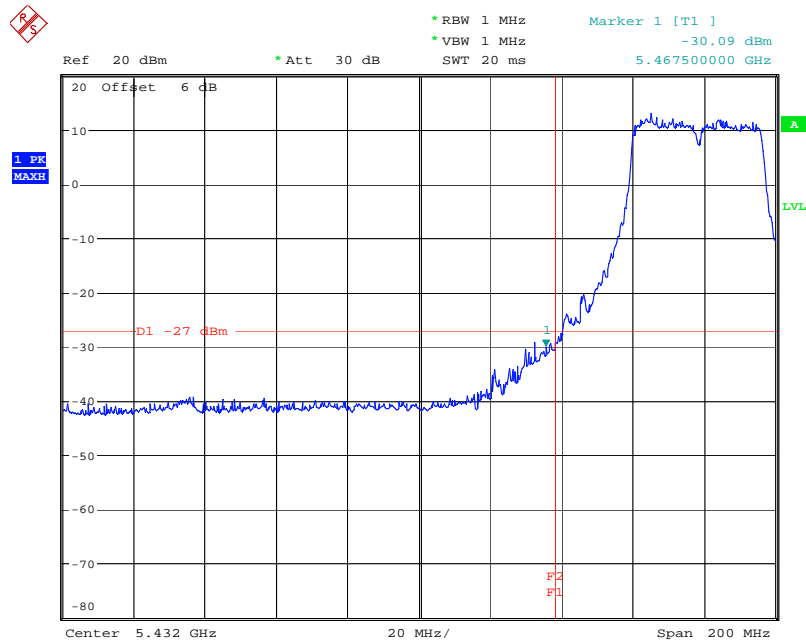

Date: 9.DEC.2007 13:37:42

EIRP Emission in Band on Configuration Drafft n MCS8 40MHz Ant. 1 + Ant. 3 / 5670 MHz

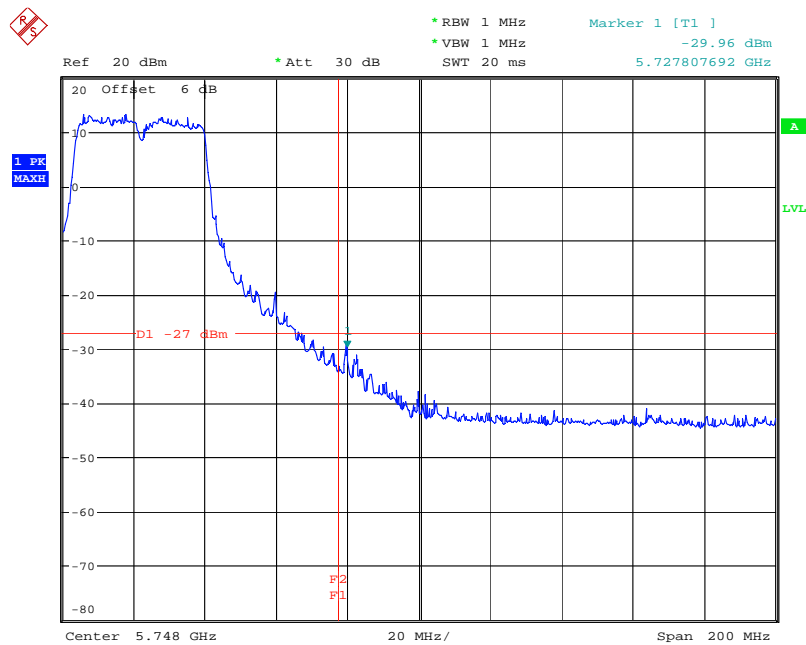

Date: 9.DEC.2007 13:40:47

4.8. Frequency Stability Measurement

4.8.1. Limit

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emissions is maintained within the band of operation under all conditions of normal operation as specified in the user's manual or $\pm 20\text{ppm}$ (Draft n specification).

4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RB	10 kHz
VB	10 kHz
Sweep Time	Auto

4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5. f_c is declaring of channel frequency. Then the frequency error formula is $(f_c - f) / f_c \times 10^6$ ppm and the limit is less than $\pm 20\text{ppm}$ (Draft n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is $-30^\circ\text{C} \sim 50^\circ\text{C}$.
8. Measuring multiple antennas, the connector is required to link with spectrum analyser through a combiner.

4.8.4. Test Setup Layout

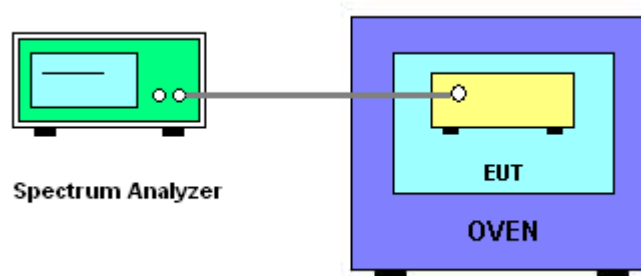

4.8.5. Test Deviation

There is no deviation with the original standard.

4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

4.8.7. Test Result of Frequency Stability

Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5260 MHz
126.50	5260.009300
110.00	5260.023500
93.50	5259.993200
Max. Deviation (MHz)	0.023500
Max. Deviation (ppm)	4.47

Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5260 MHz
-30	5260.046300
-20	5260.050570
-10	5260.045700
0	5260.014100
10	5260.012900
20	5259.983500
30	5259.965300
40	5259.961200
50	5259.955600
Max. Deviation (MHz)	0.050570
Max. Deviation (ppm)	9.61

4.9. Antenna Requirements

4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100359	9kHz – 2.75GHz	Mar. 01, 2007	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 31, 2007	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2007	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2007	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz –30MHz	May 09, 2007	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
Isolation Transformer	Erika Fiedler OHG	D-65396 Walluf	58	45MHz-2.15GHz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2007	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	CPA9231A	1886	9 kHz - 2 GHz	Jan. 22, 2007	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jun. 07, 2007	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	923364	26.5 GHz - 40 GHz	Jan. 22, 2007*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP40	100305	9 kHz - 40 GHz	Sep. 27, 2007	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	May 23, 2006*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 21, 2007	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	May 04, 2007	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	NCR	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Dec. 03, 2007	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9kHz ~ 30GHz	Dec. 17, 2007	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jun. 27, 2007	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jun. 27, 2007	Conducted (TH01-HY)
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 04, 2007*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 03, 2007	Conducted (TH01-HY)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2007	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2007	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2007	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Nov. 14, 2007	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 07, 2007	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

* Calibration Interval of instruments listed above is two year.

NCR means Non-Calibration required.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-070110

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2007 to January 09, 2010
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection : Accreditation Program for Telecommunication Equipment Testing Laboratory


Jay-San Chen
President, Taiwan Accreditation Foundation
Date : January 10, 2007

PI, total 9 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when used without the Appendix.