

# **FCC Test Report**

FCC ID : NKR-DNUA134

Equipment : 802.11n a/b/g USB module

Model No. : DNUA-134

Brand Name : WNC

Applicant : Wistron Neweb Corporation

Address : 20 Park Avenue II, Hsinchu Science Park,

Hsinchu 308, Taiwan, R.O.C.

Standard : 47 CFR FCC Part 15.247

Received Date : Aug. 02, 2013

Tested Date : Oct. 29 ~ Dec. 10, 2013

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Iac MRA



Report No.: FR380201-01Al Report Version: Rev. 01 Page : 1 of 49



## **Table of Contents**

1	GENERAL DESCRIPTION	5
1.1	Information	
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	The Equipment List	
1.5	Test Standards	g
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	
3	TRANSMITTER TEST RESULTS	12
3.1	Conducted Emissions	12
3.2	6dB and Occupied Bandwidth	15
3.3	RF Output Power	18
3.4	Power Spectral Density	20
3.5	Unwanted Emissions into Restricted Frequency Bands	22
3.6	Unwanted Emissions into Non-Restricted Frequency Bands	42
4	TEST LABORATORY INFORMATION	49



## **Release Record**

Report No.	Version	Description	Issued Date
FR380201-01AI	Rev. 01	Initial issue	Jan. 20, 2014

Report No.: FR380201-01Al Page: 3 of 49



# **Summary of Test Results**

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.151MHz 45.21 (Margin -10.75dB) - AV	Pass
15.247(d) 15.209	Radiated Emissions	[dBuV/m at 3m]:11490.00MHz 51.23 (Margin -2.77dB) - AV	Pass
15.247(b)(3) Fundamental Emission Output Power		Power [dBm]: 11a: 26.20 HT20: 26.18 HT40: 25.81	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR380201-01Al Page: 4 of 49



## 1 General Description

## 1.1 Information

## 1.1.1 Specification of the Equipment under Test (EUT)

RF General Information							
Frequency Range (MHz)    Channel   C							
5725-5850	а	5745-5825	149-165 [5]	2	6-54 Mbps		
5725-5850	n (HT20)	5745-5825	149-165 [5]	2	MCS 0-15		
5725-5850	n (HT40)	5755-5795	151-159 [2]	2	MCS 0-15		

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

## 1.1.2 Antenna Details

Ant No	Tyma	Oper	Connector			
Ant. No.	Туре	5150~5250	5250~5350	5470~5725	5725~5850	Connector
1	Printed	2.55	3.12	3.22	2.51	U.FL
2	Printed	2.44	2.23	2.98	3.06	U.FL

### 1.1.3 EUT Operational Condition

Power Supply Type	5Vdc from Host

### 1.1.4 Accessories

N/A

Report No.: FR380201-01Al Page : 5 of 49



## 1.1.5 Channel List

Frequenc	y band (MHz)	5725~5850		
802.1	1 a / HT20	802.11	n HT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)	
149	5745	151	5755	
153	5765	159	5795	
157	5785			
161	5805			
165	5825			

## 1.1.6 Test Tool and Duty Cycle

Test Tool	ART2-GUI V2.3				
	Mode Duty cycle (%)		Duty factor (dB)		
Duty Cycle and Duty Factor	11a	98.60%	0.06		
Duty Cycle and Duty Factor	HT20	98.87%	0.05		
	HT40	98.19%	0.08		

Report No.: FR380201-01Al Page: 6 of 49




## 1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11a	5745	21.5
11a	5785	21.5
11a	5825	21.5
HT20	5745	21.5
HT20	5785	21.5
HT20	5825	21.5
HT40	5755	19
HT40	5795	21

## 1.2 Local Support Equipment List

	Support Equipment List							
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)		
1	Notebook	DELL	E6430		DoC	USB 1m shielded cable w/o core.		

## 1.3 Test Setup Chart

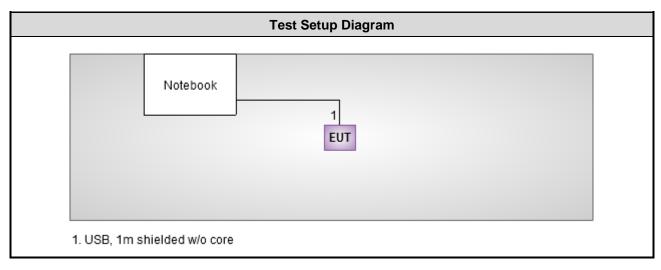

Report No.: FR380201-01Al Page: 7 of 49



## 1.4 The Equipment List

Test Item	Conducted Emission							
Test Site	Conduction room 1 / (CO01-WS)							
Instrument	Manufacturer Model No.		Serial No.	Calibration Date	Calibration Until			
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014			
LISN	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014			
LISN (Support Unit)	SCHWARZBECK MESS-ELEKTRONIK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014			
ISN	TESEQ	ISN T800	34406	Apr. 08, 2013	Apr. 07, 2014			
ISN	TESEQ	ISN T200A	30494	Apr. 09, 2013	Apr. 08, 2014			
ISN	TESEQ	ISN ST08	22589	Jan. 24, 2013	Jan. 23, 2014			
RF Current Probe	FCC	F-33-4	121630	Nov. 29, 2013	Nov, 28, 2014			
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 24, 2013	Apr. 23, 2014			
ESH3-Z6 V-Network(+)	R&S	ESH3-Z6	100920	Nov. 29, 2013	Nov. 28, 2014			
ESH3-Z6 V-Network(-)	R&S	ESH3-Z6	100951	Jan. 30, 2013	Jan. 29, 2014			
Two-Line V-Network	R&S	ENV216	101579	Jan. 07, 2013	Jan. 06, 2014			
50 ohm terminal	NA	50	01	Apr. 22, 2013	Apr. 21, 2014			
50 ohm terminal	NA	50	02	Apr. 22, 2013	Apr. 21, 2014			
50 ohm terminal	NA	50	03	Apr. 22, 2013	Apr. 21, 2014			
50 ohm terminal (Support Unit)	NA	50	04	Apr. 22, 2013	Apr. 21, 2014			

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV 40	101063	Feb. 18, 2013	Feb. 17, 2014
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Dec. 11, 2013	Dec. 10, 2014
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014
Power Sensor	Anritsu	MA2411B	1027366	Oct. 24, 2013	Oct. 23, 2014
Signal Generator	R&S	SMB100A	175727	Jan. 14, 2013	Jan. 13, 2014
Radio Communication Analyzer	Anritsu	MT8820C	6201240341	Mar. 13, 2013	Mar. 12, 2014
Wideband Radio Communication Tester	R&S	CMW500	106070	Jan. 29, 2013	Jan. 28, 2014
Bluetooth Tester	R&S	CBT	100959	Jan. 09, 2013	Jan. 08, 2014
MXG-B RF Vector Signal Generator	Agilent	N5182B	MY53050081	Apr. 19, 2013	Apr. 18, 2014

Report No.: FR380201-01Al Page: 8 of 49



Test Item	Radiated Emission above 1GHz									
Test Site	966 chamber 2 / (03CH02-WS)									
Instrument	Manufacturer Model No. Serial No. Calibration Date Cali									
Spectrum Analyzer	R&S	FSV40	101499	Jan. 28, 2013	Jan. 27, 2014					
Receiver	R&S	ESR3	101657	Jan. 30,2013	Jan. 29, 2014					
Bilog Antenna	ScHwarzbeck	VULB9168	VULB9168-524	Jan. 11, 2013	Jan. 10, 2014					
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120D	BBHA 9120 D 1095	Jan. 29, 2013	Jan. 28,2014					
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Jan. 14, 2013	Jan. 13, 2014					
Amplifier	Burgeon	BPA-530	100218	Dec. 09, 2013	Dec. 08, 2014					
Amplifier	Agilent	83017A	MY39501309	Dec. 09, 2013	Dec. 08, 2014					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16140/4	Dec. 25, 2012	Dec. 24, 2013					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16018/4	Dec. 25, 2012	Dec. 24, 2013					
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16015/4	Dec. 25, 2012	Dec. 24, 2013					
RF Cable-R03m	Woken	CFD400NL-LW	CFD400NL-003	Dec. 25, 2012	Dec. 24, 2013					
RF Cable-R10m	Woken	CFD400NL-LW	CFD400NL-004	Dec. 25, 2012	Dec. 24, 2013					
control	EM Electronics	EM1000	060608	N/A	N/A					
Note: Calibration Interval of instruments listed above is one year.										

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014				
Amplifier	EM	EM18G40G	060572	Jun. 20, 2013	Jun. 19, 2015				
Note: Calibration Interval of instruments listed above is two year.									

### 1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

ANSI C63.10-2009

FCC KDB 558074 D01 DTS Meas Guidance v03r01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

Note: The EUT has been tested and complied with FCC part 15B requirement. FCC Part 15B test results are issued to another report.

Report No.: FR380201-01Al Page: 9 of 49



## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty							
Parameters	Uncertainty						
Bandwidth	±35.286 Hz						
Conducted power	±0.536 dB						
Frequency error	±35.286 Hz						
Temperature	±0.3 °C						
Conducted emission	±2.946 dB						
AC conducted emission	±2.43 dB						
Radiated emission	±2.49 dB						

Report No.: FR380201-01Al Page: 10 of 49



## 2 Test Configuration

## 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	20°C / 61%	Skys Huang
Radiated Emissions	03CH02-WS	23°C / 63% 21°C / 64%	Anderson Hong Aska Huang
RF Conducted	TH01-WS	20°C / 61%	Felix Sung

FCC site registration No.: 657002IC site registration No.: 10807A-2

## 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11a	5745	MCS 0	
Radiated Emissions (below 1GHz)	11a	5745	MCS 0	
Radiated Emissions (above 1GHz)	11a HT20 HT40	5745 / 5785 / 5825 5745 / 5785 / 5825 5755 / 5795	6 Mbps MCS 0 MCS 0	
Fundamental Emission Output Power	11a	5745 / 5785 / 5825	6 Mbps	
6dB bandwidth	HT20 HT40	5745 / 5785 / 5825 5755 / 5795	MCS 0	
Power spectral density			MCS 0	

### NOTE:

Report No.: FR380201-01AI Page: 11 of 49

<sup>1.</sup> The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.



## 3 Transmitter Test Results

### 3.1 Conducted Emissions


#### 3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit							
Frequency Emission (MHz) Quasi-Peak Average							
0.15-0.5	66 - 56 *	56 - 46 *					
0.5-5	56	46					
5-30	60	50					
Note 1: * Decreases with the logarithm of the frequency.							

#### 3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

#### 3.1.3 Test Setup

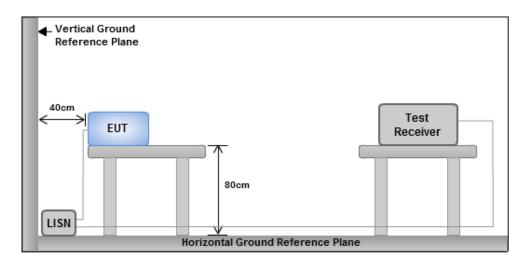


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR380201-01AI Page: 12 of 49




#### **Test Result of Conducted Emissions** 3.1.4

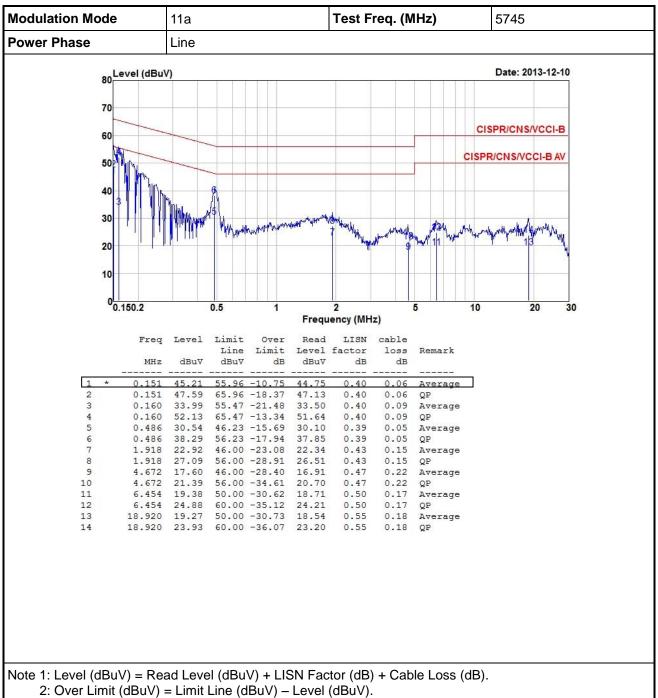

Report No.: FR380201-01AI Page: 13 of 49



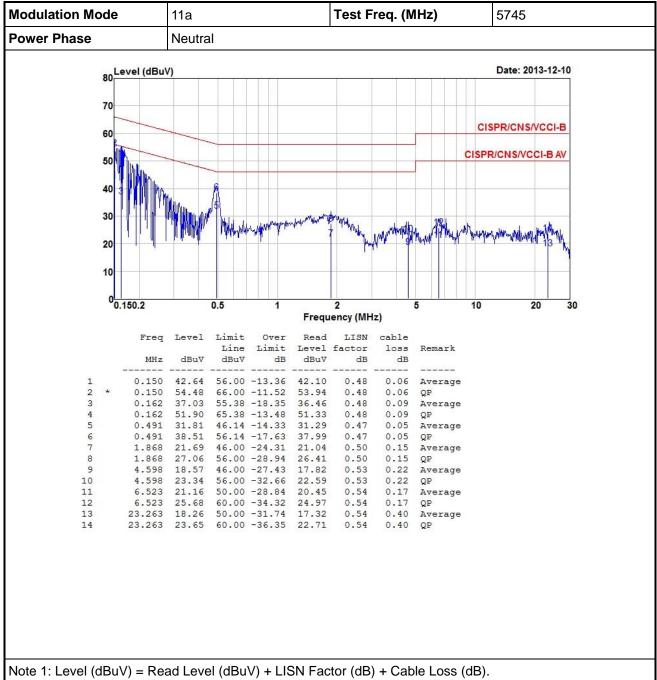

2: Over Limit (dBuV) = Limit Line (dBuV) - Level (dBuV).

Report No.: FR380201-01AI Page: 14 of 49



## 3.2 6dB and Occupied Bandwidth


#### 3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

#### 3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

### 3.2.3 Test Setup




Report No.: FR380201-01AI Page: 15 of 49



## 3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation	N	Erog (MUz)			Limit (kU=)		
Mode	N <sub>TX</sub>	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Limit (kHz)
11a	2	5745	16.29	16.29			500
11a	2	5785	16.29	16.29			500
11a	2	5825	16.29	16.29			500
HT20	2	5745	15.94	16.29			500
HT20	2	5785	16.29	16.70			500
HT20	2	5825	16.29	16.12			500
HT40	2	5755	35.13	35.13			500
HT40	2	5795	35.13	35.13			500

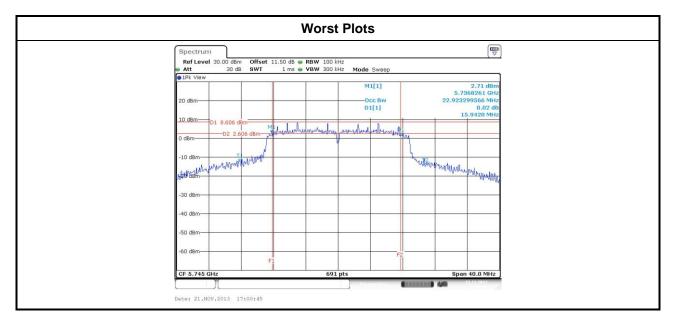

Report No.: FR380201-01AI Page: 16 of 49



Modulation	N	Erog (MUz)		99% Occupied E	Bandwidth (MHz)	
Mode	N <sub>TX</sub>	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3
11a	2	5745	24.89	23.97		
11a	2	5785	25.47	24.60		
11a	2	5825	23.97	24.89		
HT20	2	5745	25.07	25.01		
HT20	2	5785	25.88	25.41		
HT20	2	5825	26.05	26.11		
HT40	2	5755	43.88	45.04		
HT40	2	5795	49.09	49.32		



Report No.: FR380201-01Al Page: 17 of 49



## 3.3 RF Output Power

## 3.3.1 Limit of RF Output Power

Con	duct	ed po	ower shall not exceed 1Watt.
$\boxtimes$	Ante	enna	gain <= 6dBi, no any corresponding reduction is in output power limit.
	Ante	enna	gain > 6dBi
		The	n Fixed, point to point operations. e conducted output power from the intentional radiator shall be reduced by the amount in dB the directional gain of the antenna exceeds 6 dB
		Sys Ope	ed, point to point operations tems operations tems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point erations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 that the directional gain of the antenna exceeds 6 dBi.
			tems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point rations ,no any corresponding reduction is in transmitter peak output power
3.3.	2	Test	t Procedures
	Max	kimur	m Peak Conducted Output Power
		Spe	ectrum analyzer
		1.	Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
		2.	Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
		3.	Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.
	$\boxtimes$	Pov	ver meter
		1.	A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
$\boxtimes$	Max	kimur	m Conducted Output Power ( For reference only)
		Spe	ectrum analyzer
		1.	Set RBW = 1MHz, VBW = 3MHz, Detector = RMS.
		2.	Set the sweep time to: $\geq 10 \text{ x}$ (number of measurement points in sweep) x (maximum data rate per stream).
		3.	Perform the measurement over a single sweep.
		4.	Use the spectrum analyzer's band power measurement function with band limits set equal to the EBW(26dBc) band edges.

Report No.: FR380201-01AI Page: 18 of 49

A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission

Report Version: Rev. 01

Nower meter

burst for measuring output power.



## 3.3.3 Test Setup



## 3.3.4 Test Result of Maximum Output Power

Modulation Mode	N <sub>TX</sub>	Freq.	Peak conducted output power (dBm)		Total Power	Total Power	Limit		
Wode		(MHz)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11a	2	5745	23.12	23.26			416.95	26.20	30.00
11a	2	5785	22.92	23.01			395.87	25.98	30.00
11a	2	5825	23.13	22.88			399.68	26.02	30.00
HT20	2	5745	23.11	23.23			415.02	26.18	30.00
HT20	2	5785	23.01	23.04			401.36	26.04	30.00
HT20	2	5825	23.01	22.78			389.66	25.91	30.00
HT40	2	5755	22.86	22.74			381.13	25.81	30.00
HT40	2	5795	22.75	22.82			379.79	25.80	30.00

Modulation Mode	N <sub>TX</sub>	Freq.	Conducted (average) output power (dBm)		Total Power	Total Power	Limit (dBm)		
Wode		(IVITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(ubili)
11a	2	5745	19.21	19.32			168.87	22.28	30.00
11a	2	5785	19.05	19.51			169.68	22.30	30.00
11a	2	5825	18.59	19.15			154.50	21.89	30.00
HT20	2	5745	19.07	19.27			165.25	22.18	30.00
HT20	2	5785	19.03	19.62			171.61	22.35	30.00
HT20	2	5825	18.71	19.12			155.96	21.93	30.00
HT40	2	5755	18.11	18.04			128.39	21.09	30.00
HT40	2	5795	18.51	18.71			145.26	21.62	30.00

Note: Conducted average output power is for reference only.

Report No.: FR380201-01AI Page: 19 of 49



## 3.4 Power Spectral Density


#### 3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

#### 3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
  - Set the RBW = 30kHz, VBW = 100kHz.
  - Detector = Peak, Sweep time = auto couple.
  - 3. Trace mode = max hold, allow trace to fully stabilize.
  - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
  - Set the RBW = 100kHz, VBW = 300 kHz.
  - 2. Detector = RMS, Sweep time = auto couple.
  - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
  - 4. Perform the measurement over a single sweep.
  - 5. Use the peak marker function to determine the maximum amplitude level.\

### 3.4.3 Test Setup




Report No.: FR380201-01AI Page: 20 of 49



## 3.4.4 Test Result of Power Spectral Density

Modulation Mode	N <sub>TX</sub>	Freq. (MHz)	Total Power Spectral Density (dBm/30kHz)	Limit (dBm/3kHz)
11a	2	5745	-3.81	8
11a	2	5785	-2.85	8
11a	2	5825	-3.39	8
HT20	2	5745	-3.57	8
HT20	2	5785	-4.32	8
HT20	2	5825	-3.63	8
HT40	2	5755	-8.30	8
HT40	2	5795	-6.82	8

Note: Test result for HT20 / HT40 is bin-by-bin summing measured value of each TX port.

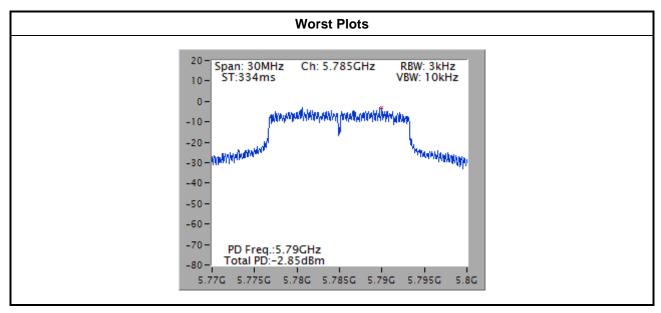

Note: Power density plot without duty factor

Report No.: FR380201-01AI Page: 21 of 49



## 3.5 Unwanted Emissions into Restricted Frequency Bands

### 3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

	Restricted Band	Emissions Limit	
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

#### 3.5.2 Test Procedures

- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR380201-01AI Page: 22 of 49




## 3.5.3 Test Setup

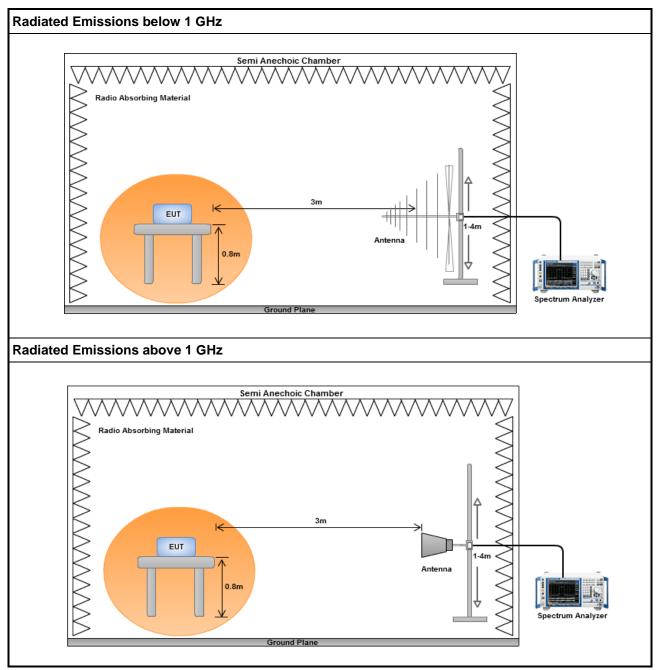

Report No.: FR380201-01Al Page: 23 of 49



### 3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

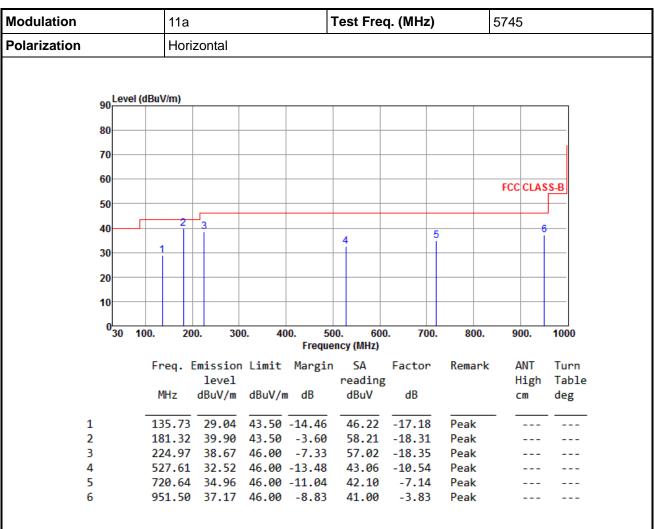

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 24 of 49




Modulation	11a		Test Freq. (MHz)	5745	
Polarization	Vertical				
90 Level (dBu	uV/m)				
80					
70					
60				FCC CL	ASS-B
50				6	
40			, 5		
30 1	2	3	4		
20					
10					
0 30 100.	200. 30	00. 400. 50 Freque	0. 600. 700. ncy (MHz)	. 800. 900.	1000
F	•	n Limit Margin	SA Factor	Remark ANT	
	level MHz dBuV/m	dBuV/m dB	reading dBuV dB	Hig	
	rinz ubuv/iii	abav/iii ab	ubuv ub	CM	deg
	98.87 29.23		50.65 -21.42	Peak	
	83.26 30.50 79.20 27.94	43.50 -13.00 46.00 -18.06	48.95 -18.45 41.54 -13.60	Peak Peak	
		46.00 -15.32	41.22 -10.54	Peak	
5 6	98.33 33.40	46.00 -12.60	40.92 -7.52	Peak	

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)
\*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 25 of 49



## 3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

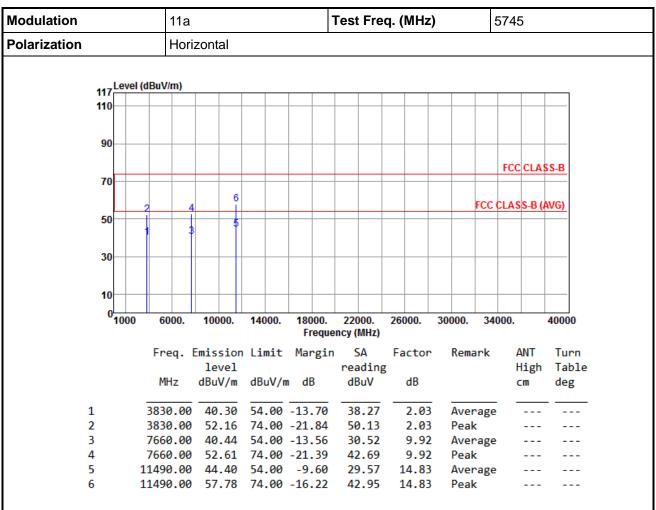

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 26 of 49

<sup>\*</sup>Factor includes antenna factor, cable loss and amplifier gain



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

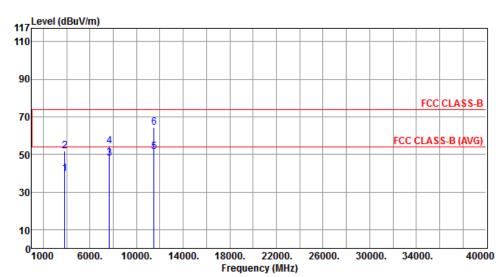

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
	11112	ubuv/III	ubuv/iii	ub	ubuv	ub		CIII	ueg
1	3830.00	39.62	54.00	-14.38	37.59	2.03	Average		
2	3830.00	51.61	74.00	-22.39	49.58	2.03	Peak		
3	7660.00	47.77	54.00	-6.23	37.85	9.92	Average		
4	7660.00	54.55	74.00	-19.45	44.63	9.92	Peak		
5	11490.00	51.19	54.00	-2.81	36.36	14.83	Average		
6	11490.00	64.54	74.00	-9.46	49.71	14.83	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 27 of 49



Modulation	11:	а		-	Test Fre	q. (MHz)		578	15	
Polarization	Нс	rizontal						'		
417 Leve	l (dBuV/m)									
110										
90										
70								FC	CCLA	SS-B
70		6						FCC CLA	SS-B (	AVG)
50		3 5								
30										
10										
01000	6000.	10000.	14000.	18000. Freque	22000. ency (MHz)	26000.	30000.	34000.		40000
	Freq.	Emission	Limit		SA	Factor	Rema		ANT	Turn
	MHz	level dBuV/m	dBuV/m	ı dB	reading dBuV	dB			High cm	Table deg
1	3856.6	6 39.98	54.00	-14.02	37.88	2.10	Aver	age		


1	3856.66	39.98	54.00 -14.02	37.88	2.10	Average	 
2	3856.66	52.00	74.00 -22.00	49.90	2.10	Peak	 
3	7713.33	40.02	54.00 -13.98	30.09	9.93	Average	 
4	7713.33	52.30	74.00 -21.70	42.37	9.93	Peak	 
5	11570.00	44.00	54.00 -10.00	29.30	14.70	Average	 
6	11570.00	57.33	74.00 -16.67	42.63	14.70	Peak	 

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)
\*Factor includes antenna factor , cable loss and amplifier gain
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 28 of 49



Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

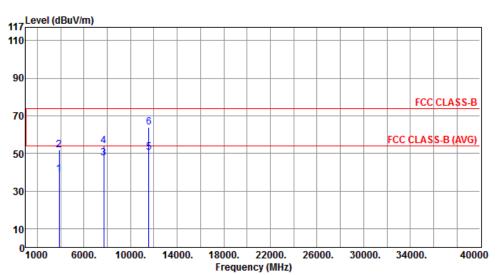


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ü	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	39.06	54.00	-14.94	36.96	2.10	Average		
2	3856.66	51.92	74.00	-22.08	49.82	2.10	Peak		
3	7713.33	47.30	54.00	-6.70	37.37	9.93	Average		
4	7713.33	54.06	74.00	-19.94	44.13	9.93	Peak		
5	11570.00	50.51	54.00	-3.49	35.81	14.70	Average		
6	11570.00	63.70	74.00	-10.30	49.00	14.70	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 29 of 49



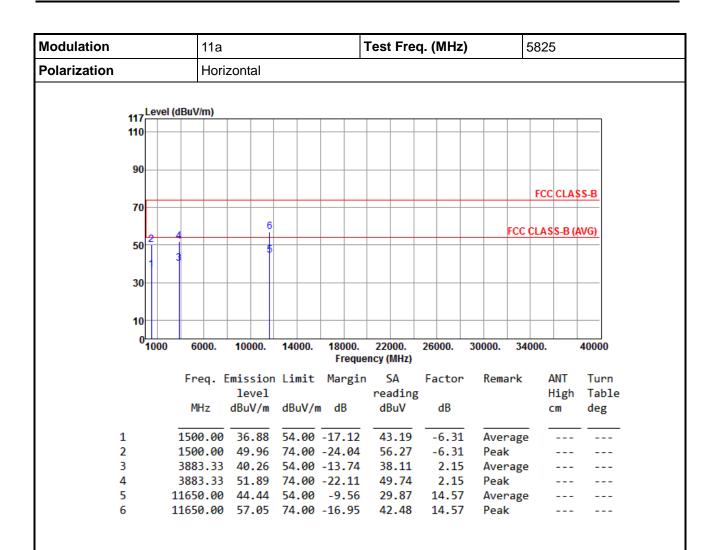


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 30 of 49



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

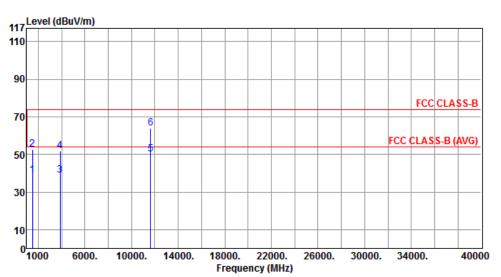


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	1500.00	38.74	54.00	-15.26	45.05	-6.31	Average		
2	1500.00	52.59	74.00	-21.41	58.90	-6.31	Peak		
3	3883.33	38.78	54.00	-15.22	36.63	2.15	Average		
4	3883.33	51.93	74.00	-22.07	49.78	2.15	Peak		
5	11650.00	50.04	54.00	-3.96	35.47	14.57	Average		
6	11650.00	63.80	74.00	-10.20	49.23	14.57	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 31 of 49



### 3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

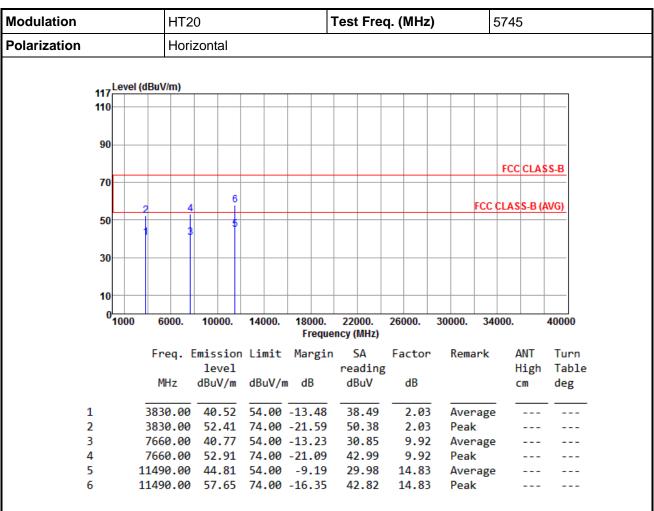

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 32 of 49



3

4

5

Modulation			HT2	20			Test Fre	q. (MHz)	)	5745	
Polarization			Vert	ical							
	117 <sup>L0</sup>	evel (d	IBuV/m)								
	110	+			_						
	90										
		┿								FCC CLAS	SS-B
	70			6							
		١,	, 4						FCC	CCLASS-B (A	AVG)
	50		1								
	30-										
	30										
	10										
	0 <mark>1</mark> (	000	6000.	10000.	14000.	18000. Freque	22000. ency (MHz)	26000.	30000. 3	4000.	40000
			Freq.	Emission	Limit	Margi	n SA	Factor	Remark	ANT	Turn
				level			reading			High	
			MHz	dBuV/m	dBuV/n	ı dB	dBuV	dB		cm	deg
	1	-	3830.00	39.43	54.00	-14.57	37.40	2.03	Averag	e	
	2			51.86				2.03	Peak		

37.42

44.77

36.40

49.62

9.92

9.92

14.83

14.83

Average

Peak Average

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB) \*Factor includes antenna factor , cable loss and amplifier gain

7660.00 47.34 54.00 -6.66

7660.00 54.69 74.00 -19.31

54.00

74.00

-2.77

-9.55

51.23

64.45

11490.00

11490.00

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 33 of 49



Modulation		HT2	0			-	Test	Fre	q. (I	MHz)	)	į	5785	5	
Polarization		Hori	zonta	l		•									
117 Le	evel (dB	uV/m)													
110				_											
90				+						$\rightarrow$					
													FCC	CLAS	SS-B
70															
		4		6								FCC	CLAS	S-B (/	AVG)
50				5											
	1	3													
30				-						_					
10															
010	000	6000.	1000	0.	14000.	18000. Freque	220 ency (l		260	000.	30000.	340	000.		40000
	F	rea. E	missi	ion	Limit	Margin	5	Α	Fa	ctor	Rem	ark	A	ANT	Turn
			leve					ding	3				Н	ligh	Tabl
		MHz	dBuV,	/m	dBuV/r	n dB	dB	uV		dB			C	m	deg
1	38	356.66	40.2	24	54.00	-13.76	38	.14	_	2.10	Ave	rage	_		
2		356.66				-21.67		.23		2.10					
3		713.33				-13.71		.36		9.93		rage			
4						-21.52		.55		9.93					
5 6						-10.11 -16.75		.18		4.71 4.71	Ave Pea	rage			

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR380201-01AI Page: 34 of 49

Report Version: Rev. 01



Modulation	HT20	Test Freq. (MHz)	5785
Polarization	Vertical		

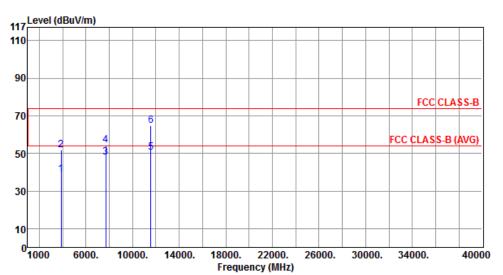


	Freq. MHz	Emission level dBuV/m			SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	3856.66	38.94	54.00	-15.06	36.84	2.10	Average		
2	3856.66	51.66	74.00	-22.34	49.56	2.10	Peak		
3	7713.33	47.80	54.00	-6.20	37.87	9.93	Average		
4	7713.33	54.25	74.00	-19.75	44.32	9.93	Peak		
5	11570.00	50.60	54.00	-3.40	35.90	14.70	Average		
6	11570.00	64.70	74.00	-9.30	50.00	14.70	Peak		

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 35 of 49



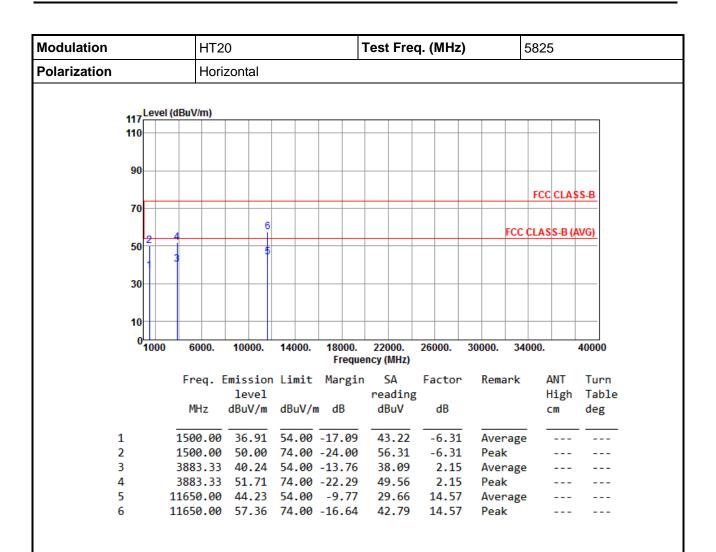


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 36 of 49



Modulation	HT20	Test Freq. (MHz)	5825		
Polarization	Vertical				

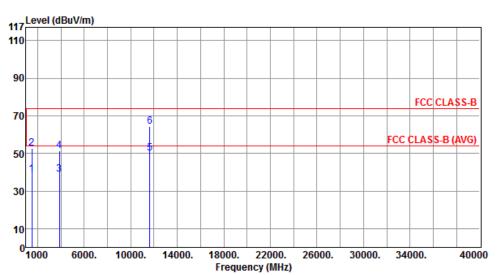

		Emission level		Ū	SA reading		Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		CM	deg
1	1500.00	38.88	54.00	-15.12	45.19	-6.31	Average		
2	1500.00	52.69	74.00	-21.31	59.00	-6.31	Peak		
3	3883.33	38.74	54.00	-15.26	36.59	2.15	Average		
4	3883.33	51.42	74.00	-22.58	49.27	2.15	Peak		
5	11650.00	50.20	54.00	-3.80	35.63	14.57	Average		
6	11650.00	64.15	74.00	-9.85	49.58	14.57	Peak		


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 37 of 49



# 3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

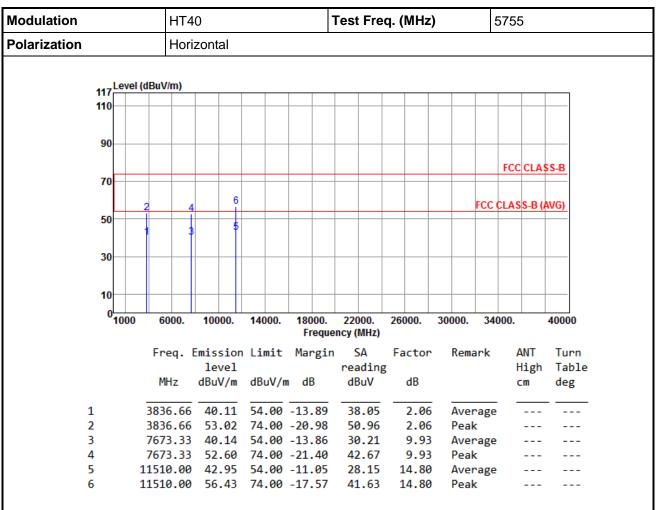

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 38 of 49



Modulation		HT4	0			Test Fre	q. (MHz)	5755						
Polarization		Vertical												
117	Leve	l (dBuV/m)												
110														
00														
90														
										FCC (	CLAS	S-B		
70														
			6						ree d	CI A C C		VC)		
50		2 4	-						FCC (	CLASS	5-B (A	(VG)		
50														
30	$\vdash$										$\rightarrow$			
10														
0														
Ů,	1000	6000.	10000.	14000.	18000. Freque	22000. ncy (MHz)	26000.	30000.	340	000.		40000		
		Frea. E	mission	Limit	Margin	SA	Factor	Rema	ark	ΑN	NT	Turn		
			level		0	reading					igh	Table		
		MHz	dBuV/m	dBuV/m	ı dB	dBuV	dB			cr	_	deg		
										_				
1		3836.66		54.00		36.97	2.06	Aver		-				
2		3836.66		74.00		50.48	2.06	Peak		-				
3		7673.33		54.00		37.53	9.93	Aver	_	-				
4		7673.33		74.00		43.79	9.93	Peak						
5		11510.00			-6.96	32.24	14.80	Aver	_	-				
6		11510.00	61.48	74.00	-12.52	46.68	14.80	Peak	(	-				


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 39 of 49



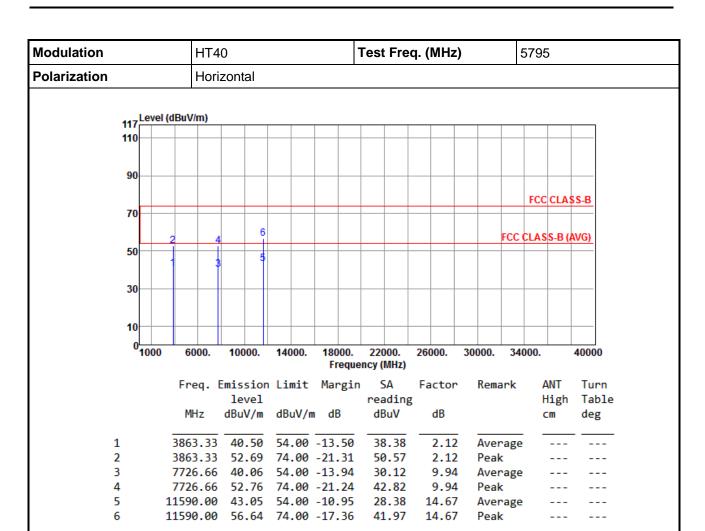

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR380201-01AI Page: 40 of 49



Modulation			HT4	1	Test Freq. (MHz) 5							5795					
Polarization	Vertical																
1	17 Lev	el (dBu	V/m)														
-	10													-			
	90																
	90																
															FCC	CLAS	SS-B
	70				6					_							
		2	4		ĭl									FCC (	CLAS	S-B (/	AVG)
	50	1	- 3		- 5												
		1															
	30																
	30																
	10																
	100	00 (	6000.	100	00.	14000			220 ncy (N		2600	00.	30000.	340	000.		40000
		F	req. [	Emis	sion	Limi	t Mar	gin	S	4	Fac	tor	Rem	ark	4	ANT	Tur
					/el			•	rea	ding					Н	ligh	Tab
		ı	MHz	dBu\	//m	dBuV	/m dE		dBi	۷V	d	ΙB			C	m	deg
1		38	63.33	39	.37	54.0	0 -14.	63	37	.25		2.12	Ave	rage	-		
2		38	63.33	52	.81	74.0	0 -21.	19	50	.69	2	2.12	Pea				
3			26.66		.11		0 -6.			.17		9.94		rage			
4			26.66		.78		0 -20.			.84		9.94	Pea				
5			90.00				0 -7.			.09		1.67		rage			
6		115	90.00	61	. 19	74.0	0 -12.	81	46	. 52	14	1.67	Pea	K			

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR380201-01AI Page: 41 of 49

Report Version: Rev. 01



# 3.6 Unwanted Emissions into Non-Restricted Frequency Bands

## 3.6.1 Limit of Unwanted Emissions into Non-Restricted Frequency Bands

The peak output power measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz.
The peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 30 dB relative to the maximum in-band peak PSD level in 100 kHz.

### 3.6.2 Test Procedures


#### **Reference Level Measurement**

- 1. Set the RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Set Sweep time = auto couple, Trace mode = max hold.
- 3. Allow trace to fully stabilize.
- 4. Use the peak marker function to determine the maximum amplitude level.

#### **Unwanted Emissions Level Measurement**

- 1. Set RBW = 100 kHz, VBW = 300 kHz, Detector = peak.
- 2. Trace Mode = max hold, Sweep = auto couple.
- 3. Allow the trace to stabilize.
- 4. Use peak marker function to determine maximum amplitude of all unwanted emissions within any 100 kHz bandwidth.

## 3.6.3 Test Setup




Report No.: FR380201-01AI Page: 42 of 49




# 3.6.4 Unwanted Emissions into Non-Restricted Frequency Bands

#### 802.11a

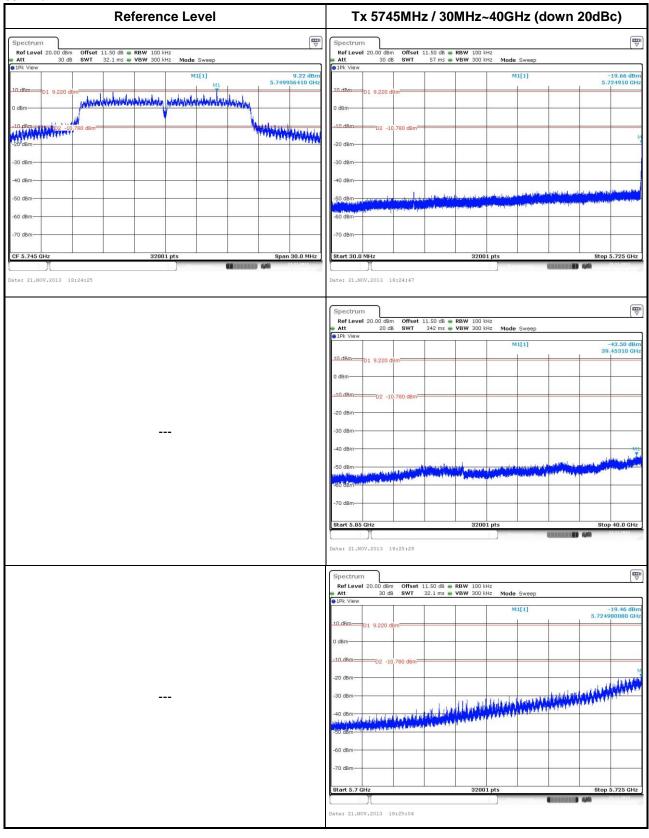

Report No.: FR380201-01Al Report Version: Rev. 01




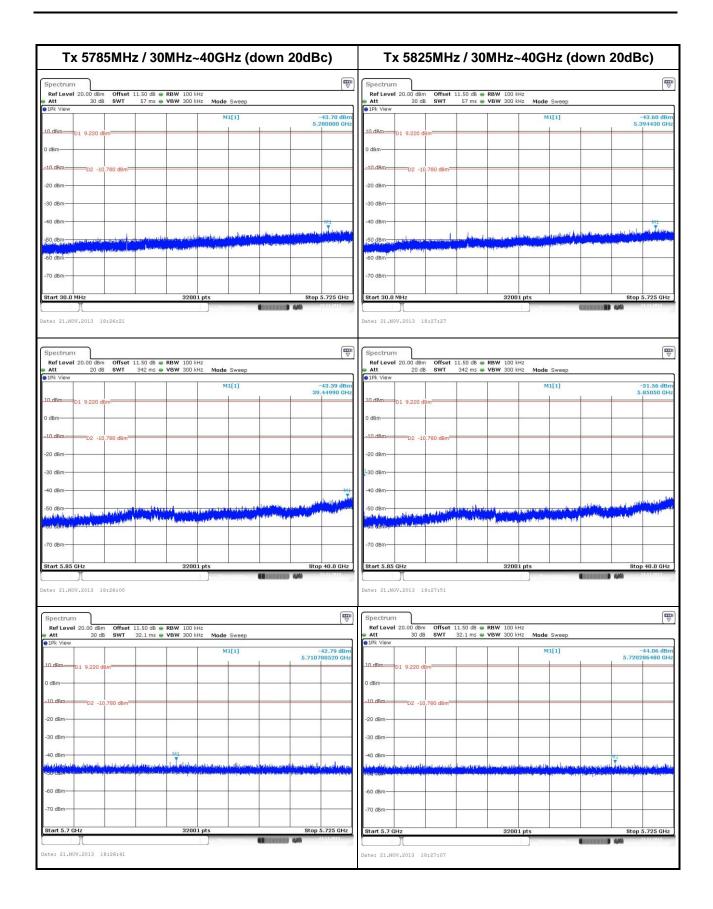

Report No.: FR380201-01AI Page: 44 of 49




### 802.11n HT20

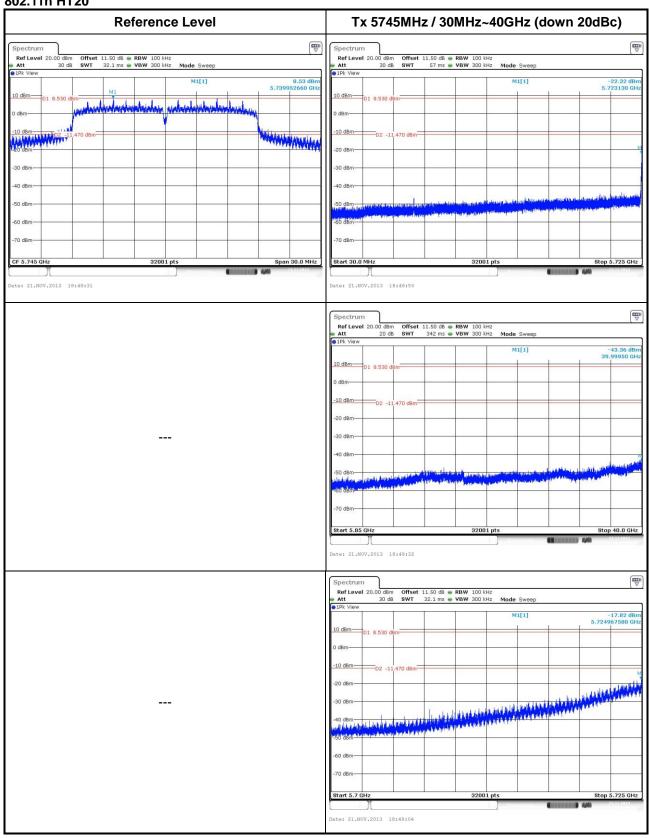

Report No.: FR380201-01AI Page: 45 of 49




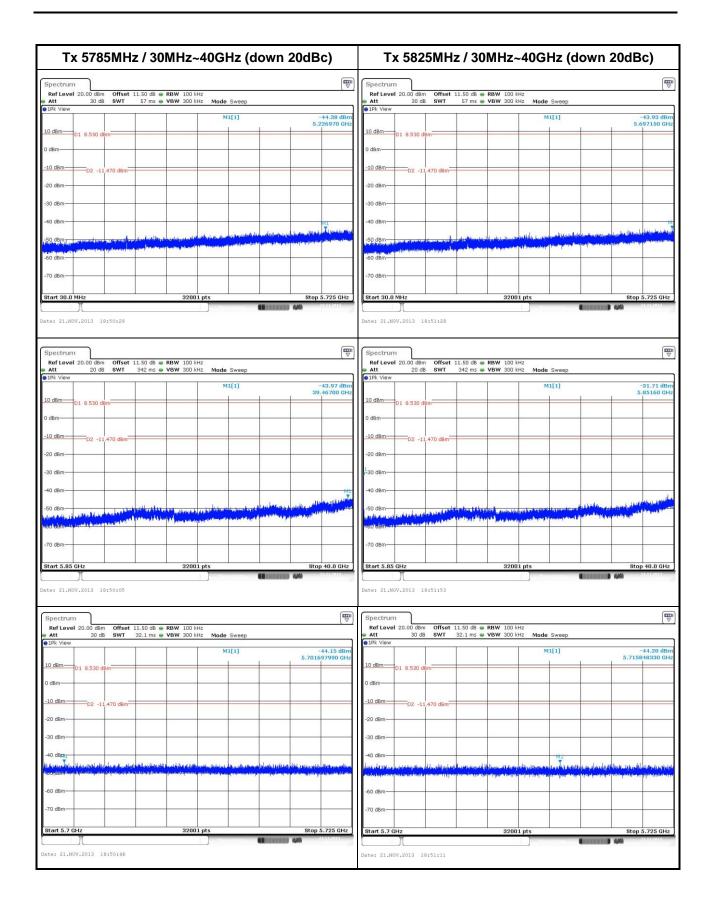

Report No.: FR380201-01AI Page: 46 of 49




### 802.11n HT40

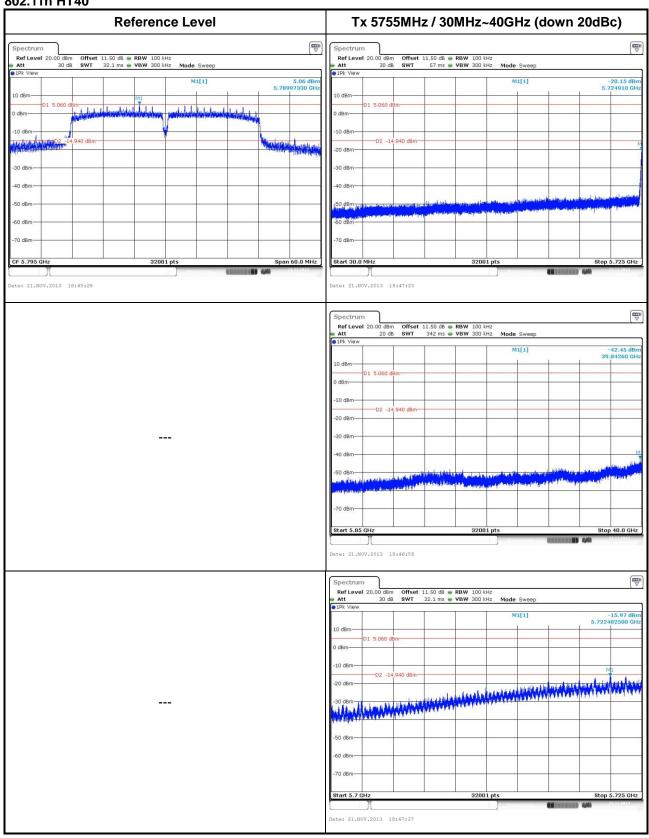

Report No.: FR380201-01AI Page: 47 of 49



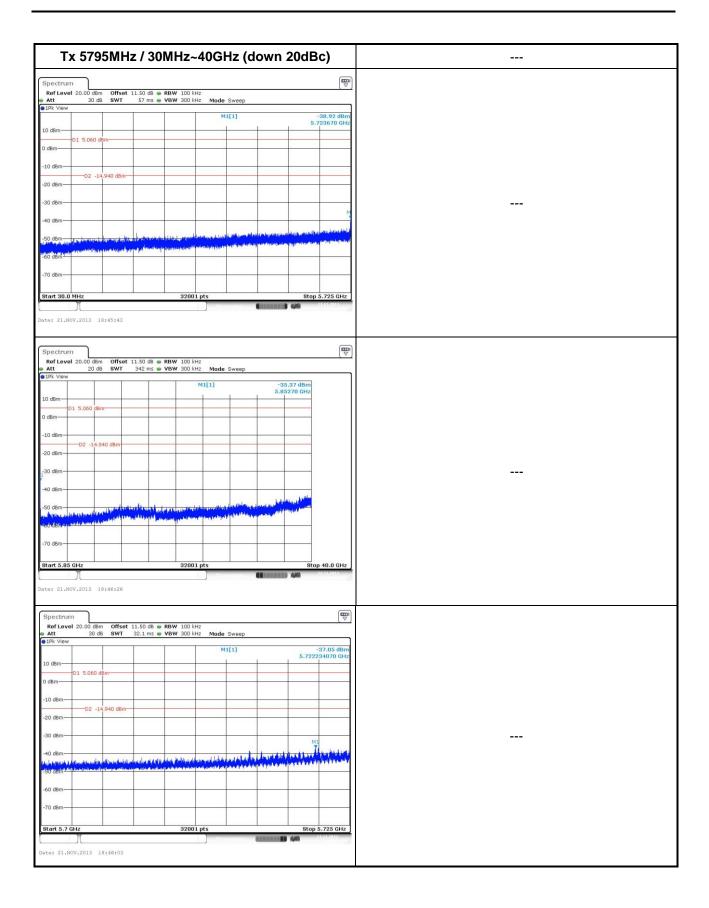

Report No.: FR380201-01AI Page: 48 of 49



# 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

Linkou Kwei Shan

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.

No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Tel: 886-3-271-8666

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR380201-01AI Page: 49 of 49