



SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

FCC RADIO TEST REPORT

Applicant's company	Wistron NeWeb Corporation
Applicant Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.
FCC ID	NKR-DNUA81
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.

Product Name	WLAN 802.11 a/b/g/n USB Adapter
Brand Name	WNC
Model Name	DNUA-81
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Oct. 30. 2008
Final Test Date	Apr. 24, 2009
Submission Type	Original Equipment



Statement

Test result included is only for the Draft n, 802.11b/g part and 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003 and 47 CFR FCC Part 15 Subpart C.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



Table of Contents

1. CERTIFICATE OF COMPLIANCE	1
2. SUMMARY OF THE TEST RESULT	2
3. GENERAL INFORMATION	3
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies	7
3.5. Table for Test Modes.....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units	10
3.8. Table for Parameters of Test Software Setting	10
3.9. Test Configurations	12
4. TEST RESULT	14
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. Maximum Conducted Output Power Measurement.....	18
4.3. Power Spectral Density Measurement	46
4.4. 6dB Spectrum Bandwidth Measurement	59
4.5. Radiated Emissions Measurement	73
4.6. Band Edge Emissions Measurement	119
4.7. Antenna Requirements	131
5. LIST OF MEASURING EQUIPMENTS	132
6. TEST LOCATION.....	134
7. TAF CERTIFICATE OF ACCREDITATION	135
APPENDIX A. PHOTOGRAPHS OF EUT.....	A1 ~ A9
APPENDIX B. TEST PHOTOS.....	B1 ~ B5



1. CERTIFICATE OF COMPLIANCE

Product Name : WLAN 802.11 a/b/g/n USB Adapter
Brand Name : WNC
Model Name : DNUA-81
Applicant : Wistron NeWeb Corporation
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 30, 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

Jordan Hsiao 2010.6.22

Jordan Hsiao

SPORTON INTERNATIONAL INC.

2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.94 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	10.71 dB
4.3	15.247(e)	Power Spectral Density	Complies	10.66 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	4.08 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.50 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 ⁻⁸	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

3. GENERAL INFORMATION

3.1. Product Details

Draft n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<For 2.4GHz Band>: 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <For 5GHz Band>: 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	<For 2.4GHz Band>: MCS0 (20MHz): 17.68 MHz ; MCS0 (40MHz): 36.32 MHz <For 5GHz Band>: MCS0 (20MHz): 17.60 MHz ; MCS0 (40MHz): 36.24 MHz
Conducted Output Power	<For 2.4GHz Band>: MCS0 (20MHz): 19.04 dBm ; MCS0 (40MHz): 17.45 dBm <For 5GHz Band>: MCS0 (20MHz): 16.83 dBm ; MCS0 (40MHz): 16.58 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

802.11a/b/g

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 15.20 MHz ; 11g: 16.48 MHz ; 11a: 16.44 MHz
Conducted Output Power	11b: 17.80 dBm ; 11g: 19.29 dBm ; 11a: 16.87 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

Antenna & Band width

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
802.11a	X	X	V	X
802.11b	X	X	V	X
802.11g	X	X	V	X
Drift n	X	X	V	V

Draft n spec

MCS Index	Nss	Modulation	R	NBPS	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPS	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

3.2. Accessories

Others	
USB Cable	1.4m, Shielded

3.3. Table for Filed Antenna

<For 5GHz Band>

Ant.	Brand	Model No	Antenna Type	Connector	Gain (dBi)	Remark
1	-	-	Printed Antenna	N/A	4.02	TX/RX
2	-	-	Printed Antenna	N/A	1.91	TX/RX


<For 2.4GHz Band>

Ant.	Brand	Model No	Antenna Type	Connector	Gain (dBi)	Remark
1	-	-	Printed Antenna	N/A	-0.45	TX/RX
2	-	-	Printed Antenna	N/A	-1.24	TX/RX

Note: The EUT has two antennas (2TX, 2RX).

Ant. 1 and Ant. 2 will transmit the same signal simultaneously.

Ant. 1 and Ant. 2 will receive the same signal simultaneously.

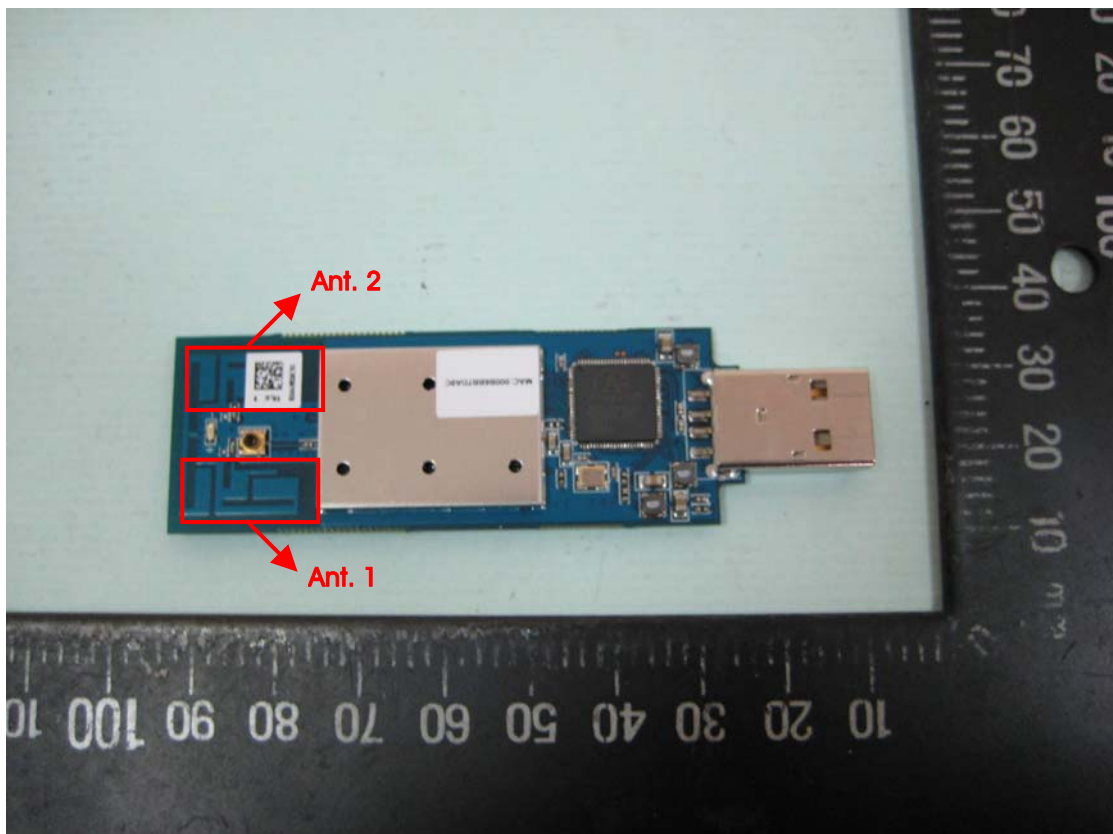

3.4. Table for Carrier Frequencies

<For 2.4GHz Band>

Frequency Allocation for 802.11b/g

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

<For 5GHz Band>

Frequency Allocation for 802.11a

There are two bandwidth systems for draft n.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz		

3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

<For 2.4GHz Band>

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Max. Peak Conducted Output Power	MCS0/20MHz	6.5 Mbps	1/6/11	1 / 2 / 1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1 / 2 / 1+2
	11b/CCK	1 Mbps	1/6/11	1 / 2 / 1+2
	11g/BPSK	6 Mbps	1/6/11	1 / 2 / 1+2
Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	6.5 Mbps	1/6/11	1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions Below 1GHz	Normal Link	Auto	-	-
Radiated Emissions Above 1GHz	MCS0/20MHz	6.5 Mbps	1/6/11	1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Band Edge Emissions	MCS0/20MHz	6.5 Mbps	1/11	1+2
	MCS0/40MHz	13.5 Mbps	3/9	1+2
	11b/CCK	1 Mbps	1/11	1+2
	11g/BPSK	6 Mbps	1/11	1+2

<For 5GHz Band>

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Max. Peak Conducted Output Power	MCS0/20MHz	6.5 Mbps	149/157/165	1 / 2 / 1+2
	MCS0/40MHz	13.5 Mbps	151/159	1 / 2 / 1+2
	11a/BPSK	6 Mbps	149/157/165	1 / 2 / 1+2
Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	6.5 Mbps	149/157/165	1+2
	MCS0/40MHz	13.5 Mbps	151/159	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
Radiated Emissions Below 1GHz	Normal Link	Auto	-	-
Radiated Emissions Above 1GHz	MCS0/20MHz	6.5 Mbps	149/157/165	1+2
	MCS0/40MHz	13.5 Mbps	151/159	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
Band Edge Emissions	MCS0/20MHz	6.5 Mbps	149/157/165	1+2
	MCS0/40MHz	13.5 Mbps	151/159	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2

Note:

The test modes were illustrated as below.

Test Mode 1: EUT

Test Mode 2: EUT with USB Cable

<For Conducted Emissions>:

Due to Mode 1 generated the worst test result, so it was recorded in this report.

<For Radiated Emissions Below 1GHz>:

Due to Mode 2 generated the worst test result, so it was recorded in this report.

3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	480872	IC 4086	-
CO04-HY	Conduction	Hwa Ya	480872	IC 4086	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2KWM3945ABG
Mouse	HP	M-UAE96	DoC
Wireless AP	Planex	GW-AP54SGX	N/A

3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For 2.4GHz Band>

Power Parameters of Draft n MCS0 20MHz Ant. 1 / Ant. 2

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
Draft n 20MHz Ant. 1 / Ant. 2	15	15	13

Power Parameters of Draft n MCS0 40MHz Ant. 1 / Ant. 2

Test Software Version	ART		
Frequency	2422 MHz	2437 MHz	2452 MHz
Draft n 40MHz Ant. 1 / Ant. 2	11.5	14	10

Power Parameters of IEEE 802.11b/g Ant. 1 / Ant. 2

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. 1 / Ant. 2	15	15	15
IEEE 802.11g Ant. 1 / Ant. 2	15	15	14

<For 5GHz Band>

Power Parameters of Draft n MCS0 20MHz Ant. 1 / Ant. 2

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
Draft n 20MHz Ant. 1 / Ant. 2	10.5	11	11

Power Parameters of Draft n MCS0 40MHz Ant. 1 / Ant. 2

Test Software Version	ART	
Frequency	5755 MHz	5795 MHz
Draft n 40MHz Ant. 1 / Ant. 2	10.5	11

Power Parameters of IEEE 802.11a Ant. 1 / Ant. 2

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a Ant. 1 / Ant. 2	11	11	11

During the test, the following program under WIN XP was executed:


At the same time, "ART" was executed to control the EUT continuously transmit RF signal.

3.9. Test Configurations


3.9.1. Radiation Emissions Test Configuration

Test Configuration: 9kHz~1GHz

Test Mode: Mode 2

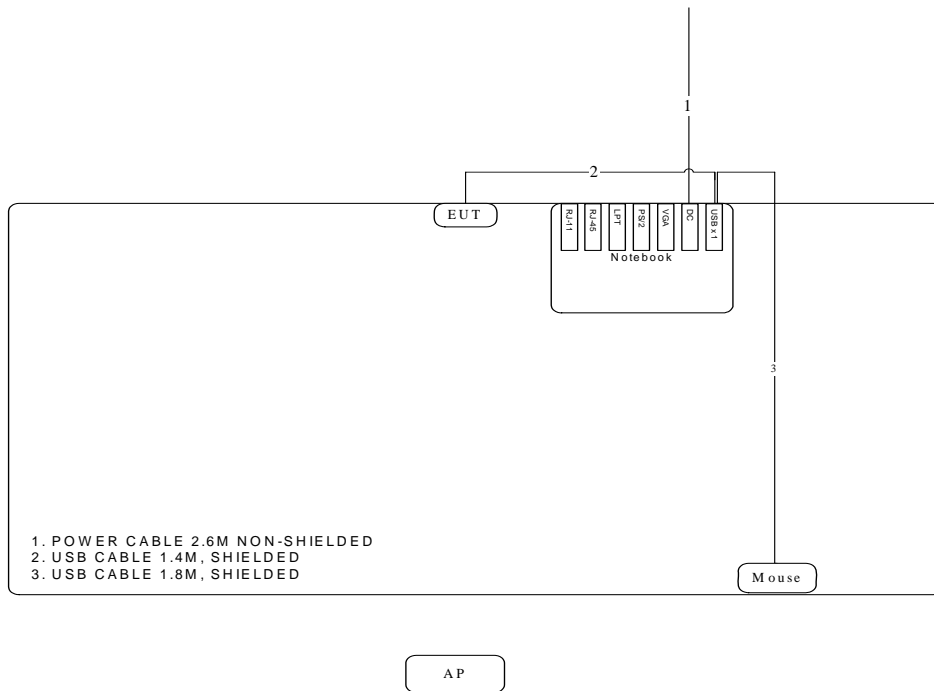


Test Configuration: Above 1GHz

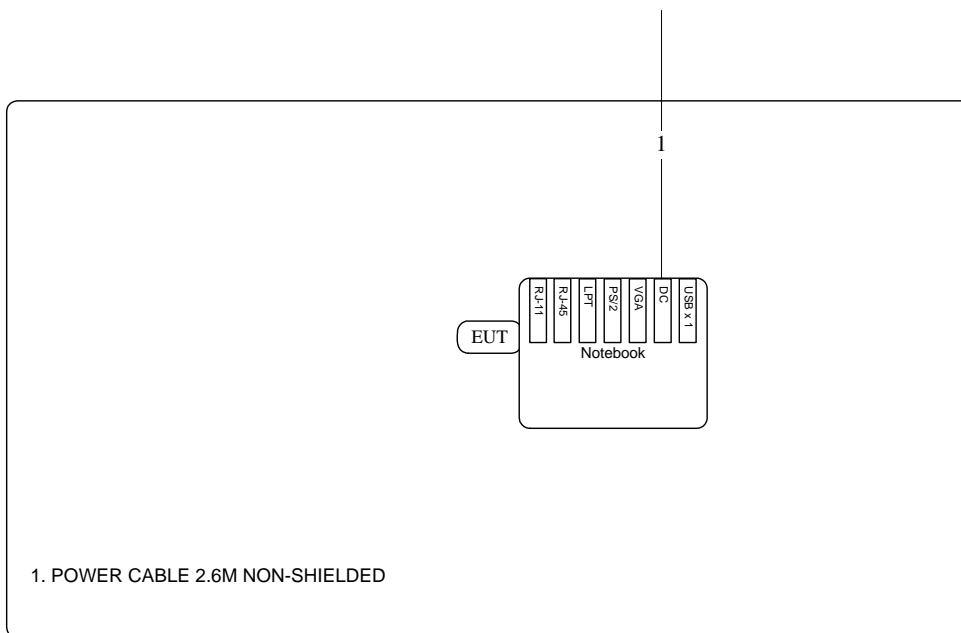

3.9.2. AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 1

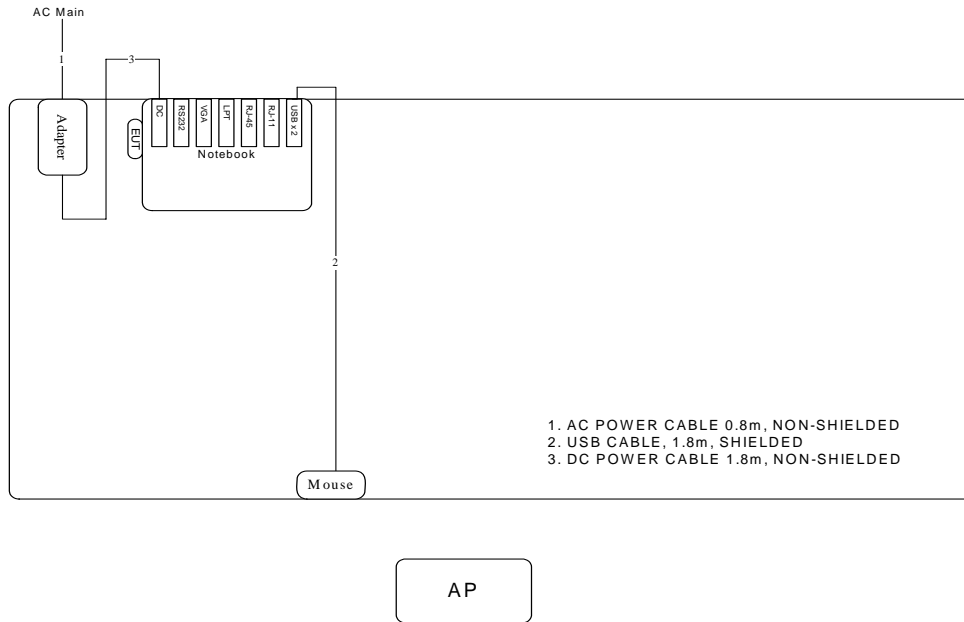

4. TEST RESULT

4.1. AC Power Line Conducted Emissions Measurement

4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

4.1.4. Test Setup Layout

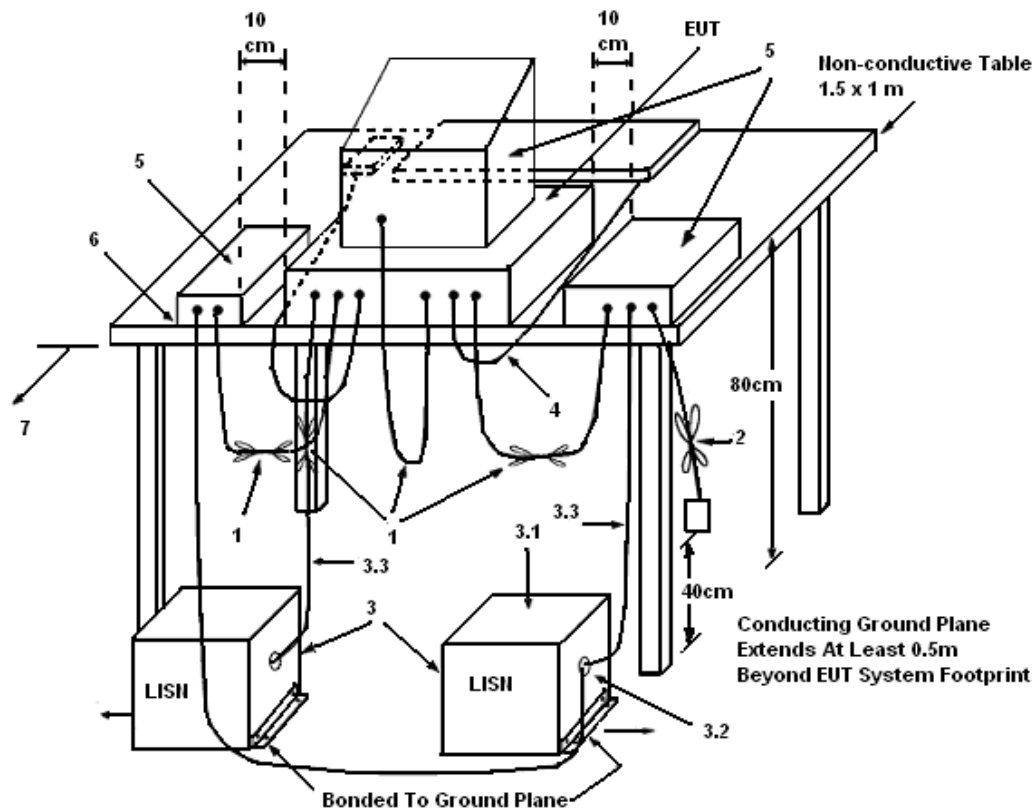

LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
 - (3.1) All other equipment powered from additional LISN(s).
 - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
 - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

4.1.5. Test Deviation


There is no deviation with the original standard.

4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	21°C	Humidity	55%
Test Engineer	Howar Sung	Phase	Line
Configuration	Mode 1		

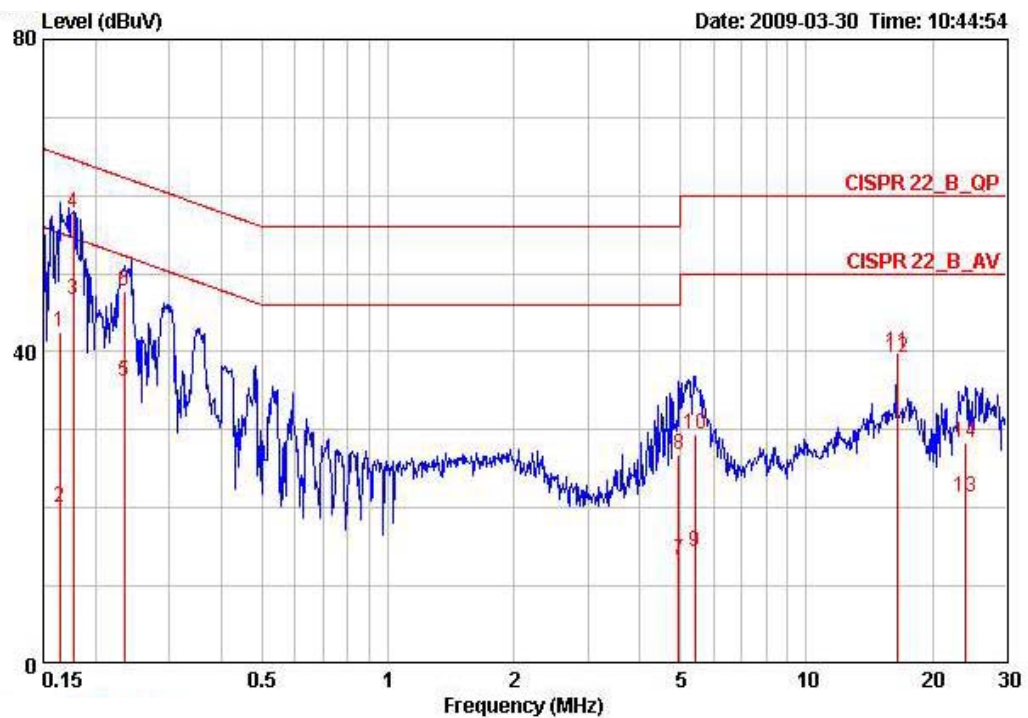

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.16414	42.46	-22.79	65.25	42.19	0.07	0.20	QP
2	0.16414	20.10	-35.15	55.25	19.83	0.07	0.20	AVERAGE
3	0.17714	46.69	-7.93	54.62	46.43	0.06	0.20	AVERAGE
4	0.17714	57.68	-6.94	64.62	57.42	0.06	0.20	QP
5	0.23473	36.28	-16.01	52.28	36.03	0.05	0.20	AVERAGE
6	0.23473	47.85	-14.44	62.28	47.60	0.05	0.20	QP
7	4.952	13.25	-32.75	46.00	12.79	0.16	0.30	AVERAGE
8	4.952	26.73	-29.27	56.00	26.27	0.16	0.30	QP
9	5.424	14.46	-35.54	50.00	13.98	0.18	0.30	AVERAGE
10	5.424	29.42	-30.58	60.00	28.94	0.18	0.30	QP
11	16.464	39.85	-20.15	60.00	38.81	0.64	0.40	QP
12	16.464	39.22	-10.78	50.00	38.18	0.64	0.40	AVERAGE
13	24.015	21.44	-28.56	50.00	19.87	1.07	0.50	AVERAGE
14	24.015	28.38	-31.62	60.00	26.81	1.07	0.50	QP

Temperature	24°C	Humidity	56%
Test Engineer	Howar Sung	Phase	Neutral
Configuration	Mode 1		

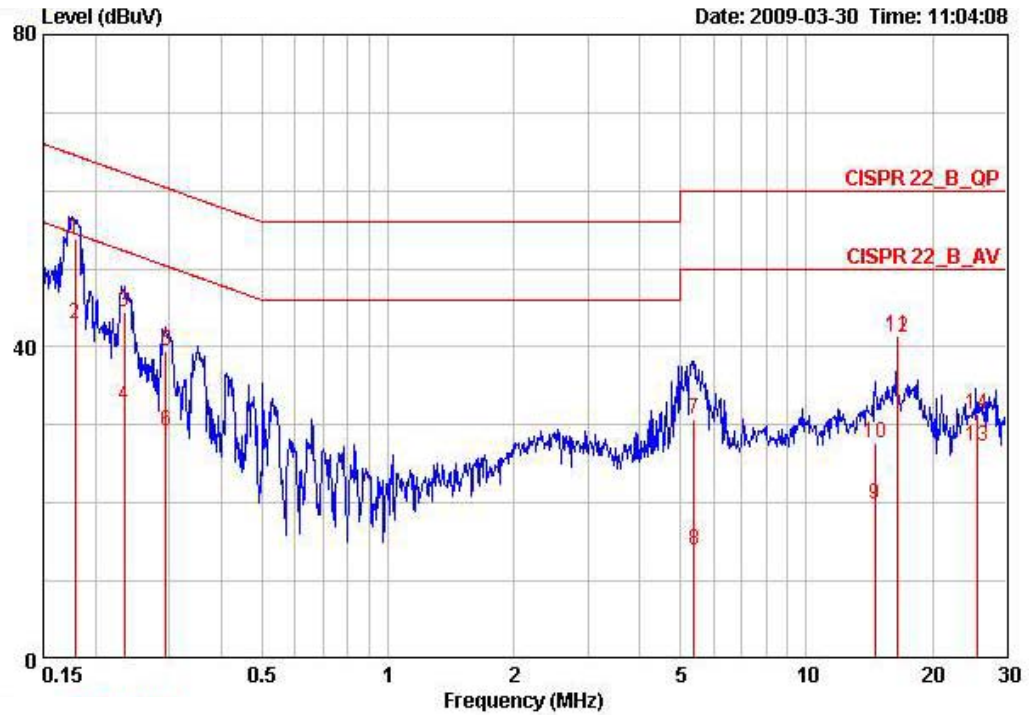

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17872	53.91	-10.64	64.54	53.62	0.09	0.20	QP
2	0.17872	42.90	-11.65	54.54	42.61	0.09	0.20	AVERAGE
3	0.23409	44.51	-17.80	62.30	44.23	0.08	0.20	QP
4	0.23409	32.55	-19.76	52.30	32.27	0.08	0.20	AVERAGE
5	0.29398	39.51	-20.90	60.41	39.24	0.07	0.20	QP
6	0.29398	29.31	-21.10	50.41	29.04	0.07	0.20	AVERAGE
7	5.390	30.83	-29.17	60.00	30.31	0.22	0.30	QP
8	5.390	14.00	-36.00	50.00	13.48	0.22	0.30	AVERAGE
9	14.594	19.93	-30.07	50.00	18.97	0.56	0.40	AVERAGE
10	14.594	27.66	-32.34	60.00	26.70	0.56	0.40	QP
11	16.464	41.40	-18.60	60.00	40.35	0.65	0.40	QP
12	16.464	41.16	-8.84	50.00	40.11	0.65	0.40	AVERAGE
13	25.489	27.29	-22.71	50.00	25.48	1.21	0.60	AVERAGE
14	25.489	31.44	-28.56	60.00	29.63	1.21	0.60	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

4.2. Maximum Conducted Output Power Measurement

4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz
VB	3MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

4.2.4. Test Setup Layout

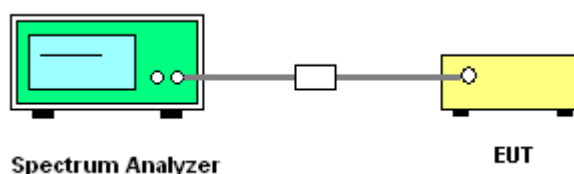

4.2.5. Test Deviation

There is no deviation with the original standard.

4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.2.7. Test Result of Maximum Conducted Output Power

Temperature	23°C	Humidity	56%
Test Engineer	Sam Chen	Configurations	Draft n
Test Date	Mar. 28, 2009 ~ Apr. 22, 2009		

<For 2.4GHz Band>

Configuration Draft n MCS0 20MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.05	30.00	Complies
6	2437 MHz	15.91	30.00	Complies
11	2462 MHz	13.83	30.00	Complies

Configuration Draft n MCS0 20MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.00	30.00	Complies
6	2437 MHz	16.09	30.00	Complies
11	2462 MHz	13.83	30.00	Complies

Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.04	30.00	Complies
6	2437 MHz	19.01	30.00	Complies
11	2462 MHz	16.84	30.00	Complies

Configuration Draft n MCS0 40MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	12.14	30.00	Complies
6	2437 MHz	14.51	30.00	Complies
9	2452 MHz	11.30	30.00	Complies

Configuration Draft n MCS0 40MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	12.20	30.00	Complies
6	2437 MHz	14.36	30.00	Complies
9	2452 MHz	11.33	30.00	Complies

Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	15.18	30.00	Complies
6	2437 MHz	17.45	30.00	Complies
9	2452 MHz	14.33	30.00	Complies

<For 5GHz Band>

Configuration Draft n MCS0 20MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	12.32	30.00	Complies
157	5785 MHz	13.27	30.00	Complies
165	5825 MHz	13.43	30.00	Complies

Configuration Draft n MCS0 20MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	11.86	30.00	Complies
157	5785 MHz	13.77	30.00	Complies
165	5825 MHz	14.18	30.00	Complies

Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	15.11	30.00	Complies
157	5785 MHz	16.54	30.00	Complies
165	5825 MHz	16.83	30.00	Complies

Configuration Drafft n MCS0 40MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	12.22	30.00	Complies
159	5795 MHz	13.13	30.00	Complies

Configuration Drafft n MCS0 40MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	12.20	30.00	Complies
159	5795 MHz	13.96	30.00	Complies

Configuration Drafft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	15.22	30.00	Complies
159	5795 MHz	16.58	30.00	Complies

Temperature	23°C	Humidity	56%
Test Engineer	Sam Chen	Configurations	802.11a/b/g
Test Date	Mar. 28, 2009 ~ Apr. 24, 2009		

Configuration IEEE 802.11b Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.66	30.00	Complies
6	2437 MHz	14.34	30.00	Complies
11	2462 MHz	14.75	30.00	Complies

Configuration IEEE 802.11b Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.27	30.00	Complies
6	2437 MHz	14.57	30.00	Complies
11	2462 MHz	14.83	30.00	Complies

Configuration IEEE 802.11b Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.48	30.00	Complies
6	2437 MHz	17.47	30.00	Complies
11	2462 MHz	17.80	30.00	Complies

Configuration IEEE 802.11g Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.01	30.00	Complies
6	2437 MHz	16.08	30.00	Complies
11	2462 MHz	15.27	30.00	Complies

Configuration IEEE 802.11g Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.26	30.00	Complies
6	2437 MHz	16.47	30.00	Complies
11	2462 MHz	15.43	30.00	Complies

Configuration IEEE 802.11g Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.15	30.00	Complies
6	2437 MHz	19.29	30.00	Complies
11	2462 MHz	18.36	30.00	Complies

Configuration IEEE 802.11a Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	12.96	30.00	Complies
157	5785 MHz	13.17	30.00	Complies
165	5825 MHz	13.46	30.00	Complies


Configuration IEEE 802.11a Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	12.66	30.00	Complies
157	5785 MHz	14.08	30.00	Complies
165	5825 MHz	14.23	30.00	Complies

Configuration IEEE 802.11a Ant. 1 + Ant. 2


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	15.82	30.00	Complies
157	5785 MHz	16.66	30.00	Complies
165	5825 MHz	16.87	30.00	Complies

Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2412 MHz

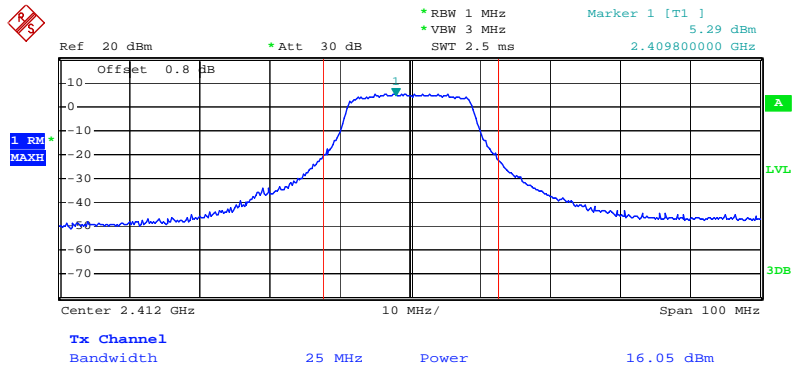


Date: 28.MAR.2009 12:28:00

Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2437 MHz

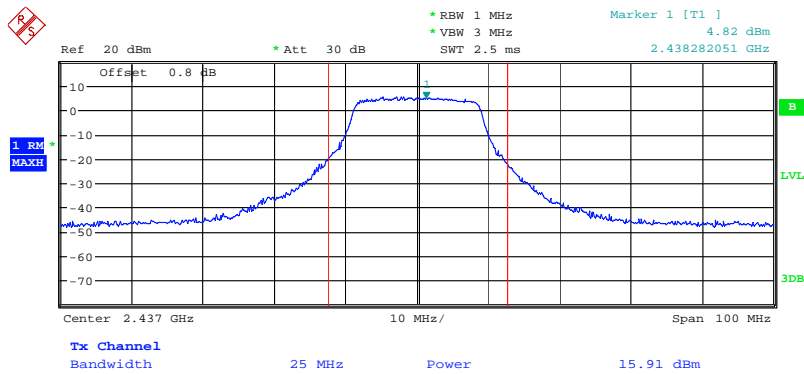


Date: 22.APR.2009 23:26:03

Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2462 MHz

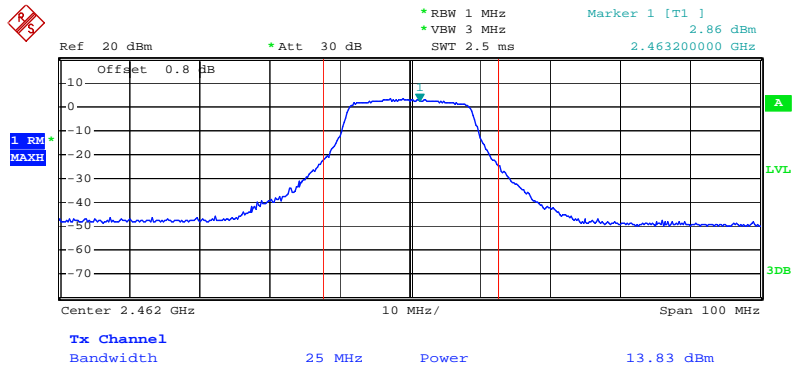


Date: 28.MAR.2009 12:23:48

Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 2 / 2412 MHz

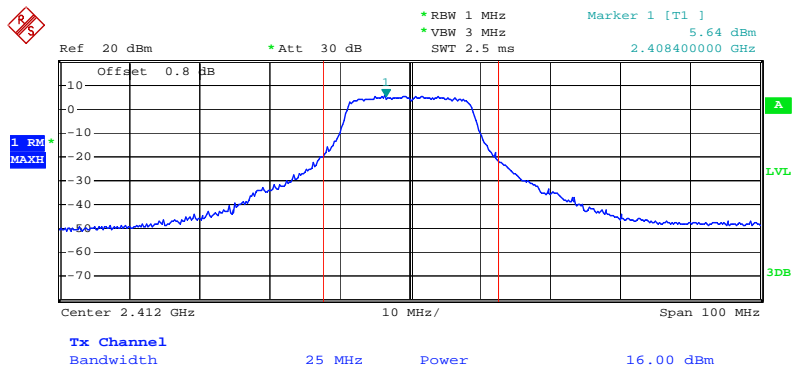


Date: 28.MAR.2009 12:27:14

Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 2 / 2437 MHz

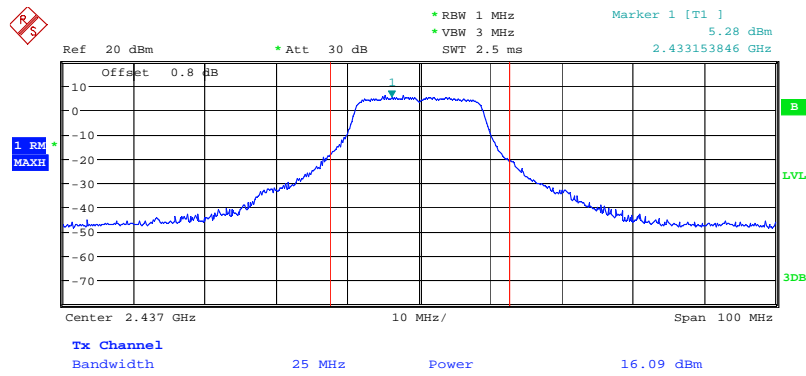

Date: 22.APR.2009 23:26:53


Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 2 / 2462 MHz

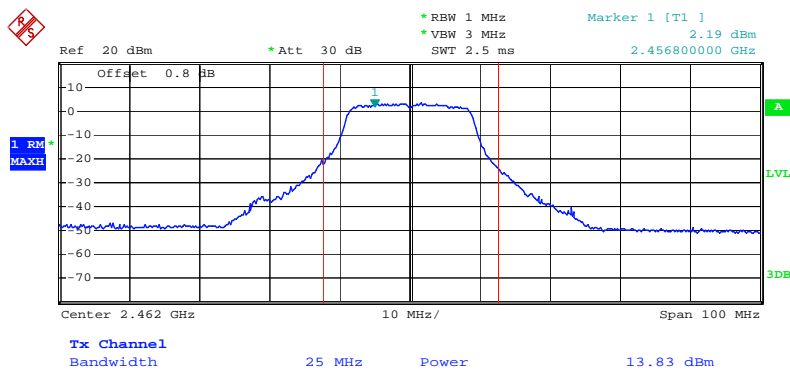

Date: 28.MAR.2009 12:23:03




Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 1 / 2422 MHz

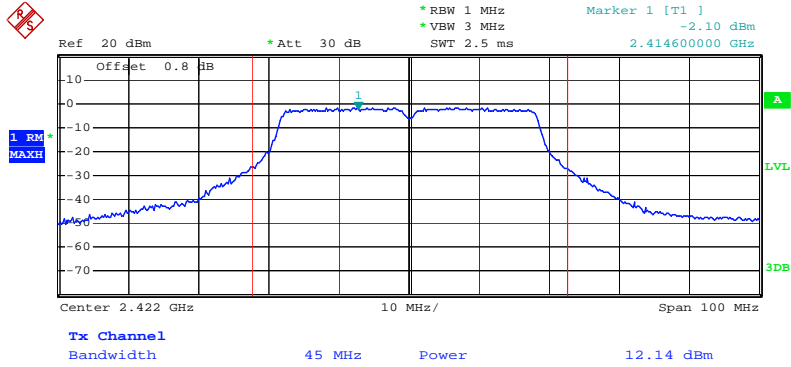


Date: 28.MAR.2009 12:29:15

Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 1 / 2437 MHz

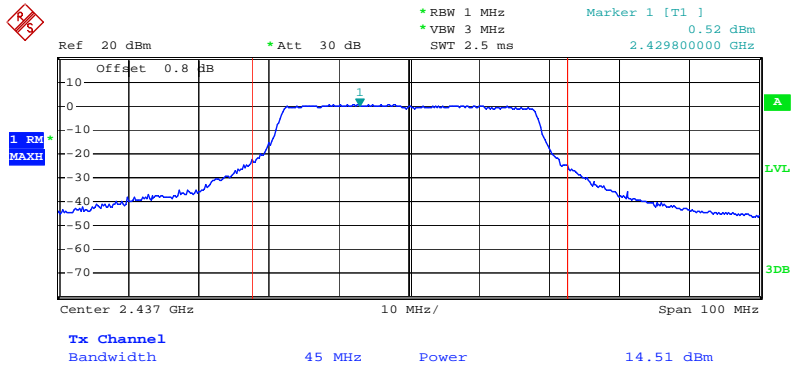


Date: 28.MAR.2009 12:31:52

Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 1 / 2452 MHz

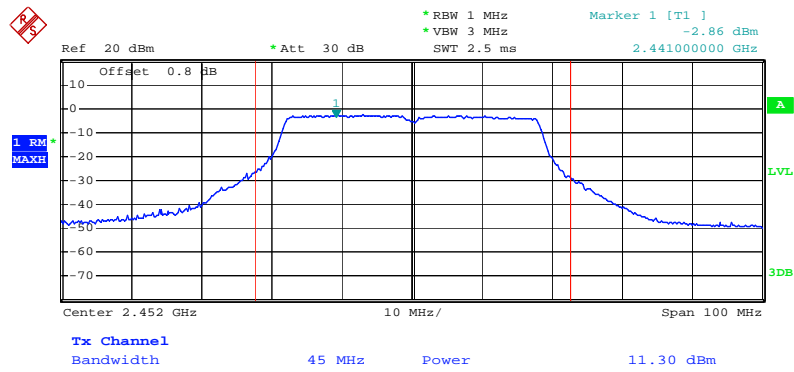


Date: 28.MAR.2009 12:32:51

Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2422 MHz

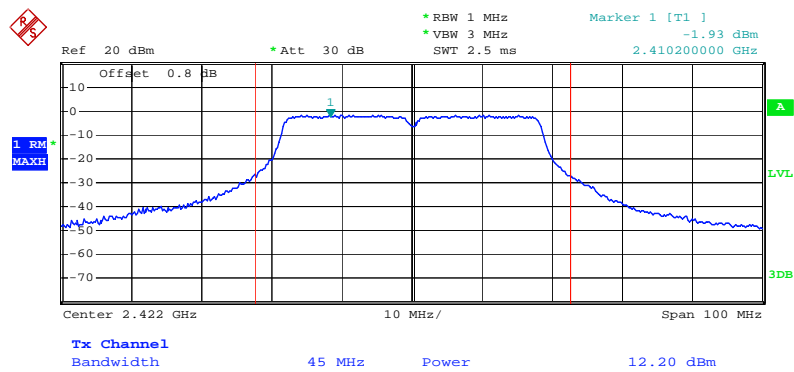


Date: 28.MAR.2009 12:30:08

Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2437 MHz

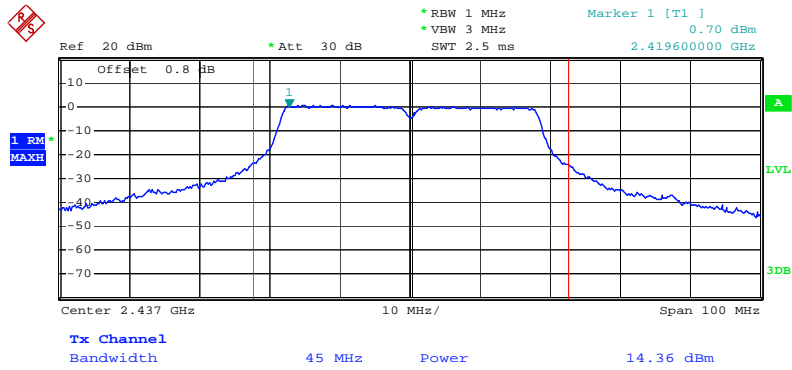


Date: 28.MAR.2009 12:31:05

Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2452 MHz

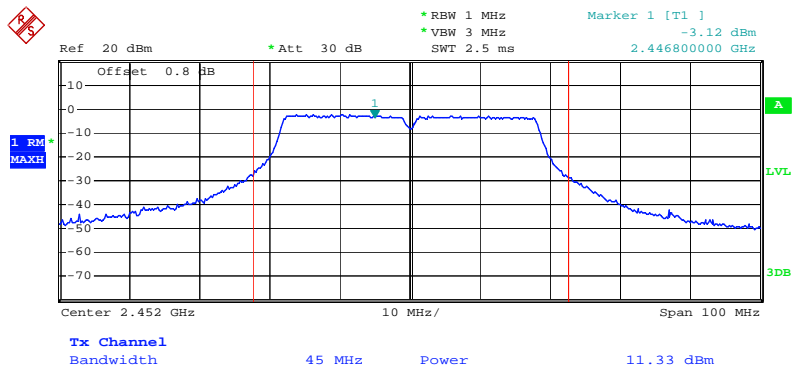


Date: 28.MAR.2009 12:33:44

Channel Output Power Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 / 5745 MHz

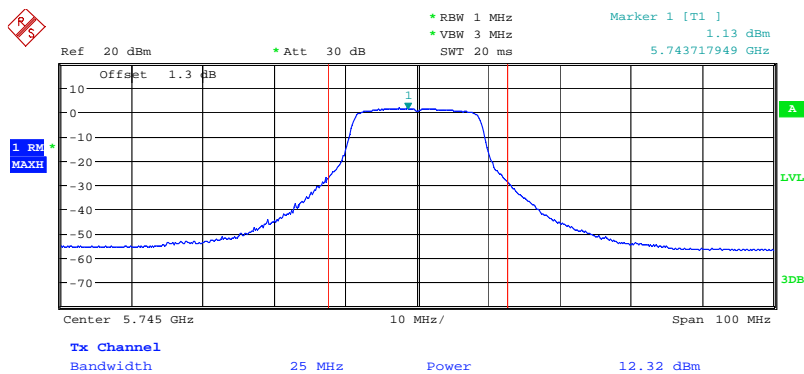


Date: 22.APR.2009 22:26:07

Channel Output Power Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 / 5785MHz

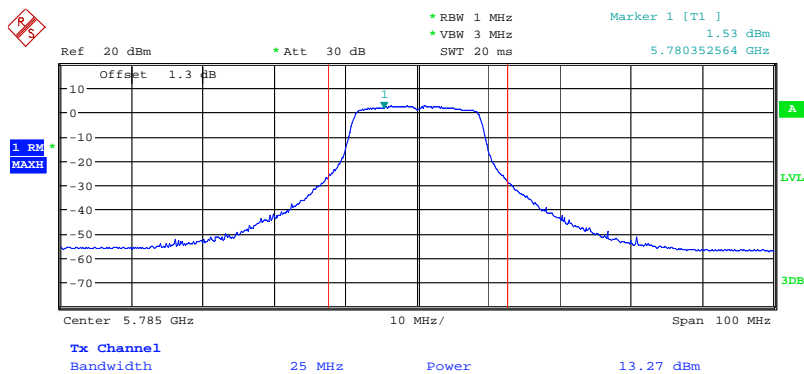


Date: 22.APR.2009 22:30:39

Channel Output Power Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 / 5825 MHz

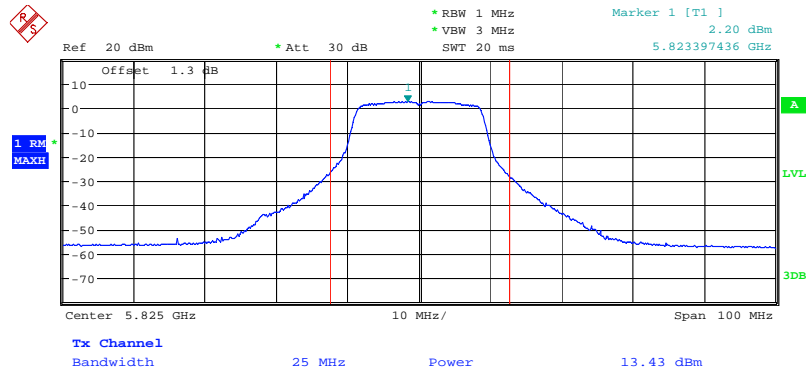


Date: 22.APR.2009 22:31:47

Channel Output Power Plot on Configuration 11a Draft n MCS0 20MHz Ant. 2 / 5745 MHz

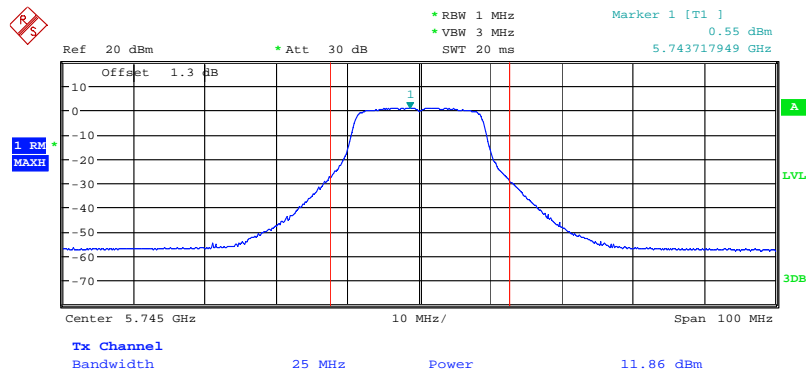


Date: 22.APR.2009 22:27:59

Channel Output Power Plot on Configuration 1 1a Draft n MCS0 20MHz Ant. 2 / 5785MHz

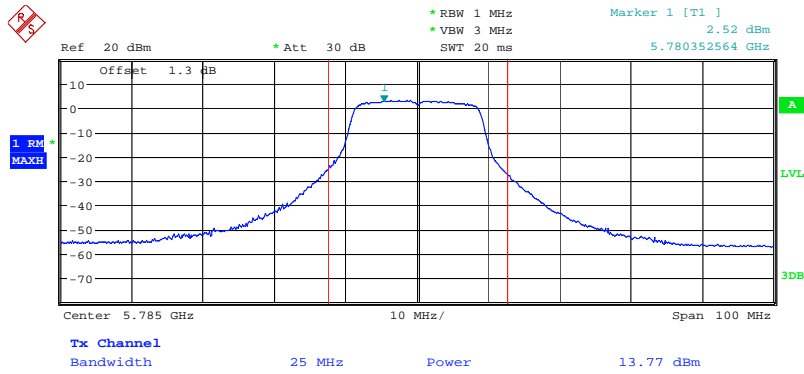


Date: 22.APR.2009 22:30:01

Channel Output Power Plot on Configuration 1 1a Draft n MCS0 20MHz Ant. 2 / 5825 MHz

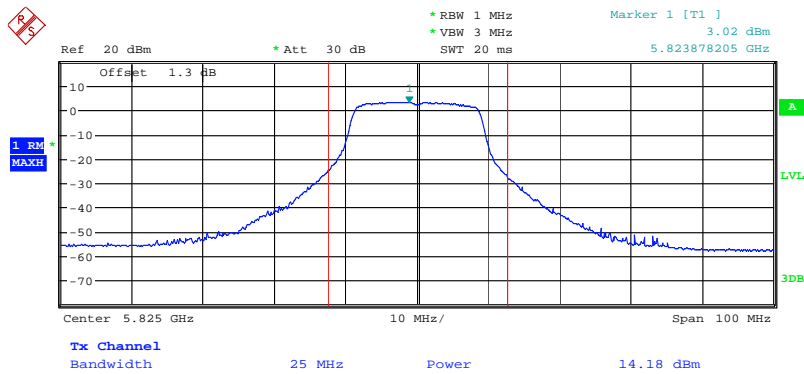


Date: 22.APR.2009 22:32:20

Channel Output Power Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 / 5755 MHz

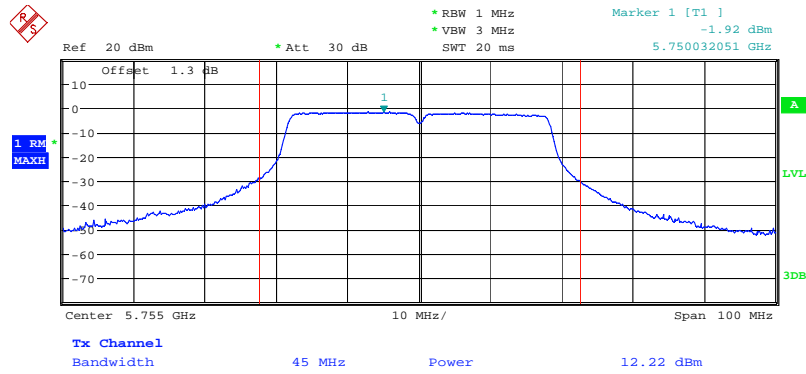


Date: 22.APR.2009 22:38:13

Channel Output Power Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 / 5795 MHz

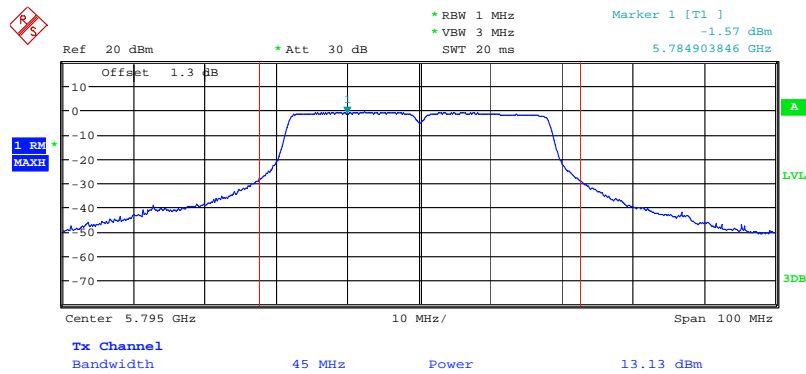


Date: 22.APR.2009 22:36:26

Channel Output Power Plot on Configuration 11a Draft n MCS0 40MHz Ant. 2 / 5755 MHz

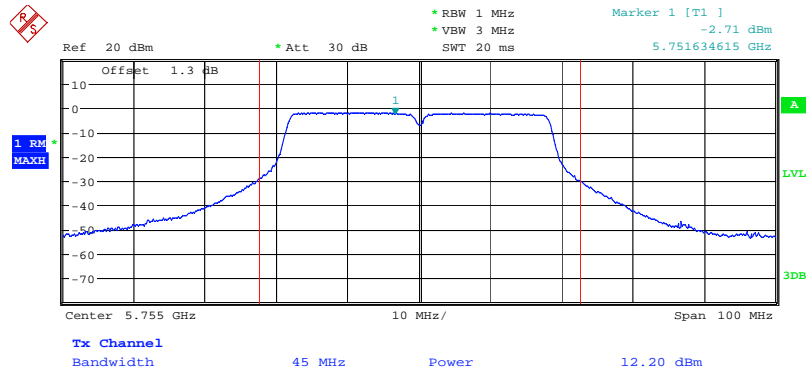


Date: 22.APR.2009 22:39:45

Channel Output Power Plot on Configuration 11a Draft n MCS0 40MHz Ant. 2 / 5795 MHz

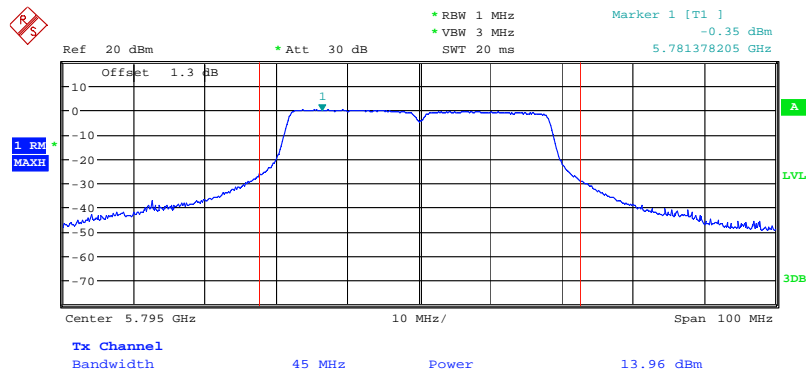


Date: 22.APR.2009 22:34:11

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 1 / 2412 MHz

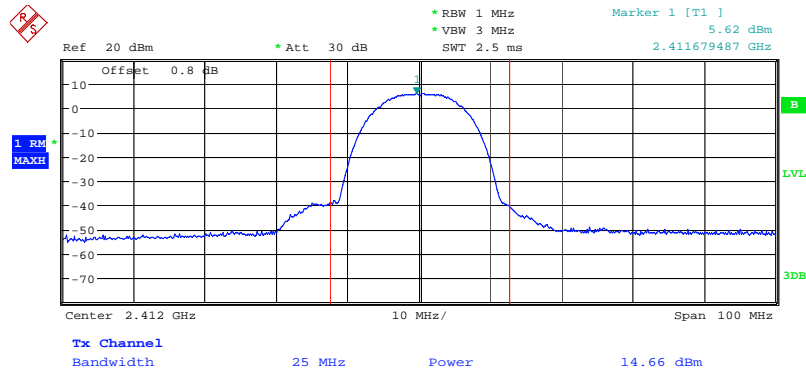


Date: 22.APR.2009 23:12:25

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 1 / 2437 MHz

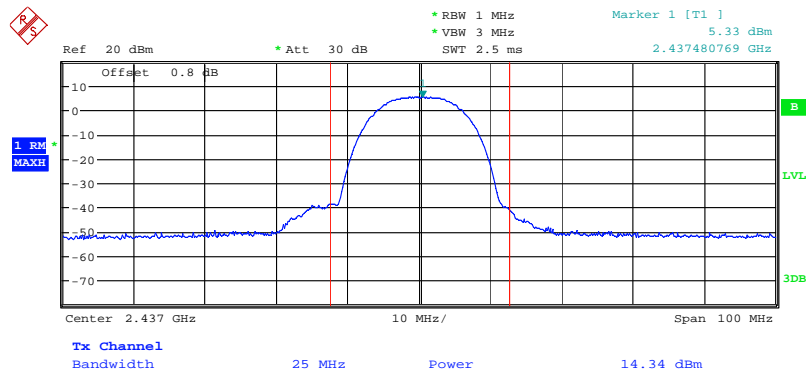


Date: 22.APR.2009 23:15:56

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 1 / 2462 MHz

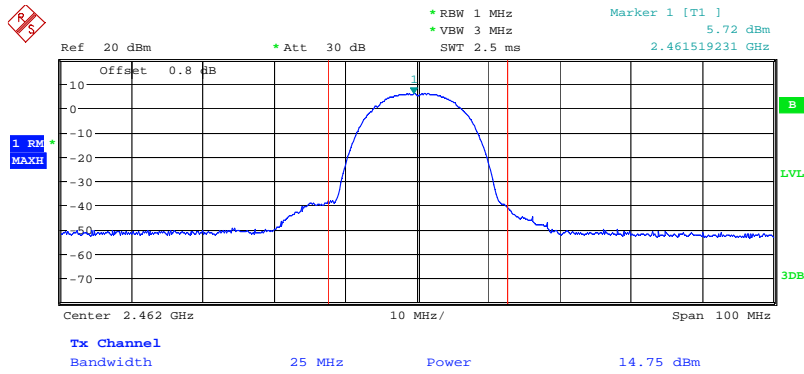


Date: 22.APR.2009 23:17:17

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 2 / 2412 MHz

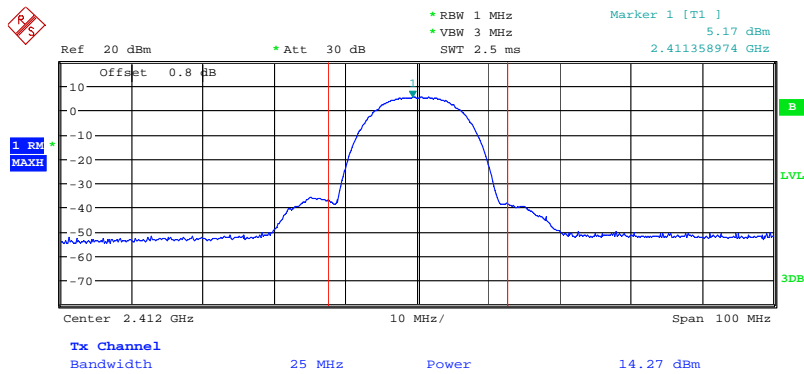


Date: 22.APR.2009 23:13:25

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 2 / 2437 MHz

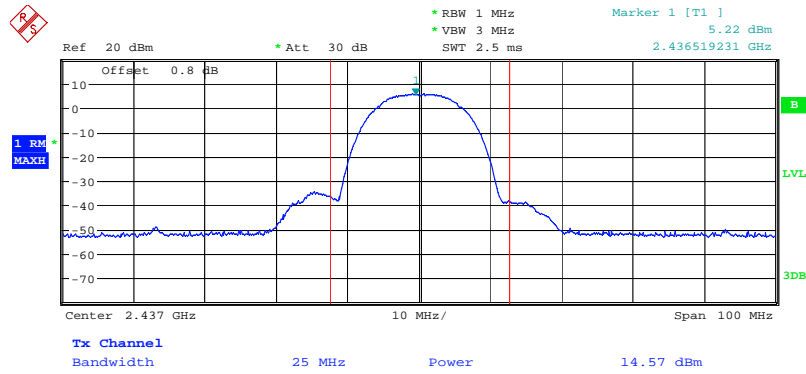


Date: 22.APR.2009 23:14:27

Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 2 / 2462 MHz

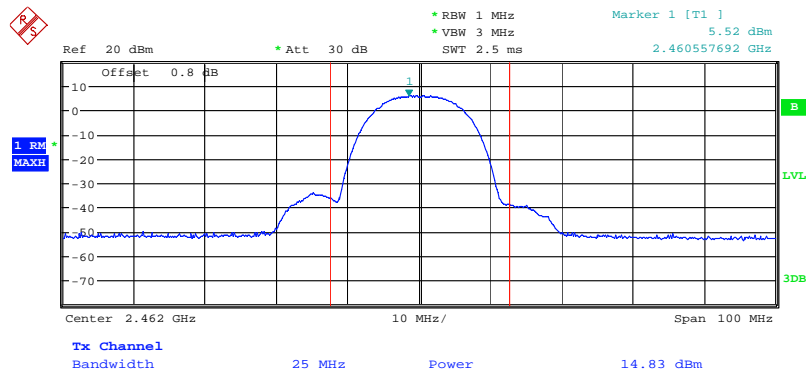


Date: 22.APR.2009 23:18:16

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 1 / 2412 MHz

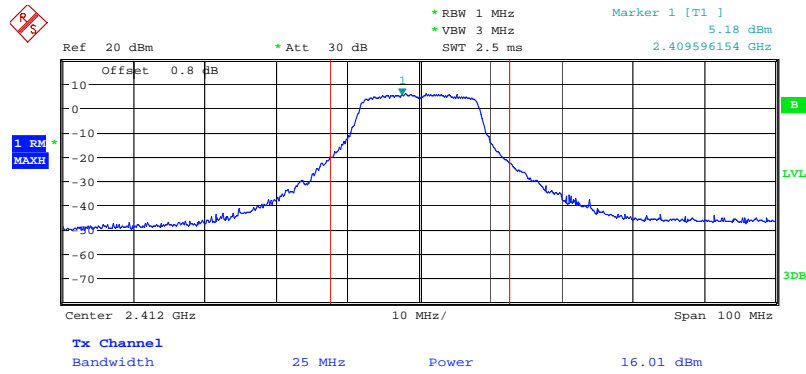


Date: 22.APR.2009 23:24:27

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 1 / 2437 MHz

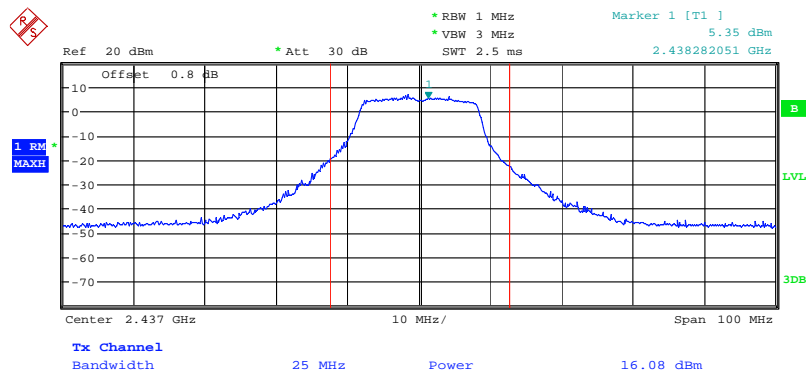


Date: 22.APR.2009 23:21:59

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 1 / 2462 MHz

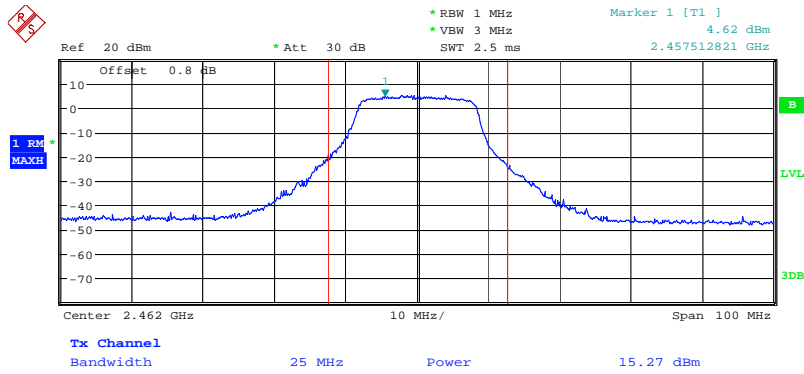


Date: 22.APR.2009 23:21:10

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 2 / 2412 MHz

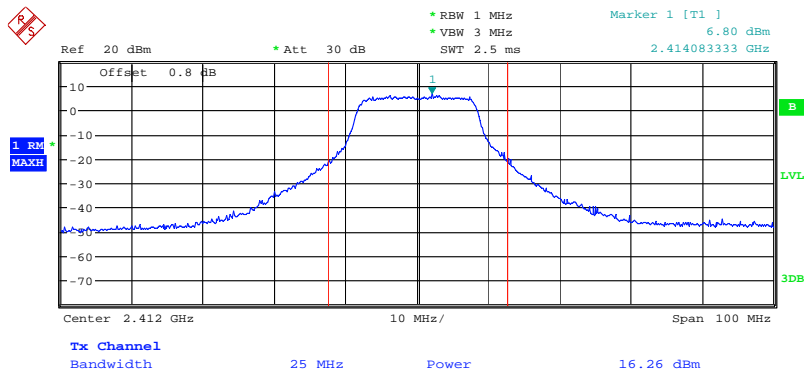


Date: 22.APR.2009 23:23:46

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 2 / 2437 MHz

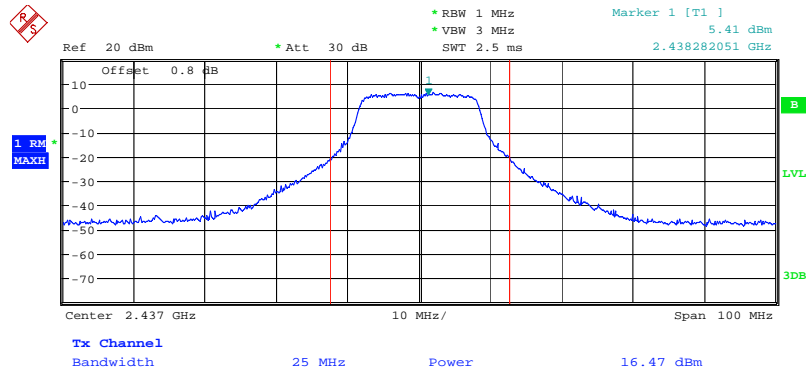


Date: 22.APR.2009 23:23:00

Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 2 / 2462 MHz

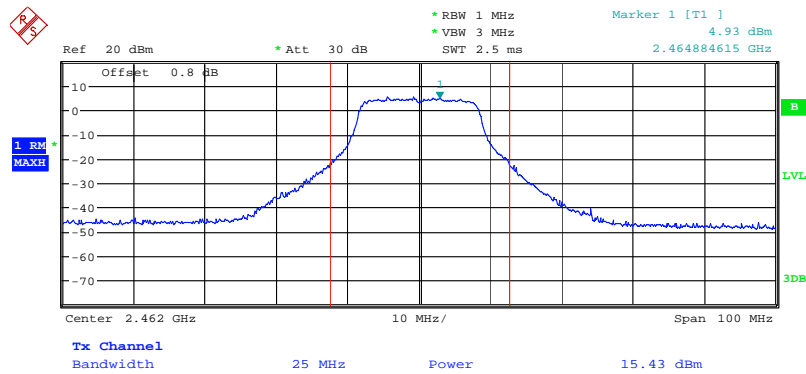


Date: 22.APR.2009 23:19:49

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1 / 5745 MHz

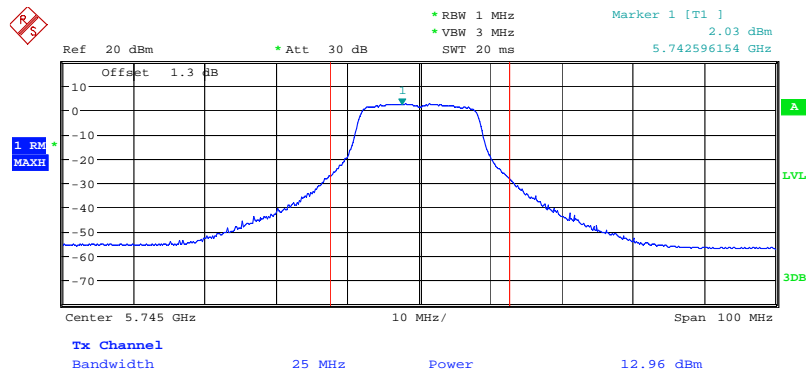


Date: 22.APR.2009 21:07:48

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1 / 5785 MHz

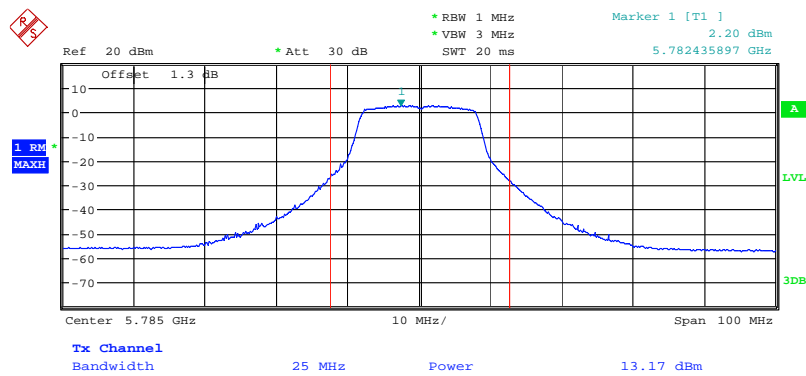


Date: 22.APR.2009 21:35:46

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1 / 5825 MHz

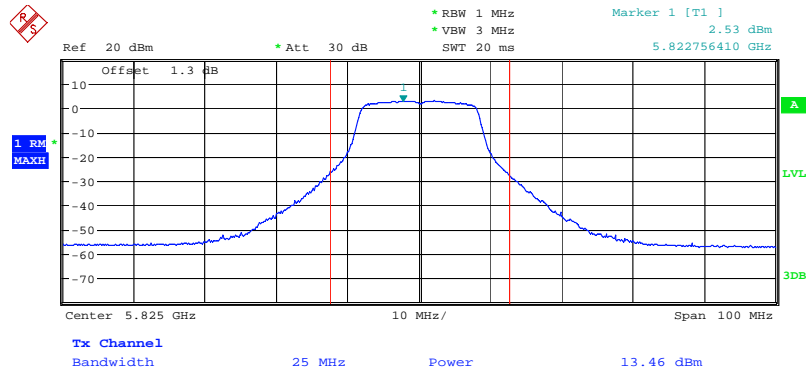

Date: 22.APR.2009 21:37:19

Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 2 / 5745 MHz

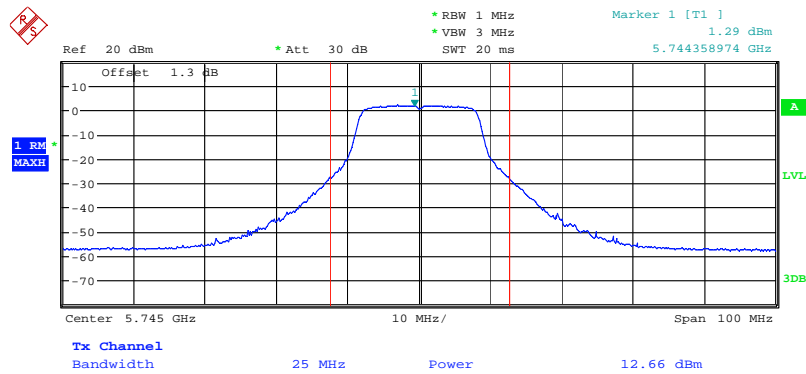

Date: 22.APR.2009 21:09:47

4.3. Power Spectral Density Measurement

4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30 kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyser through a combiner.

4.3.4. Test Setup Layout

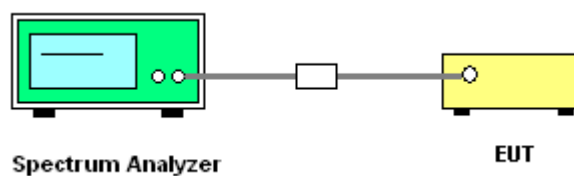

4.3.5. Test Deviation

There is no deviation with the original standard.

4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.3.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	56%
Test Engineer	Sam Chen	Configurations	Draft n
Test Date	Mar. 28, 2009 ~ Apr. 24, 2009		

<For 2.4GHz Band>

Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-6.02	8.00	Complies
6	2437 MHz	-6.29	8.00	Complies
11	2462 MHz	-7.24	8.00	Complies

Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
3	2422 MHz	-3.38	8.00	Complies
6	2437 MHz	-2.66	8.00	Complies
9	2452 MHz	-5.88	8.00	Complies

<For 5GHz Band>

Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
149	5745 MHz	-9.72	8.00	Complies
157	5785 MHz	-8.76	8.00	Complies
165	5825 MHz	-8.12	8.00	Complies

Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
151	5755 MHz	-11.98	8.00	Complies
159	5795 MHz	-12.37	8.00	Complies

Temperature	23°C	Humidity	62%
Test Engineer	Sam Chen	Configurations	802.11a/b/g
Test Date	Mar. 28, 2009 ~ Apr. 24, 2009		

Configuration IEEE 802.11b Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-7.80	8.00	Complies
6	2437 MHz	-7.88	8.00	Complies
11	2462 MHz	-7.44	8.00	Complies


Configuration IEEE 802.11g Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-4.74	8.00	Complies
6	2437 MHz	-4.86	8.00	Complies
11	2462 MHz	-4.81	8.00	Complies

Configuration IEEE 802.11a Ant. 1 + Ant. 2


Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
149	5745 MHz	-9.58	8.00	Complies
157	5785 MHz	-9.84	8.00	Complies
165	5825 MHz	-9.47	8.00	Complies

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 1 + Ant. 2 / 2412 MHz

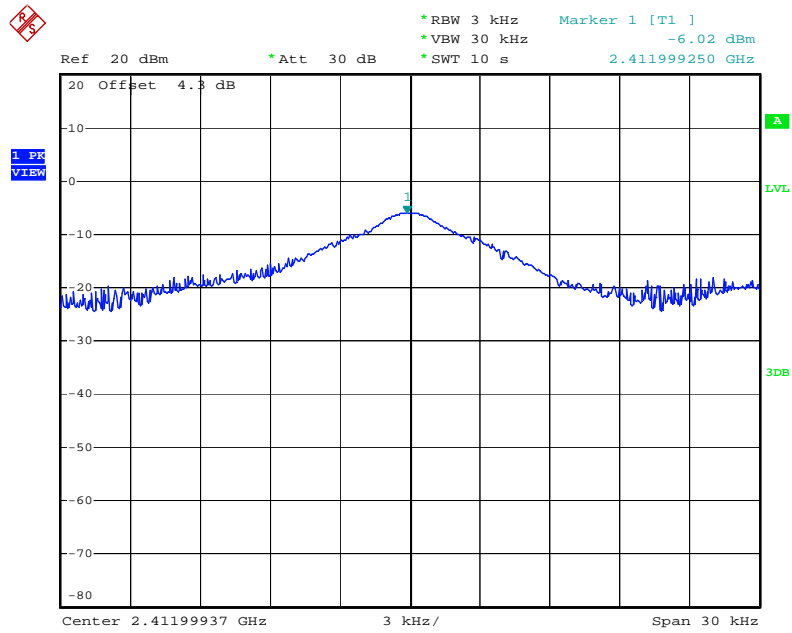


Date: 28.MAR.2009 15:36:37

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 1 + Ant. 2 / 2437 MHz

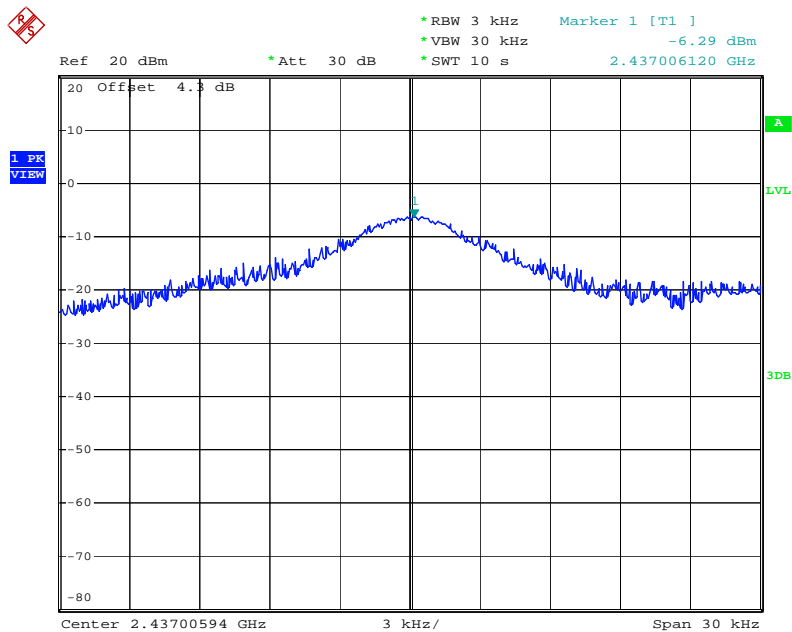


Date: 24.APR.2009 16:11:55

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 1 + Ant. 2 / 2462 MHz

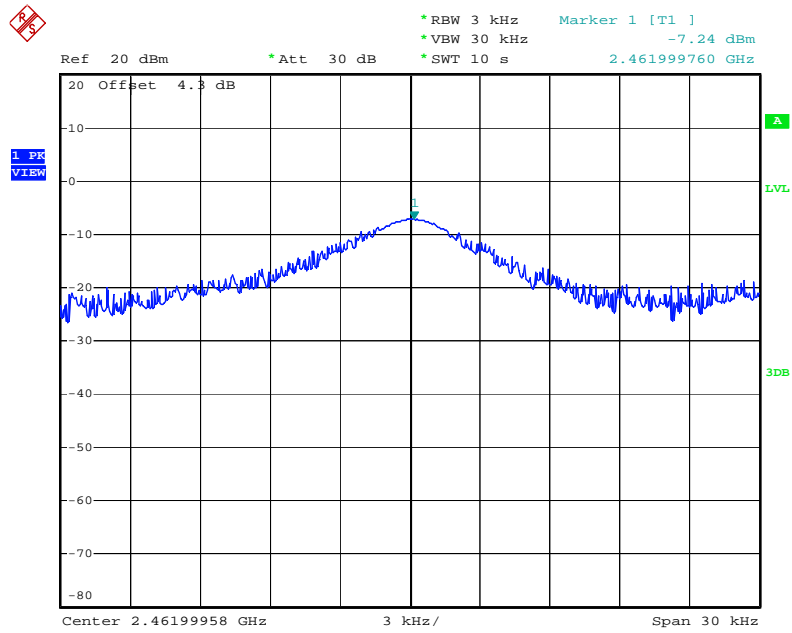


Date: 28.MAR.2009 15:31:43

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 1 + Ant. 2 / 2422 MHz

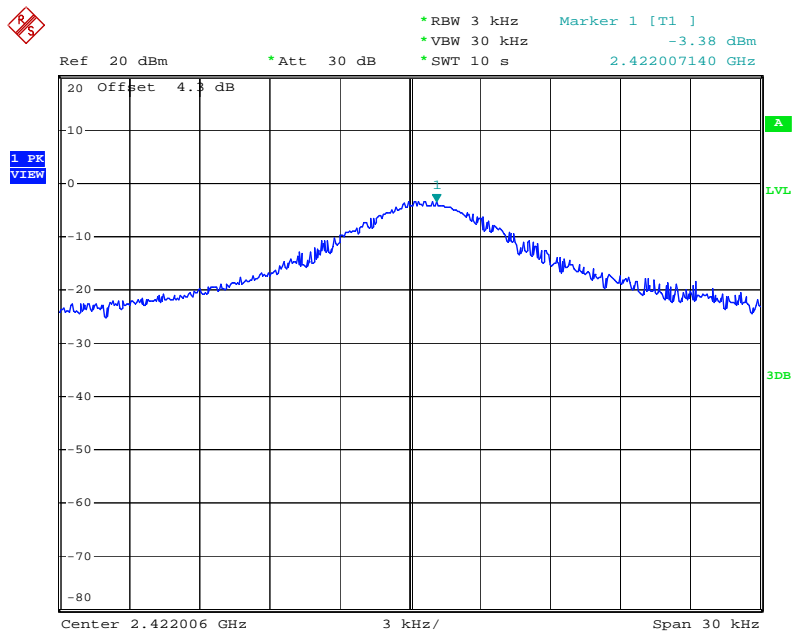


Date: 24.APR.2009 16:27:09

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 1 + Ant. 2 / 2437 MHz

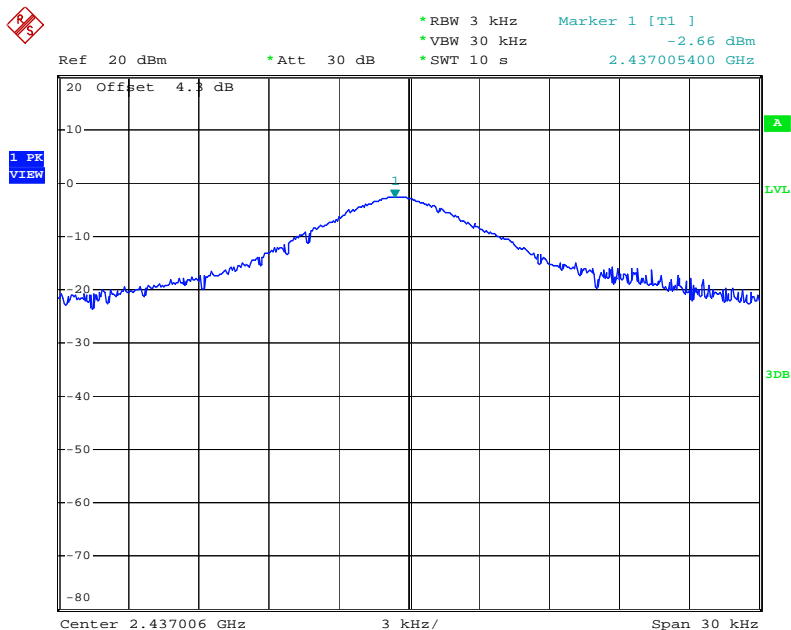


Date: 24.APR.2009 16:25:26

Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 1 + Ant. 2 / 2452 MHz

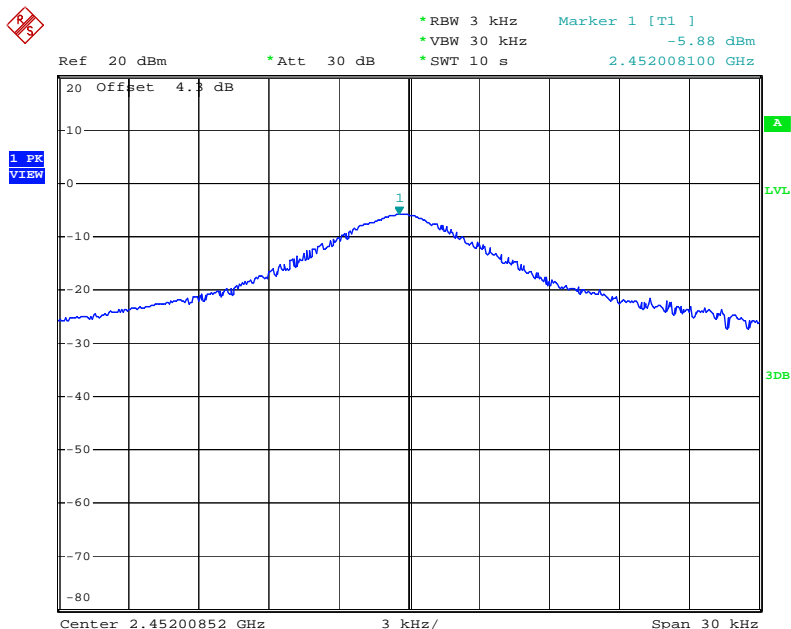


Date: 24.APR.2009 16:28:24

Power Density Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5825 MHz

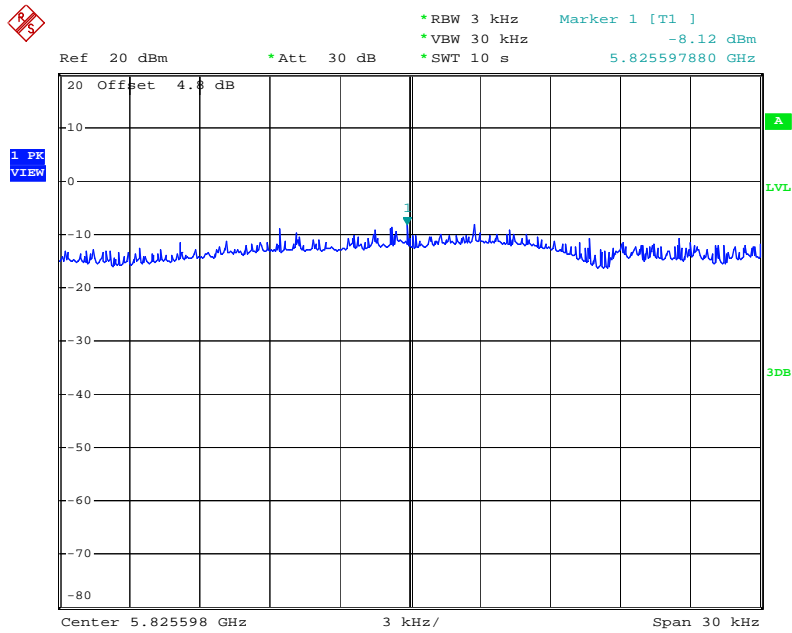


Date: 24.APR.2009 14:44:43

Power Density Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 5755 MHz

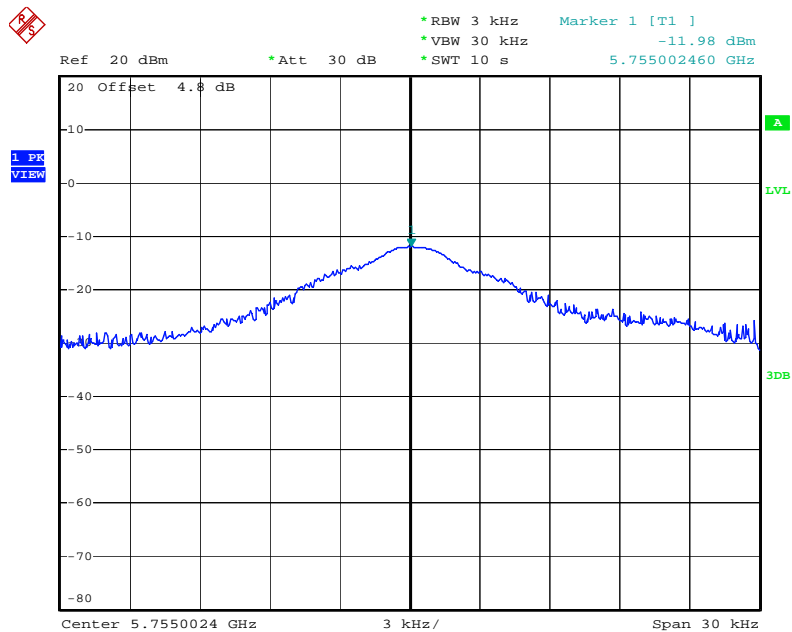


Date: 24.APR.2009 04:24:16

Power Density Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 5795 MHz

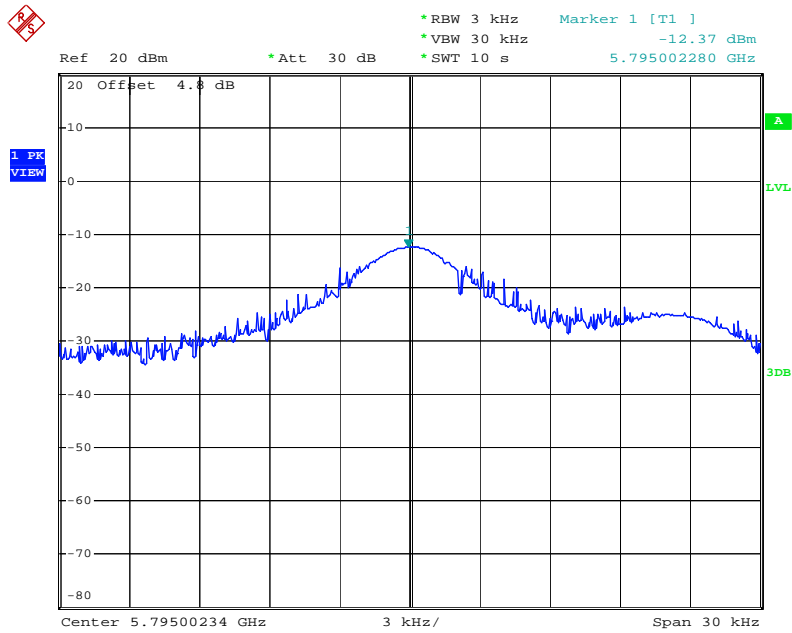


Date: 24.APR.2009 14:59:39

Power Density Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2412 MHz

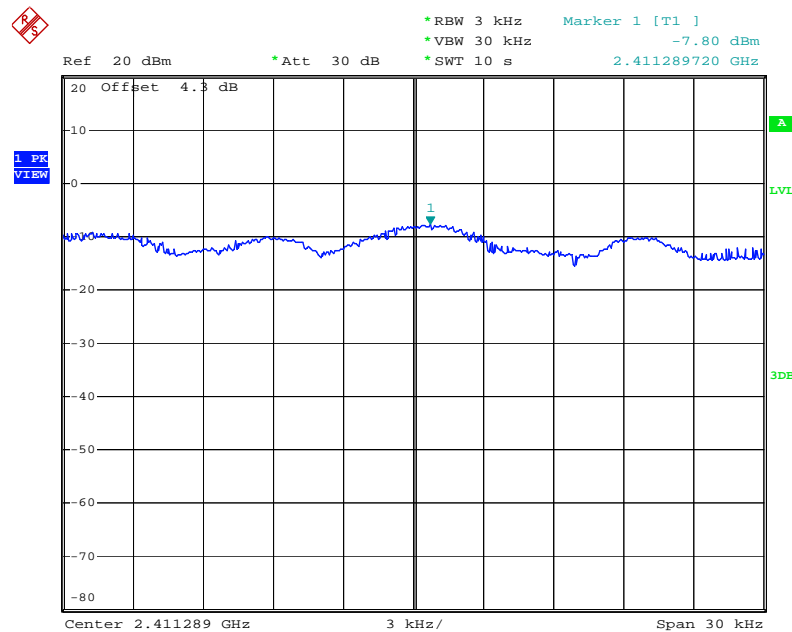


Date: 24.APR.2009 15:28:22

Power Density Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2437 MHz

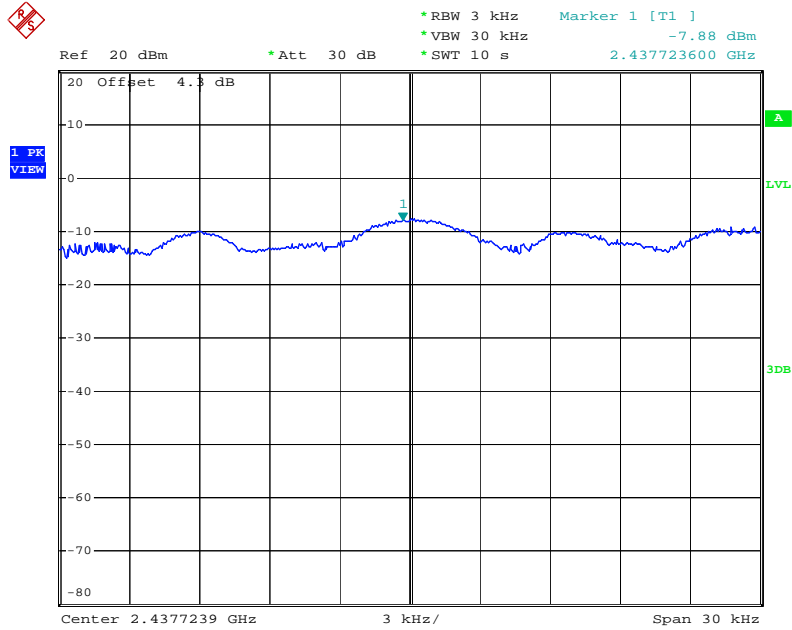


Date: 24.APR.2009 15:33:02

Power Density Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2462 MHz

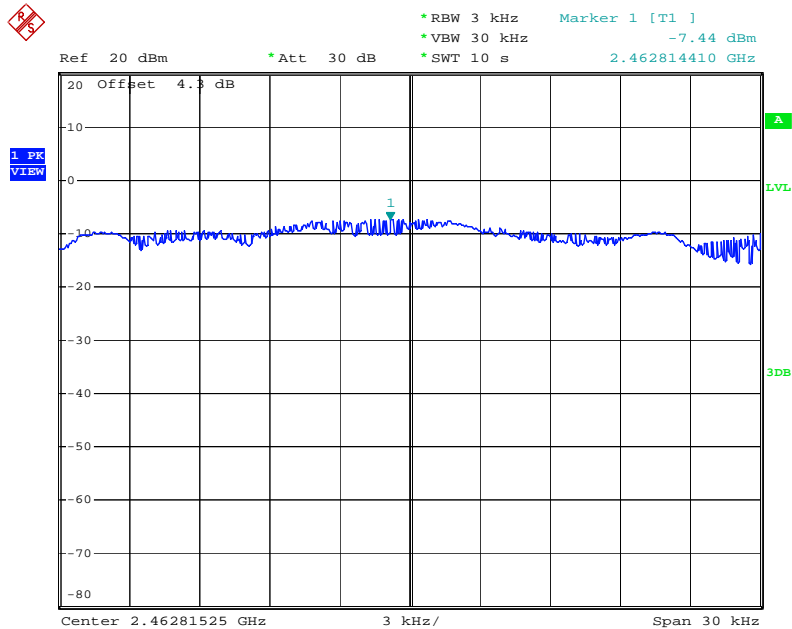


Date: 24.APR.2009 15:35:50

Power Density Plot on Configuration IEEE 802.11g Ant. 1 + Ant. 2 / 2412 MHz

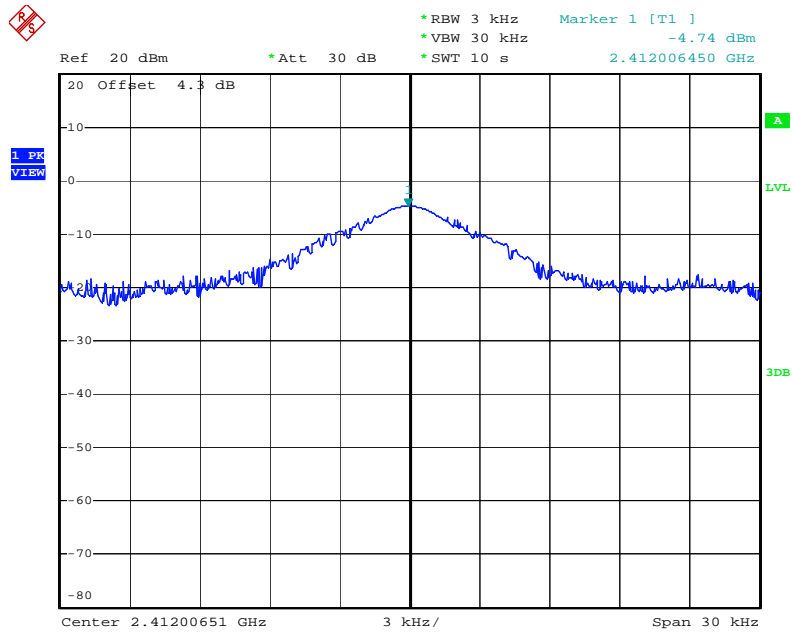


Date: 24.APR.2009 15:54:09

Power Density Plot on Configuration IEEE 802.11g Ant. 1 + Ant. 2 / 2437 MHz

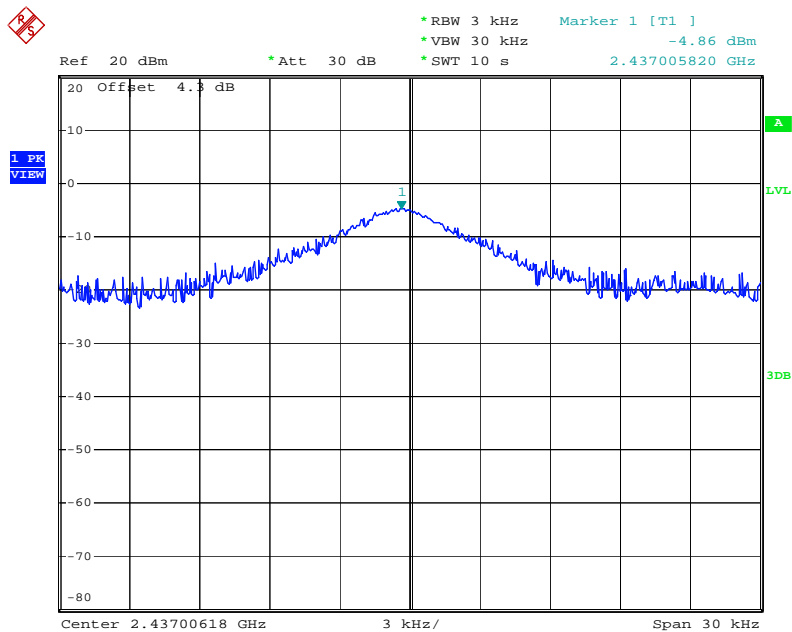


Date: 24.APR.2009 16:07:13

Power Density Plot on Configuration IEEE 802.11g Ant. 1 + Ant. 2 / 2462 MHz

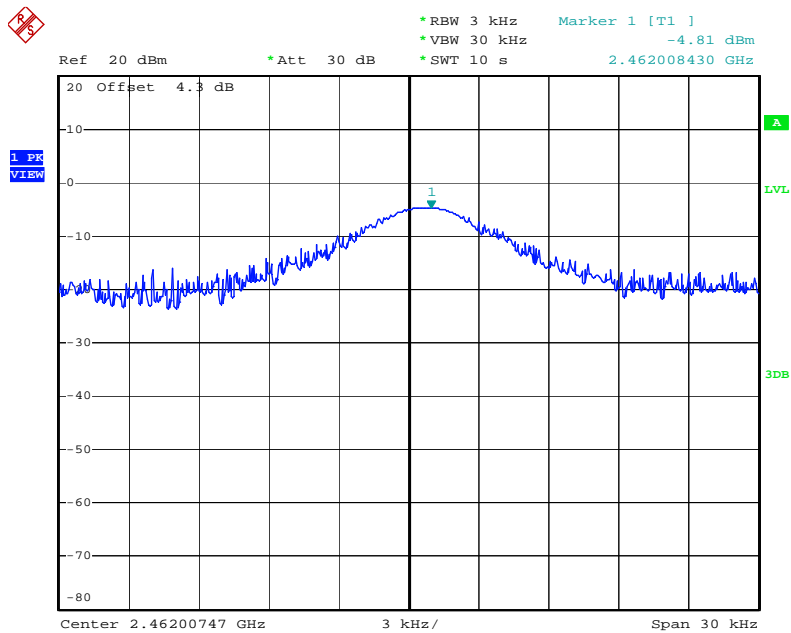


Date: 24.APR.2009 15:48:01

Power Density Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5745 MHz

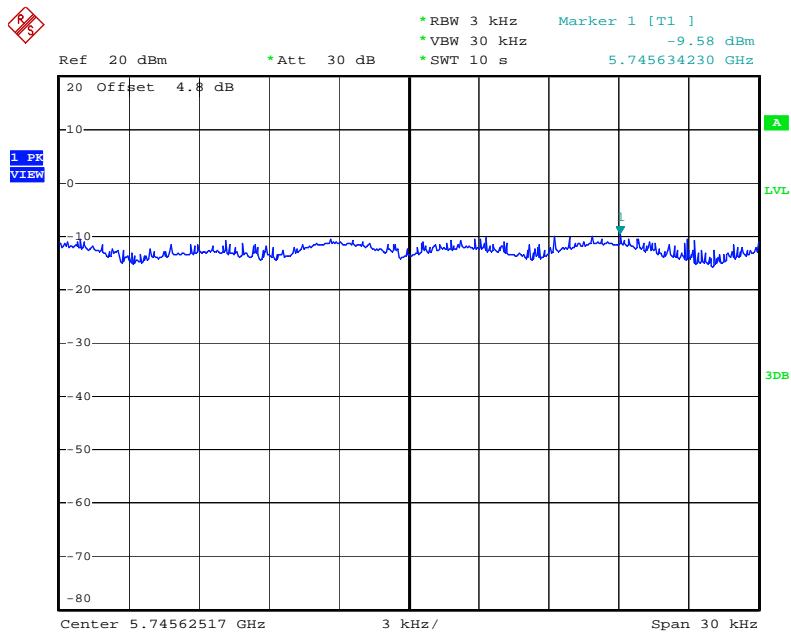


Date: 24.APR.2009 14:10:47

Power Density Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5785 MHz

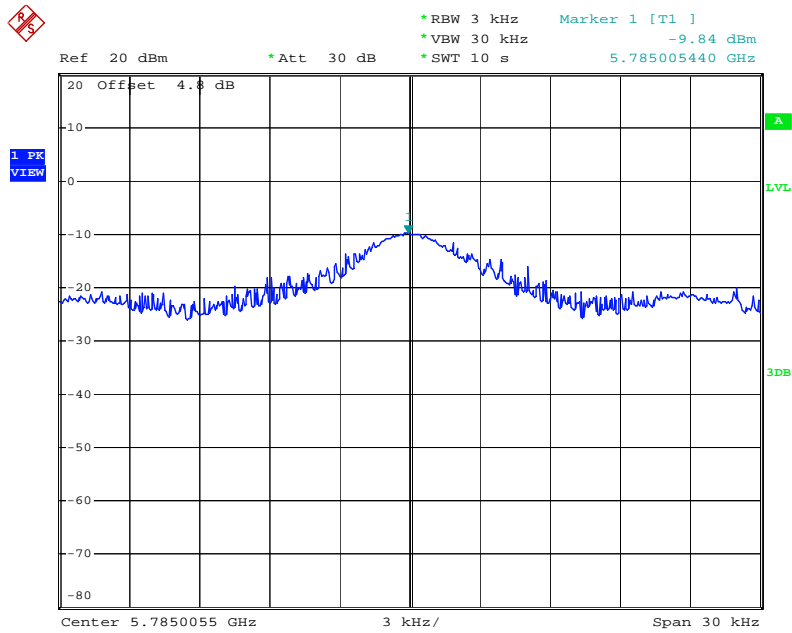

Date: 24.APR.2009 14:25:27

Power Density Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5825 MHz

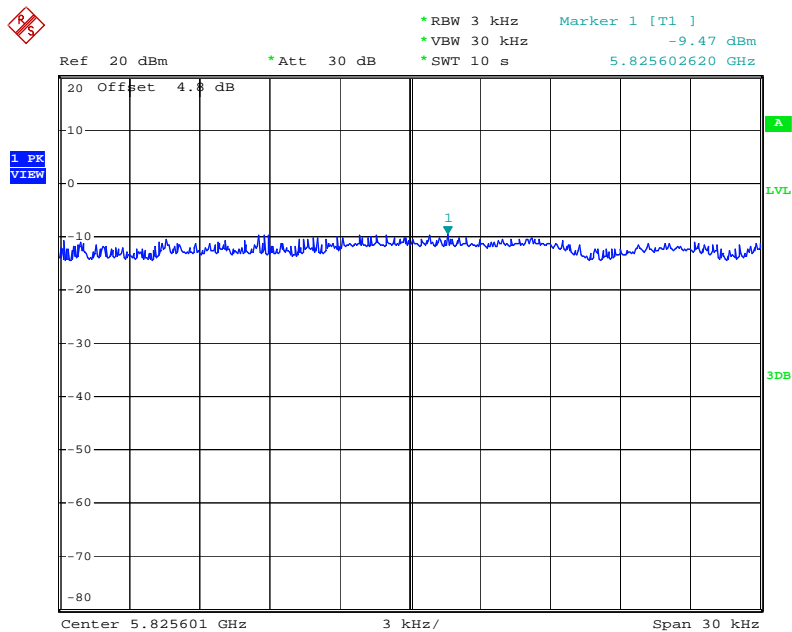

Date: 24.APR.2009 14:20:17

4.4. 6dB Spectrum Bandwidth Measurement

4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

4.4.4. Test Setup Layout

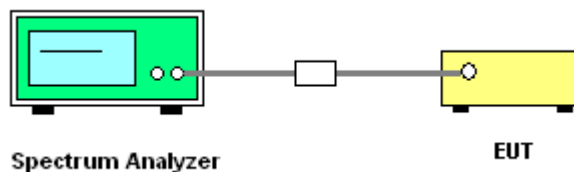

4.4.5. Test Deviation

There is no deviation with the original standard.

4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.4.7. Test Result of 6dB Spectrum Bandwidth

Temperature	23°C	Humidity	56%
Test Engineer	Sam Chen	Configurations	Draft n
Test Date	Mar. 28, 2009 ~ Apr. 24, 2009		

<For 2.4GHz Band>

Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	17.68	500	Complies
6	2437 MHz	17.60	17.68	500	Complies
11	2462 MHz	17.60	17.68	500	Complies

Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.32	36.32	500	Complies
6	2437 MHz	36.40	36.32	500	Complies
9	2452 MHz	36.40	36.32	500	Complies

<For 5GHz Band>

Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.96	17.60	500	Complies
157	5785 MHz	16.80	17.60	500	Complies
165	5825 MHz	16.32	17.56	500	Complies

Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.32	36.16	500	Complies
159	5795 MHz	35.76	36.24	500	Complies

Temperature	23°C	Humidity	56%
Test Engineer	Sam Chen	Configurations	802.11a/b/g
Test Date	Mar. 28, 2009 ~ Apr. 24, 2009		

Configuration IEEE 802.11b Ant. 1+ Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.12	15.20	500	Complies
6	2437 MHz	10.04	15.20	500	Complies
11	2462 MHz	10.12	15.12	500	Complies


Configuration IEEE 802.11g Ant. 1+ Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.44	500	Complies
6	2437 MHz	16.36	16.48	500	Complies
11	2462 MHz	16.04	16.44	500	Complies

Configuration IEEE 802.11a Ant. 1+ Ant. 2


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.96	16.40	500	Complies
157	5785 MHz	16.32	16.40	500	Complies
165	5825 MHz	16.32	16.44	500	Complies

6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 2412 MHz

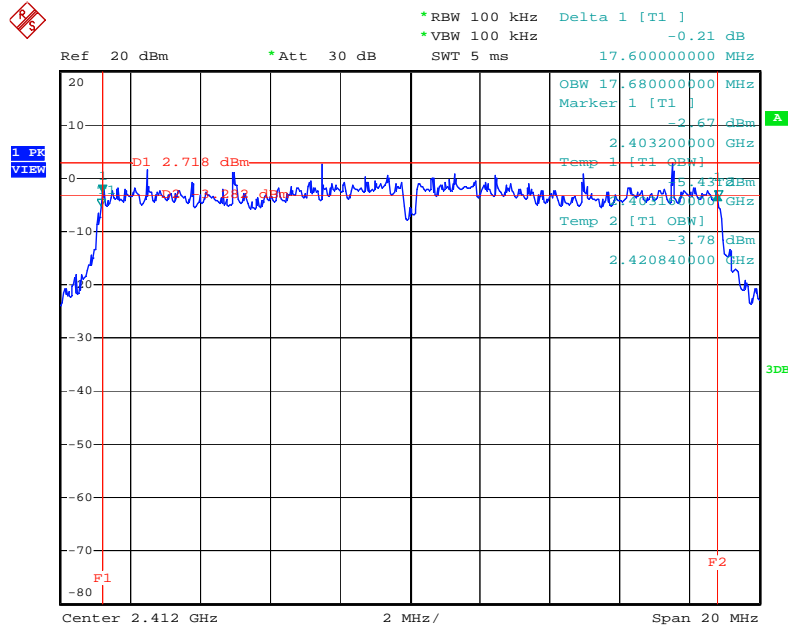


Date: 28.MAR.2009 15:35:10

6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 2437 MHz

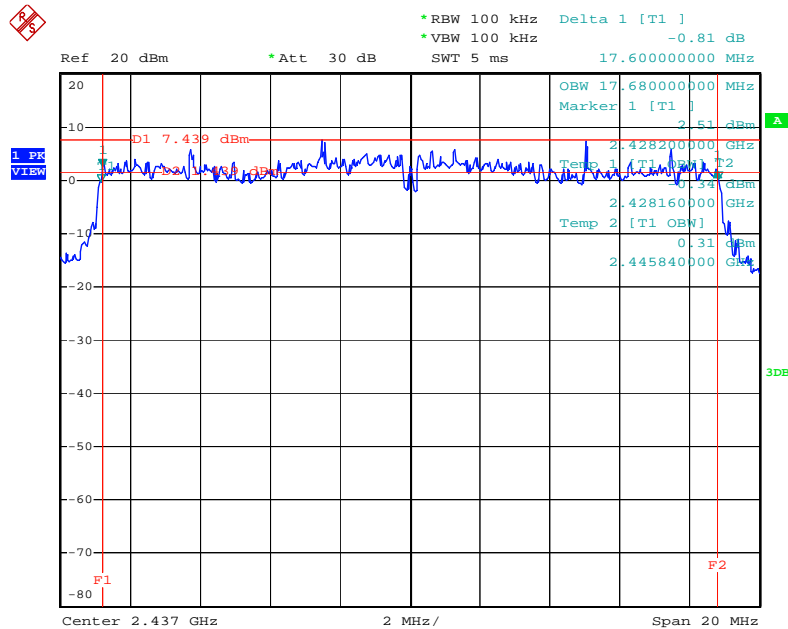


Date: 28.MAR.2009 15:32:48

6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 2462 MHz

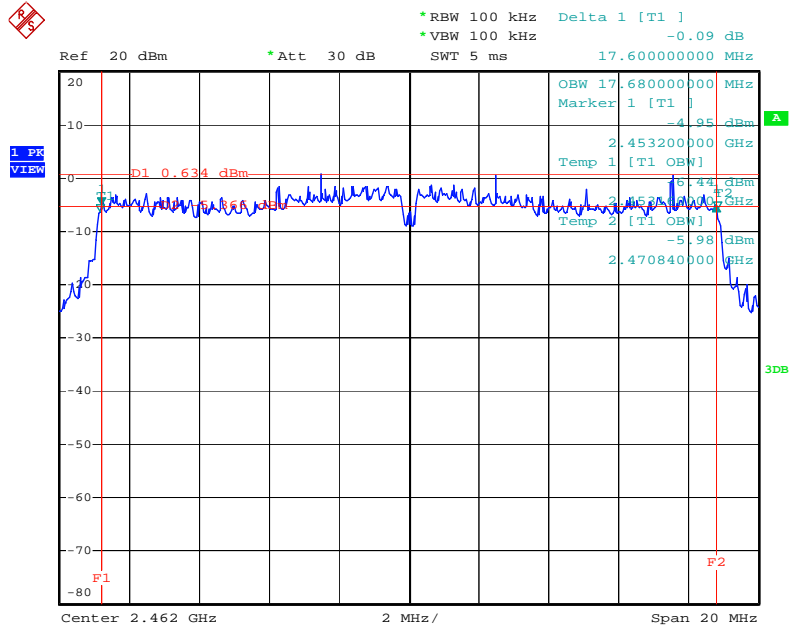


Date: 28.MAR.2009 15:30:15

6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 2422 MHz

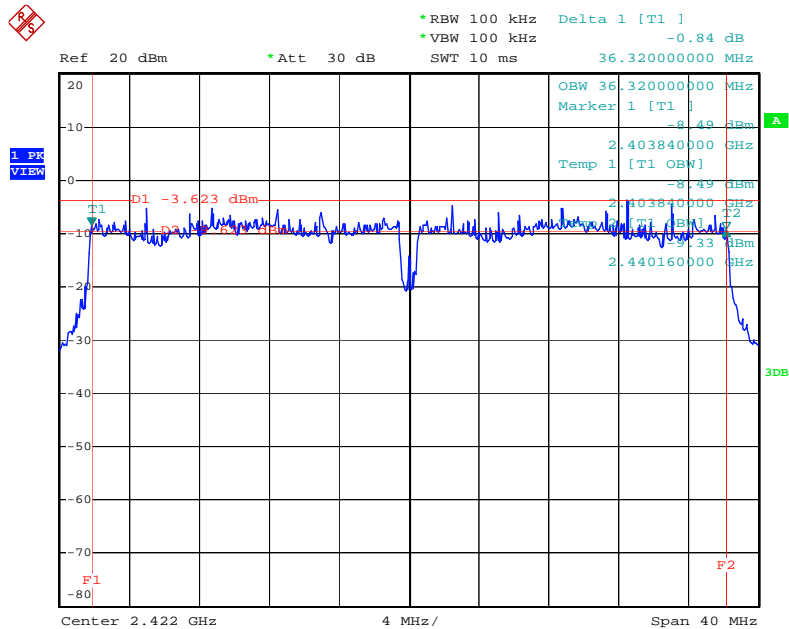


Date: 28.MAR.2009 15:37:44

6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 2437 MHz

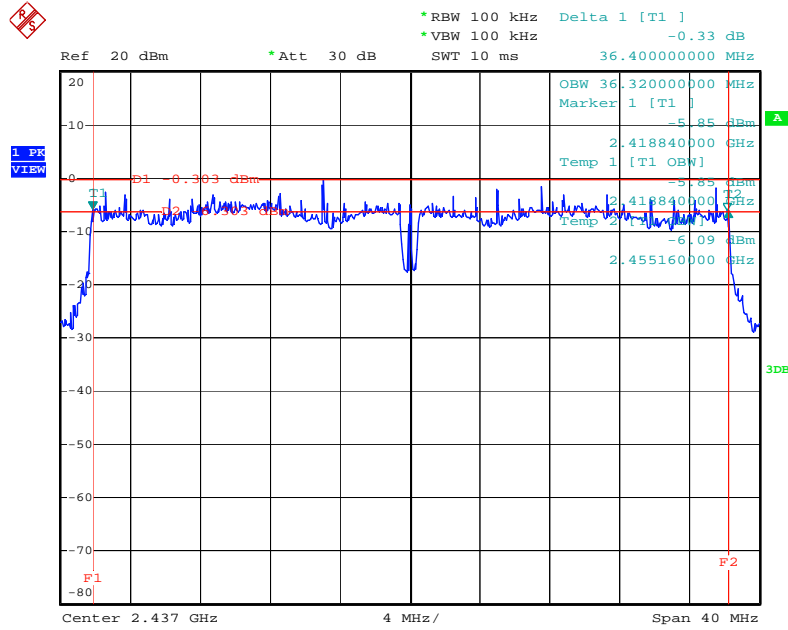


Date: 28.MAR.2009 15:40:05

6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 2452 MHz

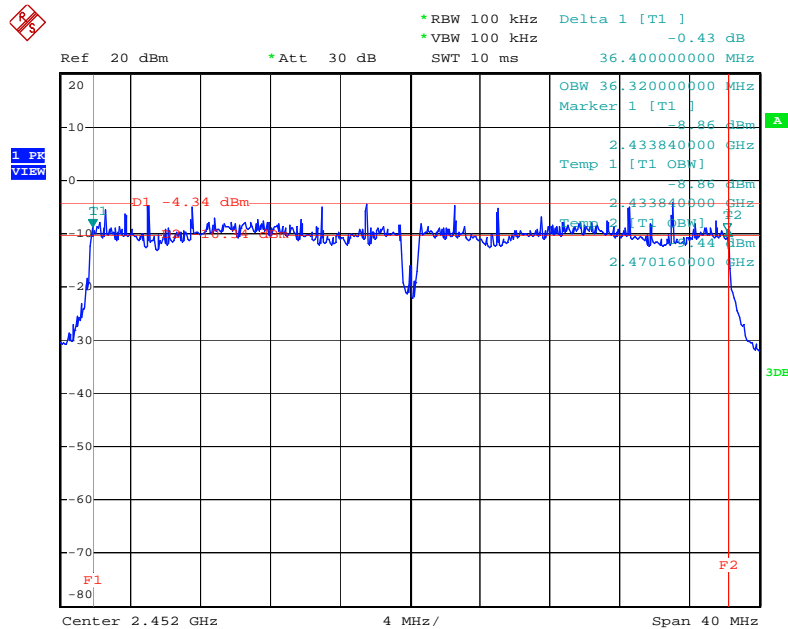


Date: 28.MAR.2009 15:42:15

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5745 MHz

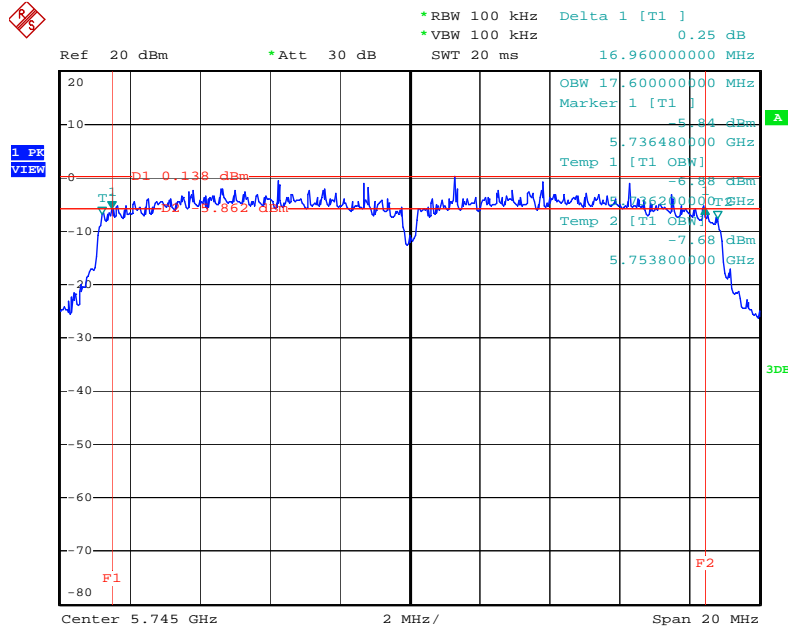


Date: 24.APR.2009 04:33:31

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5785MHz

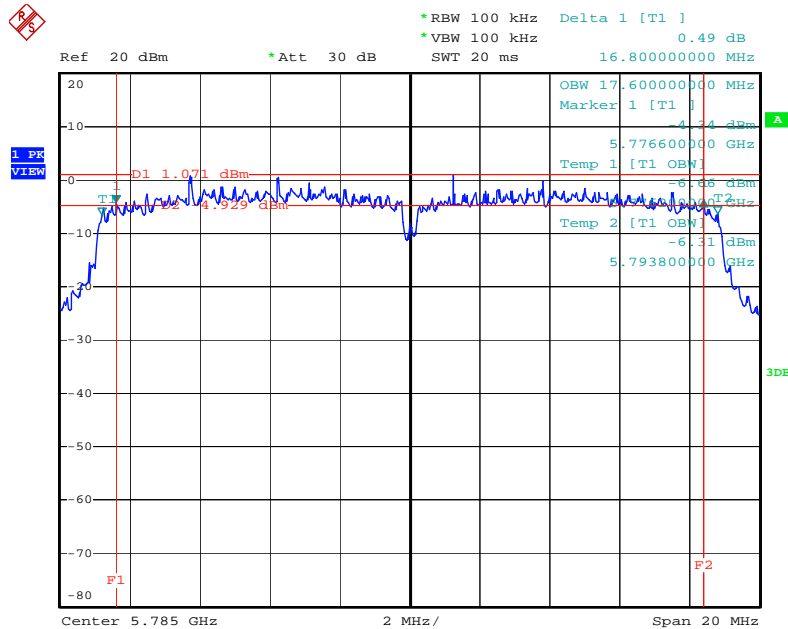


Date: 24.APR.2009 04:30:17

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5825 MHz

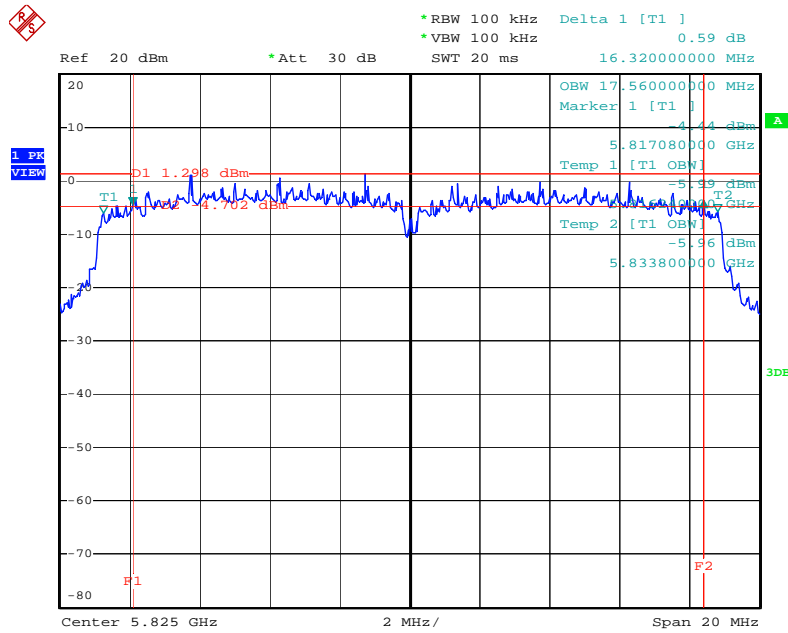


Date: 24.APR.2009 04:28:05

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 5755MHz

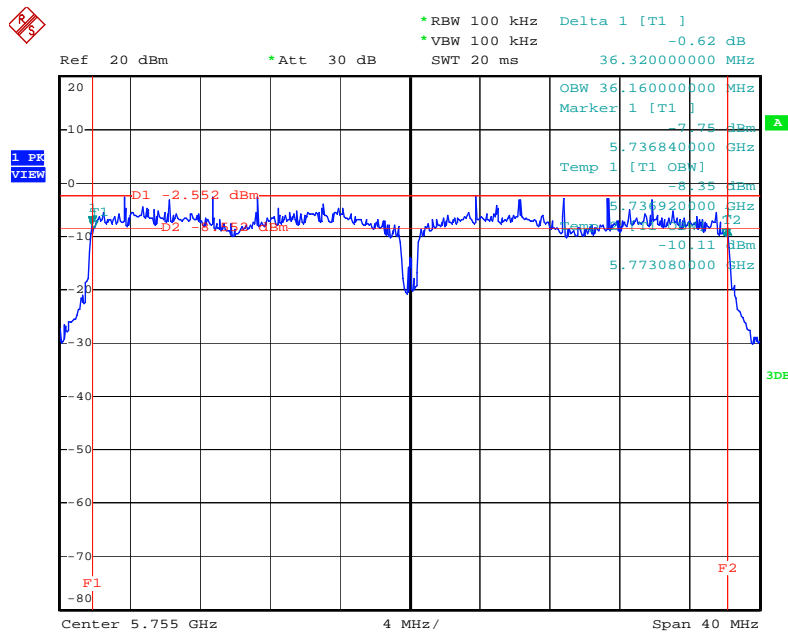


Date: 24.APR.2009 04:22:49

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 5795 MHz

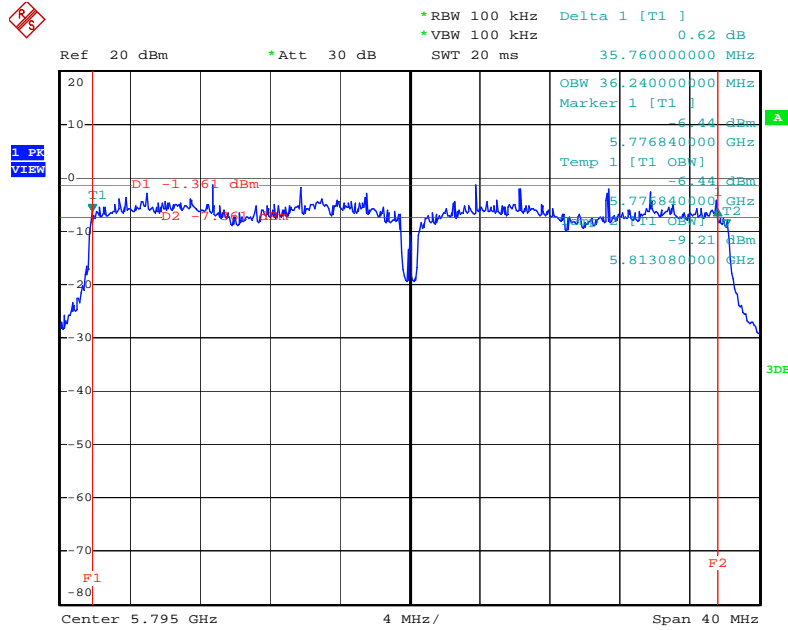


Date: 24.APR.2009 04:25:13

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2412 MHz

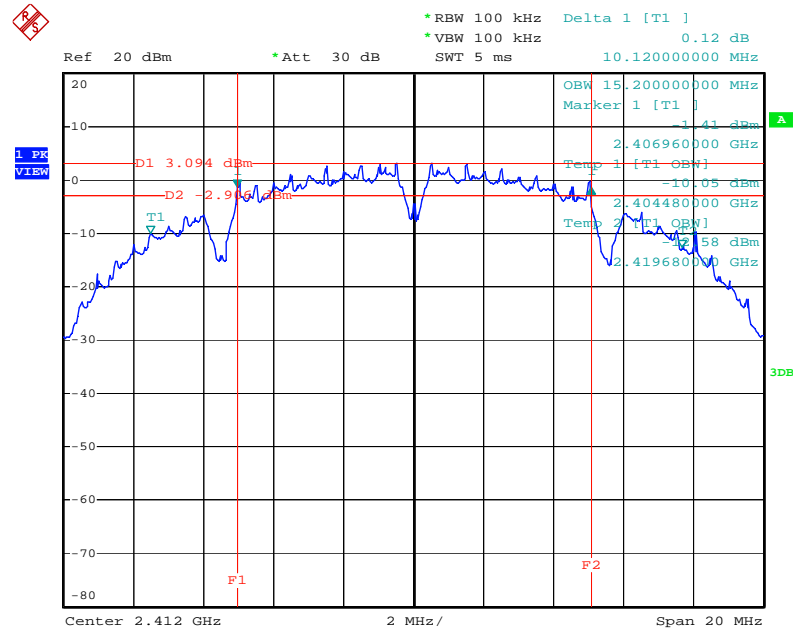


Date: 24.APR.2009 15:36:59

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 1+ Ant. 2 / 2437 MHz

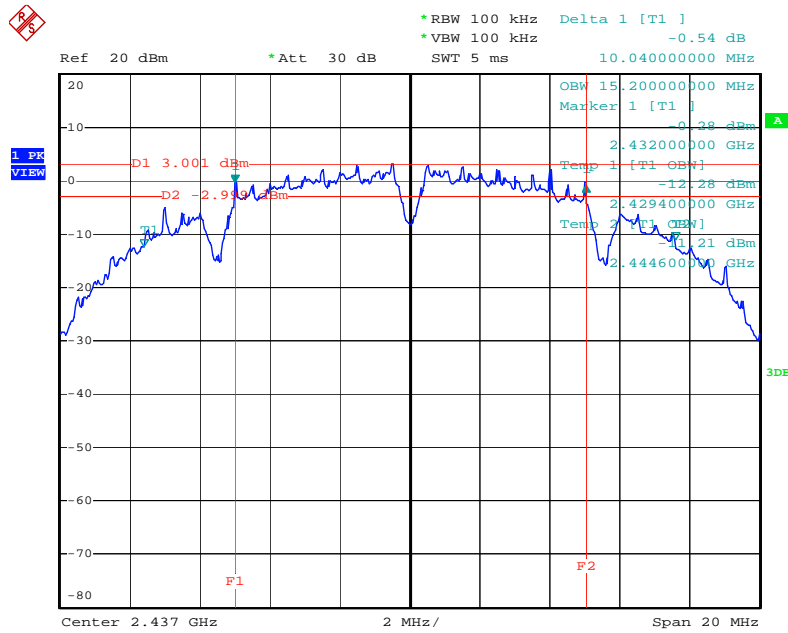


Date: 24.APR.2009 15:29:44

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 1+ Ant. 2 / 2462 MHz

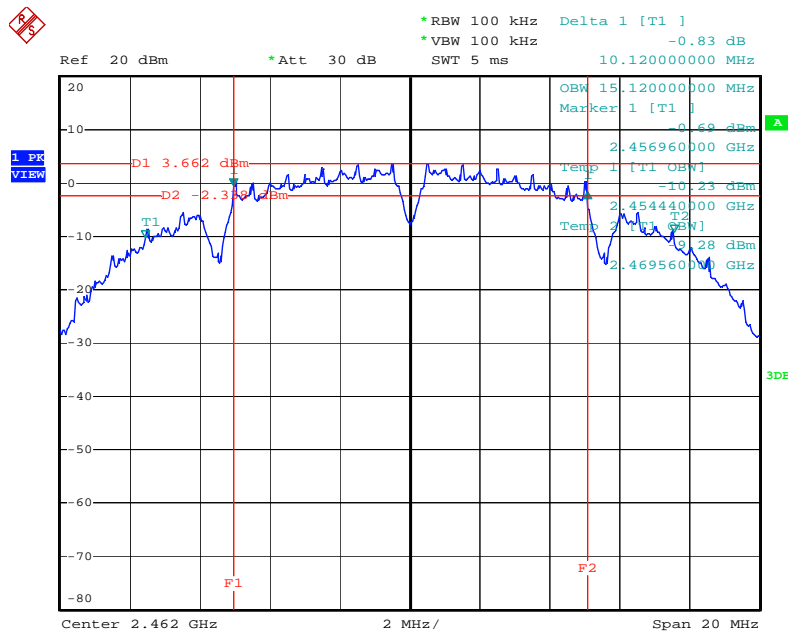


Date: 24.APR.2009 15:33:47

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 1+ Ant. 2 / 2412 MHz

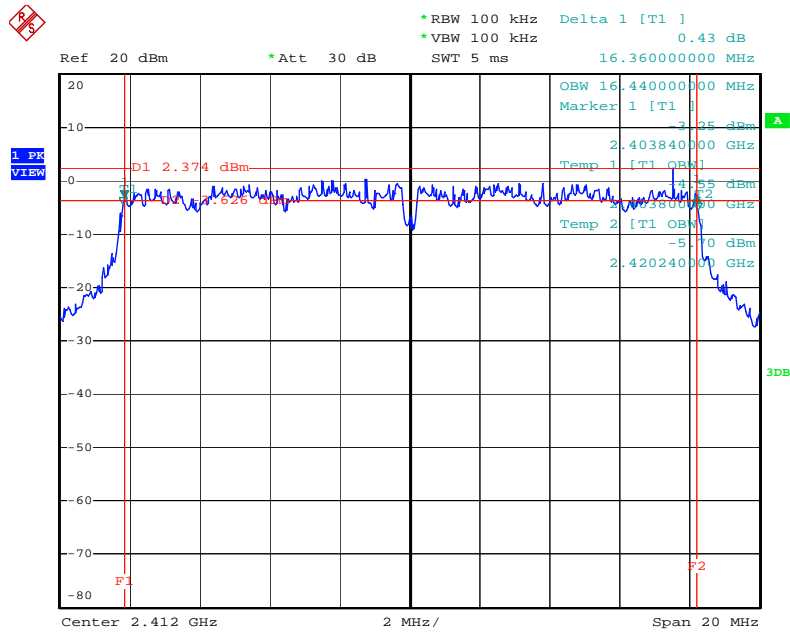


Date: 24.APR.2009 15:52:42

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 1+ Ant. 2 / 2437 MHz

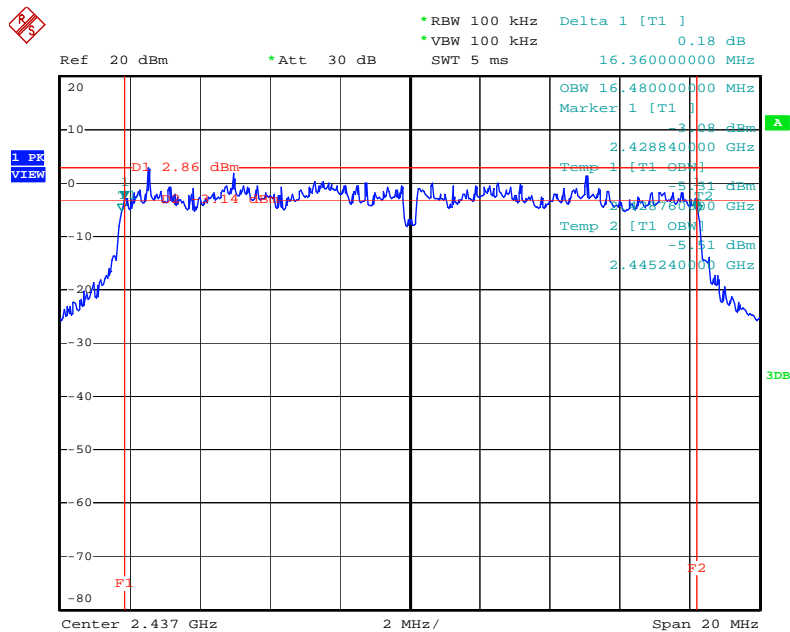


Date: 24.APR.2009 15:49:20

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 1+ Ant. 2 / 2462 MHz

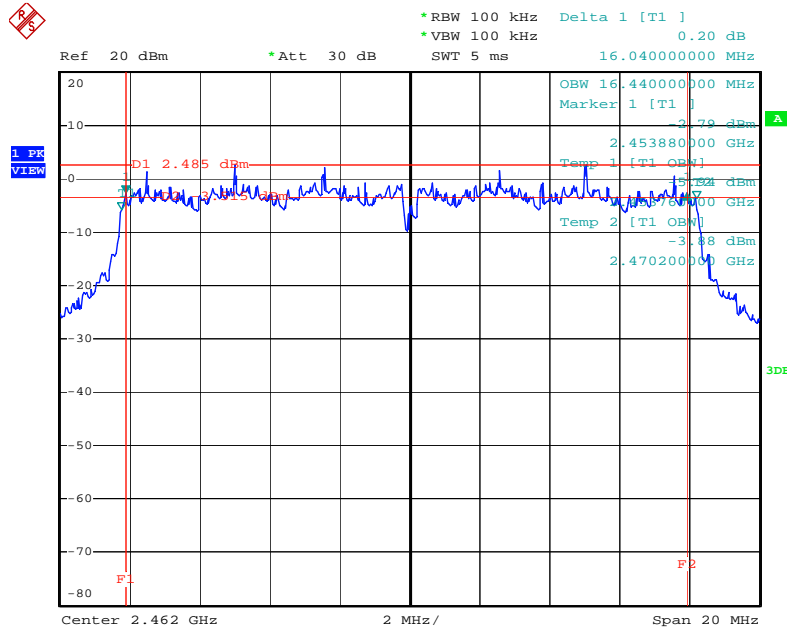


Date: 24.APR.2009 15:46:33

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 1+ Ant. 2 / 5745 MHz

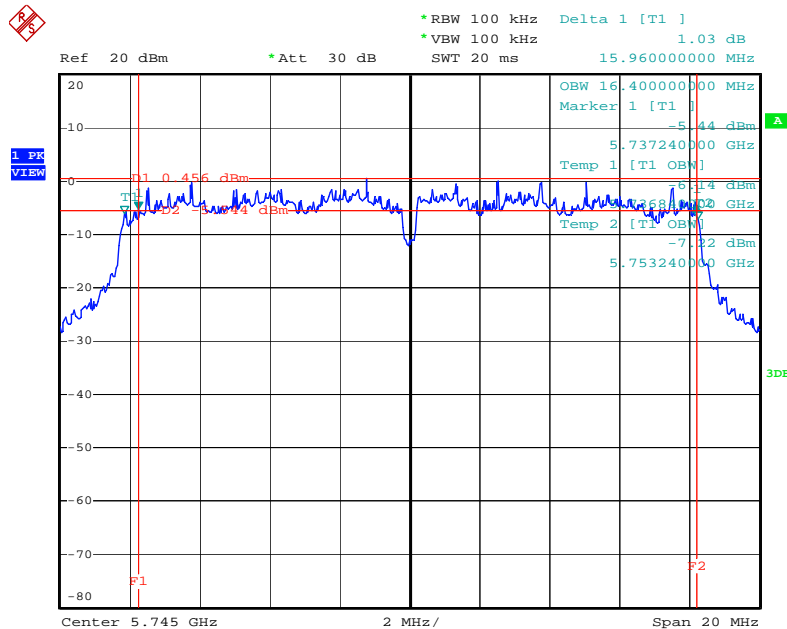


Date: 24.APR.2009 14:09:20

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5785 MHz

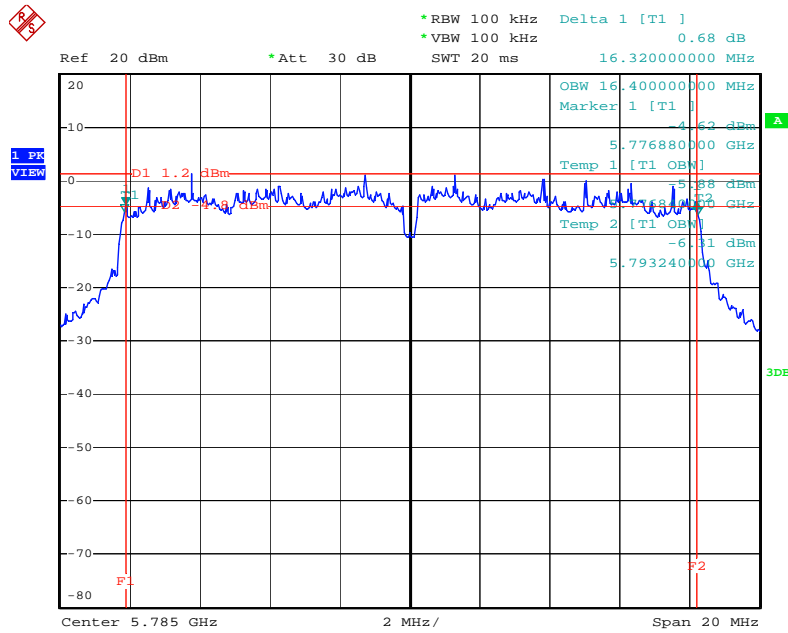

Date: 24.APR.2009 14:04:35

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5825 MHz

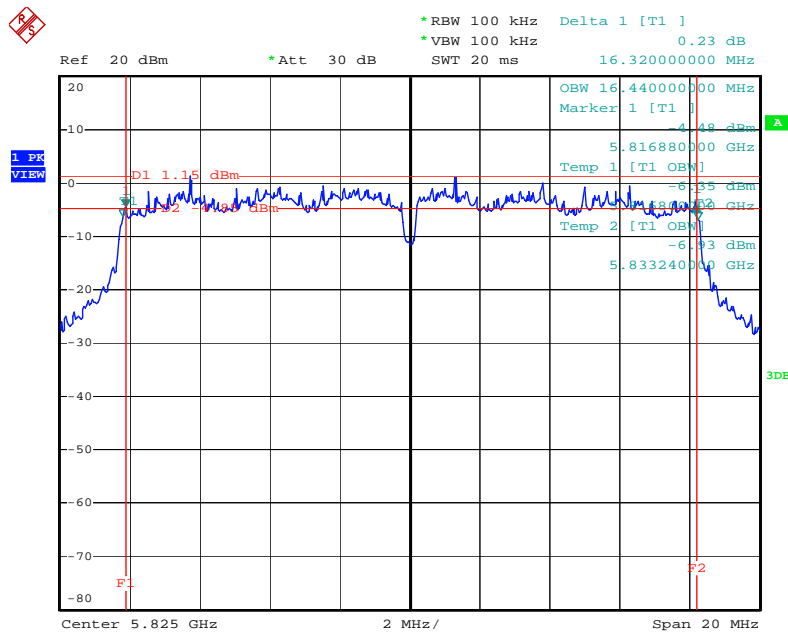

Date: 24.APR.2009 14:11:36

4.5. Radiated Emissions Measurement

4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

4.5.4. Test Setup Layout

For radiated emissions below 30MHz

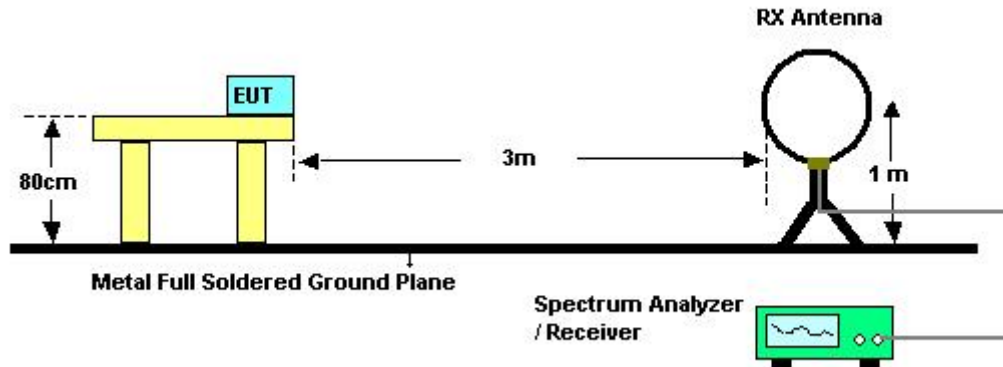

For radiated emissions above 30MHz

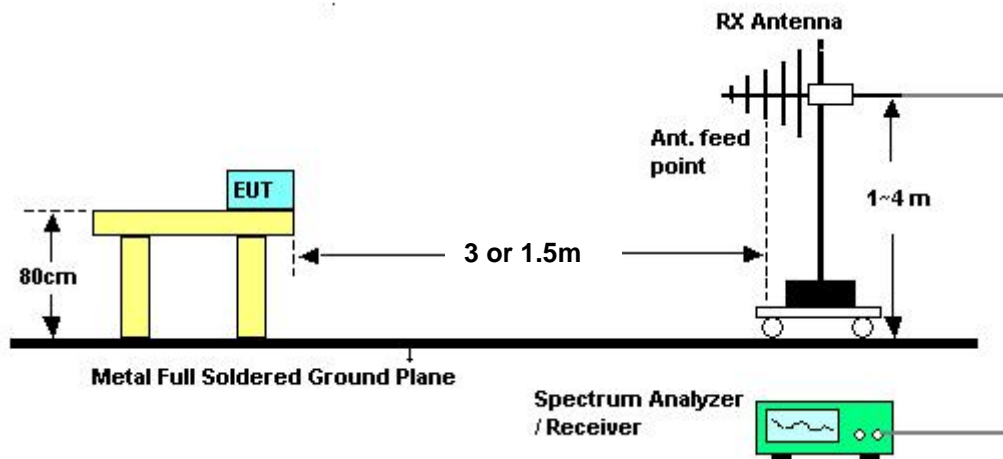

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

4.5.5. Test Deviation

There is no deviation with the original standard.

4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.5.7. Results of Radiated Emissions (9kHz~30MHz)

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Test Date	Mar. 30, 2009

Freq. (MHz)	Level (dBuV)	Over Limit (dB)	Limit Line (dBuV)	Remark
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log(\text{specific distance} / \text{test distance})$ (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Normal Link / Mode 2

Horizontal

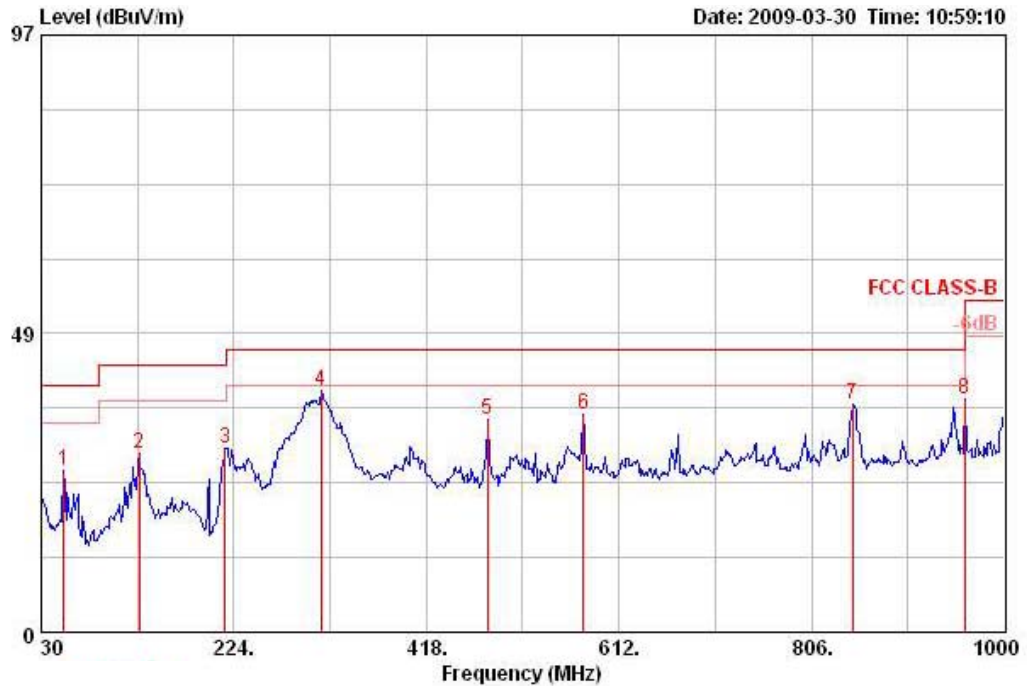

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	52.310	26.34	-13.66	40.00	45.22	8.18	27.79	0.74	Peak	HORIZONTAL	0	100
2	128.940	28.91	-14.59	43.50	42.82	12.25	27.45	1.29	Peak	HORIZONTAL	0	100
3	215.270	29.97	-13.53	43.50	45.09	10.19	27.07	1.76	Peak	HORIZONTAL	0	100
4	312.270	39.15	-6.85	46.00	50.30	13.70	26.98	2.13	Peak	HORIZONTAL	233	100
5	479.110	34.64	-11.36	46.00	42.68	17.30	27.99	2.66	Peak	HORIZONTAL	0	100
6	576.110	35.25	-10.75	46.00	42.00	18.49	28.10	2.85	Peak	HORIZONTAL	0	100
7	847.710	36.95	-9.05	46.00	40.93	20.13	27.51	3.40	Peak	HORIZONTAL	0	100
8	960.230	37.92	-16.08	54.00	40.47	20.99	27.16	3.62	Peak	HORIZONTAL	0	100

Vertical

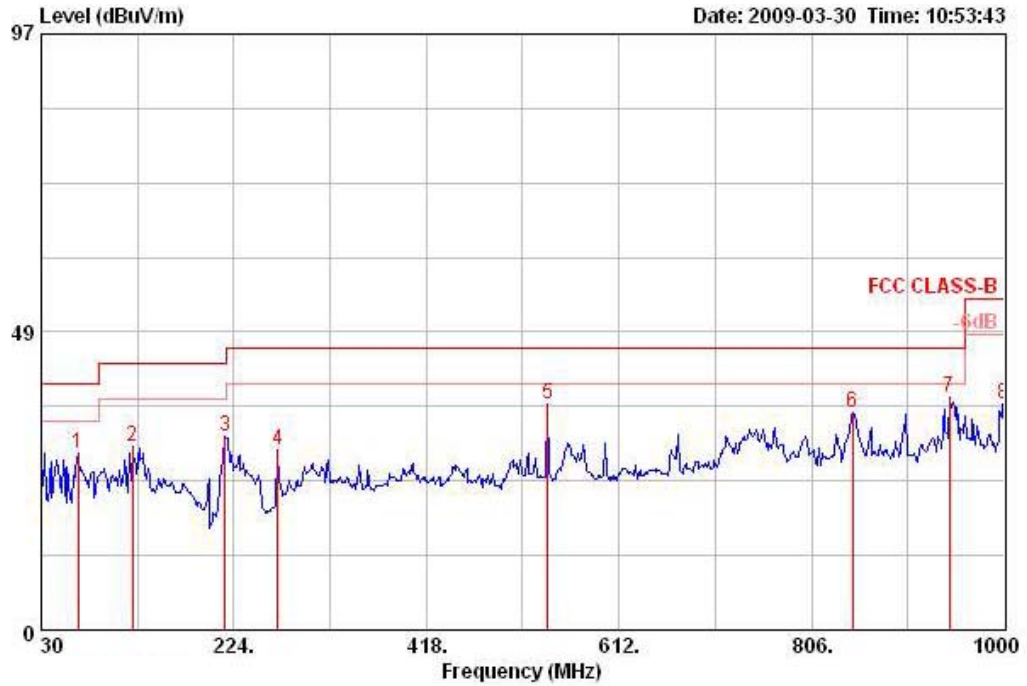

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	66.860	28.87	-11.13	40.00	49.06	6.68	27.73	0.86	Peak	VERTICAL	0	400
2	122.150	29.83	-13.67	43.50	43.70	12.40	27.49	1.22	Peak	VERTICAL	0	400
3	215.270	31.44	-12.06	43.50	46.56	10.19	27.07	1.76	Peak	VERTICAL	0	400
4	268.620	29.20	-16.80	46.00	41.20	12.99	26.96	1.97	Peak	VERTICAL	0	400
5	540.220	36.66	-9.34	46.00	43.90	18.08	28.10	2.78	Peak	VERTICAL	0	400
6	847.710	35.30	-10.70	46.00	39.28	20.13	27.51	3.40	Peak	VERTICAL	0	400
7	944.710	37.84	-8.16	46.00	40.59	20.87	27.22	3.60	Peak	VERTICAL	121	100
8	1000.000	36.68	-17.32	54.00	38.69	21.29	27.00	3.70	Peak	VERTICAL	0	400

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10th Harmonic)


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS0 20MHz Ch 1 / Ant. 1+ Ant. 2

Horizontal

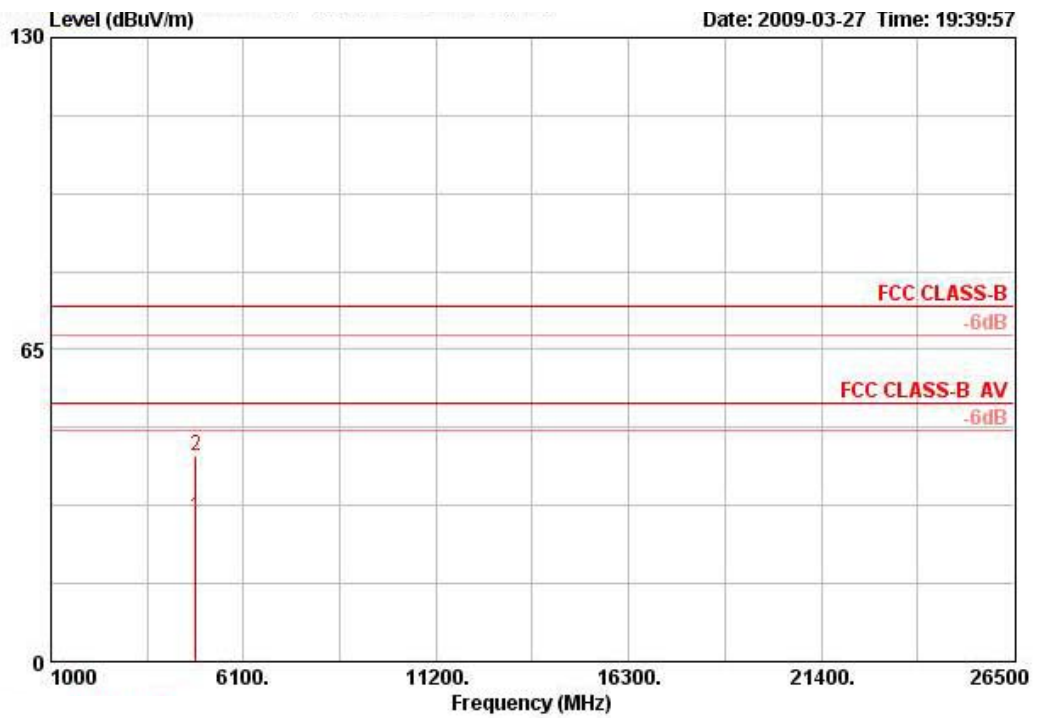

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Table Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4823.950	30.13	-23.87	54.00	29.59	32.46	3.34	35.26	AVERAGE	100	360	HORIZONTAL
2 @	4825.690	42.95	-31.05	74.00	42.41	32.46	3.34	35.26	PEAK	100	360	HORIZONTAL


Vertical

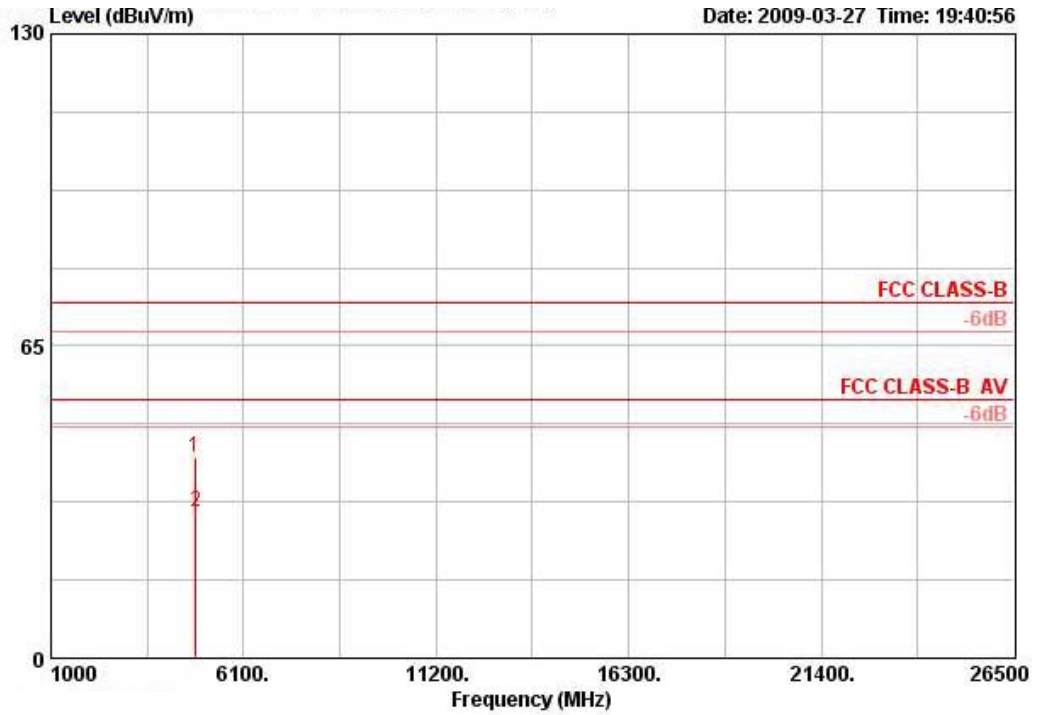

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4821.970	41.65	-32.35	74.00	41.11	32.46	3.34	35.26	PEAK	100	0	VERTICAL
2 @	4823.420	30.32	-23.68	54.00	29.78	32.46	3.34	35.26	AVERAGE	100	0	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS0 20MHz Ch 6 / Ant. 1 + Ant. 2

Horizontal

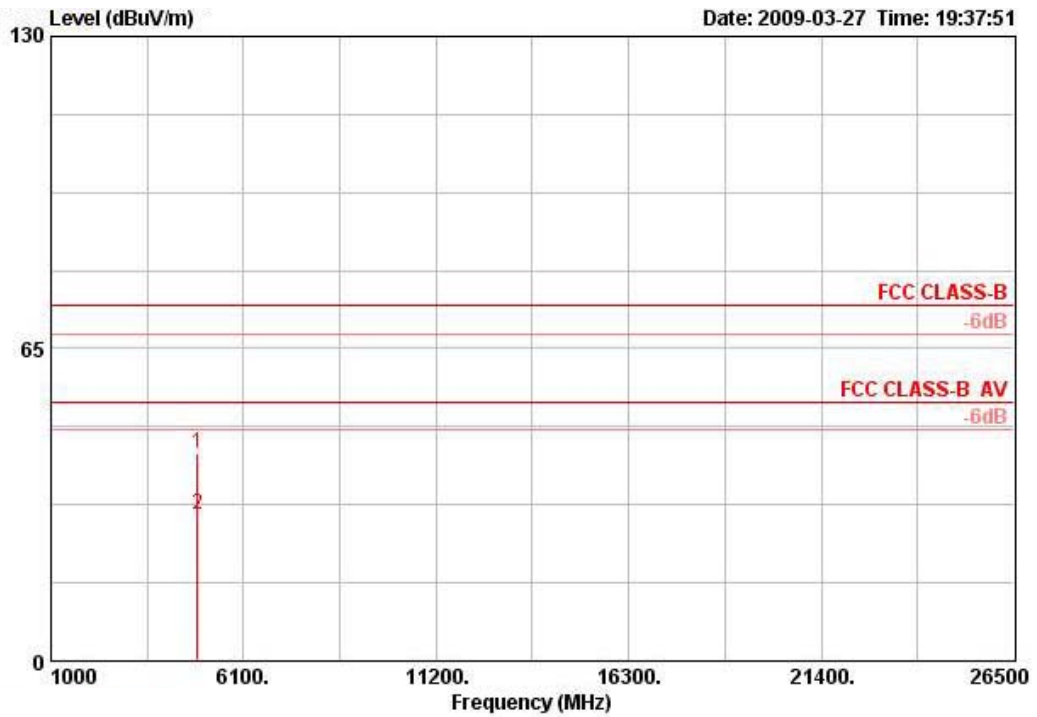

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4874.030	43.12	-30.88	74.00	42.34	32.56	3.36	35.15	PEAK	100	0	HORIZONTAL
2 @	4876.500	30.34	-23.66	54.00	29.56	32.56	3.36	35.15	AVERAGE	100	0	HORIZONTAL


Vertical

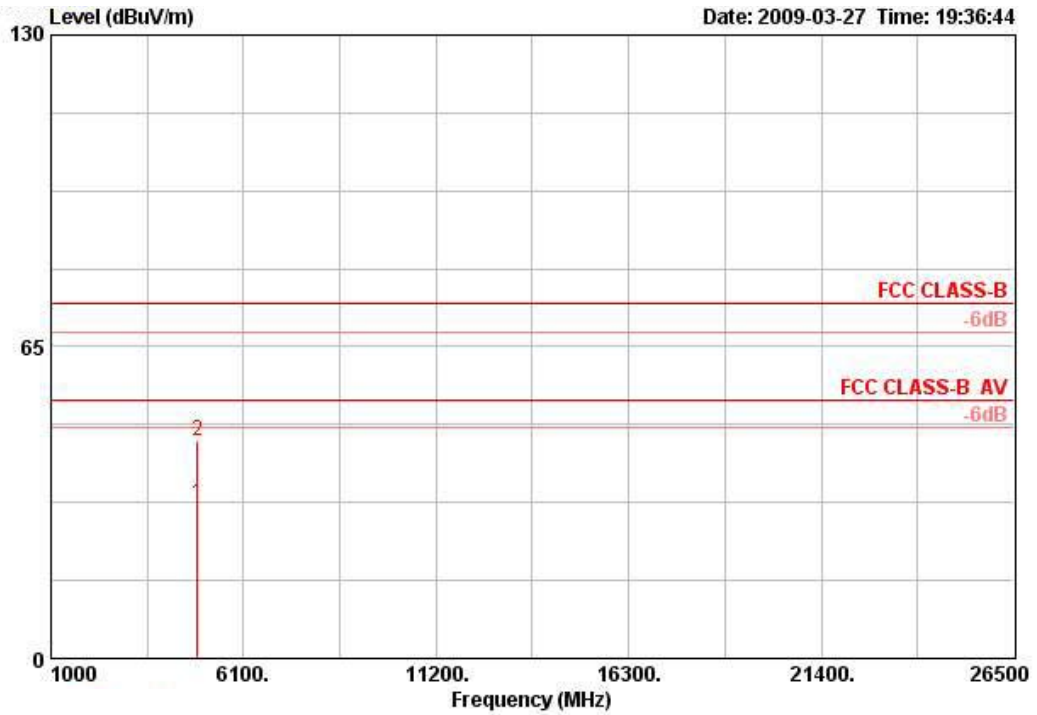

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4872.820	32.32	-21.68	54.00	31.54	32.56	3.36	35.15	AVERAGE	100	360	VERTICAL
2 @	4873.910	45.43	-28.57	74.00	44.66	32.56	3.36	35.15	PEAK	100	360	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS0 20MHz Ch11 / Ant. 1 + Ant. 2

Horizontal

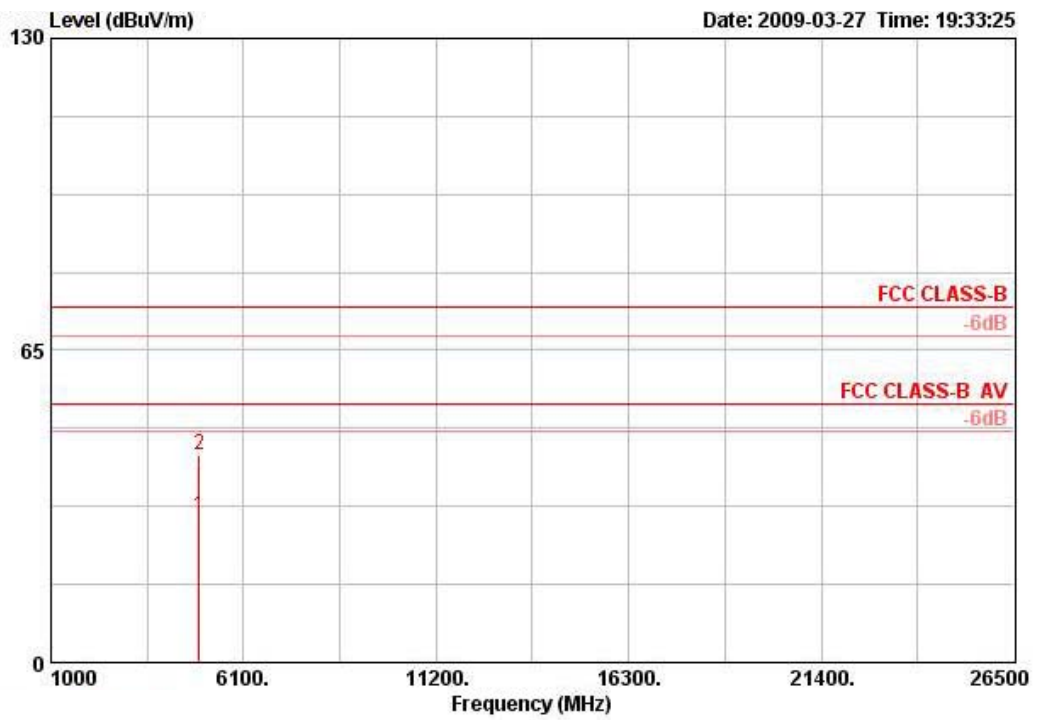

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg	
1 @	4921.940	30.63	-23.37	54.00	29.62	32.66	3.38	35.03	AVERAGE	100	360	HORIZONTAL
2 @	4924.740	43.34	-30.66	74.00	42.32	32.66	3.38	35.03	PEAK	100	360	HORIZONTAL


Vertical

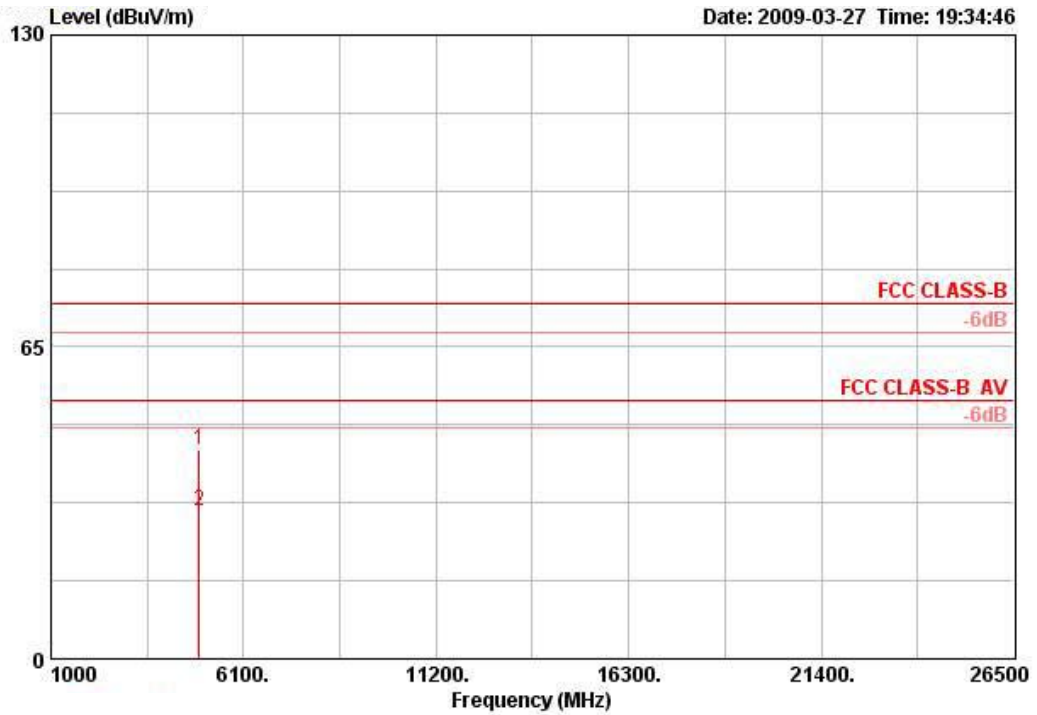

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4923.370	43.48	-30.52	74.00	42.47	32.66	3.38	35.03	PEAK	100	0	VERTICAL
2 @	4926.100	30.92	-23.08	54.00	29.91	32.66	3.38	35.03	AVERAGE	100	0	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS0 40MHz Ch 3 / Ant. 1 + Ant. 2

Horizontal

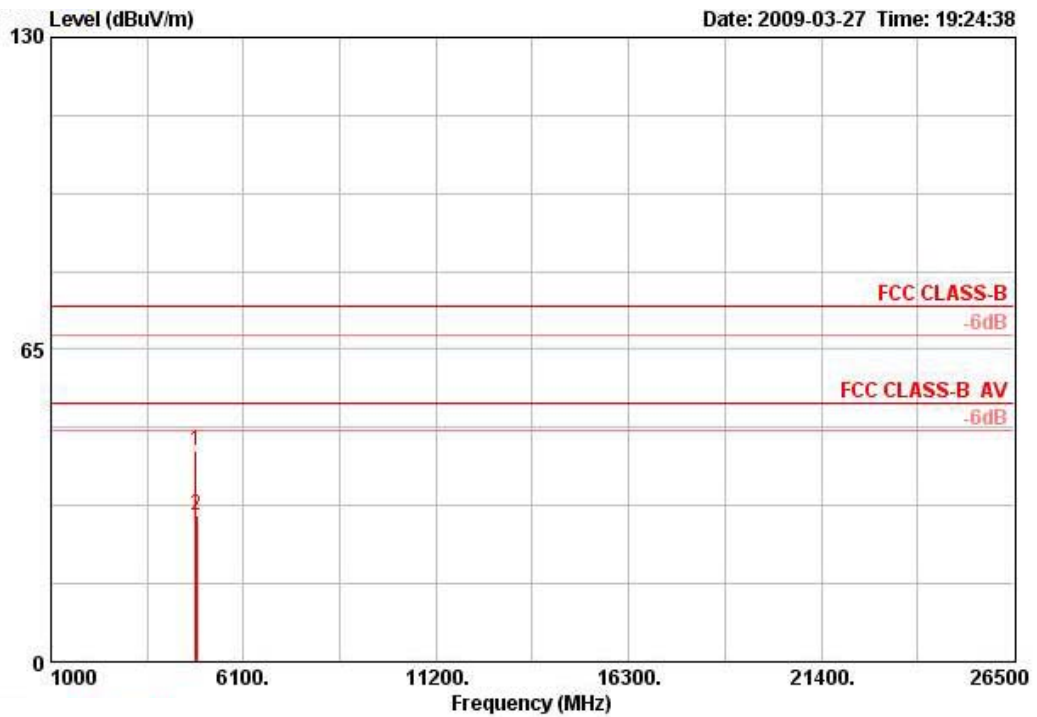

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg	
1 @	4844.230	43.78	-30.22	74.00	43.14	32.49	3.35	35.20	PEAK	100	0	HORIZONTAL
2 @	4846.420	30.31	-23.69	54.00	29.67	32.49	3.35	35.20	AVERAGE	100	0	HORIZONTAL


Vertical

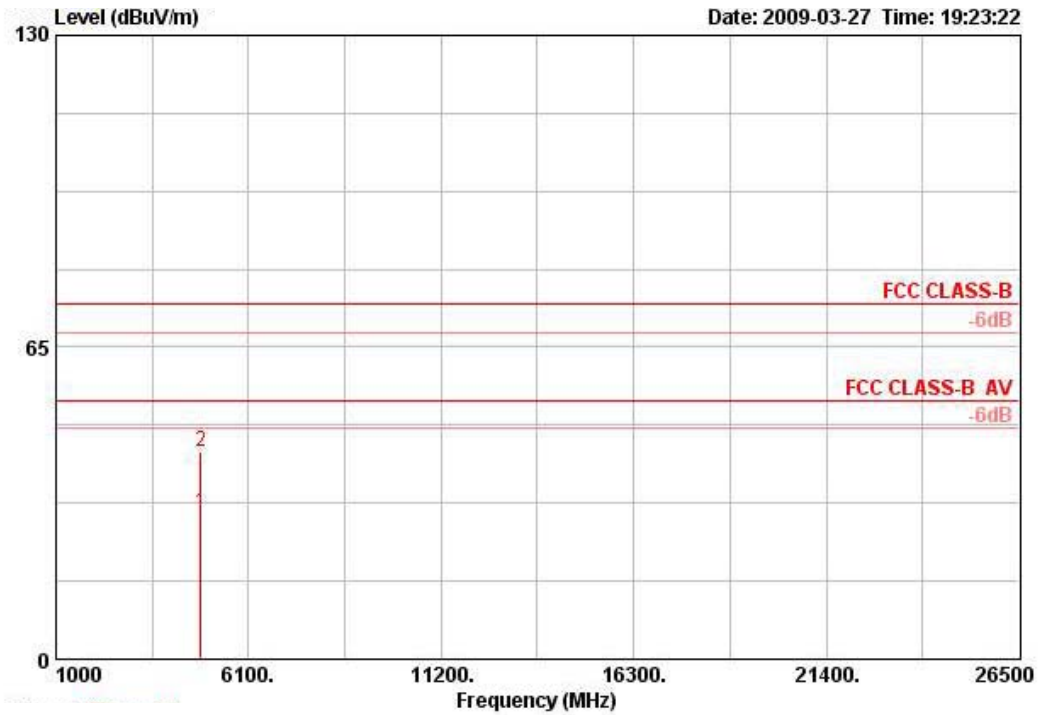

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4844.280	30.33	-23.67	54.00	29.69	32.49	3.35	35.20	AVERAGE	142	360	VERTICAL
2 @	4844.780	43.11	-30.89	74.00	42.47	32.49	3.35	35.20	PEAK	142	360	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS0 40MHz Ch 6 / Ant. 1 + Ant. 2

Horizontal

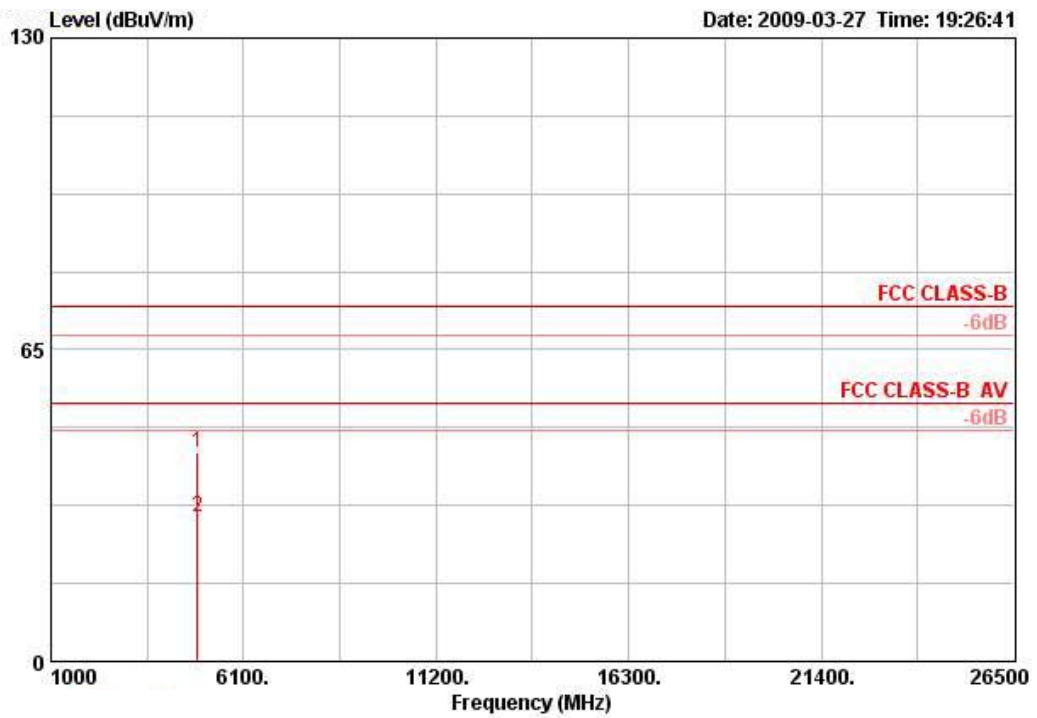

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4874.150	43.51	-30.49	74.00	42.74	32.56	3.36	35.15	PEAK	100	360	HORIZONTAL
2 @	4876.140	30.20	-23.80	54.00	29.42	32.56	3.36	35.15	AVERAGE	100	360	HORIZONTAL


Vertical

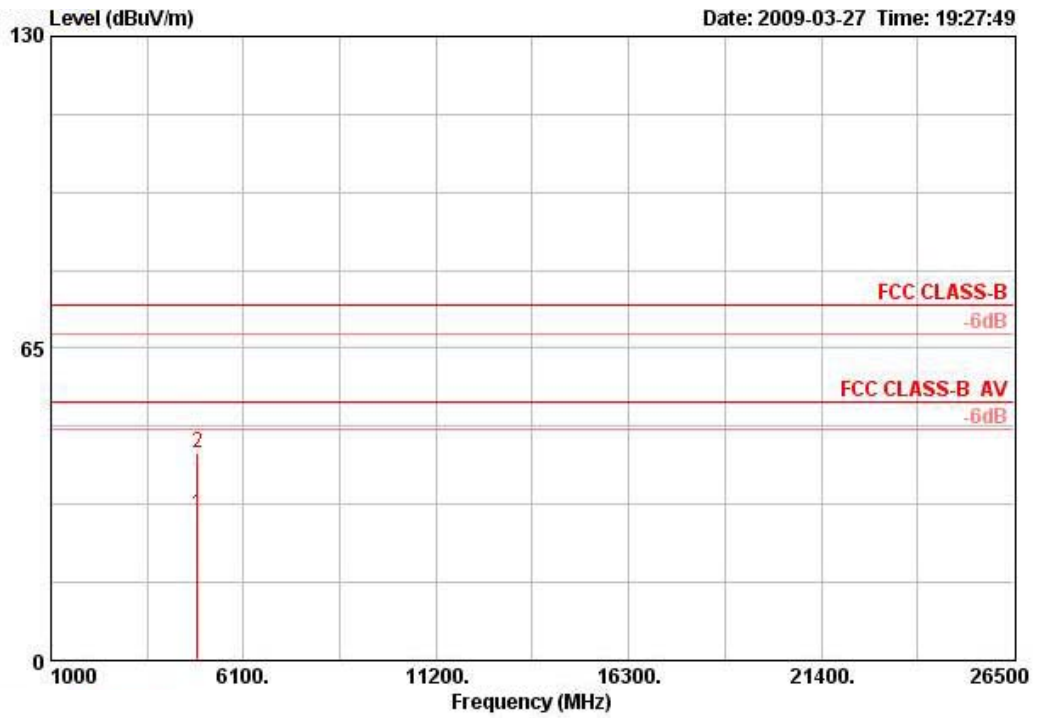

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4873.500	30.46	-23.54	54.00	29.68	32.56	3.36	35.15	AVERAGE	3905	0	VERTICAL
2 @	4873.630	43.18	-30.82	74.00	42.41	32.56	3.36	35.15	PEAK	100	0	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS0 40MHz Ch 9 / Ant. 1 + Ant. 2

Horizontal

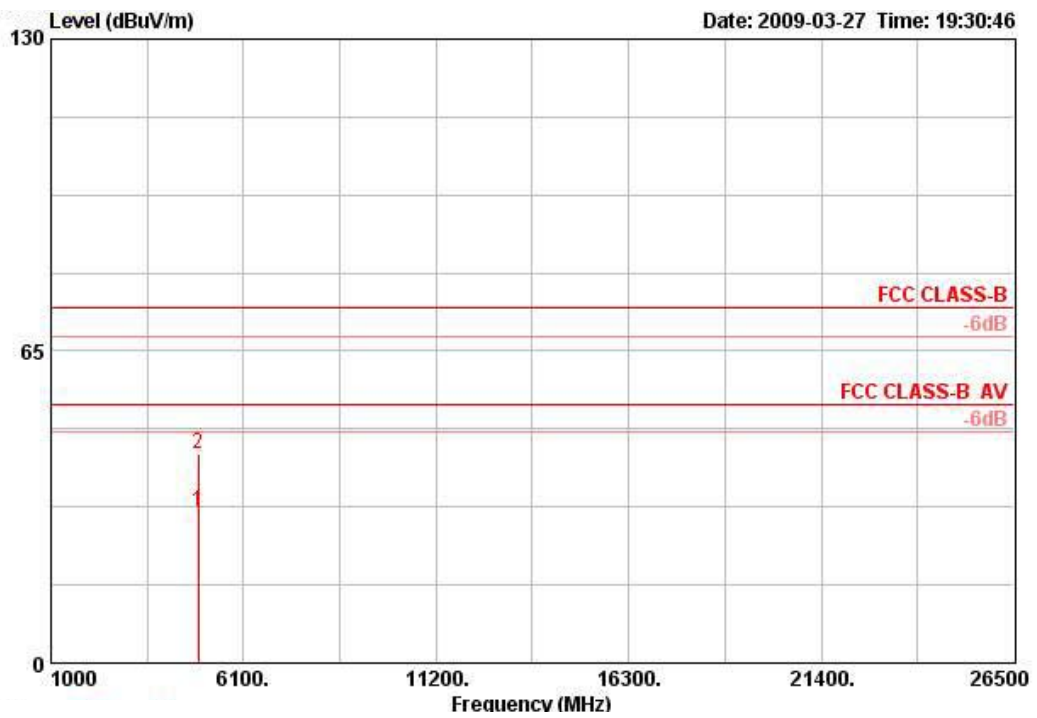

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4904.490	31.65	-22.35	54.00	30.74	32.63	3.37	35.09	AVERAGE	100	0	HORIZONTAL
2 @	4906.020	43.66	-30.34	74.00	42.75	32.63	3.37	35.09	PEAK	100	0	HORIZONTAL


Vertical

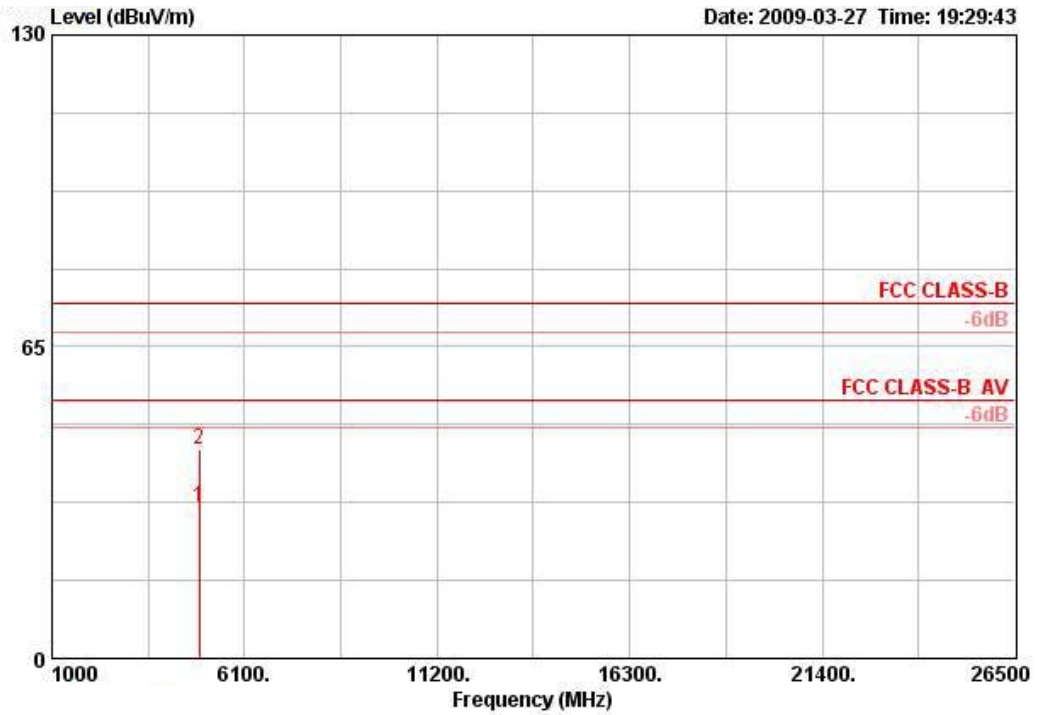

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4904.900	31.37	-22.63	54.00	30.46	32.63	3.37	35.09	AVERAGE	100	360	VERTICAL
2 @	4906.360	43.58	-30.42	74.00	42.67	32.63	3.37	35.09	PEAK	100	360	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	11a Draft n MCS0 20MHz CH 149 / Ant. 1 + Ant. 2

Horizontal

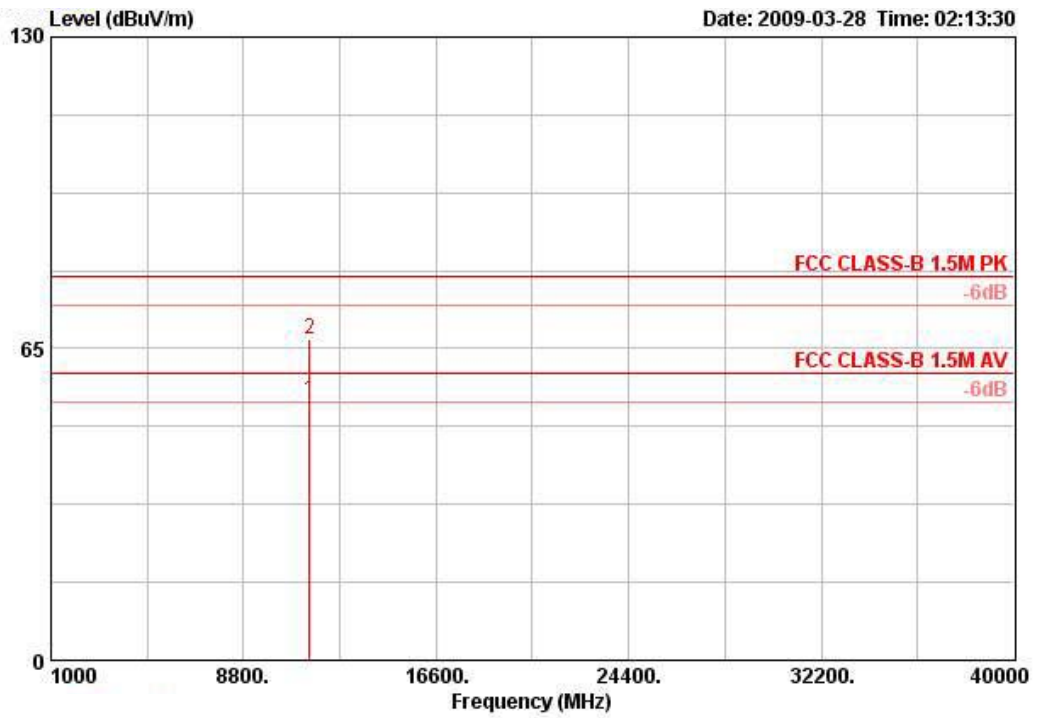

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg	
1 @	11484.320	54.16	-5.84	60.00	44.60	38.50	5.81	34.75	AVERAGE	122	336	HORIZONTAL
2 @	11484.520	66.86	-13.14	80.00	57.30	38.50	5.81	34.75	PEAK	122	336	HORIZONTAL


Vertical

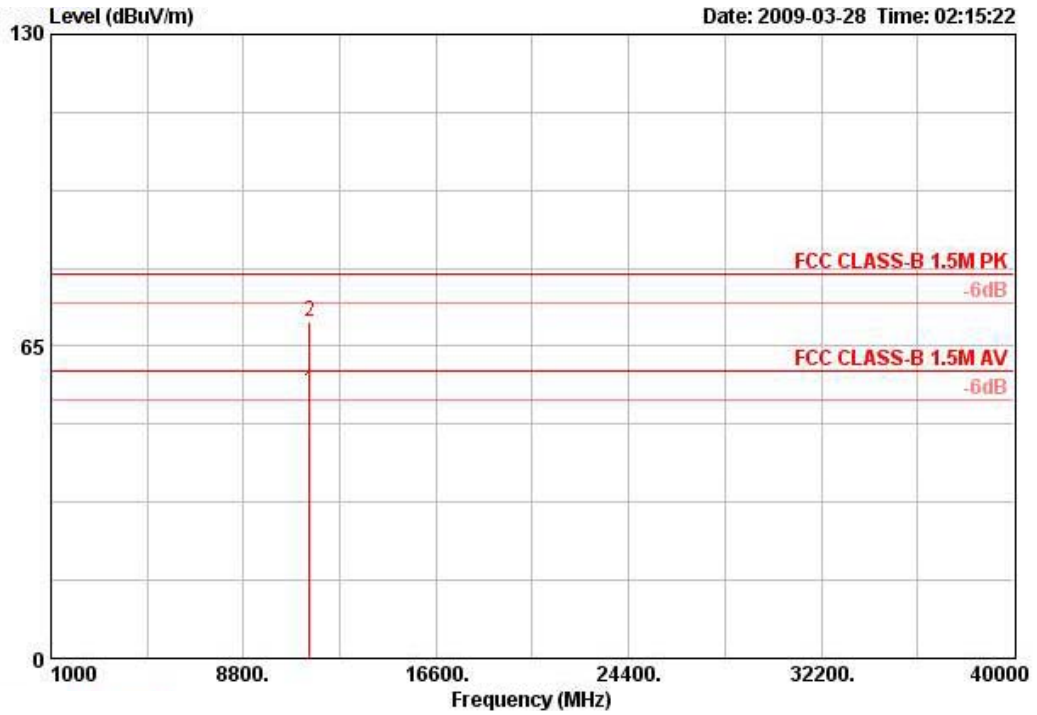

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11487.240	55.71	-4.29	60.00	46.15	38.50	5.81	34.75	AVERAGE	121	272	VERTICAL
2 @	11488.080	70.05	-9.95	80.00	60.50	38.50	5.81	34.75	PEAK	100	272	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	11a Draft n MCS0 20MHz CH 157 / Ant. 1 + Ant. 2

Horizontal

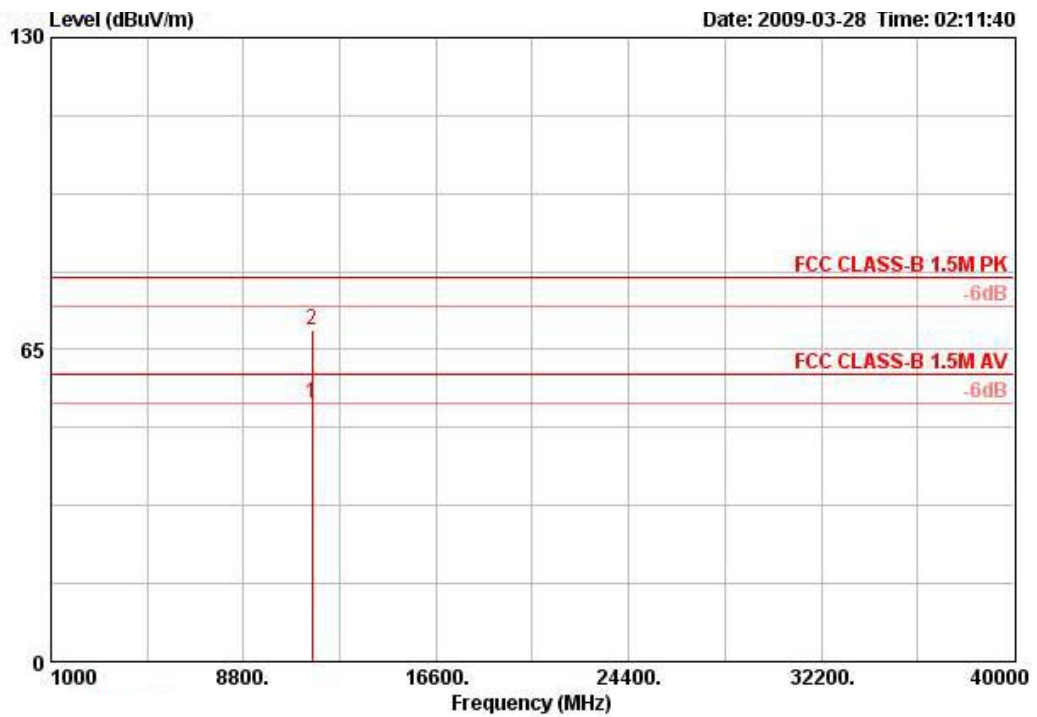

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11566.840	53.92	-6.08	60.00	44.41	38.51	5.80	34.80	AVERAGE	116	334	HORIZONTAL
2 @	11568.160	69.20	-10.80	80.00	59.69	38.51	5.80	34.80	PEAK	116	334	HORIZONTAL


Vertical

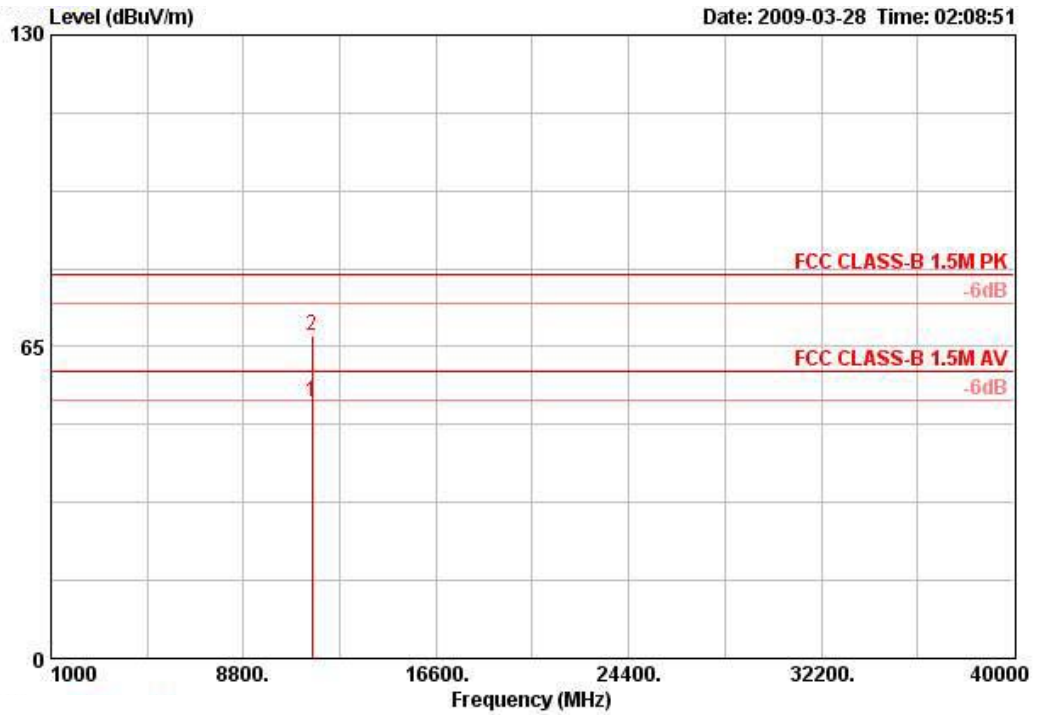

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11566.840	53.49	-6.51	60.00	43.98	38.51	5.80	34.80	AVERAGE	100	270	VERTICAL
2 @	11568.200	67.36	-12.64	80.00	57.85	38.51	5.80	34.80	PEAK	100	270	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	11a Draft n MCS0 20MHz CH 165 / Ant. 1 + Ant. 2

Horizontal

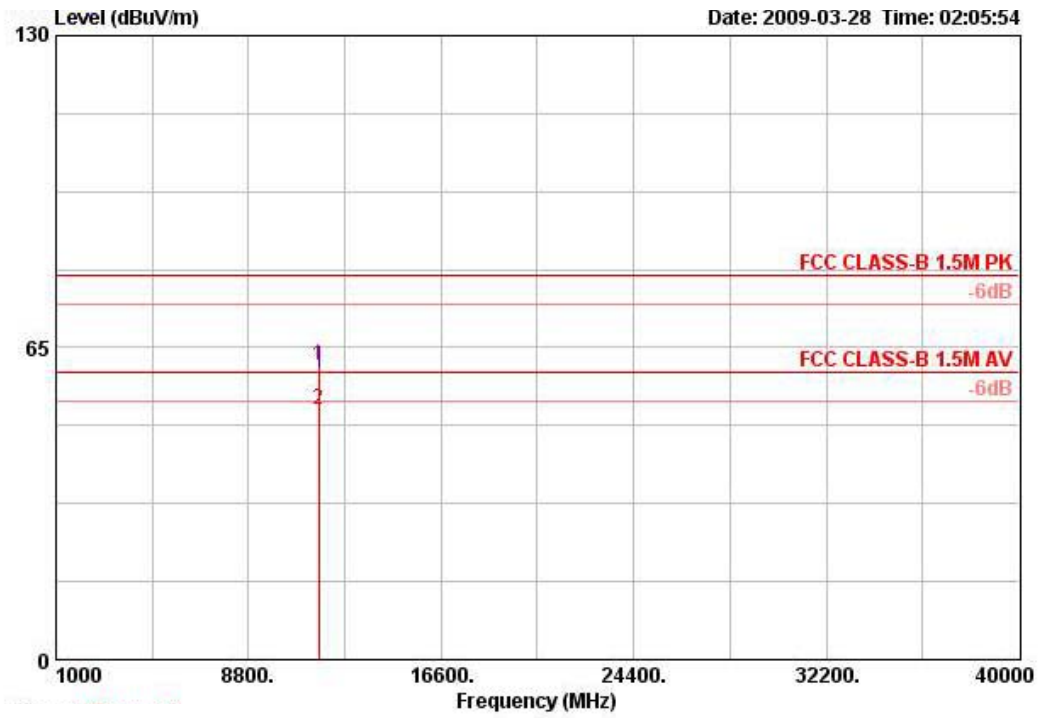

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11643.680	61.13	-18.87	80.00	51.69	38.53	5.78	34.87	PEAK	119	333	HORIZONTAL
2 @	11648.480	52.17	-7.83	60.00	42.77	38.53	5.77	34.90	AVERAGE	119	333	HORIZONTAL


Vertical

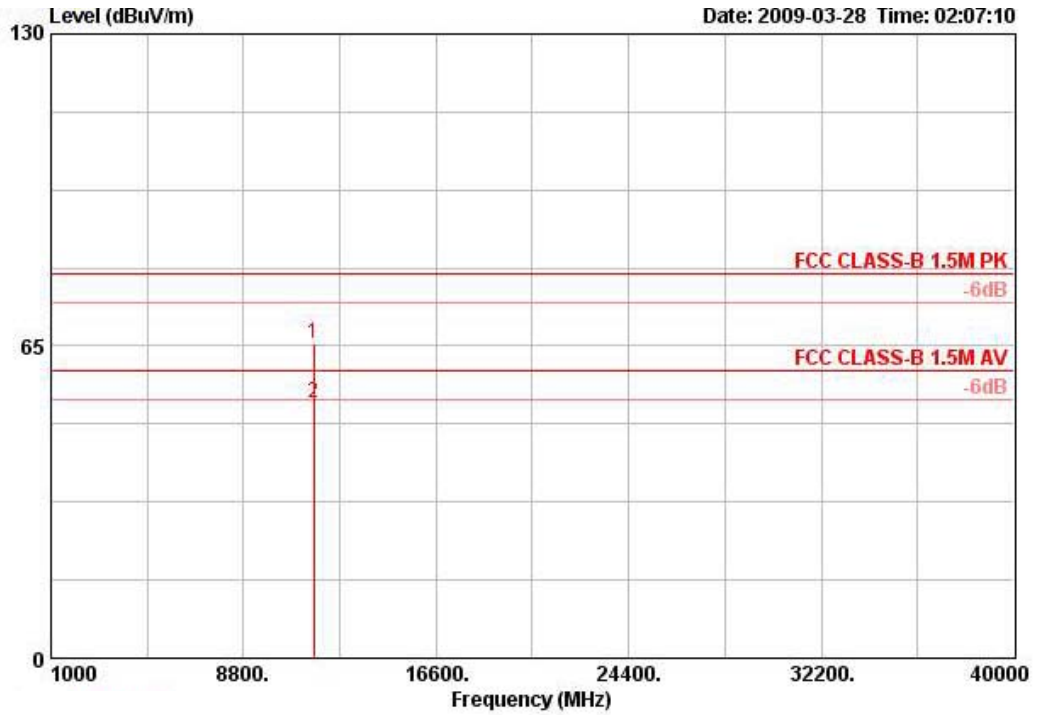

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11644.080	65.59	-14.41	80.00	56.16	38.53	5.78	34.87	PEAK	100	285	VERTICAL
2 @	11649.080	53.06	-6.94	60.00	43.65	38.53	5.77	34.90	AVERAGE	100	285	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	11a Draft n MCS0 40MHz CH 151 / Ant. 1 + Ant. 2

Horizontal

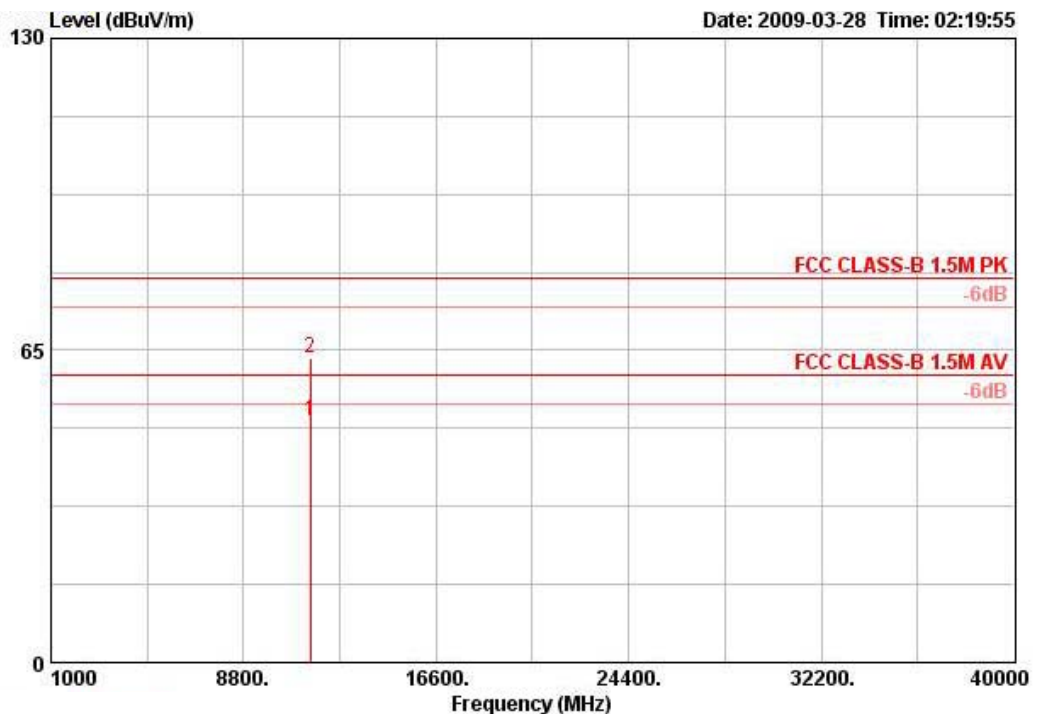

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11502.100	50.12	-9.88	60.00	40.56	38.50	5.81	34.75	AVERAGE	121	333	HORIZONTAL
2 @	11502.400	63.27	-16.73	80.00	53.71	38.50	5.81	34.75	PEAK	121	333	HORIZONTAL


Vertical

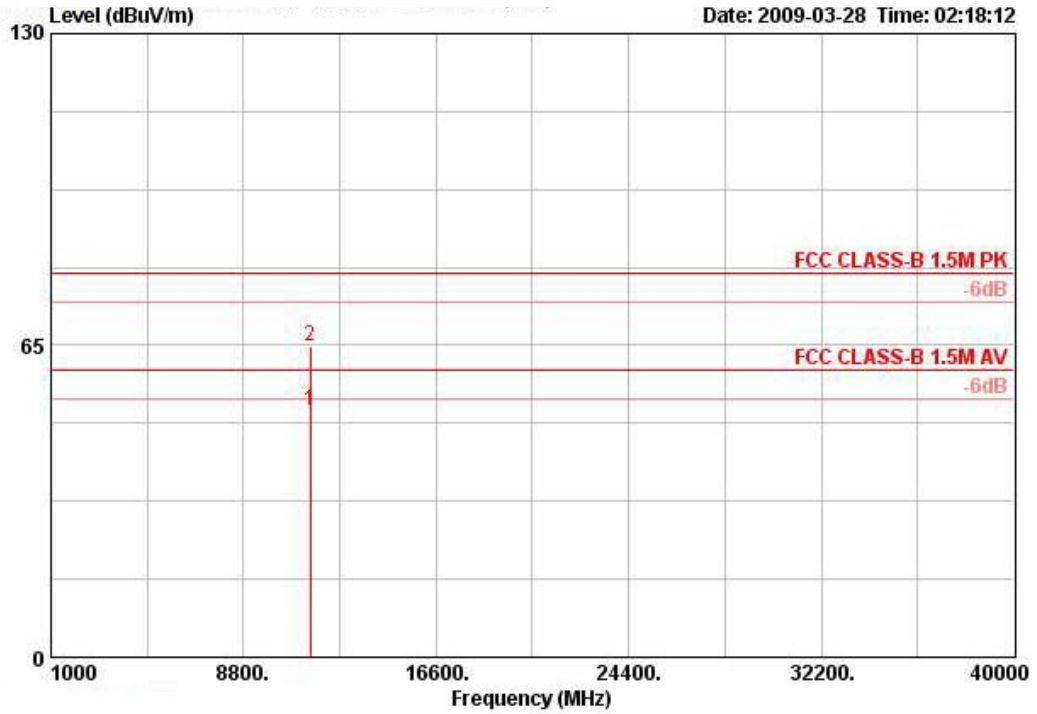

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11504.500	51.34	-8.66	60.00	41.78	38.50	5.81	34.75	AVERAGE	100	273	VERTICAL
2 @	11507.000	64.76	-15.24	80.00	55.20	38.50	5.81	34.75	PEAK	100	273	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	11a Draft n MCS0 40MHz CH 159 / Ant. 1 + Ant. 2

Horizontal

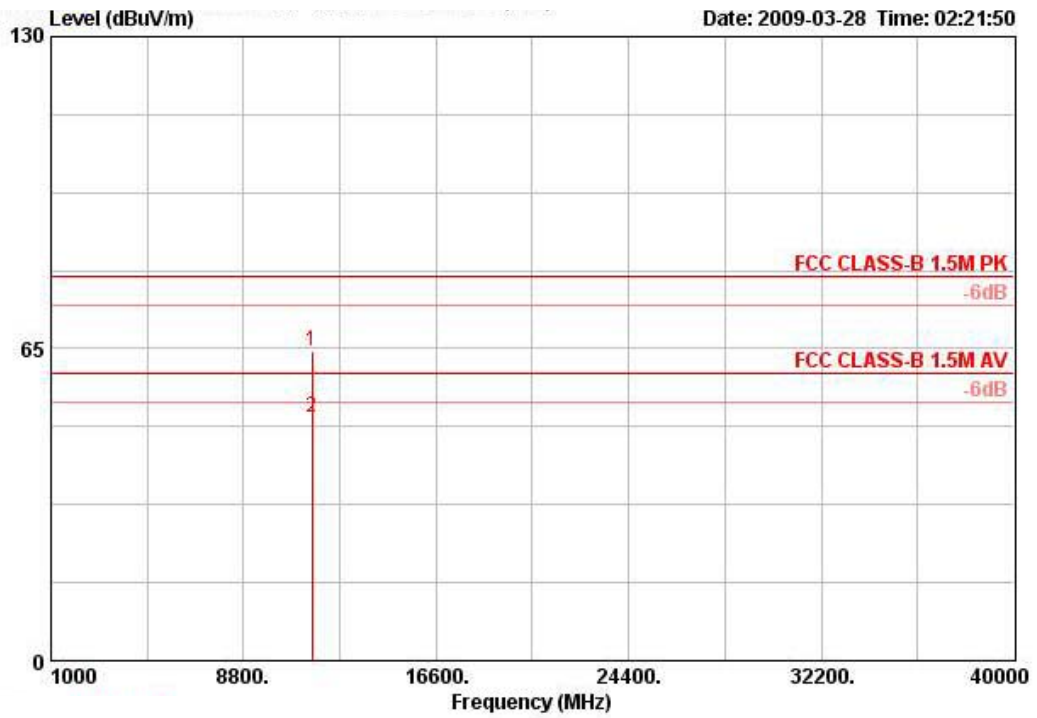

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11582.400	64.57	-15.43	80.00	55.09	38.51	5.79	34.82	PEAK	121	333	HORIZONTAL
2 @	11582.900	50.76	-9.24	60.00	41.27	38.52	5.79	34.82	AVERAGE	121	333	HORIZONTAL


Vertical

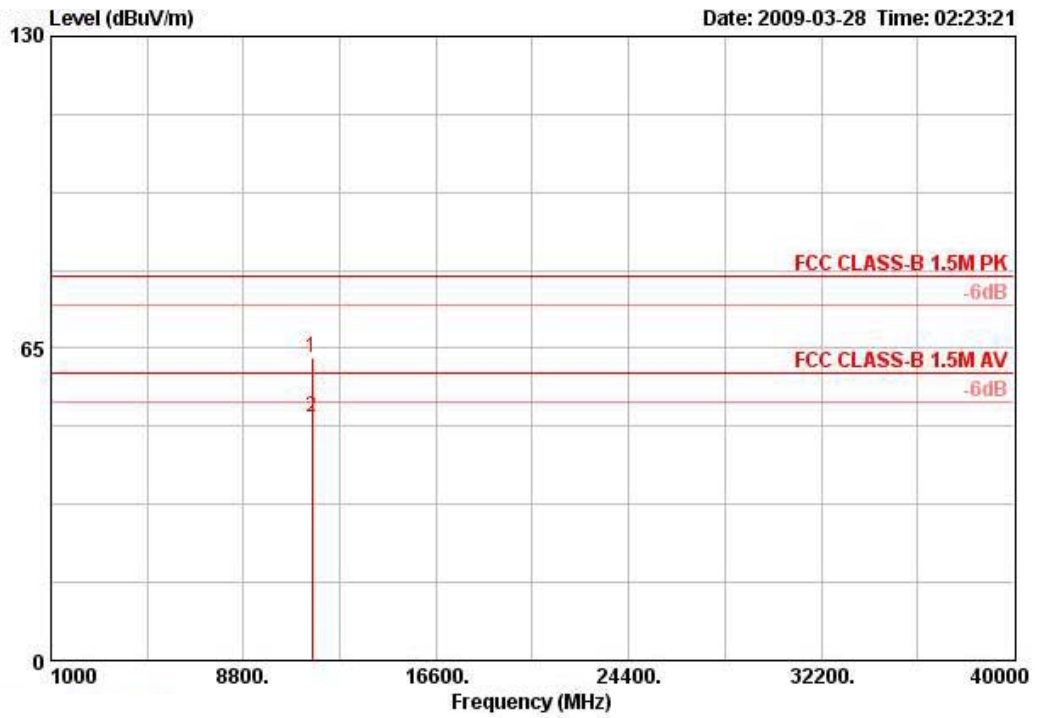

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11584.200	63.15	-16.85	80.00	53.67	38.52	5.79	34.82	PEAK	100	271	VERTICAL
2 @	11584.400	50.49	-9.51	60.00	41.01	38.52	5.79	34.82	AVERAGE	100	271	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11b CH 1 / Ant. 1 + Ant. 2

Horizontal

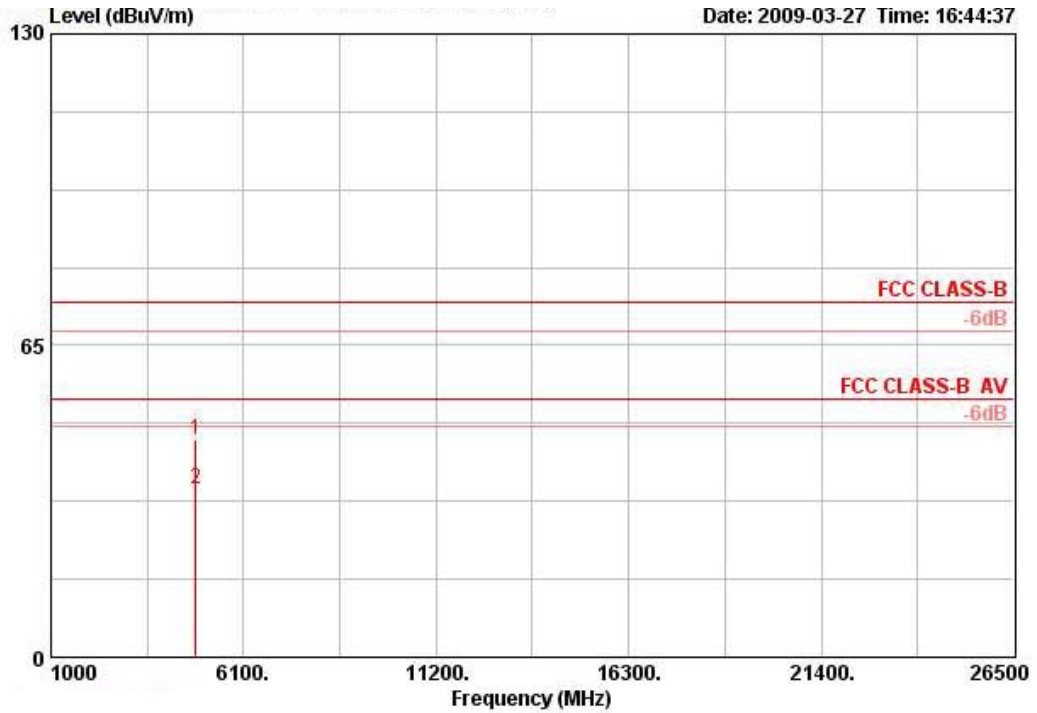

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4823.650	45.35	-28.65	74.00	44.81	32.46	3.34	35.26	PEAK	100	266	HORIZONTAL
2 @	4824.030	34.89	-19.11	54.00	34.35	32.46	3.34	35.26	AVERAGE	100	266	HORIZONTAL


Vertical

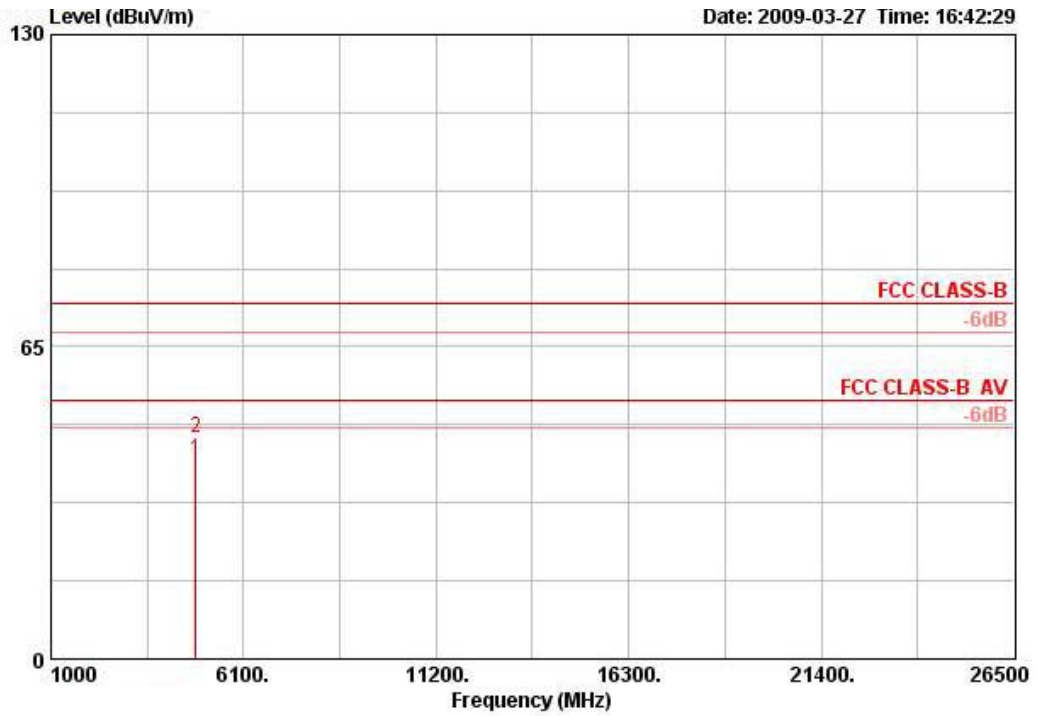

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4824.010	41.38	-12.62	54.00	40.84	32.46	3.34	35.26	AVERAGE	100	6	VERTICAL
2 @	4824.230	45.88	-28.12	74.00	45.34	32.46	3.34	35.26	PEAK	100	6	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11b CH 6 / Ant. 1 + Ant. 2

Horizontal

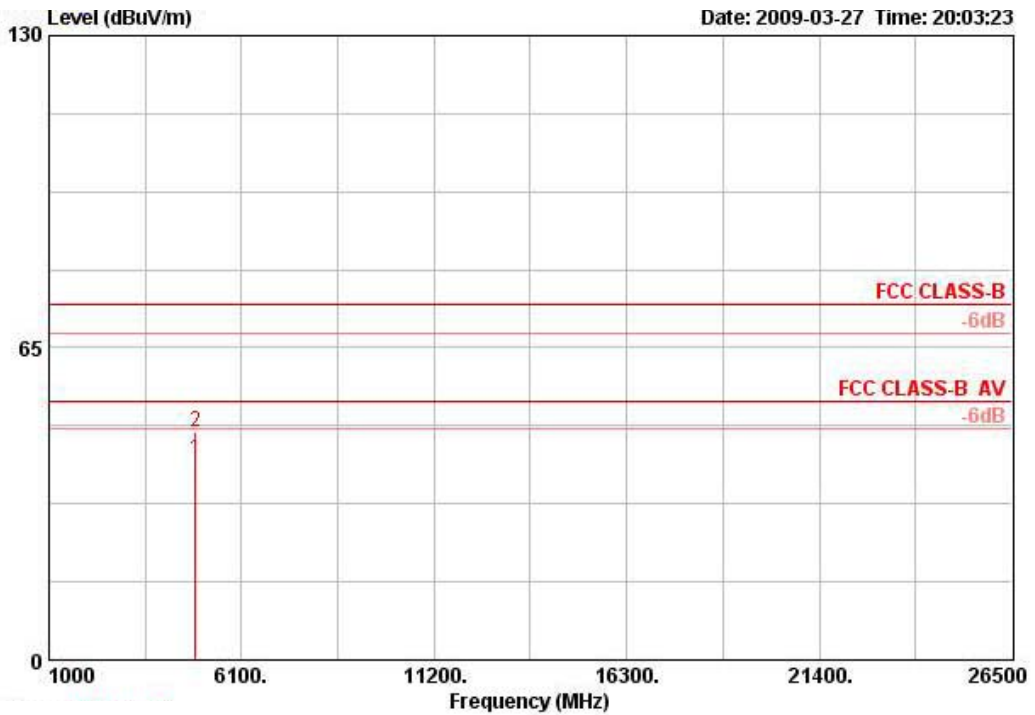

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4874.030	41.86	-12.14	54.00	41.08	32.56	3.36	35.15	AVERAGE	103	149	HORIZONTAL
2 @	4874.180	47.54	-26.46	74.00	46.76	32.56	3.36	35.15	PEAK	103	149	HORIZONTAL


Vertical

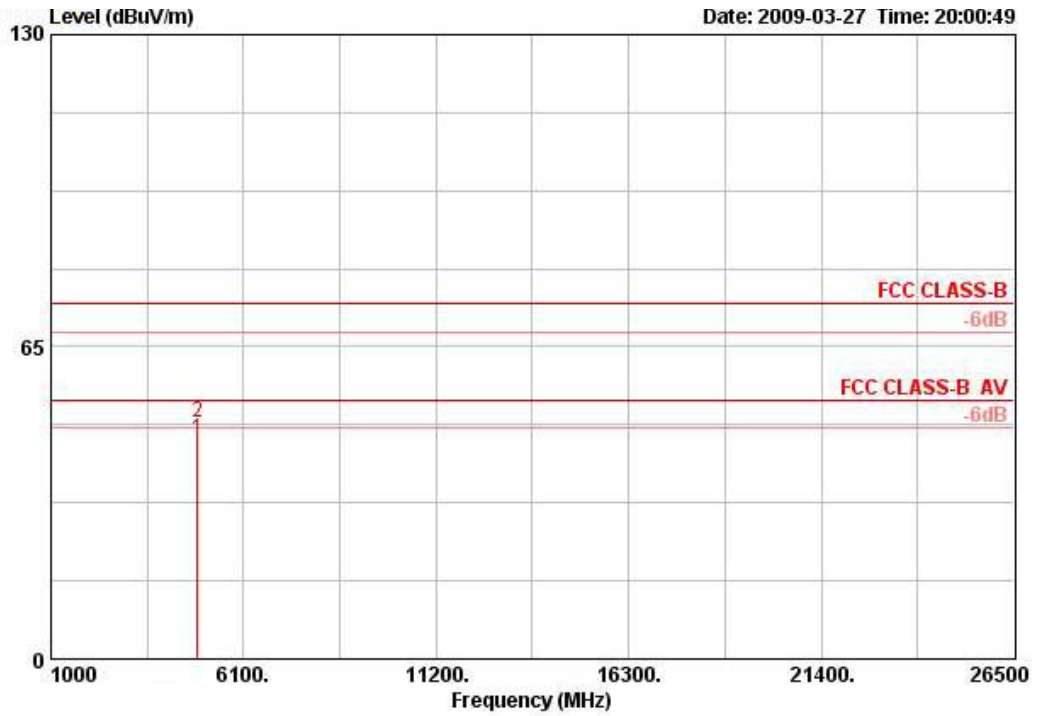

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4874.070	45.54	-8.46	54.00	44.77	32.56	3.36	35.15	AVERAGE	100	7	VERTICAL
2 @	4874.100	49.40	-24.60	74.00	48.62	32.56	3.36	35.15	PEAK	100	7	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11b CH 11 / Ant. 1 + Ant. 2

Horizontal

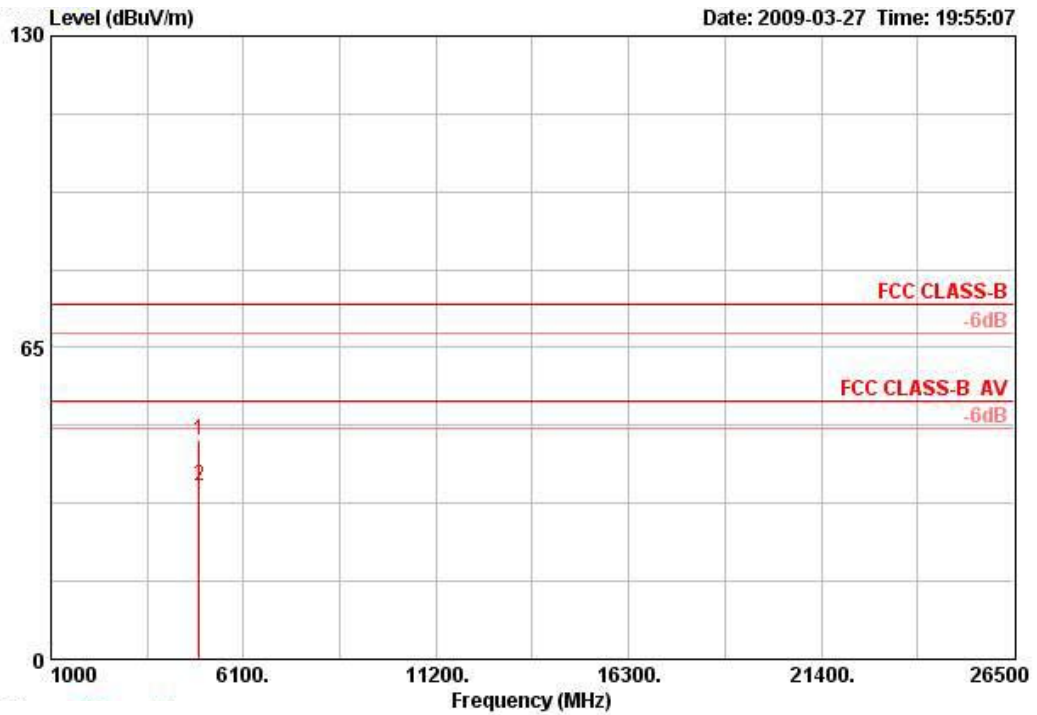

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4923.830	45.53	-28.47	74.00	44.52	32.66	3.38	35.03	PEAK	105	181	HORIZONTAL
2 @	4924.130	36.23	-17.77	54.00	35.21	32.66	3.38	35.03	AVERAGE	105	181	HORIZONTAL

Vertical

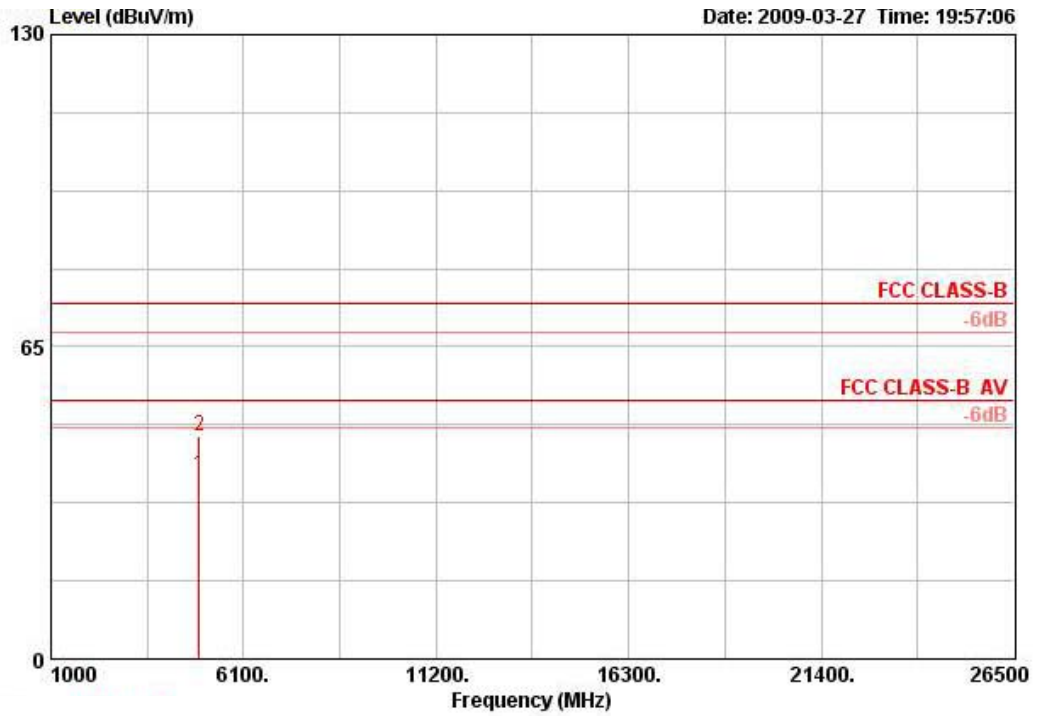


	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4924.150	38.15	-15.85	54.00	37.14	32.66	3.38	35.03	AVERAGE	100	0	VERTICAL
2 @	4924.170	46.27	-27.73	74.00	45.26	32.66	3.38	35.03	PEAK	100	0	VERTICAL




Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11g CH 1 / Ant. 1 + Ant. 2

Horizontal

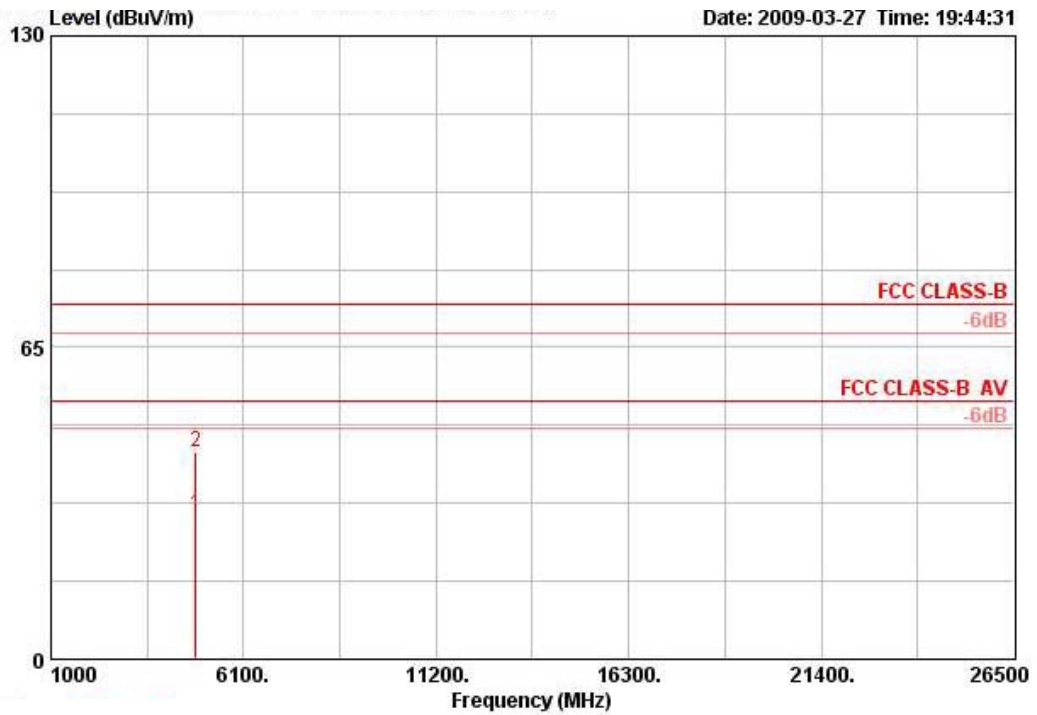

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4823.950	30.11	-23.89	54.00	29.57	32.46	3.34	35.26	AVERAGE	100	0	HORIZONTAL
2 @	4826.040	43.21	-30.79	74.00	42.67	32.46	3.34	35.26	PEAK	100	0	HORIZONTAL


Vertical

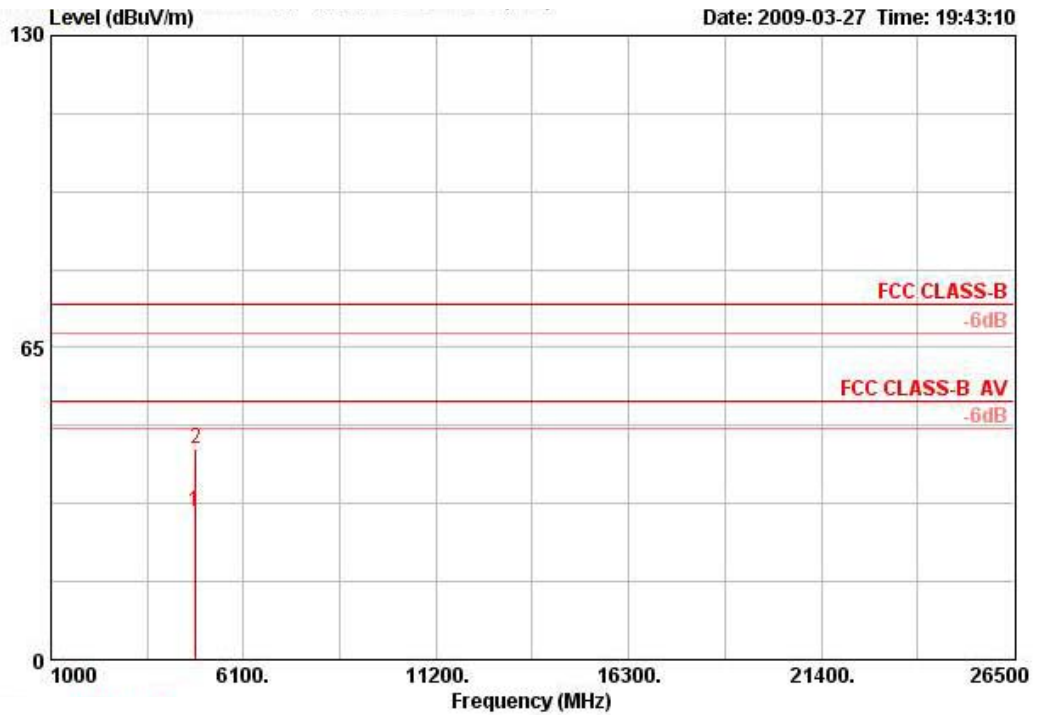

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4822.500	30.72	-23.28	54.00	30.18	32.46	3.34	35.26	AVERAGE	100	360	VERTICAL
2 @	4823.830	44.07	-29.93	74.00	43.53	32.46	3.34	35.26	PEAK	100	360	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11g CH 6 / Ant. 1 + Ant. 2

Horizontal

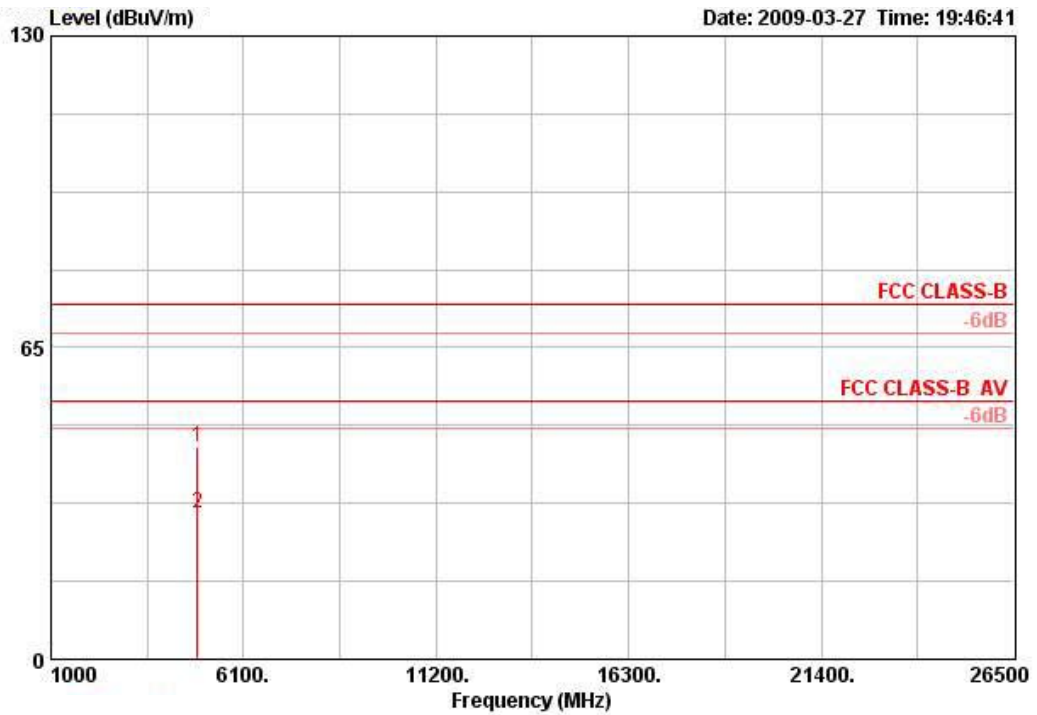

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4874.880	44.28	-29.72	74.00	43.51	32.56	3.36	35.15	PEAK	100	360	HORIZONTAL
2 @	4874.910	30.33	-23.67	54.00	29.56	32.56	3.36	35.15	AVERAGE	100	360	HORIZONTAL


Vertical

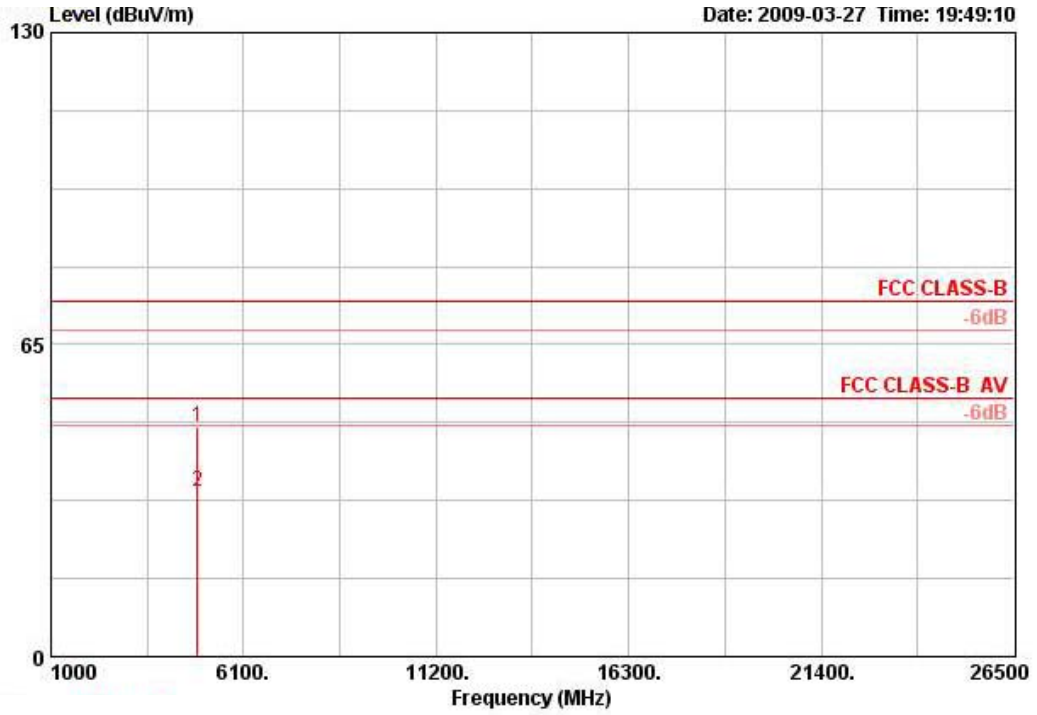

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4872.340	47.68	-26.32	74.00	46.90	32.56	3.36	35.15	PEAK	100	348	VERTICAL
2 @	4872.970	34.50	-19.50	54.00	33.72	32.56	3.36	35.15	AVERAGE	100	348	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11g CH 11 / Ant. 1 + Ant. 2

Horizontal

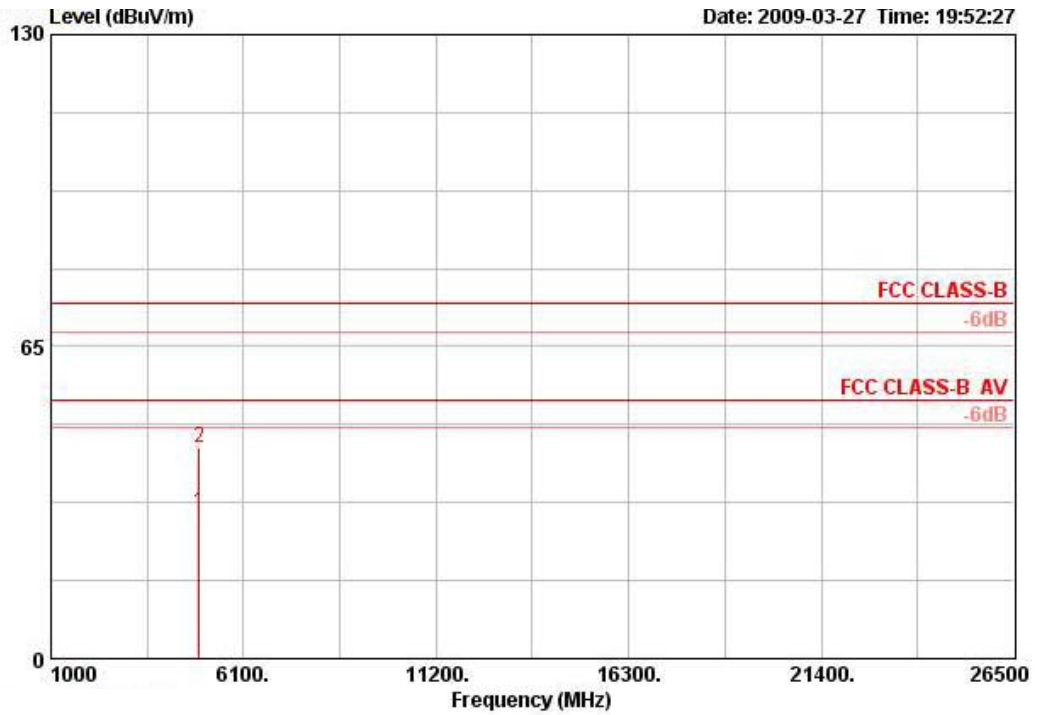

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4921.520	30.63	-23.37	54.00	29.62	32.66	3.38	35.03	AVERAGE	100	360	HORIZONTAL
2 @	4921.980	44.10	-29.90	74.00	43.09	32.66	3.38	35.03	PEAK	100	360	HORIZONTAL


Vertical

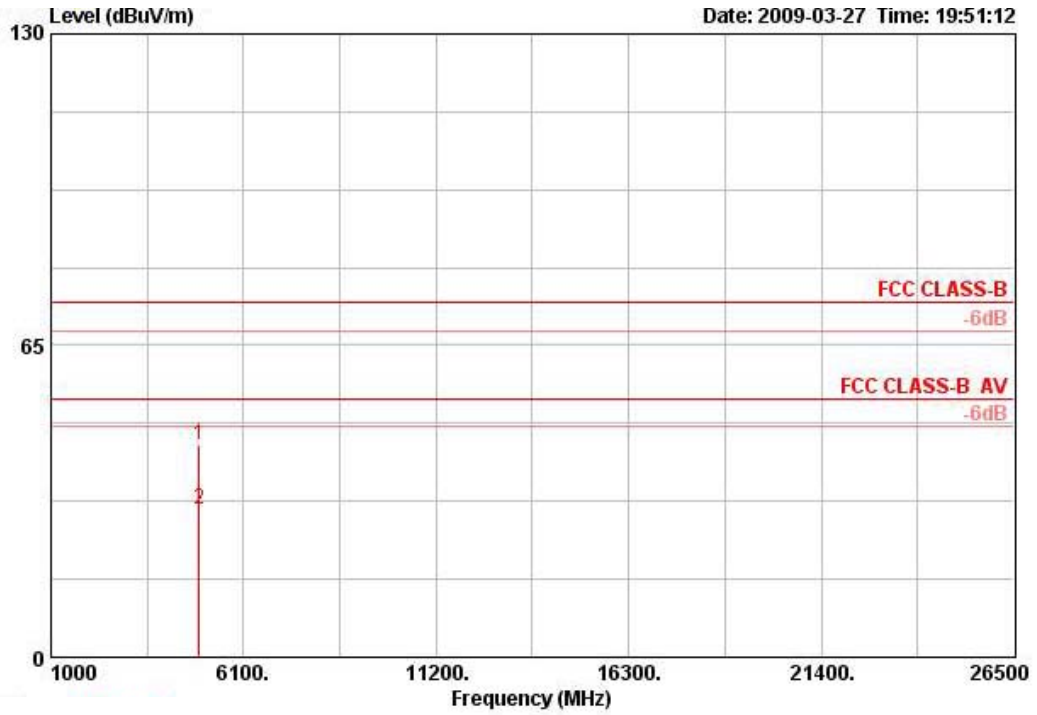

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4923.890	44.20	-29.80	74.00	43.18	32.66	3.38	35.03	PEAK	100	0	VERTICAL
2 @	4924.070	30.95	-23.05	54.00	29.94	32.66	3.38	35.03	AVERAGE	100	0	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11a CH 149 / Ant. 1 + Ant. 2

Horizontal

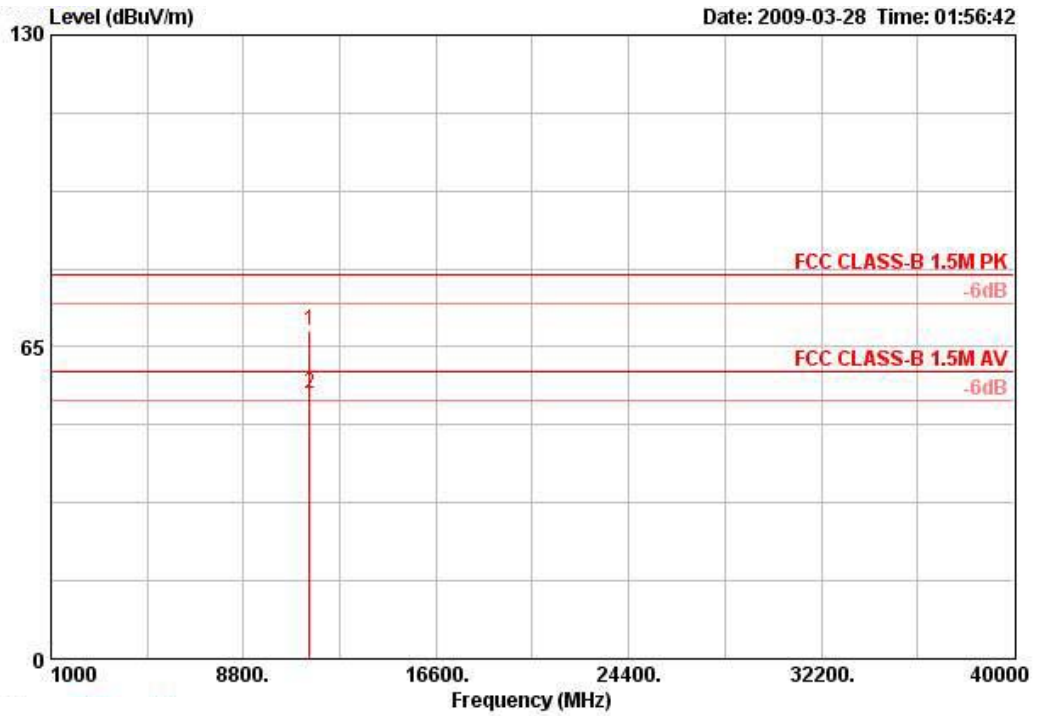

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg	
1 @	11488.480	68.46	-11.54	80.00	58.90	38.50	5.81	34.75	PEAK	155	334	HORIZONTAL
2 @	11488.520	55.24	-4.76	60.00	45.68	38.50	5.81	34.75	AVERAGE	155	334	HORIZONTAL


Vertical

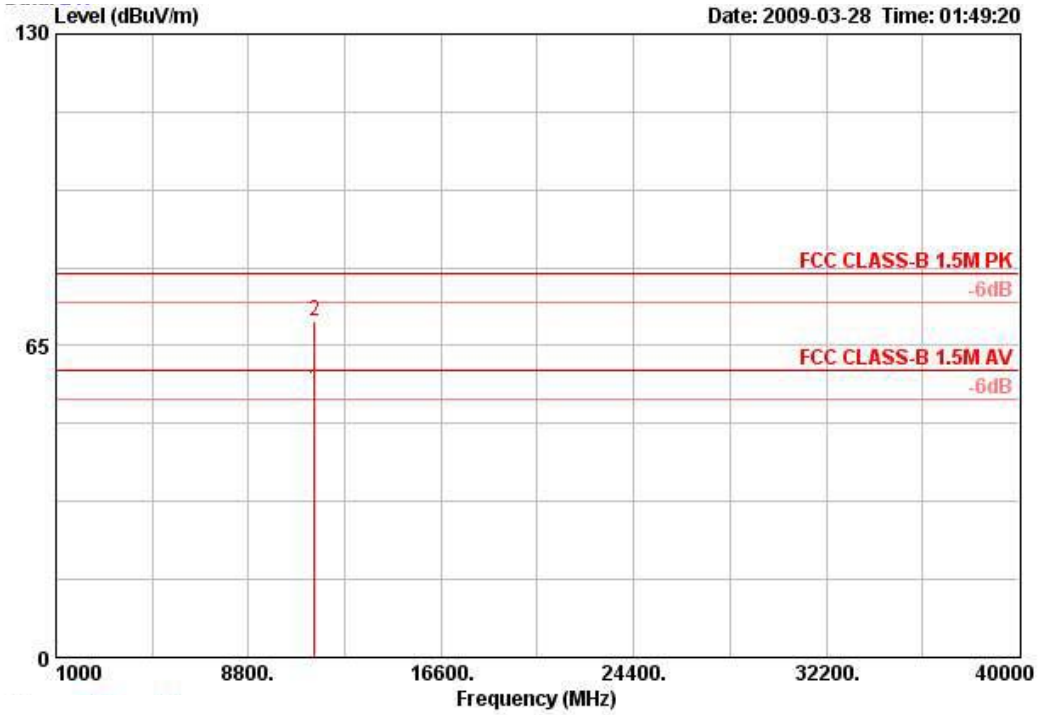

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11488.840	55.92	-4.08	60.00	46.36	38.50	5.81	34.75	AVERAGE	100	272	VERTICAL
2 @	11489.000	70.03	-9.97	80.00	60.48	38.50	5.81	34.75	PEAK	100	272	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11a CH 157 / Ant. 1 + Ant. 2

Horizontal

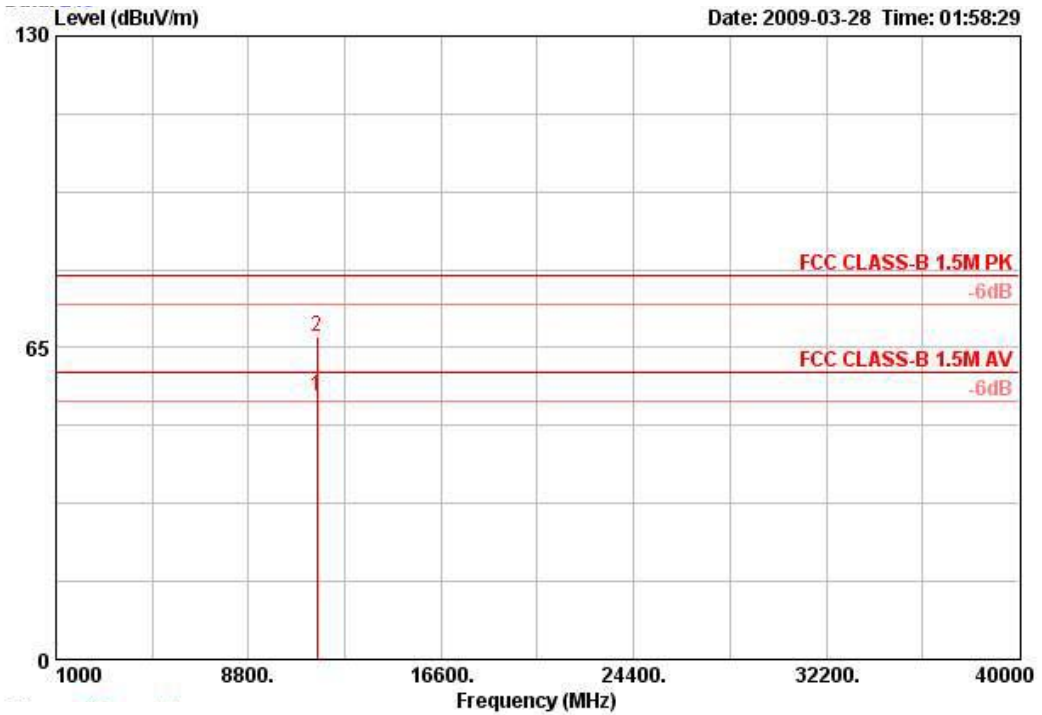

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11568.500	55.03	-4.97	60.00	45.51	38.51	5.80	34.80	AVERAGE	123	332	HORIZONTAL
2 @	11573.020	67.43	-12.57	80.00	57.95	38.51	5.79	34.82	PEAK	123	332	HORIZONTAL


Vertical

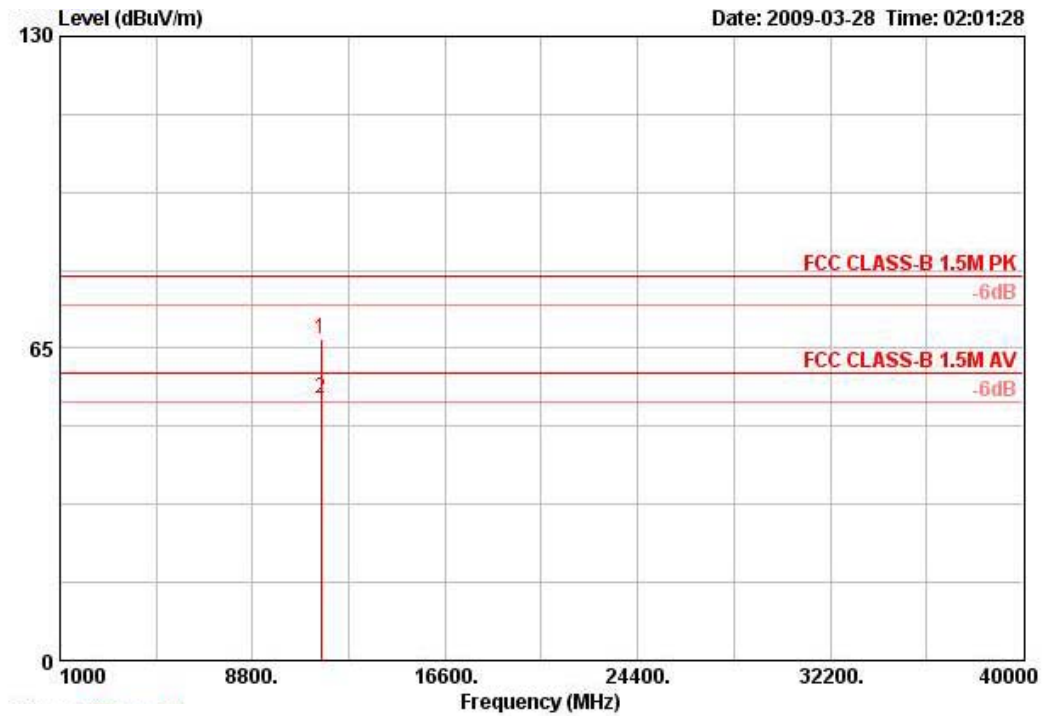

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11564.560	66.98	-13.02	80.00	57.48	38.51	5.80	34.80	PEAK	100	272	VERTICAL
2 @	11569.040	54.46	-5.54	60.00	44.94	38.51	5.80	34.80	AVERAGE	100	272	VERTICAL


Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11a CH 165 / Ant. 1 + Ant. 2

Horizontal

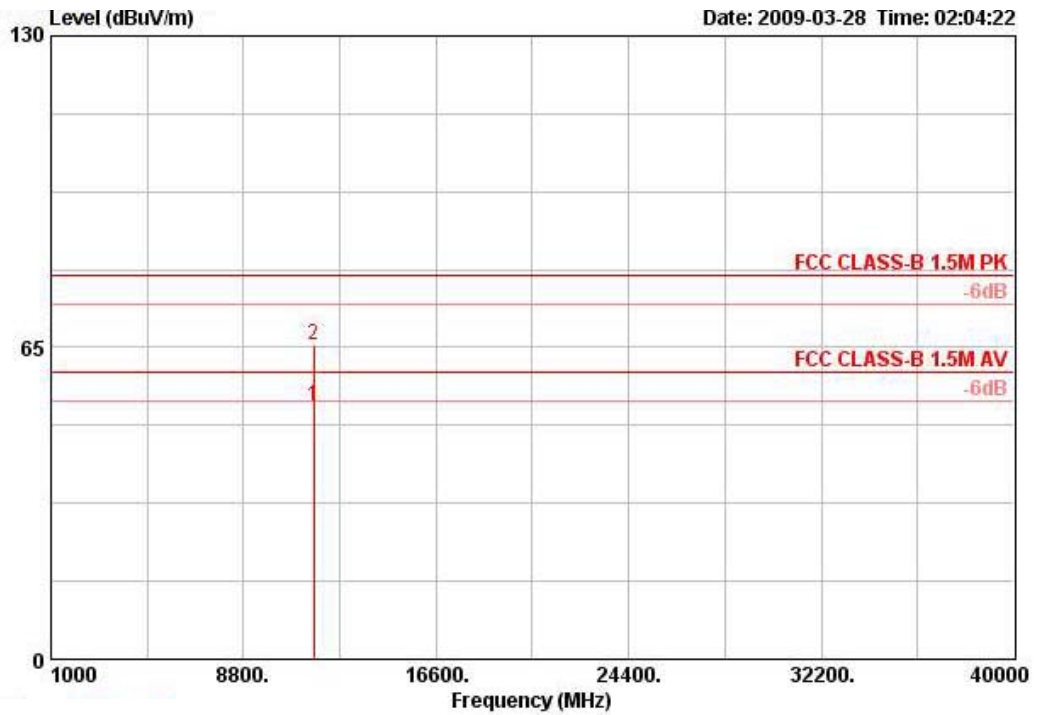

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11648.480	52.86	-7.14	60.00	43.46	38.53	5.77	34.90	AVERAGE	119	333	HORIZONTAL
2 @	11653.320	65.53	-14.47	80.00	56.12	38.53	5.77	34.90	PEAK	119	333	HORIZONTAL

Vertical

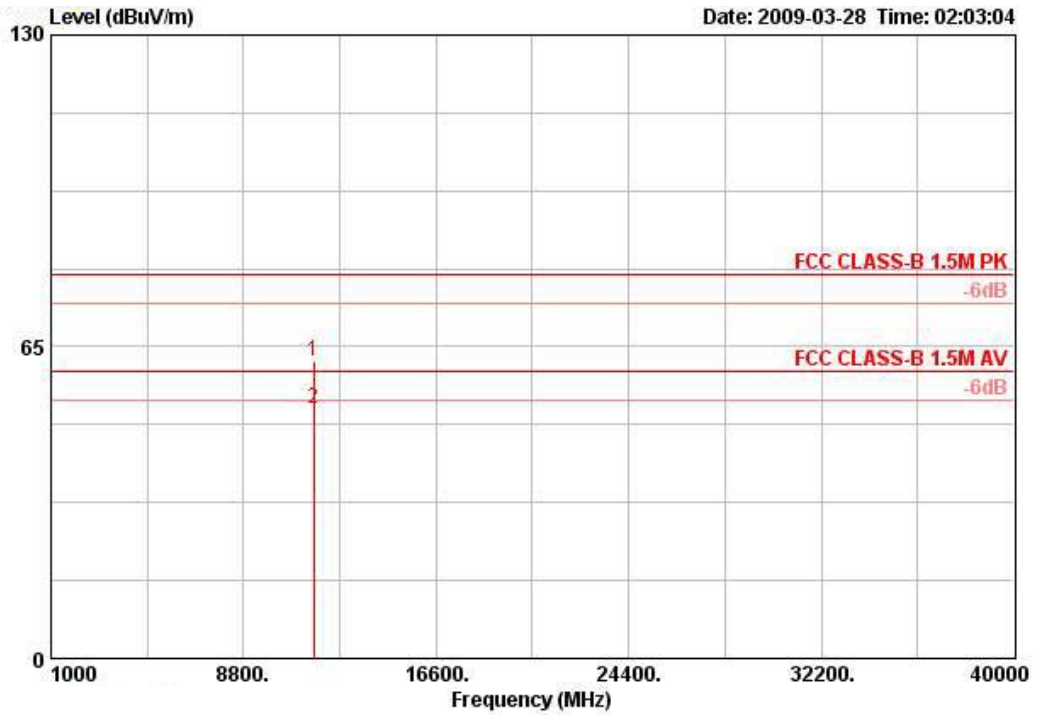

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	11643.800	62.01	-17.99	80.00	52.58	38.53	5.78	34.87	PEAK	100	272	VERTICAL
2 @	11648.880	52.18	-7.82	60.00	42.77	38.53	5.77	34.90	AVERAGE	100	272	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.6. Band Edge Emissions Measurement

4.6.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micovolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RB / VB (Emission in restricted band)	1 MHz / 1MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	100 KHz /100 KHz for Peak

4.6.3. Test Procedures

1. The test procedure is the same as section 4.5.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

4.6.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.5.4.

4.6.5. Test Deviation

There is no deviation with the original standard.

4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

4.6.7. Test Result of Band Edge and Fundamental Emissions

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS0 20MHz Ch 1, 6, 11 / Ant. 1 + Ant. 2
Test date	Mar. 27, 2009		

Channel 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2389.800	71.24	-2.76	74.00	40.96	27.87	2.42	0.00	PEAK	100	212 HORIZONTAL
2 @	2390.000	52.17	-1.83	54.00	21.89	27.87	2.42	0.00	AVERAGE	100	212 HORIZONTAL
3 @	2410.400	98.28			68.02	27.84	2.42	0.00	AVERAGE	100	212 HORIZONTAL
4 @	2410.800	109.66			79.41	27.84	2.42	0.00	PEAK	100	212 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz

Channel 6

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2389.000	72.90	-1.10	74.00	42.63	27.87	2.40	0.00	PEAK	100	353 HORIZONTAL
2 @	2390.000	48.74	-5.26	54.00	18.46	27.87	2.42	0.00	AVERAGE	100	353 HORIZONTAL
3 @	2431.400	115.85			85.61	27.81	2.43	0.00	PEAK	100	353 HORIZONTAL
4 @	2437.000	104.69			74.47	27.78	2.43	0.00	AVERAGE	100	353 HORIZONTAL
5 @	2483.500	45.27	-8.73	54.00	15.08	27.73	2.46	0.00	AVERAGE	100	353 HORIZONTAL
6 @	2483.900	64.48	-9.52	74.00	34.29	27.73	2.46	0.00	PEAK	100	353 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 11

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2459.800	95.71			65.51	27.76	2.44	0.00	AVERAGE	100	272 HORIZONTAL
2 @	2462.400	108.40			78.20	27.76	2.44	0.00	PEAK	100	272 HORIZONTAL
3 @	2483.700	52.98	-1.02	54.00	22.80	27.73	2.46	0.00	AVERAGE	100	272 HORIZONTAL
4 @	2483.900	71.72	-2.28	74.00	41.54	27.73	2.46	0.00	PEAK	100	272 HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Draft n MCS0 40MHz Ch 3, 6, 9 / Ant. 1 + Ant. 2
Test date	Mar. 27, 2009		

Channel 3

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	2388.800	69.22	-4.78	74.00	38.96	27.87	2.40	0.00	PEAK	100	212	HORIZONTAL
2 @	2390.000	53.50	-0.50	54.00	23.22	27.87	2.42	0.00	AVERAGE	100	212	HORIZONTAL
3	2412.000	91.75			61.50	27.84	2.42	0.00	AVERAGE	100	212	HORIZONTAL
4 @	2412.800	104.17			73.91	27.84	2.42	0.00	PEAK	100	212	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2422 MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	2388.000	70.22	-3.78	74.00	39.95	27.87	2.40	0.00	PEAK	100	211	HORIZONTAL
2 @	2388.400	52.44	-1.56	54.00	22.18	27.87	2.40	0.00	AVERAGE	100	211	HORIZONTAL
3 @	2420.600	93.00			62.76	27.81	2.43	0.00	AVERAGE	100	211	HORIZONTAL
4 @	2427.400	105.20			74.96	27.81	2.43	0.00	PEAK	100	211	HORIZONTAL
5 @	2483.500	47.03	-6.97	54.00	16.85	27.73	2.46	0.00	AVERAGE	100	211	HORIZONTAL
6 @	2484.700	62.30	-11.70	74.00	32.11	27.73	2.46	0.00	PEAK	100	211	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437MHz.

Channel 9

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1	2441.600	89.58			59.35	27.78	2.44	0.00	AVERAGE	100	273	HORIZONTAL
2 @	2442.400	103.13			72.90	27.78	2.44	0.00	PEAK	100	273	HORIZONTAL
3 @	2483.500	52.35	-1.65	54.00	22.17	27.73	2.46	0.00	AVERAGE	100	273	HORIZONTAL
4 @	2483.500	67.78	-6.22	74.00	37.59	27.73	2.46	0.00	PEAK	100	273	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2452 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11b CH 1, 6, 11 / Ant. 1 + Ant. 2
Test Date	Mar. 27, 2009		

Channel 1

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	2386.400	52.41	-1.59	54.00	22.14	27.87	2.40	0.00	AVERAGE	100	5	HORIZONTAL
2 @	2386.800	61.51	-12.49	74.00	31.24	27.87	2.40	0.00	PEAK	100	5	HORIZONTAL
3 @	2411.000	108.69			78.44	27.84	2.42	0.00	AVERAGE	100	5	HORIZONTAL
4 @	2411.200	113.44			83.19	27.84	2.42	0.00	PEAK	100	5	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	2388.800	60.38	-13.62	74.00	30.12	27.87	2.40	0.00	PEAK	112	271	HORIZONTAL
2 @	2389.200	50.69	-3.31	54.00	20.42	27.87	2.40	0.00	AVERAGE	112	271	HORIZONTAL
3 @	2436.200	118.01			87.77	27.81	2.43	0.00	PEAK	112	271	HORIZONTAL
4 @	2437.800	113.52			83.30	27.78	2.43	0.00	AVERAGE	112	271	HORIZONTAL
5 @	2483.500	56.71	-17.29	74.00	26.52	27.73	2.46	0.00	PEAK	112	271	HORIZONTAL
6 @	2484.100	46.43	-7.57	54.00	16.25	27.73	2.46	0.00	AVERAGE	112	271	HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	2461.200	112.53			82.33	27.76	2.44	0.00	PEAK	111	272	HORIZONTAL
2 @	2461.400	108.10			77.91	27.76	2.44	0.00	AVERAGE	111	272	HORIZONTAL
3 @	2487.700	52.67	-1.33	54.00	22.51	27.70	2.46	0.00	AVERAGE	111	272	HORIZONTAL
4 @	2488.100	60.63	-13.37	74.00	30.47	27.70	2.46	0.00	PEAK	111	272	HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	802.11g CH 1, 6, 11 / Ant. 1 + Ant. 2
Test Date	Mar. 27, 2009		

Channel 1

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2389.200	70.01	-3.99	74.00	39.74	27.87	2.40	0.00	PEAK	100	211 HORIZONTAL
2 @	2390.000	53.11	-0.89	54.00	22.83	27.87	2.42	0.00	AVERAGE	100	211 HORIZONTAL
3 -	2413.400	110.17			79.91	27.84	2.42	0.00	PEAK	100	211 HORIZONTAL
4 @	2413.600	99.32			69.07	27.84	2.42	0.00	AVERAGE	100	211 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2412 MHz.

Channel 6

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	2387.600	72.45	-1.55	74.00	42.18	27.87	2.40	0.00	PEAK	100	212 HORIZONTAL
2 @	2390.000	52.99	-1.01	54.00	22.71	27.87	2.42	0.00	AVERAGE	100	212 HORIZONTAL
3 @	2431.800	115.09			84.85	27.81	2.43	0.00	PEAK	100	212 HORIZONTAL
4 @	2433.200	103.32			73.08	27.81	2.43	0.00	AVERAGE	100	212 HORIZONTAL
5 @	2483.500	48.07	-5.93	54.00	17.89	27.73	2.46	0.00	AVERAGE	100	212 HORIZONTAL
6 @	2486.400	68.34	-5.66	74.00	38.16	27.73	2.46	0.00	PEAK	100	212 HORIZONTAL

Item 3, 4 are the fundamental frequency at 2437 MHz.

Channel 11

	Freq	Level	Over	Limit	Read	Antenna	Cable	Preamp	Remark	Ant	Table
			Limit	Line	Level	Factor	Loss	Factor		Pos	Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	2459.800	111.18			80.98	27.76	2.44	0.00	PEAK	112	272 HORIZONTAL
2 @	2462.200	99.87			69.67	27.76	2.44	0.00	AVERAGE	112	272 HORIZONTAL
3 @	2483.500	52.87	-1.13	54.00	22.68	27.73	2.46	0.00	AVERAGE	112	272 HORIZONTAL
4 @	2483.900	69.64	-4.36	74.00	39.46	27.73	2.46	0.00	PEAK	112	272 HORIZONTAL

Item 1, 2 are the fundamental frequency at 2462 MHz.


Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.


For Emission not in Restricted Band

Low Band Edge Plot on Configuration Drafft n MCS0 20MHz Ant. 1 + Ant. 2 / 2412 MHz

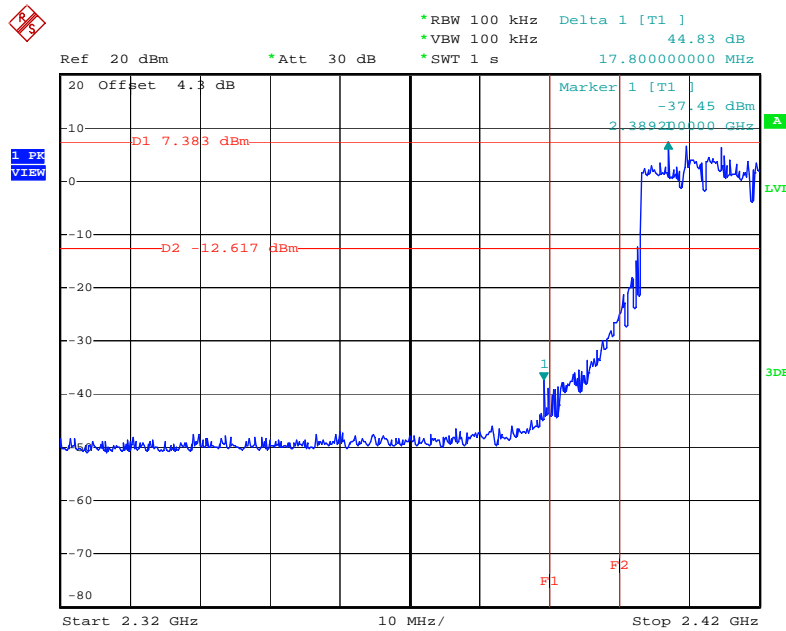


Date: 28.MAR.2009 15:36:45

High Band Edge Plot on Configuration Drafft n MCS0 20MHz Ant. 1 + Ant. 2 / 2462 MHz

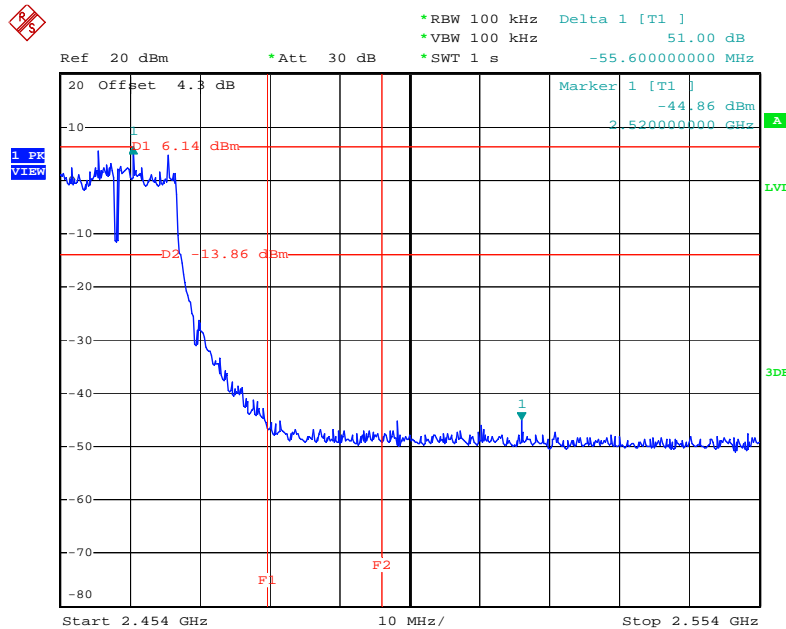


Date: 28.MAR.2009 15:31:51

Low Band Edge Plot on Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 2422 MHz

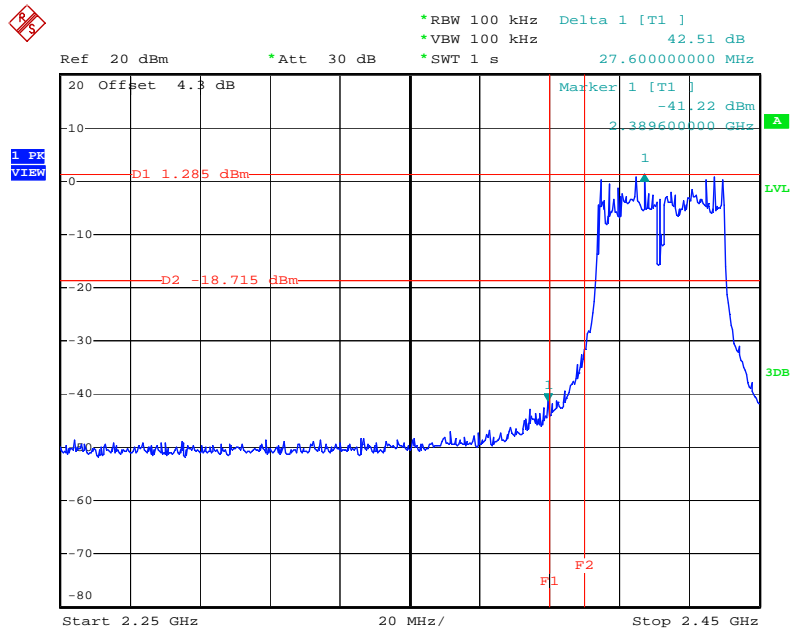


Date: 28.MAR.2009 15:39:20

High Band Edge Plot on Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 2452 MHz

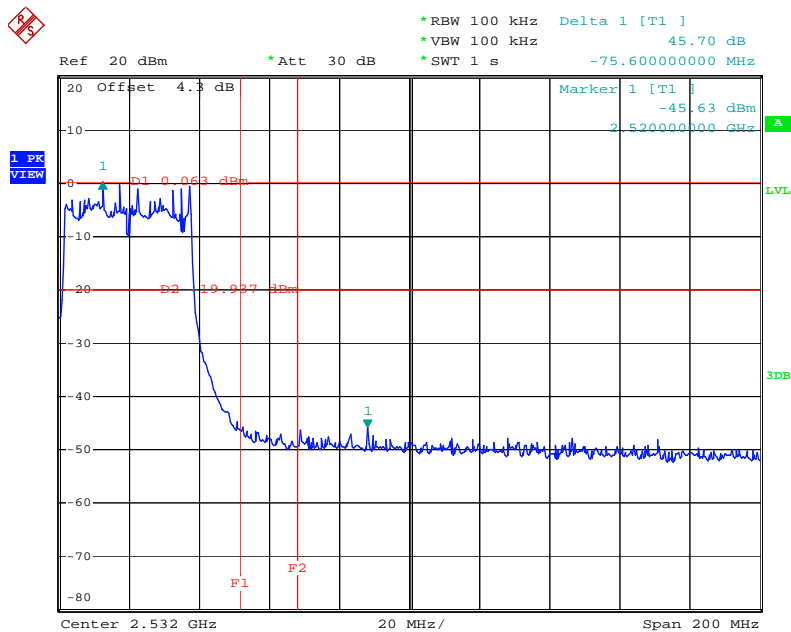


Date: 24.APR.2009 16:43:54

Low Band Edge Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5745 MHz

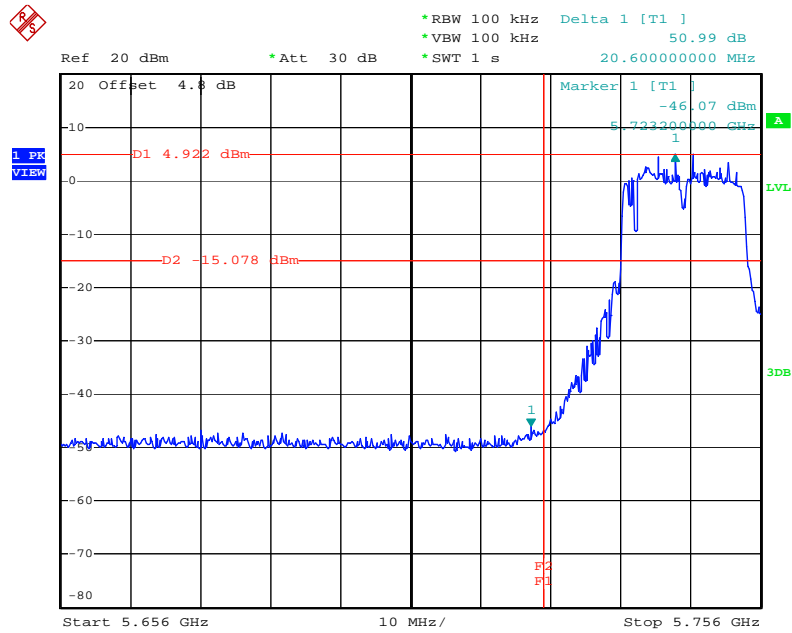


Date: 24.APR.2009 04:35:06

High Band Edge Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5825 MHz

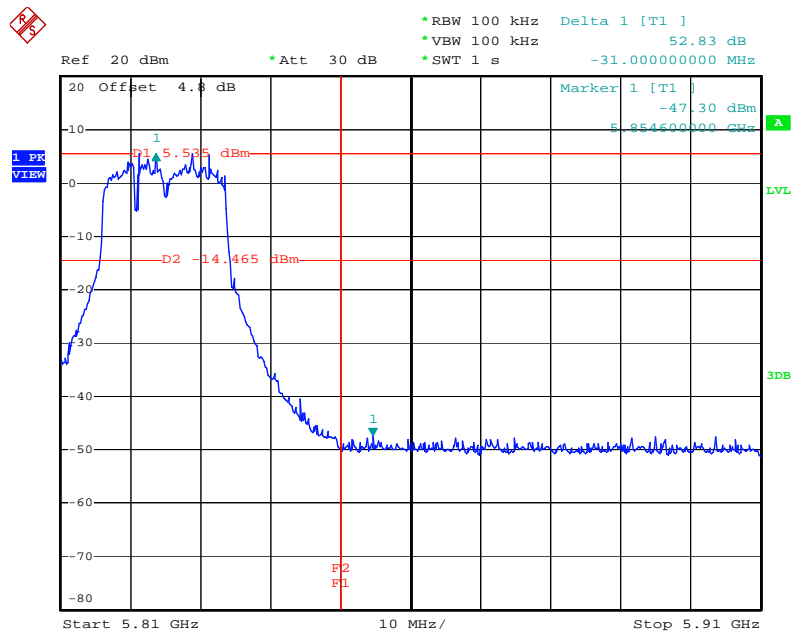


Date: 24.APR.2009 04:29:41

Low Band Edge Plot on Configuration 11a Draft n MCS8 40MHz Ant. 1 + Ant. 2 / 5755 MHz

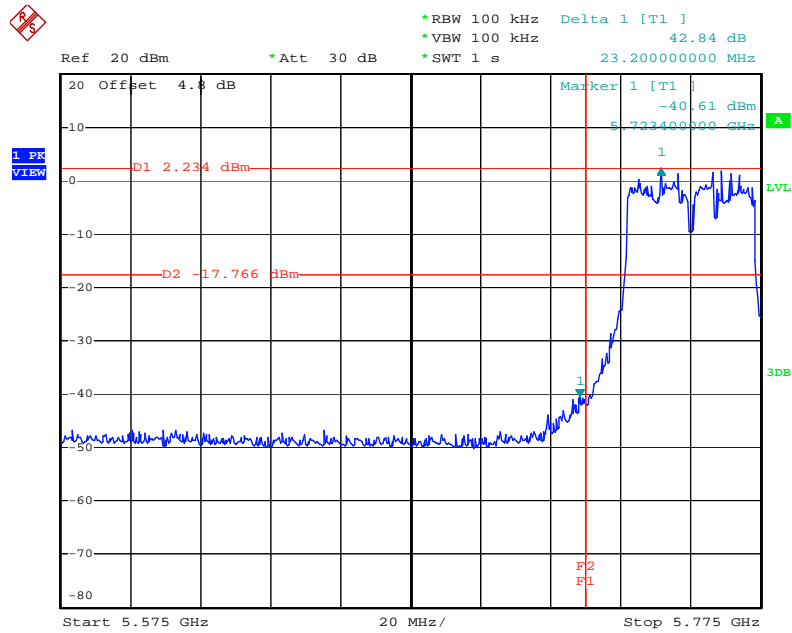

Date: 24.APR.2009 04:24:24


High Band Edge Plot on Configuration 11a Draft n MCS8 40MHz Ant. 1 + Ant. 2 / 5795 MHz

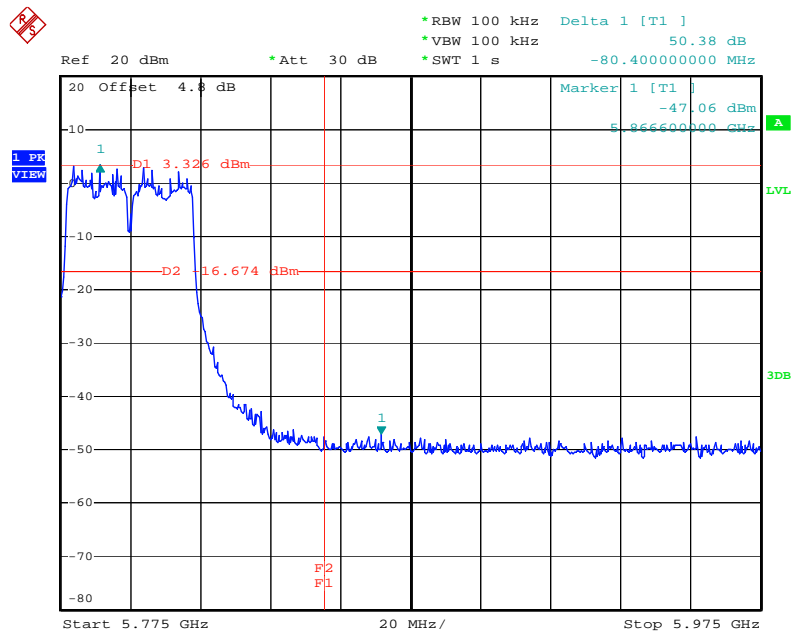

Date: 24.APR.2009 04:26:48


For Emission not in Restricted Band

Low Band Edge Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2412 MHz

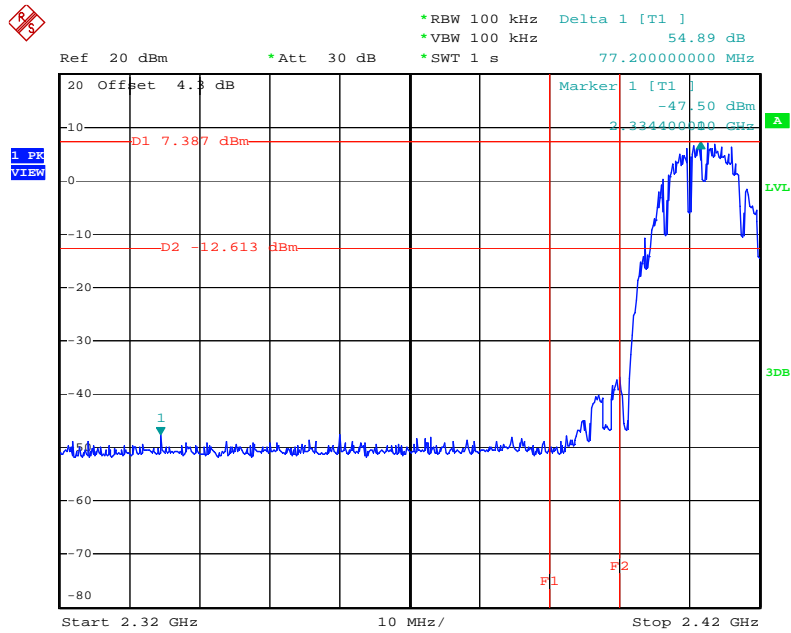


Date: 24.APR.2009 15:26:10

High Band Edge Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2462 MHz

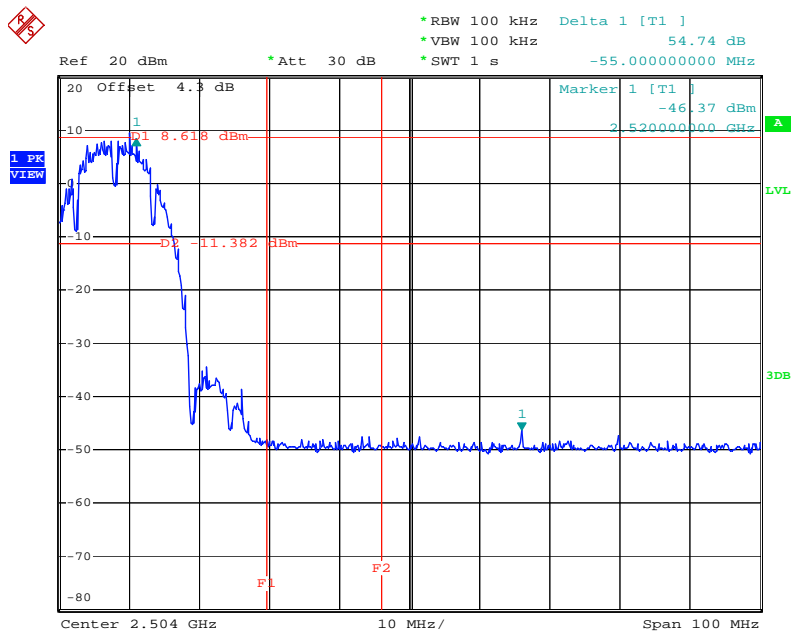


Date: 24.APR.2009 15:42:02

Low Band Edge Plot on Configuration IEEE 802.11g Ant. 1 + Ant. 2 / 2412 MHz

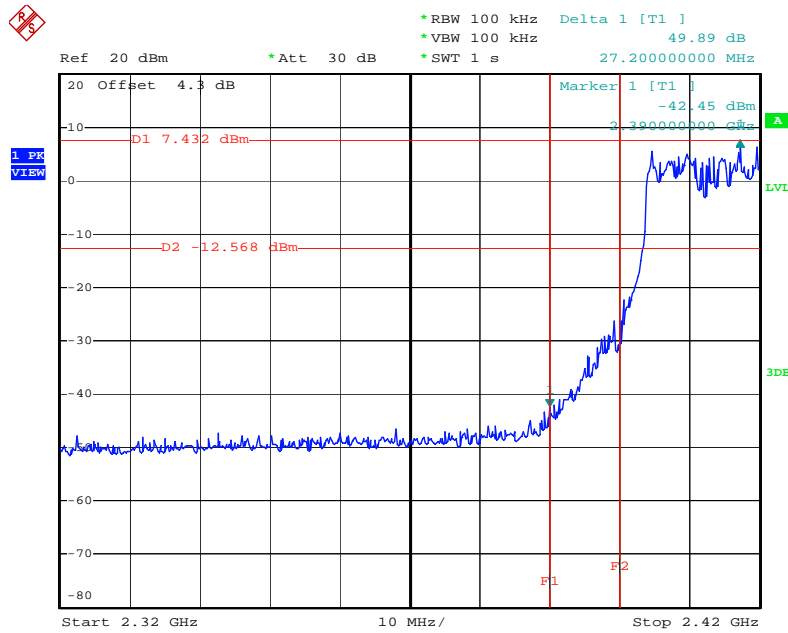


Date: 24.APR.2009 15:54:18

High Band Edge Plot on Configuration IEEE 802.11g Ant. 1 + Ant. 2 / 2462 MHz

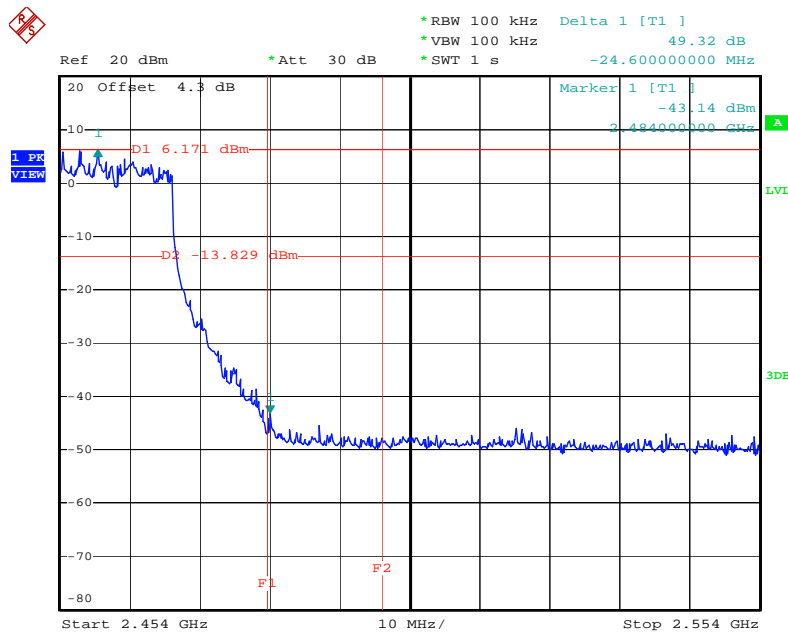


Date: 24.APR.2009 15:48:09

Low Band Edge Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5745 MHz

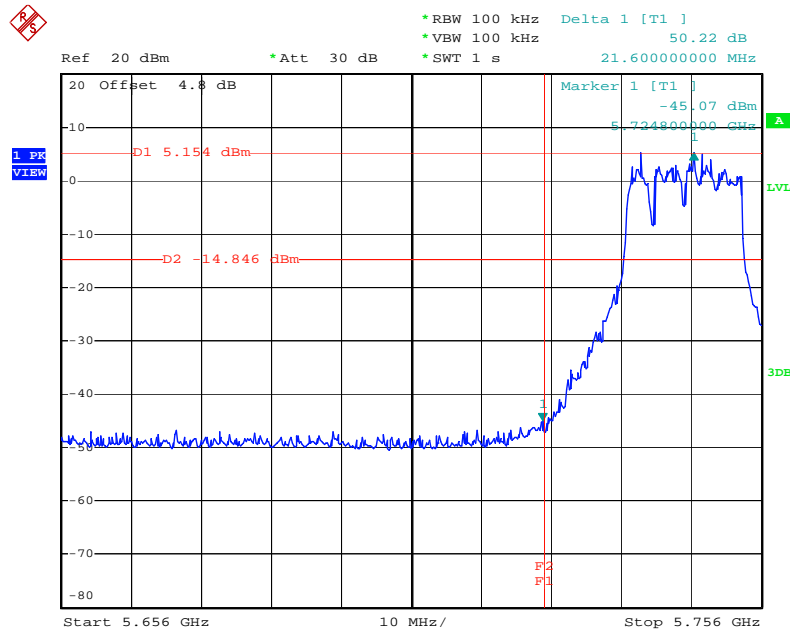

Date: 24.APR.2009 14:10:56

High Band Edge Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5825 MHz

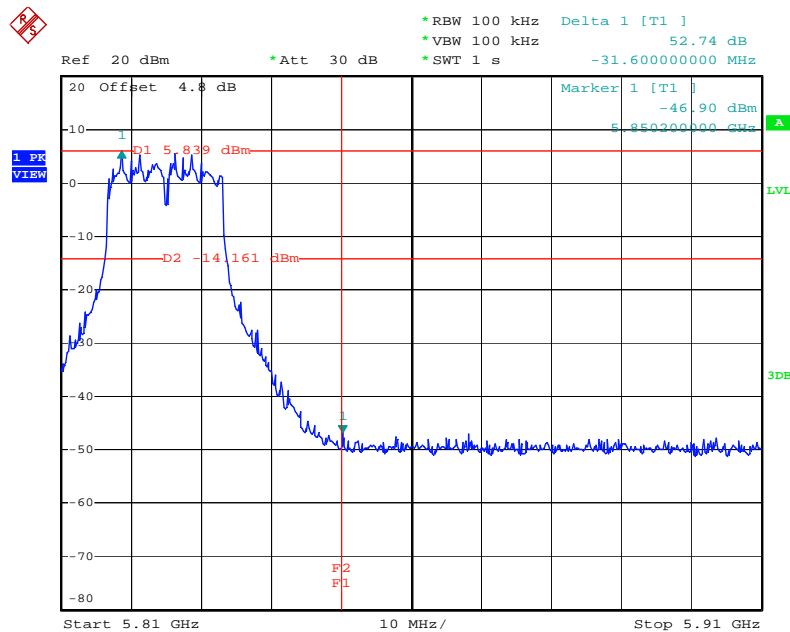

Date: 24.APR.2009 14:13:11

4.7. Antenna Requirements

4.7.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

4.7.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2008	Conduction (CO04-HY)
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	Apr. 15, 2009	Conduction (CO04-HY)
LISN	MessTec	NNB-2/16Z	99079	9kHz – 30MHz	Mar. 23, 2009	Conduction (CO04-HY)
LISN (Support Unit)	EMCO	3810/2NM	9703-1839	9kHz – 30MHz	Mar. 22, 2009	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2008	Conduction (CO04-HY)
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9kHz – 30MHz	Apr. 20, 2009	Conduction (CO04-HY)
ISN	SCHAFFNER	ISN T400	21653	9kHz – 30MHz	Jun 13, 2008	Conduction (CO04-HY)
EMI Filter	LINDGREN	LRE-2030	2651	< 450 Hz	N/A	Conduction (CO04-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30 MHz - 1 GHz 3m	Jun. 14, 2008	Radiation (03CH03-HY)
Amplifier	SCHAFFNER	COA9231A	18667	9 kHz - 2 GHz	Jan. 23, 2009	Radiation (03CH03-HY)
Amplifier	Agilent	8449B	3008A02120	1 GHz - 26.5 GHz	Jul. 21, 2008	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2008*	Radiation (03CH03-HY)
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5 GHz - 40 GHz	Apr. 06, 2009*	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSP30	100023	9 kHz - 30 GHz	Feb. 02, 2009	Radiation (03CH03-HY)
Loop Antenna	R&S	HFH2-Z2	860004/001	9 kHz - 30 MHz	Jul. 28, 2008*	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL 6112D	22237	30 MHz – 1 GHz	Jul. 12, 2008	Radiation (03CH03-HY)
Horn Antenna	EMCO	3115	6741	1GHz ~ 18GHz	Apr. 29, 2008	Radiation (03CH03-HY)
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15 GHz - 40 GHz	Jan.16, 2009	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30 MHz - 1 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1 GHz - 40 GHz	Jan. 05, 2009	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 – 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Spectrum Analyzer	R&S	FSU26.5	100015	20Hz ~ 26.5GHz	Oct. 29, 2008	Conducted (TH01-HY)
Power Meter	R&S	NRVS	100444	DC ~ 40GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z51	100458	DC ~ 30GHz	Jul. 11, 2008	Conducted (TH01-HY)
Power Sensor	R&S	NRV-Z32	100057	30MHz ~ 6GHz	Jul. 11, 2008	Conducted (TH01-HY)

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
AC Power Source	HPC	HPA-500W	HPA-9100024	AC 0 ~ 300V	May 30, 2008*	Conducted (TH01-HY)
DC Power Source	G.W.	GPC-6030D	C671845	DC 1V ~ 60V	Mar. 13, 2009	Conducted (TH01-HY)
Temp. and Humidity Chamber	Giant Force	GTH-225-20-S	MAB0103-001	N/A	Jul. 18, 2008	Conducted (TH01-HY)
RF CABLE-1m	Jye Bao	RG142	CB034-1m	20MHz ~ 7GHz	Dec. 01, 2008	Conducted (TH01-HY)
RF CABLE-2m	Jye Bao	RG142	CB035-2m	20MHz ~ 1GHz	Dec. 01, 2008	Conducted (TH01-HY)
Vector Signal Generator	R&S	SMU200A	102098	100kHz ~ 6GHz	Dec. 14, 2008	Conducted (TH01-HY)
Signal Generator	R&S	SMR40	100116	10MHz ~ 40GHz	Mar. 25, 2009	Conducted (TH01-HY)
Oscilloscope	Tektonix	TDS380	B016197	400MHz/ 2GS/s	Jun. 27, 2008	Conducted (TH01-HY)

Note: Calibration Interval of instruments listed above is one year.

Note: *Calibration Interval of instruments listed above is two year.

6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 nd Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085

7. TAF CERTIFICATE OF ACCREDITATION



Certificate No. : L1190-091230

財團法人全國認證基金會
Taiwan Accreditation Foundation

Certificate of Accreditation

This is to certify that

Sporton International Inc.
EMC & Wireless Communications Laboratory
No.52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien,
Taiwan, R.O.C.

is accredited in respect of laboratory

Accreditation Criteria	: ISO/IEC 17025:2005
Accreditation Number	: 1190
Originally Accredited	: December 15, 2003
Effective Period	: January 10, 2010 to January 09, 2013
Accredited Scope	: Testing Field, see described in the Appendix
Specific Accreditation Program	: Accreditation Program for Designated Testing Laboratory for Commodities Inspection Accreditation Program for Telecommunication Equipment Testing Laboratory Accreditation Program for BSMI Mutual Recognition Arrangement with Foreign Authorities

Jay-san Chen

Jay-San Chen
President, Taiwan Accreditation Foundation
Date : December 30, 2009

Pl, total 22 pages

The Appendix forms an integral part of this Certificate, which shall be invalid when use without the Appendix