



# FCC TEST REPORT (15.407)

**REPORT NO.:** RF130709E03-1

**MODEL NO.:** DCAW1R1-01

**FCC ID:** NKR-DTVDCCKII

**RECEIVED:** July 09, 2013

**TESTED:** July 11 to 30, 2013

**ISSUED:** Nov. 04, 2013

**APPLICANT:** Wistron NeWeb Corp.

**ADDRESS:** 20 Park Avenue II, Hsinchu Science  
Park, Hsinchu 308, Taiwan, R.O.C.

**ISSUED BY:** Bureau Veritas Consumer Products Services  
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

**LAB ADDRESS :** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (1):** No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

**TEST LOCATION (2):** No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,  
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,  
R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification

## Table of Contents

RELEASE CONTROL RECORD .....	4
1. CERTIFICATION .....	5
2. SUMMARY OF TEST RESULTS .....	6
2.1 MEASUREMENT UNCERTAINTY .....	7
3. GENERAL INFORMATION .....	8
3.1 GENERAL DESCRIPTION OF EUT .....	8
3.2 DESCRIPTION OF TEST MODES .....	11
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL .....	12
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS .....	14
3.4 DUTY CYCLE OF TEST SIGNAL .....	15
3.5 DESCRIPTION OF SUPPORT UNITS.....	18
3.6 CONFIGURATION OF SYSTEM UNDER TEST .....	18
4. TEST TYPES AND RESULTS .....	19
4.1 CONDUCTED EMISSION MEASUREMENT .....	19
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT .....	19
4.1.2 TEST INSTRUMENTS.....	19
4.1.3 TEST PROCEDURES .....	20
4.1.4 DEVIATION FROM TEST STANDARD .....	20
4.1.5 TEST SETUP .....	20
4.1.6 EUT OPERATING CONDITIONS .....	21
4.1.7 TEST RESULTS .....	22
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	24
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT .....	24
4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS.....	24
4.2.3 TEST INSTRUMENTS.....	25
4.2.4 TEST PROCEDURES .....	26
4.2.5 DEVIATION FROM TEST STANDARD .....	26
4.2.6 TEST SETUP .....	27
4.2.7 EUT OPERATING CONDITION.....	27
4.2.8 TEST RESULTS .....	28
4.3 TRANSMIT POWER MEASUREMENT .....	56
4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT .....	56
4.3.2 TEST INSTRUMENTS.....	56
4.3.3 TEST PROCEDURE.....	57
4.3.4 DEVIATION FROM TEST STANDARD .....	57
4.3.5 TEST SETUP .....	58
4.3.6 EUT OPERATING CONDITIONS .....	58
4.3.7 TEST RESULTS .....	59



A D T

4.4	PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	65
4.4.1	LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT .....	65
4.4.2	TEST INSTRUMENTS.....	65
4.4.3	TEST PROCEDURES .....	65
4.4.4	DEVIATION FROM TEST STANDARD .....	65
4.4.5	TEST SETUP .....	66
4.4.6	EUT OPERATING CONDITIONS .....	66
4.4.7	TEST RESULTS .....	67
4.5	PEAK POWER EXCURSION MEASUREMENT .....	69
4.5.1	LIMITS OF PEAK POWER EXCURSION MEASUREMENT .....	69
4.5.2	TEST INSTRUMENTS.....	69
4.5.3	TEST PROCEDURE.....	69
4.5.4	DEVIATION FROM TEST STANDARD .....	69
4.5.5	TEST SETUP .....	69
4.5.6	EUT OPERATING CONDITIONS .....	70
4.5.7	TEST RESULTS .....	71
4.6	FREQUENCY STABILITY.....	72
4.6.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT .....	72
4.6.2	TEST INSTRUMENTS.....	72
4.6.3	TEST PROCEDURE.....	72
4.6.4	DEVIATION FROM TEST STANDARD .....	73
4.6.5	TEST SETUP .....	73
4.6.6	EUT OPERATING CONDITION .....	73
4.6.7	TEST RESULTS .....	74
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	75
6.	INFORMATION ON THE TESTING LABORATORIES .....	76
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB.....	77



A D T

## RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF130709E03-1	Original release	Nov. 04, 2013



A D T

## 1. CERTIFICATION

**PRODUCT:** DIRECTV Cinema Connection Kit  
**BRAND NAME:** DIRECTV  
**MODEL NO.:** DCAW1R1-01  
**TEST SAMPLE:** ENGINEERING SAMPLE  
**APPLICANT:** Wistron NeWeb Corp.  
**TESTED:** July 11 to 30, 2013  
**STANDARDS:** FCC Part 15, Subpart E (Section 15.407)  
ANSI C63.10-2009

The above equipment (Model: DCAW1R1-01) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

**PREPARED BY :** Phoenix Huang , **DATE:** Nov. 04, 2013  
( Phoenix Huang, Specialist )

**APPROVED BY :** May Chen , **DATE:** Nov. 04, 2013  
( May Chen, Manager )



A D T

## 2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

For 5GHz, 5150~5350MHz & 5470~5600 & 5650~5725MHz

APPLIED STANDARD: FCC PART 15, SUBPART E (SECTION 15.407)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.407(b)(6)	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.62dB at 23.12891MHz
15.407(b)(1/2/3) (b)(5)	Spurious Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.5dB at 5150.00MHz, 5350.00MHz, 5470.00MHz, 5725.00MHz & 15900.00MHz, .
15.407(a)(1/2/3)	Transmit Power	PASS	Meet the requirement of limit.
15.407(a)(6)	Peak Power Excursion	PASS	Meet the requirement of limit.
15.407(a)(1/2/3)	Peak Power Spectral Density	PASS	Meet the requirement of limit.
15.407(g)	Frequency Stability	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is i-pec (MHF) not a standard connector.

**Note:**

1. The EUT was operating in 2400 ~ 2483.5MHz, 5.15~5.35GHz, 5.47~5.6GHz, 5.65~5.725GHz and 5.725~5.85GHz frequencies band. This report was recorded the RF parameters including 5.15~5.35GHz, 5.47~5.6GHz and 5.65~5.725GHz. For the 2400 ~ 2483.5MHz and 5.725~5.85GHz RF parameters was recorded in another test report.
2. The DFS report was recorded in another test report.



A D T

## 2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of  $k=2$ .

Measurement	Value
Conducted emissions	2.98 dB
Radiated emissions (30MHz-1GHz)	5.63 dB
Radiated emissions (1GHz -6GHz)	3.73 dB
Radiated emissions (6GHz -18GHz)	3.90 dB
Radiated emissions (18GHz -40GHz)	4.11 dB



A D T

### 3. GENERAL INFORMATION

#### 3.1 GENERAL DESCRIPTION OF EUT

<b>PRODUCT</b>	DIRECTV Cinema Connection Kit
<b>MODEL NO.</b>	DCAW1R1-01
<b>POWER SUPPLY</b>	DC 12V from power adapter
<b>MODULATION TYPE</b>	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
<b>MODULATION TECHNOLOGY</b>	DSSS,OFDM
<b>TRANSFER RATE</b>	802.11b: up to 11Mbps 802.11a/g: up to 54Mbps 802.11n: up to 450Mbps
<b>OPERATING FREQUENCY</b>	<b>For 15.407</b> 5.18 ~ 5.24GHz, 5.26 ~ 5.32GHz, 5.50 ~ 5.58GHz, 5.66GHz ~ 5.70GHz
	<b>For 15.247</b> 2.4GHz: 2.412 ~ 2.462GHz 5GHz: 5.745 ~ 5.825GHz
<b>NUMBER OF CHANNEL</b>	<b>For 15.407</b> 16 for 802.11a, 802.11n (HT20) 7 for 802.11n (HT40)
	<b>For 15.247 (2.4GHz)</b> 11 for 802.11b, 802.11g, 802.11n (HT20) <b>For 15.247 (5GHz)</b> 5 for 802.11a, 802.11n (HT20) 2 for 802.11n (HT40)



<b>MAXIMUM OUTPUT POWER</b>	<b>For 15.407</b> 802.11a: 102.802mW 802.11n (HT20): 177.630mW 802.11n (HT40): 129.072mW <b>For 15.247 (2.4GHz)</b> 802.11b: 68.707mW 802.11g: 263.633mW 802.11n (HT20): 954.694mW <b>For 15.247 (5GHz)</b> 802.11a: 183.231mW 802.11n (HT20): 558.985mW 802.11n (HT40): 471.450mW
<b>ANTENNA TYPE</b>	Please see NOTE
<b>DATA CABLE</b>	Ethernet cable (Unshielded, 1.8m) Coaxial cable (Shielded, 1.5m)
<b>I/O PORTS</b>	Refer to user's manual
<b>ASSOCIATED DEVICES</b>	Adapter × 1 Stand × 1

**NOTE:**

- The antennas provided to the EUT, please refer to the following table:

Transmitter Circuit	Brand	Model	Antenna Type	Antenna Gain (dBi) (Include cable loss)	Connector	Frequency range (MHz to MHz)
Chain (0)	Airgain	N2420DS	PIFA	3.1	i-pex(MHF)	2400~2490
				2.8		4900~5900
Chain (1)	Airgain	N2420DS	PIFA	3.1	i-pex(MHF)	2400~2490
				2.8		4900~5900
Chain (2)	Airgain	N2420DS	PIFA	3.1	i-pex(MHF)	2400~2490
				2.8		4900~5900
Note:	1. For 802.11b mode will fix transmission on Chain (0). 2. For 802.11g the worst case was found in Chain (1). Therefore only the test data of the mode was recorded in this report. 3. For 802.11a the worst case was found in Chain (0). Therefore only the test data of the mode was recorded in this report.					

- The EUT must be supplied with a power adapter as below:

Brand	Model No.	Spec.
DIRECTV	EPS10R1-16	AC Input: 120Vac, 0.5A, 60Hz AC Input cable (shielded, 0.9m) DC Output: 12Vdc, 1.5A DC Output cable (unshielded, 1.8m, with one core)



A D T

3. The EUT incorporates a MIMO function without beam forming.

<b>MODULATION MODE</b>	<b>TX/RX FUNCTION</b>
<b>802.11a</b>	1TX (Diversity) / 3RX
<b>802.11b</b>	1TX / 3RX
<b>802.11g</b>	1TX (Diversity) / 3RX
<b>802.11n (HT20)</b>	3TX/3RX
<b>802.11n (HT40) (for 5G Band)</b>	3TX/3RX

4. 2.4GHz and 5GHz technology cannot transmit at same time.
5. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 23.
6. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



### 3.2 DESCRIPTION OF TEST MODES

#### Operated in 5150 ~ 5350MHz band:

8 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
36	5180 MHz	52	5260 MHz
40	5200 MHz	56	5280 MHz
44	5220 MHz	60	5300 MHz
48	5240 MHz	64	5320 MHz

4 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY
38	5190 MHz
46	5230 MHz
54	5270 MHz
62	5310 MHz

#### Operated in 5470MHz ~ 5600MHz & 5650MHz ~ 5725MHz bands:

8 channels are provided for 802.11a, 802.11n (HT20):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
100	5500 MHz	116	5580 MHz
104	5520 MHz	132	5660 MHz
108	5540 MHz	136	5680 MHz
112	5560 MHz	140	5700 MHz

3 channels are provided for 802.11n (HT40):

CHANNEL	FREQUENCY
102	5510 MHz
110	5550 MHz
134	5670 MHz

### 3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	
-	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission      **RE < 1G**: Radiated Emission below 1GHz

**RE ≥ 1G**: Radiated Emission above 1GHz      **APCM**: Antenna Port Conducted Measurement

Note: The EUT had been pre-tested on the positioned of each 2 axis. The worst case was found when positioned on **Y-plane**.

#### **POWER LINE CONDUCTED EMISSION TEST:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	36 to 140	60	OFDM	BPSK	6.5

#### **RADIATED EMISSION TEST (BELOW 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (HT20)	36 to 140	60	OFDM	BPSK	6.5

**RADIATED EMISSION TEST (ABOVE 1 GHz):**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 140	36, 40, 48, 52, 60, 64, 100, 116, 132, 140	OFDM	BPSK	6
802.11n (HT20)	36 to 140	36, 40, 48, 52, 60, 64, 100, 116, 132, 140	OFDM	BPSK	6.5
802.11n (HT40)	38 to 134	38, 46, 54, 62, 102, 110, 134	OFDM	BPSK	13.5

**ANTENNA PORT CONDUCTED MEASUREMENT:**

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11a	36 to 140	36, 40, 48, 52, 60, 64, 100, 116, 132, 140	OFDM	BPSK	6
802.11n (HT20)	36 to 140	36, 40, 48, 52, 60, 64, 100, 116, 132, 140	OFDM	BPSK	6.5
802.11n (HT40)	38 to 134	38, 46, 54, 62, 102, 110, 134	OFDM	BPSK	13.5

**TEST CONDITION:**

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	26deg. C, 66%RH	120Vac, 60Hz	Jyunchun Lin
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Chilin Lee
RE <sup>3</sup> 1G	24deg. C, 63%RH	120Vac, 60Hz	Tim Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Robert Cheng

### 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

**FCC Part 15, Subpart E (15.407)**

**789033 D01 General UNII Test Procedures v01 r03**

**662911 D01 Multiple Transmitter Output v01 r02**

**ANSI C63.10-2009**

All test items have been performed and recorded as per the above standards.

**Note:** The EUT has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.




A D T

### 3.4 DUTY CYCLE OF TEST SIGNAL

Duty cycle of test signal is 100 %, duty factor is not required.


#### 802.11a

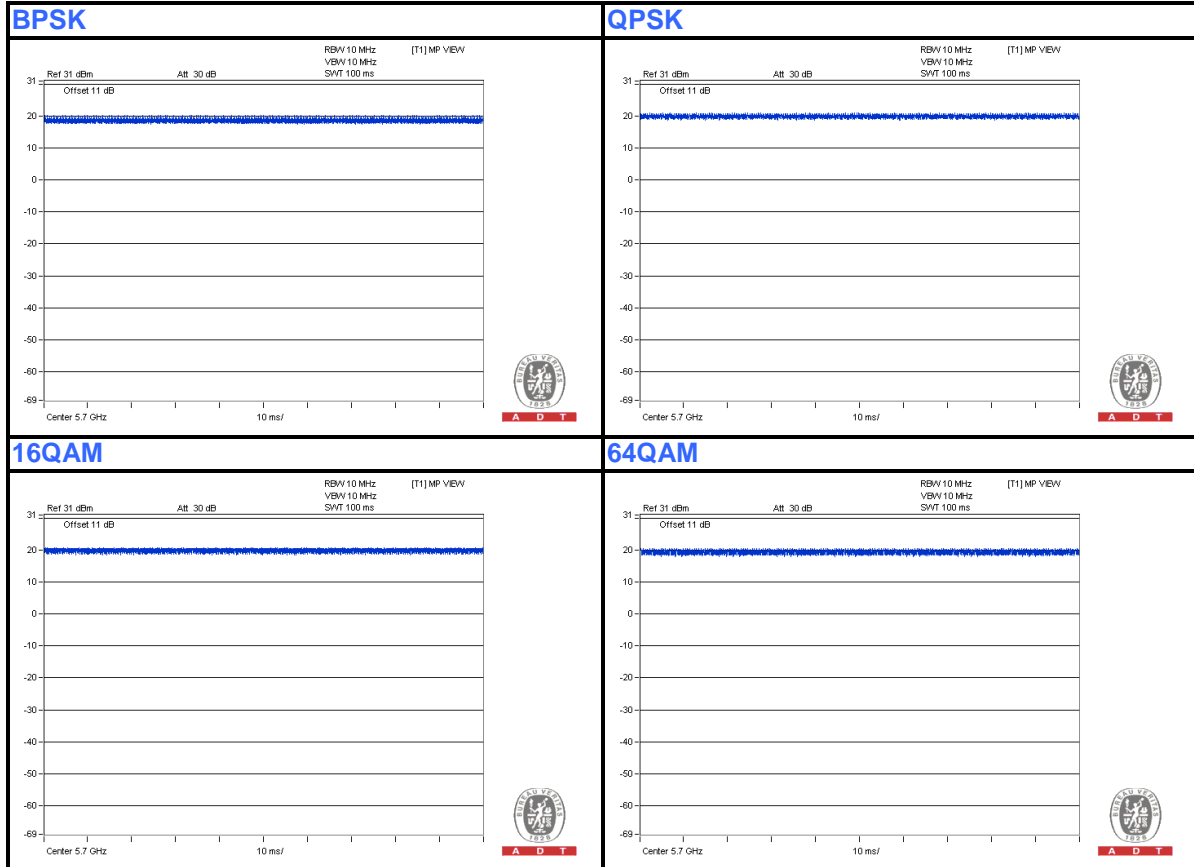



A D T

### 802.11n (HT20)

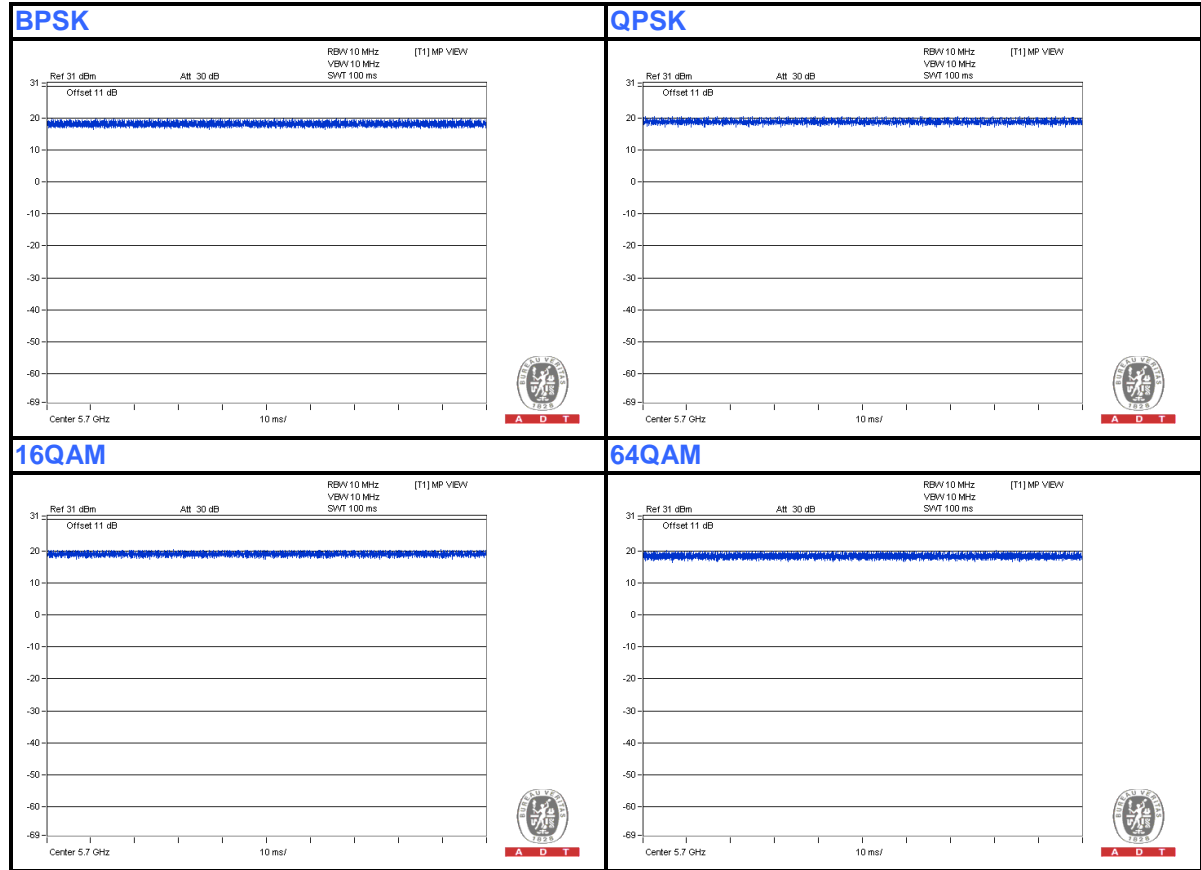






A D T

### 802.11n (HT40)

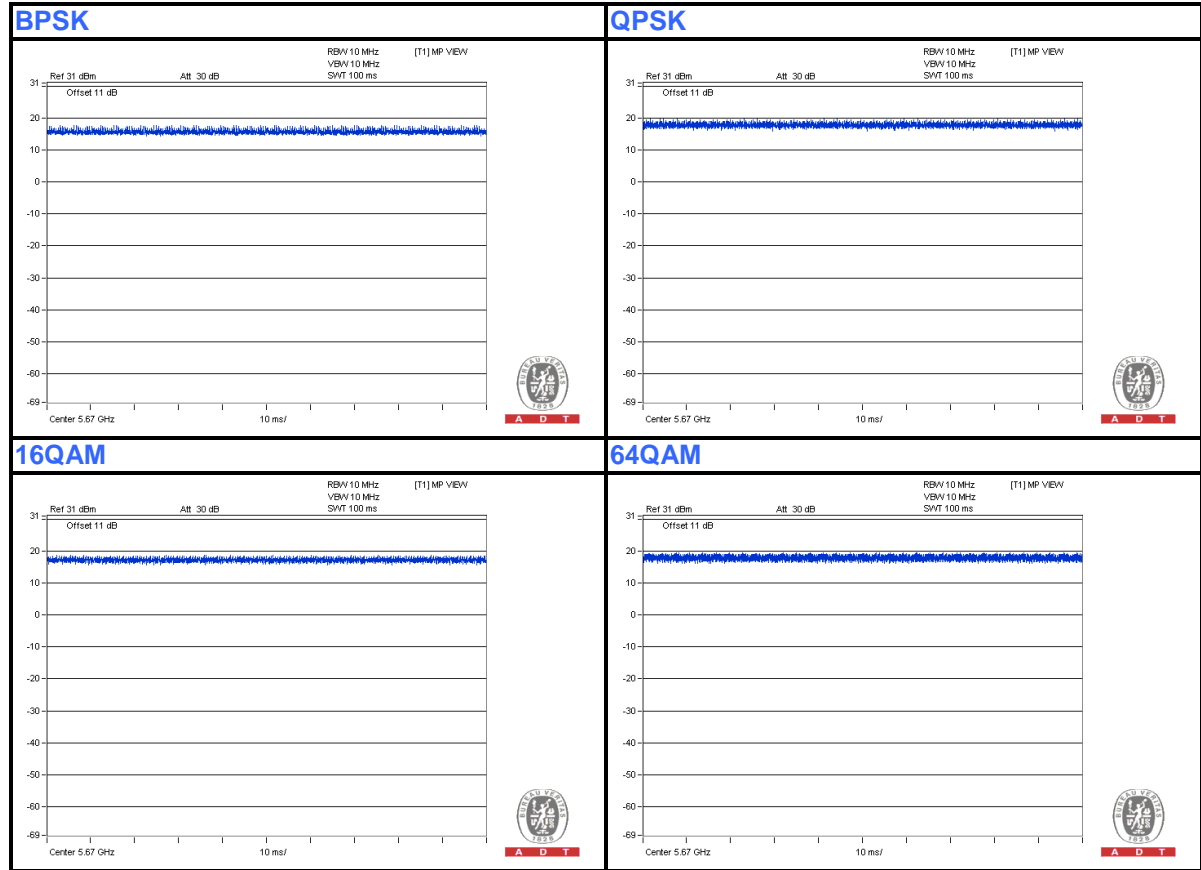

### 3.5 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP Cable, 10m

**NOTE:** All power cords of the above support units are non shielded (1.8m).

### 3.6 CONFIGURATION OF SYSTEM UNDER TEST

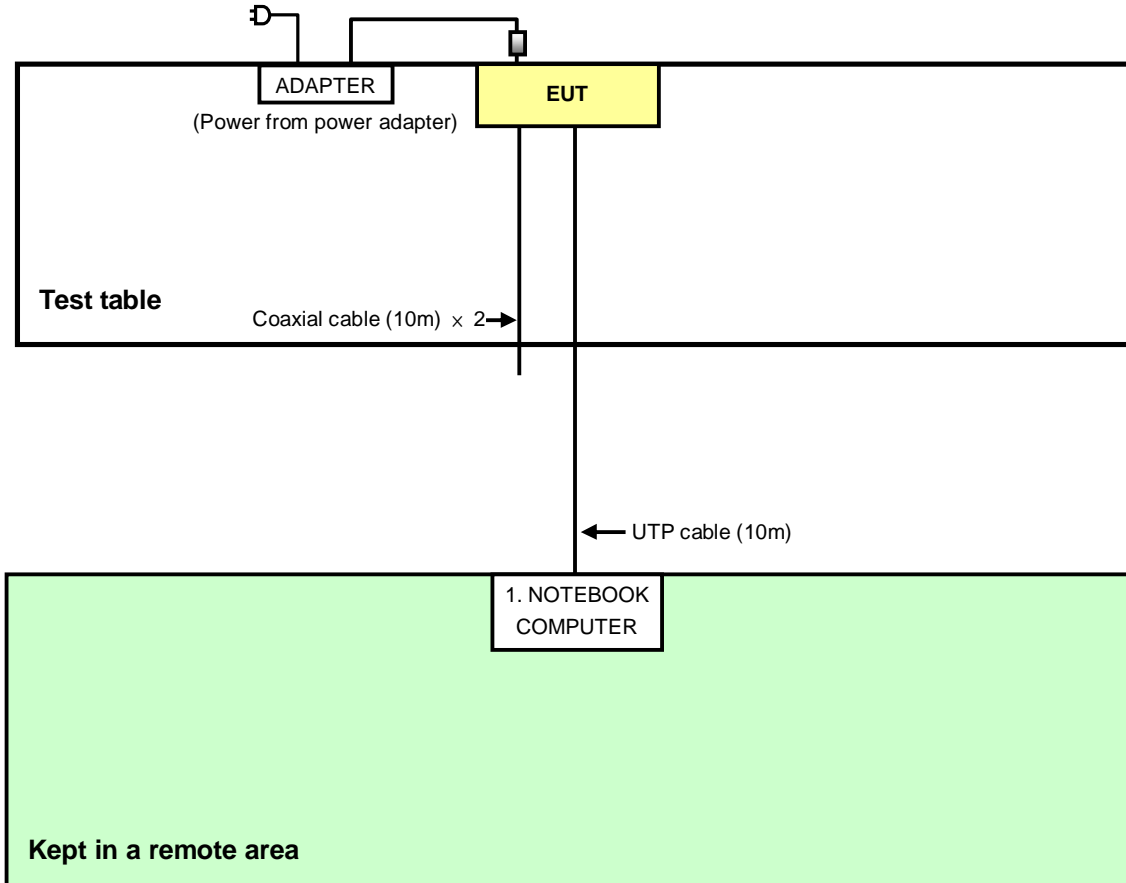

## 4. TEST TYPES AND RESULTS

### 4.1 CONDUCTED EMISSION MEASUREMENT

#### 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB $\mu$ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
  2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

#### 4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS 30	100375	Mar. 08, 2013	Mar. 07, 2014
Line-Impedance Stabilization Network (for EUT) SCHWARZBECK	NSLK8127	8127-522	Sep. 06, 2012	Sep. 05, 2013
Line-Impedance Stabilization Network (for Peripheral)	ENV216	100072	June 07, 2013	June 06, 2014
RF Cable (JYEBAO)	5DFB	COCCAB-001	Mar. 11, 2013	Mar. 10, 2014
50 ohms Terminator	50	EMC-3	Sep. 25, 2012	Sep. 24, 2013
Software ADT	BV ADT_Cond_V7.3.7. 3	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. C.
3. The VCCI Con C Registration No. is C-3611.
4. Tested Date: July 11, 2013

### 4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN.
- b. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- c. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- d. The frequency range from 150kHz to 30MHz was searched. Emission level under (Limit – 20dB) was not recorded.


**NOTE:**

1. The resolution bandwidth of test receiver is 9kHz for Quasi-peak detection (QP) & Average detection (AV).

### 4.1.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.1.5 TEST SETUP

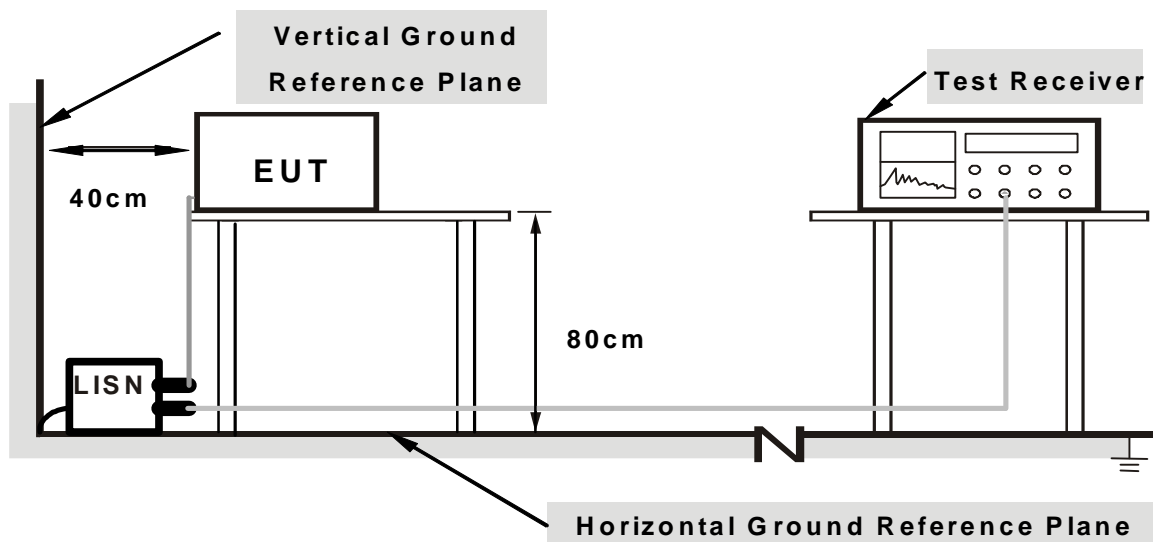

**Note: 1.Support units were connected to second LISN.**

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.1.6 EUT OPERATING CONDITIONS

1. Turn on the power of EUT.
2. The communication partner run test program “DUT GUI.exe[1.0.0.0]” to enable EUT under transmission/receiving condition continuously at specific channel frequency.



A D T


#### 4.1.7 TEST RESULTS

PHASE	Line (L)	DETECTOR FUNCTION	Quasi-Peak (QP) / Average (AV)
-------	----------	-------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.17628	0.13	42.43	32.51	42.56	32.64	64.66	54.66	-22.10
2	0.41563	0.18	34.08	26.60	34.26	26.78	57.54	47.54	-23.27	-20.75
3	0.83750	0.21	25.48	21.30	25.69	21.51	56.00	46.00	-30.31	-24.49
4	2.59375	0.30	25.72	20.63	26.02	20.93	56.00	46.00	-29.98	-25.07
5	4.34375	0.38	23.59	19.50	23.97	19.88	56.00	46.00	-32.03	-26.12
<b>6</b>	<b>23.12891</b>	<b>1.13</b>	<b>38.08</b>	<b>35.25</b>	<b>39.21</b>	<b>36.38</b>	<b>60.00</b>	<b>50.00</b>	<b>-20.79</b>	<b>-13.62</b>

#### REMARKS:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

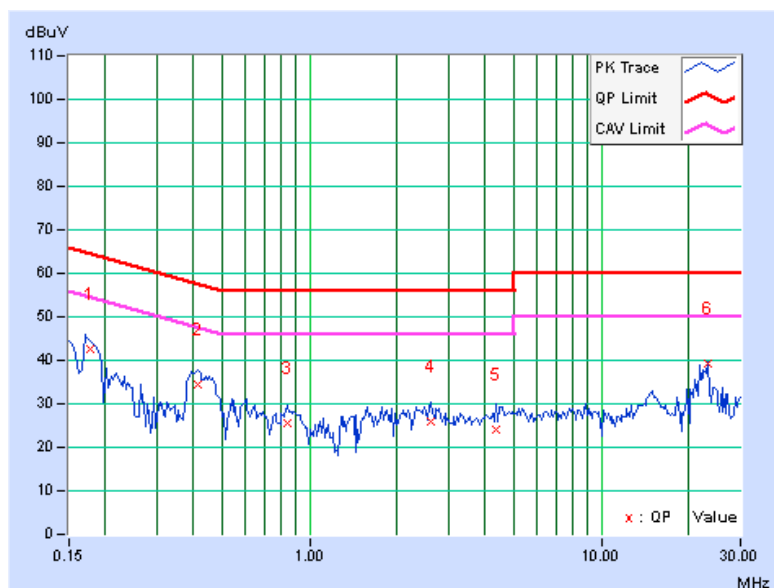


<b>PHASE</b>	Neutral (N)	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP) / Average (AV)
--------------	-------------	--------------------------	--------------------------------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
	1	0.17344	0.11	41.53	30.30	41.64	30.41	64.79	54.79	-23.15
2	0.39609	0.17	34.69	30.35	34.86	30.52	57.93	47.93	-23.08	-17.42
3	0.58750	0.18	29.87	25.18	30.05	25.36	56.00	46.00	-25.95	-20.64
4	0.88828	0.19	27.82	22.80	28.01	22.99	56.00	46.00	-27.99	-23.01
5	14.86719	0.65	29.72	22.75	30.37	23.40	60.00	50.00	-29.63	-26.60
6	21.66406	0.76	37.19	34.07	37.95	34.83	60.00	50.00	-22.05	-15.17

**REMARKS:**

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission Level – Limit value
4. Correction Factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

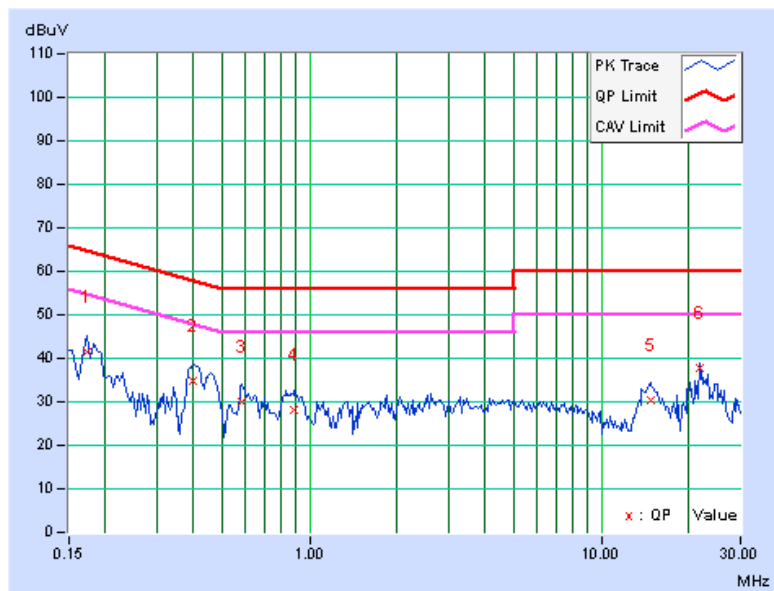



A D T

## 4.2 RADIATED EMISSION AND BANDEGE MEASUREMENT

### 4.2.1 LIMITS OF RADIATED EMISSION AND BANDEGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

**NOTE:**

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

### 4.2.2 LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

APPLICABLE TO	LIMIT	
-	FIELD STRENGTH AT 3m (dBµV/m)	
	PK	AV
	74	54
√	EIRP LIMIT (dBm)	EQUIVALENT FIELD STRENGTH AT 3m (dBµV/m)
	PK	PK
	-27	68.3

**NOTE:**

1. The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).$$





A D T

#### 4.2.3 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer Agilent	E4446A	MY48250253	Sep. 03, 2012	Sep. 02, 2013
MXE EMI Receiver Agilent	N9038A	MY51210105	Jan. 29,2013	Jan. 28,2014
Pre-Amplifier Mini-Circuits	ZFL-1000VH2 B	AMP-ZFL-03	Nov. 14, 2012	Nov. 13, 2013
Pre-Amplifier Agilent	8449B	3008A02578	June 25, 2013	June 24, 2014
Pre-Amplifier SPACEK LABS	SLKKa-48-6	9K16	Nov. 14, 2012	Nov. 13, 2013
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-360	Mar. 19, 2013	Mar. 18, 2014
Horn_Antenna AISi	AIH.8018	0000320091110	Nov. 19, 2012	Nov. 18, 2013
Horn_Antenna SCHWARZBECK	BBHA 9170	9170-424	Oct. 12, 2012	Oct. 11, 2013
RF Cable	NA	RF104-201 RF104-203 RF104-204	Dec. 25, 2012	Dec. 24, 2013
RF Cable	NA	CHGCAB_001	Oct. 06, 2012	Oct. 05, 2013
Software	ADT_Radiated _V8.7.05	NA	NA	NA
Antenna Tower & Turn Table CT	NA	NA	NA	NA

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
- 3 The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
- 5 The VCCI Site Registration No. is G-137.
- 6 The CANADA Site Registration No. is IC 7450H-2.
- 7 Tested Date: July 19 to 30, 2013

#### 4.2.4 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.


**NOTE:**

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

#### 4.2.5 DEVIATION FROM TEST STANDARD

No deviation

#### 4.2.6 TEST SETUP

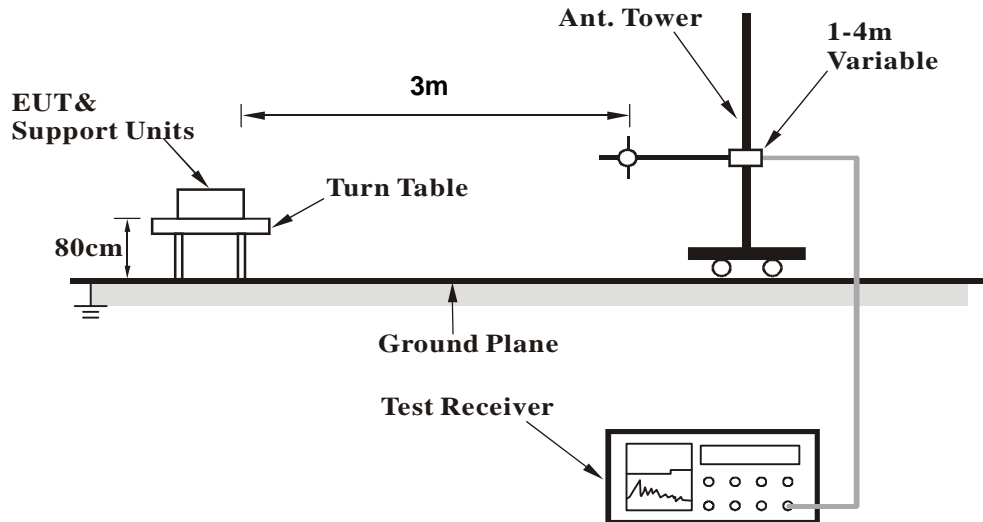

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

#### 4.2.7 EUT OPERATING CONDITION

Same as 4.1.6



A D T

### 4.2.8 TEST RESULTS

#### BELOW 1GHz WORST-CASE DATA

##### 802.11n (HT20)

<b>CHANNEL</b>	TX Channel 60	<b>DETECTOR FUNCTION</b>	Quasi-Peak (QP)
<b>FREQUENCY RANGE</b>	Below 1GHz		

#### ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	61.00	35.6 QP	40.0	-4.4	1.00 H	336	49.62	-14.03
2	76.00	35.5 QP	40.0	-4.6	1.00 H	286	52.94	-17.49
3	147.00	34.1 QP	43.5	-9.4	2.00 H	90	47.76	-13.64
4	400.01	34.6 QP	46.0	-11.4	1.00 H	41	44.87	-10.25
5	572.10	40.6 QP	46.0	-5.4	2.00 H	216	47.03	-6.43
6	993.00	36.5 QP	54.0	-17.6	2.00 H	199	35.56	0.89

#### ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	79.00	33.8 QP	40.0	-6.2	1.00 V	2	51.62	-17.86
2	97.00	33.6 QP	43.5	-9.9	1.00 V	166	52.45	-18.89
3	267.00	31.0 QP	46.0	-15.0	2.00 V	3	45.03	-14.04
4	391.00	36.2 QP	46.0	-9.8	1.00 V	5	46.59	-10.39
5	806.00	29.9 QP	46.0	-16.1	2.00 V	7	31.76	-1.85
6	999.80	39.5 QP	54.0	-14.5	1.00 V	330	38.52	0.95

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value



## ABOVE 1GHz DATA

### 802.11a

<b>CHANNEL</b>	TX Channel 36	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.8 PK	74.0	-9.2	1.12 H	258	56.20	8.60
2	5150.00	53.2 AV	54.0	-0.8	1.12 H	258	44.60	8.60
3	*5180.00	109.4 PK			1.12 H	258	100.64	8.76
4	*5180.00	102.0 AV			1.12 H	258	93.24	8.76
5	#6906.67	65.1 PK	68.3	-3.2	1.11 H	263	50.00	15.10
6	#10360.00	58.3 PK	68.3	-10.0	1.06 H	296	42.76	15.54
7	15540.00	60.2 PK	74.0	-13.8	1.01 H	123	37.83	22.37
8	15540.00	49.6 AV	54.0	-4.4	1.01 H	123	27.23	22.37
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	56.3 PK	74.0	-17.7	1.10 V	278	47.70	8.60
2	5150.00	47.1 AV	54.0	-6.9	1.10 V	278	38.50	8.60
3	*5180.00	101.4 PK			1.10 V	278	92.64	8.76
4	*5180.00	94.0 AV			1.10 V	278	85.24	8.76
5	#6906.67	56.2 PK	68.3	-12.1	1.04 V	266	41.10	15.10
6	#10360.00	59.8 PK	68.3	-8.5	1.06 V	300	44.26	15.54
7	15540.00	61.4 PK	74.0	-12.6	1.00 V	134	39.03	22.37
8	15540.00	50.6 AV	54.0	-3.4	1.00 V	134	28.23	22.37

#### REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.0 PK	74.0	-11.0	1.11 H	254	54.40	8.60
2	5150.00	51.6 AV	54.0	-2.4	1.11 H	254	43.00	8.60
3	*5200.00	108.7 PK			1.11 H	254	99.83	8.87
4	*5200.00	101.2 AV			1.11 H	254	92.33	8.87
5	5350.00	62.7 PK	74.0	-11.3	1.11 H	254	53.39	9.31
6	5350.00	50.6 AV	54.0	-3.4	1.11 H	254	41.29	9.31
7	#6933.33	64.9 PK	68.3	-3.4	1.08 H	245	49.65	15.25
8	#10400.00	57.6 PK	68.3	-10.7	1.04 H	278	42.42	15.18
9	15600.00	59.4 PK	74.0	-14.6	1.06 H	101	37.28	22.12
10	15600.00	49.1 AV	54.0	-4.9	1.06 H	101	26.98	22.12

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.3 PK	74.0	-18.7	1.02 V	257	46.70	8.60
2	5150.00	46.1 AV	54.0	-7.9	1.02 V	257	37.50	8.60
3	*5200.00	100.5 PK			1.02 V	257	91.63	8.87
4	*5200.00	92.9 AV			1.02 V	257	84.03	8.87
5	5350.00	54.8 PK	74.0	-19.2	1.02 V	257	45.49	9.31
6	5350.00	45.5 AV	54.0	-8.5	1.02 V	257	36.19	9.31
7	#6933.33	56.7 PK	68.3	-11.6	1.15 V	266	41.45	15.25
8	#10400.00	59.3 PK	68.3	-9.0	1.03 V	292	44.12	15.18
9	15600.00	60.5 PK	74.0	-13.5	1.05 V	115	38.38	22.12
10	15600.00	50.1 AV	54.0	-3.9	1.05 V	115	27.98	22.12

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	62.1 PK	74.0	-11.9	1.09 H	255	53.50	8.60
2	5150.00	50.6 AV	54.0	-3.4	1.09 H	255	42.00	8.60
3	*5240.00	109.8 PK			1.09 H	255	100.79	9.01
4	*5240.00	102.3 AV			1.09 H	255	93.29	9.01
5	5350.00	63.0 PK	74.0	-11.0	1.09 H	255	53.69	9.31
6	5350.00	51.1 AV	54.0	-2.9	1.09 H	255	41.79	9.31
7	#6986.67	65.0 PK	68.3	-3.3	1.16 H	255	49.44	15.56
8	#10480.00	58.4 PK	68.3	-9.9	1.05 H	290	42.60	15.80
9	15720.00	59.7 PK	74.0	-14.3	1.00 H	120	37.90	21.80
10	15720.00	49.1 AV	54.0	-4.9	1.00 H	120	27.30	21.80

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	55.5 PK	74.0	-18.5	1.01 V	279	46.90	8.60
2	5150.00	46.4 AV	54.0	-7.6	1.01 V	279	37.80	8.60
3	*5240.00	101.4 PK			1.01 V	279	92.39	9.01
4	*5240.00	94.0 AV			1.01 V	279	84.99	9.01
5	5350.00	54.5 PK	74.0	-19.5	1.01 V	279	45.19	9.31
6	5350.00	45.7 AV	54.0	-8.3	1.01 V	279	36.39	9.31
7	#6986.67	56.1 PK	68.3	-12.2	1.10 V	272	40.54	15.56
8	#10480.00	60.1 PK	68.3	-8.2	1.06 V	307	44.30	15.80
9	15720.00	60.4 PK	74.0	-13.6	1.06 V	126	38.60	21.80
10	15720.00	49.7 AV	54.0	-4.3	1.06 V	126	27.90	21.80

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 52	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	111.7 PK			1.00 H	278	102.63	9.07
2	*5260.00	104.2 AV			1.00 H	278	95.13	9.07
3	#7013.33	65.1 PK	68.3	-3.2	1.10 H	245	49.47	15.63
4	#10520.00	61.3 PK	68.3	-7.0	1.06 H	296	45.32	15.98
5	15780.00	63.2 PK	74.0	-10.8	1.01 H	123	41.21	21.99
6	15780.00	51.6 AV	54.0	-2.4	1.01 H	123	29.61	21.99

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	103.5 PK			1.02 V	282	94.43	9.07
2	*5260.00	95.9 AV			1.02 V	282	86.83	9.07
3	#7013.33	56.2 PK	68.3	-12.1	1.10 V	282	40.57	15.63
4	#10520.00	60.8 PK	68.3	-7.5	1.00 V	272	44.82	15.98
5	15780.00	64.4 PK	74.0	-9.6	1.00 V	118	42.41	21.99
6	15780.00	53.0 AV	54.0	-1.0	1.00 V	118	31.01	21.99

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.





A D T

<b>CHANNEL</b>	TX Channel 60	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	112.2 PK			1.00 H	277	102.99	9.21
2	*5300.00	104.6 AV			1.00 H	277	95.39	9.21
3	#7066.67	64.6 PK	68.3	-3.7	1.14 H	253	49.01	15.59
4	10600.00	61.9 PK	74.0	-12.1	1.03 H	291	45.78	16.12
5	10600.00	48.9 AV	54.0	-5.1	1.03 H	291	32.78	16.12
6	15900.00	63.2 PK	74.0	-10.8	1.06 H	92	41.10	22.10
7	15900.00	51.6 AV	54.0	-2.4	1.06 H	92	29.50	22.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	102.6 PK			1.04 V	264	93.39	9.21
2	*5300.00	95.4 AV			1.04 V	264	86.19	9.21
3	#7066.67	55.9 PK	68.3	-12.4	1.05 V	280	40.31	15.59
4	10600.00	61.3 PK	74.0	-12.7	1.05 V	293	45.18	16.12
5	10600.00	49.9 AV	54.0	-4.1	1.05 V	293	33.78	16.12
6	15900.00	64.4 PK	74.0	-9.6	1.05 V	119	42.30	22.10
7	<b>15900.00</b>	<b>53.5 AV</b>	<b>54.0</b>	<b>-0.5</b>	<b>1.05 V</b>	<b>119</b>	<b>31.40</b>	<b>22.10</b>

**REMARKS:**

- Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
- Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
- The other emission levels were very low against the limit.
- Margin value = Emission Level – Limit value
- " \* ": Fundamental frequency.
- " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 64	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	109.6 PK			1.09 H	257	100.35	9.25
2	*5320.00	101.9 AV			1.09 H	257	92.65	9.25
3	5350.00	64.9 PK	74.0	-9.1	1.09 H	257	55.59	9.31
4	<b>5350.00</b>	<b>53.5 AV</b>	<b>54.0</b>	<b>-0.5</b>	<b>1.09 H</b>	<b>257</b>	<b>44.19</b>	<b>9.31</b>
5	#7093.33	64.2 PK	68.3	-4.1	1.07 H	243	48.62	15.58
6	10640.00	61.6 PK	74.0	-12.4	1.00 H	307	45.34	16.26
7	10640.00	48.6 AV	54.0	-5.4	1.00 H	307	32.34	16.26
8	15960.00	62.8 PK	74.0	-11.2	1.06 H	93	40.82	21.98
9	15960.00	51.1 AV	54.0	-2.9	1.06 H	93	29.12	21.98

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	101.1 PK			1.06 V	253	91.85	9.25
2	*5320.00	94.1 AV			1.06 V	253	84.85	9.25
3	5350.00	56.9 PK	74.0	-17.1	1.06 V	253	47.59	9.31
4	5350.00	47.5 AV	54.0	-6.5	1.06 V	253	38.19	9.31
5	#7093.33	56.5 PK	68.3	-11.8	1.07 V	278	40.92	15.58
6	10640.00	59.6 PK	74.0	-14.4	1.01 V	275	43.34	16.26
7	10640.00	47.3 AV	54.0	-6.7	1.01 V	275	31.04	16.26
8	15960.00	61.6 PK	74.0	-12.4	1.01 V	148	39.62	21.98
9	15960.00	50.8 AV	54.0	-3.2	1.01 V	148	28.82	21.98

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 100	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	62.9 PK	74.0	-11.1	1.05 H	272	53.25	9.65
2	5460.00	52.1 AV	54.0	-1.9	1.05 H	272	42.45	9.65
3	#5470.00	67.1 PK	68.3	-1.2	1.05 H	272	57.41	9.69
4	*5500.00	109.5 PK			1.05 H	272	99.69	9.81
5	*5500.00	101.2 AV			1.05 H	272	91.39	9.81
6	7333.33	61.4 PK	74.0	-12.6	1.08 H	253	45.90	15.50
7	7333.33	50.4 AV	54.0	-3.6	1.08 H	253	34.90	15.50
8	11000.00	61.1 PK	74.0	-12.9	1.00 H	279	43.50	17.60
9	11000.00	48.2 AV	54.0	-5.8	1.00 H	279	30.60	17.60
10	#16500.00	62.0 PK	68.3	-6.3	1.09 H	79	37.86	24.14

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	56.5 PK	74.0	-17.5	1.09 V	246	46.85	9.65
2	5460.00	45.5 AV	54.0	-8.5	1.09 V	246	35.85	9.65
3	#5470.00	61.2 PK	68.3	-7.1	1.09 V	246	51.51	9.69
4	*5500.00	101.5 PK			1.09 V	246	91.69	9.81
5	*5500.00	93.2 AV			1.09 V	246	83.39	9.81
6	7333.33	56.5 PK	74.0	-17.5	1.11 V	262	41.00	15.50
7	7333.33	47.4 AV	54.0	-6.6	1.11 V	262	31.90	15.50
8	11000.00	60.2 PK	74.0	-13.8	1.03 V	309	42.60	17.60
9	11000.00	48.3 AV	54.0	-5.7	1.03 V	309	30.70	17.60
10	#16500.00	60.8 PK	68.3	-7.5	1.00 V	132	36.66	24.14

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 116	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	111.7 PK			1.00 H	278	101.66	10.04
2	*5580.00	104.2 AV			1.00 H	278	94.16	10.04
3	7440.00	61.2 PK	74.0	-12.8	1.14 H	240	45.76	15.44
4	7440.00	50.2 AV	54.0	-3.8	1.14 H	240	34.76	15.44
5	11160.00	60.8 PK	74.0	-13.2	1.00 H	269	43.77	17.03
6	11160.00	47.8 AV	54.0	-6.2	1.00 H	269	30.77	17.03
7	#16740.00	61.6 PK	68.3	-6.7	1.12 H	80	37.10	24.50

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	104.0 PK			1.00 V	211	93.96	10.04
2	*5580.00	96.4 AV			1.00 V	211	86.36	10.04
3	7440.00	56.1 PK	74.0	-17.9	1.06 V	274	40.66	15.44
4	7440.00	47.1 AV	54.0	-6.9	1.06 V	274	31.66	15.44
5	11160.00	61.4 PK	74.0	-12.6	1.21 V	287	44.37	17.03
6	11160.00	49.7 AV	54.0	-4.3	1.21 V	287	32.67	17.03
7	#16740.00	65.1 PK	68.3	-3.2	1.00 V	133	40.60	24.50

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 132	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5660.00	111.7 PK			1.00 H	278	101.46	10.24
2	*5660.00	104.2 AV			1.00 H	278	93.96	10.24
3	7546.67	60.7 PK	74.0	-13.3	1.17 H	254	45.40	15.30
4	7546.67	49.7 AV	54.0	-4.3	1.17 H	254	34.40	15.30
5	11320.00	60.0 PK	74.0	-14.0	1.00 H	257	42.37	17.63
6	11320.00	47.1 AV	54.0	-6.9	1.00 H	257	29.47	17.63
7	#16980.00	61.3 PK	68.3	-7.0	1.12 H	85	35.86	25.44

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5660.00	103.5 PK			1.09 V	244	93.26	10.24
2	*5660.00	95.8 AV			1.09 V	244	85.56	10.24
3	7546.67	56.3 PK	74.0	-17.7	1.07 V	285	41.00	15.30
4	7546.67	46.9 AV	54.0	-7.1	1.07 V	285	31.60	15.30
5	11320.00	59.7 PK	74.0	-14.3	1.25 V	282	42.07	17.63
6	11320.00	48.1 AV	54.0	-5.9	1.25 V	282	30.47	17.63
7	#16980.00	64.9 PK	68.3	-3.4	1.00 V	162	39.46	25.44

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 140	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	108.7 PK			1.00 H	285	98.36	10.34
2	*5700.00	101.1 AV			1.00 H	285	90.76	10.34
3	#5725.00	67.5 PK	68.3	-0.8	1.00 H	285	57.12	10.38
4	11400.00	59.4 PK	74.0	-14.6	1.05 H	295	41.88	17.52
5	11400.00	47.6 AV	54.0	-6.4	1.05 H	295	30.08	17.52
6	#17100.00	61.9 PK	68.3	-6.4	1.00 H	143	36.61	25.29

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	100.3 PK			1.17 V	235	89.96	10.34
2	*5700.00	92.9 AV			1.17 V	235	82.56	10.34
3	#5725.00	62.4 PK	68.3	-5.9	1.17 V	235	52.02	10.38
4	7600.00	55.8 PK	74.0	-18.2	1.09 V	283	40.54	15.26
5	7600.00	46.7 AV	54.0	-7.3	1.09 V	283	31.44	15.26
6	11400.00	60.1 PK	74.0	-13.9	1.08 V	308	42.58	17.52
7	11400.00	47.9 AV	54.0	-6.1	1.08 V	308	30.38	17.52
8	#17100.00	62.0 PK	68.3	-6.3	1.05 V	128	36.71	25.29

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

802.11n (HT20)

<b>CHANNEL</b>	TX Channel 36	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	64.2 PK	74.0	-9.8	1.14 H	257	55.60	8.60
2	5150.00	53.3 AV	54.0	-0.7	1.14 H	257	44.70	8.60
3	*5180.00	107.5 PK			1.14 H	257	98.74	8.76
4	*5180.00	100.7 AV			1.14 H	257	91.94	8.76
5	#6906.67	65.8 PK	68.3	-2.5	1.16 H	278	50.70	15.10
6	#10360.00	59.9 PK	68.3	-8.4	1.05 H	299	44.36	15.54
7	15540.00	61.3 PK	74.0	-12.7	1.02 H	138	38.93	22.37
8	15540.00	50.7 AV	54.0	-3.3	1.02 H	138	28.33	22.37

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.2 PK	74.0	-12.8	1.20 V	247	52.60	8.60
2	5150.00	50.3 AV	54.0	-3.7	1.20 V	247	41.70	8.60
3	*5180.00	105.8 PK			1.20 V	247	97.04	8.76
4	*5180.00	98.9 AV			1.20 V	247	90.14	8.76
5	#6906.67	56.3 PK	68.3	-12.0	1.11 V	281	41.20	15.10
6	#10360.00	59.9 PK	68.3	-8.4	1.13 V	318	44.36	15.54
7	15540.00	61.6 PK	74.0	-12.4	1.09 V	126	39.23	22.37
8	15540.00	51.0 AV	54.0	-3.0	1.09 V	126	28.63	22.37

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 40	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	108.4 PK			1.11 H	254	99.53	8.87
2	*5200.00	101.3 AV			1.11 H	254	92.43	8.87
3	#6933.33	65.5 PK	68.3	-2.8	1.16 H	272	50.25	15.25
4	#10400.00	59.5 PK	68.3	-8.8	1.00 H	302	44.32	15.18
5	15600.00	61.3 PK	74.0	-12.7	1.00 H	135	39.18	22.12
6	15600.00	50.8 AV	54.0	-3.2	1.00 H	135	28.68	22.12

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5200.00	105.9 PK			1.18 V	252	97.03	8.87
2	*5200.00	99.0 AV			1.18 V	252	90.13	8.87
3	#6933.33	56.5 PK	68.3	-11.8	1.08 V	275	41.25	15.25
4	#10400.00	59.6 PK	68.3	-8.7	1.15 V	324	44.42	15.18
5	15600.00	61.4 PK	74.0	-12.6	1.06 V	141	39.28	22.12
6	15600.00	50.8 AV	54.0	-3.2	1.06 V	141	28.68	22.12

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.





A D T

<b>CHANNEL</b>	TX Channel 48	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	108.5 PK			1.16 H	260	99.49	9.01
2	*5240.00	101.5 AV			1.16 H	260	92.49	9.01
3	#6986.67	65.1 PK	68.3	-3.2	1.07 H	247	49.54	15.56
4	#10480.00	60.4 PK	68.3	-7.9	1.11 H	300	44.60	15.80
5	15720.00	61.6 PK	74.0	-12.4	1.07 H	132	39.80	21.80
6	15720.00	51.1 AV	54.0	-2.9	1.07 H	132	29.30	21.80

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5240.00	106.8 PK			1.16 V	265	97.79	9.01
2	*5240.00	99.6 AV			1.16 V	265	90.59	9.01
3	#6986.67	56.8 PK	68.3	-11.5	1.08 V	294	41.24	15.56
4	#10480.00	59.6 PK	68.3	-8.7	1.13 V	323	43.80	15.80
5	15720.00	62.1 PK	74.0	-11.9	1.14 V	114	40.30	21.80
6	15720.00	51.3 AV	54.0	-2.7	1.14 V	114	29.50	21.80

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 52	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	113.5 PK			1.17 H	262	104.43	9.07
2	*5260.00	106.8 AV			1.17 H	262	97.73	9.07
3	#7013.33	65.5 PK	68.3	-2.8	1.16 H	269	49.87	15.63
4	#10520.00	61.6 PK	68.3	-6.7	1.00 H	319	45.62	15.98
5	15780.00	63.5 PK	74.0	-10.5	1.35 H	29	41.51	21.99
6	15780.00	52.1 AV	54.0	-1.9	1.35 H	29	30.11	21.99

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5260.00	111.0 PK			1.16 V	241	101.93	9.07
2	*5260.00	104.8 AV			1.16 V	241	95.73	9.07
3	#7013.33	55.8 PK	68.3	-12.5	1.15 V	267	40.17	15.63
4	#10520.00	67.7 PK	68.3	-0.6	1.02 V	304	51.72	15.98
5	15780.00	63.3 PK	74.0	-10.7	1.04 V	23	41.31	21.99
6	15780.00	52.7 AV	54.0	-1.3	1.04 V	23	30.71	21.99

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 60	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	113.1 PK			1.15 H	252	103.89	9.21
2	*5300.00	106.3 AV			1.15 H	252	97.09	9.21
3	#7066.67	65.3 PK	68.3	-3.0	1.15 H	273	49.71	15.59
4	10600.00	61.1 PK	74.0	-12.9	1.00 H	308	44.98	16.12
5	10600.00	50.1 AV	54.0	-3.9	1.00 H	308	33.98	16.12
6	15900.00	64.0 PK	74.0	-10.0	1.34 H	25	41.90	22.10
7	15900.00	52.6 AV	54.0	-1.4	1.34 H	25	30.50	22.10

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5300.00	111.5 PK			1.12 V	278	102.29	9.21
2	*5300.00	104.6 AV			1.12 V	278	95.39	9.21
3	#7066.67	56.5 PK	68.3	-11.8	1.09 V	291	40.91	15.59
4	10600.00	66.3 PK	74.0	-7.7	1.13 V	307	50.18	16.12
5	10600.00	52.8 AV	54.0	-1.2	1.13 V	307	36.68	16.12
6	15900.00	63.3 PK	74.0	-10.7	1.00 V	25	41.20	22.10
7	15900.00	52.5 AV	54.0	-1.5	1.00 V	25	30.40	22.10

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 64	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	110.6 PK			1.09 H	258	101.35	9.25
2	*5320.00	103.3 AV			1.09 H	258	94.05	9.25
3	5350.00	63.3 PK	74.0	-10.7	1.09 H	258	53.99	9.31
<b>4</b>	<b>5350.00</b>	<b>53.5 AV</b>	<b>54.0</b>	<b>-0.5</b>	<b>1.09 H</b>	<b>258</b>	<b>44.19</b>	<b>9.31</b>
5	#7093.33	64.9 PK	68.3	-3.4	1.14 H	271	49.32	15.58
6	10640.00	60.6 PK	74.0	-13.4	1.11 H	299	44.34	16.26
7	10640.00	48.6 AV	54.0	-5.4	1.11 H	299	32.34	16.26
8	15960.00	62.1 PK	74.0	-11.9	1.03 H	130	40.12	21.98
9	15960.00	51.5 AV	54.0	-2.5	1.03 H	130	29.52	21.98

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5320.00	107.5 PK			1.05 V	284	98.25	9.25
2	*5320.00	100.4 AV			1.05 V	284	91.15	9.25
3	5350.00	60.3 PK	74.0	-13.7	1.05 V	284	50.99	9.31
4	5350.00	50.5 AV	54.0	-3.5	1.05 V	284	41.19	9.31
5	#7093.33	56.9 PK	68.3	-11.4	1.05 V	271	41.32	15.58
6	10640.00	59.0 PK	74.0	-15.0	1.17 V	293	42.74	16.26
7	10640.00	47.2 AV	54.0	-6.8	1.17 V	293	30.94	16.26
8	15960.00	62.5 PK	74.0	-11.5	1.02 V	90	40.52	21.98
9	15960.00	51.6 AV	54.0	-2.4	1.02 V	90	29.62	21.98

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 100	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	64.1 PK	74.0	-9.9	1.06 H	285	54.45	9.65
2	5460.00	53.2 AV	54.0	-0.8	1.06 H	285	43.55	9.65
3	#5470.00	67.2 PK	68.3	-1.1	1.06 H	285	57.51	9.69
4	*5500.00	112.0 PK			1.06 H	285	102.19	9.81
5	*5500.00	104.4 AV			1.06 H	285	94.59	9.81
6	7333.33	61.5 PK	74.0	-12.5	1.15 H	246	46.00	15.50
7	7333.33	50.4 AV	54.0	-3.6	1.15 H	246	34.90	15.50
8	11000.00	60.6 PK	74.0	-13.4	1.07 H	294	43.00	17.60
9	11000.00	48.5 AV	54.0	-5.5	1.07 H	294	30.90	17.60
10	#16500.00	62.3 PK	68.3	-6.0	1.00 H	122	38.16	24.14

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	61.9 PK	74.0	-12.1	1.06 V	255	52.25	9.65
2	5460.00	51.0 AV	54.0	-3.0	1.06 V	255	41.35	9.65
3	#5470.00	64.3 PK	68.3	-4.0	1.06 V	255	54.61	9.69
4	*5500.00	108.2 PK			1.06 V	255	98.39	9.81
5	*5500.00	101.2 AV			1.06 V	255	91.39	9.81
6	7333.33	56.4 PK	74.0	-17.6	1.14 V	266	40.90	15.50
7	7333.33	47.3 AV	54.0	-6.7	1.14 V	266	31.80	15.50
8	11000.00	59.0 PK	74.0	-15.0	1.17 V	278	41.40	17.60
9	11000.00	47.5 AV	54.0	-6.5	1.17 V	278	29.90	17.60
10	#16500.00	62.3 PK	68.3	-6.0	1.01 V	69	38.16	24.14

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 116	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	114.0 PK			1.03 H	272	103.96	10.04
2	*5580.00	107.0 AV			1.03 H	272	96.96	10.04
3	7440.00	60.9 PK	74.0	-13.1	1.10 H	239	45.46	15.44
4	7440.00	49.9 AV	54.0	-4.1	1.10 H	239	34.46	15.44
5	11160.00	60.0 PK	74.0	-14.0	1.04 H	274	42.97	17.03
6	11160.00	48.2 AV	54.0	-5.8	1.04 H	274	31.17	17.03
7	#16740.00	61.7 PK	68.3	-6.6	1.04 H	109	37.20	24.50

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5580.00	112.0 PK			1.09 V	240	101.96	10.04
2	*5580.00	105.0 AV			1.09 V	240	94.96	10.04
3	7440.00	56.7 PK	74.0	-17.3	1.14 V	294	41.26	15.44
4	7440.00	47.5 AV	54.0	-6.5	1.14 V	294	32.06	15.44
5	11160.00	64.2 PK	74.0	-9.8	1.02 V	314	47.17	17.03
6	11160.00	53.2 AV	54.0	-0.8	1.02 V	314	36.17	17.03
7	#16740.00	62.7 PK	68.3	-5.6	1.00 V	55	38.20	24.50

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



<b>CHANNEL</b>	TX Channel 132	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5660.00	114.1 PK			1.00 H	257	103.86	10.24
2	*5660.00	106.9 AV			1.00 H	257	96.66	10.24
3	7546.67	61.5 PK	74.0	-12.5	1.02 H	268	46.20	15.30
4	7546.67	50.5 AV	54.0	-3.5	1.02 H	268	35.20	15.30
5	11320.00	59.8 PK	74.0	-14.2	1.11 H	266	42.17	17.63
6	11320.00	47.9 AV	54.0	-6.1	1.11 H	266	30.27	17.63
7	#16980.00	62.0 PK	68.3	-6.3	1.00 H	109	36.56	25.44

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5660.00	112.1 PK			1.08 V	264	101.86	10.24
2	*5660.00	104.9 AV			1.08 V	264	94.66	10.24
3	7546.67	55.8 PK	74.0	-18.2	1.07 V	294	40.50	15.30
4	7546.67	47.0 AV	54.0	-7.0	1.07 V	294	31.70	15.30
5	11320.00	62.7 PK	74.0	-11.3	1.00 V	313	45.07	17.63
6	11320.00	51.0 AV	54.0	-3.0	1.00 V	313	33.37	17.63
7	#16980.00	62.2 PK	68.3	-6.1	1.01 V	55	36.76	25.44

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 140	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	110.8 PK			1.06 H	11	100.46	10.34
2	*5700.00	103.5 AV			1.06 H	11	93.16	10.34
3	#5725.00	67.4 PK	68.3	-0.9	1.06 H	11	57.02	10.38
4	7600.00	61.5 PK	74.0	-12.5	1.13 H	256	46.24	15.26
5	7600.00	50.7 AV	54.0	-3.3	1.13 H	256	35.44	15.26
6	11400.00	59.4 PK	74.0	-14.6	1.16 H	246	41.88	17.52
7	11400.00	47.8 AV	54.0	-6.2	1.16 H	246	30.28	17.52
8	#17100.00	61.7 PK	68.3	-6.6	1.00 H	81	36.41	25.29

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	109.0 PK			1.03 V	253	98.66	10.34
2	*5700.00	101.9 AV			1.03 V	253	91.56	10.34
3	#5725.00	64.8 PK	68.3	-3.5	1.04 V	261	54.42	10.38
4	7600.00	55.9 PK	74.0	-18.1	1.10 V	309	40.64	15.26
5	7600.00	46.9 AV	54.0	-7.1	1.10 V	309	31.64	15.26
6	11400.00	60.6 PK	74.0	-13.4	1.02 V	265	43.08	17.52
7	11400.00	49.0 AV	54.0	-5.0	1.02 V	265	31.48	17.52
8	#17100.00	62.1 PK	68.3	-6.2	1.00 V	56	36.81	25.29

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.





A D T

802.11n (HT40)

<b>CHANNEL</b>	TX Channel 38	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	63.6 PK	74.0	-10.4	1.12 H	261	55.00	8.60
2	5150.00	53.3 AV	54.0	-0.7	1.12 H	261	44.70	8.60
3	*5190.00	104.8 PK			1.12 H	261	95.98	8.82
4	*5190.00	98.1 AV			1.12 H	261	89.28	8.82
5	#6920.00	61.2 PK	68.3	-7.1	1.12 H	261	46.01	15.19
6	#10380.00	57.9 PK	68.3	-10.4	1.17 H	100	42.53	15.37
7	15570.00	59.8 PK	74.0	-14.2	1.06 H	211	37.56	22.24
8	15570.00	49.1 AV	54.0	-4.9	1.06 H	211	26.86	22.24

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5150.00	61.9 PK	74.0	-12.1	1.03 V	250	53.30	8.60
2	5150.00	51.6 AV	54.0	-2.4	1.03 V	250	43.00	8.60
3	*5190.00	102.6 PK			1.03 V	250	93.78	8.82
4	*5190.00	95.9 AV			1.03 V	250	87.08	8.82
5	#6920.00	56.0 PK	68.3	-12.3	1.11 V	294	40.81	15.19
6	#10380.00	59.0 PK	68.3	-9.3	1.15 V	303	43.63	15.37
7	15570.00	60.9 PK	74.0	-13.1	1.05 V	156	38.66	22.24
8	15570.00	50.4 AV	54.0	-3.6	1.05 V	156	28.16	22.24

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 46	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	105.6 PK			1.12 H	267	96.63	8.97
2	*5230.00	99.1 AV			1.12 H	267	90.13	8.97
3	#6973.33	60.8 PK	68.3	-7.5	1.11 H	270	45.32	15.48
4	#10460.00	57.0 PK	68.3	-11.3	1.12 H	94	41.36	15.64
5	15690.00	59.0 PK	74.0	-15.0	1.03 H	226	37.22	21.78
6	15690.00	48.4 AV	54.0	-5.6	1.03 H	226	26.62	21.78

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5230.00	103.2 PK			1.00 V	182	94.23	8.97
2	*5230.00	96.5 AV			1.00 V	182	87.53	8.97
3	#6973.33	55.5 PK	68.3	-12.8	1.02 V	306	40.02	15.48
4	#10460.00	59.0 PK	68.3	-9.3	1.12 V	307	43.36	15.64
5	15690.00	60.6 PK	74.0	-13.4	1.00 V	158	38.82	21.78
6	15690.00	50.1 AV	54.0	-3.9	1.00 V	158	28.32	21.78

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 54	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5270.00	111.4 PK			1.09 H	283	102.29	9.11
2	*5270.00	104.5 AV			1.09 H	283	95.39	9.11
3	5350.00	65.2 PK	74.0	-8.8	1.09 H	283	55.89	9.31
4	5350.00	53.3 AV	54.0	-0.7	1.09 H	283	43.99	9.31
5	#7026.67	61.6 PK	68.3	-6.7	1.11 H	273	46.00	15.60
6	#10540.00	57.6 PK	68.3	-10.7	1.16 H	85	41.58	16.02
7	15810.00	60.1 PK	74.0	-13.9	1.01 H	179	38.05	22.05
8	15810.00	49.5 AV	54.0	-4.5	1.01 H	179	27.45	22.05

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5270.00	108.7 PK			1.00 V	204	99.59	9.11
2	*5270.00	102.2 AV			1.00 V	204	93.09	9.11
3	5350.00	61.4 PK	74.0	-12.6	1.00 V	204	52.09	9.31
4	5350.00	51.1 AV	54.0	-2.9	1.00 V	204	41.79	9.31
5	#7026.67	56.4 PK	68.3	-11.9	1.01 V	296	40.80	15.60
6	#10540.00	58.9 PK	68.3	-9.4	1.09 V	296	42.88	16.02
7	15810.00	60.4 PK	74.0	-13.6	1.00 V	170	38.35	22.05
8	15810.00	50.5 AV	54.0	-3.5	1.00 V	170	28.45	22.05

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 62	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	105.7 PK			1.08 H	260	96.47	9.23
2	*5310.00	98.5 AV			1.08 H	260	89.27	9.23
3	5350.00	63.2 PK	74.0	-10.8	1.08 H	260	53.89	9.31
4	5350.00	53.2 AV	54.0	-0.8	1.08 H	260	43.89	9.31
5	#7080.00	61.7 PK	68.3	-6.6	1.12 H	246	46.12	15.58
6	10620.00	57.6 PK	74.0	-16.4	1.14 H	115	41.42	16.18
7	10620.00	45.6 AV	54.0	-8.4	1.14 H	115	29.42	16.18
8	15930.00	59.1 PK	74.0	-14.9	1.05 H	200	37.05	22.05
9	15930.00	48.7 AV	54.0	-5.3	1.05 H	200	26.65	22.05

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5310.00	103.0 PK			1.04 V	164	93.77	9.23
2	*5310.00	95.9 AV			1.04 V	164	86.67	9.23
3	5350.00	62.1 PK	74.0	-11.9	1.04 V	164	52.79	9.31
4	5350.00	51.9 AV	54.0	-2.1	1.04 V	164	42.59	9.31
5	#7080.00	56.4 PK	68.3	-11.9	1.11 V	285	40.82	15.58
6	10620.00	59.2 PK	74.0	-14.8	1.09 V	295	43.02	16.18
7	10620.00	46.9 AV	54.0	-7.1	1.09 V	295	30.72	16.18
8	15930.00	60.8 PK	74.0	-13.2	1.01 V	161	38.75	22.05
9	15930.00	50.6 AV	54.0	-3.4	1.01 V	161	28.55	22.05

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

<b>CHANNEL</b>	TX Channel 102	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	61.2 PK	74.0	-12.8	1.00 H	2	51.55	9.65
2	5460.00	51.2 AV	54.0	-2.8	1.00 H	2	41.55	9.65
3	#5470.00	67.8 PK	68.3	-0.5	1.00 H	2	58.11	9.69
4	*5510.00	107.4 PK			1.00 H	2	97.56	9.84
5	*5510.00	100.4 AV			1.00 H	2	90.56	9.84
6	11020.00	57.3 PK	74.0	-16.7	1.12 H	90	39.81	17.49
7	11020.00	45.0 AV	54.0	-9.0	1.12 H	90	27.51	17.49
8	#16530.00	59.1 PK	68.3	-9.2	1.06 H	203	34.68	24.42

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	60.8 PK	74.0	-13.2	1.01 V	204	51.15	9.65
2	5460.00	50.5 AV	54.0	-3.5	1.01 V	204	40.85	9.65
3	#5470.00	62.3 PK	68.3	-6.0	1.01 V	204	52.61	9.69
4	*5510.00	105.3 PK			1.01 V	204	95.46	9.84
5	*5510.00	98.5 AV			1.01 V	204	88.66	9.84
6	7346.67	56.5 PK	74.0	-17.5	1.11 V	284	41.00	15.50
7	7346.67	47.5 AV	54.0	-6.5	1.11 V	284	32.00	15.50
8	11020.00	58.9 PK	74.0	-15.1	1.14 V	315	41.41	17.49
9	11020.00	46.8 AV	54.0	-7.2	1.14 V	315	29.31	17.49
10	#16530.00	61.4 PK	68.3	-6.9	1.08 V	160	36.98	24.42

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 110	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	64.2 PK	74.0	-9.8	1.04 H	281	54.55	9.65
2	5460.00	53.0 AV	54.0	-1.0	1.04 H	281	43.35	9.65
3	#5470.00	66.3 PK	68.3	-2.0	1.04 H	281	56.61	9.69
4	*5550.00	112.7 PK			1.03 H	286	102.75	9.95
5	*5550.00	105.6 AV			1.03 H	286	95.65	9.95
6	#5725.00	62.1 PK	68.3	-6.2	1.04 H	281	51.72	10.38
7	7400.00	60.8 PK	74.0	-13.2	1.12 H	259	45.28	15.52
8	7400.00	50.0 AV	54.0	-4.0	1.12 H	259	34.48	15.52
9	11100.00	57.8 PK	74.0	-16.2	1.15 H	109	40.72	17.08
10	11100.00	45.8 AV	54.0	-8.2	1.15 H	109	28.72	17.08
11	#16650.00	59.8 PK	68.3	-8.5	1.12 H	201	35.04	24.76

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	59.2 PK	74.0	-14.8	1.03 V	205	49.55	9.65
2	5460.00	48.8 AV	54.0	-5.2	1.03 V	205	39.15	9.65
3	#5470.00	61.1 PK	68.3	-7.2	1.03 V	205	51.41	9.69
4	*5550.00	111.1 PK			1.03 V	205	101.15	9.95
5	*5550.00	103.9 AV			1.03 V	205	93.95	9.95
6	#5725.00	61.7 PK	68.3	-6.6	1.03 V	205	51.32	10.38
7	7400.00	55.8 PK	74.0	-18.2	1.03 V	305	40.28	15.52
8	7400.00	47.0 AV	54.0	-7.0	1.03 V	305	31.48	15.52
9	11100.00	58.9 PK	74.0	-15.1	1.19 V	288	41.82	17.08
10	11100.00	46.4 AV	54.0	-7.6	1.19 V	288	29.32	17.08
11	#16650.00	60.6 PK	68.3	-7.7	1.03 V	132	35.84	24.76

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.



A D T

<b>CHANNEL</b>	TX Channel 134	<b>DETECTOR FUNCTION</b>	Peak (PK)
<b>FREQUENCY RANGE</b>	1GHz ~ 40GHz		Average (AV)

**ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	111.6 PK			1.05 H	277	101.34	10.26
2	*5670.00	104.1 AV			1.05 H	277	93.84	10.26
<b>3</b>	<b>#5725.00</b>	<b>67.8 PK</b>	<b>68.3</b>	<b>-0.5</b>	<b>1.05 H</b>	<b>277</b>	<b>57.42</b>	<b>10.38</b>
4	7560.00	61.4 PK	74.0	-12.6	1.14 H	239	46.11	15.29
5	7560.00	50.2 AV	54.0	-3.8	1.14 H	239	34.91	15.29
6	11340.00	57.7 PK	74.0	-16.3	1.19 H	79	40.09	17.61
7	11340.00	45.0 AV	54.0	-9.0	1.19 H	79	27.39	17.61
8	#17010.00	58.2 PK	68.3	-10.1	1.10 H	197	32.68	25.52

**ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M**

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	108.9 PK			1.00 V	196	98.64	10.26
2	*5670.00	101.7 AV			1.00 V	196	91.44	10.26
3	#5725.00	64.5 PK	68.3	-3.8	1.00 V	196	54.12	10.38
4	7560.00	56.0 PK	74.0	-18.0	1.06 V	290	40.71	15.29
5	7560.00	46.9 AV	54.0	-7.1	1.06 V	290	31.61	15.29
6	11340.00	59.1 PK	74.0	-14.9	1.10 V	307	41.49	17.61
7	11340.00	46.6 AV	54.0	-7.4	1.10 V	307	28.99	17.61
8	#17010.00	60.6 PK	68.3	-7.7	1.10 V	152	35.08	25.52

**REMARKS:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB)  
– Pre-Amplifier Factor(dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission Level – Limit value
5. " \* ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

### 4.3 TRANSMIT POWER MEASUREMENT

#### 4.3.1 LIMITS OF TRANSMIT POWER MEASUREMENT

Frequency Band	Limit
5.15 – 5.25GHz	The lesser of 50mW (17dBm) or 4dBm + 10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.47 – 5.725GHz	The lesser of 250mW (24dBm) or 11dBm + 10logB
5.725 – 5.825GHz	The lesser of 1W (30dBm) or 17dBm + 10logB

**NOTE:** Where B is the 26dB emission bandwidth in MHz.

Per KDB 662911 D01 Multiple Transmitter Output v01r02 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for NANT ≤ 4;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any NANT;

Array Gain = 5 log(NANT/NSS) dB or 3 dB, whichever is less for 20-MHz channel widths with NANT ≥ 5.

For power measurements on all other devices: Array Gain = 10 log(NANT/NSS) dB.

#### 4.3.2 TEST INSTRUMENTS

##### FOR POWER OUTPUT MEASUREMENT

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Power meter Anritsu	ML2495A	0824006	May 20, 2013	May 19, 2014
Power sensor Anritsu	MA2411B	0738172	May 20, 2013	May 19, 2014

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 30, 2013





A D T

#### FOR 26dB OCCUPIED BANDWIDTH

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP 40	100036	Jan. 21, 2013	Jan. 20, 2014

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 30, 2013

#### 4.3.3 TEST PROCEDURE

##### FOR POWER OUTPUT MEASUREMENT

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

##### FOR 26dB OCCUPIED BANDWIDTH


1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW > RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

#### 4.3.4 DEVIATION FROM TEST STANDARD


No deviation

### 4.3.5 TEST SETUP

#### FOR POWER OUTPUT MEASUREMENT

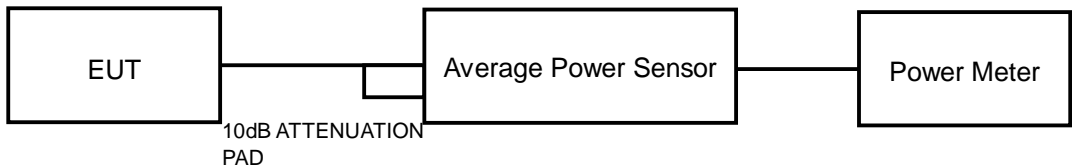

#### FOR 26dB OCCUPIED BANDWIDTH

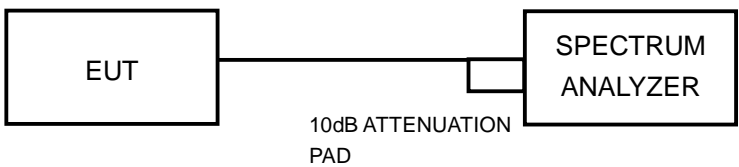

### 4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

#### 4.3.7 TEST RESULTS

##### POWER OUTPUT:

##### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	AVERAGE POWER (mW)	AVERAGE POWER (dBm)	POWER LIMIT (dBm)	PASS/FAIL
36	5180	34.435	15.37	17	PASS
40	5200	46.881	16.71	17	PASS
48	5240	45.394	16.57	17	PASS
52	5260	101.391	20.06	24	PASS
60	5300	102.802	20.12	24	PASS
64	5320	40.926	16.12	24	PASS
100	5500	36.224	15.59	24	PASS
116	5580	81.658	19.12	24	PASS
132	5660	50.234	17.01	24	PASS
140	5700	31.915	15.04	24	PASS

##### 26dB OCCUPIED BANDWIDTH:

##### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)
36	5180	20.87
40	5200	23.53
48	5240	25.78
52	5260	37.03
60	5300	40.74
64	5320	23.58
100	5500	23.29
116	5580	38.59
132	5660	33.99
140	5700	25.03



A D T

**Note: For FCC output power limitation is determined based on 26dB bandwidth.**

Power Limit = 4dBm + 10logB < Band 1>			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Limit (dBm)
36	5180	20.87	17.19 > 17
40	5200	23.53	17.71 > 17
48	5240	25.78	18.11 > 17
Power Limit = 11dBm + 10logB < Band 2~3>			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Limit (dBm)
52	5260	37.03	26.68 > 24
60	5300	40.74	27.1 > 24
64	5320	23.58	24.72 > 24
100	5500	23.29	24.67 > 24
116	5580	38.59	26.86 > 24
132	5660	33.99	26.31 > 24
140	5700	25.03	24.98 > 24



A D T

**POWER OUTPUT:**

**802.11n (HT20)**

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
36	5180	10.51	10.65	10.64	34.448	15.37	17	PASS
40	5200	11.67	11.91	11.89	45.666	16.60	17	PASS
48	5240	11.57	11.90	11.87	45.225	16.55	17	PASS
52	5260	17.42	17.61	17.62	170.695	22.32	24	PASS
60	5300	17.64	17.71	17.82	177.630	22.50	24	PASS
64	5320	12.53	12.91	12.48	55.150	17.42	24	PASS
100	5500	12.97	13.39	13.28	62.923	17.99	24	PASS
116	5580	16.74	16.98	17.04	147.676	21.69	24	PASS
132	5660	16.87	17.12	17.16	152.164	21.82	24	PASS
140	5700	15.06	15.24	15.05	97.472	19.89	24	PASS

**26dB OCCUPIED BANDWIDTH:**

**802.11n (HT20)**

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
36	5180	20.65	20.68	20.53
40	5200	20.70	20.67	20.54
48	5240	20.60	20.62	20.59
52	5260	31.70	31.48	30.10
60	5300	30.96	33.11	30.69
64	5320	20.70	20.70	20.53
100	5500	20.78	20.74	20.54
116	5580	31.58	31.32	31.68
132	5660	34.24	31.87	32.08
140	5700	22.99	20.74	20.86



A D T

**Note: For FCC output power limitation is determined based on 26dB bandwidth.**

Power Limit = $4\text{dBm} + 10\log B$ < Band 1 >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Limit (dBm)
36	5180	20.53	17.12 > 17
40	5200	20.54	17.12 > 17
48	5240	20.59	17.13 > 17
Power Limit = $11\text{dBm} + 10\log B$ < Band 2~3 >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Limit (dBm)
52	5260	30.10	25.78 > 24
60	5300	30.69	25.86 > 24
64	5320	20.53	24.12 > 24
100	5500	20.54	24.12 > 24
116	5580	31.32	25.95 > 24
132	5660	31.87	26.03 > 24
140	5700	20.74	24.16 > 24



A D T

### POWER OUTPUT:

#### 802.11n (HT40)

CHAN.	CHAN. FREQ. (MHz)	AVERAGE POWER (dBm)			TOTAL POWER (mW)	TOTAL POWER (dBm)	POWER LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1	CHAIN 2				
38	5190	10.13	10.57	10.09	31.915	15.04	17	PASS
46	5230	12.12	12.27	12.06	49.228	16.92	17	PASS
54	5270	16.37	16.05	16.09	124.267	20.94	24	PASS
62	5310	11.92	12.21	11.85	47.505	16.77	24	PASS
102	5510	14.22	14.16	13.65	75.660	18.79	24	PASS
110	5550	16.09	16.23	16.31	125.376	20.98	24	PASS
134	5670	16.27	16.32	16.42	129.072	21.11	24	PASS

### 26dB OCCUPIED BANDWIDTH:

#### 802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	26dBc BANDWIDTH (MHz)		
		CHAIN 0	CHAIN 1	CHAIN 2
38	5190	41.77	42.03	42.09
46	5230	41.77	42.06	42.15
54	5270	61.31	56.94	56.22
62	5310	41.92	41.86	42.12
102	5510	42.17	42.31	42.22
110	5550	61.18	60.66	63.20
134	5670	64.92	57.05	61.88



A D T

**Note: For FCC output power limitation is determined based on 26dB bandwidth.**

Power Limit = 4dBm + 10logB < Band 1>			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Limit (dBm)
38	5190	41.77	20.2 > 17
46	5230	41.77	20.2 > 17
Power Limit = 11dBm + 10logB < Band 2~3>			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Limit (dBm)
54	5270	56.22	28.49 > 24
62	5310	41.86	27.21 > 24
102	5510	42.17	27.25 > 24
110	5550	60.66	28.82 > 24
134	5670	57.05	28.56 > 24





A D T

#### 4.4 PEAK POWER SPECTRAL DENSITY MEASUREMENT

##### 4.4.1 LIMITS OF PEAK POWER SPECTRAL DENSITY MEASUREMENT

Frequency Band	Limit
5.15 ~ 5.25GHz	4dBm
5.25 ~ 5.35GHz	11dBm
5.47 ~ 5.725GHz	11dBm
5.725 ~ 5.825GHz	17dBm

##### 4.4.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP40	100037	Nov. 01, 2012	Oct. 31, 2013

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Apr. 26, 2013

##### 4.4.3 TEST PROCEDURES


Using method SA-1

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW  $\geq$  3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value

##### 4.4.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.4.5 TEST SETUP



#### 4.4.6 EUT OPERATING CONDITIONS

Same as 4.3.6

#### 4.4.7 TEST RESULTS

##### 802.11a

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
36	5180	1.21	4	PASS
40	5200	2.88	4	PASS
48	5240	2.82	4	PASS
56	5280	6.00	11	PASS
60	5300	6.28	11	PASS
64	5320	2.39	11	PASS
100	5500	1.51	11	PASS
116	5580	4.96	11	PASS
132	5660	2.69	11	PASS
140	5700	1.70	11	PASS

##### 802.11n (HT20)

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
36	5180	-4.06	-3.94	-4.45	0.63	2.43	PASS
40	5200	-2.53	-2.34	-2.76	2.23	2.43	PASS
48	5240	-2.74	-2.41	-2.50	2.22	2.43	PASS
56	5280	3.19	3.28	3.41	8.07	9.43	PASS
60	5300	2.78	3.14	3.40	7.89	9.43	PASS
64	5320	-1.73	-1.00	-1.26	3.45	9.43	PASS
100	5500	-1.23	-2.07	-1.29	3.26	9.43	PASS
116	5580	2.04	1.82	2.50	6.90	9.43	PASS
132	5660	2.04	2.14	2.04	6.84	9.43	PASS
140	5700	0.68	0.91	1.09	5.67	9.43	PASS

- NOTE:**
- Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
  - For Band 1: Directional gain =  $2.8\text{dBi} + 10\log(3) = 7.57\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $4 - (7.57 - 6) = 2.43\text{dBm}$ .
  - For Band 2~3: Directional gain =  $2.8\text{dBi} + 10\log(3) = 7.57\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $11 - (7.57 - 6) = 9.43\text{dBm}$ .



A D T

### 802.11n (HT40)

CHANNEL	CHANNEL FREQUENCY (MHz)	PSD (dBm)			TOTAL POWER DENSITY (dBm)	MAX. LIMIT (dBm)	PASS/FAIL
		CHAIN 0	CHAIN 1	CHAIN 2			
38	5190	-6.19	-5.93	-6.42	-1.40	2.43	PASS
46	5230	-3.73	-4.07	-4.62	0.65	2.43	PASS
54	5270	0.30	0.00	-0.50	4.72	9.43	PASS
62	5310	-4.71	-4.67	-4.96	-0.01	9.43	PASS
102	5510	-1.71	-2.61	-2.38	2.55	9.43	PASS
110	5550	-0.59	-1.17	-0.82	3.92	9.43	PASS
134	5670	-1.20	-1.11	-1.26	3.58	9.43	PASS

- NOTE:**
1. Method 1 of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
  2. For Band 1: Directional gain =  $2.8\text{dBi} + 10\log(3) = 7.57\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $4 - (7.57 - 6) = 2.43\text{dBm}$ .
  3. For Band 2~3: Directional gain =  $2.8\text{dBi} + 10\log(3) = 7.57\text{dBi} > 6\text{dBi}$  , so the power density limit shall be reduced to  $11 - (7.57 - 6) = 9.43\text{dBm}$ .

## 4.5 PEAK POWER EXCURSION MEASUREMENT

### 4.5.1 LIMITS OF PEAK POWER EXCURSION MEASUREMENT

Shall not exceed 13 dB

### 4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP 40	100036	Jan. 21, 2013	Jan. 20, 2014

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Oct. 16, 2013


### 4.5.3 TEST PROCEDURE

1. Set RBW = 1 MHz, VBW  $\geq$  3 MHz, Detector = peak.
2. Trace mode = max-hold. Allow the sweeps to continue until the trace stabilizes.
3. Use the peak search function to find the peak of the spectrum.
4. Measure the PPSD.
5. Compute the ratio of the maximum of the peak-max-hold spectrum to the PPSD.

### 4.5.4 DEVIATION FROM TEST STANDARD

No deviation

### 4.5.5 TEST SETUP



#### 4.5.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at specific channel frequencies individually.



A D T

#### 4.5.7 TEST RESULTS

MODULATION MODE	MODULATION TYPE	CHANNEL FREQUENCY (MHz)	PEAK VALUE (dBm)	PPSD (dBm)	PEAK EXCURSION (dB)	LIMIT (dB)	PASS/ FAIL
802.11a	BPSK	5700	9.47	1.7	7.77	13	PASS
	QPSK		11.78	2.42	9.36	13	PASS
	16QAM		10.96	2.53	8.43	13	PASS
	64QAM		10.96	1.99	8.97	13	PASS
802.11n (HT20)	BPSK	5700	8.36	0.68	7.68	13	PASS
	QPSK		9.75	1.01	8.74	13	PASS
	16QAM		10.08	1.49	8.59	13	PASS
	64QAM		10.64	0.68	9.96	13	PASS
802.11n (HT40)	BPSK	5670	6.81	-1.2	8.01	13	PASS
	QPSK		9.43	0.14	9.29	13	PASS
	16QAM		9.04	0.05	8.99	13	PASS
	64QAM		9.7	0.24	9.46	13	PASS

## 4.6 FREQUENCY STABILITY

### 4.6.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

The frequency of the carrier signal shall be maintained within band of operation

### 4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Spectrum Analyzer R&S	FSP 40	100036	Jan. 21, 2013	Jan. 20, 2014
Temperature & Humidity Chamber GIANTFORCE	GTH-150-40 -SP-AR	MAA0812-008	Jan. 17, 2013	Jan. 16, 2014

**Note:**

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : July 30, 2013

### 4.6.3 TEST PROCEDURE


1. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
2. Turn the EUT on and couple its output to a spectrum analyzer.
3. Turn the EUT off and set the chamber to the highest temperature specified.
4. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 minutes.
5. Repeat step 2 and 3 with the temperature chamber set to the lowest temperature.
6. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.



#### 4.6.4 DEVIATION FROM TEST STANDARD

No deviation

#### 4.6.5 TEST SETUP

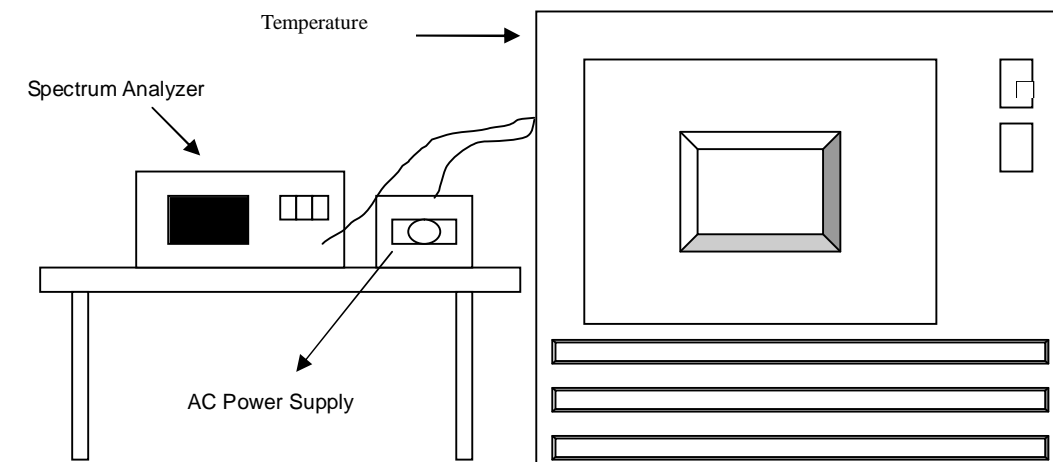

#### 4.6.6 EUT OPERATING CONDITION

Set the EUT transmit at un-modulation mode to test frequency stability.



A D T

### 4.6.7 TEST RESULTS

FREQUENCY STABILITY VERSUS TEMP.									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	Drift (%)	(MHz)	Drift (%)	(MHz)	Drift (%)	(MHz)	Drift (%)
50	120	5320.011	0.00021	5320.0022	0.00004	5320.008	0.00015	5320.0047	0.00009
40	120	5319.9885	-0.00022	5319.9932	-0.00013	5319.993	-0.00013	5319.9867	-0.00025
30	120	5320.0183	0.00034	5320.0178	0.00033	5320.0193	0.00036	5320.0114	0.00021
20	120	5320.0117	0.00022	5320.0122	0.00023	5320.0132	0.00025	5320.01	0.00019
10	120	5320.0147	0.00028	5320.0049	0.00009	5320.0087	0.00016	5320.0062	0.00012
0	120	5319.9892	-0.00020	5319.9948	-0.00010	5319.9915	-0.00016	5319.9909	-0.00017
-10	120	5319.9806	-0.00036	5319.972	-0.00053	5319.9756	-0.00046	5319.9756	-0.00046
-20	120	5319.9823	-0.00033	5319.9815	-0.00035	5319.9863	-0.00026	5319.9876	-0.00023
-30	120	5319.9718	-0.00053	5319.9725	-0.00052	5319.9773	-0.00043	5319.9806	-0.00036

FREQUENCY STABILITY VERSUS VOLTAGE									
OPERATING FREQUENCY: 5320MHz									
TEMP. (°C)	POWER SUPPLY (Vac)	0 MINUTE		2 MINUTE		5 MINUTE		10 MINUTE	
		Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift	Measured Frequency	Frequency Drift
		(MHz)	Drift (%)	(MHz)	Drift (%)	(MHz)	Drift (%)	(MHz)	Drift (%)
20	138	5320.0125	0.00023	5320.0118	0.00022	5320.0135	0.00025	5320.0109	0.00020
	120	5320.0117	0.00022	5320.0122	0.00023	5320.0132	0.00025	5320.01	0.00019
	102	5320.0108	0.00020	5320.0124	0.00023	5320.0142	0.00027	5320.0109	0.00020



A D T

## 5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





## 6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Linko EMC/RF Lab:**

Tel: 886-2-26052180

Fax: 886-2-26052943

**Hsin Chu EMC/RF Lab:**

Tel: 886-3-5935343

Fax: 886-3-5935342

**Hwa Ya EMC/RF/Safety/Telecom Lab:**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@tw.bureauveritas.com](mailto:service.adt@tw.bureauveritas.com)

**Web Site:** [www.bureauveritas-adt.com](http://www.bureauveritas-adt.com)

The address and road map of all our labs can be found in our web site also.



A D T

## **7.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB**

No modifications were made to the EUT by the lab during the test.

**--- END ---**