


Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/29
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 36,5.18G,BW20M	Humidity (%RH)	66.0

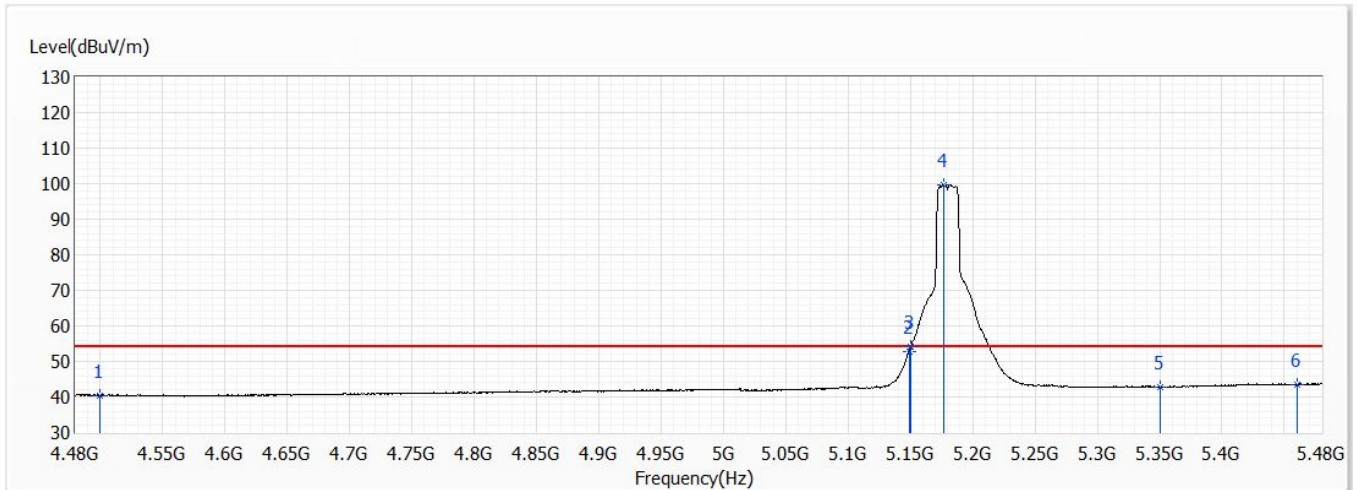


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.49	54.00	-13.51	18.52	21.97	AV
2	5149.000	52.85	54.00	-1.15	29.28	23.57	AV
3	5150.000	53.99	54.00	-0.01	30.42	23.57	AV
! 4	5177.000	99.63	54.00	45.63	76.00	23.63	AV
5	5350.000	42.75	54.00	-11.25	18.78	23.97	AV
6	5460.000	43.59	54.00	-10.41	19.41	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/29
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 36,5.18G,BW20M	Humidity (%RH)	66.0

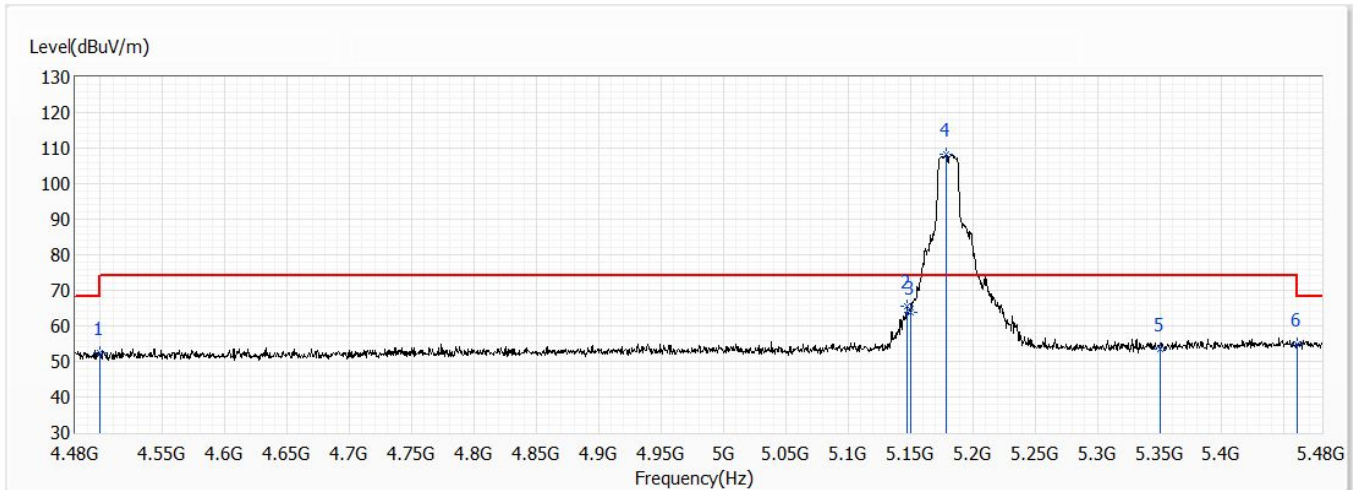


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.49	74.00	-21.51	30.52	21.97	PK
2	5147.000	65.47	74.00	-8.53	41.90	23.57	PK
3	5150.000	63.85	74.00	-10.15	40.28	23.57	PK
! 4	5179.000	108.17	74.00	34.17	84.54	23.63	PK
5	5350.000	53.44	74.00	-20.56	29.47	23.97	PK
6	5460.000	54.92	74.00	-19.08	30.74	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/29
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 36,5.18G,BW20M	Humidity (%RH)	66.0

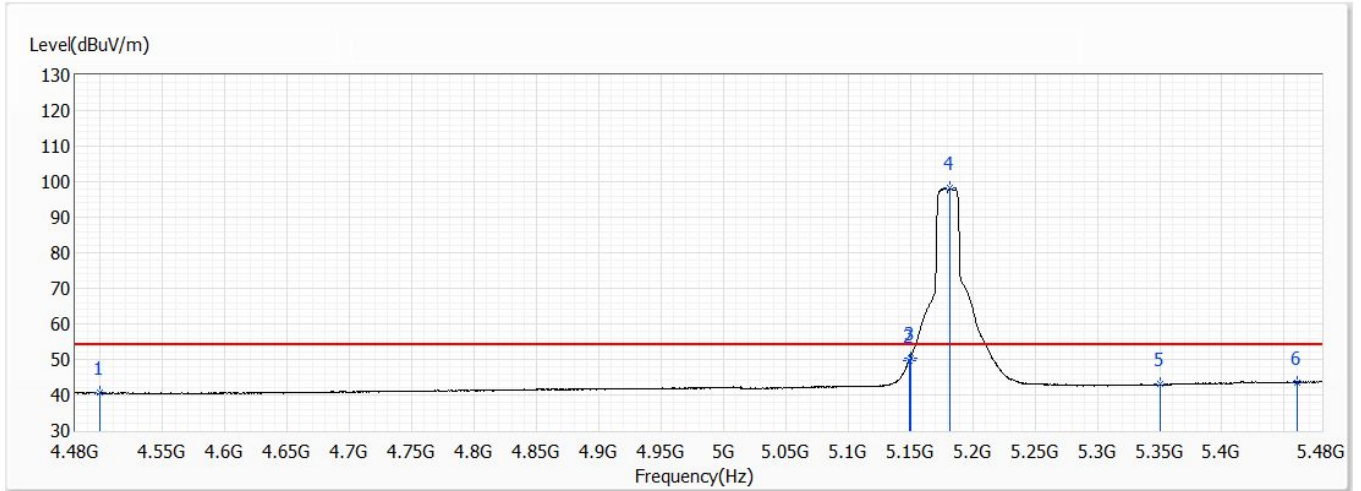


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.52	54.00	-13.48	18.55	21.97	AV
2	5149.000	49.50	54.00	-4.50	25.93	23.57	AV
3	5150.000	50.51	54.00	-3.49	26.94	23.57	AV
! 4	5182.000	98.11	54.00	44.11	74.48	23.63	AV
5	5350.000	42.99	54.00	-11.01	19.02	23.97	AV
6	5460.000	43.56	54.00	-10.44	19.38	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 44,5.22G,BW20M	Humidity (%RH)	66.0

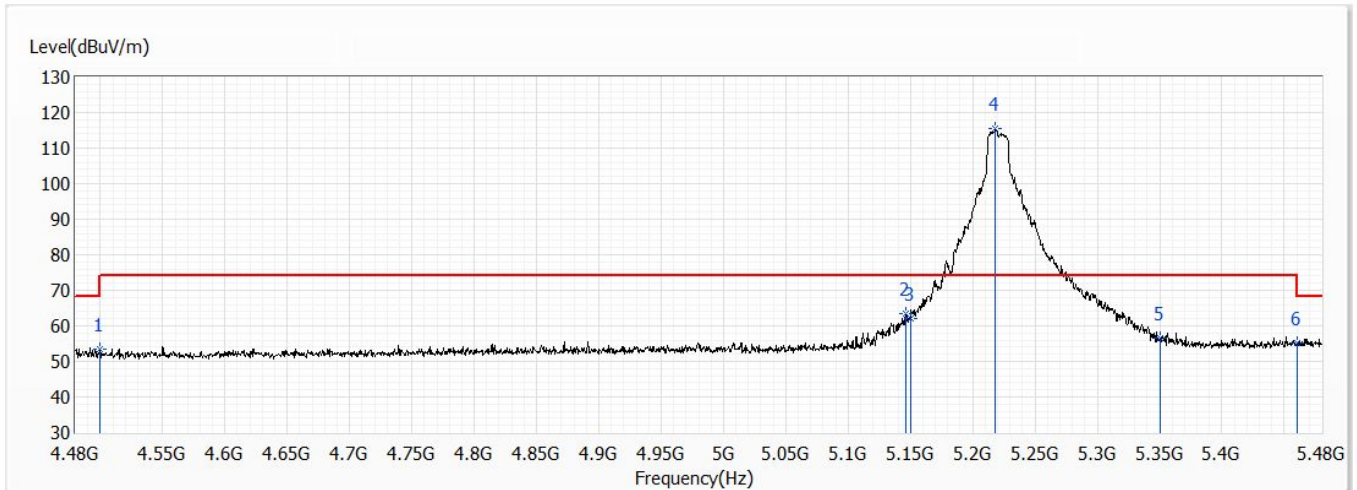


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.57	74.00	-20.43	31.60	21.97	PK
2	5146.500	63.39	74.00	-10.61	39.82	23.57	PK
3	5150.000	62.15	74.00	-11.85	38.58	23.57	PK
! 4	5218.000	115.51	74.00	41.51	91.80	23.71	PK
5	5350.000	56.60	74.00	-17.40	32.63	23.97	PK
6	5460.000	55.13	74.00	-18.87	30.95	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 44,5.22G,BW20M	Humidity (%RH)	66.0

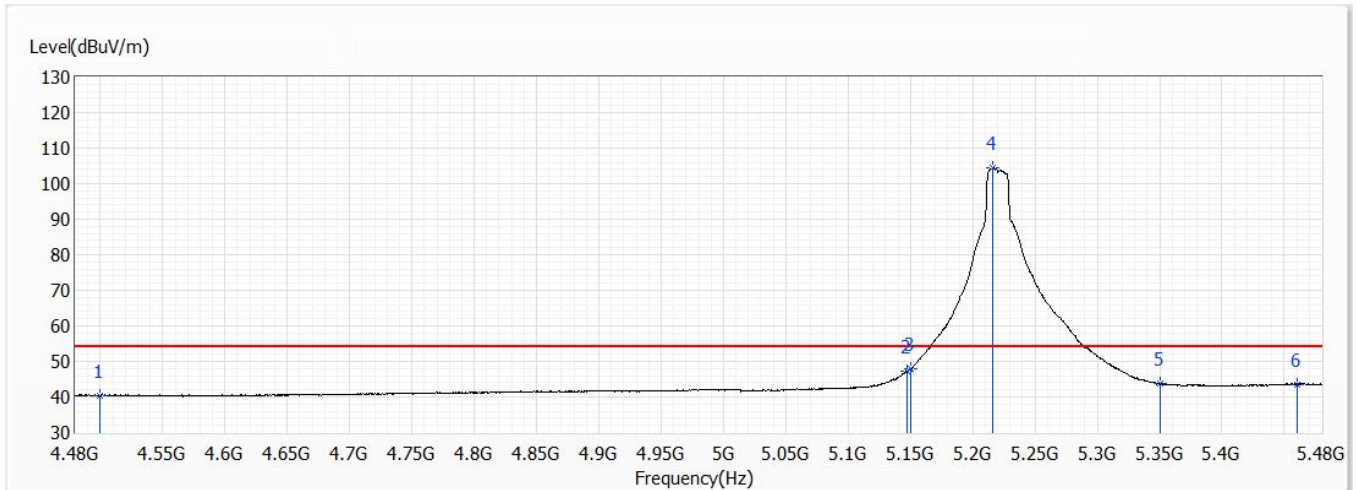


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.42	54.00	-13.58	18.45	21.97	AV
2	5147.500	47.32	54.00	-6.68	23.75	23.57	AV
3	5150.000	47.91	54.00	-6.09	24.34	23.57	AV
! 4	5216.000	104.39	54.00	50.39	80.68	23.71	AV
5	5350.000	43.64	54.00	-10.36	19.67	23.97	AV
6	5460.000	43.59	54.00	-10.41	19.41	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 44,5.22G,BW20M	Humidity (%RH)	66.0

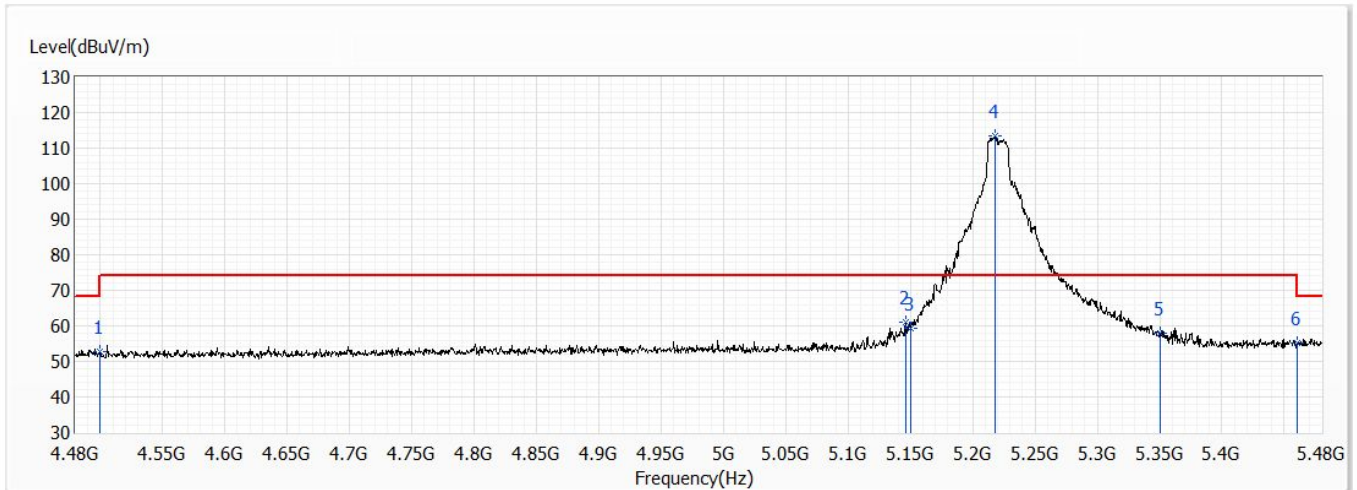


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.93	74.00	-21.07	30.96	21.97	PK
2	5146.500	61.06	74.00	-12.94	37.49	23.57	PK
3	5150.000	59.17	74.00	-14.83	35.60	23.57	PK
! 4	5218.000	113.59	74.00	39.59	89.88	23.71	PK
5	5350.000	57.89	74.00	-16.11	33.92	23.97	PK
6	5460.000	55.01	74.00	-18.99	30.83	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 44,5.22G,BW20M	Humidity (%RH)	66.0

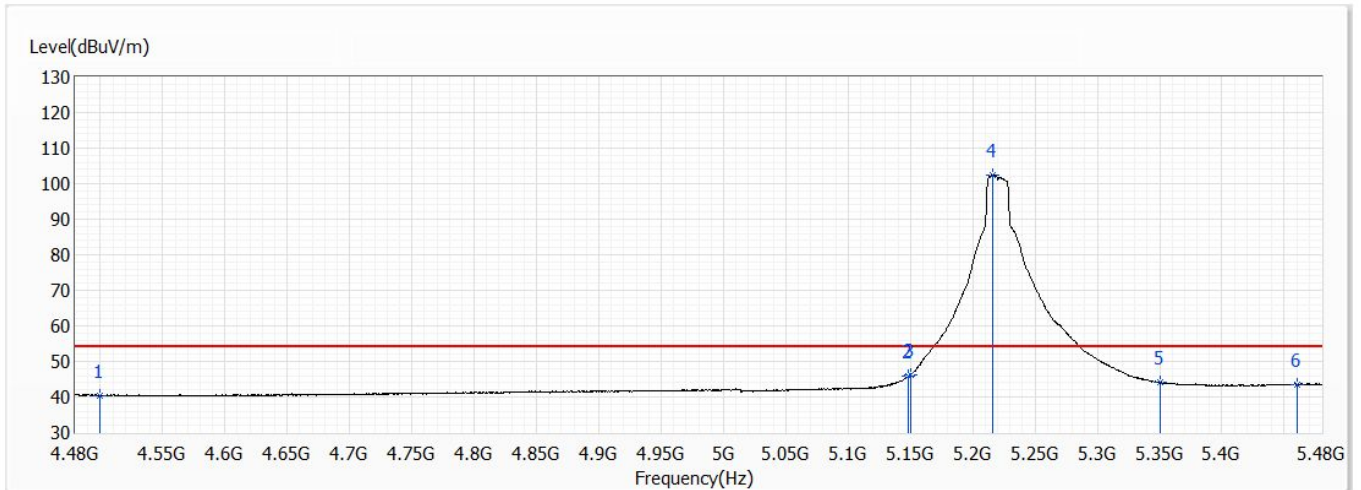


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.47	54.00	-13.53	18.50	21.97	AV
2	5148.500	45.75	54.00	-8.25	22.18	23.57	AV
3	5150.000	46.28	54.00	-7.72	22.71	23.57	AV
! 4	5216.500	102.50	54.00	48.50	78.79	23.71	AV
5	5350.000	44.02	54.00	-9.98	20.05	23.97	AV
6	5460.000	43.50	54.00	-10.50	19.32	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 48,5.24G,BW20M	Humidity (%RH)	66.0

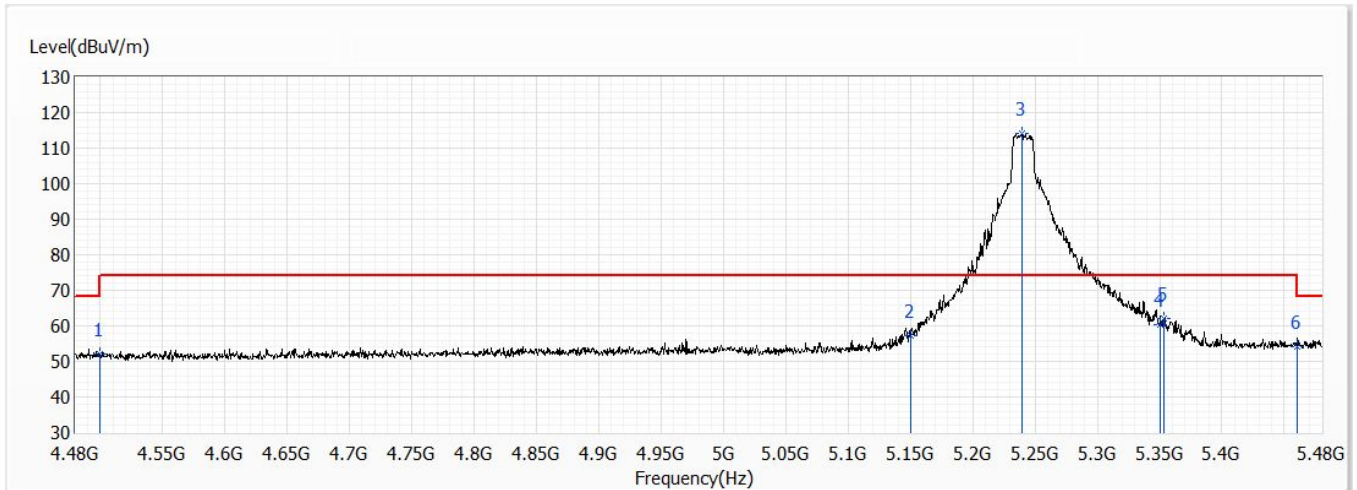


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.92	74.00	-22.08	29.95	21.97	PK
2	5150.000	57.37	74.00	-16.63	33.80	23.57	PK
! 3	5239.500	114.05	74.00	40.05	90.30	23.75	PK
4	5350.000	60.48	74.00	-13.52	36.51	23.97	PK
5	5353.500	61.95	74.00	-12.05	37.98	23.97	PK
6	5460.000	54.09	74.00	-19.91	29.91	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 48,5.24G,BW20M	Humidity (%RH)	66.0

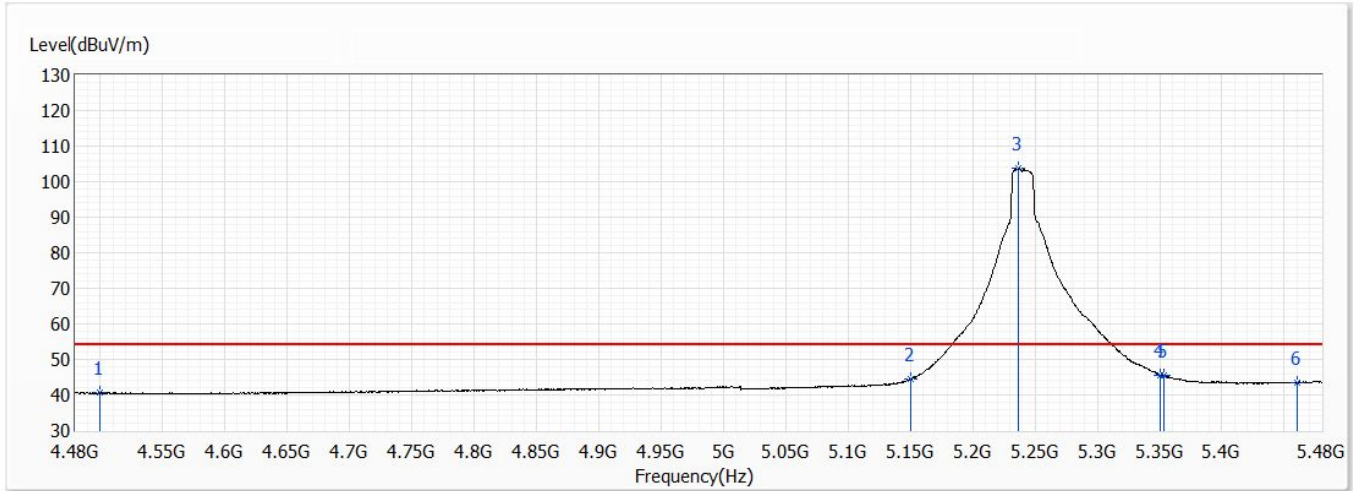


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.52	54.00	-13.48	18.55	21.97	AV
2	5150.000	44.51	54.00	-9.49	20.94	23.57	AV
! 3	5237.000	103.70	54.00	49.70	79.96	23.74	AV
4	5350.000	45.66	54.00	-8.34	21.69	23.97	AV
5	5353.500	45.41	54.00	-8.59	21.44	23.97	AV
6	5460.000	43.55	54.00	-10.45	19.37	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 48,5.24G,BW20M	Humidity (%RH)	66.0

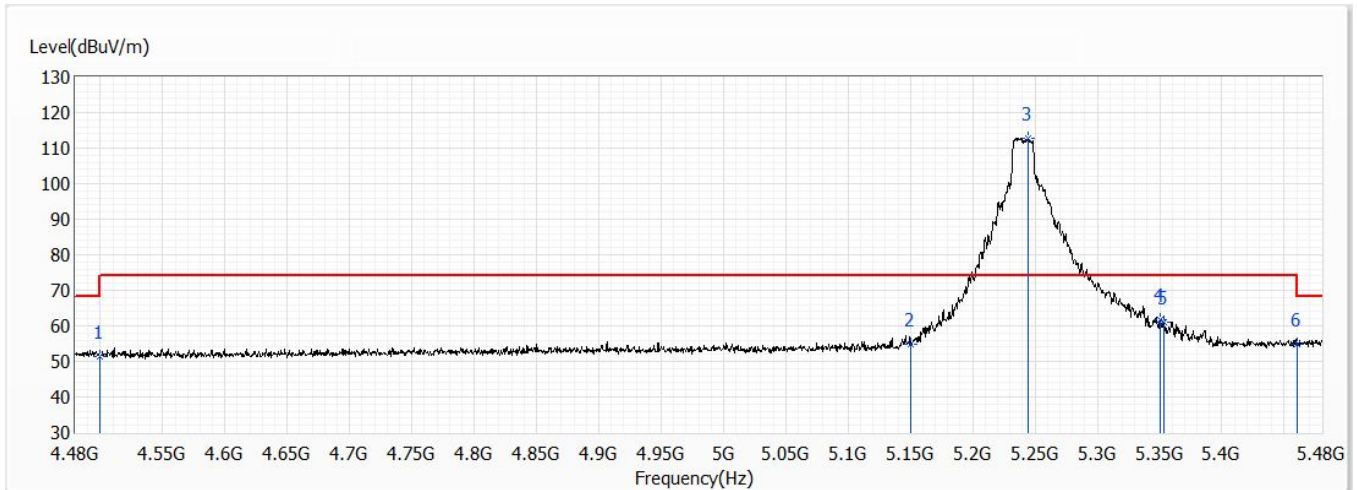


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.45	74.00	-22.55	29.48	21.97	PK
2	5150.000	54.87	74.00	-19.13	31.30	23.57	PK
! 3	5244.500	112.77	74.00	38.77	89.01	23.76	PK
4	5350.000	61.78	74.00	-12.22	37.81	23.97	PK
5	5353.500	61.11	74.00	-12.89	37.14	23.97	PK
6	5460.000	54.96	74.00	-19.04	30.78	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 48,5.24G,BW20M	Humidity (%RH)	66.0

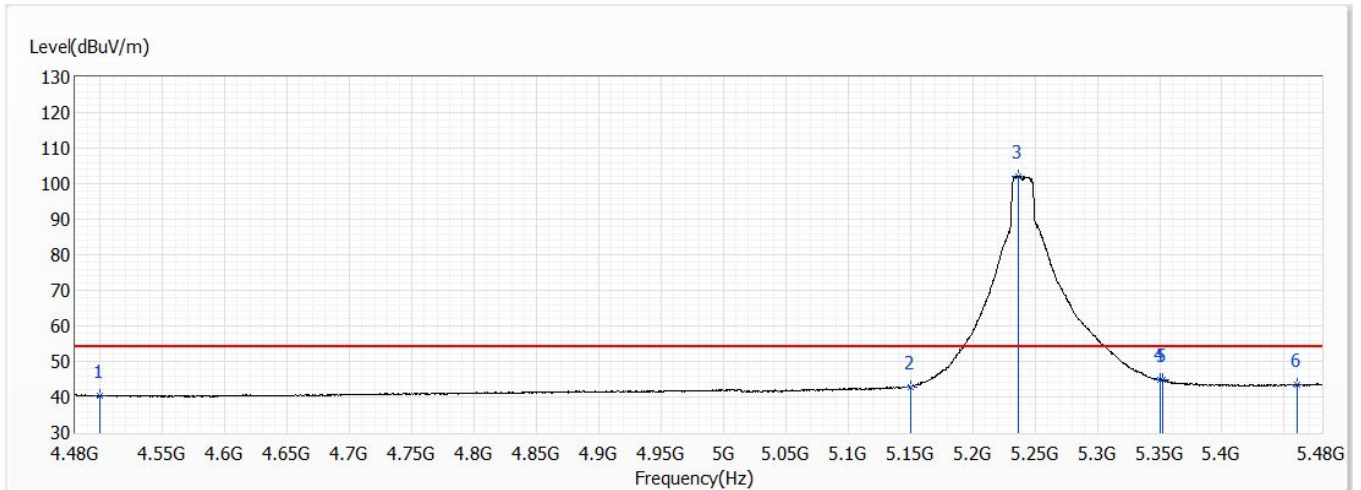


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.37	54.00	-13.63	18.40	21.97	AV
2	5150.000	42.93	54.00	-11.07	19.36	23.57	AV
! 3	5237.000	102.21	54.00	48.21	78.47	23.74	AV
4	5350.000	44.99	54.00	-9.01	21.02	23.97	AV
5	5352.000	44.75	54.00	-9.25	20.78	23.97	AV
6	5460.000	43.39	54.00	-10.61	19.21	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 36,5.18G,BW20M	Humidity (%RH)	66.0

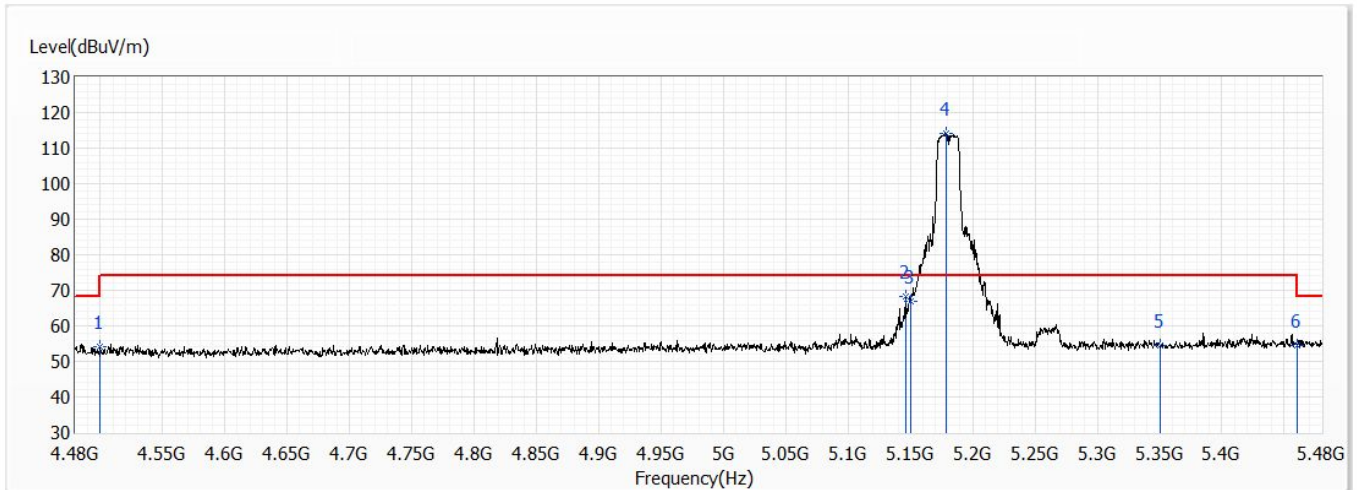


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.31	74.00	-19.69	30.64	23.67	PK
2	5146.000	68.11	74.00	-5.89	43.67	24.44	PK
3	5150.000	66.73	74.00	-7.27	42.29	24.44	PK
! 4	5178.500	114.02	74.00	40.02	89.52	24.50	PK
5	5350.000	54.49	74.00	-19.51	29.69	24.80	PK
6	5460.000	54.39	74.00	-19.61	29.40	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 36,5.18G,BW20M	Humidity (%RH)	66.0

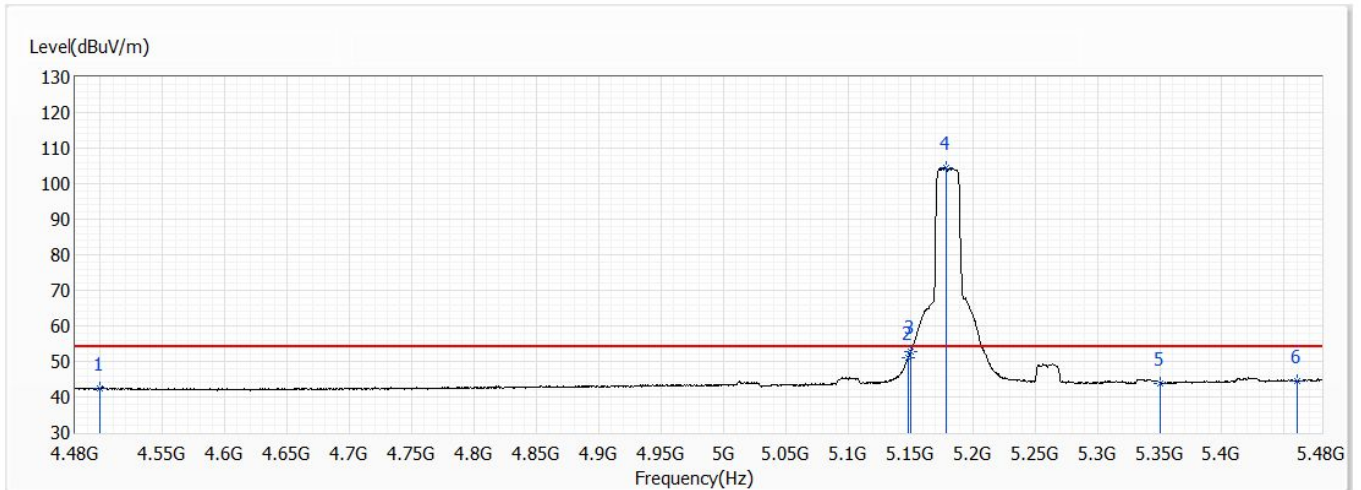


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.26	54.00	-11.74	18.59	23.67	AV
2	5148.000	50.88	54.00	-3.12	26.44	24.44	AV
3	5150.000	52.88	54.00	-1.12	28.44	24.44	AV
! 4	5178.500	104.45	54.00	50.45	79.95	24.50	AV
5	5350.000	43.73	54.00	-10.27	18.93	24.80	AV
6	5460.000	44.59	54.00	-9.41	19.60	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 36,5.18G,BW20M	Humidity (%RH)	66.0

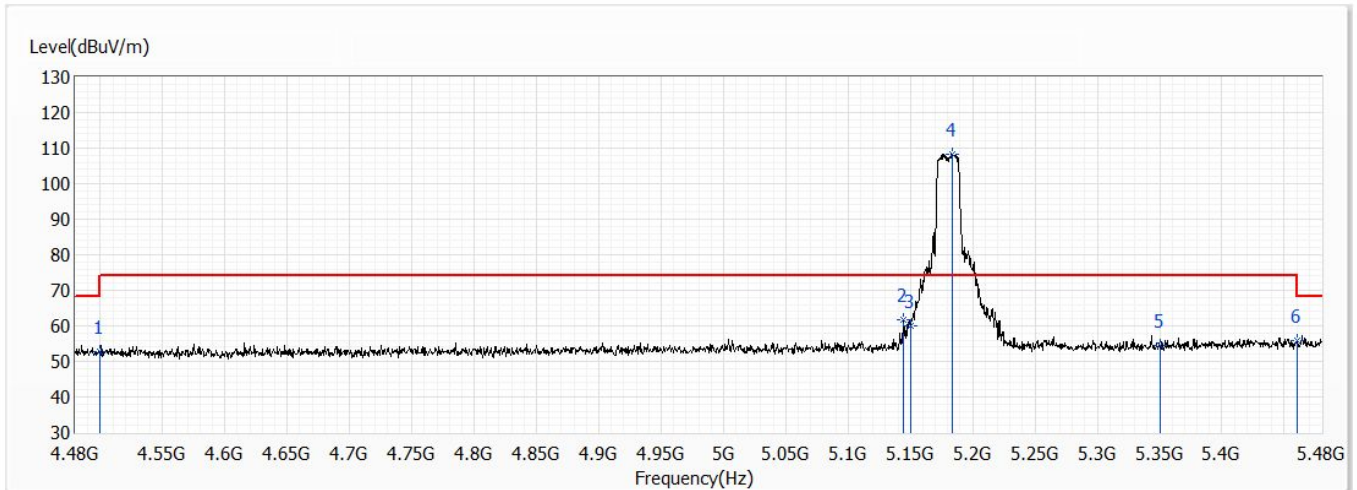


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.64	74.00	-21.36	28.97	23.67	PK
2	5144.500	61.68	74.00	-12.32	37.25	24.43	PK
3	5150.000	60.14	74.00	-13.86	35.70	24.44	PK
! 4	5183.500	108.38	74.00	34.38	83.88	24.50	PK
5	5350.000	54.48	74.00	-19.52	29.68	24.80	PK
6	5460.000	55.79	74.00	-18.21	30.80	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 36,5.18G,BW20M	Humidity (%RH)	66.0

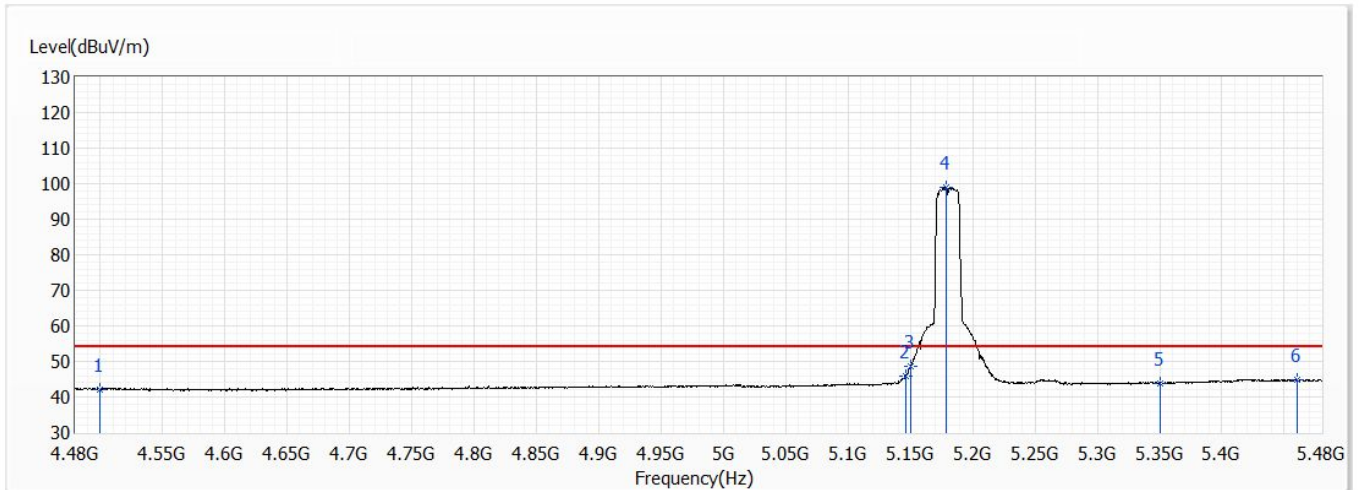


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.11	54.00	-11.89	18.44	23.67	AV
2	5146.000	45.92	54.00	-8.08	21.48	24.44	AV
3	5150.000	48.74	54.00	-5.26	24.30	24.44	AV
! 4	5178.500	98.93	54.00	44.93	74.43	24.50	AV
5	5350.000	43.87	54.00	-10.13	19.07	24.80	AV
6	5460.000	44.75	54.00	-9.25	19.76	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 44,5.22G,BW20M	Humidity (%RH)	66.0

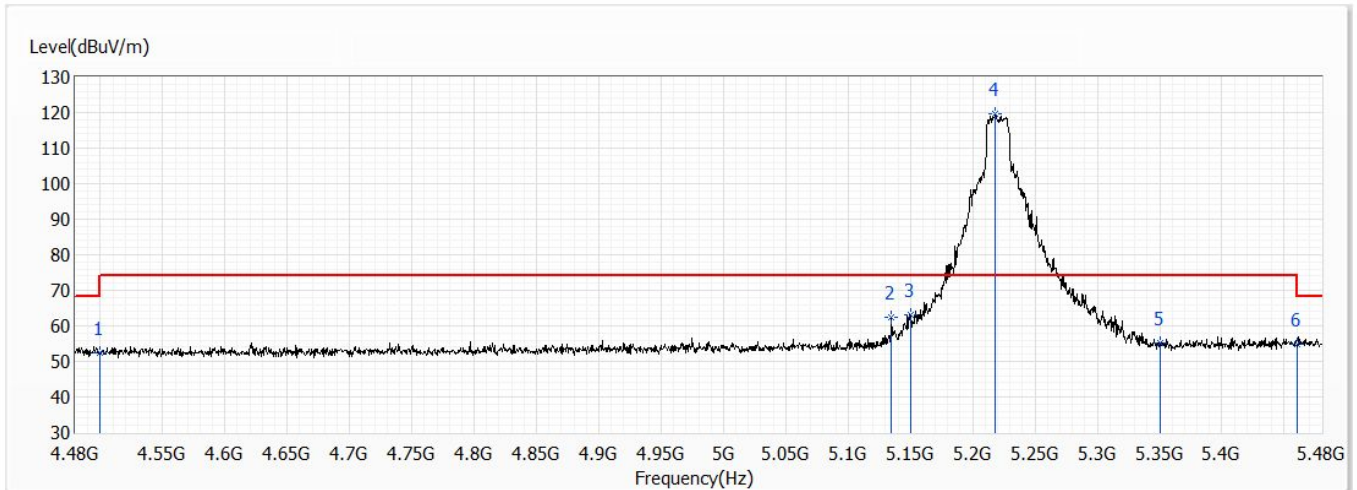


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.26	74.00	-21.74	28.59	23.67	PK
2	5135.000	62.56	74.00	-11.44	38.15	24.41	PK
3	5150.000	63.13	74.00	-10.87	38.69	24.44	PK
! 4	5218.000	119.49	74.00	45.49	94.93	24.56	PK
5	5350.000	55.08	74.00	-18.92	30.28	24.80	PK
6	5460.000	54.76	74.00	-19.24	29.77	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 44,5.22G,BW20M	Humidity (%RH)	66.0

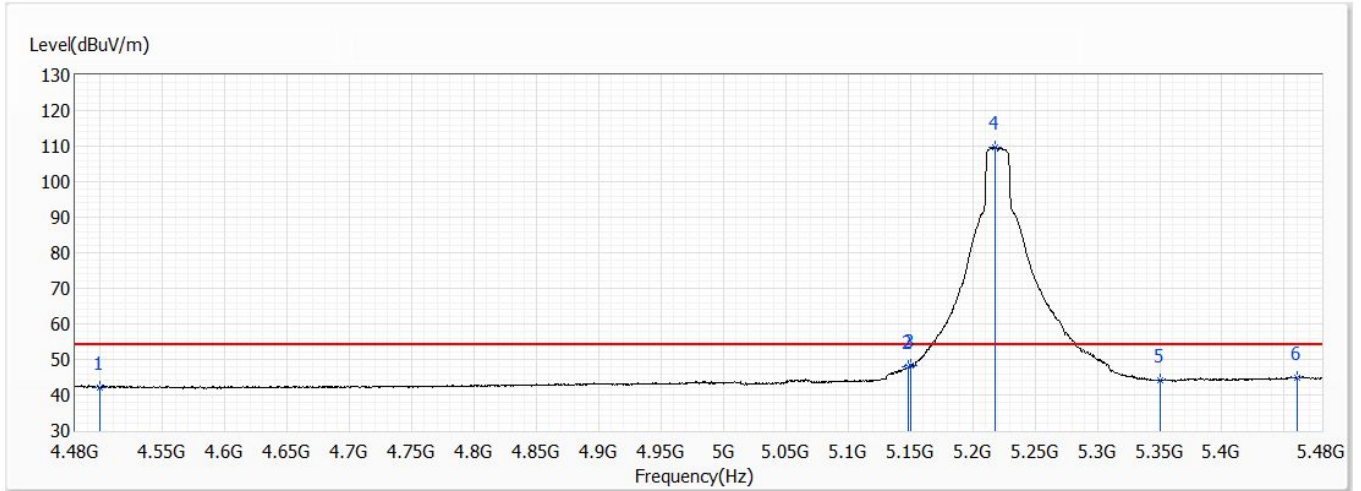


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.13	54.00	-11.87	18.46	23.67	AV
2	5148.000	48.04	54.00	-5.96	23.60	24.44	AV
3	5150.000	48.15	54.00	-5.85	23.71	24.44	AV
! 4	5218.000	109.72	54.00	55.72	85.16	24.56	AV
5	5350.000	44.20	54.00	-9.80	19.40	24.80	AV
6	5460.000	44.93	54.00	-9.07	19.94	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 44,5.22G,BW20M	Humidity (%RH)	66.0

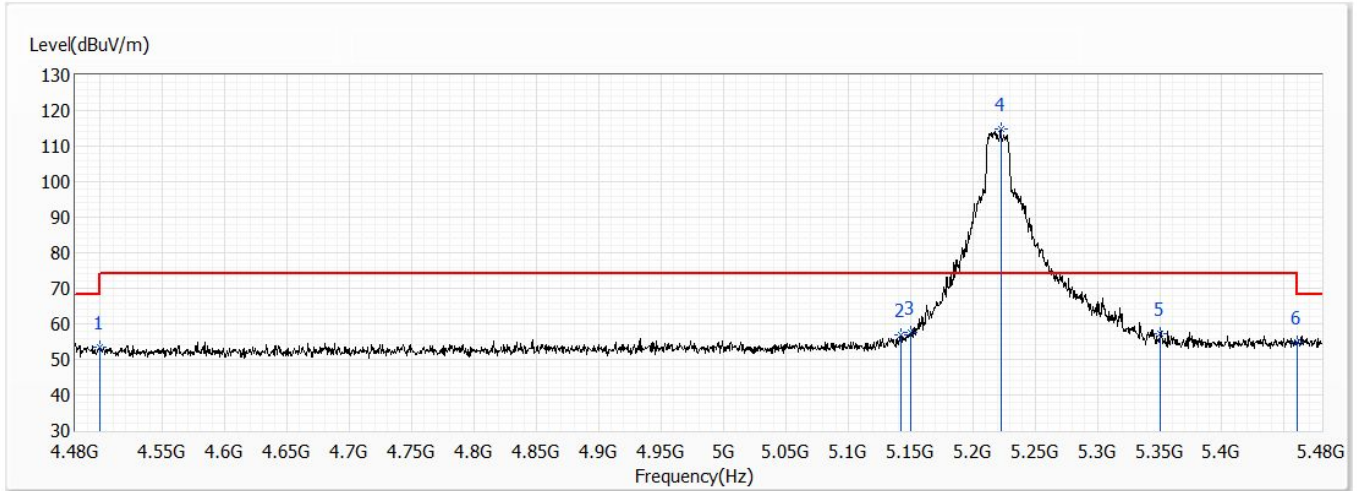


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.44	74.00	-20.56	29.77	23.67	PK
2	5142.000	56.91	74.00	-17.09	32.48	24.43	PK
3	5150.000	57.63	74.00	-16.37	33.19	24.44	PK
! 4	5222.500	114.68	74.00	40.68	90.12	24.56	PK
5	5350.000	57.21	74.00	-16.79	32.41	24.80	PK
6	5460.000	54.98	74.00	-19.02	29.99	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 44,5.22G,BW20M	Humidity (%RH)	66.0

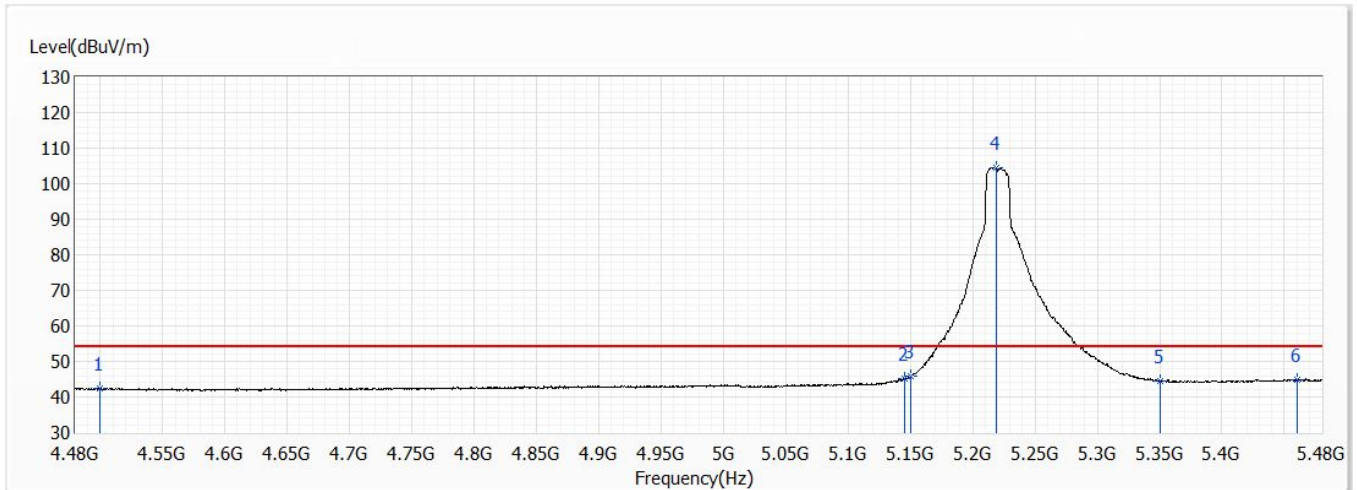


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.31	54.00	-11.69	18.64	23.67	AV
2	5145.500	45.25	54.00	-8.75	20.81	24.44	AV
3	5150.000	45.81	54.00	-8.19	21.37	24.44	AV
! 4	5219.000	104.58	54.00	50.58	80.02	24.56	AV
5	5350.000	44.59	54.00	-9.41	19.79	24.80	AV
6	5460.000	44.95	54.00	-9.05	19.96	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 48,5.24G,BW20M	Humidity (%RH)	66.0

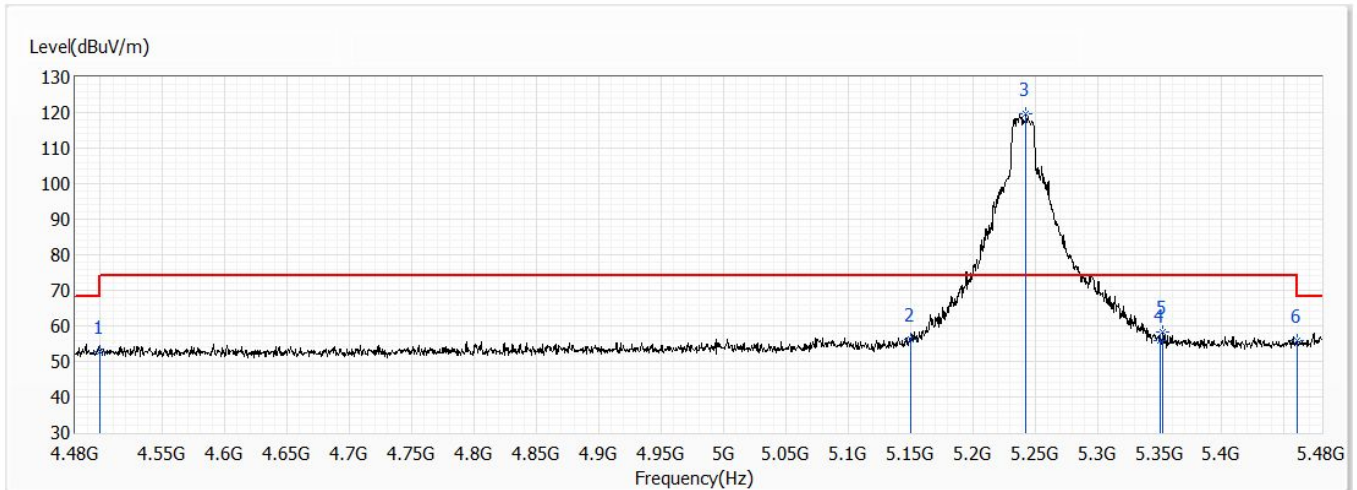


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.91	74.00	-21.09	29.24	23.67	PK
2	5150.000	56.13	74.00	-17.87	31.69	24.44	PK
! 3	5243.000	119.56	74.00	45.56	94.95	24.61	PK
4	5350.000	55.76	74.00	-18.24	30.96	24.80	PK
5	5352.500	58.33	74.00	-15.67	33.53	24.80	PK
6	5460.000	55.87	74.00	-18.13	30.88	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 48,5.24G,BW20M	Humidity (%RH)	66.0

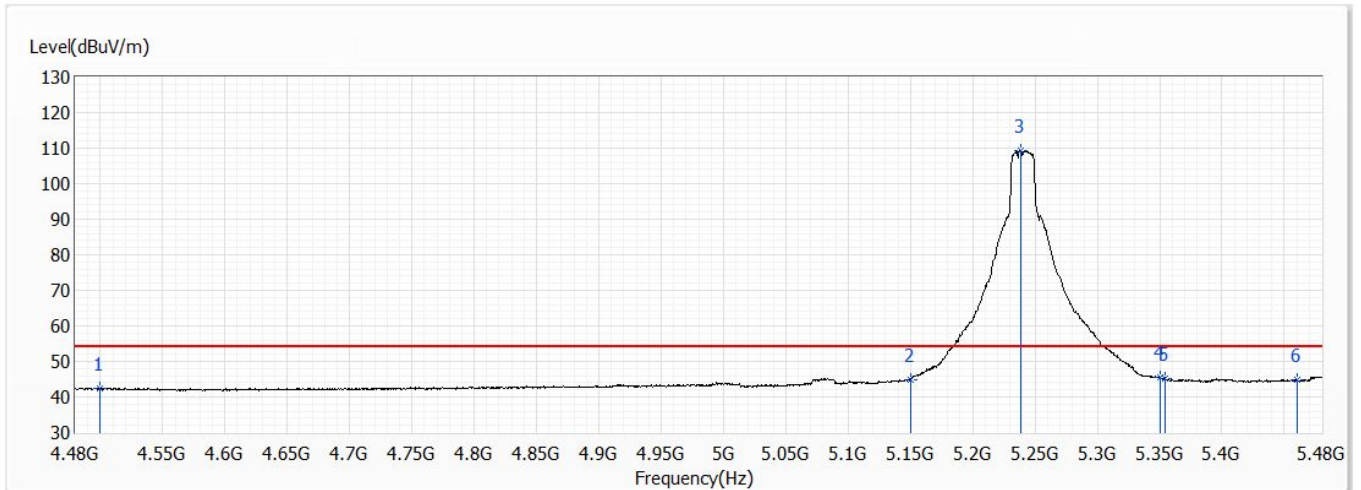


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.33	54.00	-11.67	18.66	23.67	AV
2	5150.000	44.87	54.00	-9.13	20.43	24.44	AV
3	5238.500	109.25	54.00	55.25	84.65	24.60	AV
4	5350.000	45.42	54.00	-8.58	20.62	24.80	AV
5	5354.500	45.14	54.00	-8.86	20.34	24.80	AV
6	5460.000	44.71	54.00	-9.29	19.72	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 48,5.24G,BW20M	Humidity (%RH)	66.0

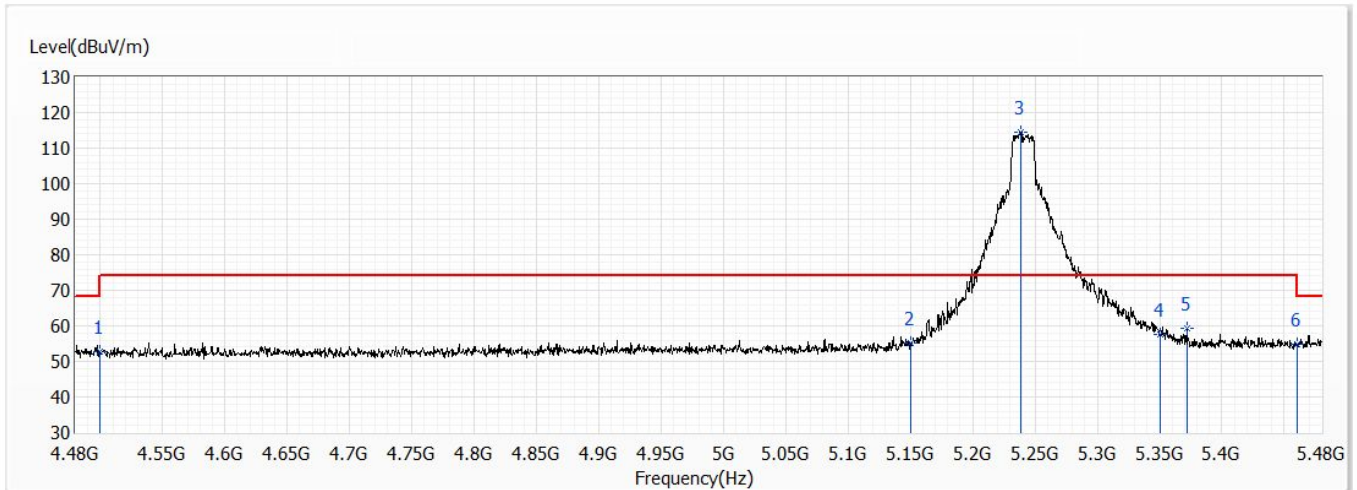


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.65	74.00	-21.35	28.98	23.67	PK
2	5150.000	55.04	74.00	-18.96	30.60	24.44	PK
! 3	5239.000	114.54	74.00	40.54	89.94	24.60	PK
4	5350.000	57.51	74.00	-16.49	32.71	24.80	PK
5	5372.000	59.16	74.00	-14.84	34.33	24.83	PK
6	5460.000	54.73	74.00	-19.27	29.74	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 48,5.24G,BW20M	Humidity (%RH)	66.0

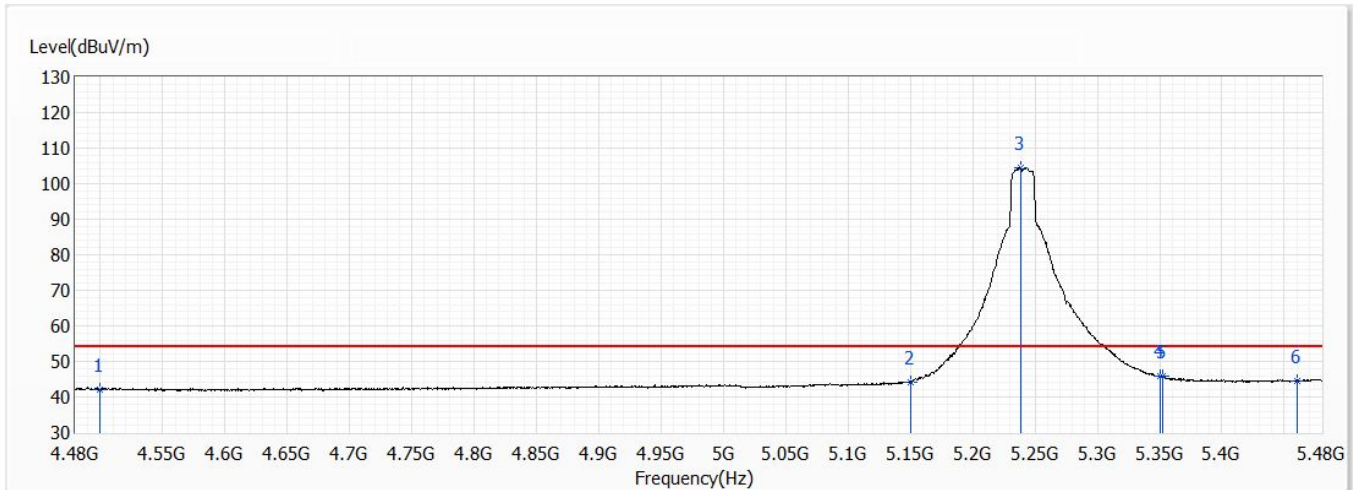


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.21	54.00	-11.79	18.54	23.67	AV
2	5150.000	44.09	54.00	-9.91	19.65	24.44	AV
! 3	5238.500	104.46	54.00	50.46	79.86	24.60	AV
4	5350.000	45.93	54.00	-8.07	21.13	24.80	AV
5	5352.500	45.78	54.00	-8.22	20.98	24.80	AV
6	5460.000	44.60	54.00	-9.40	19.61	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 38,5.19G,BW40M	Humidity (%RH)	66.0

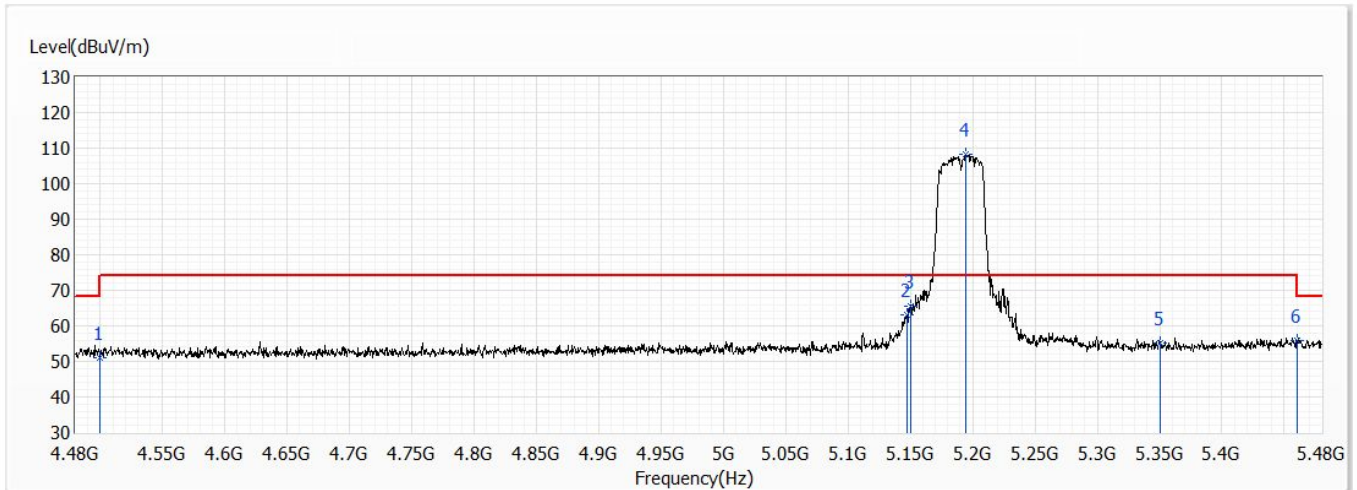


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.15	74.00	-22.85	27.48	23.67	PK
2	5147.000	62.94	74.00	-11.06	38.50	24.44	PK
3	5150.000	65.46	74.00	-8.54	41.02	24.44	PK
! 4	5194.000	108.33	74.00	34.33	83.81	24.52	PK
5	5350.000	55.31	74.00	-18.69	30.51	24.80	PK
6	5460.000	55.82	74.00	-18.18	30.83	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 38,5.19G,BW40M	Humidity (%RH)	66.0

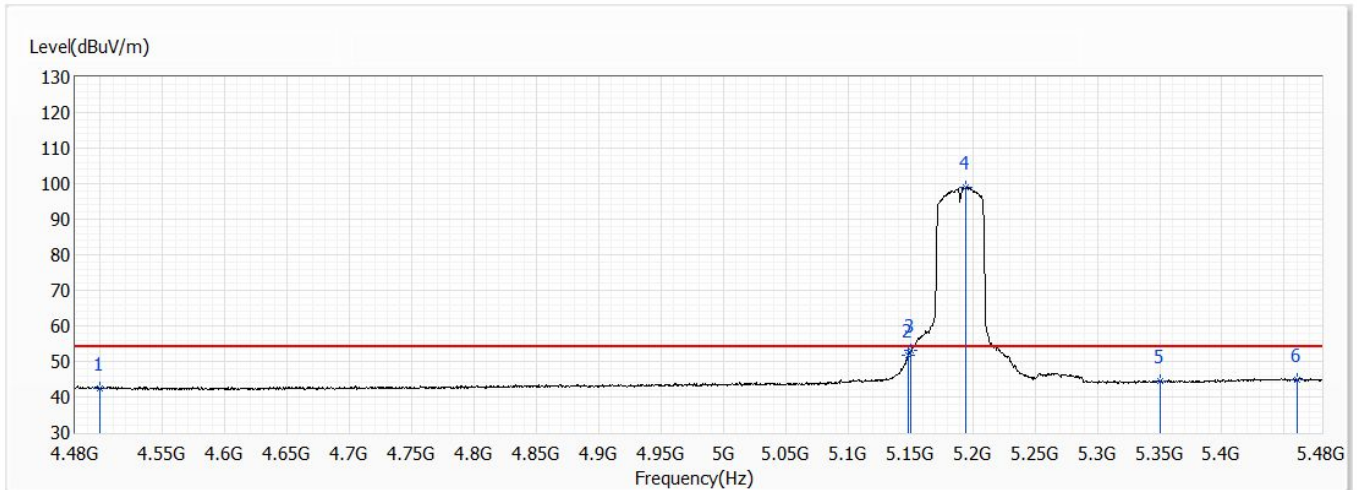


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.52	54.00	-11.48	18.85	23.67	AV
2	5148.000	51.64	54.00	-2.36	27.20	24.44	AV
3	5150.000	53.04	54.00	-0.96	28.60	24.44	AV
! 4	5194.000	99.07	54.00	45.07	74.55	24.52	AV
5	5350.000	44.41	54.00	-9.59	19.61	24.80	AV
6	5460.000	44.73	54.00	-9.27	19.74	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 38,5.19G,BW40M	Humidity (%RH)	66.0

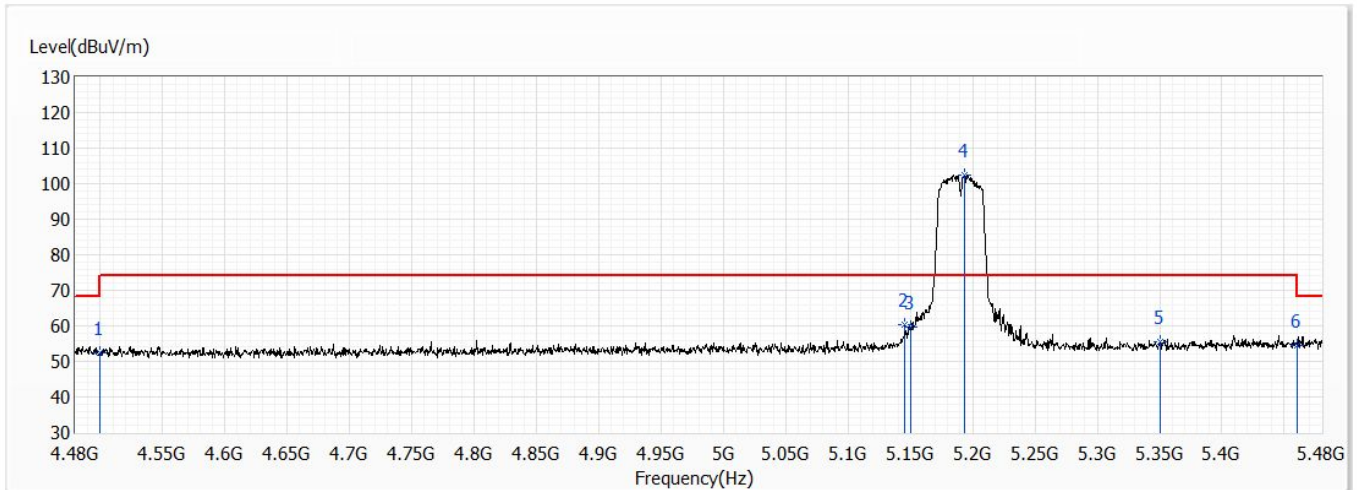


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.26	74.00	-21.74	28.59	23.67	PK
2	5145.500	60.23	74.00	-13.77	35.79	24.44	PK
3	5150.000	59.52	74.00	-14.48	35.08	24.44	PK
! 4	5193.500	102.39	74.00	28.39	77.87	24.52	PK
5	5350.000	55.39	74.00	-18.61	30.59	24.80	PK
6	5460.000	54.52	74.00	-19.48	29.53	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 38,5.19G,BW40M	Humidity (%RH)	66.0

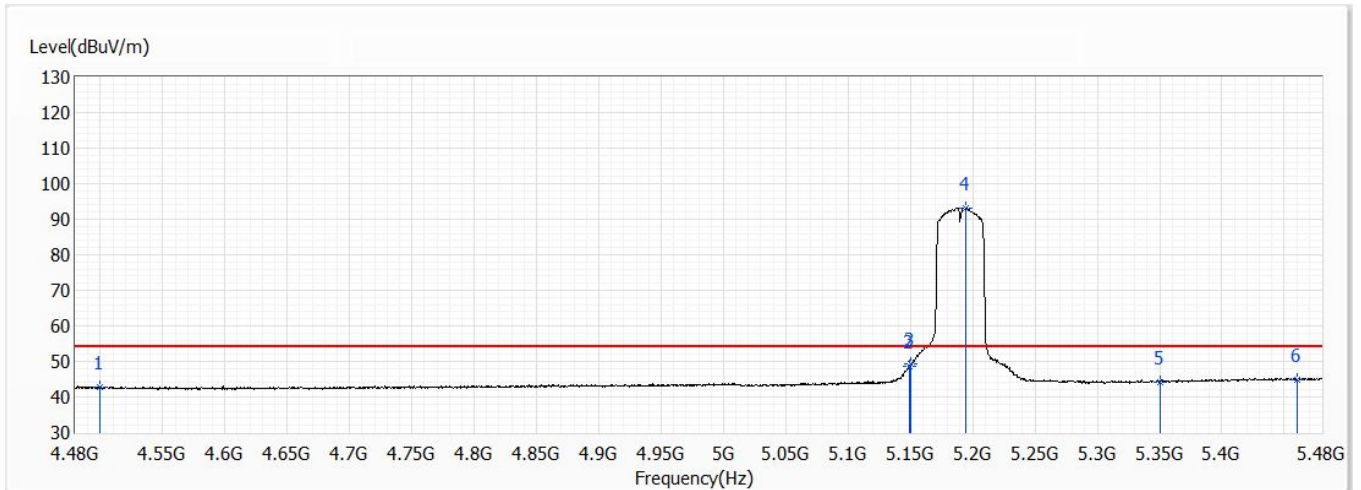


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.72	54.00	-11.28	19.05	23.67	AV
2	5149.000	48.70	54.00	-5.30	24.26	24.44	AV
3	5150.000	49.19	54.00	-4.81	24.75	24.44	AV
! 4	5194.000	93.21	54.00	39.21	68.69	24.52	AV
5	5350.000	44.20	54.00	-9.80	19.40	24.80	AV
6	5460.000	44.86	54.00	-9.14	19.87	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 46,5.23G,BW40M	Humidity (%RH)	66.0

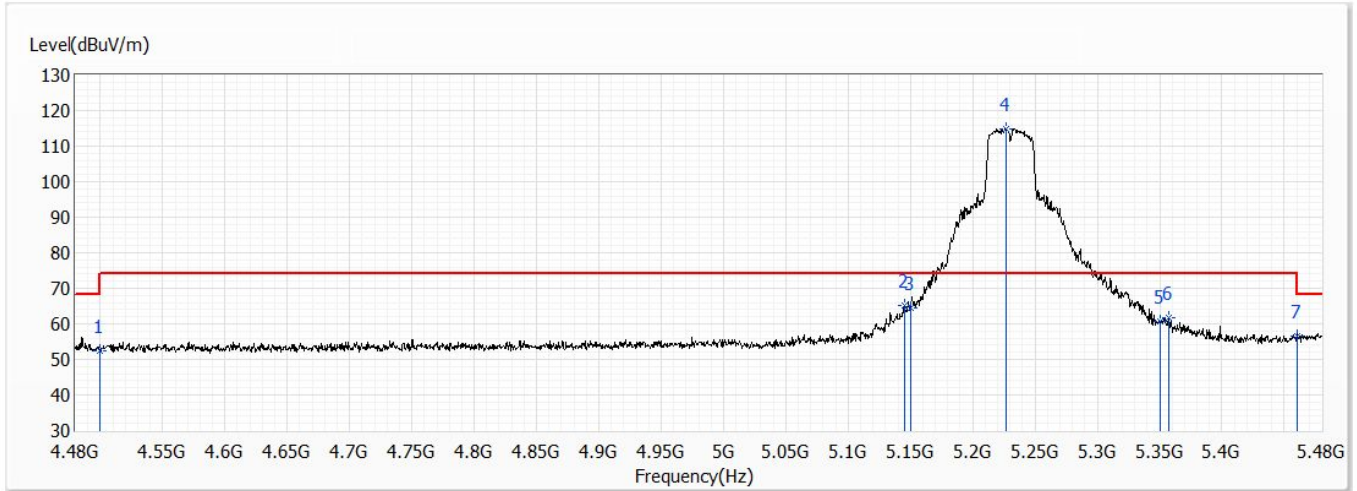


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.37	74.00	-21.63	28.70	23.67	PK
2	5145.000	65.19	74.00	-8.81	40.76	24.43	PK
3	5150.000	64.64	74.00	-9.36	40.20	24.44	PK
! 4	5226.500	114.96	74.00	40.96	90.37	24.59	PK
5	5350.000	60.66	74.00	-13.34	35.86	24.80	PK
6	5357.500	61.68	74.00	-12.32	36.87	24.81	PK
7	5460.000	56.68	74.00	-17.32	31.69	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 46,5.23G,BW40M	Humidity (%RH)	66.0

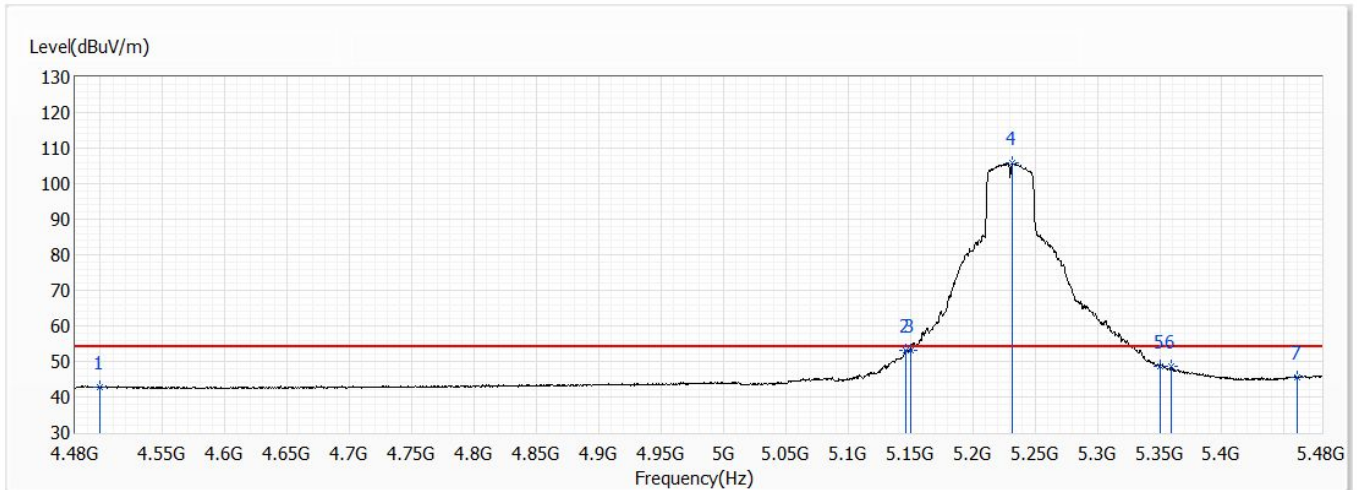


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.76	54.00	-11.24	19.09	23.67	AV
2	5146.000	53.10	54.00	-0.90	28.66	24.44	AV
3	5150.000	53.05	54.00	-0.95	28.61	24.44	AV
! 4	5232.000	105.74	54.00	51.74	81.15	24.59	AV
5	5350.000	48.65	54.00	-5.35	23.85	24.80	AV
6	5359.500	48.48	54.00	-5.52	23.67	24.81	AV
7	5460.000	45.56	54.00	-8.44	20.57	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 46,5.23G,BW40M	Humidity (%RH)	66.0

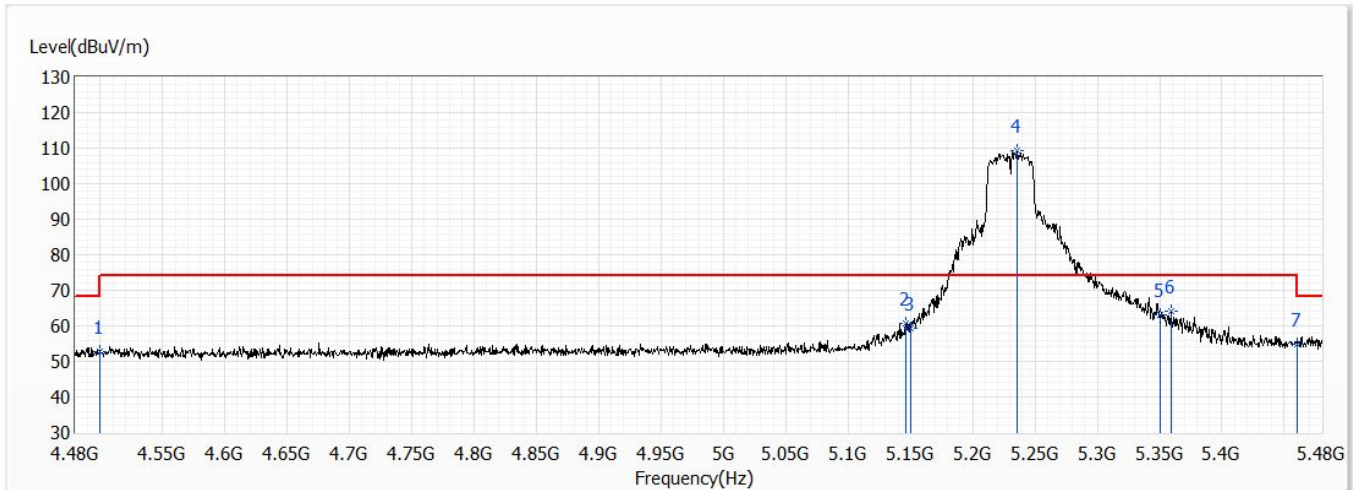


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.63	74.00	-21.37	28.96	23.67	PK
2	5146.500	60.66	74.00	-13.34	36.22	24.44	PK
3	5150.000	59.25	74.00	-14.75	34.81	24.44	PK
! 4	5235.500	109.42	74.00	35.42	84.82	24.60	PK
5	5350.000	63.26	74.00	-10.74	38.46	24.80	PK
6	5359.000	63.97	74.00	-10.03	39.16	24.81	PK
7	5460.000	54.86	74.00	-19.14	29.87	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 46,5.23G,BW40M	Humidity (%RH)	66.0

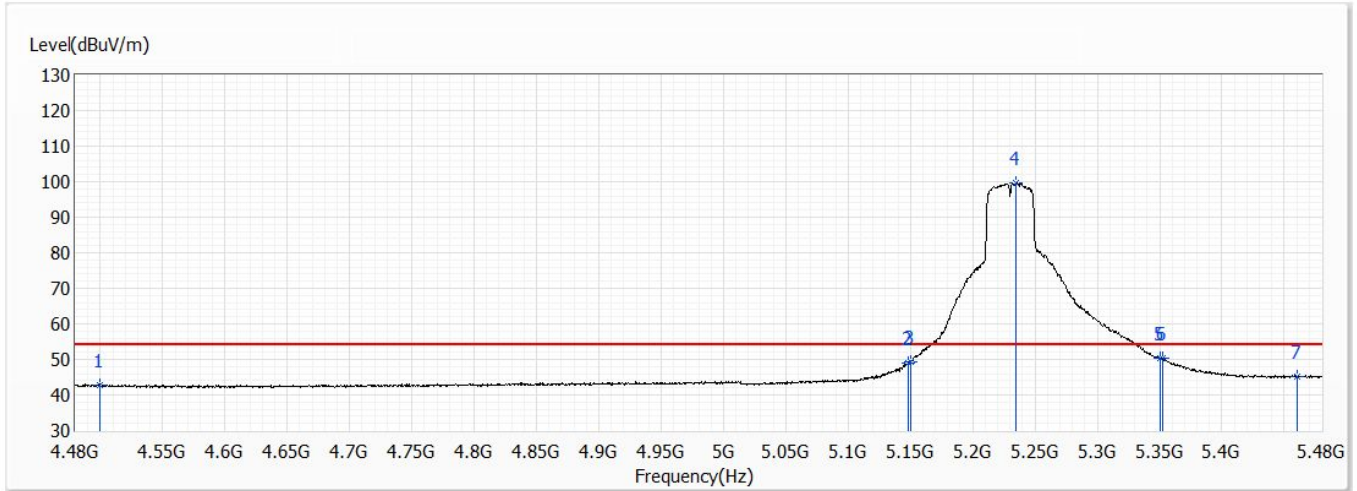


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.67	54.00	-11.33	19.00	23.67	AV
2	5148.000	48.95	54.00	-5.05	24.51	24.44	AV
3	5150.000	49.42	54.00	-4.58	24.98	24.44	AV
! 4	5235.000	99.70	54.00	45.70	75.11	24.59	AV
5	5350.000	50.47	54.00	-3.53	25.67	24.80	AV
6	5352.000	50.49	54.00	-3.51	25.69	24.80	AV
7	5460.000	45.20	54.00	-8.80	20.21	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 42,5.21G,BW80M	Humidity (%RH)	66.0

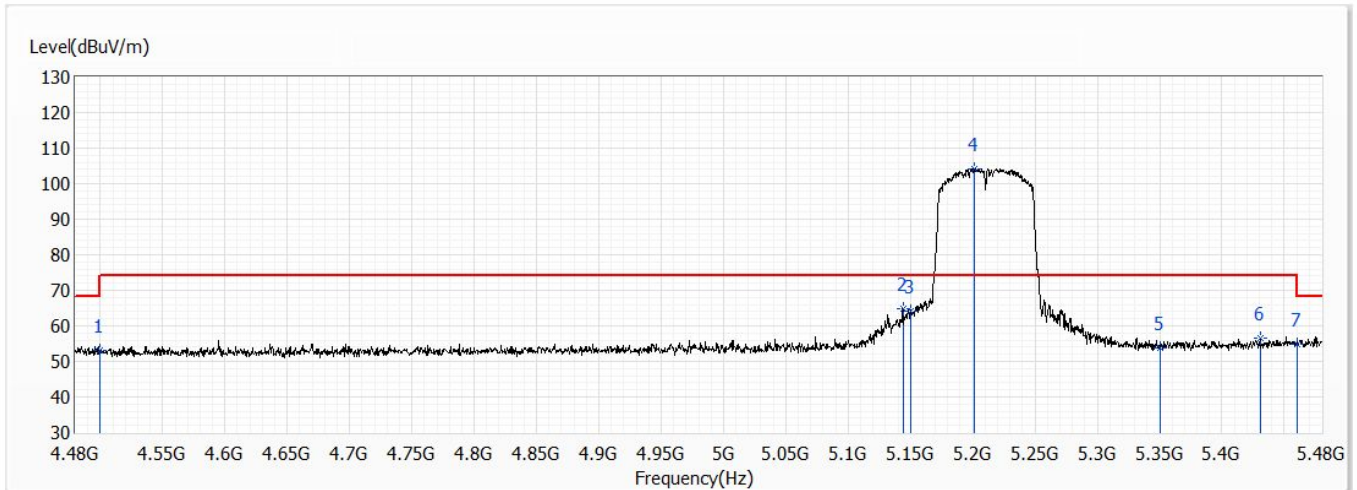


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.23	74.00	-20.77	29.56	23.67	PK
2	5144.000	64.90	74.00	-9.10	40.47	24.43	PK
3	5150.000	64.14	74.00	-9.86	39.70	24.44	PK
! 4	5201.000	104.23	74.00	30.23	79.70	24.53	PK
5	5350.000	53.65	74.00	-20.35	28.85	24.80	PK
6	5430.500	56.57	74.00	-17.43	31.62	24.95	PK
7	5460.000	54.80	74.00	-19.20	29.81	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 42,5.21G,BW80M	Humidity (%RH)	66.0

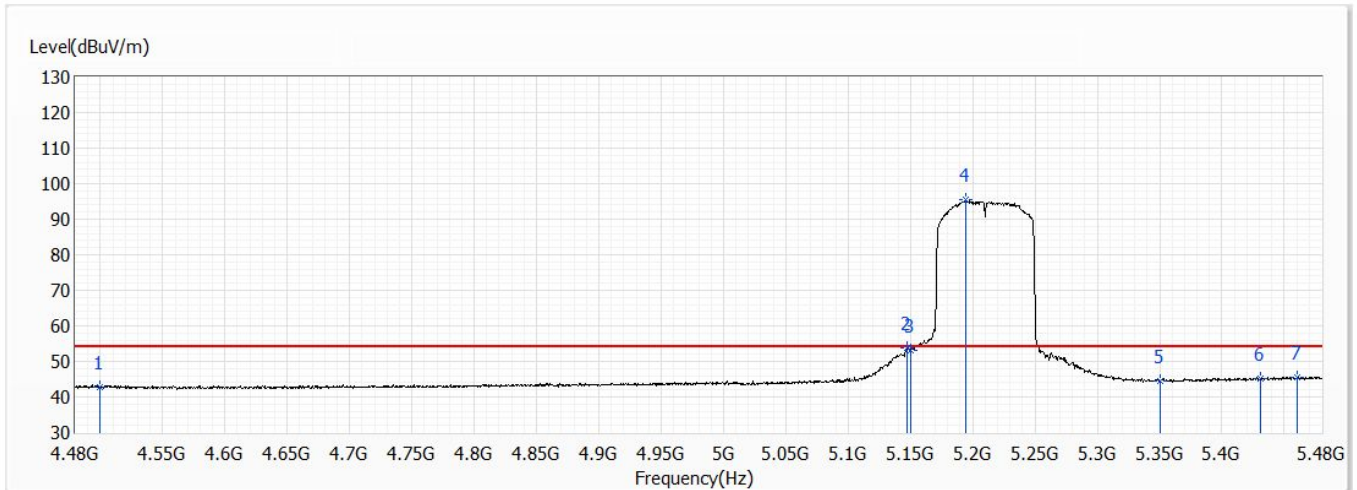


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.77	54.00	-11.23	19.10	23.67	AV
2	5147.500	53.73	54.00	-0.27	29.29	24.44	AV
3	5150.000	53.18	54.00	-0.82	28.74	24.44	AV
! 4	5194.500	95.38	54.00	41.38	70.86	24.52	AV
5	5350.000	44.36	54.00	-9.64	19.56	24.80	AV
6	5431.000	45.04	54.00	-8.96	20.09	24.95	AV
7	5460.000	45.43	54.00	-8.57	20.44	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 42,5.21G,BW80M	Humidity (%RH)	66.0

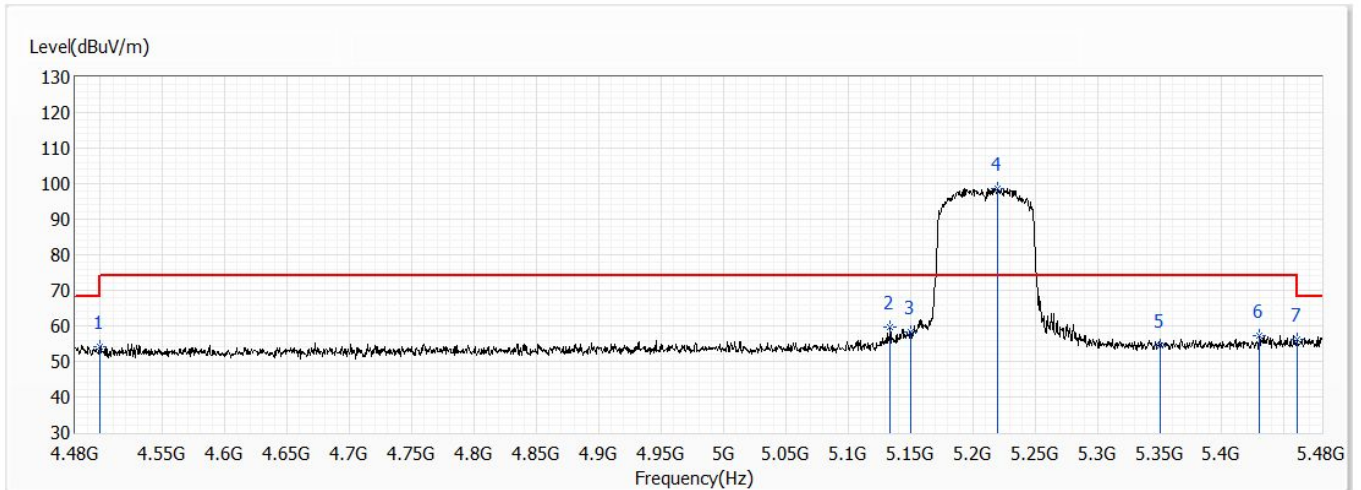


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	54.21	74.00	-19.79	30.54	23.67	PK
2	5134.000	59.81	74.00	-14.19	35.40	24.41	PK
3	5150.000	58.19	74.00	-15.81	33.75	24.44	PK
! 4	5220.000	98.74	74.00	24.74	74.18	24.56	PK
5	5350.000	54.61	74.00	-19.39	29.81	24.80	PK
6	5429.500	57.26	74.00	-16.74	32.31	24.95	PK
7	5460.000	56.09	74.00	-17.91	31.10	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/10
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 42,5.21G,BW80M	Humidity (%RH)	66.0

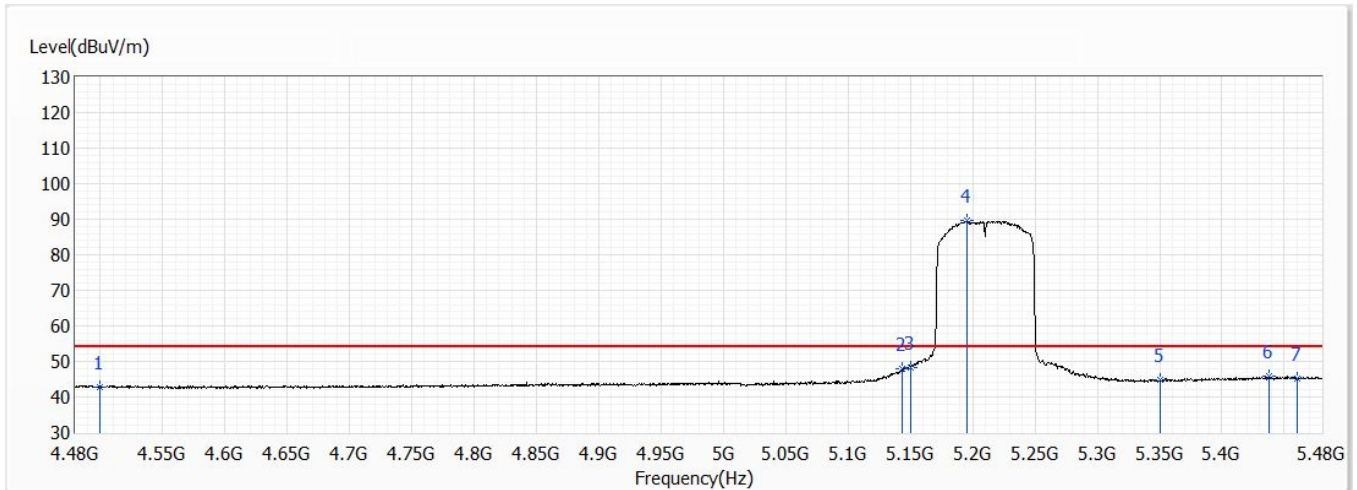


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.79	54.00	-11.21	19.12	23.67	AV
2	5143.500	47.81	54.00	-6.19	23.38	24.43	AV
3	5150.000	48.23	54.00	-5.77	23.79	24.44	AV
! 4	5195.000	89.57	54.00	35.57	65.04	24.53	AV
5	5350.000	44.78	54.00	-9.22	19.98	24.80	AV
6	5437.500	45.86	54.00	-8.14	20.90	24.96	AV
7	5460.000	45.16	54.00	-8.84	20.17	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 52,5.26G,BW20M	Humidity (%RH)	66.0

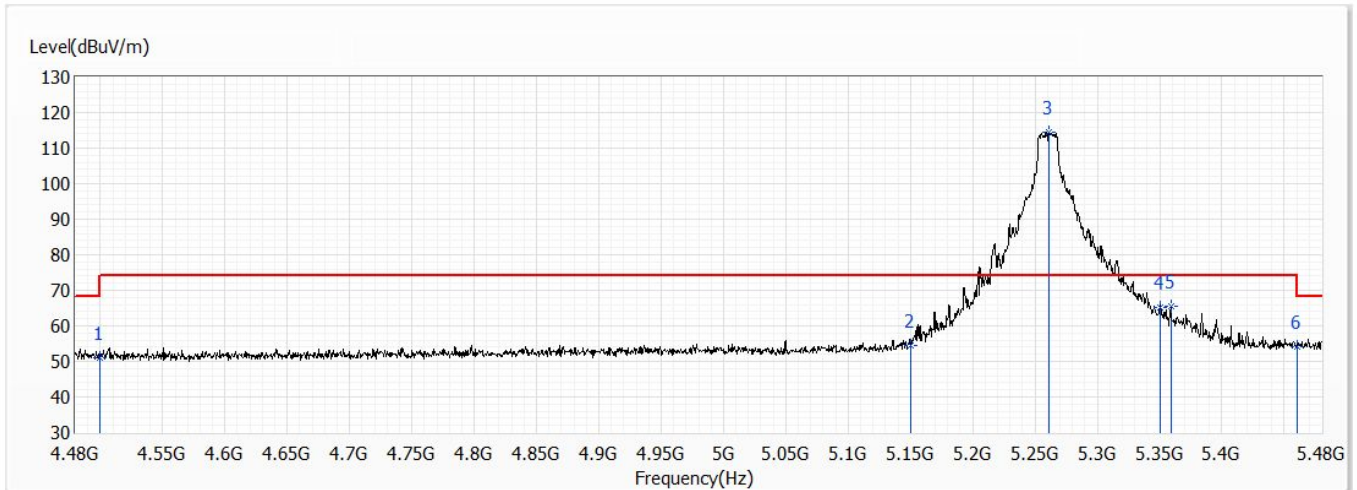


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.96	74.00	-23.04	28.99	21.97	PK
2	5150.000	54.40	74.00	-19.60	30.83	23.57	PK
! 3	5261.500	114.48	74.00	40.48	90.69	23.79	PK
4	5350.000	65.01	74.00	-8.99	41.04	23.97	PK
5	5359.000	65.62	74.00	-8.38	41.64	23.98	PK
6	5460.000	54.07	74.00	-19.93	29.89	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 52,5.26G,BW20M	Humidity (%RH)	66.0

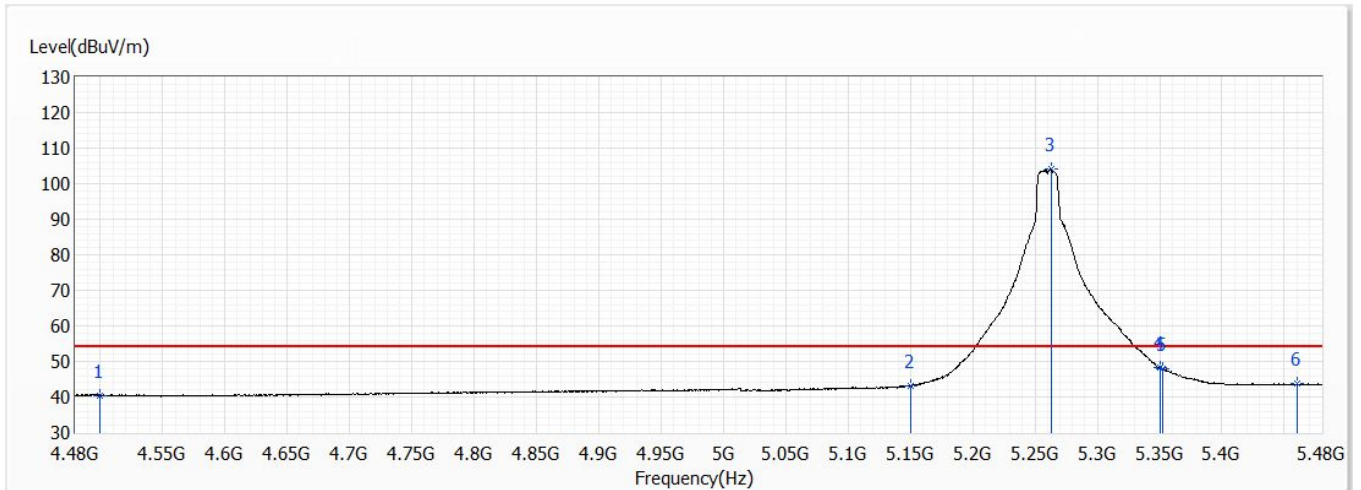


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.36	54.00	-13.64	18.39	21.97	AV
2	5150.000	43.12	54.00	-10.88	19.55	23.57	AV
! 3	5263.000	104.08	54.00	50.08	80.28	23.80	AV
4	5350.000	48.37	54.00	-5.63	24.40	23.97	AV
5	5352.000	47.99	54.00	-6.01	24.02	23.97	AV
6	5460.000	43.70	54.00	-10.30	19.52	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 52,5.26G,BW20M	Humidity (%RH)	66.0

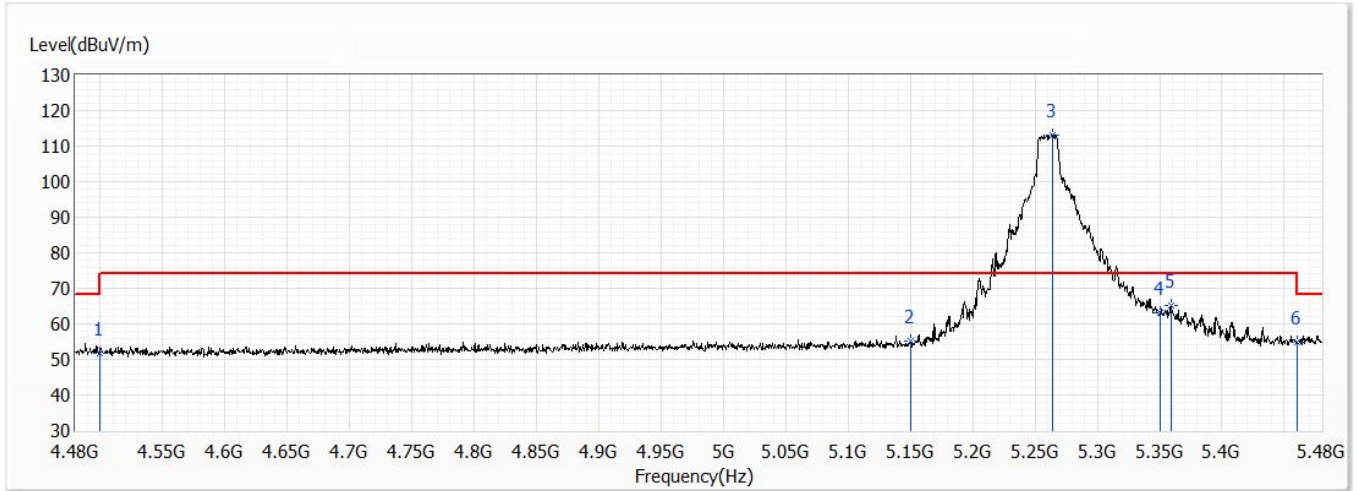


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.89	74.00	-22.11	29.92	21.97	PK
2	5150.000	55.04	74.00	-18.96	31.47	23.57	PK
! 3	5264.500	113.11	74.00	39.11	89.31	23.80	PK
4	5350.000	63.04	74.00	-10.96	39.07	23.97	PK
5	5359.000	65.29	74.00	-8.71	41.31	23.98	PK
6	5460.000	54.96	74.00	-19.04	30.78	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 52,5.26G,BW20M	Humidity (%RH)	66.0

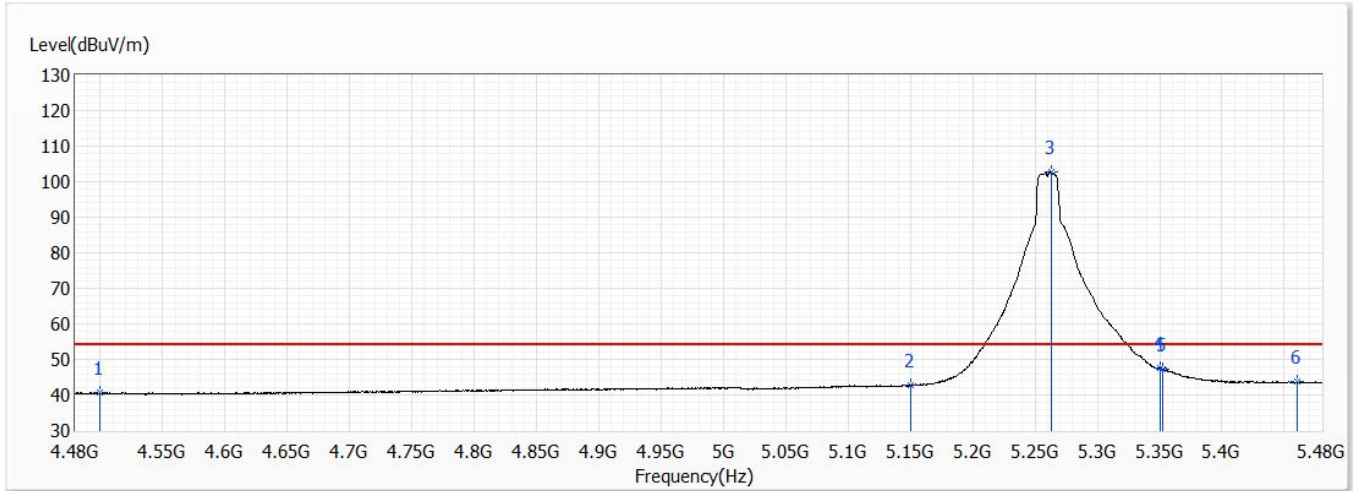


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.52	54.00	-13.48	18.55	21.97	AV
2	5150.000	42.78	54.00	-11.22	19.21	23.57	AV
! 3	5263.000	102.74	54.00	48.74	78.94	23.80	AV
4	5350.000	47.63	54.00	-6.37	23.66	23.97	AV
5	5352.500	47.30	54.00	-6.70	23.33	23.97	AV
6	5460.000	43.63	54.00	-10.37	19.45	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 60,5.3G,BW20M	Humidity (%RH)	66.0

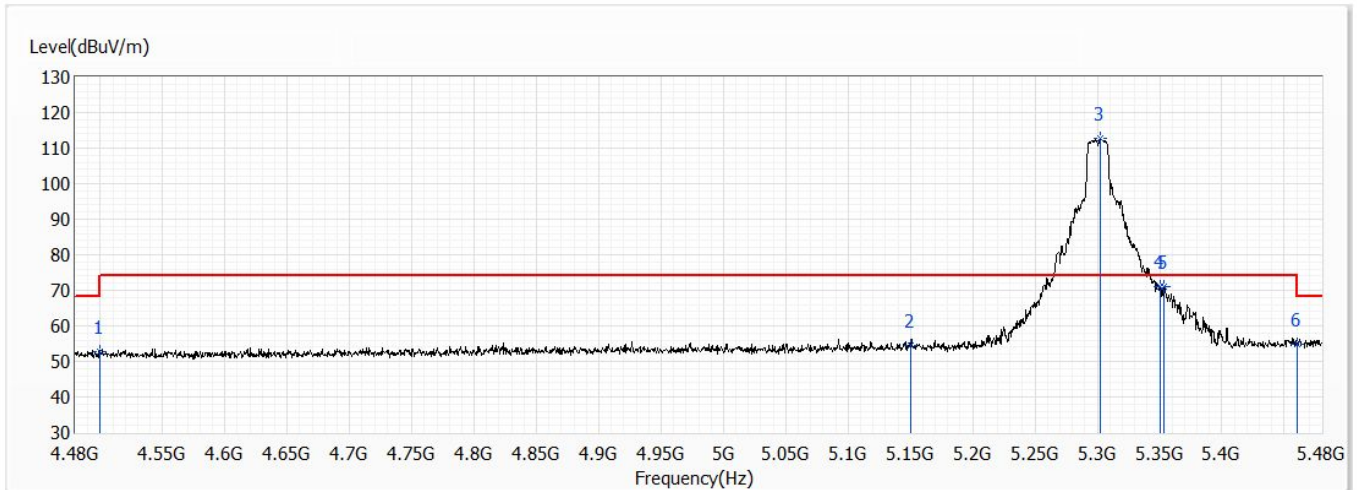


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.89	74.00	-21.11	30.92	21.97	PK
2	5150.000	54.34	74.00	-19.66	30.77	23.57	PK
! 3	5302.500	112.71	74.00	38.71	88.84	23.87	PK
4	5350.000	70.92	74.00	-3.08	46.95	23.97	PK
5	5353.500	70.94	74.00	-3.06	46.97	23.97	PK
6	5460.000	54.89	74.00	-19.11	30.71	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 60,5.3G,BW20M	Humidity (%RH)	66.0

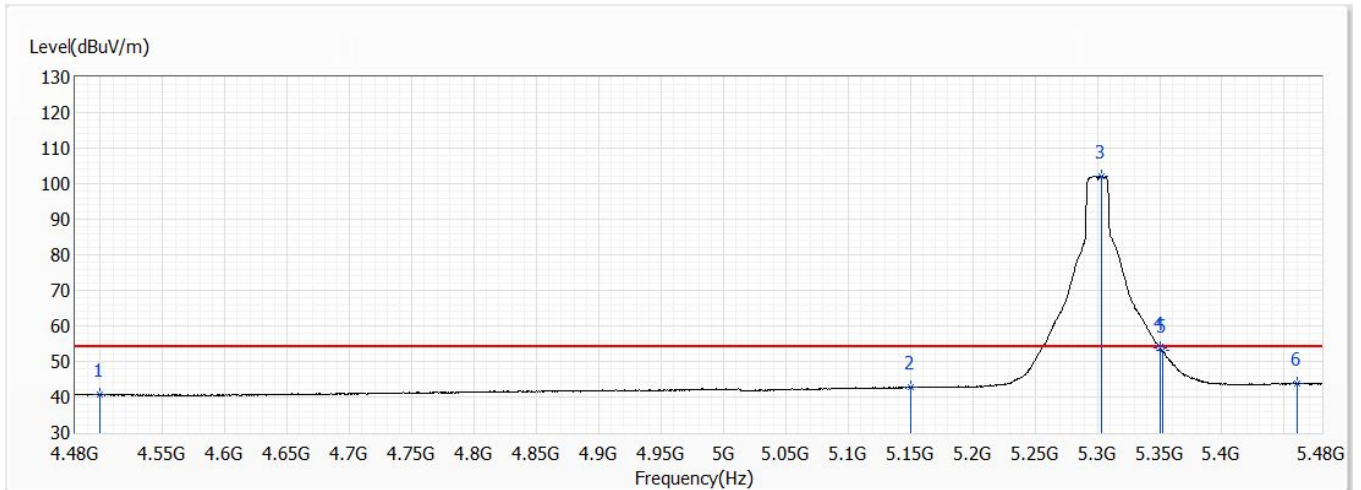


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.56	54.00	-13.44	18.59	21.97	AV
2	5150.000	42.66	54.00	-11.34	19.09	23.57	AV
! 3	5303.500	102.23	54.00	48.23	78.36	23.87	AV
4	5350.000	53.96	54.00	-0.04	29.99	23.97	AV
5	5352.000	53.09	54.00	-0.91	29.12	23.97	AV
6	5460.000	43.73	54.00	-10.27	19.55	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 60,5.3G,BW20M	Humidity (%RH)	66.0

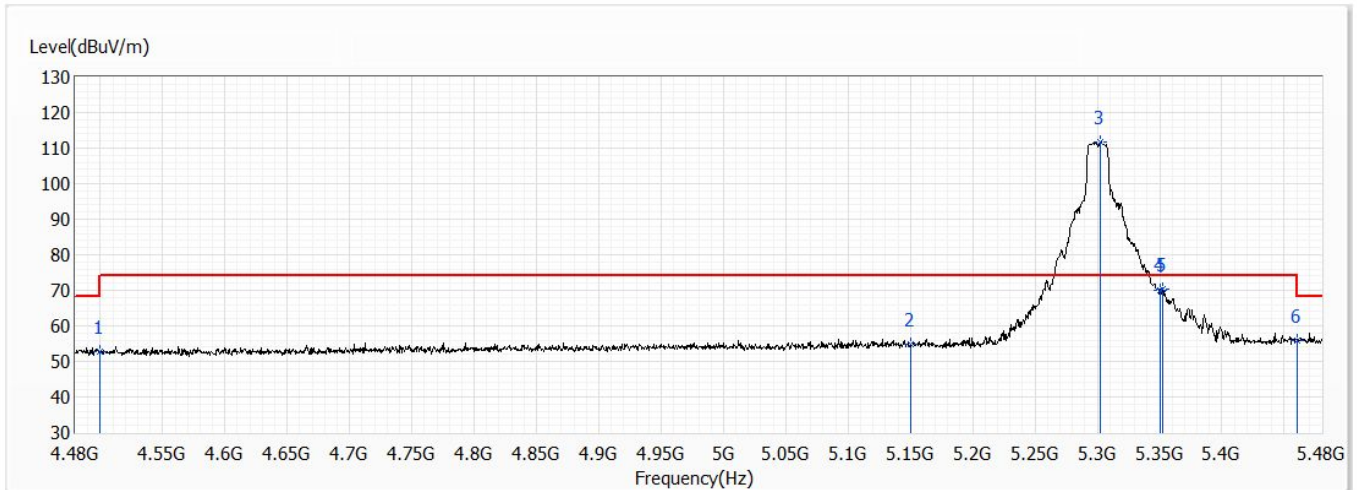


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.72	74.00	-21.28	30.75	21.97	PK
2	5150.000	54.93	74.00	-19.07	31.36	23.57	PK
! 3	5302.500	111.85	74.00	37.85	87.98	23.87	PK
4	5350.000	70.14	74.00	-3.86	46.17	23.97	PK
5	5352.500	70.25	74.00	-3.75	46.28	23.97	PK
6	5460.000	55.72	74.00	-18.28	31.54	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 60,5.3G,BW20M	Humidity (%RH)	66.0

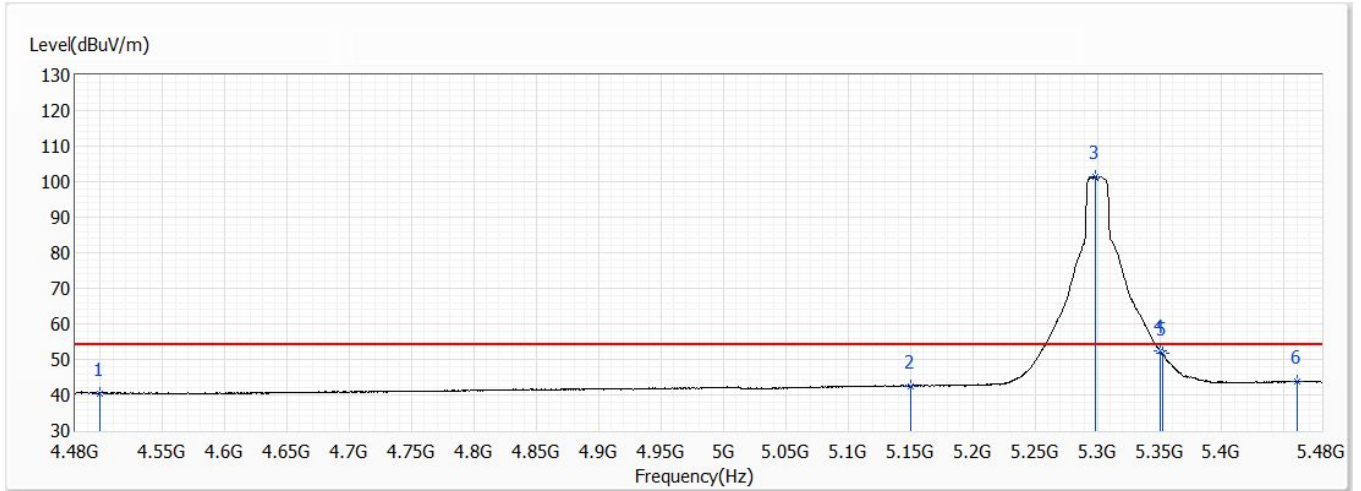


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.41	54.00	-13.59	18.44	21.97	AV
2	5150.000	42.57	54.00	-11.43	19.00	23.57	AV
! 3	5298.000	101.43	54.00	47.43	77.56	23.87	AV
4	5350.000	52.48	54.00	-1.52	28.51	23.97	AV
5	5352.000	51.81	54.00	-2.19	27.84	23.97	AV
6	5460.000	43.75	54.00	-10.25	19.57	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 64,5.32G,BW20M	Humidity (%RH)	66.0

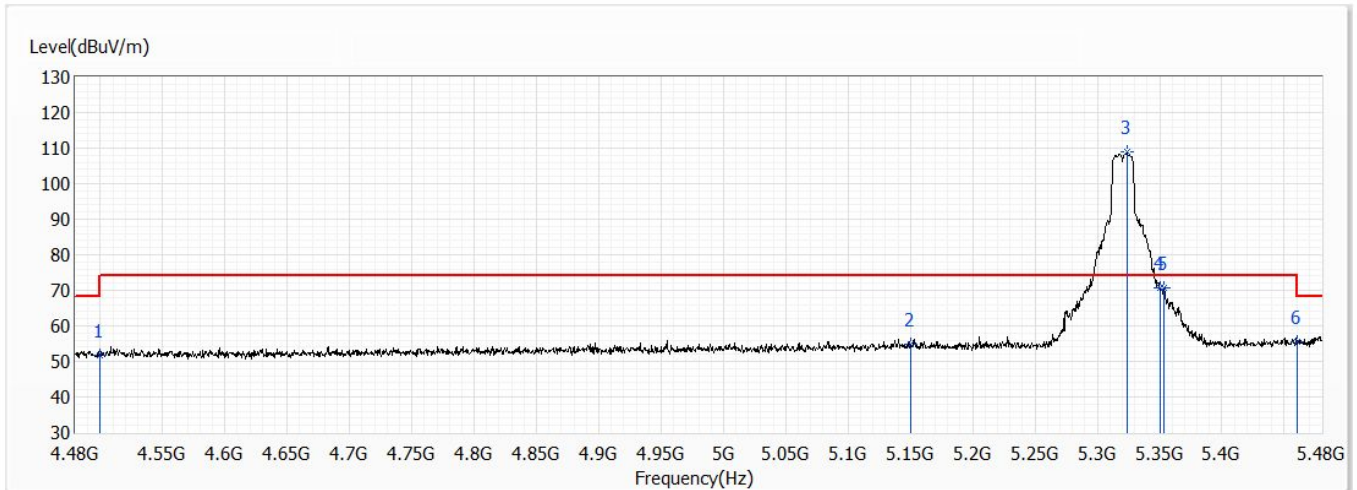


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.83	74.00	-22.17	29.86	21.97	PK
2	5150.000	54.93	74.00	-19.07	31.36	23.57	PK
! 3	5323.500	109.09	74.00	35.09	85.18	23.91	PK
4	5350.000	70.74	74.00	-3.26	46.77	23.97	PK
5	5353.500	70.70	74.00	-3.30	46.73	23.97	PK
6	5460.000	55.42	74.00	-18.58	31.24	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 64,5.32G,BW20M	Humidity (%RH)	66.0

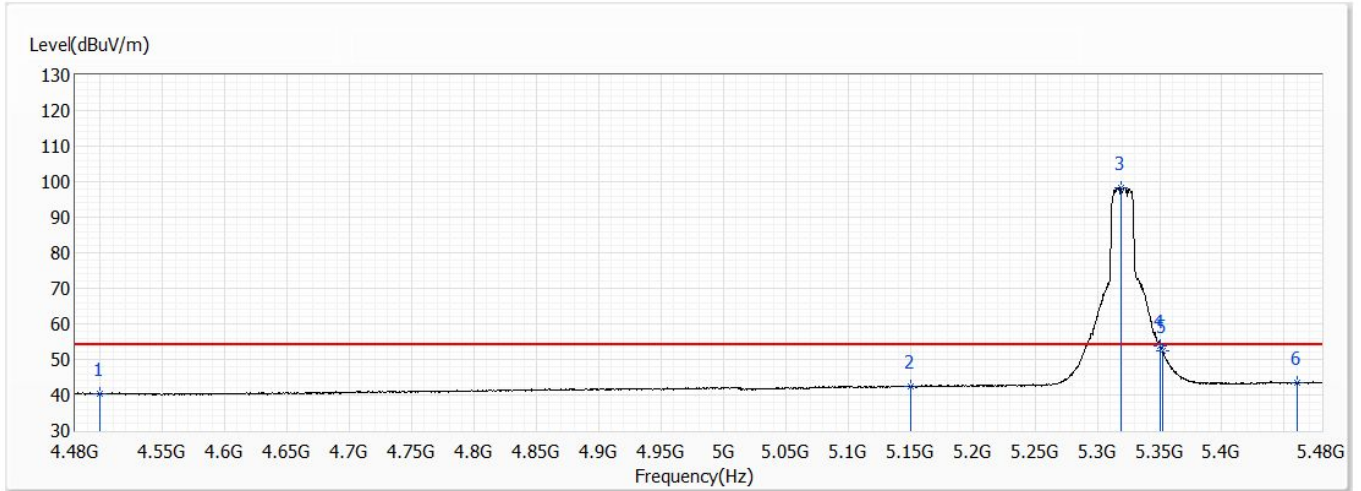


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.26	54.00	-13.74	18.29	21.97	AV
2	5150.000	42.49	54.00	-11.51	18.92	23.57	AV
! 3	5319.000	98.40	54.00	44.40	74.49	23.91	AV
4	5350.000	53.92	54.00	-0.08	29.95	23.97	AV
5	5352.000	52.47	54.00	-1.53	28.50	23.97	AV
6	5460.000	43.47	54.00	-10.53	19.29	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 64,5.32G,BW20M	Humidity (%RH)	66.0

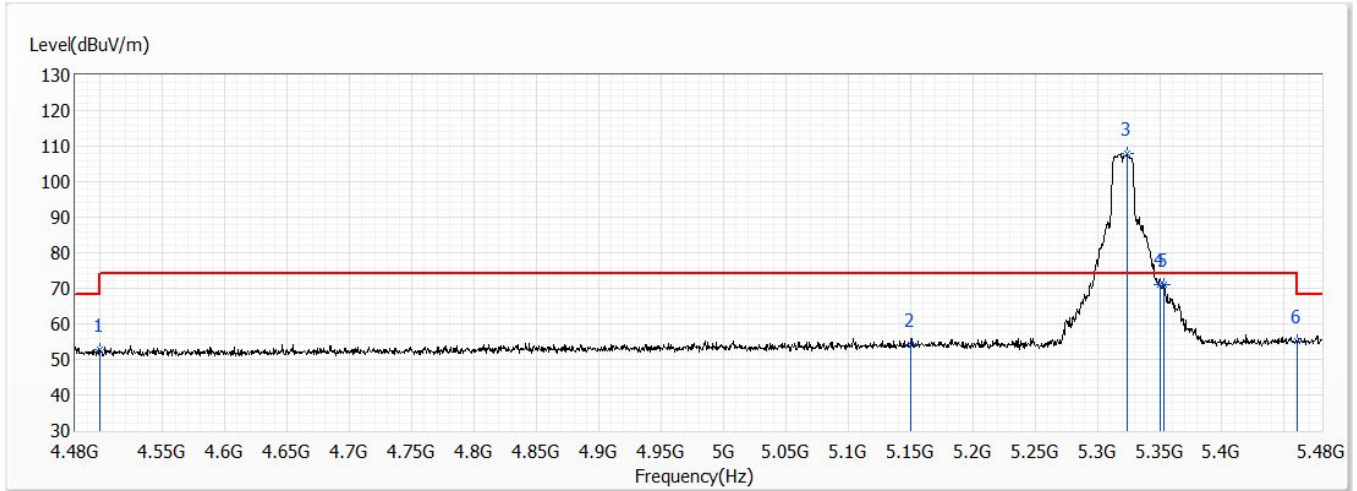


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.60	74.00	-21.40	30.63	21.97	PK
2	5150.000	54.10	74.00	-19.90	30.53	23.57	PK
! 3	5323.500	107.95	74.00	33.95	84.04	23.91	PK
4	5350.000	71.16	74.00	-2.84	47.19	23.97	PK
5	5353.500	70.98	74.00	-3.02	47.01	23.97	PK
6	5460.000	55.17	74.00	-18.83	30.99	24.18	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V	Test Date	2021/5/31
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11a,Ant1,Ch 64,5.32G,BW20M	Humidity (%RH)	66.0

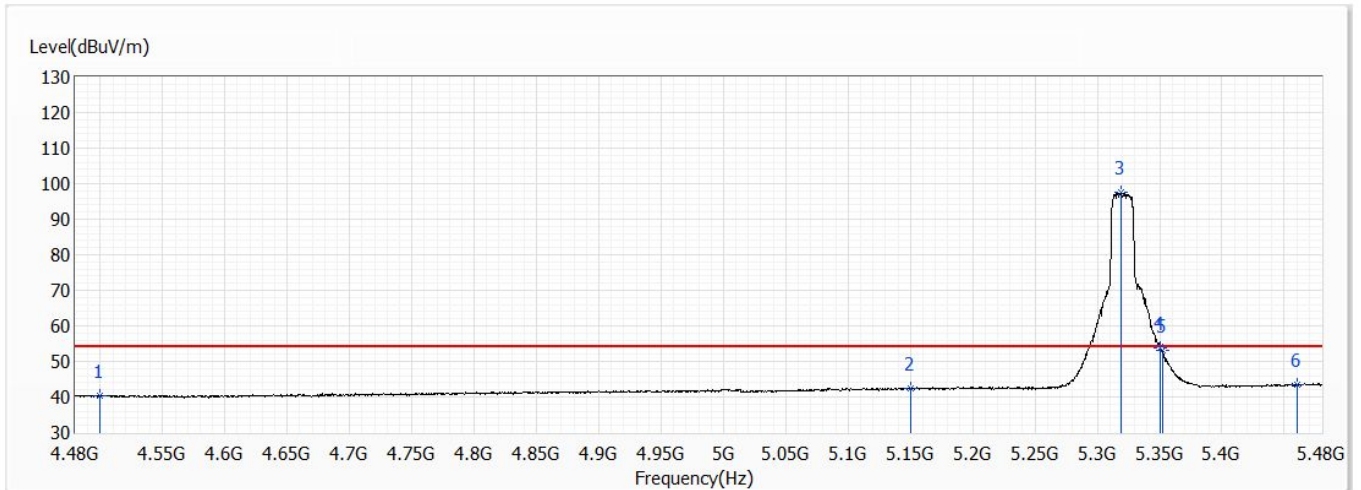


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	40.39	54.00	-13.61	18.42	21.97	AV
2	5150.000	42.30	54.00	-11.70	18.73	23.57	AV
! 3	5319.000	97.64	54.00	43.64	73.73	23.91	AV
4	5350.000	53.89	54.00	-0.11	29.92	23.97	AV
5	5352.000	53.01	54.00	-0.99	29.04	23.97	AV
6	5460.000	43.51	54.00	-10.49	19.33	24.18	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 52,5.26G,BW20M	Humidity (%RH)	66.0

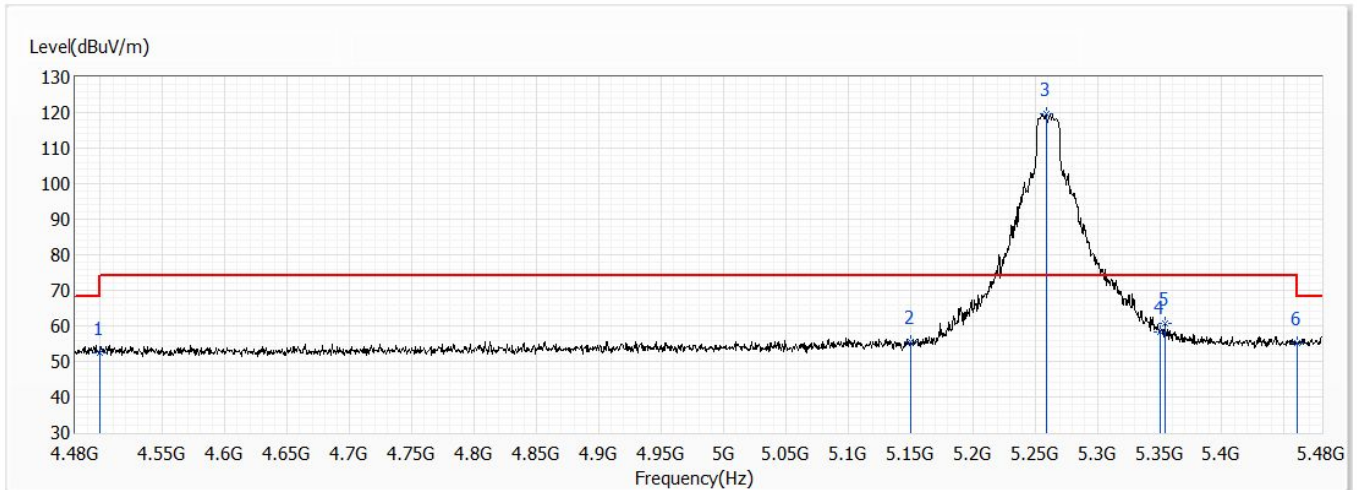


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.48	74.00	-21.52	28.81	23.67	PK
2	5150.000	55.51	74.00	-18.49	31.07	24.44	PK
! 3	5259.000	119.60	74.00	45.60	94.96	24.64	PK
4	5350.000	58.23	74.00	-15.77	33.43	24.80	PK
5	5354.000	60.63	74.00	-13.37	35.83	24.80	PK
6	5460.000	55.30	74.00	-18.70	30.31	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 52,5.26G,BW20M	Humidity (%RH)	66.0

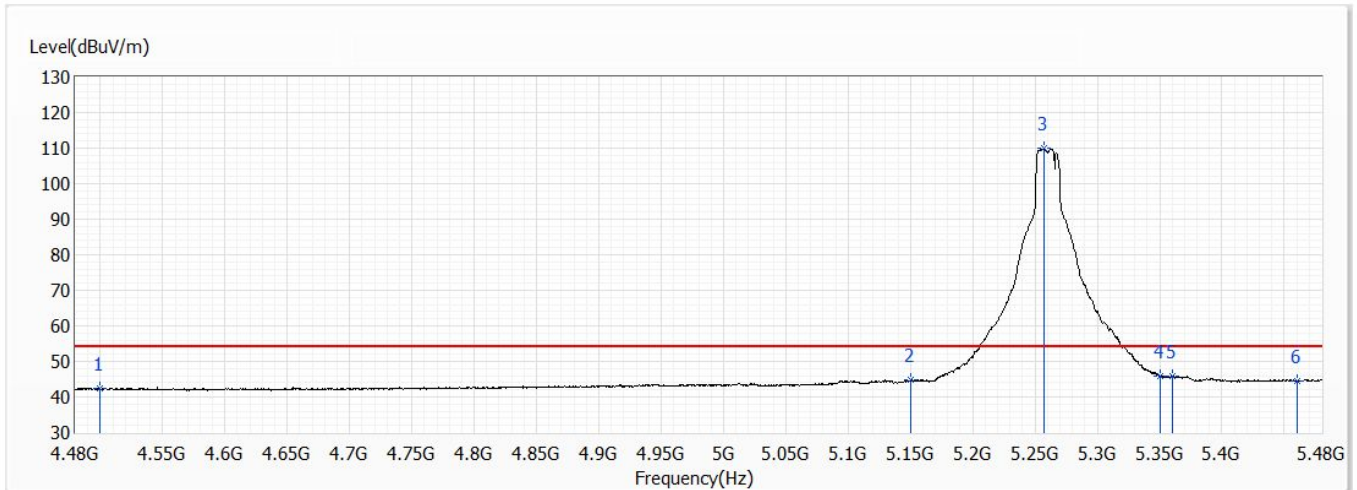


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.33	54.00	-11.67	18.66	23.67	AV
2	5150.000	44.67	54.00	-9.33	20.23	24.44	AV
! 3	5257.000	109.84	54.00	55.84	85.21	24.63	AV
4	5350.000	45.91	54.00	-8.09	21.11	24.80	AV
5	5360.500	45.83	54.00	-8.17	21.01	24.82	AV
6	5460.000	44.50	54.00	-9.50	19.51	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 52,5.26G,BW20M	Humidity (%RH)	66.0

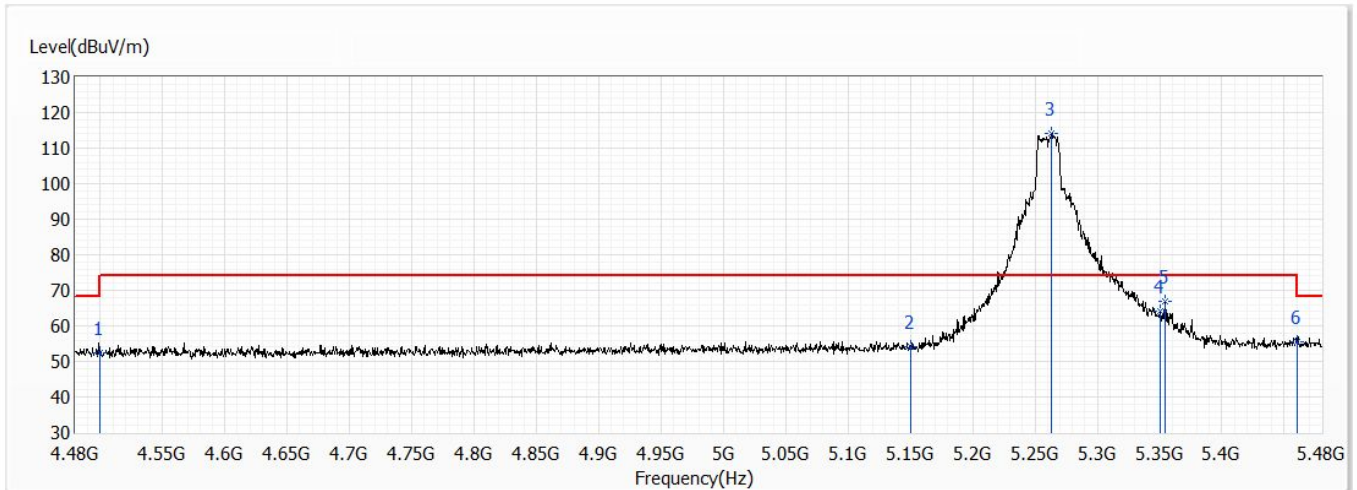


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.36	74.00	-21.64	28.69	23.67	PK
2	5150.000	54.11	74.00	-19.89	29.67	24.44	PK
! 3	5263.500	114.27	74.00	40.27	89.63	24.64	PK
4	5350.000	64.22	74.00	-9.78	39.42	24.80	PK
5	5354.500	66.78	74.00	-7.22	41.98	24.80	PK
6	5460.000	55.67	74.00	-18.33	30.68	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 52,5.26G,BW20M	Humidity (%RH)	66.0

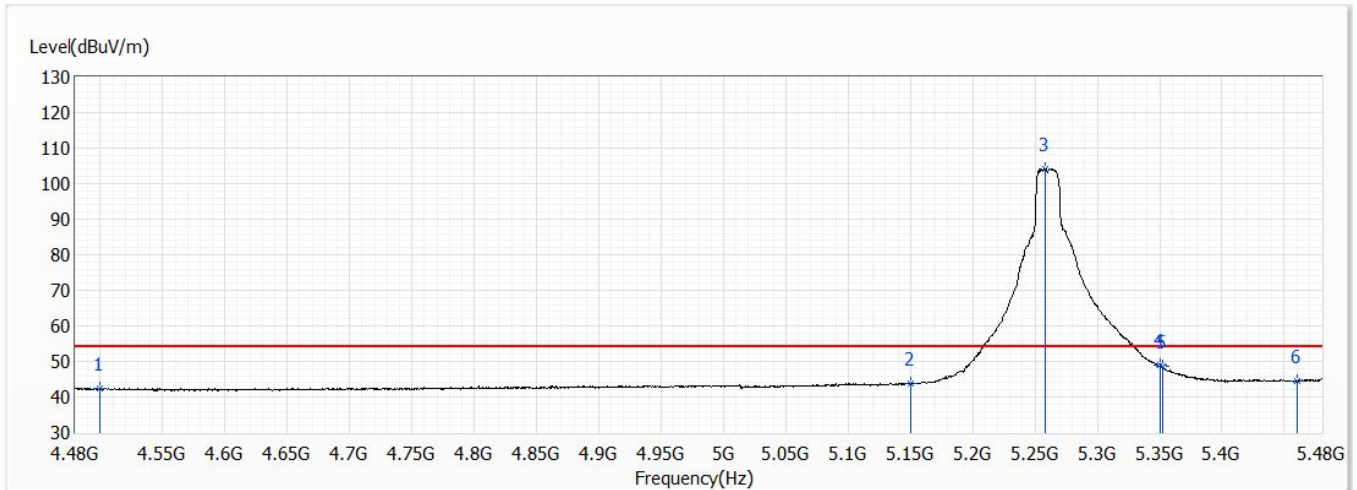


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.28	54.00	-11.72	18.61	23.67	AV
2	5150.000	43.79	54.00	-10.21	19.35	24.44	AV
! 3	5258.500	104.23	54.00	50.23	79.60	24.63	AV
4	5350.000	48.86	54.00	-5.14	24.06	24.80	AV
5	5352.500	48.53	54.00	-5.47	23.73	24.80	AV
6	5460.000	44.48	54.00	-9.52	19.49	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 60,5.3G,BW20M	Humidity (%RH)	66.0

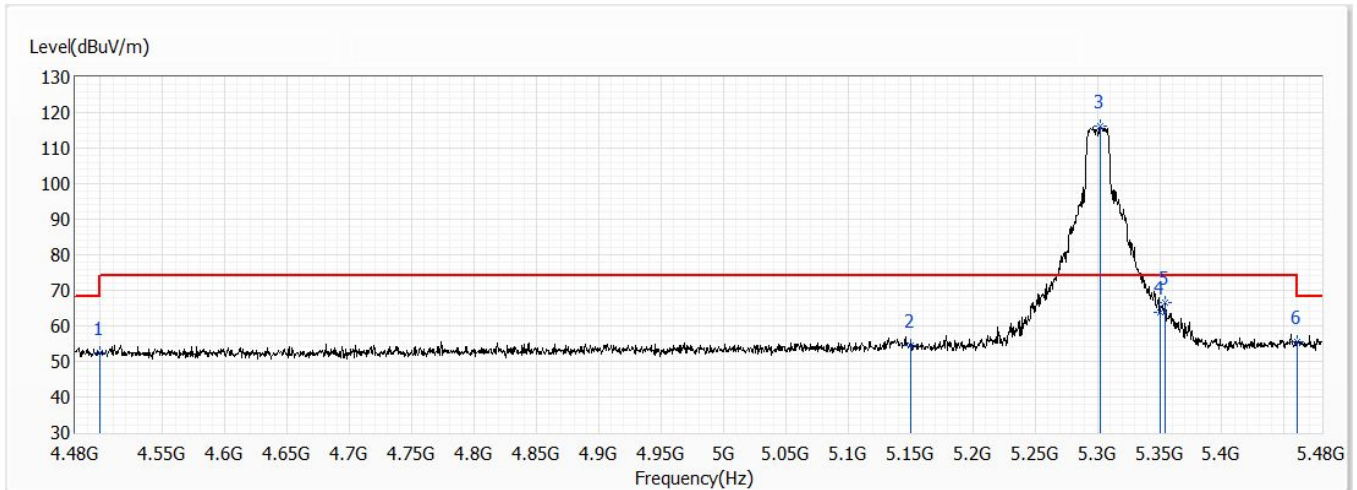


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.30	74.00	-21.70	28.63	23.67	PK
2	5150.000	54.49	74.00	-19.51	30.05	24.44	PK
! 3	5302.000	116.19	74.00	42.19	91.48	24.71	PK
4	5350.000	63.78	74.00	-10.22	38.98	24.80	PK
5	5354.500	66.47	74.00	-7.53	41.67	24.80	PK
6	5460.000	55.44	74.00	-18.56	30.45	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 60,5.3G,BW20M	Humidity (%RH)	66.0

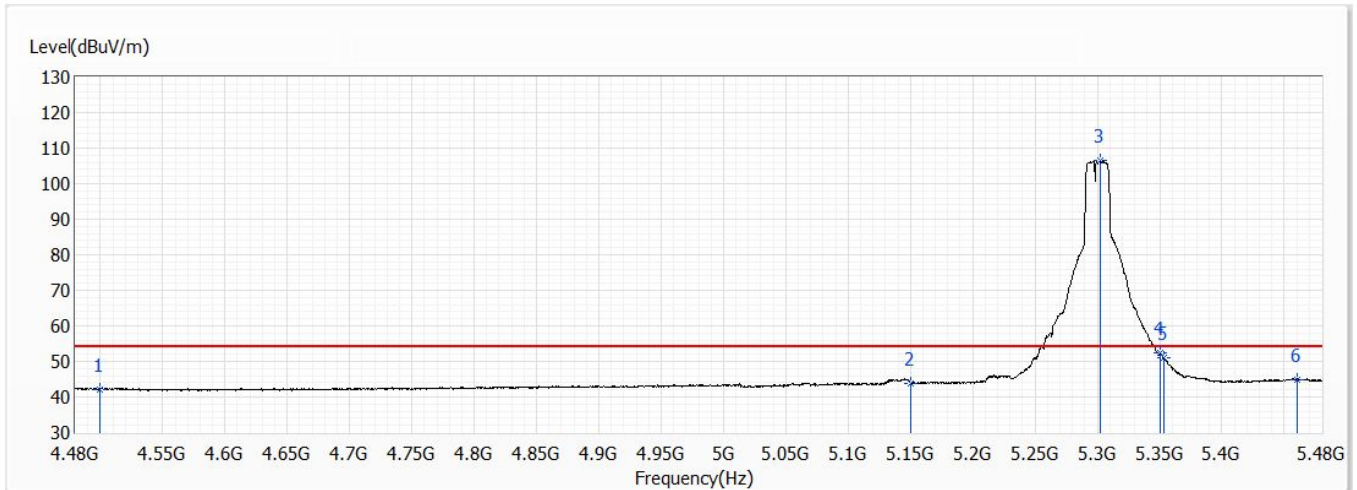


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.15	54.00	-11.85	18.48	23.67	AV
2	5150.000	43.71	54.00	-10.29	19.27	24.44	AV
! 3	5302.000	106.43	54.00	52.43	81.72	24.71	AV
4	5350.000	52.39	54.00	-1.61	27.59	24.80	AV
5	5353.500	51.00	54.00	-3.00	26.20	24.80	AV
6	5460.000	44.84	54.00	-9.16	19.85	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 60,5.3G,BW20M	Humidity (%RH)	66.0

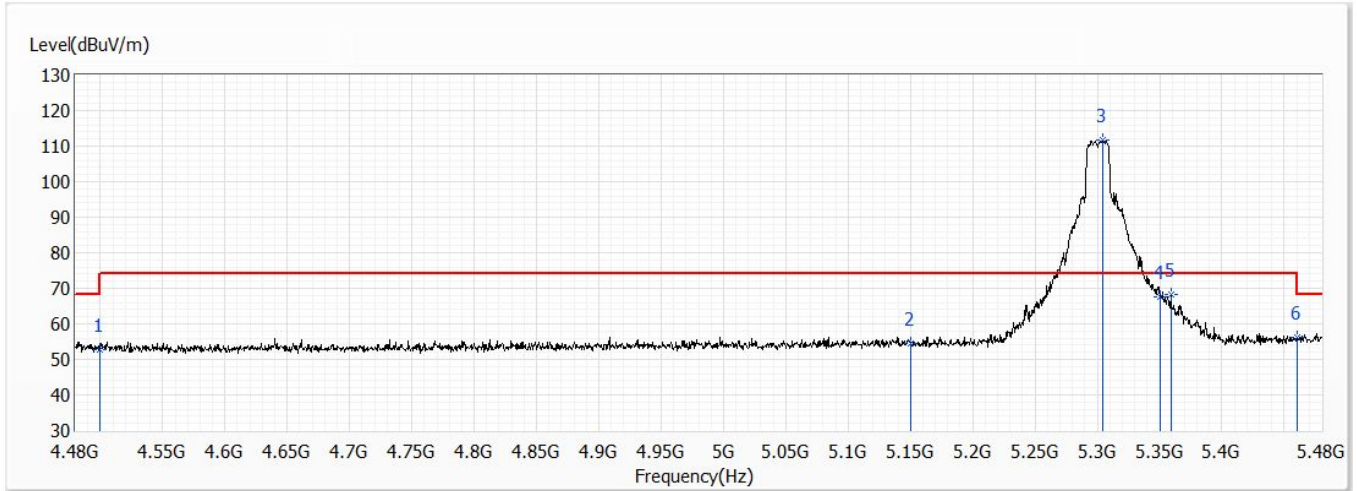


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.84	74.00	-21.16	29.17	23.67	PK
2	5150.000	54.50	74.00	-19.50	30.06	24.44	PK
! 3	5304.000	111.61	74.00	37.61	86.90	24.71	PK
4	5350.000	67.66	74.00	-6.34	42.86	24.80	PK
5	5359.000	68.41	74.00	-5.59	43.60	24.81	PK
6	5460.000	56.18	74.00	-17.82	31.19	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 60,5.3G,BW20M	Humidity (%RH)	66.0

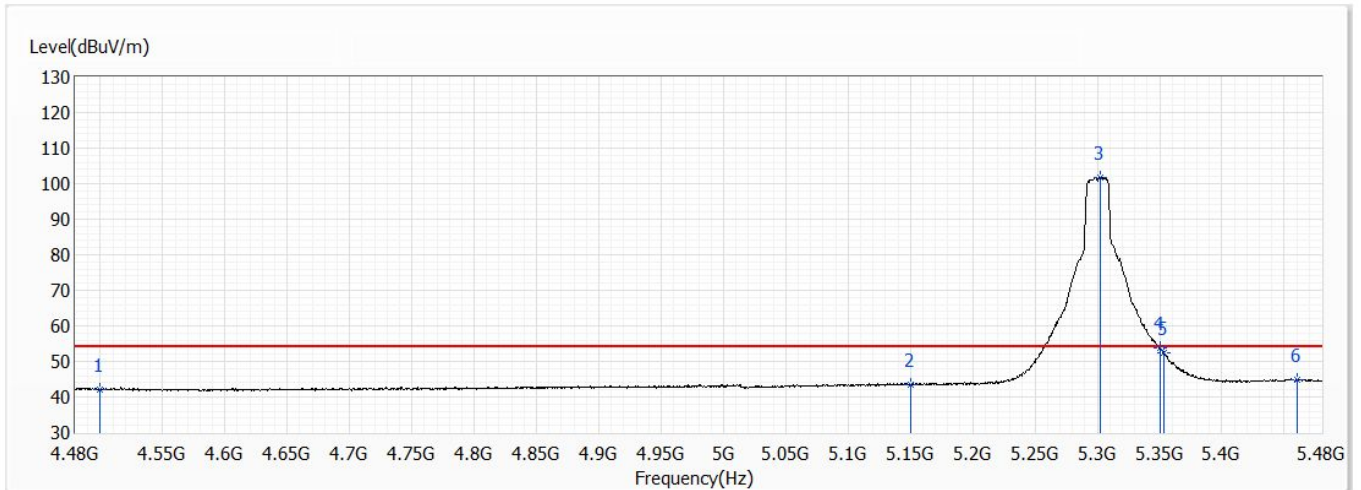


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.10	54.00	-11.90	18.43	23.67	AV
2	5150.000	43.49	54.00	-10.51	19.05	24.44	AV
! 3	5302.500	101.80	54.00	47.80	77.09	24.71	AV
4	5350.000	53.74	54.00	-0.26	28.94	24.80	AV
5	5353.500	52.33	54.00	-1.67	27.53	24.80	AV
6	5460.000	44.77	54.00	-9.23	19.78	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 64,5.32G,BW20M	Humidity (%RH)	66.0

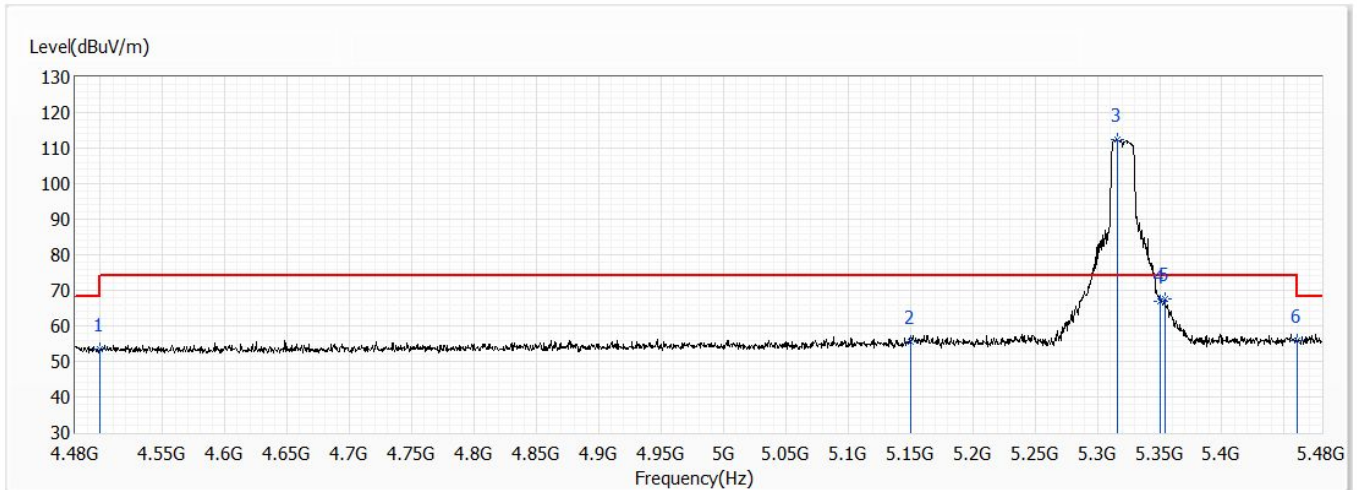


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.40	74.00	-20.60	29.73	23.67	PK
2	5150.000	55.64	74.00	-18.36	31.20	24.44	PK
! 3	5316.000	112.36	74.00	38.36	87.62	24.74	PK
4	5350.000	67.01	74.00	-6.99	42.21	24.80	PK
5	5354.000	67.66	74.00	-6.34	42.86	24.80	PK
6	5460.000	55.90	74.00	-18.10	30.91	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 64,5.32G,BW20M	Humidity (%RH)	66.0

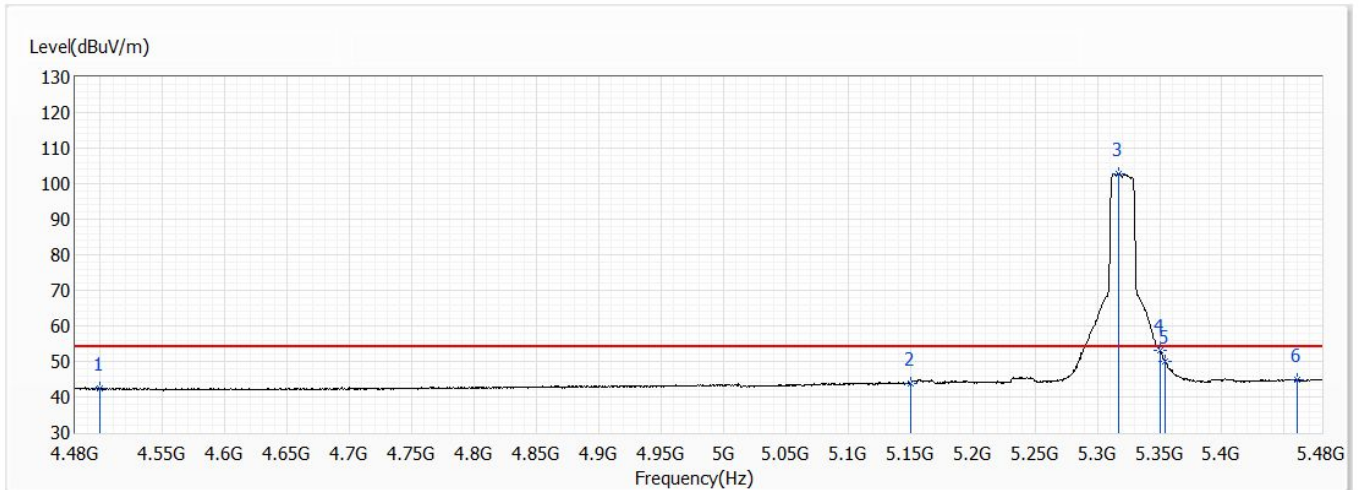


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.36	54.00	-11.64	18.69	23.67	AV
2	5150.000	43.77	54.00	-10.23	19.33	24.44	AV
! 3	5317.000	102.79	54.00	48.79	78.05	24.74	AV
4	5350.000	53.02	54.00	-0.98	28.22	24.80	AV
5	5354.500	49.85	54.00	-4.15	25.05	24.80	AV
6	5460.000	44.67	54.00	-9.33	19.68	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 64,5.32G,BW20M	Humidity (%RH)	66.0

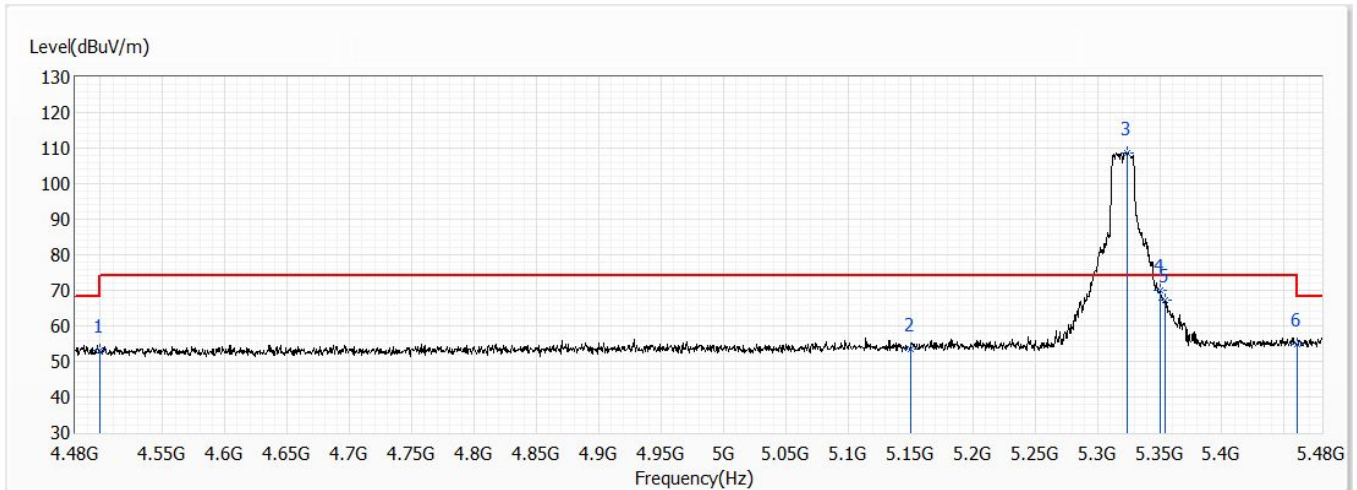


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.05	74.00	-20.95	29.38	23.67	PK
2	5150.000	53.56	74.00	-20.44	29.12	24.44	PK
! 3	5323.500	108.70	74.00	34.70	83.96	24.74	PK
4	5350.000	69.88	74.00	-4.12	45.08	24.80	PK
5	5354.500	67.18	74.00	-6.82	42.38	24.80	PK
6	5460.000	54.72	74.00	-19.28	29.73	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 64,5.32G,BW20M	Humidity (%RH)	66.0

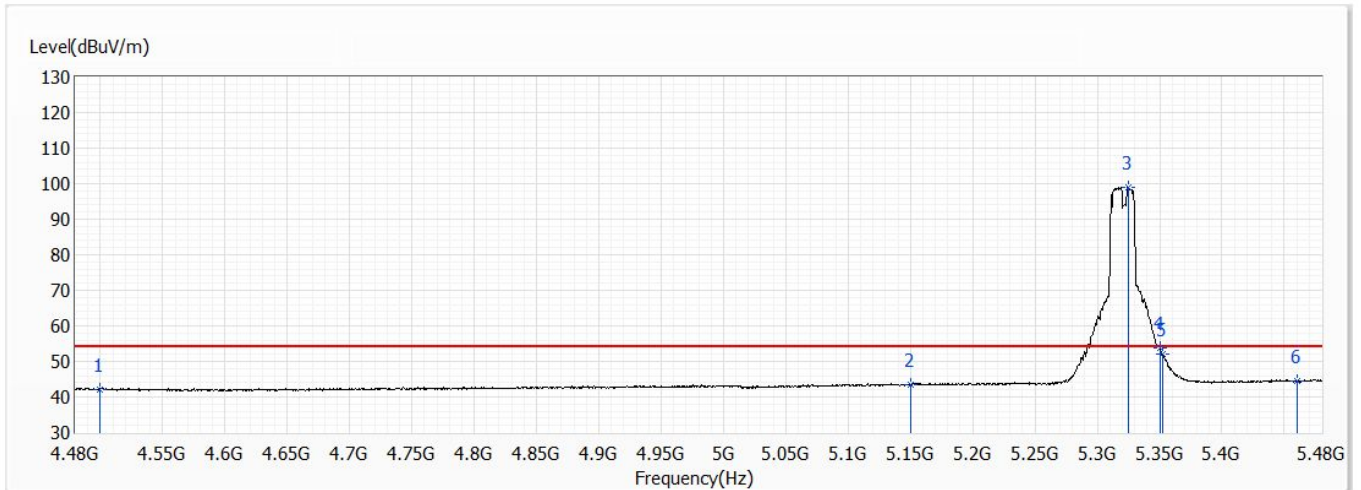


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.14	54.00	-11.86	18.47	23.67	AV
2	5150.000	43.38	54.00	-10.62	18.94	24.44	AV
! 3	5325.000	99.12	54.00	45.12	74.36	24.76	AV
4	5350.000	53.83	54.00	-0.17	29.03	24.80	AV
5	5352.500	51.95	54.00	-2.05	27.15	24.80	AV
6	5460.000	44.57	54.00	-9.43	19.58	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 54,5.27G,BW40M	Humidity (%RH)	66.0

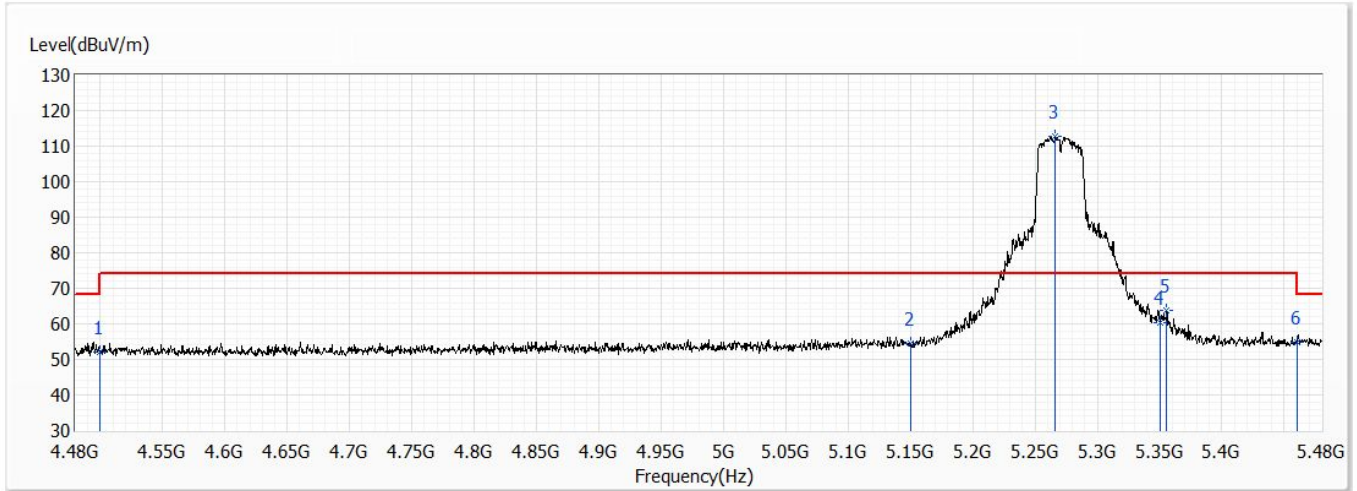


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.98	74.00	-22.02	28.31	23.67	PK
2	5150.000	54.47	74.00	-19.53	30.03	24.44	PK
! 3	5266.500	112.68	74.00	38.68	88.03	24.65	PK
4	5350.000	60.45	74.00	-13.55	35.65	24.80	PK
5	5355.500	63.70	74.00	-10.30	38.89	24.81	PK
6	5460.000	54.94	74.00	-19.06	29.95	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 54,5.27G,BW40M	Humidity (%RH)	66.0

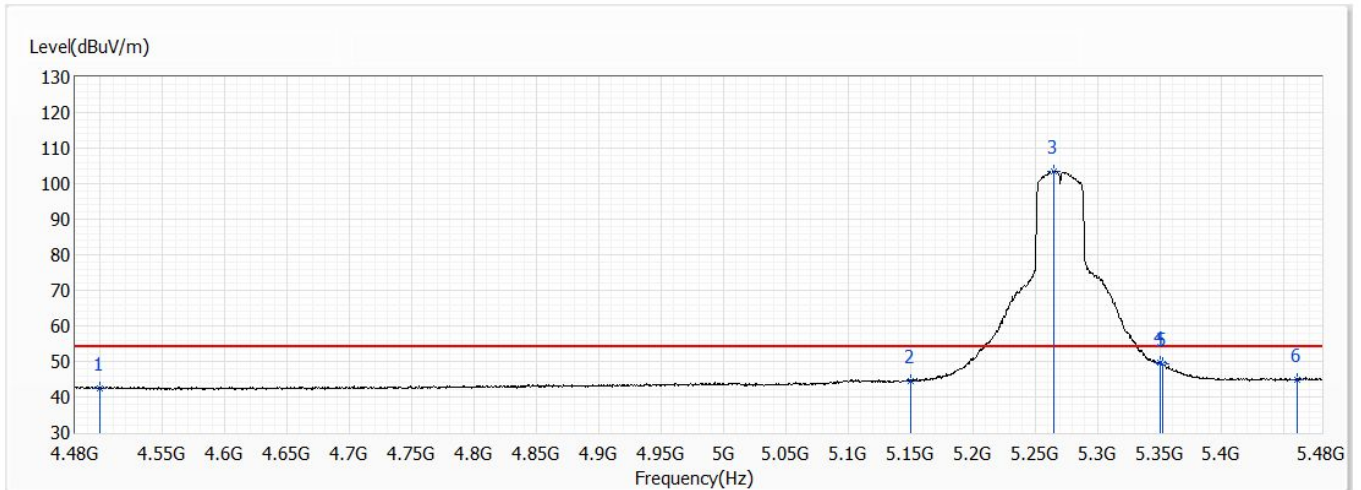


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.58	54.00	-11.42	18.91	23.67	AV
2	5150.000	44.55	54.00	-9.45	20.11	24.44	AV
! 3	5265.500	103.57	54.00	49.57	78.92	24.65	AV
4	5350.000	49.66	54.00	-4.34	24.86	24.80	AV
5	5352.500	49.38	54.00	-4.62	24.58	24.80	AV
6	5460.000	44.87	54.00	-9.13	19.88	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 54,5.27G,BW40M	Humidity (%RH)	66.0

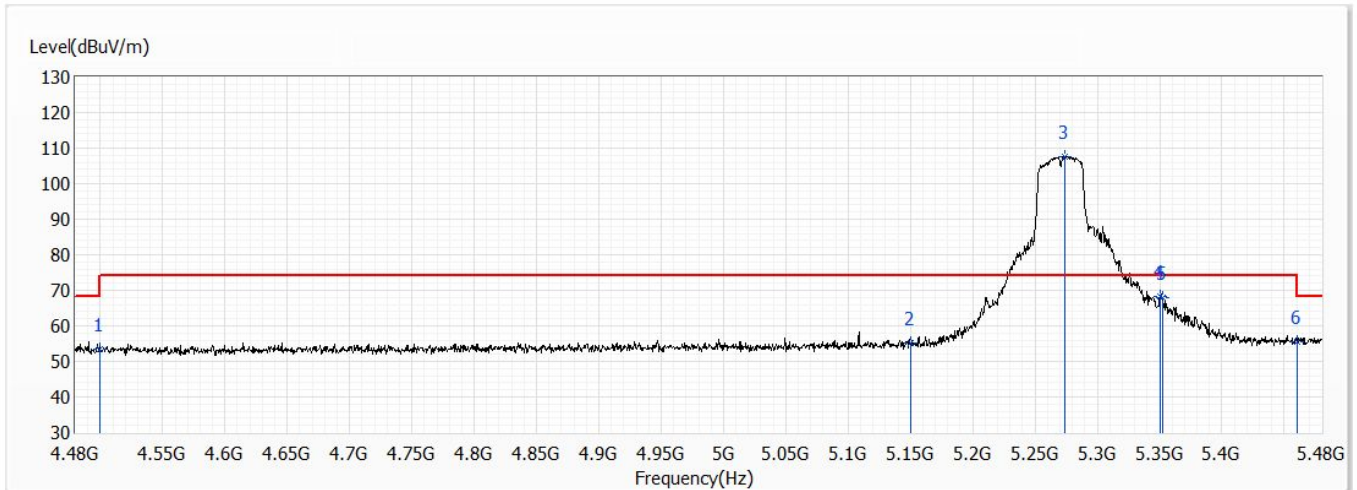


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	53.41	74.00	-20.59	29.74	23.67	PK
2	5150.000	55.16	74.00	-18.84	30.72	24.44	PK
! 3	5273.500	107.71	74.00	33.71	83.06	24.65	PK
4	5350.000	68.42	74.00	-5.58	43.62	24.80	PK
5	5352.500	68.10	74.00	-5.90	43.30	24.80	PK
6	5460.000	55.50	74.00	-18.50	30.51	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 54,5.27G,BW40M	Humidity (%RH)	66.0

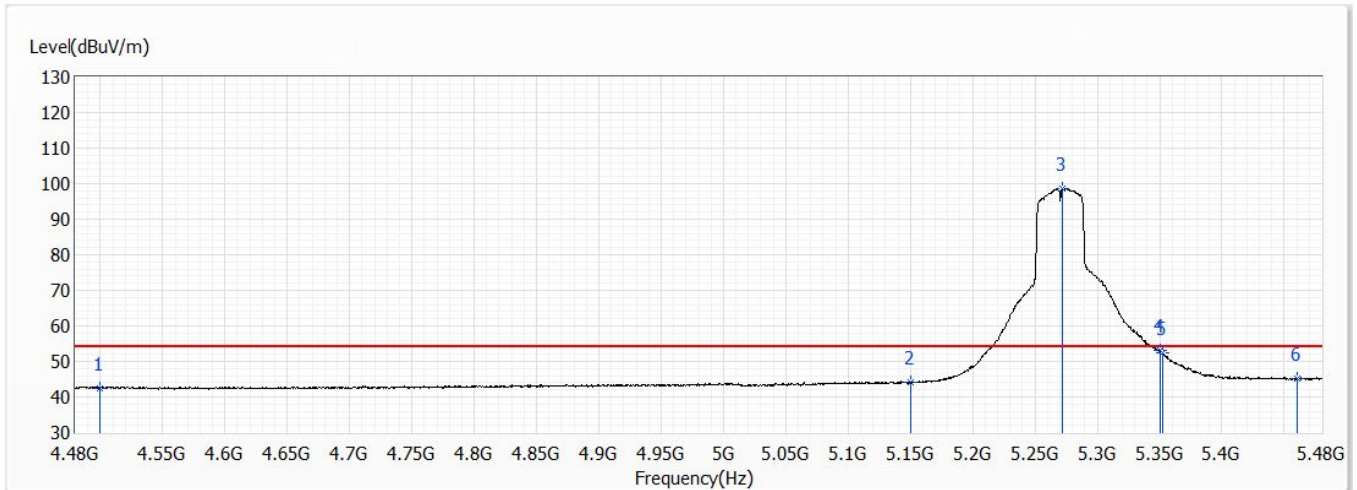


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.48	54.00	-11.52	18.81	23.67	AV
2	5150.000	44.14	54.00	-9.86	19.70	24.44	AV
! 3	5272.000	98.54	54.00	44.54	73.89	24.65	AV
4	5350.000	53.08	54.00	-0.92	28.28	24.80	AV
5	5352.500	52.39	54.00	-1.61	27.59	24.80	AV
6	5460.000	45.30	54.00	-8.70	20.31	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 62,5.31G,BW40M	Humidity (%RH)	66.0

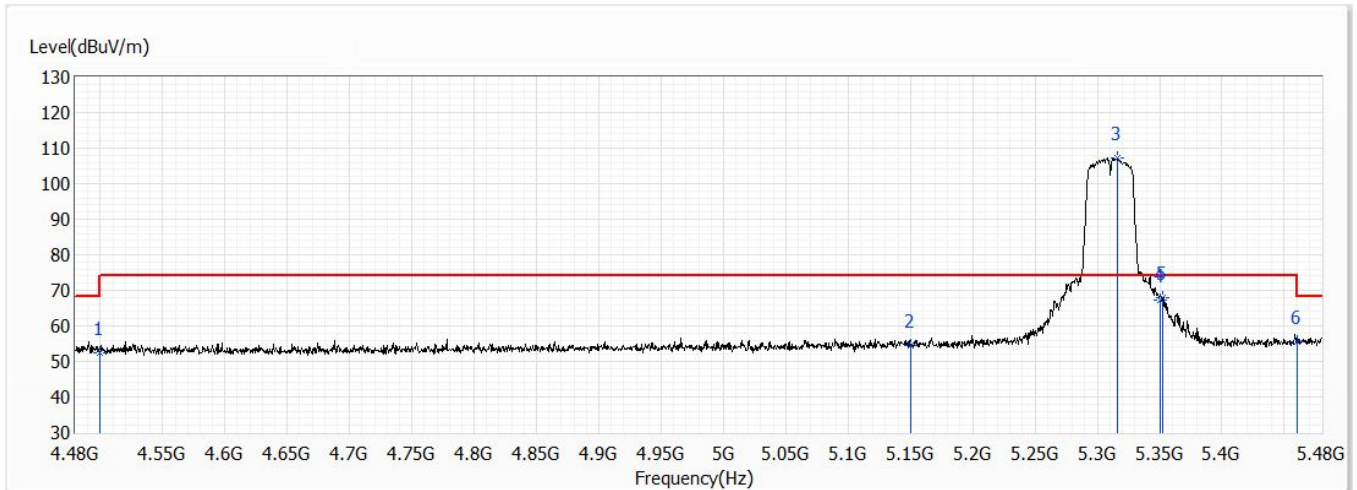


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.43	74.00	-21.57	28.76	23.67	PK
2	5150.000	54.45	74.00	-19.55	30.01	24.44	PK
! 3	5316.500	107.28	74.00	33.28	82.54	24.74	PK
4	5350.000	67.40	74.00	-6.60	42.60	24.80	PK
5	5352.500	67.99	74.00	-6.01	43.19	24.80	PK
6	5460.000	55.68	74.00	-18.32	30.69	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 62,5.31G,BW40M	Humidity (%RH)	66.0

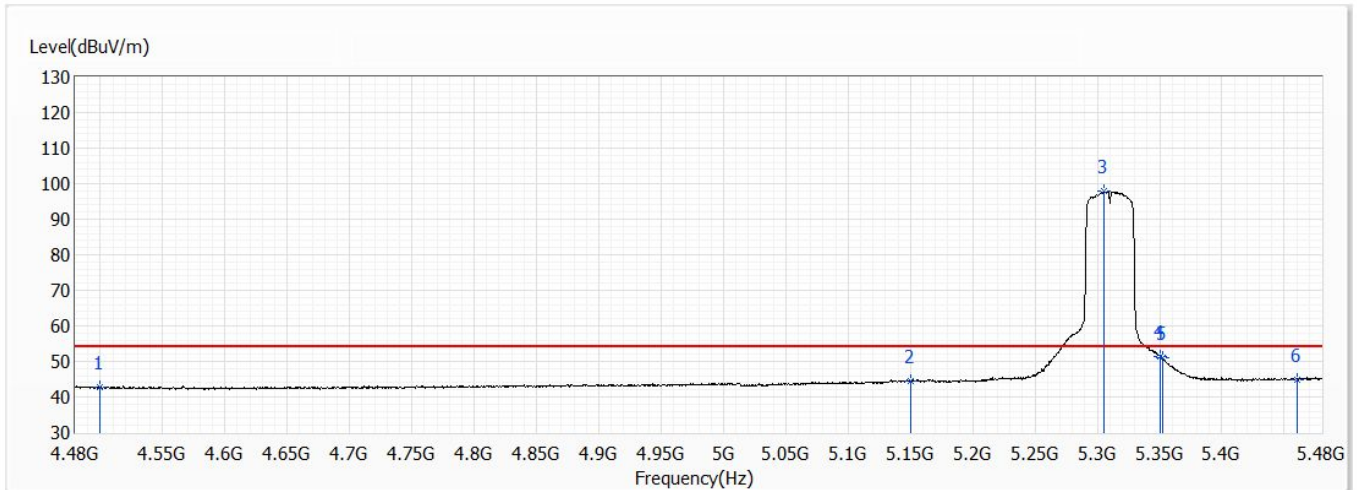


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	42.64	54.00	-11.36	18.97	23.67	AV
2	5150.000	44.32	54.00	-9.68	19.88	24.44	AV
! 3	5305.500	97.97	54.00	43.97	73.25	24.72	AV
4	5350.000	51.39	54.00	-2.61	26.59	24.80	AV
5	5352.000	51.11	54.00	-2.89	26.31	24.80	AV
6	5460.000	44.97	54.00	-9.03	19.98	24.99	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 62,5.31G,BW40M	Humidity (%RH)	66.0

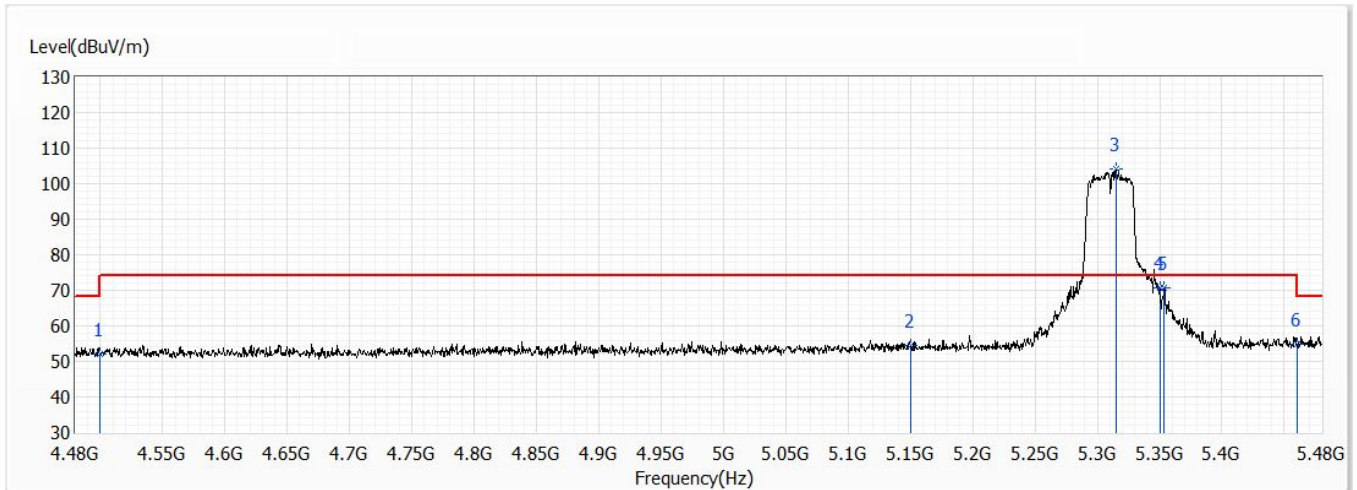

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.13	74.00	-21.87	28.46	23.67	PK
2	5150.000	54.41	74.00	-19.59	29.97	24.44	PK
! 3	5315.000	104.01	74.00	30.01	79.28	24.73	PK
4	5350.000	70.65	74.00	-3.35	45.85	24.80	PK
5	5353.500	70.81	74.00	-3.19	46.01	24.80	PK
6	5460.000	54.77	74.00	-19.23	29.78	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.