


Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 159,5.795G,BW40M	Humidity (%RH)	66.0

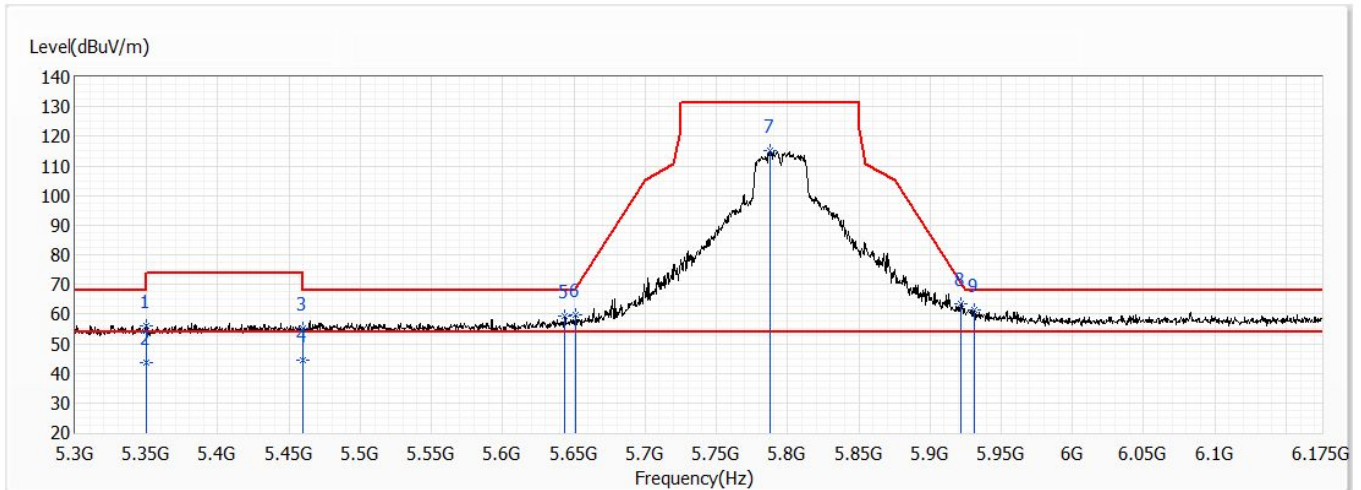


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.85	74.00	-18.15	31.05	24.80	PK
2	5350.000	43.67	54.00	-10.33	18.87	24.80	AV
3	5460.000	55.04	74.00	-18.96	30.05	24.99	PK
4	5460.000	44.34	54.00	-9.66	19.35	24.99	AV
5	5643.875	59.17	68.20	-9.03	33.68	25.49	PK
6	5651.313	59.75	69.18	-9.43	34.25	25.50	PK
7	5787.375	115.16	131.20	-16.04	89.26	25.90	PK
8	5921.688	63.49	70.64	-7.15	37.20	26.29	PK
* 9	5930.875	61.30	68.20	-6.90	34.97	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 155,5.775G,BW80M	Humidity (%RH)	66.0

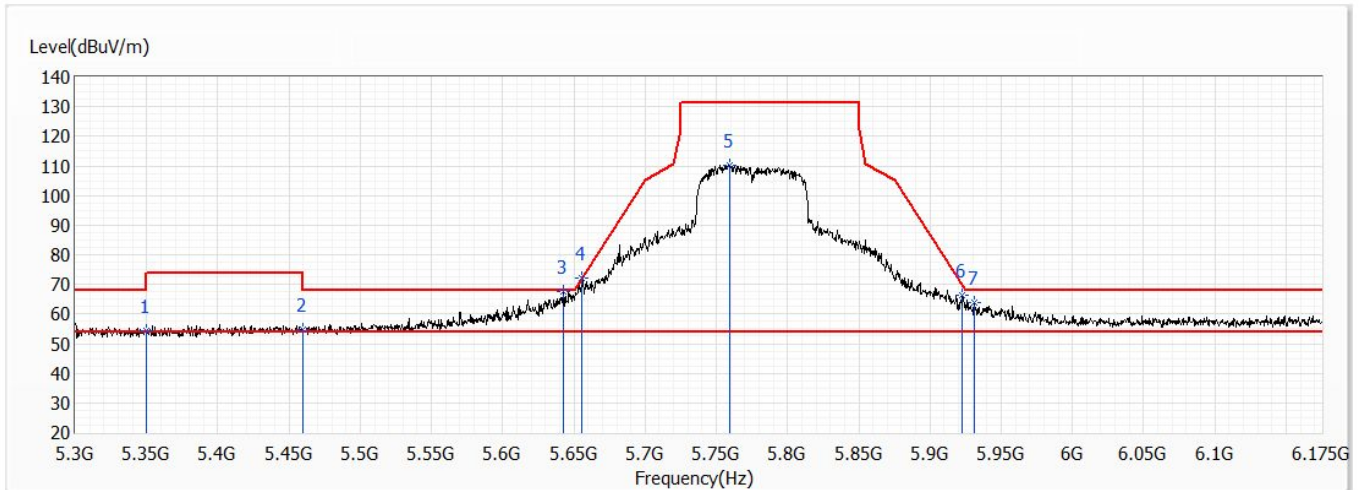


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	54.24	74.00	-19.76	29.44	24.80	PK
2	5460.000	54.76	74.00	-19.24	29.77	24.99	PK
3	5643.000	67.73	68.20	-0.47	42.24	25.49	PK
* 4	5655.688	72.01	72.43	-0.42	46.49	25.52	PK
5	5759.813	110.40	131.20	-20.80	84.57	25.83	PK
6	5922.563	66.35	70.00	-3.65	40.06	26.29	PK
7	5930.875	63.98	68.20	-4.22	37.65	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	LVD1	Site	CB2-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/11
Test Mode	Mode 2: Transmit_Adapter_1A100-US1230	Engineer	Ling Chen
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11ac,Ant0+1,Ch 155,5.775G,BW80M	Humidity (%RH)	66.0

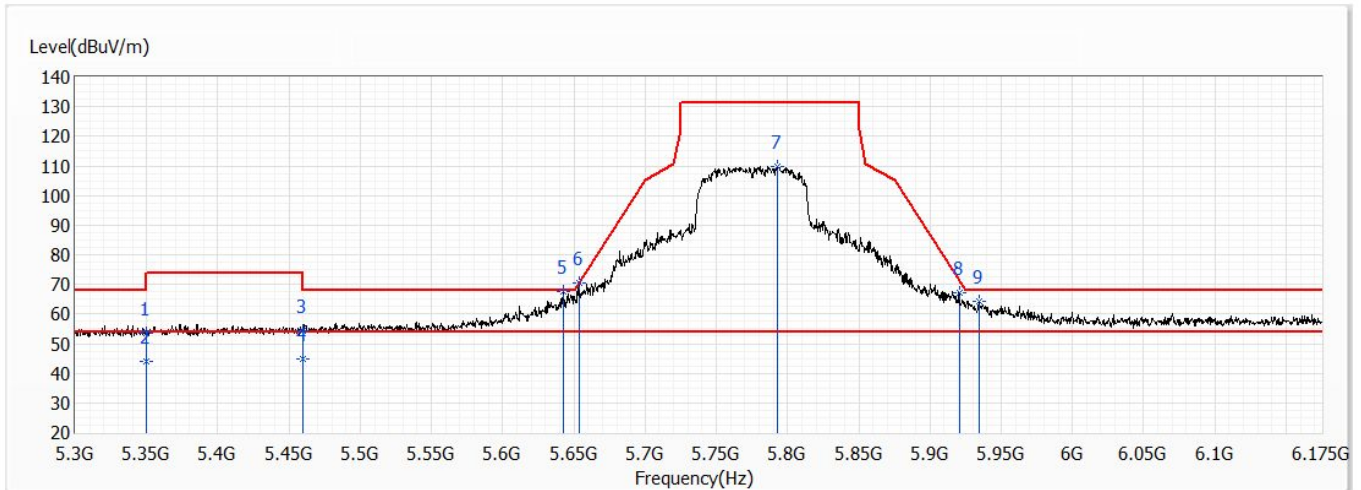

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	53.54	74.00	-20.46	28.74	24.80	PK
2	5350.000	43.88	54.00	-10.12	19.08	24.80	AV
3	5460.000	54.15	74.00	-19.85	29.16	24.99	PK
4	5460.000	44.69	54.00	-9.31	19.70	24.99	AV
5	5643.000	67.59	68.20	-0.61	42.10	25.49	PK
* 6	5653.500	70.43	70.80	-0.37	44.91	25.52	PK
7	5792.625	109.91	131.20	-21.29	83.98	25.93	PK
8	5920.813	67.30	71.29	-3.99	41.01	26.29	PK
9	5934.375	64.22	68.20	-3.98	37.89	26.33	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Attachment 2

➤ **Radiated Emission Co-location**