



Lowest Band edge: n260-BW:50MHz-1CC-QPSK-Beam ID 87


1RB0-Horizontal Polarization

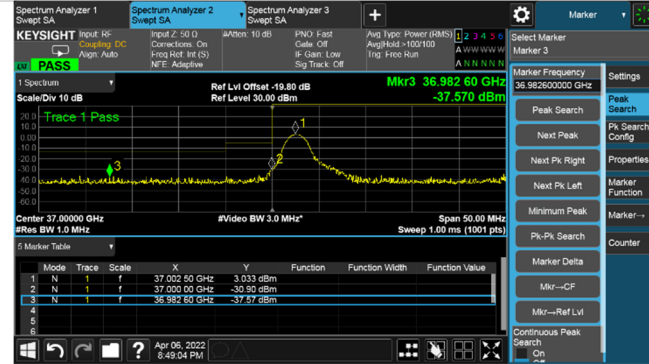


1RB0-Vertical Polarization

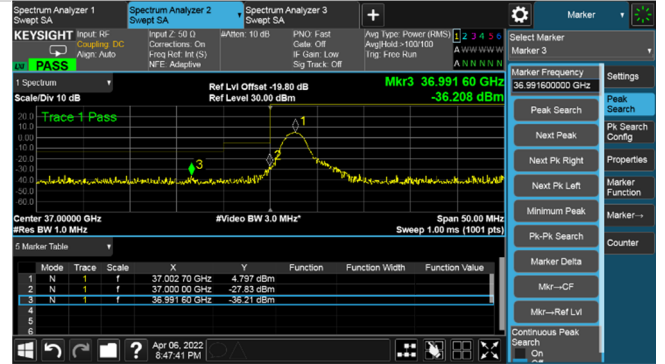


10RB0-Horizontal Polarization

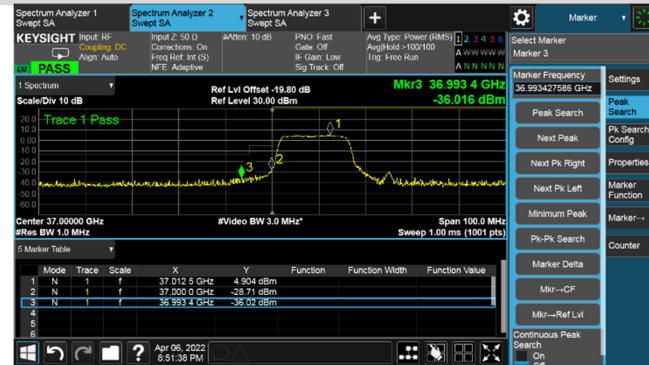


10RB0-Vertical Polarization

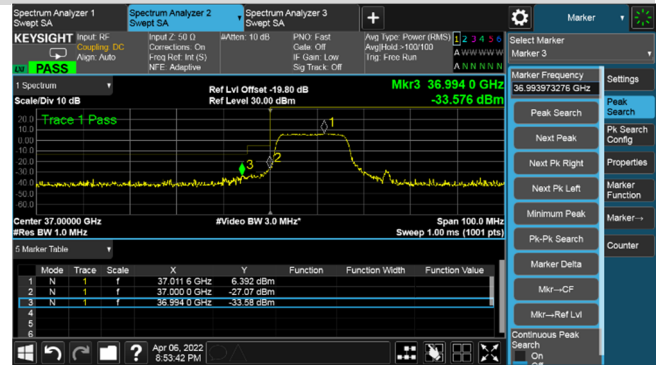

30RB0-Horizontal Polarization

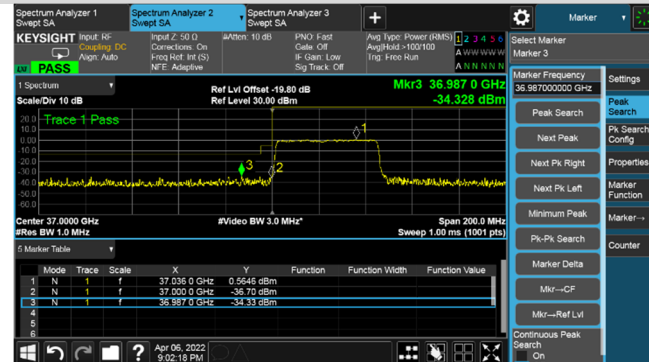


30RB0-Vertical Polarization

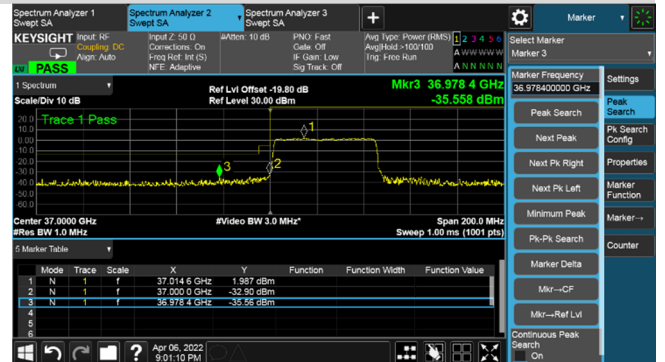


Lowest Band edge: n260-BW:50MHz-1CC-QPSK-Beam ID 343


1RB0-Horizontal Polarization

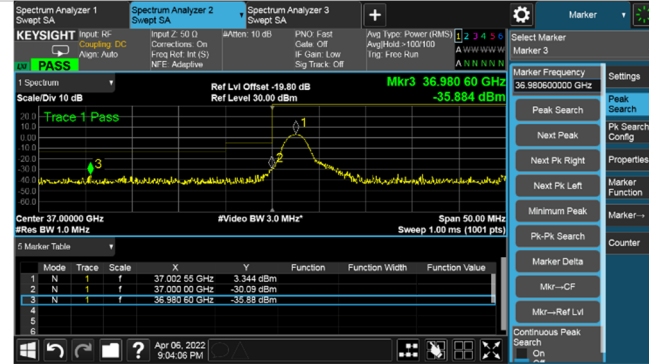


1RB0-Vertical Polarization

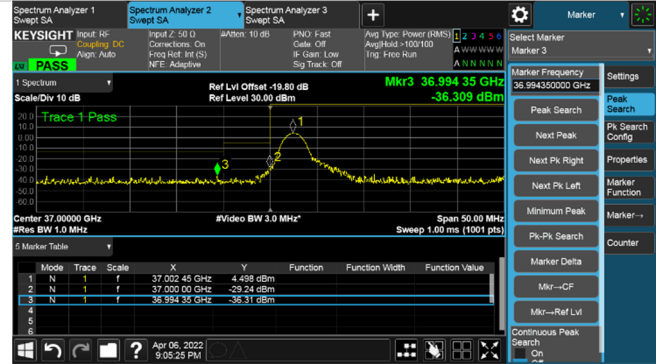


10RB0-Horizontal Polarization

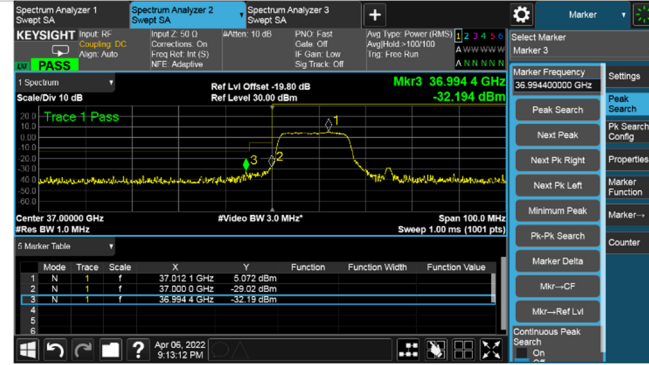


10RB0-Vertical Polarization

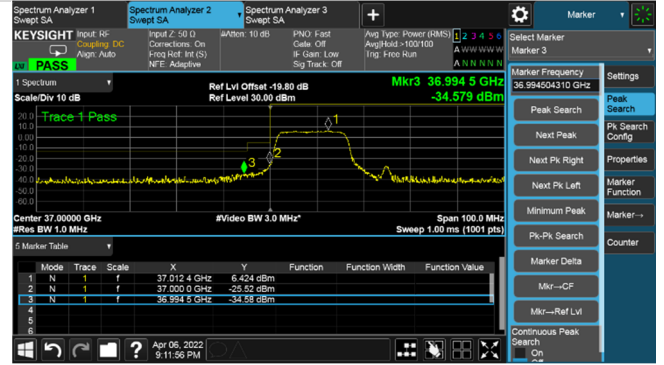

30RB0-Horizontal Polarization

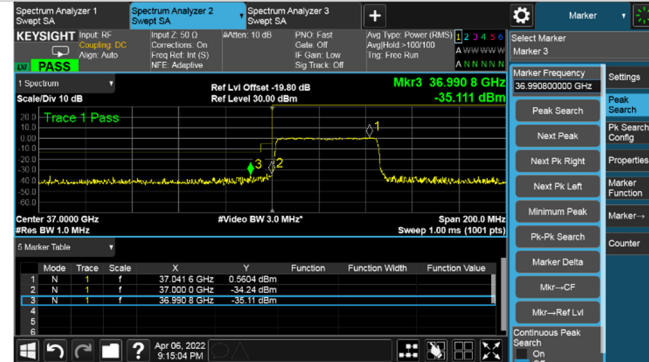


30RB0-Vertical Polarization

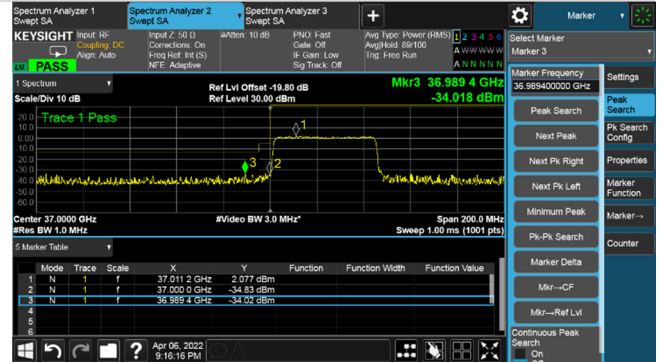


Lowest Band edge: n260-BW:50MHz-1CC-QPSK-Beam ID 87+343


1RB0-Horizontal Polarization

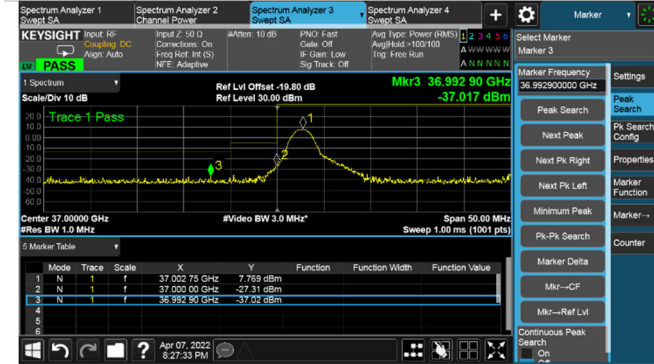


1RB0-Vertical Polarization

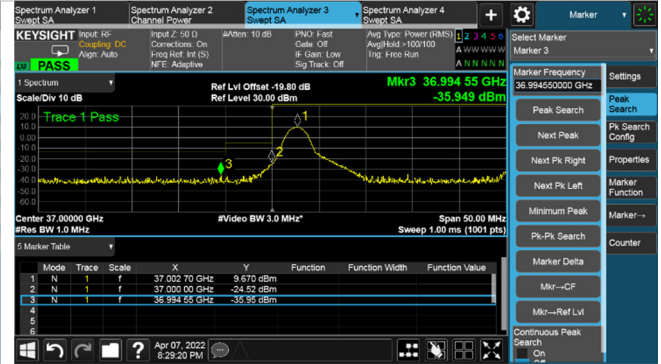


10RB0-Horizontal Polarization

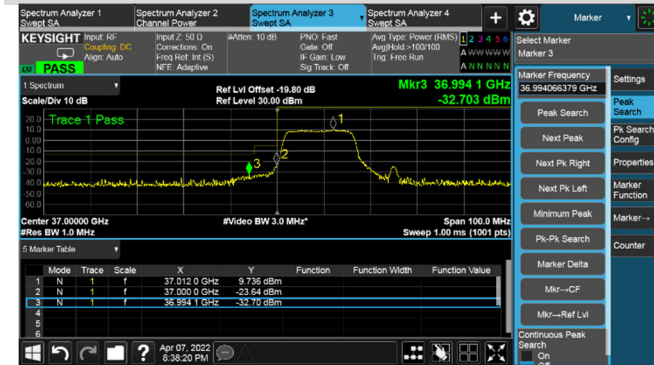


10RB0-Vertical Polarization

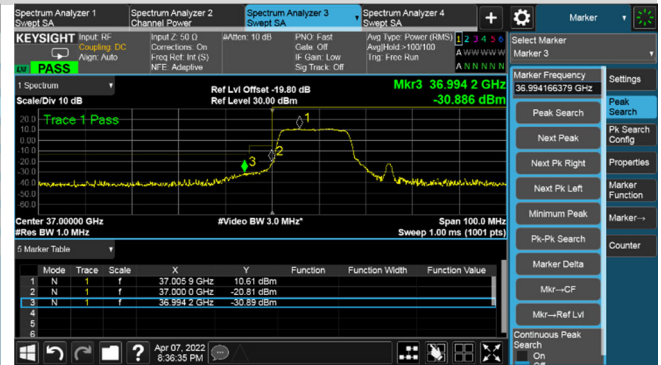

30RB0-Horizontal Polarization

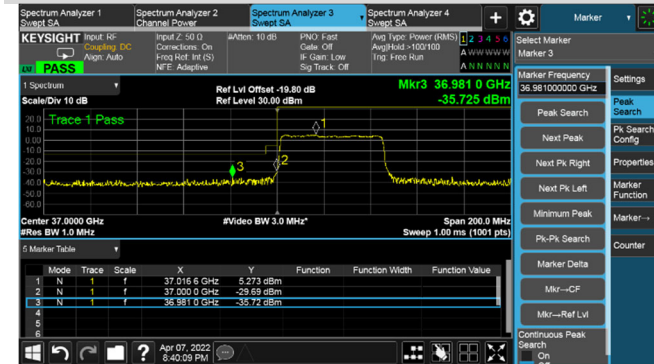

30RB0-Vertical Polarization

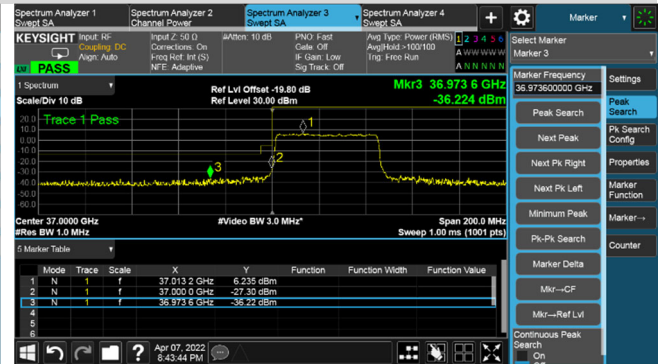

Highest Band edge (n260-1CC-50 MHz)

Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
50	1	BPSK	Highest	87	1RB31	40000-40005	H	-6.98	21.60	-28.58	-5	-22.90
							V	-6.30	21.60	-27.90		
					>=40005	H	-16.14	21.60	-37.74	-13	-22.70	
						V	-14.10	21.60	-35.70			
					10RB22	40000-40005	H	-5.19	21.60	-26.79	-5	-21.79
							V	-6.77	21.60	-28.37		
					>=40005	H	-13.43	21.60	-35.03	-13	-21.82	
						V	-13.22	21.60	-34.82			
					30RB2	40000-40005	H	-10.70	21.60	-32.30	-5	-26.17
							V	-9.57	21.60	-31.17		
					>=40005	H	-12.99	21.60	-34.59	-13	-21.59	
						V	-13.25	21.60	-34.85			
				343	1RB31	40000-40005	H	-7.78	21.60	-29.38	-5	-24.38
							V	-11.38	21.60	-32.98		
					>=40005	H	-13.88	21.60	-35.48	-13	-22.48	
						V	-13.91	21.60	-35.51			
					10RB22	40000-40005	H	-8.09	21.60	-29.69	-5	-22.67
							V	-6.07	21.60	-27.67		
					>=40005	H	-13.50	21.60	-35.10	-13	-21.91	
						V	-13.31	21.60	-34.91			
					30RB2	40000-40005	H	-11.35	21.60	-32.95	-5	-27.95
							V	-11.62	21.60	-33.22		
					>=40005	H	-14.30	21.60	-35.90	-13	-21.16	
						V	-12.56	21.60	-34.16			
87+343	1RB31	40000-40005	H	-3.25	21.60	-24.85	-5	-19.85				
			V	-7.73	21.60	-29.33						
	>=40005	H	-12.94	21.60	-34.54	-13	-21.54					
		V	-12.95	21.60	-34.55							
	10RB22	40000-40005	H	-0.85	21.60	-22.45	-5	-17.45				
			V	-4.03	21.60	-25.63						
	>=40005	H	-13.06	21.60	-34.66	-13	-21.66					
		V	-13.52	21.60	-35.12							
	30RB2	40000-40005	H	-7.69	21.60	-29.29	-5	-24.29				
			V	-9.76	21.60	-31.36						
	>=40005	H	-13.95	21.60	-35.55	-13	-21.72					
		V	-13.12	21.60	-34.72							