



Highest Band edge: n260-BW:50MHz-1CC-BPSK-Beam ID 87


1RB31-Horizontal Polarization

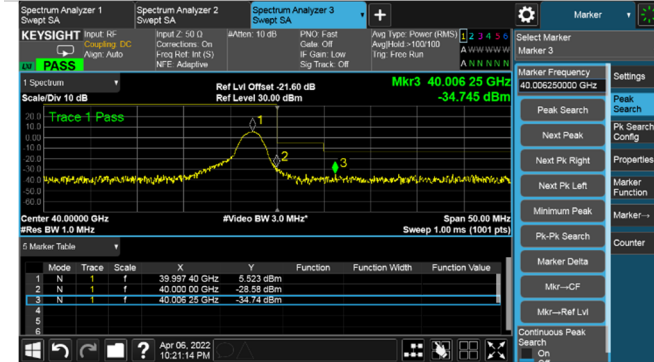


1RB31-Vertical Polarization

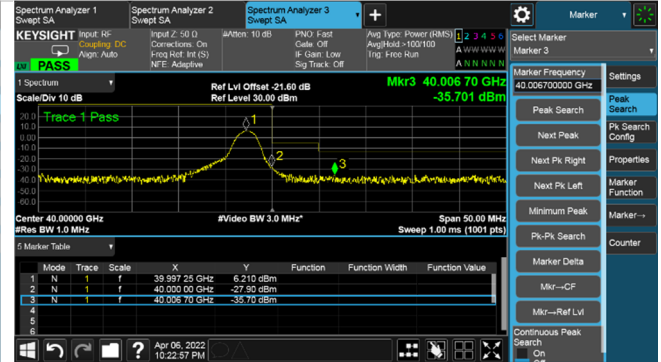


10RB22-Horizontal Polarization

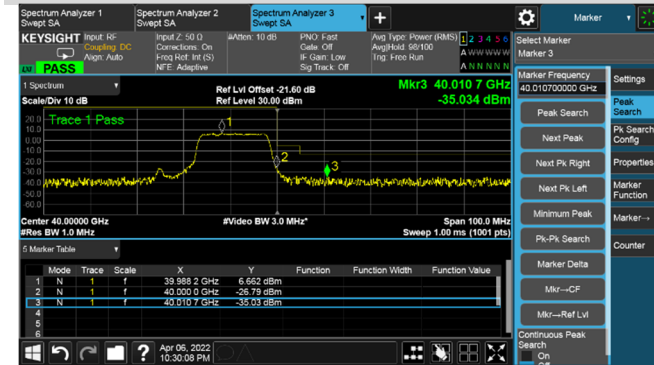


10RB22-Vertical Polarization

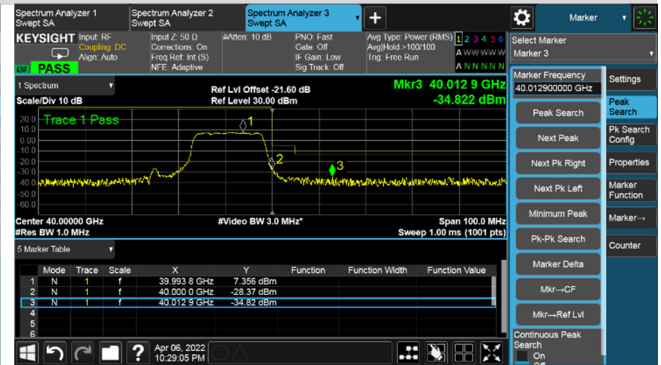

30RB2-Horizontal Polarization

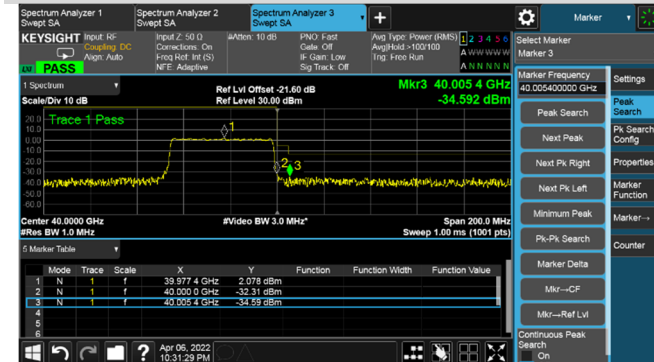


30RB2-Vertical Polarization

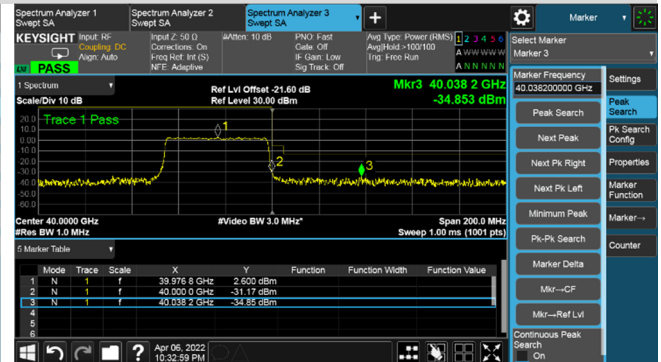


Highest Band edge: n260-BW:50MHz-1CC-BPSK-Beam ID 343


1RB31-Horizontal Polarization

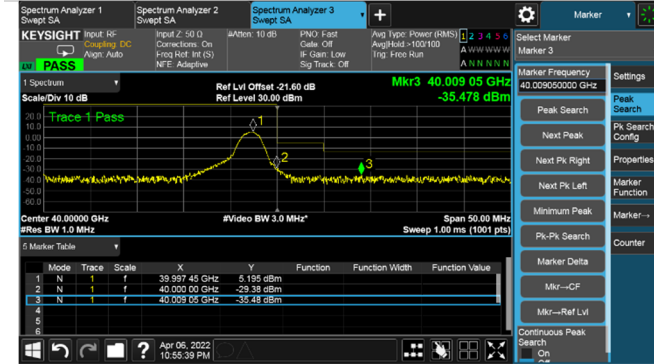


1RB31-Vertical Polarization

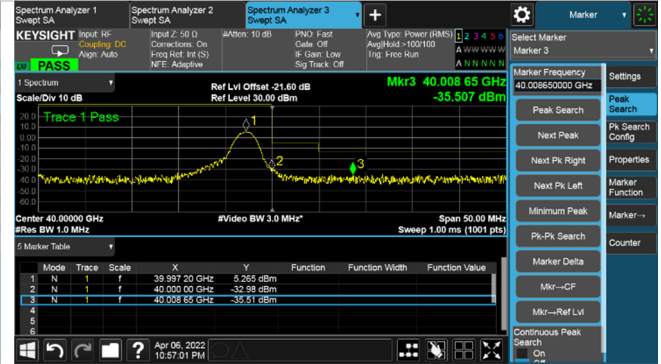


10RB22-Horizontal Polarization

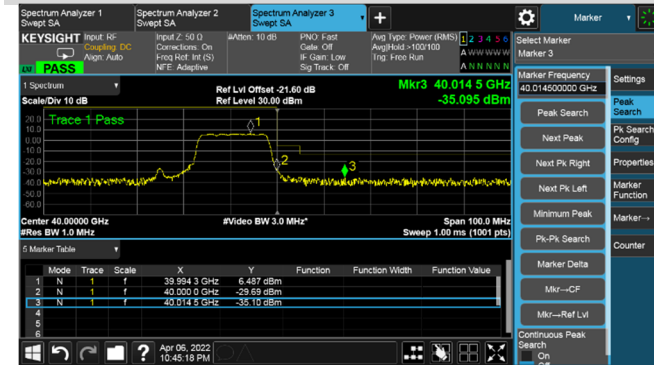


10RB22-Vertical Polarization

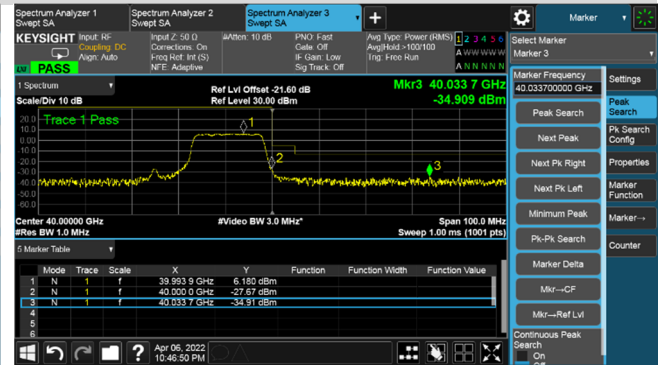

30RB2-Horizontal Polarization

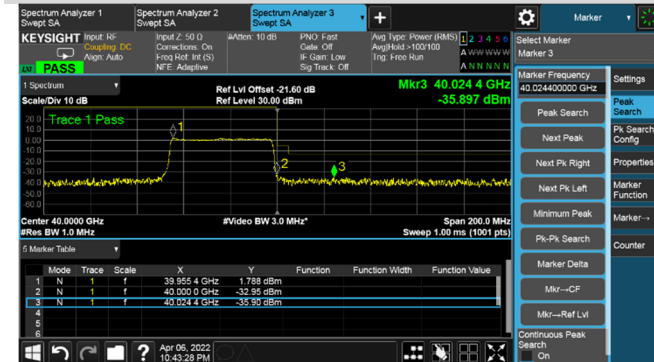


30RB2-Vertical Polarization

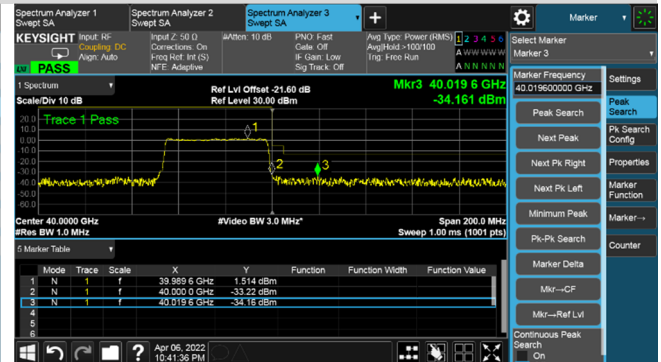


Highest Band edge: n260-BW:50MHz-1CC-BPSK-Beam ID 87+343


1RB31-Horizontal Polarization

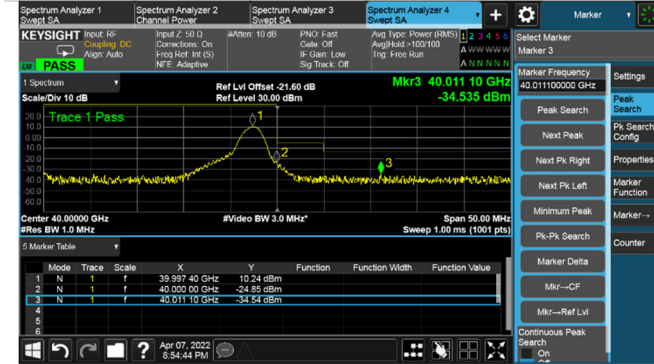


1RB31-Vertical Polarization

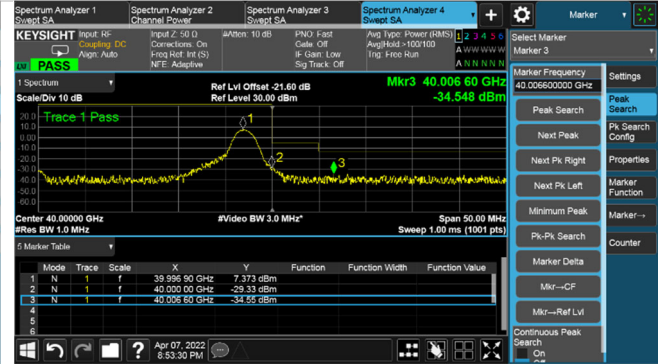


10RB22-Horizontal Polarization

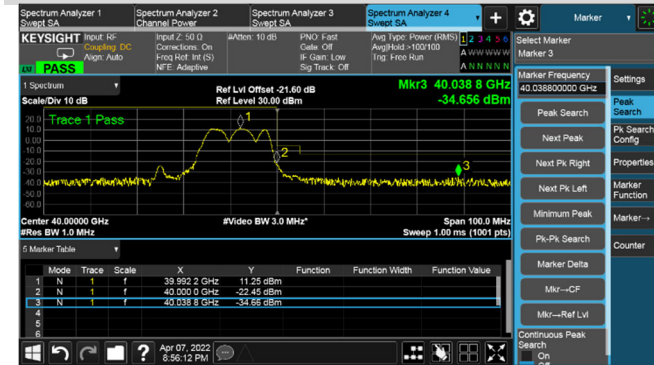


10RB22-Vertical Polarization

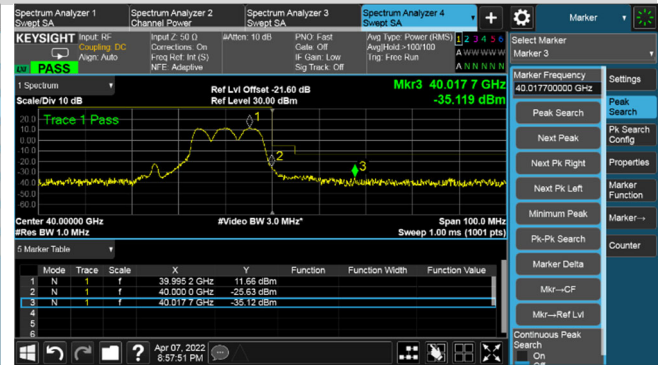

30RB2-Horizontal Polarization

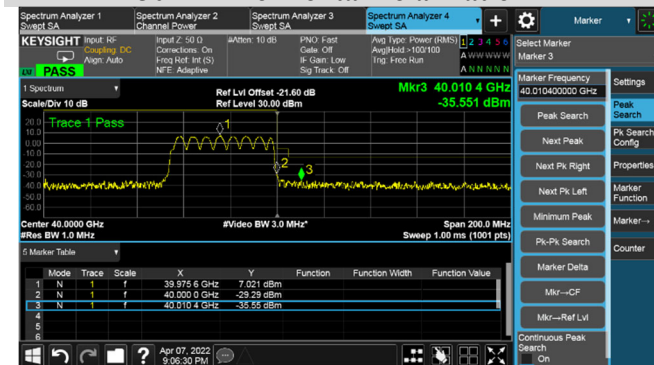

30RB2-Vertical Polarization

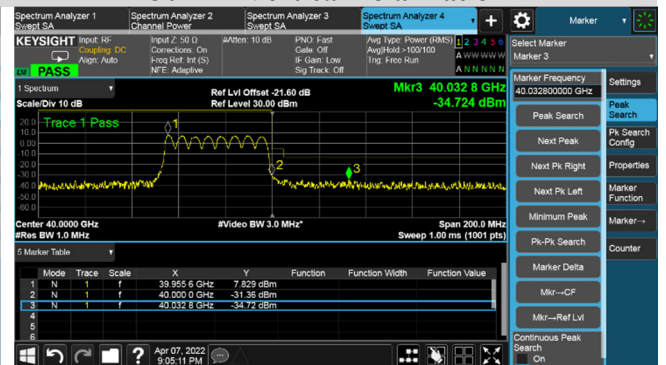

Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
50	1	QPSK	Highest	87	1RB31	40000-40005	H	-10.09	21.60	-31.69	-5	-24.69
							V	-8.09	21.60	-29.69		
					>=40005	H	-13.19	21.60	-34.79	-13	-21.68	
						V	-13.08	21.60	-34.68			
					10RB22	40000-40005	H	-7.94	21.60	-29.54	-5	-22.35
							V	-5.75	21.60	-27.35		
					>=40005	H	-12.71	21.60	-34.31	-13	-21.31	
						V	-12.87	21.60	-34.47			
					30RB2	40000-40005	H	-12.29	21.60	-33.89	-5	-27.22
							V	-10.62	21.60	-32.22		
					>=40005	H	-12.88	21.60	-34.48	-13	-21.48	
						V	-13.91	21.60	-35.51			
				343	1RB31	40000-40005	H	-9.51	21.60	-31.11	-5	-25.77
							V	-9.17	21.60	-30.77		
					>=40005	H	-14.16	21.60	-35.76	-13	-21.80	
						V	-13.20	21.60	-34.80			
					10RB22	40000-40005	H	-7.94	21.60	-29.54	-5	-23.31
							V	-6.71	21.60	-28.31		
					>=40005	H	-13.37	21.60	-34.97	-13	-19.88	
						V	-11.28	21.60	-32.88			
					30RB2	40000-40005	H	-10.94	21.60	-32.54	-5	-27.54
							V	-12.52	21.60	-34.12		
					>=40005	H	-12.95	21.60	-34.55	-13	-21.36	
						V	-12.76	21.60	-34.36			
87+343	1RB31	40000-40005	H	-4.37	21.60	-25.97	-5	-20.97				
			V	-7.53	21.60	-29.13						
	>=40005	H	-13.63	21.60	-35.23	-13	-22.06					
		V	-13.46	21.60	-35.06							
	10RB22	40000-40005	H	-3.18	21.60	-24.78	-5	-19.78				
			V	-5.47	21.60	-27.07						
	>=40005	H	-10.68	21.60	-32.28	-13	-17.95					
		V	-9.35	21.60	-30.95							
	30RB2	40000-40005	H	-8.58	21.60	-30.18	-5	-25.18				
			V	-9.99	21.60	-31.59						
	>=40005	H	-10.79	21.60	-32.39	-13	-19.16					
		V	-10.56	21.60	-32.16							