



Highest Band edge: n260-BW:50MHz-ICC-QPSK-Beam ID 87


1RB31-Horizontal Polarization

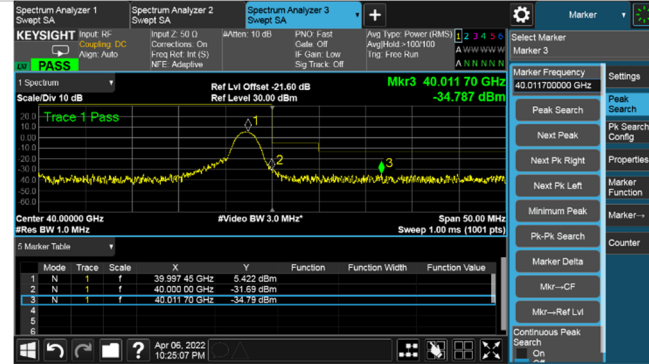


1RB31-Vertical Polarization

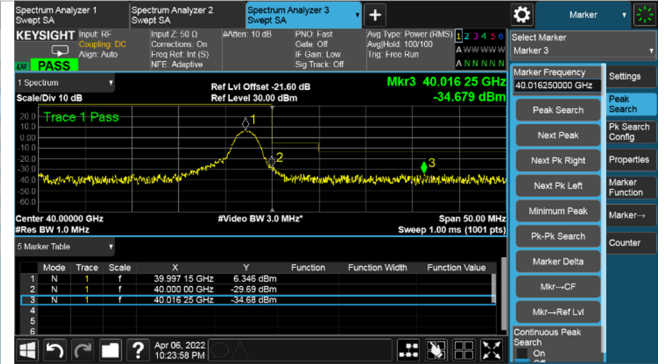


10RB22-Horizontal Polarization

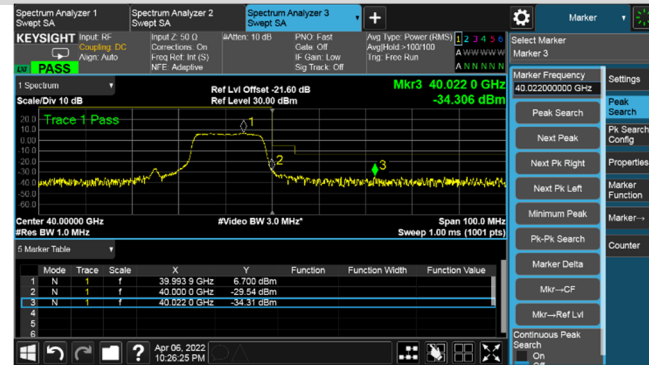


10RB22-Vertical Polarization

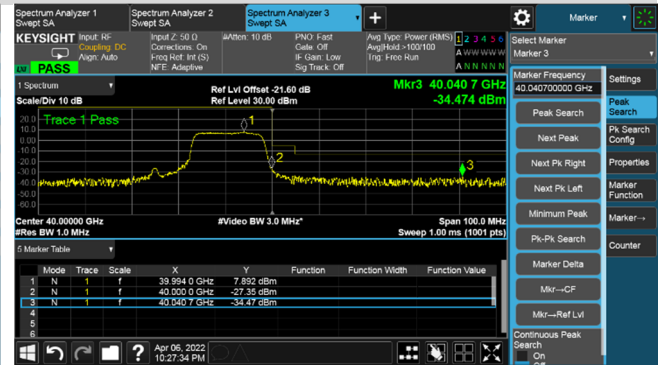

30RB2-Horizontal Polarization

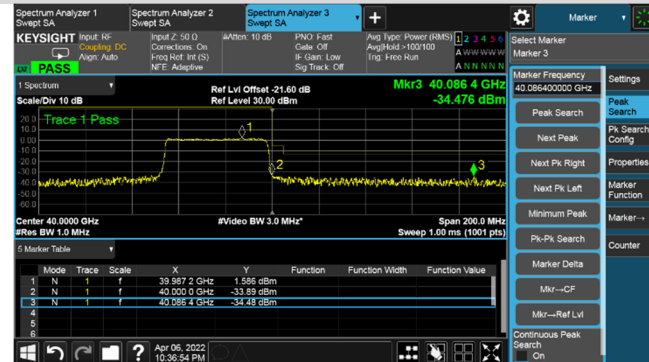


30RB2-Vertical Polarization

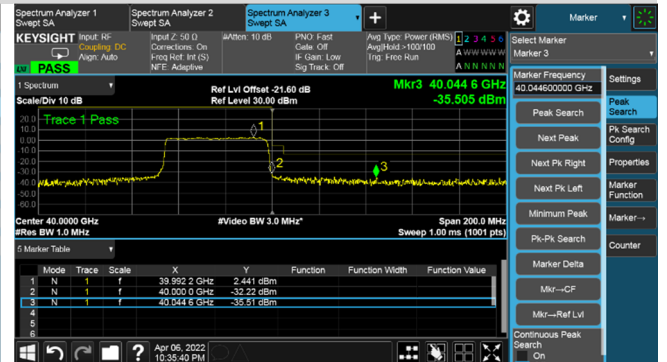


Highest Band edge: n260-BW:50MHz-1CC-QPSK-Beam ID 343


1RB31-Horizontal Polarization

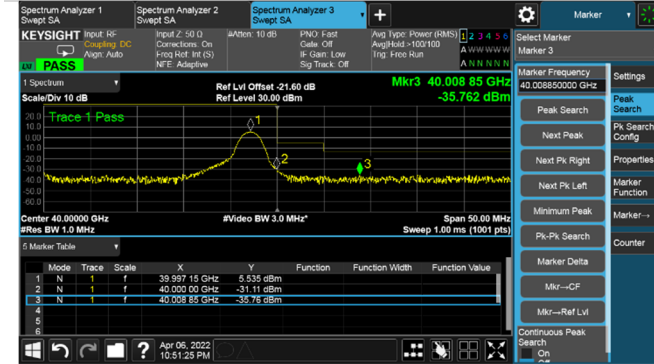


1RB31-Vertical Polarization

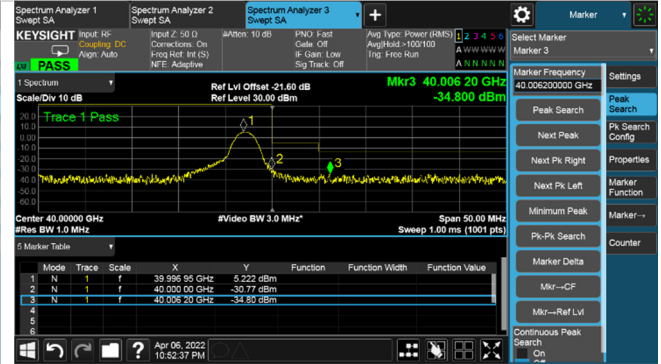


10RB22-Horizontal Polarization

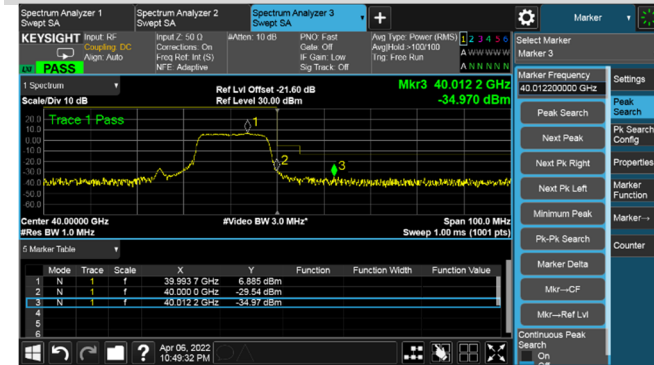


10RB22-Vertical Polarization

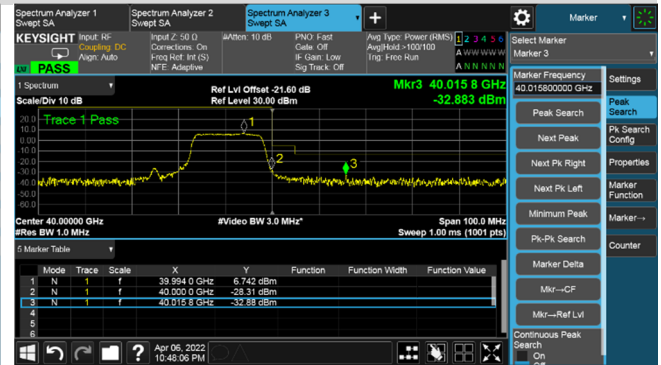

30RB2-Horizontal Polarization

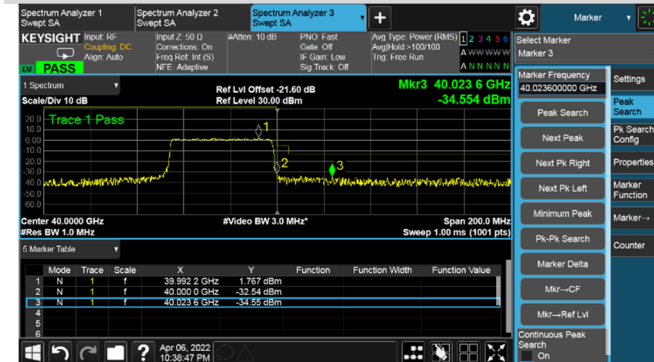


30RB2-Vertical Polarization

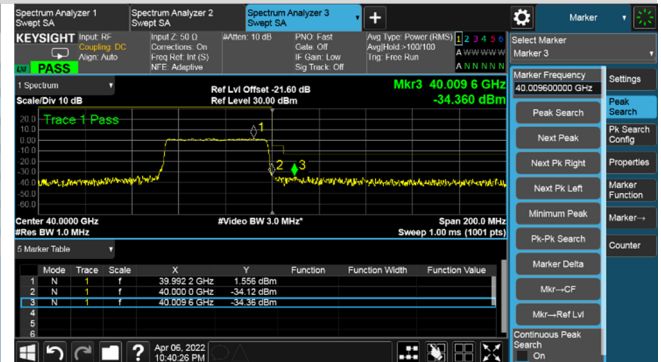


Highest Band edge: n260-BW:50MHz-1CC-QPSK-Beam ID 87+343


1RB31-Horizontal Polarization

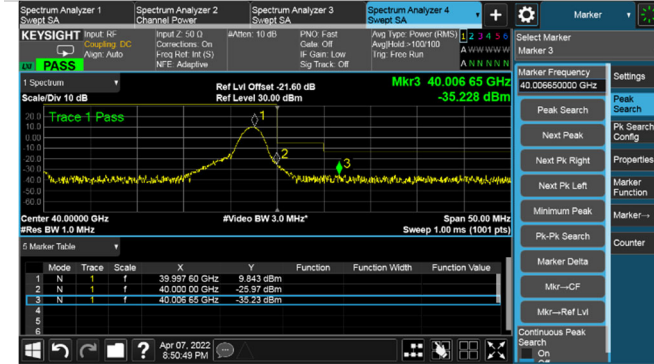


1RB31-Vertical Polarization

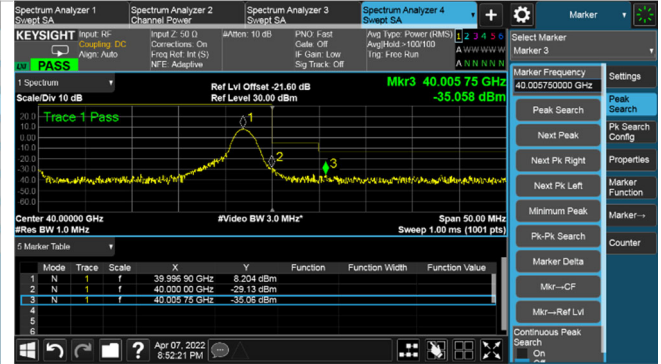


10RB22-Horizontal Polarization

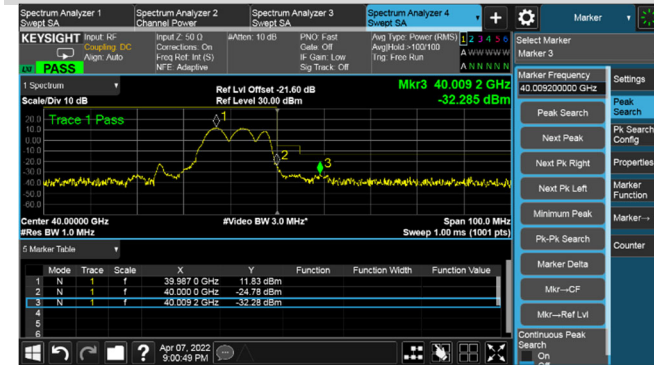


10RB22-Vertical Polarization

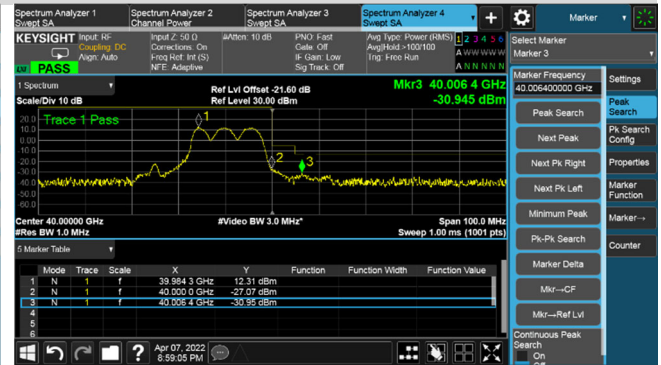

30RB2-Horizontal Polarization

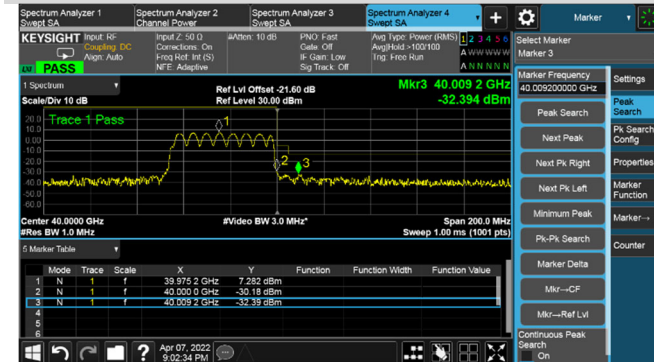

30RB2-Vertical Polarization

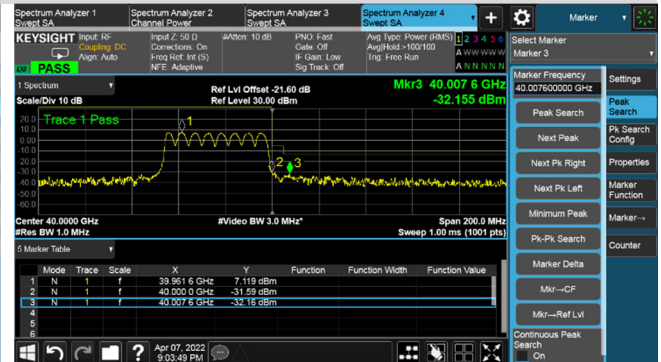

Lowest Band edge (n260-1CC-100 MHz)

Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
100	1	BPSK	Lowest	87	1RB0	36990-37000	H	-9.50	19.80	-29.30	-5	-21.82
							V	-7.02	19.80	-26.82		
					<=36990	H	-15.08	19.80	-34.88	-13	-21.88	
						V	-18.35	19.80	-38.15			
					20RB0	36990-37000	H	-10.37	19.80	-30.17	-5	-23.79
							V	-8.99	19.80	-28.79		
				<=36990	H	-14.09	19.80	-33.89	-13	-19.73		
					V	-12.93	19.80	-32.73				
				64RB0	36990-37000	H	-12.84	19.80	-32.64	-5	-26.75	
						V	-11.95	19.80	-31.75			
				<=36990	H	-16.07	19.80	-35.87	-13	-22.30		
					V	-15.50	19.80	-35.30				
				343	1RB0	36990-37000	H	-9.57	19.80	-29.37	-5	-22.69
							V	-7.89	19.80	-27.69		
					<=36990	H	-18.40	19.80	-38.20	-13	-24.66	
						V	-17.86	19.80	-37.66			
					20RB0	36990-37000	H	-9.41	19.80	-29.21	-5	-23.66
							V	-8.86	19.80	-28.66		
				<=36990	H	-14.98	19.80	-34.78	-13	-21.78		
					V	-15.39	19.80	-35.19				
				64RB0	36990-37000	H	-13.23	19.80	-33.03	-5	-27.40	
						V	-12.60	19.80	-32.40			
				<=36990	H	-15.04	19.80	-34.84	-13	-21.80		
					V	-15.00	19.80	-34.80				
87+343	1RB0	36990-37000	H	-10.33	19.80	-30.13	-5	-16.52				
			V	-1.72	19.80	-21.52						
	<=36990	H	-17.06	19.80	-36.86	-13	-23.80					
		V	-17.00	19.80	-36.80							
	20RB0	36990-37000	H	-6.30	19.80	-26.10	-5	-16.48				
			V	-1.68	19.80	-21.48						
<=36990	H	-9.11	19.80	-28.91	-13	-15.19						
	V	-8.39	19.80	-28.19								
64RB0	36990-37000	H	-8.31	19.80	-28.11	-5	-23.11					
		V	-8.65	19.80	-28.45							
<=36990	H	-12.13	19.80	-31.93	-13	-18.19						
	V	-11.39	19.80	-31.19								