



Highest Band edge: n260-BW:100MHz-2CC-QPSK-Beam ID 343


1RB65-Horizontal Polarization

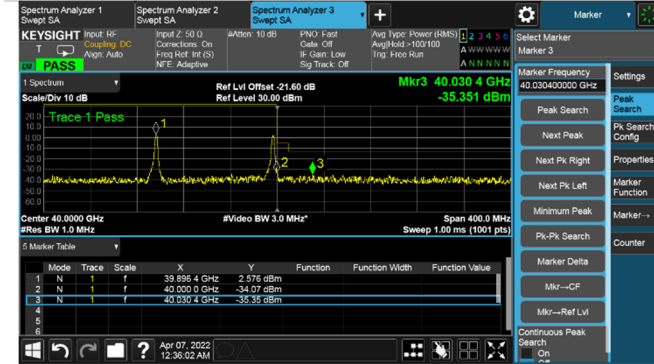


1RB65-Vertical Polarization

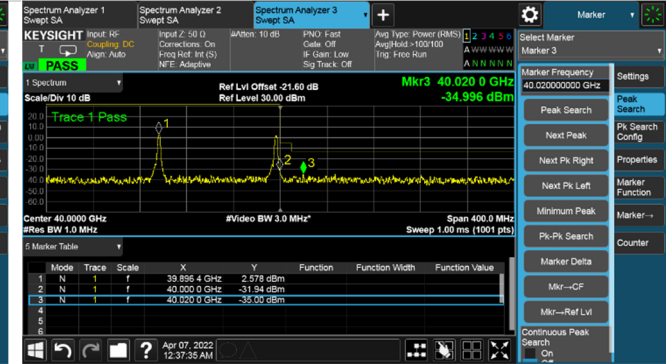


20RB46-Horizontal Polarization

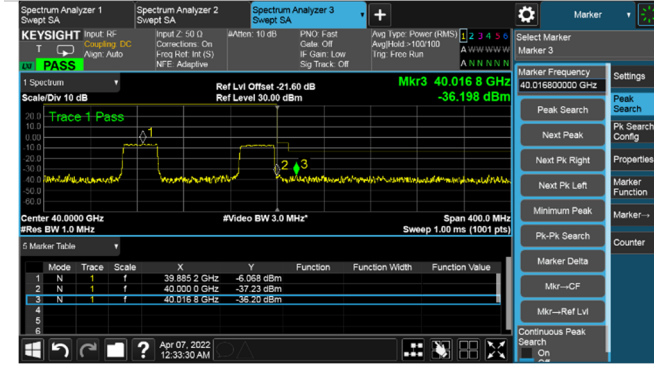


20RB46-Vertical Polarization

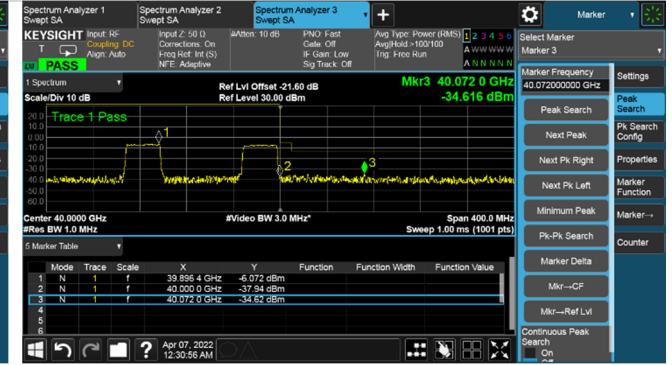

64RB2-Horizontal Polarization

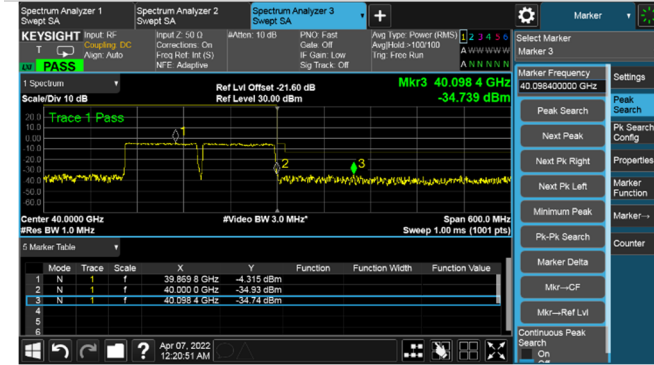


64RB2-Vertical Polarization

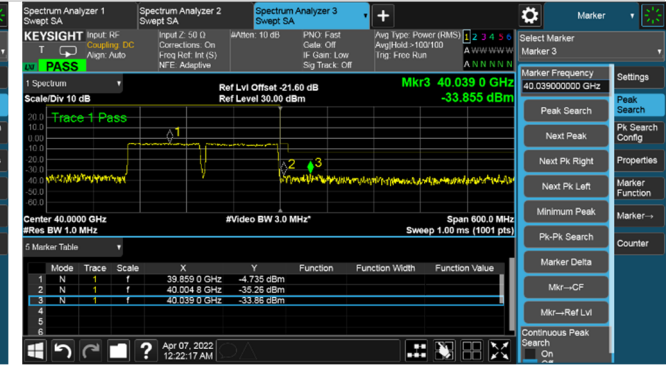


Highest Band edge: n260-BW:100MHz-2CC-QPSK-Beam ID 87+343


1RB65-Horizontal Polarization

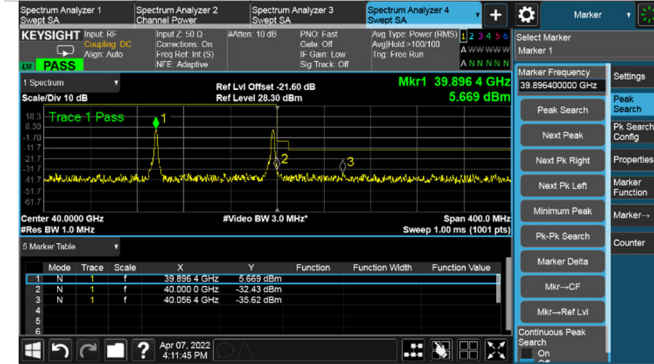


1RB65-Vertical Polarization

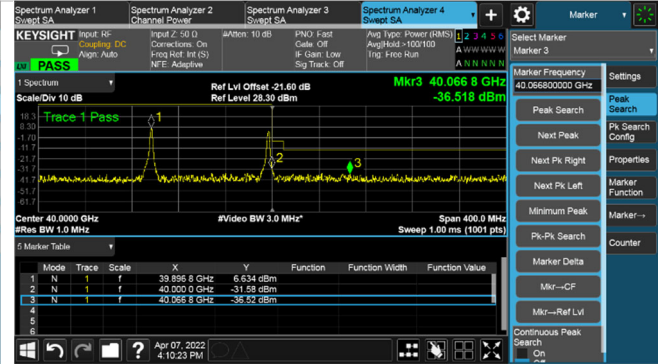


20RB46-Horizontal Polarization

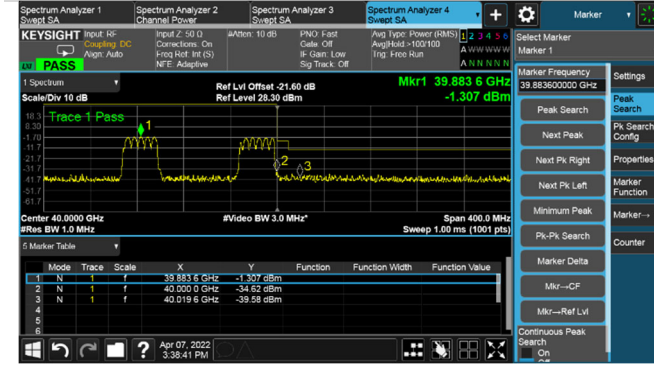


20RB46-Vertical Polarization

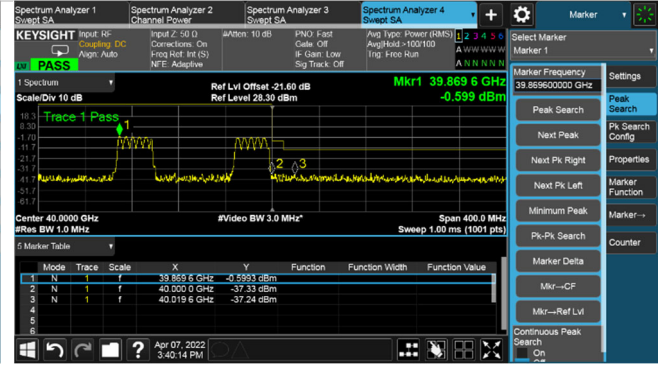

64RB2-Horizontal Polarization

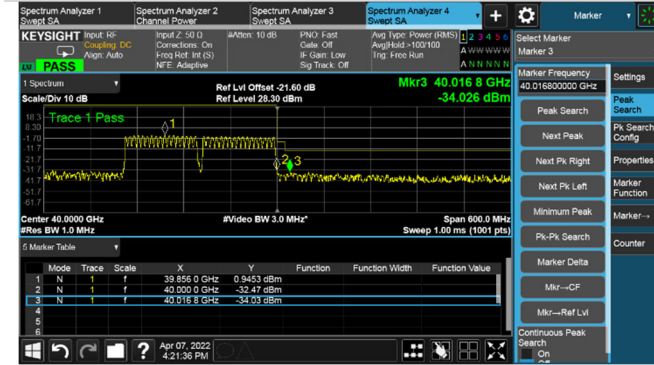

64RB2-Vertical Polarization

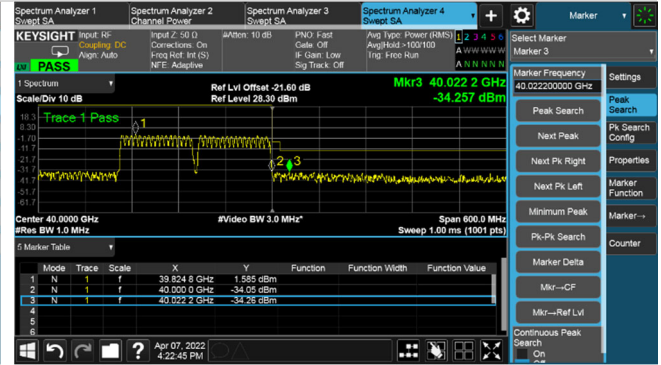


Lowest Band edge (n261-1CC-50 MHz)


Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
50	1	BPSK	Lowest	87	1RB0	27495-27500	H	-5.68	19.90	-25.58	-5	-20.58
							V	-6.01	19.90	-25.91		
					<=27495	H	-22.43	19.90	-42.33	-13	-29.33	
						V	-24.56	19.90	-44.46			
					10RB0	27495-27500	H	-4.61	19.90	-24.51	-5	-19.51
							V	-4.93	19.90	-24.83		
				<=27495	H	-11.78	19.90	-31.68	-13	-18.68		
					V	-12.03	19.90	-31.93				
				30RB0	27495-27500	H	-8.29	19.90	-28.19	-5	-23.19	
						V	-9.26	19.90	-29.16			
				<=27495	H	-16.59	19.90	-36.49	-13	-23.40		
					V	-16.50	19.90	-36.40				
				343	1RB0	27495-27500	H	-6.33	19.90	-26.23	-5	-21.01
							V	-6.11	19.90	-26.01		
					<=27495	H	-23.41	19.90	-43.31	-13	-29.35	
						V	-22.45	19.90	-42.35			
					10RB0	27495-27500	H	-4.47	19.90	-24.37	-5	-17.10
							V	-2.20	19.90	-22.10		
				<=27495	H	-12.27	19.90	-32.17	-13	-18.33		
					V	-11.43	19.90	-31.33				
				30RB0	27495-27500	H	-7.84	19.90	-27.74	-5	-22.74	
						V	-8.41	19.90	-28.31			
				<=27495	H	-18.26	19.90	-38.16	-13	-23.67		
					V	-16.77	19.90	-36.67				
87+343	1RB0	27495-27500	H	-0.14	19.90	-20.04	-5	-15.04				
			V	-12.22	19.90	-32.12						
	<=27495	H	-22.42	19.90	-42.32	-13	-28.57					
		V	-21.67	19.90	-41.57							
	10RB0	27495-27500	H	-0.97	19.90	-20.87	-5	-15.87				
			V	-3.37	19.90	-23.27						
<=27490	H	-7.78	19.90	-27.68	-13	-11.47						
	V	-4.57	19.90	-24.47								
30RB0	27495-27500	H	-6.51	19.90	-26.41	-5	-21.37					
		V	-6.47	19.90	-26.37							
<=27495	H	-10.05	19.90	-29.95	-13	-16.52						
	V	-9.62	19.90	-29.52								

Lowest Band edge: n261-BW:50MHz-ICC-BPSK-Beam ID 87


1RB0-Horizontal Polarization

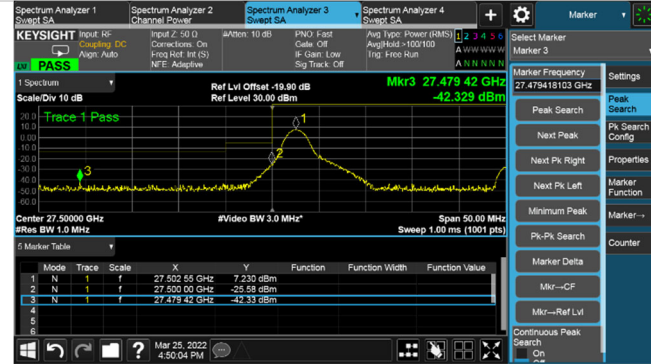


1RB0-Vertical Polarization

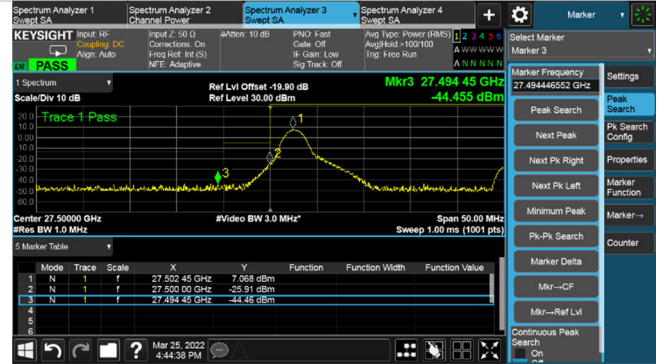


10RB0-Horizontal Polarization

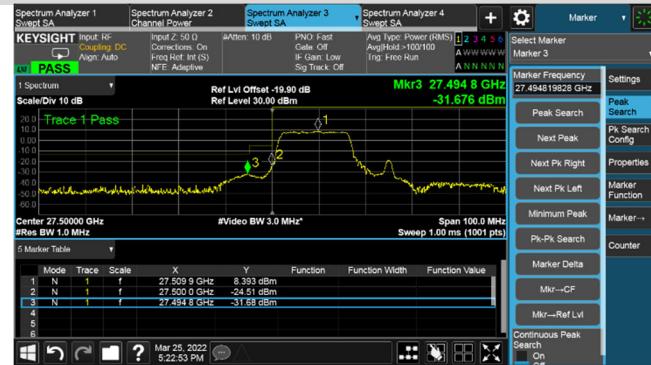


10RB0-Vertical Polarization

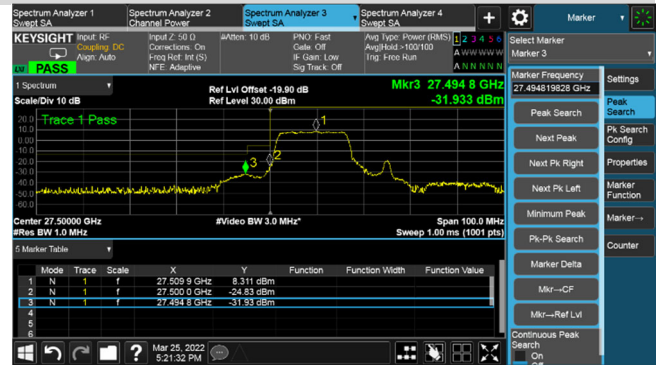

30RB0-Horizontal Polarization

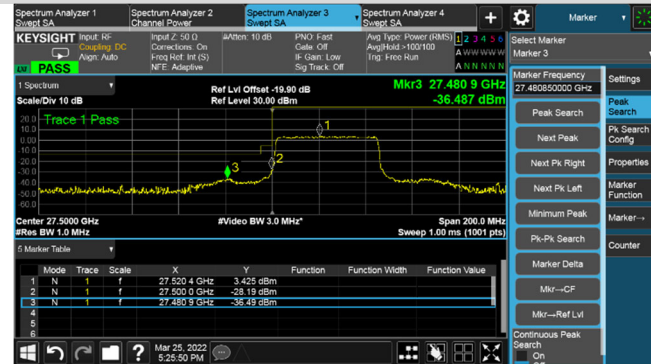


30RB0-Vertical Polarization

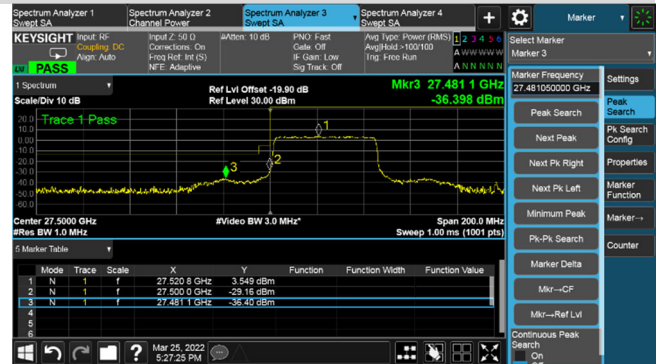


Lowest Band edge: n261-BW:50MHz-1CC-BPSK-Beam ID 343


1RB0-Horizontal Polarization

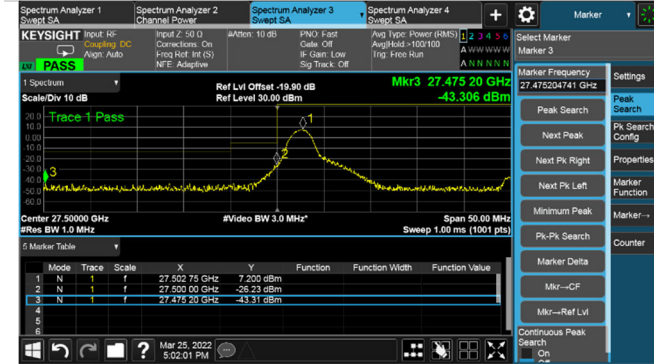


1RB0-Vertical Polarization

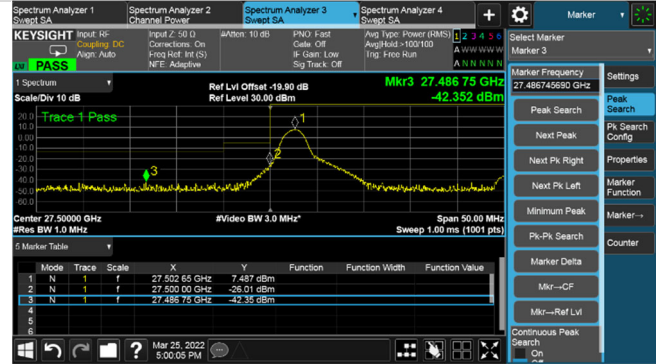


10RB0-Horizontal Polarization

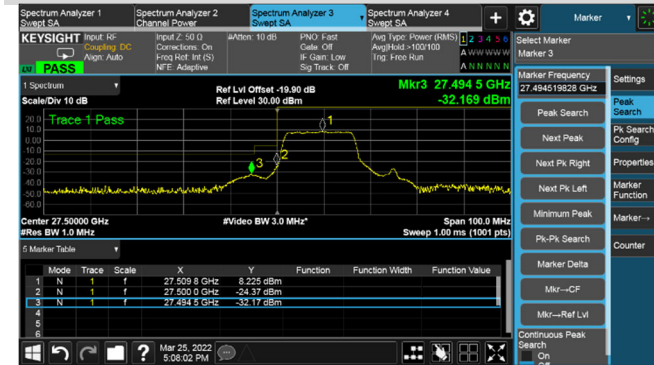


10RB0-Vertical Polarization

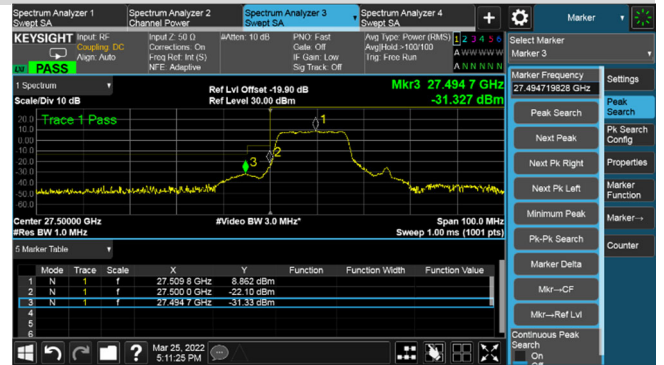

30RB0-Horizontal Polarization

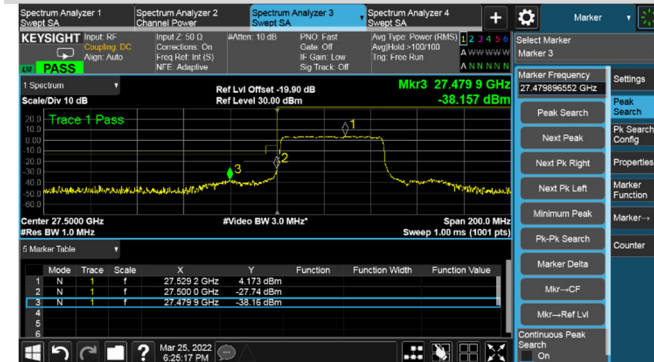


30RB0-Vertical Polarization

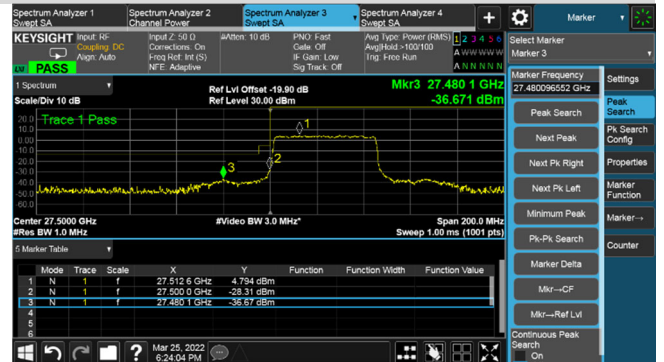


Lowest Band edge: n261-BW:50MHz-1CC-BPSK-Beam ID 87+343


1RB0-Horizontal Polarization

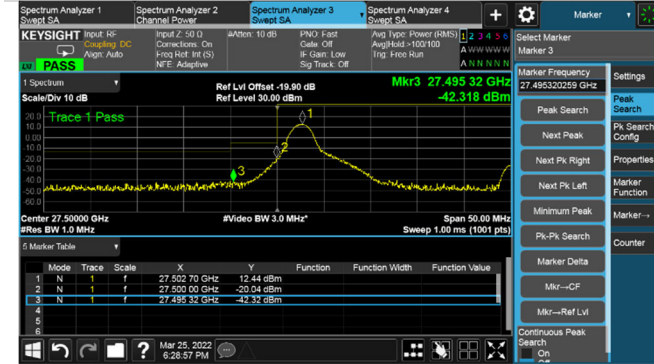


1RB0-Vertical Polarization

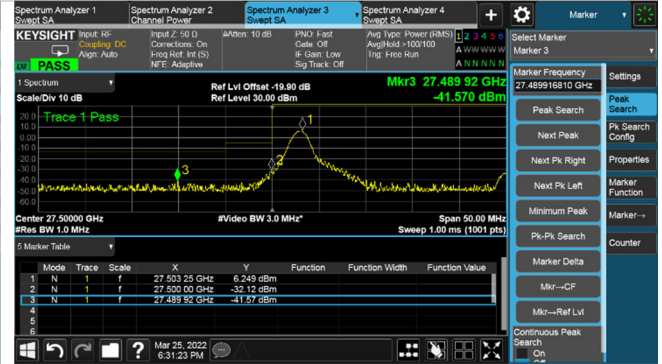


10RB0-Horizontal Polarization

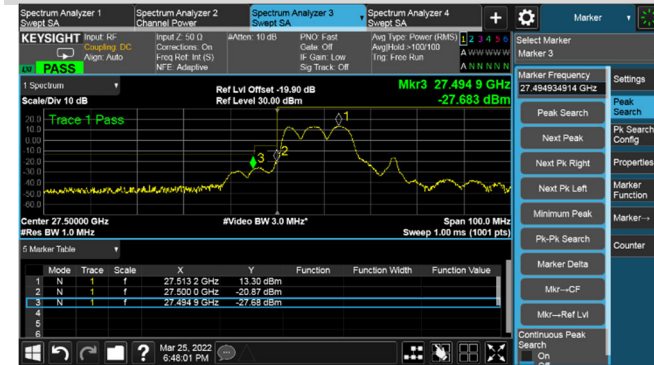


10RB0-Vertical Polarization

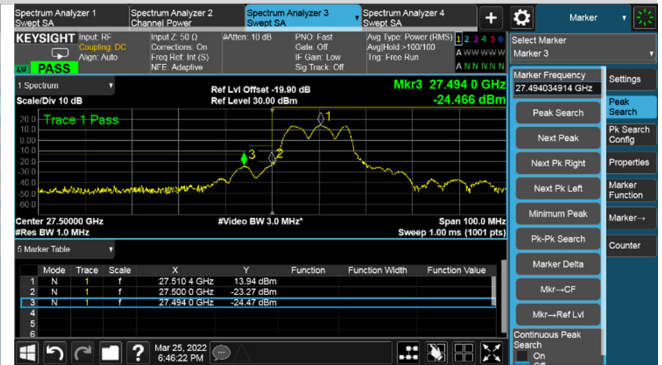

30RB0-Horizontal Polarization

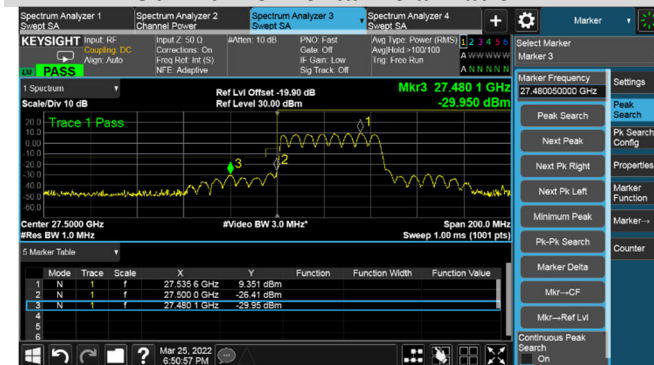

30RB0-Vertical Polarization

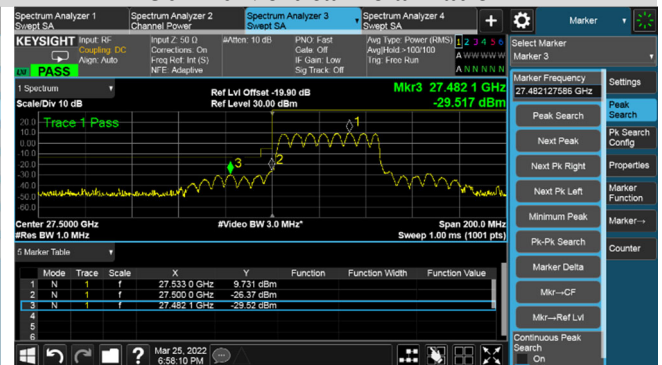

Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
50	1	QPSK	Lowest	87	1RB0	27495-27500	H	-6.12	19.90	-26.02	-5	-20.04
							V	-7.67	19.90	-27.57		
					<=27495	H	-23.48	19.90	-43.38	-13	-23.67	
						V	-22.84	19.90	-42.74			
					10RB0	27495-27500	H	-4.35	19.90	-24.25	-5	-19.97
							V	-4.53	19.90	-24.43		
				<=27495	H	-11.87	19.90	-31.77	-13	-12.48		
					V	-11.81	19.90	-31.71				
				30RB0	27495-27500	H	-8.98	19.90	-28.88	-5	-21.42	
						V	-8.98	19.90	-28.88			
				<=27495	H	-14.05	19.90	-33.95	-13	-16.67		
					V	-13.27	19.90	-33.17				
				343	1RB0	27495-27500	H	-4.69	19.90	-24.59	-5	-21.64
							V	-6.32	19.90	-26.22		
					<=27495	H	-23.43	19.90	-43.33	-13	-23.70	
						V	-23.65	19.90	-43.55			
					10RB0	27495-27500	H	-2.36	19.90	-22.26	-5	-18.51
							V	-3.30	19.90	-23.20		
				<=27495	H	-12.05	19.90	-31.95	-13	-14.47		
					V	-11.46	19.90	-31.36				
				30RB0	27495-27500	H	-10.39	19.90	-30.29	-5	-20.03	
						V	-10.26	19.90	-30.16			
				<=27495	H	-15.12	19.90	-35.02	-13	-17.83		
					V	-14.69	19.90	-34.59				
87+343	1RB0	27495-27500	H	-1.21	19.90	-21.11	-5	-18.25				
			V	-12.26	19.90	-32.16						
	<=27495	H	-22.23	19.90	-42.13	-13	-23.34					
		V	-22.84	19.90	-42.74							
	10RB0	27495-27500	H	-0.06	19.90	-19.96	-5	-11.08				
			V	-1.00	19.90	-20.90						
<=27490	H	-8.27	19.90	-28.17	-13	-6.72						
	V	-4.82	19.90	-24.72								
30RB0	27495-27500	H	-5.33	19.90	-25.23	-5	-15.10					
		V	-4.38	19.90	-24.28							
<=27495	H	-6.68	19.90	-26.58	-13	-12.16						
	V	-6.31	19.90	-26.21								