



Highest Band edge: n261-BW:100MHz-1CC-BPSK-Beam ID 343


1RB65-Horizontal Polarization

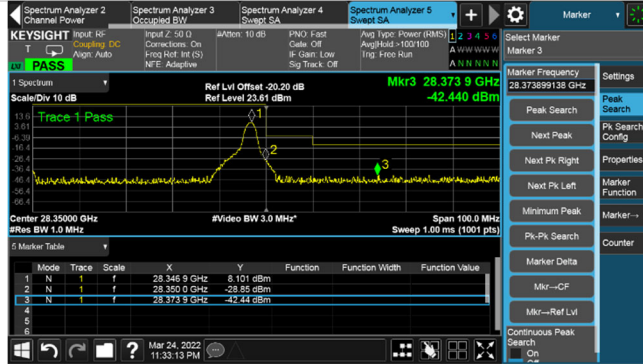


1RB65-Vertical Polarization

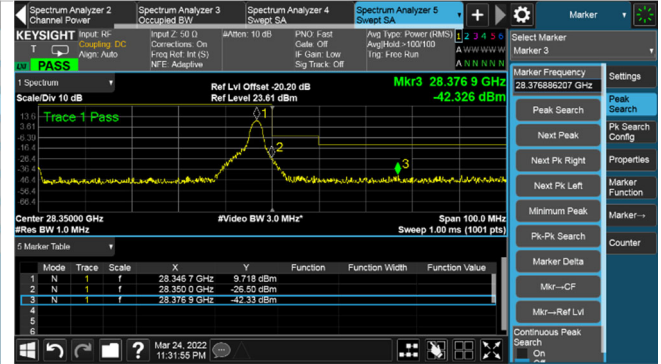


20RB46-Horizontal Polarization

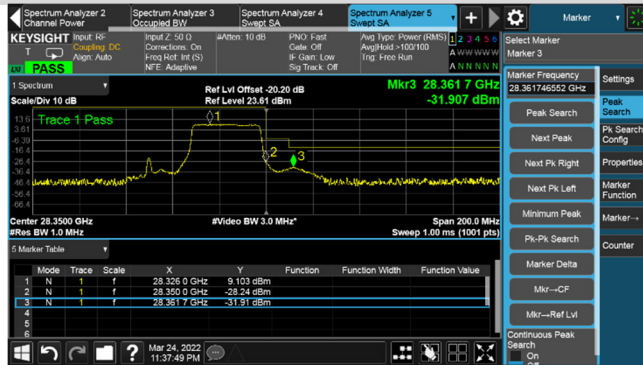


20RB46-Vertical Polarization

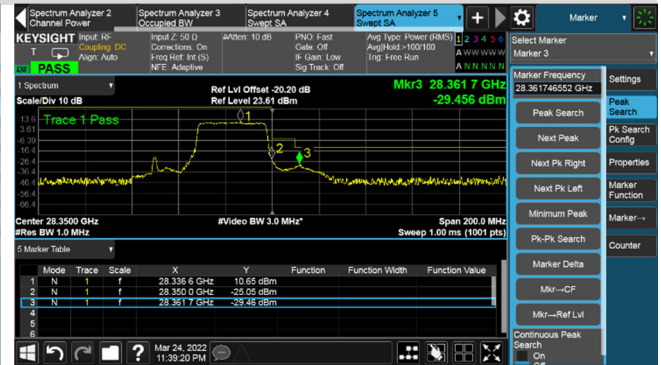

64RB2-Horizontal Polarization

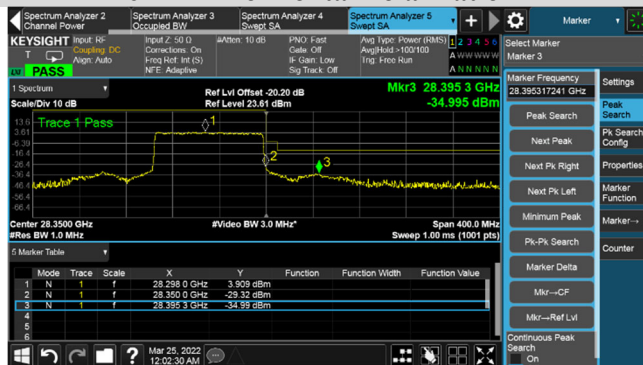


64RB2-Vertical Polarization

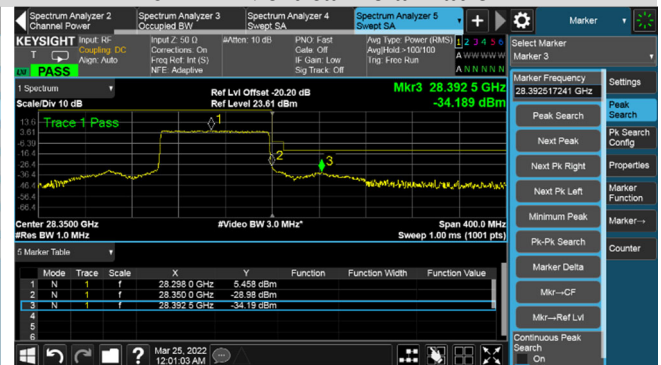


Highest Band edge: n261-BW:100MHz-1CC-BPSK-Beam ID 87+343


1RB65-Horizontal Polarization

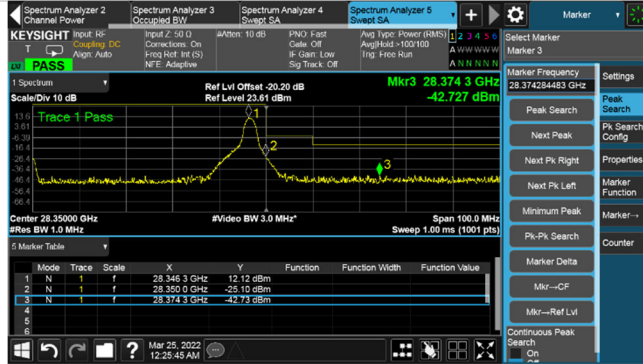


1RB65-Vertical Polarization

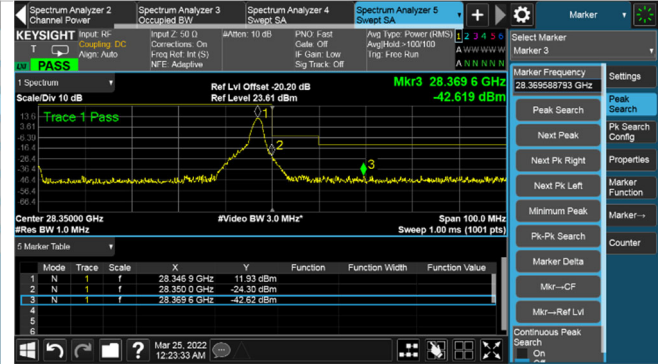


20RB46-Horizontal Polarization

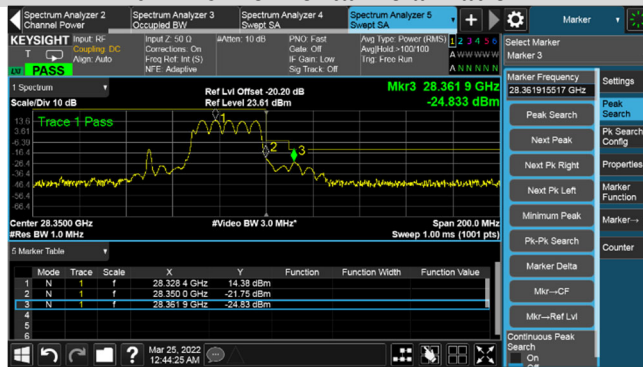


20RB46-Vertical Polarization

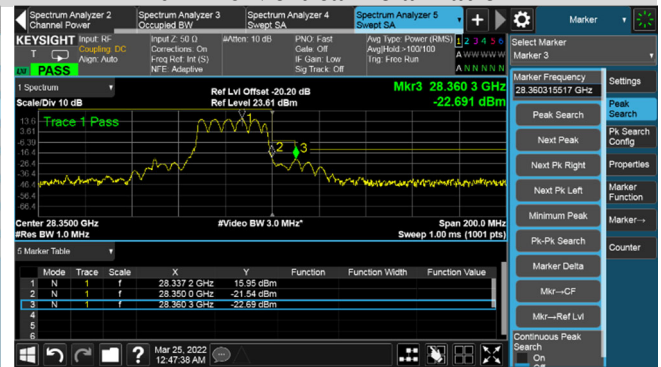

64RB2-Horizontal Polarization

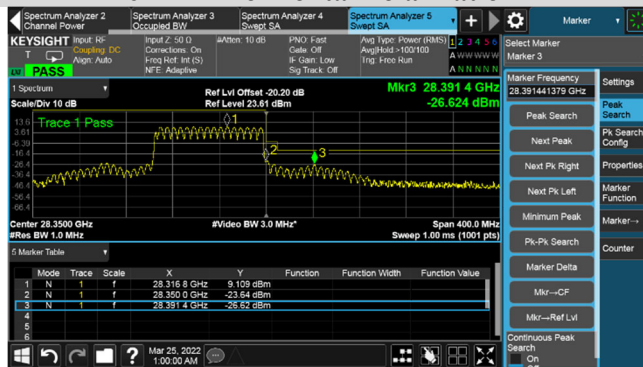


64RB2-Vertical Polarization

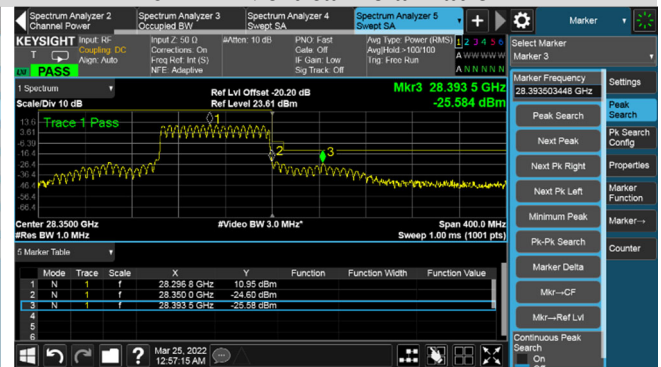


Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
100	1	QPSK	Highest	87	1RB65	28350-28360	H	-7.73	20.2	-27.93	-5	-21.55
							V	-6.35	20.2	-26.55		
					>=28360	H	-23.34	20.2	-43.54	-13	-30.14	
						V	-22.94	20.2	-43.14			
					20RB46	28350-28360	H	-3.29	20.2	-23.49	-5	-17.91
							V	-2.71	20.2	-22.91		
				>=28360	H	-8.86	20.2	-29.06	-13	-15.47		
					V	-8.27	20.2	-28.47				
				64RB2	28350-28360	H	-7.37	20.2	-27.57	-5	-22.57	
						V	-7.64	20.2	-27.84			
				>=28360	H	-11.12	20.2	-31.32	-13	-18.11		
					V	-10.91	20.2	-31.11				
				343	1RB65	28350-28360	H	-8.93	20.2	-29.13	-5	-22.63
							V	-7.43	20.2	-27.63		
					>=28360	H	-22.25	20.2	-42.45	-13	-28.04	
						V	-20.84	20.2	-41.04			
					20RB46	28350-28360	H	-4.41	20.2	-24.61	-5	-18.94
							V	-3.74	20.2	-23.94		
				>=28360	H	-8.67	20.2	-28.87	-13	-15.12		
					V	-7.92	20.2	-28.12				
				64RB2	28350-28360	H	-9.07	20.2	-29.27	-5	-23.48	
						V	-8.28	20.2	-28.48			
				>=28360	H	-11.83	20.2	-32.03	-13	-17.75		
					V	-10.55	20.2	-30.75				
87+343	1RB65	28350-28360	H	-4.59	20.2	-24.79	-5	-19.70				
			V	-4.50	20.2	-24.70						
	>=28360	H	-20.66	20.2	-40.86	-13	-27.86					
		V	-21.79	20.2	-41.99							
	20RB46	28350-28360	H	0.77	20.2	-19.43	-5	-14.43				
			V	0.05	20.2	-20.15						
>=28360	H	-1.11	20.2	-21.31	-13	-7.15						
	V	0.05	20.2	-20.15								
30RB2	28350-28360	H	-3.71	20.2	-23.91	-5	-18.65					
		V	-3.45	20.2	-23.65							
>=28360	H	-3.85	20.2	-24.05	-13	-9.91						
	V	-2.71	20.2	-22.91								

Highest Band edge: n261-BW:100MHz-1CC-QPSK-Beam ID 87


1RB65-Horizontal Polarization

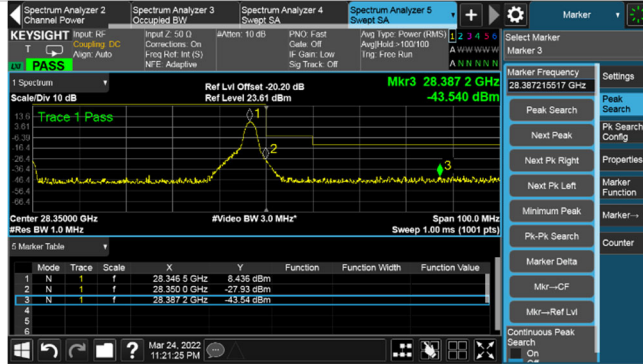


1RB65-Vertical Polarization

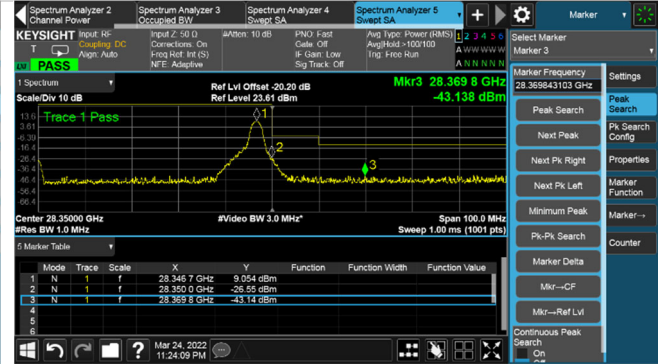


20RB46-Horizontal Polarization

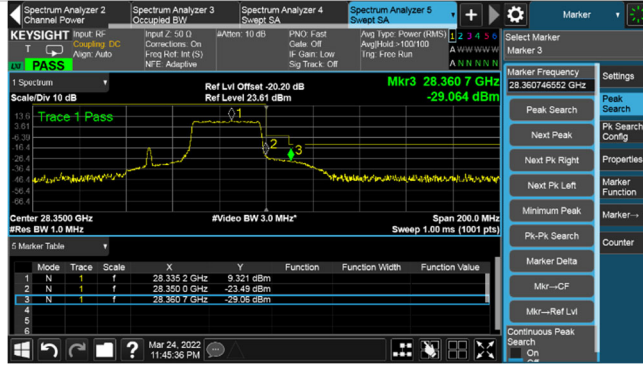


20RB46-Vertical Polarization

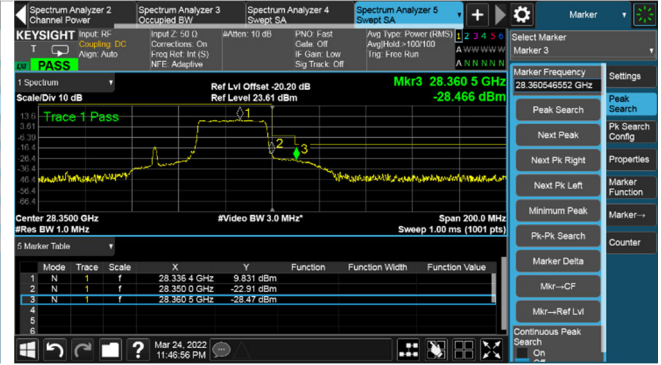

64RB2-Horizontal Polarization

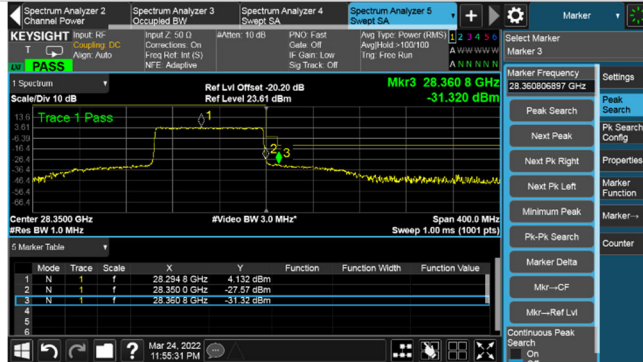


64RB2-Vertical Polarization

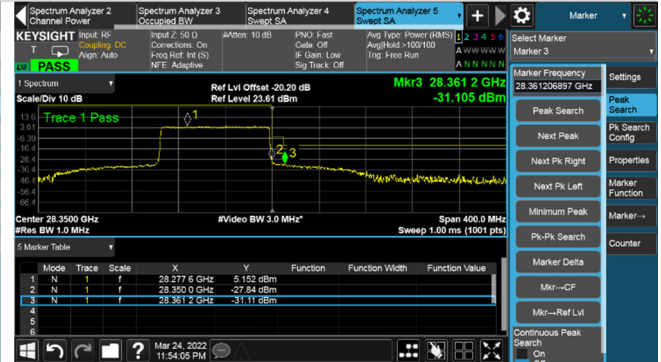


Highest Band edge: n261-BW:100MHz-ICC-QPSK-Beam ID 343


1RB65-Horizontal Polarization

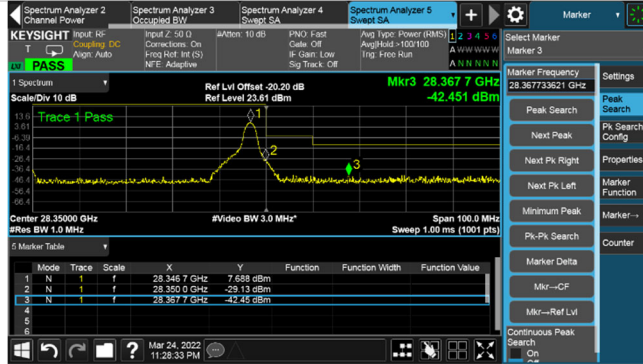


1RB65-Vertical Polarization

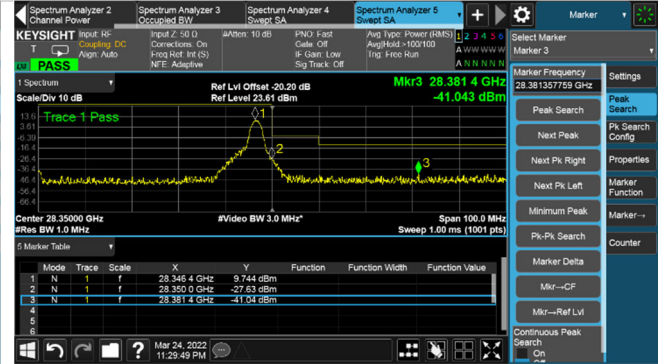


20RB46-Horizontal Polarization

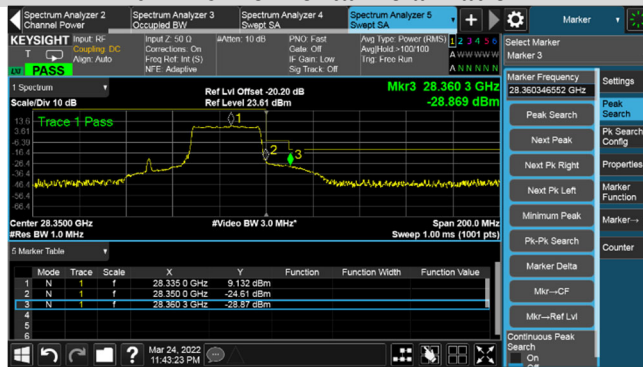


20RB46-Vertical Polarization

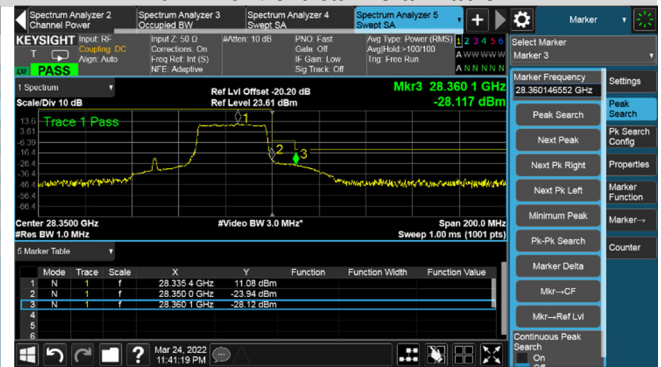

64RB2-Horizontal Polarization

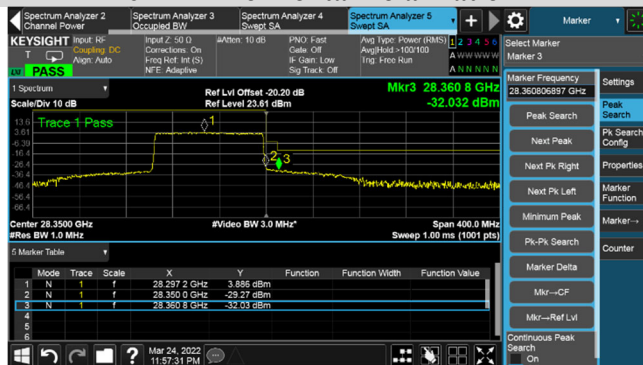


64RB2-Vertical Polarization

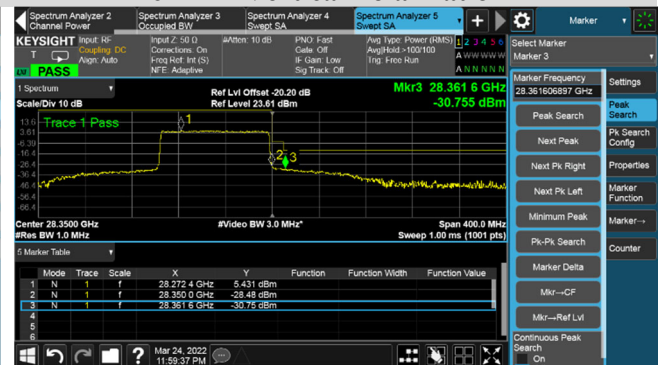


Highest Band edge: n261-BW:100MHz-1CC-QPSK-Beam ID 87+343


1RB65-Horizontal Polarization

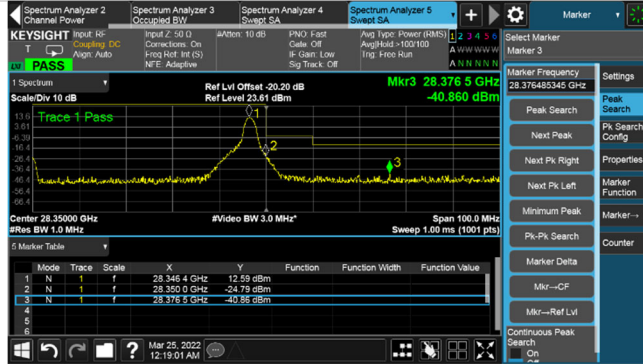


1RB65-Vertical Polarization

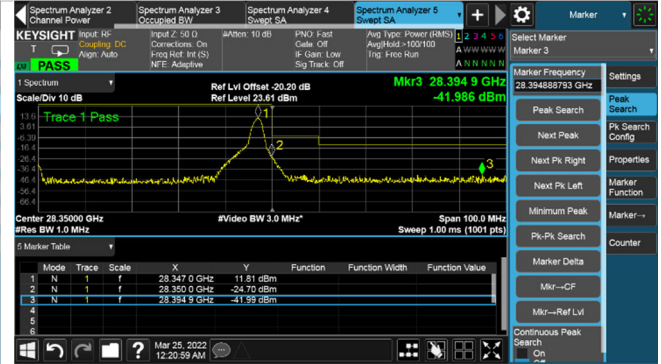


20RB46-Horizontal Polarization

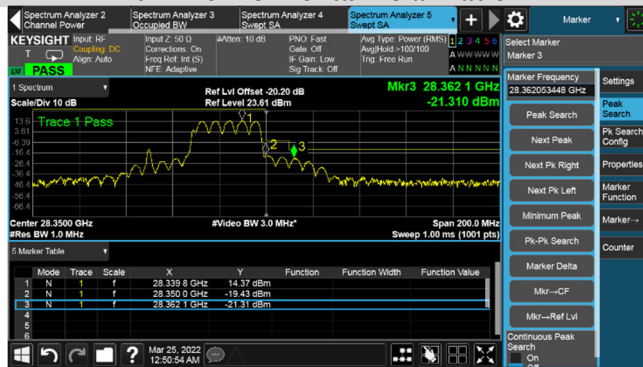


20RB46-Vertical Polarization

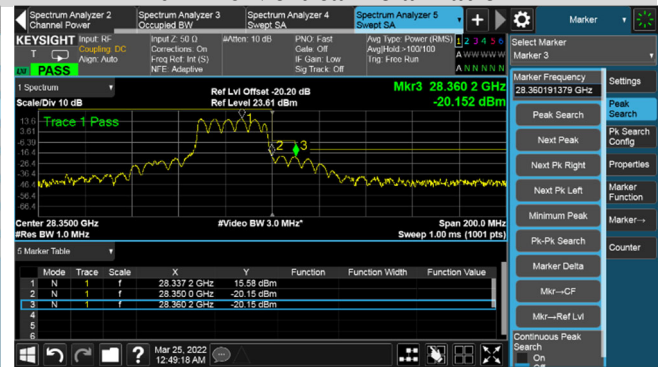

64RB2-Horizontal Polarization

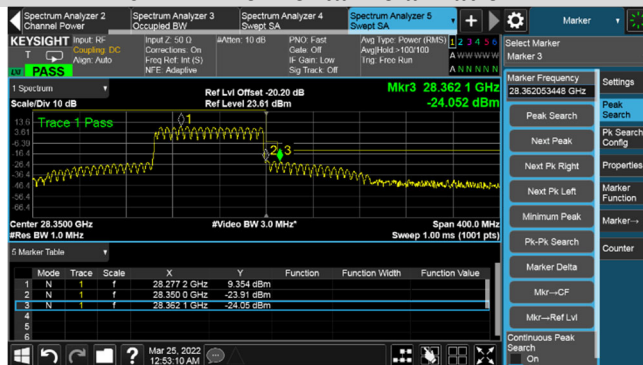

64RB2-Vertical Polarization

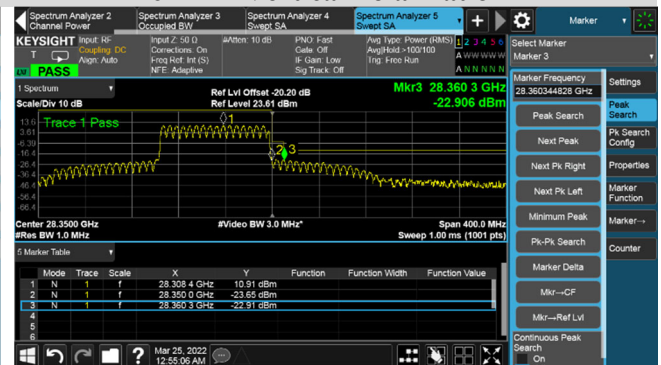

Lowest Band edge (n261-2CC-100 MHz)

Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
100	2	BPSK	Lowest	87	1RB0	27490-27500	H	-10.12	19.90	-30.02	-5	-24.92
							V	-10.02	19.90	-29.92		
					<=27490	H	-20.24	19.90	-40.14	-13	-27.14	
						V	-20.33	19.90	-40.23			
					20RB0	27490-27500	H	-21.84	19.90	-41.74	-5	-35.68
							V	-20.78	19.90	-40.68		
					<=27490	H	-24.87	19.90	-44.77	-13	-29.96	
						V	-23.06	19.90	-42.96			
					64RB0	27490-27500	H	-16.15	19.90	-36.05	-5	-31.05
							V	-16.95	19.90	-36.85		
					<=27490	H	-18.55	19.90	-38.45	-13	-25.08	
						V	-18.18	19.90	-38.08			
				343	1RB0	27490-27500	H	-10.76	19.90	-30.66	-5	-25.66
							V	-12.81	19.90	-32.71		
					<=27490	H	-20.58	19.90	-40.48	-13	-27.48	
						V	-20.82	19.90	-40.72			
					20RB0	27490-27500	H	-21.28	19.90	-41.18	-5	-35.93
							V	-21.03	19.90	-40.93		
					<=27490	H	-22.84	19.90	-42.74	-13	-29.65	
						V	-22.75	19.90	-42.65			
					64RB0	27490-27500	H	-16.31	19.90	-36.21	-5	-30.75
							V	-15.85	19.90	-35.75		
					<=27490	H	-17.58	19.90	-37.48	-13	-24.48	
						V	-17.87	19.90	-37.77			
87+343	1RB0	27490-27500	H	-12.48	19.90	-32.38	-5	-22.15				
			V	-7.25	19.90	-27.15						
	<=27490	H	-15.73	19.90	-35.63	-13	-22.63					
		V	-16.60	19.90	-36.50							
	20RB0	27490-27500	H	-16.46	19.90	-36.36	-5	-31.36				
			V	-18.54	19.90	-38.44						
	<=27490	H	-21.71	19.90	-41.61	-13	-27.09					
		V	-20.19	19.90	-40.09							
	64RB0	27490-27500	H	-10.39	19.90	-30.29	-5	-25.29				
			V	-10.85	19.90	-30.75						
	<=27490	H	-10.70	19.90	-30.60	-13	-17.33					
		V	-10.43	19.90	-30.33							