



Lowest Band edge: n261-BW:100MHz-2CC-BPSK-Beam ID 87


1RB0-Horizontal Polarization

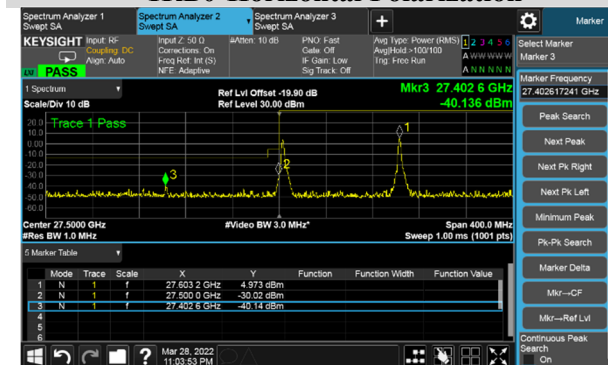


1RB0-Vertical Polarization

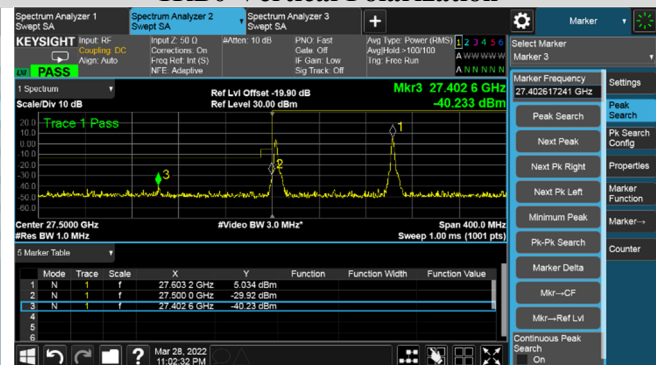


20RB0-Horizontal Polarization

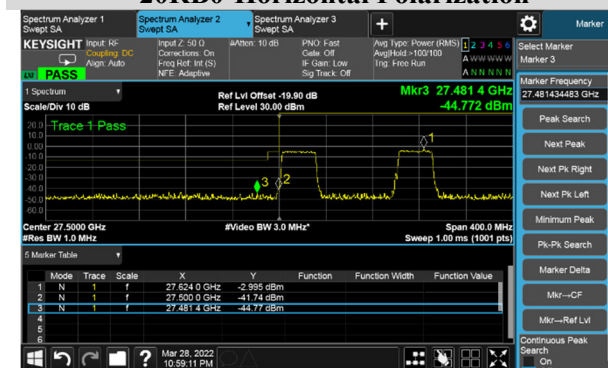


20RB0-Vertical Polarization

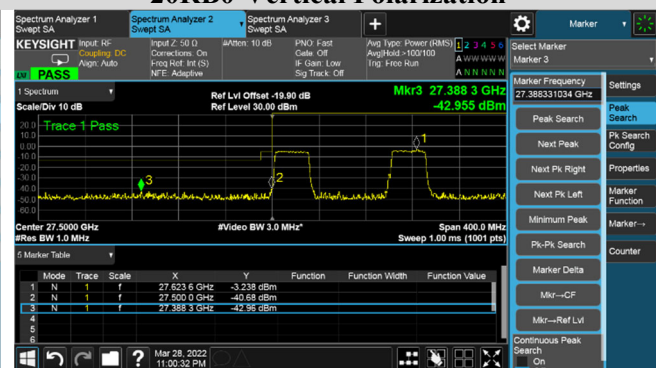

64RB0-Horizontal Polarization

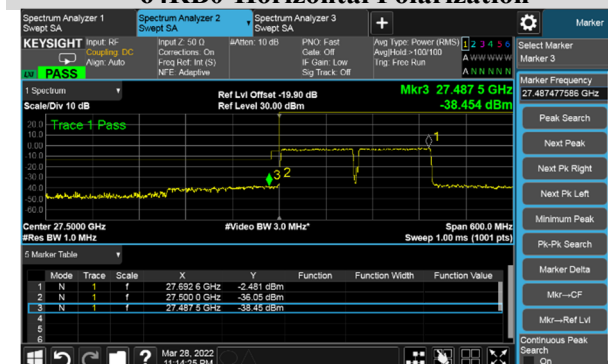


64RB0-Vertical Polarization

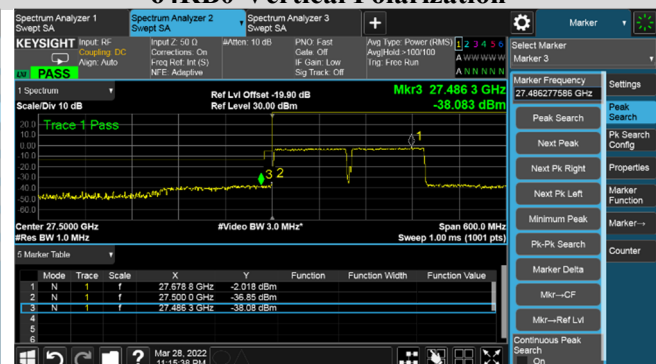


Lowest Band edge: n261-BW:100MHz-2CC-BPSK-Beam ID 343


1RB0-Horizontal Polarization

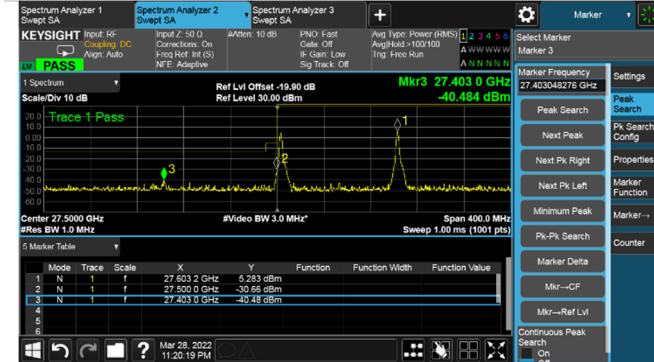


1RB0-Vertical Polarization

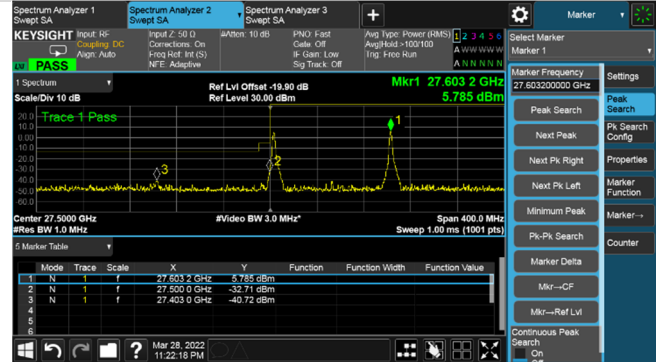


20RB0-Horizontal Polarization

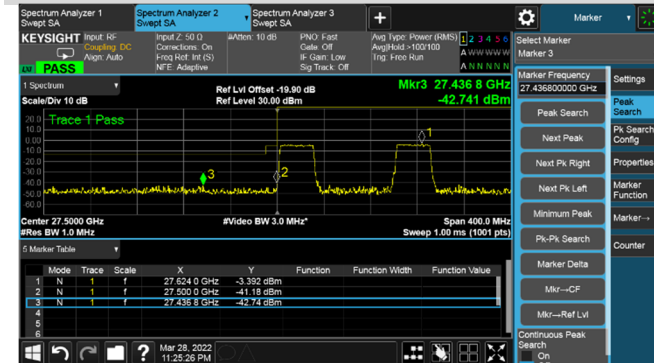


20RB0-Vertical Polarization

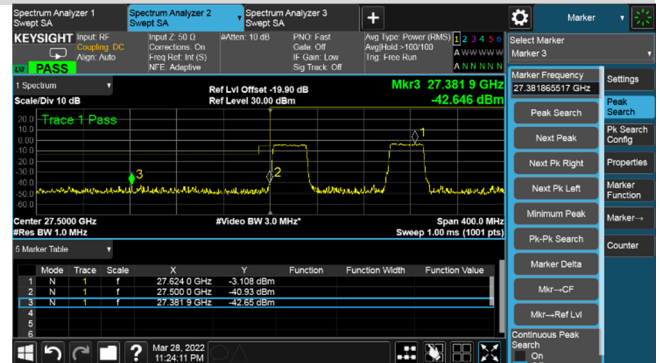

64RB0-Horizontal Polarization

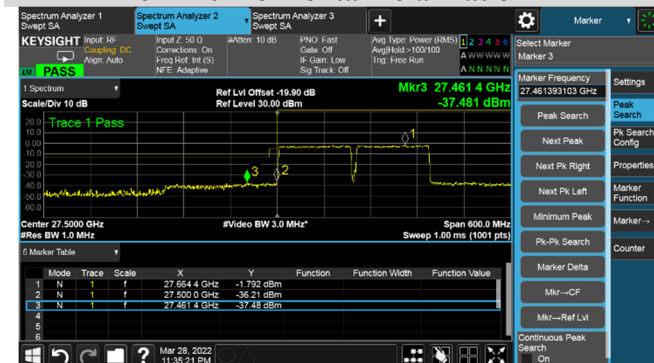


64RB0-Vertical Polarization

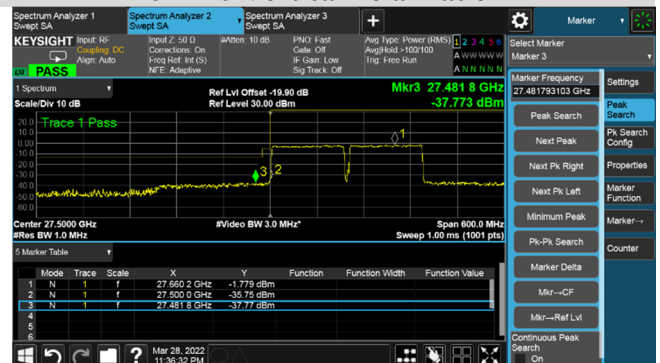


Lowest Band edge: n261-BW:100MHz-2CC-BPSK-Beam ID 87+343


1RB0-Horizontal Polarization

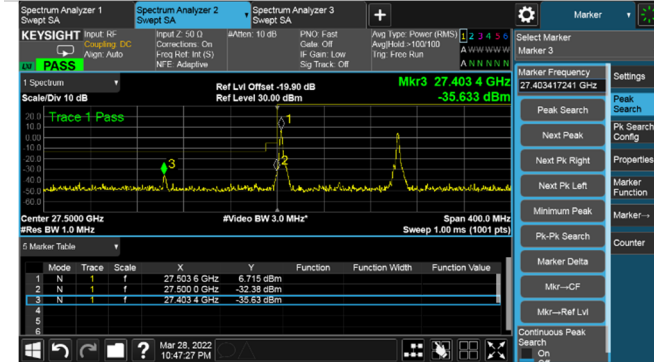


1RB0-Vertical Polarization

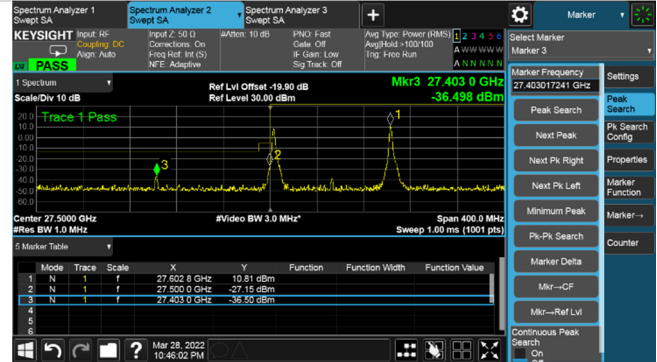


20RB0-Horizontal Polarization

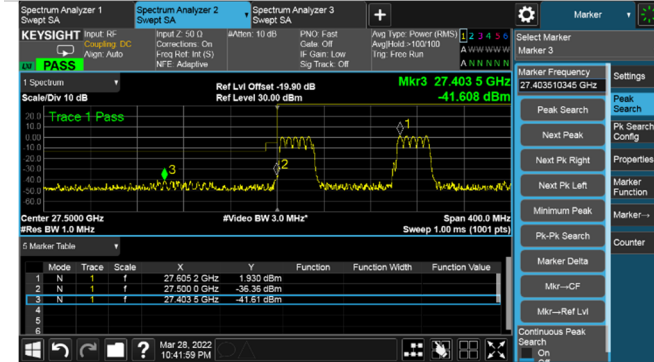


20RB0-Vertical Polarization

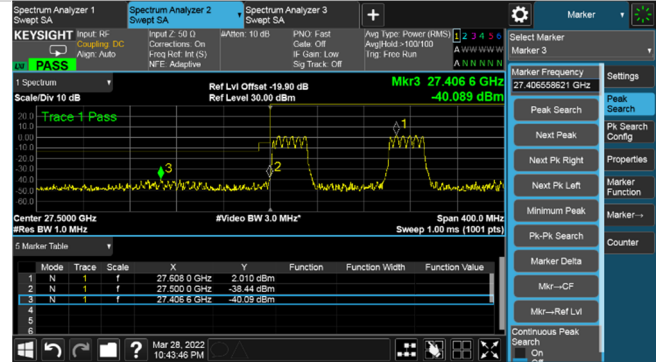

64RB0-Horizontal Polarization

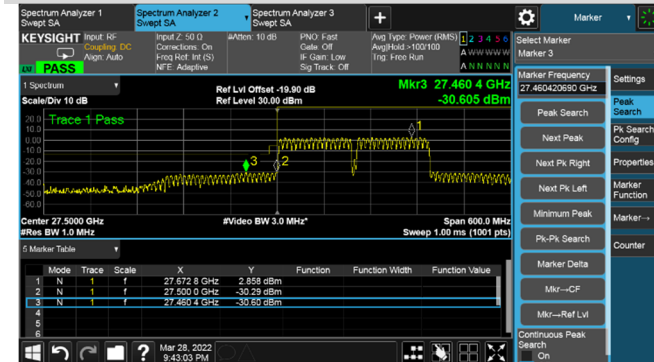

64RB0-Vertical Polarization

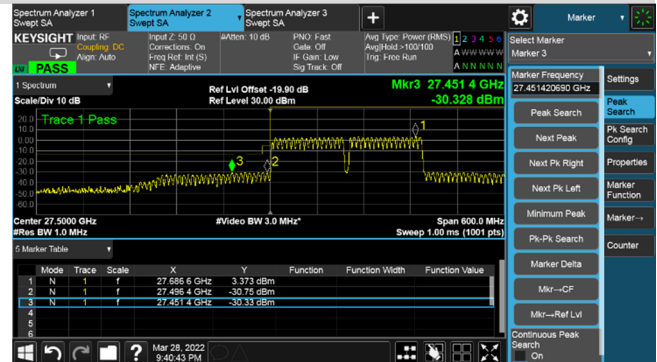

Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
100	2	QPSK	Lowest	87	1RB0	27490-27500	H	-11.16	19.90	-31.06	-5	-26.06
							V	-11.98	19.90	-31.88		
						<=27490	H	-20.58	19.90	-40.48	-13	-26.88
							V	-19.98	19.90	-39.88		
					20RB0	27490-27500	H	-19.20	19.90	-39.10	-5	-34.10
							V	-19.97	19.90	-39.87		
						<=27490	H	-22.27	19.90	-42.17	-13	-29.17
							V	-22.48	19.90	-42.38		
					64RB0	27490-27500	H	-15.35	19.90	-35.25	-5	-30.25
							V	-16.03	19.90	-35.93		
						<=27490	H	-16.97	19.90	-36.87	-13	-23.05
							V	-16.15	19.90	-36.05		
				343	1RB0	27490-27500	H	-10.93	19.90	-30.83	-5	-23.96
							V	-9.06	19.90	-28.96		
						<=27490	H	-19.01	19.90	-38.91	-13	-25.91
							V	-19.58	19.90	-39.48		
					20RB0	27490-27500	H	-17.02	19.90	-36.92	-5	-29.79
							V	-14.89	19.90	-34.79		
						<=27490	H	-23.11	19.90	-43.01	-13	-30.01
							V	-23.12	19.90	-43.02		
					64RB0	27490-27500	H	-15.65	19.90	-35.55	-5	-29.61
							V	-14.71	19.90	-34.61		
						<=27490	H	-16.84	19.90	-36.74	-13	-23.61
							V	-16.71	19.90	-36.61		
				87+343	1RB0	27490-27500	H	-10.46	19.90	-30.36	-5	-20.75
							V	-5.85	19.90	-25.75		
						<=27490	H	-15.28	19.90	-35.18	-13	-21.57
							V	-14.67	19.90	-34.57		
					20RB0	27490-27500	H	-14.50	19.90	-34.40	-5	-29.11
							V	-14.21	19.90	-34.11		
						<=27490	H	-19.34	19.90	-39.24	-13	-26.24
							V	-20.20	19.90	-40.10		
					64RB0	27490-27500	H	-11.18	19.90	-31.08	-5	-24.70
							V	-9.80	19.90	-29.70		
						<=27490	H	-9.57	19.90	-29.47	-13	-16.34
							V	-9.44	19.90	-29.34		