



Lowest Band edge: n261-BW:100MHz-2CC-QPSK-Beam ID 87


1RB0-Horizontal Polarization

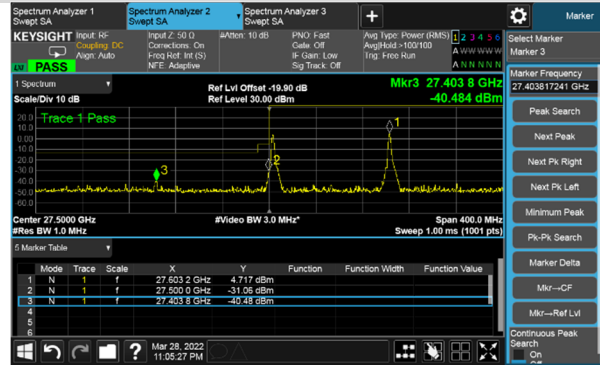


1RB0-Vertical Polarization

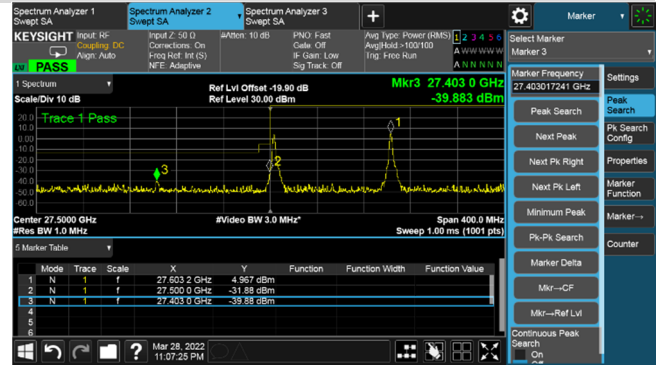


20RB0-Horizontal Polarization

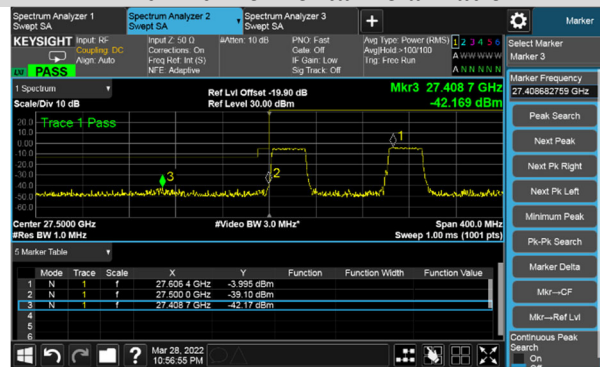


20RB0-Vertical Polarization

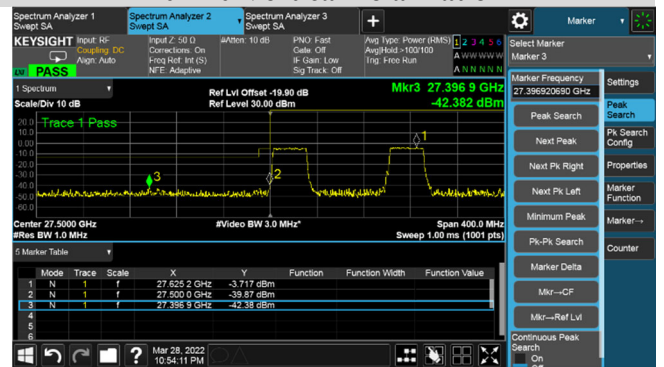

64RB0-Horizontal Polarization

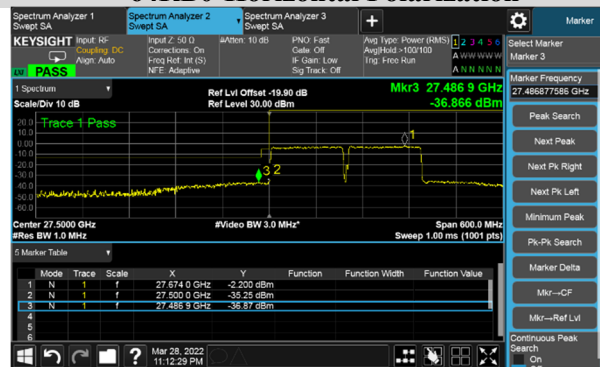


64RB0-Vertical Polarization

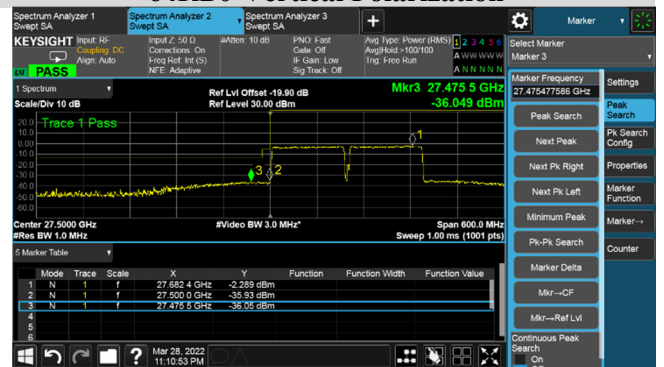


Lowest Band edge: n261-BW:100MHz-2CC-QPSK-Beam ID 343


1RB0-Horizontal Polarization

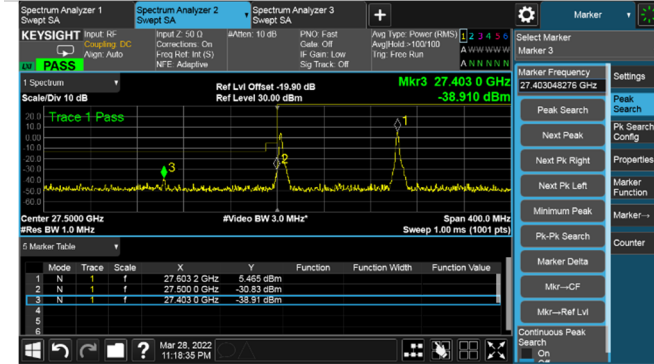


1RB0-Vertical Polarization

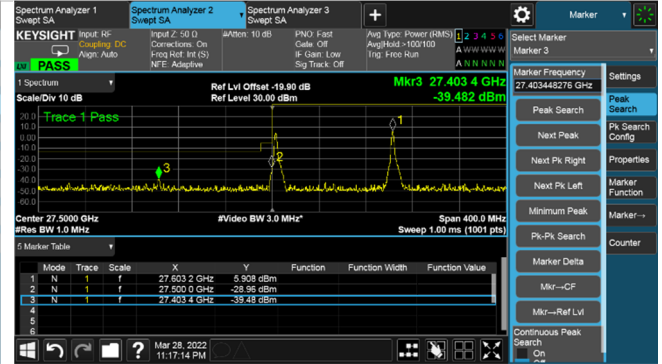


20RB0-Horizontal Polarization

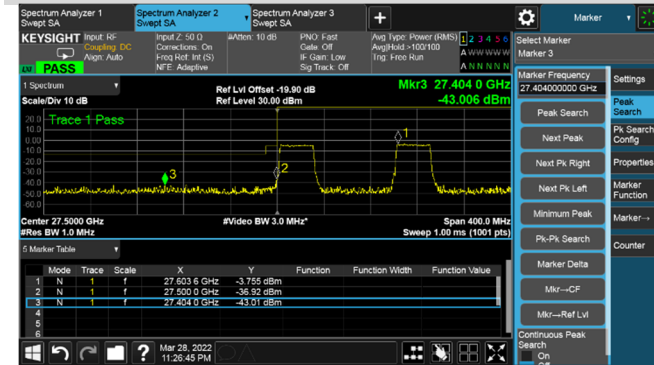


20RB0-Vertical Polarization

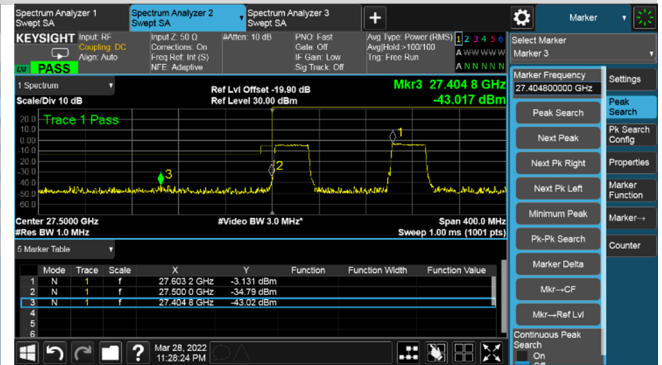

64RB0-Horizontal Polarization

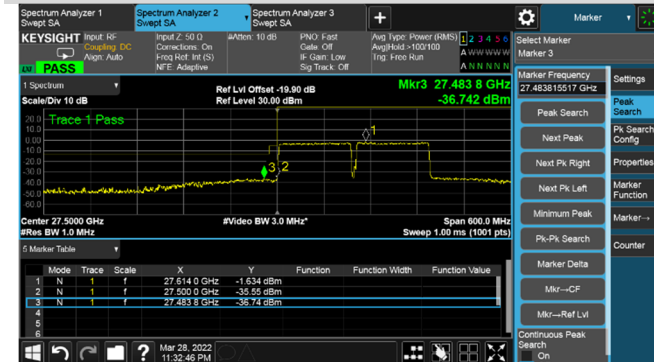


64RB0-Vertical Polarization

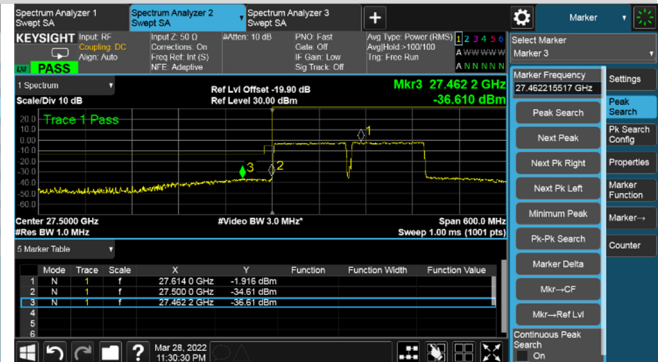


Lowest Band edge: n261-BW:100MHz-2CC-QPSK-Beam ID 87+343


1RB0-Horizontal Polarization

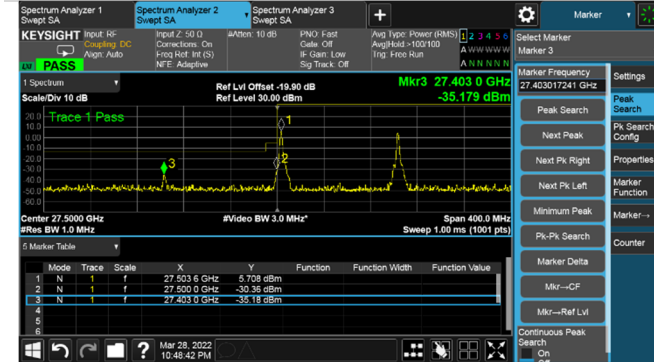


1RB0-Vertical Polarization

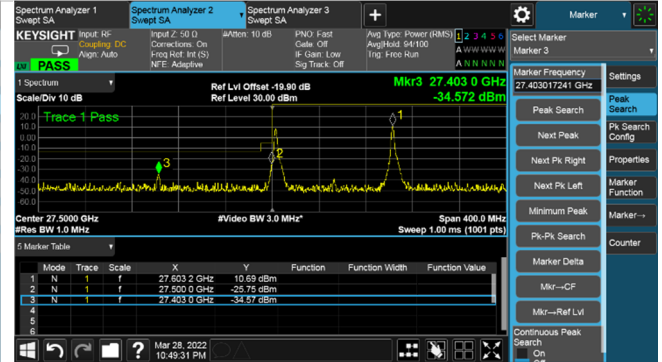


20RB0-Horizontal Polarization

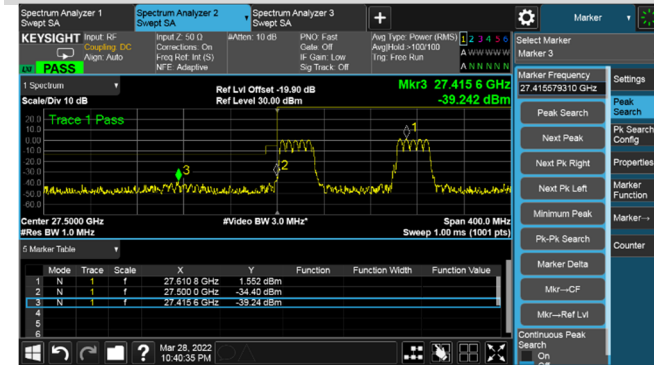


20RB0-Vertical Polarization

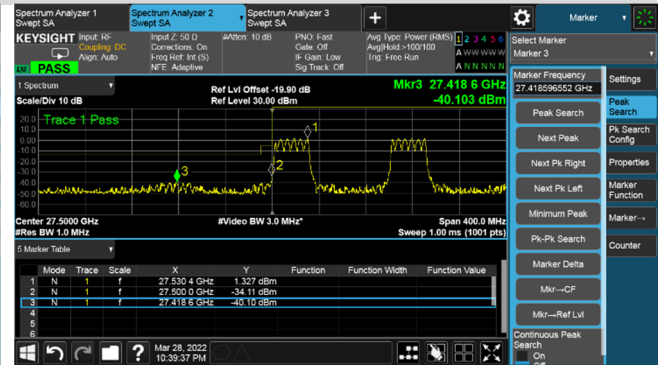

64RB0-Horizontal Polarization

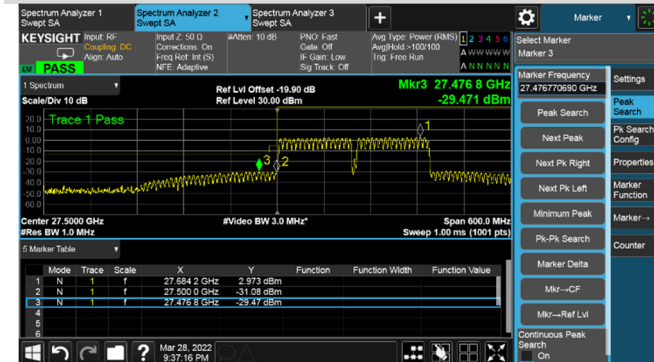

64RB0-Vertical Polarization

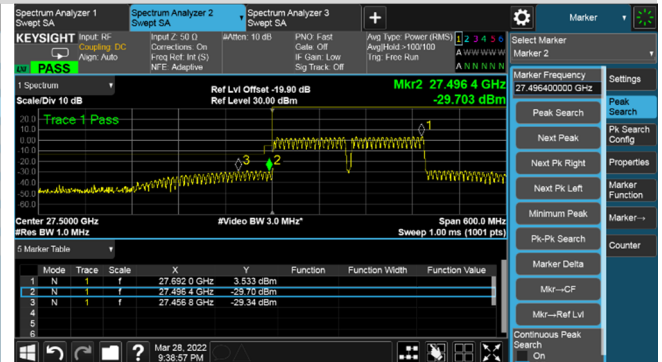

Highest Band edge (n261-2CC-100 MHz)

Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
100	2	BPSK	Highest	87	1RB65	28350-28360	H	-11.72	20.2	-31.92	-5	-26.02
							V	-10.82	20.2	-31.02		
						>=28360	H	-19.53	20.2	-39.73	-13	-25.39
							V	-18.19	20.2	-38.39		
					20RB46	28350-28360	H	-23.32	20.2	-43.52	-5	-35.28
							V	-20.08	20.2	-40.28		
						>=28360	H	-19.98	20.2	-40.18	-13	-27.18
							V	-21.53	20.2	-41.73		
					64RB2	28350-28360	H	-16.15	20.2	-36.35	-5	-30.17
							V	-14.97	20.2	-35.17		
						>=28360	H	-18.31	20.2	-38.51	-13	-24.44
							V	-17.24	20.2	-37.44		
				343	1RB65	28350-28360	H	-11.10	20.2	-31.30	-5	-24.14
							V	-8.94	20.2	-29.14		
						>=28360	H	-20.23	20.2	-40.43	-13	-26.38
							V	-19.18	20.2	-39.38		
					20RB46	28350-28360	H	-20.11	20.2	-40.31	-5	-33.33
							V	-18.13	20.2	-38.33		
						>=28360	H	-20.86	20.2	-41.06	-13	-28.06
							V	-21.51	20.2	-41.71		
					64RB2	28350-28360	H	-16.19	20.2	-36.39	-5	-30.97
							V	-15.77	20.2	-35.97		
						>=28360	H	-18.95	20.2	-39.15	-13	-25.83
							V	-18.63	20.2	-38.83		
87+343	1RB65	28350-28360	H	-12.74	20.2	-32.94	-5	-21.68				
			V	-6.48	20.2	-26.68						
		>=28360	H	-15.54	20.2	-35.74	-13	-21.11				
			V	-13.91	20.2	-34.11						
	20RB46	28350-28360	H	-19.26	20.2	-39.46	-5	-28.31				
			V	-13.11	20.2	-33.31						
		>=28360	H	-20.23	20.2	-40.43	-13	-25.75				
			V	-18.55	20.2	-38.75						
	30RB2	28350-28360	H	-10.80	20.2	-31.00	-5	-25.59				
			V	-10.39	20.2	-30.59						
		>=28360	H	-13.17	20.2	-33.37	-13	-18.94				
			V	-11.74	20.2	-31.94						