



Highest Band edge: n261-BW:100MHz-2CC-BPSK-Beam ID 87


1RB65-Horizontal Polarization

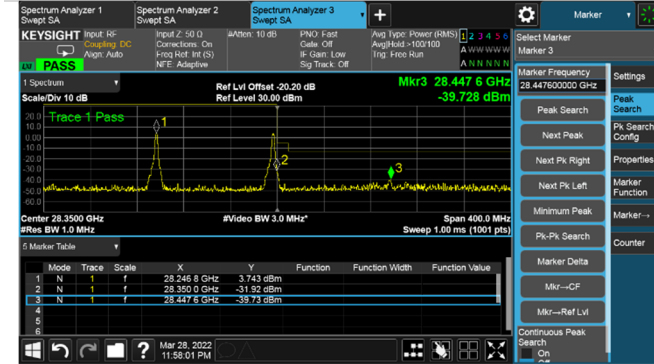


1RB65-Vertical Polarization

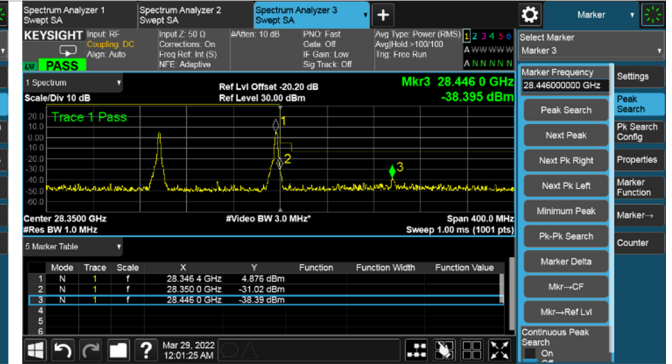


20RB46-Horizontal Polarization

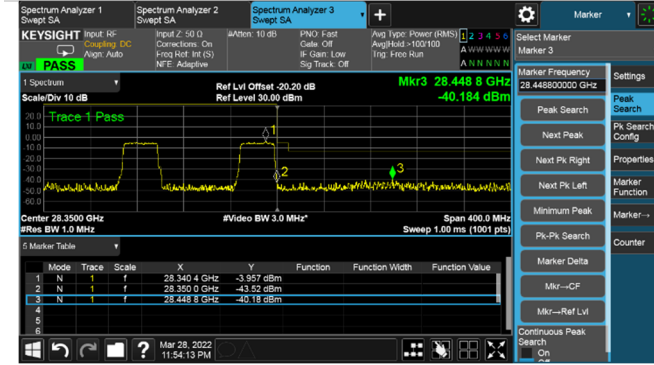


20RB46-Vertical Polarization

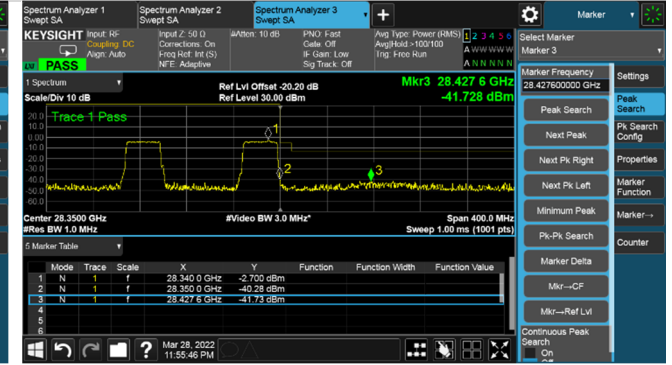

64RB2-Horizontal Polarization

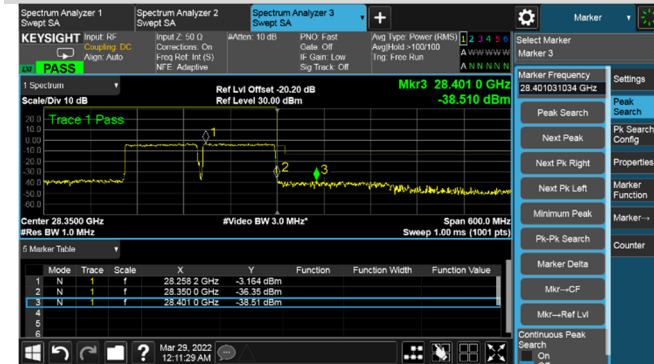


64RB2-Vertical Polarization

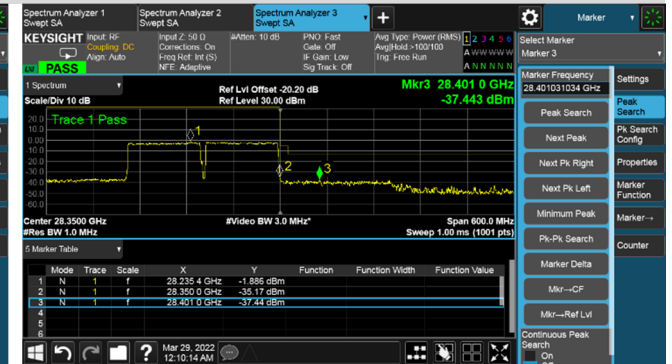


Highest Band edge: n261-BW:100MHz-2CC-BPSK-Beam ID 343


1RB65-Horizontal Polarization

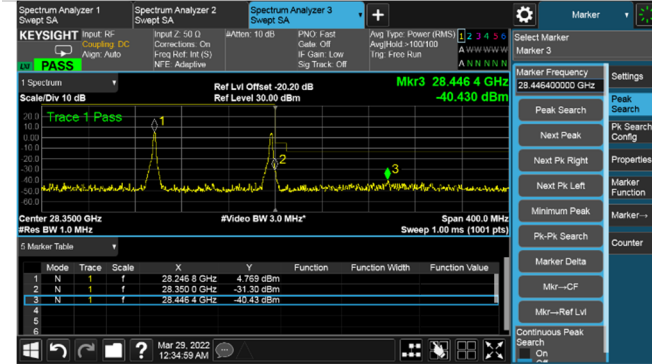


1RB65-Vertical Polarization

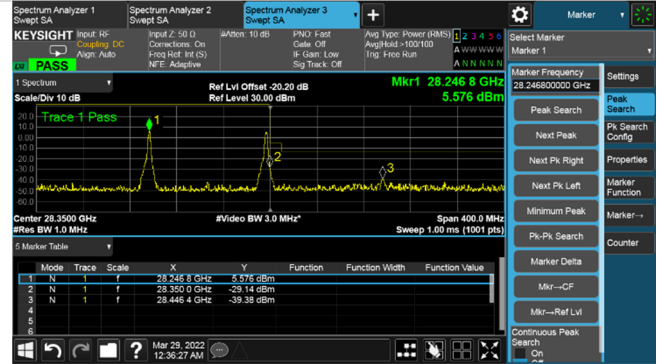


20RB46-Horizontal Polarization

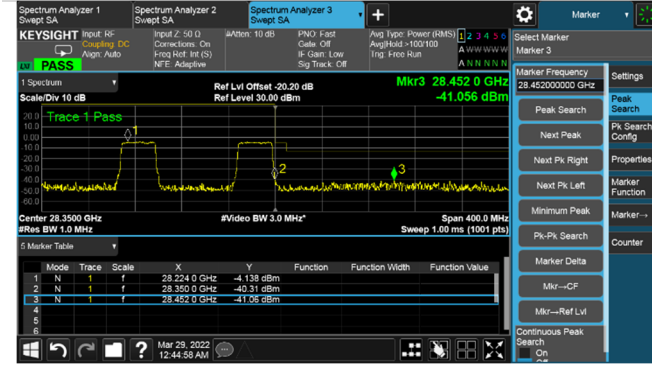


20RB46-Vertical Polarization

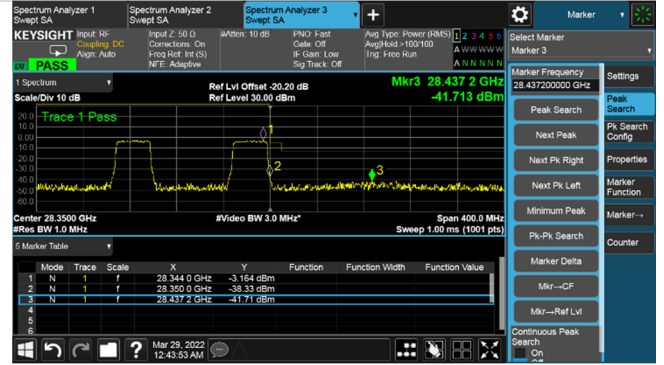

64RB2-Horizontal Polarization

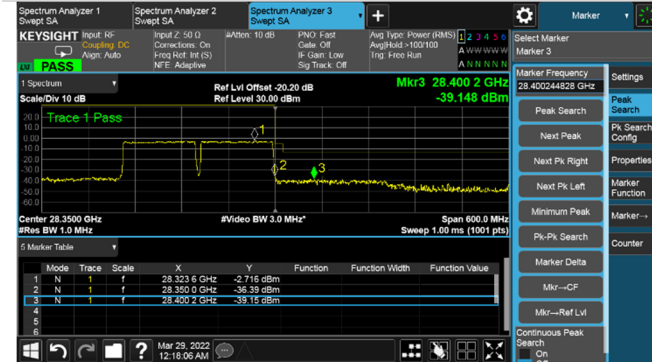


64RB2-Vertical Polarization

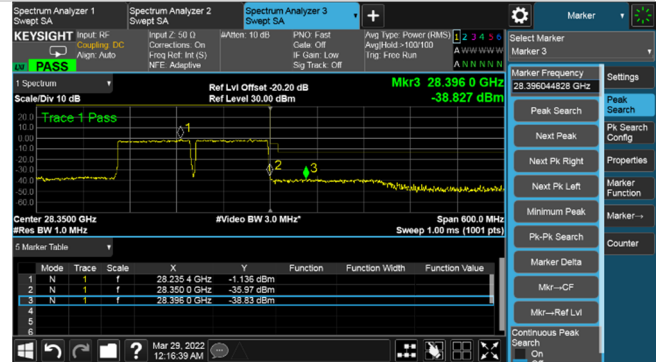


Highest Band edge: n261-BW:100MHz-2CC-BPSK-Beam ID 87+343


1RB65-Horizontal Polarization

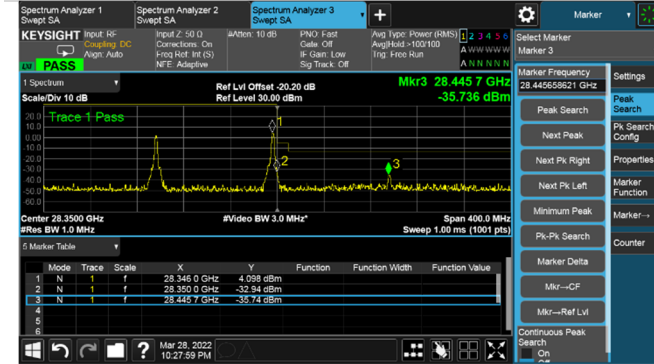


1RB65-Vertical Polarization

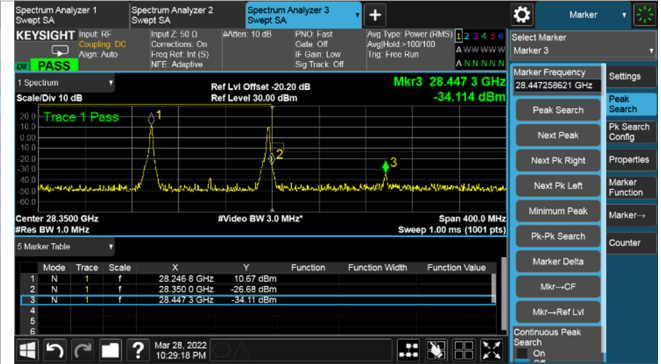


20RB46-Horizontal Polarization

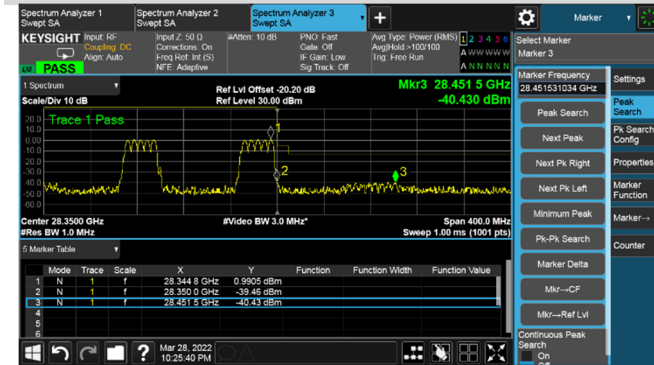


20RB46-Vertical Polarization

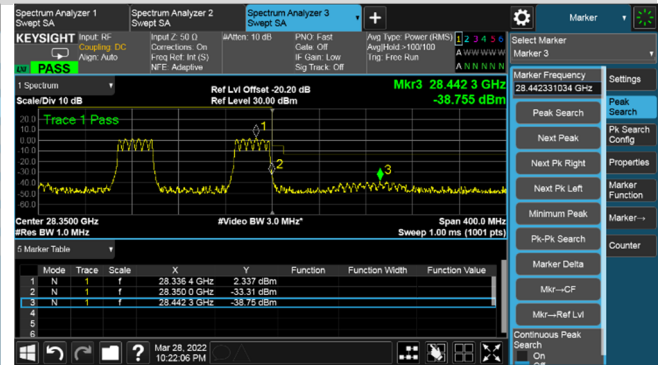

64RB2-Horizontal Polarization

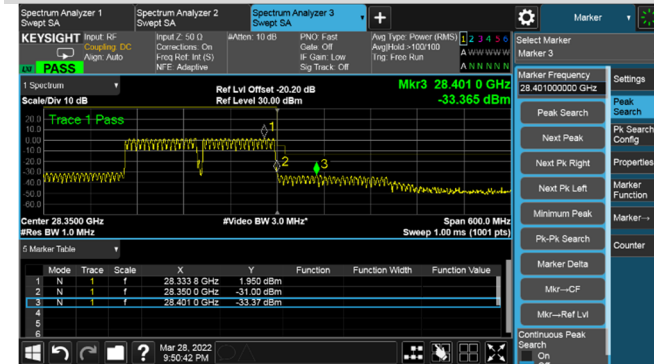

64RB2-Vertical Polarization

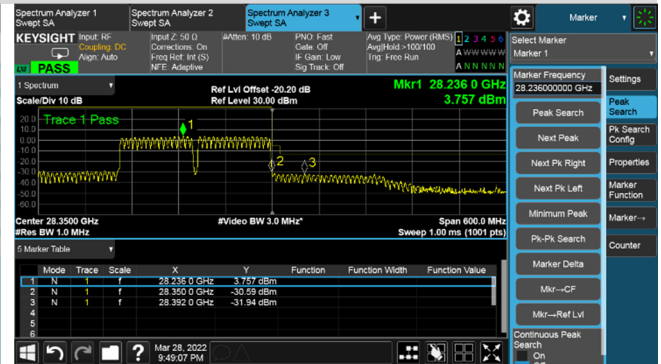

Bandwidth (MHz)	CC	Modulation	Band edge	Beam ID	Resource block (RB)	Frequency Range (MHz)	Ant. Pol. (H/V)	EIRP (dBm)	Array Gain (dBi)	Conductive Power (dBm)	Limit (dBm)	Margin (dB)
100	2	QPSK	Highest	87	1RB65	28350-28360	H	-14.11	20.2	-34.31	-5	-26.90
							V	-11.70	20.2	-31.90		
					>=28360	H	-18.69	20.2	-38.89	-13	-24.35	
						V	-17.15	20.2	-37.35			
					20RB46	28350-28360	H	-19.54	20.2	-39.74	-5	-33.64
							V	-18.44	20.2	-38.64		
					>=28360	H	-20.01	20.2	-40.21	-13	-27.21	
						V	-20.87	20.2	-41.07			
					64RB2	28350-28360	H	-15.28	20.2	-35.48	-5	-29.87
							V	-14.67	20.2	-34.87		
					>=28360	H	-17.46	20.2	-37.66	-13	-23.58	
						V	-16.38	20.2	-36.58			
				343	1RB65	28350-28360	H	-12.61	20.2	-32.81	-5	-25.00
							V	-9.80	20.2	-30.00		
					>=28360	H	-18.62	20.2	-38.82	-13	-23.91	
						V	-16.71	20.2	-36.91			
					20RB46	28350-28360	H	-19.24	20.2	-39.44	-5	-34.44
							V	-20.71	20.2	-40.91		
					>=28360	H	-21.64	20.2	-41.84	-13	-27.68	
						V	-20.48	20.2	-40.68			
					64RB2	28350-28360	H	-16.41	20.2	-36.61	-5	-30.01
							V	-14.81	20.2	-35.01		
					>=28360	H	-17.37	20.2	-37.57	-13	-23.61	
						V	-16.41	20.2	-36.61			
87+343	1RB65	28350-28360	H	-12.55	20.2	-32.75	-5	-21.68				
			V	-6.48	20.2	-26.68						
	>=28360	H	-15.72	20.2	-35.92	-13	-19.90					
		V	-12.70	20.2	-32.90							
	20RB46	28350-28360	H	-18.56	20.2	-38.76	-5	-27.95				
			V	-12.75	20.2	-32.95						
	>=28360	H	-19.06	20.2	-39.26	-13	-25.19					
		V	-17.99	20.2	-38.19							
	30RB2	28350-28360	H	-11.63	20.2	-31.83	-5	-26.60				
			V	-11.40	20.2	-31.60						
	>=28360	H	-11.26	20.2	-31.46	-13	-16.90					
		V	-9.70	20.2	-29.90							