

FCC Test Report (U-NII-2C Band)

Report No.: RF190319E02B

FCC ID: NKR-LVSK-IDU

Test Model: LVSKIDU

Received Date: May 05, 2019

Test Date: May 05 to 28, 2019

Issued Date: July 01, 2019

Applicant: Wistron NeWeb Corp.

Address: 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan R.O.C.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification. The report must not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.

Table of Contents

Release Control Record	4
1 Certificate of Conformity.....	5
2 Summary of Test Results.....	6
2.1 Measurement Uncertainty	6
2.2 Modification Record	6
3 General Information.....	7
3.1 General Description of EUT (U-NII-2C Band)	7
3.2 Description of Test Modes	10
3.2.1 Test Mode Applicability and Tested Channel Detail.....	11
3.3 Duty Cycle of Test Signal	13
3.4 Description of Support Units	15
3.4.1 Configuration of System under Test	16
3.5 General Description of Applied Standard.....	17
4 Test Types and Results	18
4.1 Radiated Emission and Bandedge Measurement.....	18
4.1.1 Limits of Radiated Emission and Bandedge Measurement	18
4.1.2 Test Instruments	19
4.1.3 Test Procedure	21
4.1.4 Deviation from Test Standard	21
4.1.5 Test Setup.....	22
4.1.6 EUT Operating Condition	23
4.1.7 Test Results	24
4.2 Conducted Emission Measurement	41
4.2.1 Limits of Conducted Emission Measurement	41
4.2.2 Test Instruments	41
4.2.3 Test Procedure	42
4.2.4 Deviation from Test Standard	42
4.2.5 Test Setup.....	42
4.2.6 EUT Operating Condition	42
4.2.7 Test Results	43
4.3 Transmit Power Measurement	45
4.3.1 Limits of Transmit Power Measurement	45
4.3.2 Test Setup.....	46
4.3.3 Test Instruments	46
4.3.4 Test Procedure	46
4.3.5 Deviation from Test Standard	47
4.3.6 EUT Operating Condition	47
4.3.7 Test Results	48
4.4 Occupied Bandwidth Measurement	63
4.4.1 Test Setup.....	63
4.4.2 Test Instruments	63
4.4.3 Test Procedure	63
4.4.4 Test Results	64
4.5 Peak Power Spectral Density Measurement	66
4.5.1 Limits of Peak Power Spectral Density Measurement	66
4.5.2 Test Setup.....	66
4.5.3 Test Instruments	66
4.5.4 Test Procedure	66
4.5.5 Deviation from Test Standard	67
4.5.6 EUT Operating Condition	67
4.5.7 Test Results	68
4.6 Frequency Stability Measurement	77
4.6.1 Limits of Frequency Stability Measurement	77

4.6.2 Test Setup.....	77
4.6.3 Test Instruments	77
4.6.4 Test Procedure	77
4.6.5 Deviation from Test Standard	77
4.6.6 EUT Operating Condition	77
4.6.7 Test Results	78
4.7 6dB Bandwidth Measurement.....	79
4.7.1 Limits of 6dB Bandwidth Measurement.....	79
4.7.2 Test Setup.....	79
4.7.3 Test Instruments	79
4.7.4 Test Procedure	79
4.7.5 Deviation from Test Standard	79
4.7.6 EUT Operating Condition	79
4.7.7 Test Results	80
5 Pictures of Test Arrangements.....	82
Appendix – Information of the Testing Laboratories	83

Release Control Record

Issue No.	Description	Date Issued
RF190319E02B	Original release.	July 01, 2019

1 Certificate of Conformity

Product: LVSKIDU

Brand: WNC

Test Model: LVSKIDU

Sample Status: ENGINEERING SAMPLE

Applicant: Wistron NeWeb Corp.

Test Date: May 05 to 28, 2019

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)

ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Phoenix Huang, **Date:** July 01, 2019

Phoenix Huang / Specialist

Approved by : May Chen, **Date:** July 01, 2019

May Chen / Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -24.59dB at 0.40000MHz.
15.407(b) (1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -1.6dB at 8180.00MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	Pass	Meet the requirement of limit.
---	Occupied Bandwidth Measurement	-	Reference only.
15.407(a)(1/2/3)	Peak Power Spectral Density	Pass	Meet the requirement of limit.
15.407(e)	6dB bandwidth	Pass	Meet the requirement of limit. (U-NII-3 Band only)
15.407(g)	Frequency Stability	Pass	Meet the requirement of limit.
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

*For U-NII-3 band compliance with rule part 15.407(b)(4)(i), the OOB test plots were recorded in Annex A.

Note:

Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (±)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.8 dB
Radiated Emissions up to 1 GHz	30MHz ~ 1GHz	4.9 dB
Radiated Emissions above 1 GHz	1GHz ~ 6GHz	5.1 dB
	6GHz ~ 18GHz	4.9 dB
	18GHz ~ 40GHz	5.2 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT (U-NII-2C Band)

Product	LVSKIDU
Brand	WNC
Test Model	LVSKIDU
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from power adapter
Modulation Type	64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	OFDM, OFDMA
Transfer Rate	802.11a: up to 54Mbps 802.11n: up to 600Mbps 802.11ac: up to 1733.3Mbps 802.11ax: up to 2401.9Mbps
Operating Frequency	5.50 ~ 5.72GHz
Number of Channel	802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20): 12 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40): 6 802.11ac (VHT80), 802.11ax (HE80): 3
Output Power	Non-Beamforming Mode: 248.291mW Beamforming Mode: 248.291mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	Refer to Note
Data Cable Supplied	NA

Note:

1. This report is prepared for FCC class II change. The difference compared with the Report No.: RF190319E02 as the following:
 - ◆ Add U-NII-2C band <5470~5725MHz>
2. According to above condition, all of test items need to be performed of U-NII-2C band. And all data was verified to meet the requirements.

3. The associated devices of EUT information are as below:

For LVS KIDU				
No.	Product	Brand	Model No.	Remark
1	Adapter	DELTA	ADP-48GR B	Input: 100-240Vac, 1A, 50-60Hz AC input cable: Unshielded, 1.7m Output: 12Vdc, 4A DC output cable: Unshielded, 2.9m
2	Battery Cradle	WNC	LVS KCR A	Battery Cradle Input: 12Vdc, 4A Battery Cradle Include Battery Battery Output: 3.6Vdc, 3450mAh, 12.42Wh

For LVS KODU					
No.	Product	Brand	Model No.	FCC ID	Remark
3	LVS KODU	WNC	LVS KODU	NKR-LVS K-ODU	USB Cable (0.38m), shielded
4	LVP KROU	WNC	LVP K	-	Input: 56Vdc, 1.1A (power from POE Adapter)
5	POE Adapter	DELTA	ADP-60HR B	-	AC Input: 100-240V, 2.0A, 50-60Hz DC Output: 56Vdc, 1.1A AC input cable: Unshielded, 1.7m
6	Surge protection box	CITEL	CRMJ8-POE-C6	-	Metal case
7	Surge protection box	CITEL	CRMJ8-POE-C6/WNC	-	Plastic case

4. The antennas provided to the EUT, please refer to the following table:

Frequency (MHz)	5500	5600	5700	5745	5785	5825	Antenna Type	Antenna Connector
	Directional Antenna Gain (dBi)							
Vertical-Pol	XZ	4.27	XZ	4.27	XZ	4.47	XZ	4.69
	YZ	3.35	YZ	2.70	YZ	2.73	YZ	2.93
	XY	3.24	XY	3.58	XY	4.02	XY	4.12
Horizontal-pol	XZ	4.53	XZ	4.44	XZ	4.34	XZ	4.41
	YZ	2.19	YZ	1.56	YZ	1.39	YZ	1.24
	XY	4.47	XY	4.82	XY	4.89	XY	4.94
							XY	5.09

Note: More detailed information, please refer to operating description.

5. The EUT was pre-tested under the following modes:

For Radiated Emission test	
Pre-test Mode	Description
Mode A	Power from adapter
Mode B	Power from Battery Cradle (Battery mode)
Mode C	Power from Battery Cradle (Adapter mode)
In original report, from the above modes, the worst case was found in Mode A . Therefore only the test data of the mode was recorded in this report.	
For AC Power Conducted Emission test	
Pre-test Mode	Description
Mode D	Power from adapter
Mode E	Power from Battery Cradle (Adapter mode)
In original report, from the above modes, the worst case was found in Mode D . Therefore only the test data of the mode was recorded in this report.	

6. The EUT incorporates a MIMO function:

MODULATION MODE	TX & RX CONFIGURATION	
802.11a	4TX	4RX
802.11n (HT20)	4TX	4RX
802.11n (HT40)	4TX	4RX
802.11ac (VHT20)	4TX	4RX
802.11ac (VHT40)	4TX	4RX
802.11ac (VHT80)	4TX	4RX
802.11ax (HE20)	4TX	4RX
802.11ax (HE40)	4TX	4RX
802.11ax (HE80)	4TX	4RX

Note:

1. All of modulation mode support beamforming function except 802.11a modulation mode.
2. The EUT support Beamforming and non-beamforming mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), therefore investigated worst case to representative mode in test report. (Final test mode refer section 3.2.1)

7. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Description of Test Modes

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To				Description
	RE≥1G	RE<1G	PLC	APCM	
-	√	√	√	√	-

Where **RE≥1G:** Radiated Emission above 1GHz **RE<1G:** Radiated Emission below 1GHz
PLC: Power Line Conducted Emission **APCM:** Antenna Port Conducted Measurement

Radiated Emission Test (Above 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	BPSK	6Mb/s
802.11ax (HE20)		100 to 144	100, 116, 140, 144	OFDMA	BPSK	MCS0
802.11ax (HE40)		102 to 142	102, 110, 134, 142	OFDMA	BPSK	MCS0
802.11ax (HE80)		106 to 138	106, 122, 138	OFDMA	BPSK	MCS0

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE80)	5500-5720,	106 to 138	122	OFDMA	BPSK	MCS0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE80)	5500-5720,	106 to 138	122	OFDMA	BPSK	MCS0

Antenna Port Conducted Measurement:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below. (802.11ac modulation mode test only for Power and power density test items)

Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11a	5500-5720	100 to 144	100, 116, 140, 144	OFDM	BPSK	6Mb/s
802.11ac (VHT20)		100 to 144	100, 116, 140, 144	OFDM	BPSK	MCS0
802.11ac (VHT40)		102 to 142	102, 110, 134, 142	OFDM	BPSK	MCS0
802.11ac (VHT80)		106 to 138	106, 122, 138	OFDM	BPSK	MCS0
802.11ax (HE20)		100 to 144	100, 116, 140, 144	OFDMA	BPSK	MCS0
802.11ax (HE40)		102 to 142	102, 110, 134, 142	OFDMA	BPSK	MCS0
802.11ax (HE80)		106 to 138	106, 122, 138	OFDMA	BPSK	MCS0
Beamforming Mode (output power only)						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ac (VHT20)	5500-5720	100 to 144	100, 116, 140, 144	OFDM	BPSK	MCS0
802.11ac (VHT40)		102 to 142	102, 110, 134, 142	OFDM	BPSK	MCS0
802.11ac (VHT80)		106 to 138	106, 122, 138	OFDM	BPSK	MCS0
802.11ax (HE20)		100 to 144	100, 116, 140, 144	OFDMA	BPSK	MCS0
802.11ax (HE40)		102 to 142	102, 110, 134, 142	OFDMA	BPSK	MCS0
802.11ax (HE80)		106 to 138	106, 122, 138	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Andy Ho
RE<1G	21deg. C, 70%RH	120Vac, 60Hz	Ryan Chen
PLC	25deg. C, 75%RH	120Vac, 60Hz	Andy Ho
APCM	25deg. C, 60%RH	120Vac, 60Hz	Anderson Chen

3.3 Duty Cycle of Test Signal


Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11a: Duty cycle = 1.426 ms/1.784 ms = 0.799, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.97$

802.11ac (VHT20): Duty cycle = 5.402 ms/5.747 ms = 0.94, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.27$

802.11ac (VHT40): Duty cycle = 5.413 ms/5.733 ms = 0.944, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.25$

802.11ac (VHT80): Duty cycle = 5.423 ms/5.643 ms = 0.961, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.17$

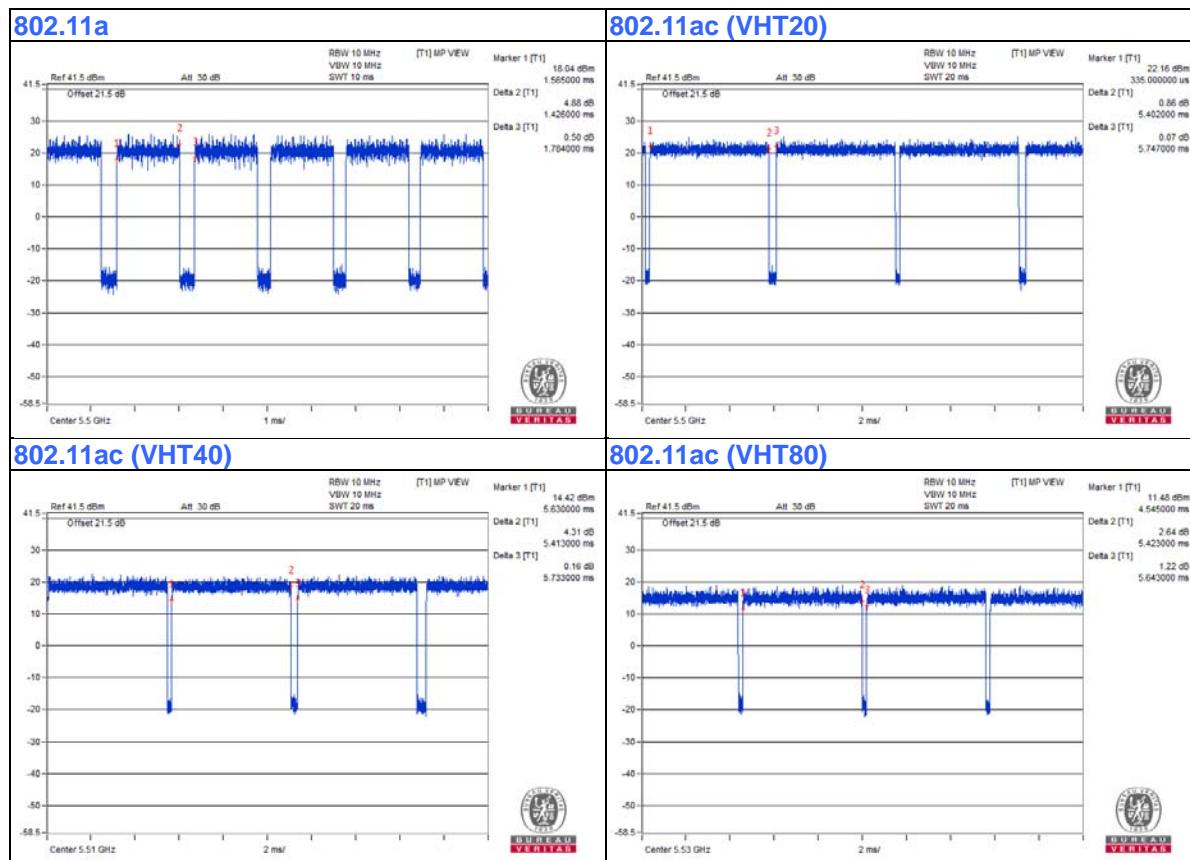


Duty cycle of test signal is < 98%, duty factor shall be considered.

802.11ax (HE20): Duty cycle = 5.441 ms/5.721 ms = 0.951, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.22$


802.11ax (HE40): Duty cycle = 5.431 ms/5.708 ms = 0.951, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.22$

802.11ax (HE80): Duty cycle = 5.437 ms/5.672 ms = 0.959, Duty factor = $10 * \log(1/\text{Duty cycle}) = 0.18$


802.11ax (HE20)

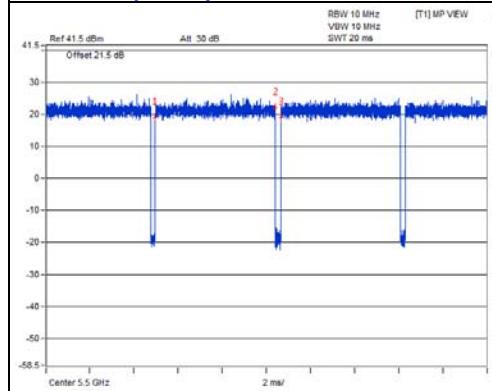

802.11ax (HE40)

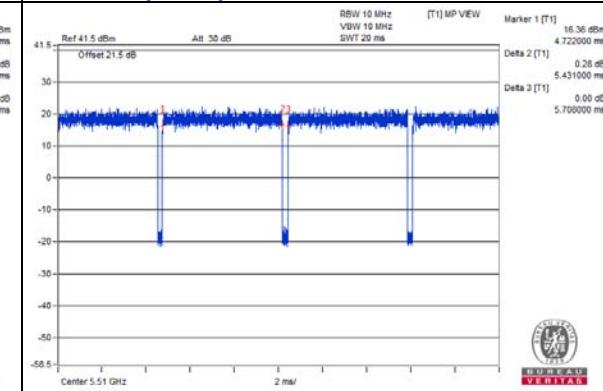

802.11ax (HE80)

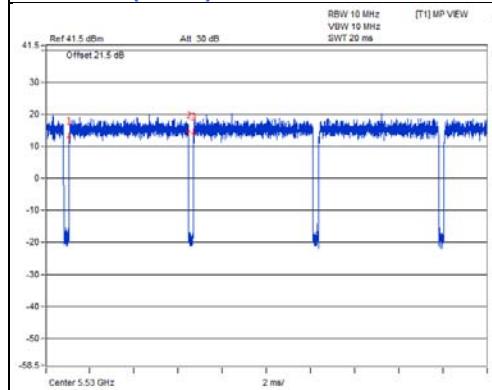

3.4 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	DELL	E6420	B92T3R1	FCC DoC	Provided by Lab

Note:

1. All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	AC Cable	1	1.7	No	0	Supplied by client
2.	DC Cable	1	2.9	No	0	Supplied by client
3.	RJ-45 Cable	1	10	No	0	Provided by Lab
4.	USB Type C Cable	1	0.4	No	0	Supplied by client
5.	GND Cable	1	3	No	0	Provided by Lab

3.4.1 Configuration of System under Test

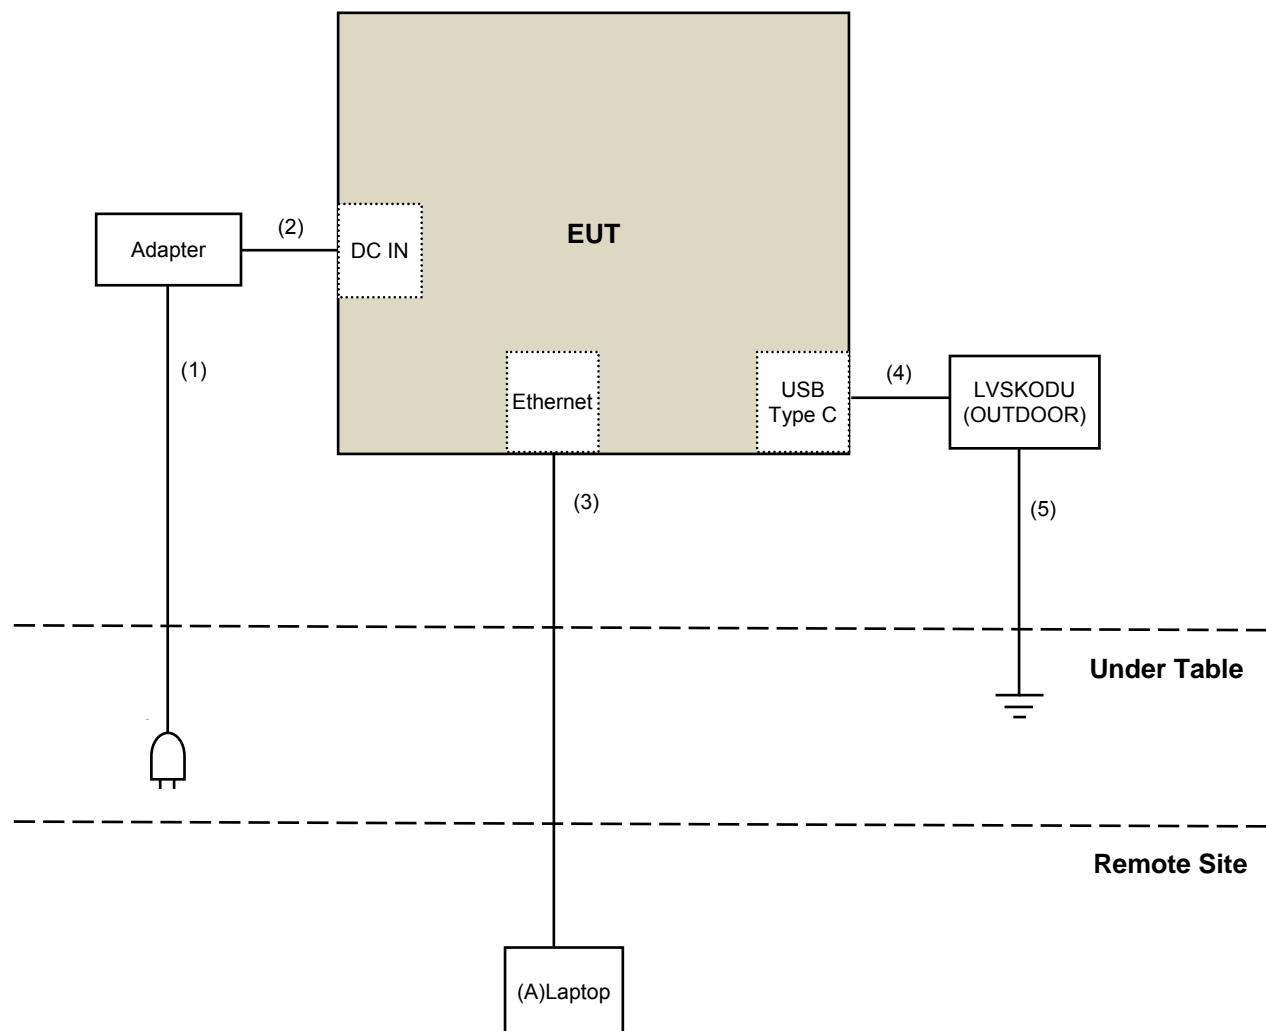

3.5 General Description of Applied Standard

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart E (15.407)

KDB 789033 D02 General UNII Test Procedure New Rules v02r01

KDB 662911 D01 Multiple Transmitter Output v02r01

ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_{UV}/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit		
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m		
		PK:74 (dB _{UV} /m)	AV:54 (dB _{UV} /m)	
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m	
5150~5250 MHz	15.407(b)(1)			
5250~5350 MHz	15.407(b)(2)	PK:-27 (dBm/MHz)	PK:68.2(dB _{UV} /m)	
5470~5725 MHz	15.407(b)(3)			
5725~5850 MHz	<input checked="" type="checkbox"/> 15.407(b)(4)(i) <input type="checkbox"/> 15.407(b)(4)(ii)	PK:-27 (dBm/MHz) * ¹ PK:10 (dBm/MHz) * ² PK:15.6 (dBm/MHz) * ³ PK:27 (dBm/MHz) * ⁴	PK: 68.2(dB _{UV} /m) * ¹ PK:105.2 (dB _{UV} /m) * ² PK: 110.8(dB _{UV} /m) * ³ PK:122.2 (dB _{UV} /m) * ⁴	
		Emission limits in section 15.247(d)		
* ¹ beyond 75 MHz or more above of the band edge.		* ² below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.		
* ³ below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		* ⁴ from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.		

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V}/\text{m}, \text{ where } P \text{ is the eirp (Watts).}$$

4.1.2 Test Instruments

For Below 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Pre-Amplifier EMCI	EMC001340	980142	Jan. 25, 2019	Jan. 24, 2020
Loop Antenna Electro-Metrics	EM-6879	269	Sep. 07, 2018	Sep. 06, 2019
RF Cable	NA	LOOPCAB-001	Jan. 14, 2019	Jan. 13, 2020
RF Cable	NA	LOOPCAB-002	Jan. 14, 2019	Jan. 13, 2020
Pre-Amplifier Mini-Circuits	ZFL-1000VH2B	AMP-ZFL-01	Oct. 30, 2018	Oct. 29, 2019
Trilog Broadband Antenna SCHWARZBECK	VULB 9168	9168-406	Nov. 22, 2018	Nov. 21, 2019
RF Cable	8D	966-4-1	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-2	Mar. 19, 2019	Mar. 18, 2020
RF Cable	8D	966-4-3	Mar. 19, 2019	Mar. 18, 2020
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-3m-4-01	Sep. 27, 2018	Sep. 26, 2019
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: May 28, 2019

For Above 1GHz:

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver Keysight	N9038A	MY54450088	July 05, 2018	July 04, 2019
Horn_Antenna SCHWARZBECK	BBHA 9120D	9120D-783	Nov. 25, 2018	Nov. 24, 2019
Pre-Amplifier EMCI	EMC12630SE	980385	Aug. 16, 2018	Aug. 15, 2019
RF Cable	EMC104-SM-SM-1200	160923	Jan. 28, 2019	Jan. 27, 2020
RF Cable	104 RF cable	131215	Jan. 10, 2019	Jan. 09, 2020
RF Cable	EMC104-SM-SM-6000	180418	May 03, 2019	May 02, 2020
Pre-Amplifier EMCI	EMC184045SE	980387	Jan. 28, 2019	Jan. 27, 2020
Horn_Antenna SCHWARZBECK	BBHA 9170	BBHA9170519	Nov. 25, 2018	Nov. 24, 2019
RF Cable	EMC102-KM-KM-1200	160924	Jan. 28, 2019	Jan. 27, 2020
RF Cable	EMC102-KM-KM-1200	160925	Jan. 28, 2019	Jan. 27, 2020
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Spectrum Analyzer R&S	FSV40	100964	June 20, 2018	June 19, 2019
Power meter Anritsu	ML2495A	1014008	May 09, 2018	May 08, 2019
Power sensor Anritsu	MA2411B	0917122	May 09, 2018	May 08, 2019
Fixed Attenuator Mini-Circuits	MDCS18N-10	MDCS18N-10-01	Apr. 15, 2019	Apr. 14, 2020
AC Power Source Extech Electronics	6205	1440452	NA	NA
Temperature & Humidity Chamber Giant Force	GTH-150-40-SP-AR	MAA0812-008	Jan. 09, 2019	Jan. 08, 2020
True RMS Clamp Meter FLUKE	325	31130711WS	May 22, 2018	May 21, 2019

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Tested Date: May 05 to 07, 2019

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detects function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is $\geq 1/T$ (Duty cycle < 98%) or 10Hz (Duty cycle $\geq 98\%$) for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup


For Radiated emission below 30MHz

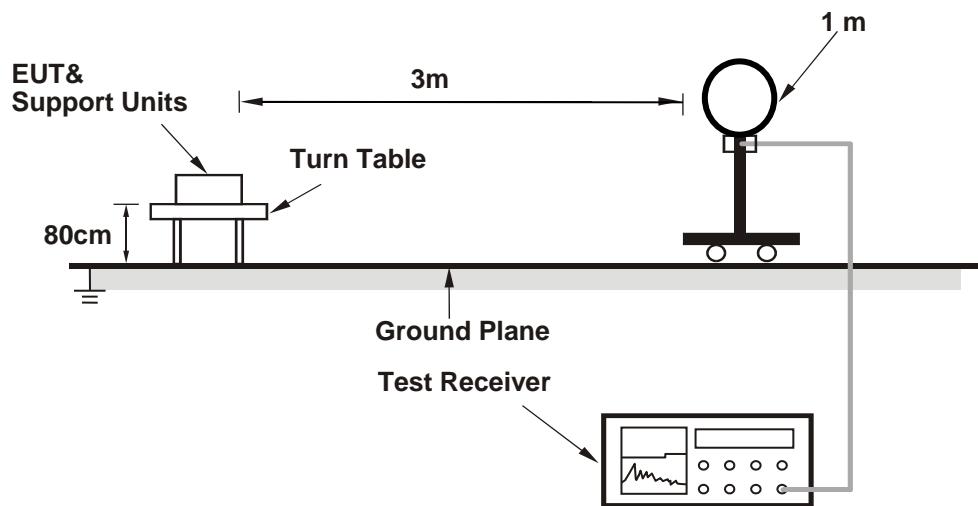

For Radiated emission 30MHz to 1GHz

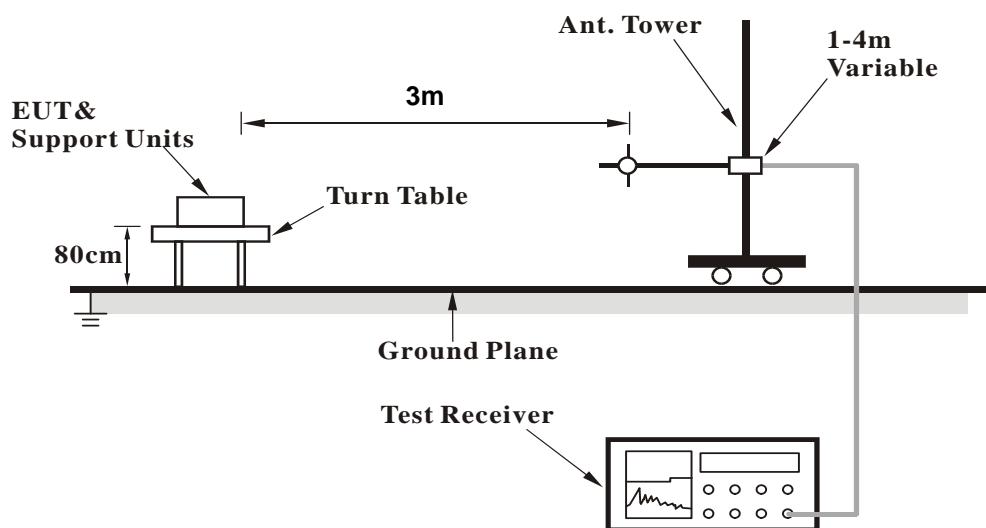

For Radiated emission above 1GHz

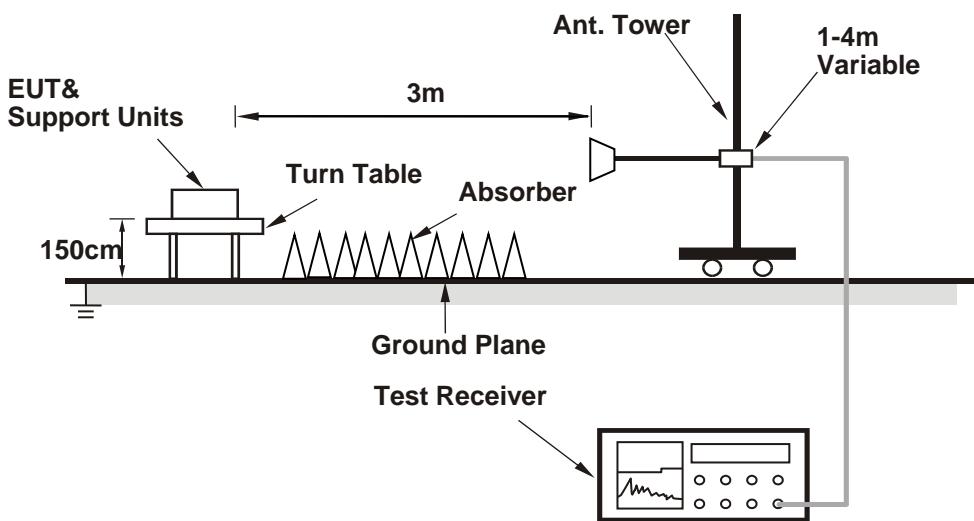

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- Placed the EUT on the testing table.
- Controlling software (QSPR (5.0-00160)) has been activated to set the EUT under transmission condition continuously.

4.1.7 Test Results

Above 1GHz Data:

802.11a

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5409.00	57.0 PK	74.0	-17.0	1.63 H	167	54.2	2.8
2	5409.00	44.5 AV	54.0	-9.5	1.63 H	167	41.7	2.8
3	5460.00	56.1 PK	74.0	-17.9	1.63 H	167	53.2	2.9
4	5460.00	44.2 AV	54.0	-9.8	1.63 H	167	41.3	2.9
5	#5470.00	61.1 PK	68.2	-7.1	1.63 H	167	58.2	2.9
6	*5500.00	115.1 PK			1.63 H	167	112.3	2.8
7	*5500.00	104.8 AV			1.63 H	167	102.0	2.8
8	11000.00	61.3 PK	74.0	-12.7	1.59 H	7	47.7	13.6
9	11000.00	48.7 AV	54.0	-5.3	1.59 H	7	35.1	13.6
10	#16500.00	50.5 PK	68.2	-17.7	2.12 H	188	35.8	14.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5409.00	57.8 PK	74.0	-16.2	3.23 V	184	55.0	2.8
2	5409.00	45.6 AV	54.0	-8.4	3.23 V	184	42.8	2.8
3	5460.00	56.2 PK	74.0	-17.8	3.23 V	184	53.3	2.9
4	5460.00	44.5 AV	54.0	-9.5	3.23 V	184	41.6	2.9
5	#5470.00	63.8 PK	68.2	-4.4	3.23 V	184	60.9	2.9
6	*5500.00	115.5 PK			3.23 V	184	112.7	2.8
7	*5500.00	105.5 AV			3.23 V	184	102.7	2.8
8	11000.00	64.3 PK	74.0	-9.7	3.97 V	360	50.7	13.6
9	11000.00	50.3 AV	54.0	-3.7	3.97 V	360	36.7	13.6
10	#16500.00	50.1 PK	68.2	-18.1	1.28 V	333	35.4	14.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	55.3 PK	74.0	-18.7	1.65 H	179	52.4	2.9
2	5460.00	42.2 AV	54.0	-11.8	1.65 H	179	39.3	2.9
3	#5470.00	55.5 PK	68.2	-12.7	1.65 H	179	52.6	2.9
4	*5580.00	114.8 PK			1.65 H	179	111.9	2.9
5	*5580.00	104.9 AV			1.65 H	179	102.0	2.9
6	11160.00	61.3 PK	74.0	-12.7	1.56 H	14	48.2	13.1
7	11160.00	48.5 AV	54.0	-5.5	1.56 H	14	35.4	13.1
8	#16740.00	50.5 PK	68.2	-17.7	2.12 H	192	34.4	16.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	55.8 PK	74.0	-18.2	3.19 V	178	52.9	2.9
2	5460.00	42.6 AV	54.0	-11.4	3.19 V	178	39.7	2.9
3	#5470.00	58.2 PK	68.2	-10.0	3.19 V	178	55.3	2.9
4	*5580.00	115.6 PK			3.19 V	178	112.7	2.9
5	*5580.00	105.6 AV			3.19 V	178	102.7	2.9
6	11160.00	60.2 PK	74.0	-13.8	3.77 V	355	47.1	13.1
7	11160.00	49.0 AV	54.0	-5.0	3.77 V	355	35.9	13.1
8	#16740.00	50.2 PK	68.2	-18.0	3.20 V	185	34.1	16.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	114.8 PK			1.60 H	173	111.5	3.3
2	*5700.00	104.8 AV			1.60 H	173	101.5	3.3
3	#5725.00	62.0 PK	68.2	-6.2	1.60 H	173	58.8	3.2
4	11400.00	61.4 PK	74.0	-12.6	1.60 H	7	47.9	13.5
5	11400.00	48.6 AV	54.0	-5.4	1.60 H	7	35.1	13.5
6	#17100.00	51.2 PK	68.2	-17.0	2.07 H	197	35.0	16.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	115.6 PK			3.17 V	176	112.3	3.3
2	*5700.00	105.5 AV			3.17 V	176	102.2	3.3
3	#5725.00	64.7 PK	68.2	-3.5	3.17 V	176	61.5	3.2
4	11400.00	64.6 PK	74.0	-9.4	3.86 V	360	51.1	13.5
5	11400.00	50.5 AV	54.0	-3.5	3.86 V	360	37.0	13.5
6	#17100.00	50.3 PK	68.2	-17.9	1.27 V	324	34.1	16.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	51.2 PK	68.2	-17.0	1.59 H	167	48.3	2.9
2	*5720.00	115.2 PK			1.59 H	167	111.9	3.3
3	*5720.00	105.0 AV			1.59 H	167	101.7	3.3
4	#5850.00	51.3 PK	68.2	-16.9	1.59 H	167	47.6	3.7
5	8180.00	59.5 PK	74.0	-14.5	1.59 H	167	50.6	8.9
6	8180.00	49.9 AV	54.0	-4.1	1.59 H	167	41.0	8.9
7	11440.00	61.1 PK	74.0	-12.9	1.55 H	5	47.7	13.4
8	11440.00	48.5 AV	54.0	-5.5	1.55 H	5	35.1	13.4
9	#17160.00	50.8 PK	68.2	-17.4	2.08 H	177	34.5	16.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	53.9 PK	68.2	-14.3	3.13 V	184	51.0	2.9
2	*5720.00	116.0 PK			3.13 V	184	112.7	3.3
3	*5720.00	105.7 AV			3.13 V	184	102.4	3.3
4	#5850.00	54.0 PK	68.2	-14.2	3.13 V	184	50.3	3.7
5	8180.00	62.2 PK	74.0	-11.8	3.13 V	184	53.3	8.9
6	8180.00	52.4 AV	54.0	-1.6	3.13 V	184	43.5	8.9
7	11440.00	64.4 PK	74.0	-9.6	3.92 V	356	51.0	13.4
8	11440.00	50.5 AV	54.0	-3.5	3.92 V	356	37.1	13.4
9	#17160.00	50.5 PK	68.2	-17.7	1.25 V	322	34.2	16.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE20)

CHANNEL	TX Channel 100	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	58.5 PK	74.0	-15.5	1.57 H	158	55.6	2.9
2	5460.00	46.4 AV	54.0	-7.6	1.57 H	158	43.5	2.9
3	#5470.00	60.9 PK	68.2	-7.3	1.57 H	158	58.0	2.9
4	*5500.00	116.5 PK			1.57 H	158	113.7	2.8
5	*5500.00	105.2 AV			1.57 H	158	102.4	2.8
6	11000.00	60.6 PK	74.0	-13.4	1.54 H	8	47.0	13.6
7	11000.00	48.1 AV	54.0	-5.9	1.54 H	8	34.5	13.6
8	#16500.00	50.3 PK	68.2	-17.9	2.13 H	190	35.6	14.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	59.0 PK	74.0	-15.0	1.70 V	189	56.1	2.9
2	5460.00	46.8 AV	54.0	-7.2	1.70 V	189	43.9	2.9
3	#5470.00	63.6 PK	68.2	-4.6	1.70 V	189	60.7	2.9
4	*5500.00	117.3 PK			1.70 V	189	114.5	2.8
5	*5500.00	105.9 AV			1.70 V	189	103.1	2.8
6	11000.00	63.8 PK	74.0	-10.2	3.76 V	348	50.2	13.6
7	11000.00	50.2 AV	54.0	-3.8	3.76 V	348	36.6	13.6
8	#16500.00	50.7 PK	68.2	-17.5	1.20 V	327	36.0	14.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 116	DETECTOR FUNCTION		Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz			Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	53.8 PK	74.0	-20.2	1.63 H	165	50.9	2.9
2	5460.00	41.8 AV	54.0	-12.2	1.63 H	165	38.9	2.9
3	#5470.00	51.4 PK	68.2	-16.8	1.63 H	165	48.5	2.9
4	*5580.00	116.4 PK			1.63 H	165	113.5	2.9
5	*5580.00	105.1 AV			1.63 H	165	102.2	2.9
6	11160.00	61.2 PK	74.0	-12.8	1.52 H	6	48.1	13.1
7	11160.00	48.4 AV	54.0	-5.6	1.52 H	6	35.3	13.1
8	#16740.00	51.3 PK	68.2	-16.9	2.06 H	167	35.2	16.1

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.3 PK	74.0	-19.7	1.69 V	187	51.4	2.9
2	5460.00	42.2 AV	54.0	-11.8	1.69 V	187	39.3	2.9
3	#5470.00	54.1 PK	68.2	-14.1	1.69 V	187	51.2	2.9
4	*5580.00	117.2 PK			1.69 V	187	114.3	2.9
5	*5580.00	105.8 AV			1.69 V	187	102.9	2.9
6	11160.00	62.0 PK	74.0	-12.0	3.96 V	357	48.9	13.1
7	11160.00	49.1 AV	54.0	-4.9	3.96 V	357	36.0	13.1
8	#16740.00	50.8 PK	68.2	-17.4	1.18 V	332	34.7	16.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 140	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	117.2 PK			1.63 H	175	113.9	3.3
2	*5700.00	105.5 AV			1.63 H	175	102.2	3.3
3	#5725.00	62.3 PK	68.2	-5.9	1.63 H	175	59.1	3.2
4	11400.00	60.6 PK	74.0	-13.4	1.58 H	8	47.1	13.5
5	11400.00	48.2 AV	54.0	-5.8	1.58 H	8	34.7	13.5
6	#17100.00	51.0 PK	68.2	-17.2	2.13 H	168	34.8	16.2
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5700.00	118.0 PK			2.82 V	185	114.7	3.3
2	*5700.00	106.2 AV			2.82 V	185	102.9	3.3
3	#5725.00	65.0 PK	68.2	-3.2	2.82 V	185	61.8	3.2
4	11400.00	63.9 PK	74.0	-10.1	3.98 V	353	50.4	13.5
5	11400.00	50.1 AV	54.0	-3.9	3.98 V	353	36.6	13.5
6	#17100.00	50.8 PK	68.2	-17.4	1.30 V	312	34.6	16.2

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 144	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	51.6 PK	68.2	-16.6	1.58 H	156	48.7	2.9
2	*5720.00	118.5 PK			1.58 H	156	115.2	3.3
3	*5720.00	107.0 AV			1.58 H	156	103.7	3.3
4	#5850.00	51.5 PK	68.2	-16.7	1.58 H	156	47.8	3.7
5	11440.00	60.9 PK	74.0	-13.1	1.60 H	11	47.5	13.4
6	11440.00	48.1 AV	54.0	-5.9	1.60 H	11	34.7	13.4
7	#17160.00	50.7 PK	68.2	-17.5	2.06 H	186	34.4	16.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	54.3 PK	68.2	-13.9	2.80 V	184	51.4	2.9
2	*5720.00	119.3 PK			2.80 V	184	116.0	3.3
3	*5720.00	107.7 AV			2.80 V	184	104.4	3.3
4	#5850.00	54.2 PK	68.2	-14.0	2.80 V	184	50.5	3.7
5	11440.00	63.8 PK	74.0	-10.2	3.94 V	356	50.4	13.4
6	11440.00	50.2 AV	54.0	-3.8	3.94 V	356	36.8	13.4
7	#17160.00	50.3 PK	68.2	-17.9	1.18 V	315	34.0	16.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE40)

CHANNEL	TX Channel 102	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	60.1 PK	74.0	-13.9	1.56 H	178	57.2	2.9
2	5460.00	50.7 AV	54.0	-3.3	1.56 H	178	47.8	2.9
3	#5470.00	61.2 PK	68.2	-7.0	1.56 H	178	58.3	2.9
4	*5510.00	113.2 PK			1.56 H	178	110.4	2.8
5	*5510.00	101.5 AV			1.56 H	178	98.7	2.8
6	11020.00	61.4 PK	74.0	-12.6	1.54 H	10	47.9	13.5
7	11020.00	48.6 AV	54.0	-5.4	1.54 H	10	35.1	13.5
8	#16530.00	50.6 PK	68.2	-17.6	2.07 H	169	35.9	14.7

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	60.6 PK	74.0	-13.4	3.63 V	164	57.7	2.9
2	5460.00	51.1 AV	54.0	-2.9	3.63 V	164	48.2	2.9
3	#5470.00	63.9 PK	68.2	-4.3	3.63 V	164	61.0	2.9
4	*5510.00	114.0 PK			3.63 V	164	111.2	2.8
5	*5510.00	102.2 AV			3.63 V	164	99.4	2.8
6	11020.00	64.1 PK	74.0	-9.9	3.94 V	360	50.6	13.5
7	11020.00	50.4 AV	54.0	-3.6	3.94 V	360	36.9	13.5
8	#16530.00	50.8 PK	68.2	-17.4	1.20 V	324	36.1	14.7

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 110	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.2 PK	74.0	-19.8	1.61 H	181	51.3	2.9
2	5460.00	43.1 AV	54.0	-10.9	1.61 H	181	40.2	2.9
3	#5470.00	54.4 PK	68.2	-13.8	1.61 H	181	51.5	2.9
4	*5550.00	114.7 PK			1.61 H	181	111.8	2.9
5	*5550.00	102.7 AV			1.61 H	181	99.8	2.9
6	11100.00	60.9 PK	74.0	-13.1	1.59 H	15	47.9	13.0
7	11100.00	48.3 AV	54.0	-5.7	1.59 H	15	35.3	13.0
8	#16650.00	51.0 PK	68.2	-17.2	2.09 H	186	35.5	15.5

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	54.7 PK	74.0	-19.3	2.72 V	186	51.8	2.9
2	5460.00	43.5 AV	54.0	-10.5	2.72 V	186	40.6	2.9
3	#5470.00	57.1 PK	68.2	-11.1	2.72 V	186	54.2	2.9
4	*5550.00	115.5 PK			2.72 V	186	112.6	2.9
5	*5550.00	103.4 AV			2.72 V	186	100.5	2.9
6	11100.00	64.8 PK	74.0	-9.2	3.91 V	345	51.8	13.0
7	11100.00	50.7 AV	54.0	-3.3	3.91 V	345	37.7	13.0
8	#16650.00	50.7 PK	68.2	-17.5	1.25 V	313	35.2	15.5

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 134	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	115.0 PK			1.62 H	182	111.9	3.1
2	*5670.00	103.1 AV			1.62 H	182	100.0	3.1
3	#5725.00	60.2 PK	68.2	-8.0	1.62 H	182	57.0	3.2
4	11340.00	60.5 PK	74.0	-13.5	1.54 H	12	47.1	13.4
5	11340.00	48.0 AV	54.0	-6.0	1.54 H	12	34.6	13.4
6	#17010.00	51.1 PK	68.2	-17.1	2.10 H	175	34.5	16.6
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5670.00	115.8 PK			2.73 V	189	112.7	3.1
2	*5670.00	103.8 AV			2.73 V	189	100.7	3.1
3	#5725.00	62.9 PK	68.2	-5.3	2.73 V	189	59.7	3.2
4	11340.00	64.5 PK	74.0	-9.5	3.87 V	359	51.1	13.4
5	11340.00	50.9 AV	54.0	-3.1	3.87 V	359	37.5	13.4
6	#17010.00	49.9 PK	68.2	-18.3	1.20 V	314	33.3	16.6

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 142	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	54.5 PK	68.2	-13.7	1.60 H	178	51.6	2.9
2	*5710.00	116.3 PK			1.60 H	178	113.0	3.3
3	*5710.00	104.2 AV			1.60 H	178	100.9	3.3
4	#5850.00	54.8 PK	68.2	-13.4	1.60 H	178	51.1	3.7
5	11420.00	61.4 PK	74.0	-12.6	1.49 H	9	48.1	13.3
6	11420.00	48.5 AV	54.0	-5.5	1.49 H	9	35.2	13.3
7	#17130.00	50.3 PK	68.2	-17.9	2.16 H	174	34.0	16.3

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	54.5 PK	68.2	-13.7	2.70 V	187	51.6	2.9
2	*5710.00	115.7 PK			2.70 V	187	112.4	3.3
3	*5710.00	103.8 AV			2.70 V	187	100.5	3.3
4	#5850.00	54.7 PK	68.2	-13.5	2.70 V	187	51.0	3.7
5	11420.00	64.4 PK	74.0	-9.6	3.91 V	351	51.1	13.3
6	11420.00	50.5 AV	54.0	-3.5	3.91 V	351	37.2	13.3
7	#17130.00	50.2 PK	68.2	-18.0	1.24 V	327	33.9	16.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

802.11ax (HE80)

CHANNEL	TX Channel 106	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	61.4 PK	74.0	-12.6	1.61 H	152	58.5	2.9
2	5460.00	49.8 AV	54.0	-4.2	1.61 H	152	46.9	2.9
3	#5470.00	62.4 PK	68.2	-5.8	1.61 H	152	59.5	2.9
4	*5530.00	111.6 PK			1.61 H	152	108.7	2.9
5	*5530.00	99.5 AV			1.61 H	152	96.6	2.9
6	#5725.00	48.3 PK	68.2	-19.9	1.61 H	152	45.1	3.2
7	11060.00	61.3 PK	74.0	-12.7	1.59 H	2	48.0	13.3
8	11060.00	48.8 AV	54.0	-5.2	1.59 H	2	35.5	13.3
9	#16590.00	51.1 PK	68.2	-17.1	2.08 H	181	36.1	15.0

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	5460.00	61.9 PK	74.0	-12.1	3.60 V	170	59.0	2.9
2	5460.00	50.2 AV	54.0	-3.8	3.60 V	170	47.3	2.9
3	#5470.00	65.1 PK	68.2	-3.1	3.60 V	170	62.2	2.9
4	*5530.00	112.4 PK			3.60 V	170	109.5	2.9
5	*5530.00	100.2 AV			3.60 V	170	97.3	2.9
6	#5725.00	51.0 PK	68.2	-17.2	3.60 V	170	47.8	3.2
7	11060.00	64.3 PK	74.0	-9.7	3.89 V	341	51.0	13.3
8	11060.00	50.3 AV	54.0	-3.7	3.89 V	341	37.0	13.3
9	#16590.00	50.5 PK	68.2	-17.7	1.29 V	334	35.5	15.0

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5610.00	111.8 PK			1.57 H	162	108.8	3.0
2	*5610.00	101.0 AV			1.57 H	162	98.0	3.0
3	#5725.00	60.4 PK	68.2	-7.8	1.57 H	162	57.2	3.2
4	11220.00	61.4 PK	74.0	-12.6	1.58 H	17	48.3	13.1
5	11220.00	48.8 AV	54.0	-5.2	1.58 H	17	35.7	13.1
6	#16830.00	51.1 PK	68.2	-17.1	2.06 H	178	34.8	16.3
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*5610.00	112.6 PK			3.07 V	196	109.6	3.0
2	*5610.00	101.7 AV			3.07 V	196	98.7	3.0
3	#5725.00	63.1 PK	68.2	-5.1	3.07 V	196	59.9	3.2
4	11220.00	64.6 PK	74.0	-9.4	3.98 V	360	51.5	13.1
5	11220.00	50.9 AV	54.0	-3.1	3.98 V	360	37.8	13.1
6	#16830.00	50.4 PK	68.2	-17.8	1.26 V	322	34.1	16.3

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.

CHANNEL	TX Channel 138	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 40GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	49.8 PK	68.2	-18.4	1.56 H	166	46.9	2.9
2	*5690.00	111.3 PK			1.56 H	166	108.0	3.3
3	*5690.00	100.3 AV			1.56 H	166	97.0	3.3
4	#5850.00	56.1 PK	68.2	-12.1	1.56 H	166	52.4	3.7
5	11380.00	61.7 PK	74.0	-12.3	1.52 H	8	48.2	13.5
6	11380.00	48.8 AV	54.0	-5.2	1.52 H	8	35.3	13.5
7	#17070.00	50.9 PK	68.2	-17.3	2.13 H	166	34.5	16.4

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	#5470.00	52.5 PK	68.2	-15.7	1.53 V	189	49.6	2.9
2	*5690.00	112.1 PK			1.53 V	189	108.8	3.3
3	*5690.00	101.0 AV			1.53 V	189	97.7	3.3
4	#5850.00	58.8 PK	68.2	-9.4	1.53 V	189	55.1	3.7
5	11380.00	64.4 PK	74.0	-9.6	3.95 V	349	50.9	13.5
6	11380.00	50.6 AV	54.0	-3.4	3.95 V	349	37.1	13.5
7	#17070.00	50.5 PK	68.2	-17.7	1.21 V	308	34.1	16.4

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " * ": Fundamental frequency.
6. " # ": The radiated frequency is out of the restricted band.


Below 1GHz Data:
802.11ax (HE80)

CHANNEL	TX Channel 122	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	31.92	26.6 QP	40.0	-13.4	1.30 H	299	36.2	-9.6
2	89.69	31.2 QP	43.5	-12.3	3.00 H	106	44.5	-13.3
3	178.28	25.9 QP	43.5	-17.6	2.90 H	248	35.0	-9.1
4	253.52	24.6 QP	46.0	-21.4	1.40 H	336	33.2	-8.6
5	311.61	31.5 QP	46.0	-14.5	1.40 H	351	38.1	-6.6
6	624.90	30.6 QP	46.0	-15.4	2.60 H	54	29.5	1.1

REMARKS:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

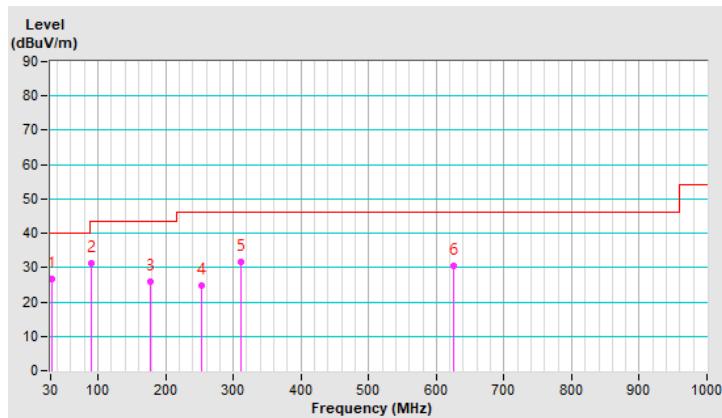


CHANNEL	TX Channel 122	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	9kHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dB _B U _V /m)	LIMIT (dB _B U _V /m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dB _B U)	CORRECTION FACTOR (dB/m)
1	39.65	32.3 QP	40.0	-7.7	1.00 V	337	41.0	-8.7
2	82.74	28.2 QP	40.0	-11.8	1.50 V	4	41.5	-13.3
3	124.99	26.2 QP	43.5	-17.3	1.00 V	111	35.6	-9.4
4	203.24	24.3 QP	43.5	-19.2	1.00 V	245	34.6	-10.3
5	312.12	27.7 QP	46.0	-18.3	2.00 V	360	34.3	-6.6
6	566.04	27.8 QP	46.0	-18.2	2.40 V	3	28.3	-0.5

REMARKS:

1. Emission Level(dB_BU_V/m) = Raw Value(dB_BU) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

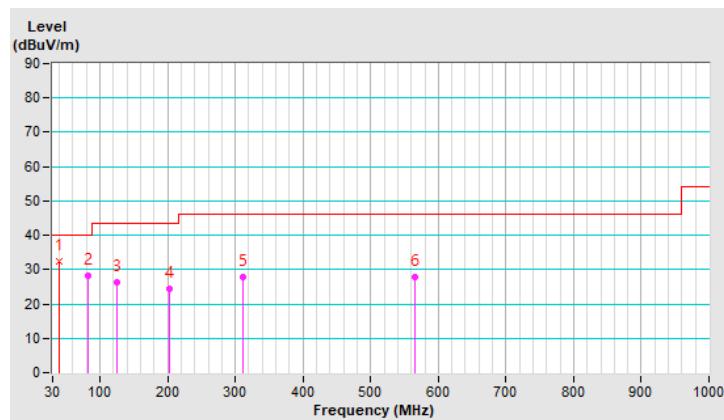

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Test Receiver R&S	ESCS 30	847124/029	Oct. 24, 2018	Oct. 23, 2019
Line-Impedance Stabilization Network (for EUT) R&S	ESH3-Z5	848773/004	Oct. 22, 2018	Oct. 21, 2019
Line-Impedance Stabilization Network (for Peripheral) R&S	ESH3-Z5	835239/001	Mar. 17, 2019	Mar. 16, 2020
50 ohms Terminator	N/A	3	Oct. 22, 2018	Oct. 21, 2019
RF Cable	5D-FB	COCCAB-001	Sep. 28, 2018	Sep. 27, 2019
Fixed attenuator EMCI	STI02-2200-10	003	Mar. 14, 2019	Mar. 13, 2020
Software BVADT	BVADT_Cond_V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
- 3 Tested Date: May 28, 2019

4.2.3 Test Procedure


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

Note: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

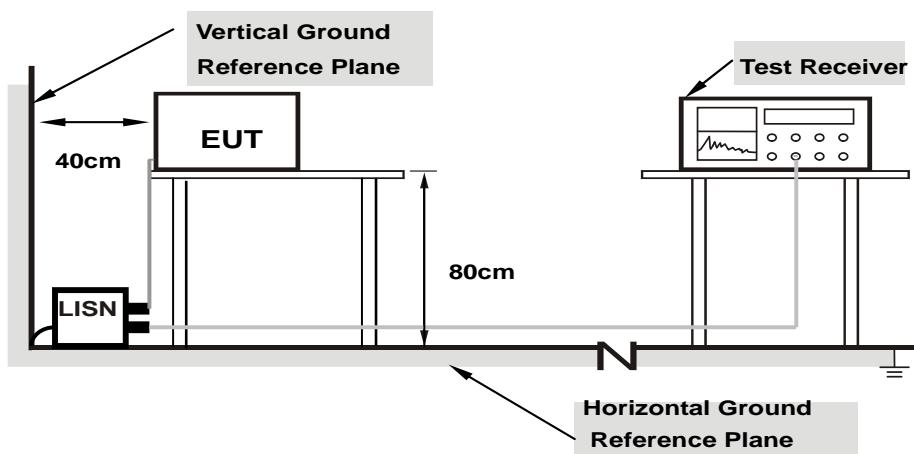

Note: 1. Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition


Same as 4.1.6.

4.2.7 Test Results

Phase		Line (L)		Detector Function		Quasi-Peak (QP) / Average (AV)			
No	Freq.	Corr.	Reading Value	Emission Level		Limit		Margin	
		Factor	[dB (uV)]	[dB (uV)]		[dB (uV)]		(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	10.02	29.12	13.64	39.14	23.66	66.00	56.00	-26.86
2	0.16952	10.03	23.81	8.91	33.84	18.94	64.98	54.98	-31.14
3	0.40000	10.07	18.21	13.19	28.28	23.26	57.85	47.85	-29.57
4	2.05079	10.16	11.41	4.78	21.57	14.94	56.00	46.00	-34.43
5	9.77735	10.52	18.96	11.32	29.48	21.84	60.00	50.00	-30.52
6	15.78907	10.84	9.13	1.83	19.97	12.67	60.00	50.00	-40.03
									-37.33

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

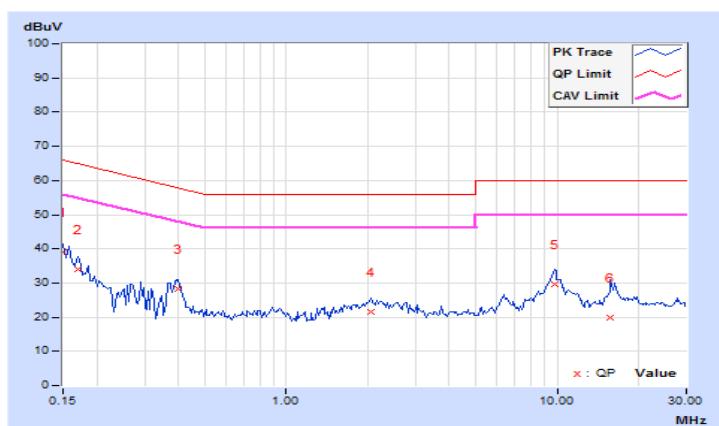


Phase	Neutral (N)		Detector Function		Quasi-Peak (QP) / Average (AV)			
-------	-------------	--	-------------------	--	--------------------------------	--	--	--

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
		Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.15000	9.93	27.31	12.87	37.24	22.80	66.00	56.00	-28.76	-33.20
2	0.18905	9.94	20.95	5.70	30.89	15.64	64.08	54.08	-33.19	-38.44
3	0.39220	9.96	15.10	11.41	25.06	21.37	58.02	48.02	-32.96	-26.65
4	2.05079	10.04	13.49	7.26	23.53	17.30	56.00	46.00	-32.47	-28.70
5	9.75390	10.37	19.56	12.35	29.93	22.72	60.00	50.00	-30.07	-27.28
6	16.36329	10.69	15.49	8.51	26.18	19.20	60.00	50.00	-33.82	-30.80

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

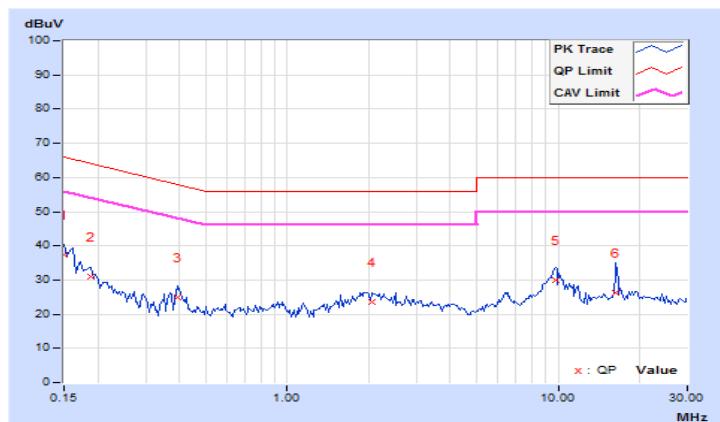

4.3 Transmit Power Measurement

4.3.1 Limits of Transmit Power Measurement

Operation Band	EUT Category		Limit
U-NII-1	Outdoor Access Point		1 Watt (30 dBm) (Max. e.i.r.p \leq 125mW(21 dBm) at any elevation angle above 30 degrees as measured from the horizon)
	Fixed point-to-point Access Point		1 Watt (30 dBm)
	Indoor Access Point		1 Watt (30 dBm)
	Client device		250mW (24 dBm)
U-NII-2A			250mW (24 dBm) or 11 dBm+10 log B*
U-NII-2C	√		250mW (24 dBm) or 11 dBm+10 log B*
U-NII-3	√		1 Watt (30 dBm)

*B is the 26 dB emission bandwidth in megahertz

Per KDB 662911 Method of conducted output power measurement on IEEE 802.11 devices,

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

Array Gain = 0 dB (i.e., no array gain) for channel widths ≥ 40 MHz for any N_{ANT} ;


Array Gain = $5 \log(N_{ANT}/N_{SS})$ dB or 3 dB, whichever is less for 20-MHz channel widths with $N_{ANT} \geq 5$.

For power measurements on all other devices: Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.


4.3.2 Test Setup

FOR POWER OUTPUT MEASUREMENT


For channel straddling 5725MHz:



For other channels:



FOR 26dB OCCUPIED BANDWIDTH



4.3.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.3.4 Test Procedure

FOR POWER OUTPUT MEASUREMENT

For other channels:

Method PM is used to perform output power measurement, trigger and gating function of wide band power meter is enabled to measure max output power of TX on burst. Duty factor is not added to measured value.

For channel straddling 5725MHz:

Follow FCC KDB 789033 UNII test procedure:

Method SA-2

1. Set span to encompass the emission bandwidth (EBW) of the signal.
2. Set RBW = 1MHz.
3. Set the VBW $\geq 3 \times$ RBW.
4. Number of points in sweep ≥ 2 Span / RBW.
5. Sweep time = auto.
6. Detector = RMS.
7. Trace average at least 100 traces in power averaging mode
8. Compute power by integrating the spectrum across the 26 dB EBW of the signal.
9. Duty factor need added to measured value (duty cycle < 98 percent).

FOR 26dB OCCUPIED BANDWIDTH

1. Set RBW = approximately 1% of the emission bandwidth.
2. Set the VBW $>$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

4.3.5 Deviation from Test Standard

No deviation.

4.3.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.3.7 Test Results

Non-Beamforming Mode

802.11a

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	17.74	17.75	17.94	17.93	243.312	23.86	24.00	Pass
116	5580	17.76	17.78	17.69	17.88	239.808	23.80	24.00	Pass
140	5700	17.83	17.76	17.86	17.91	243.274	23.86	24.00	Pass
*144 (U-NII-2C Band)	5720	8.91	6.72	8.25	9.16	34.283	15.35	22.95	Pass
*144 (U-NII-3 Band)	5720	3.23	3.46	1.52	2.23	9.273	9.67	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
144	5720	43.556	16.39

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	21.37	21.27	22.16	22.79
116	5580	21.78	21.31	22.51	22.29
140	5700	21.24	21.29	22.17	22.16
144 (U-NII-2C Band)	5720	16.03	15.68	15.99	16.08

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
100	5500	21.27	24.27 > 24
116	5580	21.31	24.28 > 24
140	5700	21.24	24.27 > 24
144 (U-NII-2C Band)	5720	15.68	22.95 < 24

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	17.49	17.47	17.69	17.74	230.13	23.62	24.00	Pass
116	5580	17.55	17.51	17.61	17.67	229.405	23.61	24.00	Pass
140	5700	17.47	17.50	17.68	17.62	228.505	23.59	24.00	Pass
*144 (U-NII-2C Band)	5720	13.11	13.61	13.58	14.74	102.145	20.09	22.81	Pass
*144 (U-NII-3 Band)	5720	8.17	8.45	7.64	5.96	24.801	13.94	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
144	5720	126.946	21.04

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	20.80	20.74	21.12	21.10
116	5580	21.17	20.77	21.28	21.10
140	5700	20.99	20.74	20.80	20.90
144 (U-NII-2C Band)	5720	15.41	15.19	15.84	15.47

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = $11\text{dBm} + 10\log_2 B < \text{U-NII-2A, U-NII-2C} >$			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
100	5500	20.74	24.16 > 24
116	5580	20.77	24.17 > 24
140	5700	20.74	24.16 > 24
144 (U-NII-2C Band)	5720	15.19	22.81 < 24

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	17.41	17.45	17.62	17.50	224.715	23.52	24.00	Pass
110	5550	17.38	17.34	17.66	17.54	224.001	23.50	24.00	Pass
134	5670	17.43	17.22	17.63	17.48	221.977	23.46	24.00	Pass
*142 (U-NII-2C Band)	5710	13.61	14.74	15.13	15.94	131.96	21.20	24.00	Pass
*142 (U-NII-3 Band)	5710	4.89	1.48	3.43	4.30	9.939	9.97	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
142	5710	141.899	21.52

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
102	5510	42.23	42.24	41.48	41.20
110	5550	42.09	42.12	41.72	41.26
134	5670	42.03	41.59	41.65	41.12
142 (U-NII-2C Band)	5710	35.82	35.68	35.81	35.66

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
102	5510	41.20	27.14 > 24
110	5550	41.26	27.15 > 24
134	5670	41.12	27.14 > 24
142 (U-NII-2C Band)	5710	35.66	26.52 > 24

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	17.46	17.70	17.93	17.94	238.92	23.78	24.00	Pass
122	5610	17.51	17.64	17.98	17.85	238.2	23.77	24.00	Pass
*138 (U-NII-2C Band)	5690	15.52	15.32	15.04	14.66	136.151	21.34	24.00	Pass
*138 (U-NII-3 Band)	5690	0.97	0.79	1.35	-0.64	4.8672	6.87	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
138	5690	141.0182	21.49

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
106	5530	83.15	82.72	82.68	82.24
122	5610	83.42	82.47	82.81	82.57
138 (U-NII-2C Band)	5690	76.40	76.53	76.27	76.27

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
106	5530	82.24	30.15 > 24
122	5610	82.47	30.16 > 24
138 (U-NII-2C Band)	5690	76.27	29.82 > 24

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	17.69	17.66	17.91	17.92	240.84	23.82	24.00	Pass
116	5580	17.77	17.74	17.79	17.86	240.481	23.81	24.00	Pass
140	5700	17.69	17.71	17.87	17.83	239.678	23.80	24.00	Pass
*144 (U-NII-2C Band)	5720	12.84	13.46	14.69	14.81	106.33	20.27	22.95	Pass
*144 (U-NII-3 Band)	5720	7.82	5.93	9.99	7.25	26.556	14.24	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
144	5720	132.886	21.23

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	21.42	21.49	21.79	21.42
116	5580	21.50	21.37	21.40	21.26
140	5700	21.54	21.34	21.53	21.47
144 (U-NII-2C Band)	5720	16.02	15.76	15.75	15.70

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = $11\text{dBm} + 10\log_2 B < \text{U-NII-2A, U-NII-2C} >$			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
100	5500	21.42	24.3 > 24
116	5580	21.26	24.27 > 24
140	5700	21.34	24.29 > 24
144 (U-NII-2C Band)	5720	15.70	22.95 < 24

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	17.62	17.64	17.83	17.69	235.309	23.72	24.00	Pass
110	5550	17.59	17.53	17.87	17.72	234.427	23.70	24.00	Pass
134	5670	17.62	17.43	17.82	17.69	232.428	23.66	24.00	Pass
*142 (U-NII-2C Band)	5710	14.48	14.59	15.44	14.32	124.925	20.97	24.00	Pass
*142 (U-NII-3 Band)	5710	4.09	3.87	4.12	4.70	11.072	10.44	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
142	5710	135.997	21.34

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
102	5510	42.34	42.30	42.69	42.20
110	5550	42.38	42.32	42.50	42.37
134	5670	42.33	42.43	42.47	42.22
142 (U-NII-2C Band)	5710	36.14	36.31	36.12	35.91

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
102	5510	42.20	27.25 > 24
110	5550	42.32	27.26 > 24
134	5670	42.22	27.25 > 24
142 (U-NII-2C Band)	5710	35.91	26.55 > 24

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	17.56	17.84	18.12	18.13	247.706	23.94	24.00	Pass
122	5610	17.68	17.81	18.13	18.08	248.291	23.95	24.00	Pass
*138 (U-NII-2C Band)	5690	15.10	15.91	16.50	14.82	152.686	21.84	24.00	Pass
*138 (U-NII-3 Band)	5690	1.36	2.48	0.62	1.18	5.845	7.67	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
138	5690	158.531	22

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
106	5530	83.28	83.11	83.17	83.10
122	5610	83.63	82.98	83.48	83.08
138 (U-NII-2C Band)	5690	76.61	76.73	76.47	76.60

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = 11dBm + 10logB < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
106	5530	83.10	30.19 > 24
122	5610	82.98	30.18 > 24
138 (U-NII-2C Band)	5690	76.47	29.83 > 24

Beamforming Mode

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	17.49	17.47	17.69	17.74	230.13	23.62	24.00	Pass
116	5580	17.55	17.51	17.61	17.67	229.405	23.61	24.00	Pass
140	5700	17.47	17.50	17.68	17.62	228.505	23.59	24.00	Pass
*144 (U-NII-2C Band)	5720	13.11	13.61	13.58	14.74	102.145	20.09	22.81	Pass
*144 (U-NII-3 Band)	5720	8.17	8.45	7.64	5.96	24.801	13.94	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

1. For U-NII-2C band: The directional gain is 4.89dBi < 6dBi, so the power limit shall not be reduced to "Determined Conducted Limit".
2. For U-NII-3 band: The directional gain is 5.09dBi < 6dBi, so the power limit shall not be reduced to "Determined Conducted Limit".

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
144	5720	126.946	21.04

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	20.80	20.74	21.12	21.10
116	5580	21.17	20.77	21.28	21.10
140	5700	20.99	20.74	20.80	20.90
144 (U-NII-2C Band)	5720	15.41	15.19	15.84	15.47

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = $11\text{dBm} + 10\log_2 < \text{U-NII-2A, U-NII-2C} >$			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
100	5500	20.74	24.16 > 24
116	5580	20.77	24.17 > 24
140	5700	20.74	24.16 > 24
144 (U-NII-2C Band)	5720	15.19	22.81 < 24

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	17.41	17.45	17.62	17.50	224.715	23.52	24.00	Pass
110	5550	17.38	17.34	17.66	17.54	224.001	23.50	24.00	Pass
134	5670	17.43	17.22	17.63	17.48	221.977	23.46	24.00	Pass
*142 (U-NII-2C Band)	5710	13.61	14.74	15.13	15.94	131.96	21.20	24.00	Pass
*142 (U-NII-3 Band)	5710	4.89	1.48	3.43	4.30	9.939	9.97	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

1. For U-NII-2C band: The directional gain is $4.89\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced to "Determined Conducted Limit".
2. For U-NII-3 band: The directional gain is $5.09\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced to "Determined Conducted Limit".

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
142	5710	141.899	21.52

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
102	5510	42.23	42.24	41.48	41.20
110	5550	42.09	42.12	41.72	41.26
134	5670	42.03	41.59	41.65	41.12
142 (U-NII-2C Band)	5710	35.82	35.68	35.81	35.66

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = $11\text{dBm} + 10\log_2 < \text{U-NII-2A, U-NII-2C}$			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
102	5510	41.20	27.14 > 24
110	5550	41.26	27.15 > 24
134	5670	41.12	27.14 > 24
142 (U-NII-2C Band)	5710	35.66	26.52 > 24

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	17.46	17.70	17.93	17.94	238.92	23.78	24.00	Pass
122	5610	17.51	17.64	17.98	17.85	238.2	23.77	24.00	Pass
*138 (U-NII-2C Band)	5690	15.52	15.32	15.04	14.66	136.151	21.34	24.00	Pass
*138 (U-NII-3 Band)	5690	0.97	0.79	1.35	-0.64	4.8672	6.87	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

1. For U-NII-2C band: The directional gain is 4.89dBi < 6dBi, so the power limit shall not be reduced to "Determined Conducted Limit".
2. For U-NII-3 band: The directional gain is 5.09dBi < 6dBi, so the power limit shall not be reduced to "Determined Conducted Limit".

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
138	5690	141.0182	21.49

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
106	5530	83.15	82.72	82.68	82.24
122	5610	83.42	82.47	82.81	82.57
138 (U-NII-2C Band)	5690	76.40	76.53	76.27	76.27

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = $11\text{dBm} + 10\log_2 B$ < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
106	5530	82.24	30.15 > 24
122	5610	82.47	30.16 > 24
138 (U-NII-2C Band)	5690	76.27	29.82 > 24

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	17.69	17.66	17.91	17.92	240.84	23.82	24.00	Pass
116	5580	17.77	17.74	17.79	17.86	240.481	23.81	24.00	Pass
140	5700	17.69	17.71	17.87	17.83	239.678	23.80	24.00	Pass
*144 (U-NII-2C Band)	5720	12.84	13.46	14.69	14.81	106.33	20.27	22.95	Pass
*144 (U-NII-3 Band)	5720	7.82	5.93	9.99	7.25	26.556	14.24	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

1. For U-NII-2C band: The directional gain is $4.89\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced to "Determined Conducted Limit".
2. For U-NII-3 band: The directional gain is $5.09\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced to "Determined Conducted Limit".

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
144	5720	132.886	21.23

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	21.42	21.49	21.79	21.42
116	5580	21.50	21.37	21.40	21.26
140	5700	21.54	21.34	21.53	21.47
144 (U-NII-2C Band)	5720	16.02	15.76	15.75	15.70

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = $11\text{dBm} + 10\log_2 < \text{U-NII-2A, U-NII-2C}$			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
100	5500	21.42	24.3 > 24
116	5580	21.26	24.27 > 24
140	5700	21.34	24.29 > 24
144 (U-NII-2C Band)	5720	15.70	22.95 < 24

802.11ax (HE40)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	17.62	17.64	17.83	17.69	235.309	23.72	24.00	Pass
110	5550	17.59	17.53	17.87	17.72	234.427	23.70	24.00	Pass
134	5670	17.62	17.43	17.82	17.69	232.428	23.66	24.00	Pass
*142 (U-NII-2C Band)	5710	14.48	14.59	15.44	14.32	124.925	20.97	24.00	Pass
*142 (U-NII-3 Band)	5710	4.09	3.87	4.12	4.70	11.072	10.44	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

1. For U-NII-2C band: The directional gain is $4.89\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced to "Determined Conducted Limit".
2. For U-NII-3 band: The directional gain is $5.09\text{dBi} < 6\text{dBi}$, so the power limit shall not be reduced to "Determined Conducted Limit".

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
142	5710	135.997	21.34

Note: The total power was calculated through formula and record the value for reference only.

26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
102	5510	42.34	42.30	42.69	42.20
110	5550	42.38	42.32	42.50	42.37
134	5670	42.33	42.43	42.47	42.22
142 (U-NII-2C Band)	5710	36.14	36.31	36.12	35.91

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth

Power Limit = $11\text{dBm} + 10\log_2 < \text{U-NII-2A, U-NII-2C}$			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
102	5510	42.20	27.25 > 24
110	5550	42.32	27.26 > 24
134	5670	42.22	27.25 > 24
142 (U-NII-2C Band)	5710	35.91	26.55 > 24

802.11ax (HE80)

Chan.	Chan. Freq. (MHz)	Maximum Conducted Power (dBm)				Total Power (mW)	Total Power (dBm)	Limit (dBm)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	17.56	17.84	18.12	18.13	247.706	23.94	24.00	Pass
122	5610	17.68	17.81	18.13	18.08	248.291	23.95	24.00	Pass
*138 (U-NII-2C Band)	5690	15.10	15.91	16.50	14.82	152.686	21.84	24.00	Pass
*138 (U-NII-3 Band)	5690	1.36	2.48	0.62	1.18	5.845	7.67	30.00	Pass

Note: * Test was performed in accordance with Measurement follow FCC KDB 789033 UNII test procedure Method SA-2 and use spectrum analyzer test.

1. For U-NII-2C band: The directional gain is 4.89dBi < 6dBi, so the power limit shall not be reduced to "Determined Conducted Limit".
2. For U-NII-3 band: The directional gain is 5.09dBi < 6dBi, so the power limit shall not be reduced to "Determined Conducted Limit".

The Total Power for the straddle channel:

Chan.	Chan. Freq. (MHz)	Average Power (mW)	Average Power (dBm)
138	5690	158.531	22

Note: The total power was calculated through formula and record the value for reference only.







26dB OCCUPIED BANDWIDTH

Channel	Frequency (MHz)	26dBc Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
106	5530	83.28	83.11	83.17	83.10
122	5610	83.63	82.98	83.48	83.08
138 (U-NII-2C Band)	5690	76.61	76.73	76.47	76.60

Note: For U-NII-2A, U-NII-2C Band output power limitation is determined based on 26dBc bandwidth


Power Limit = $11\text{dBm} + 10\log_2 B$ < U-NII-2A, U-NII-2C >			
Channel Number	Freq.(MHz)	Min. B(MHz)	Determined Conducted Limit (dBm)
106	5530	83.10	30.19 > 24
122	5610	82.98	30.18 > 24
138 (U-NII-2C Band)	5690	76.47	29.83 > 24

Spectrum Plot of Worst Value

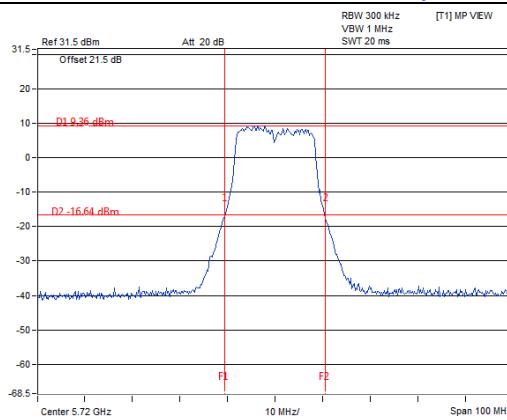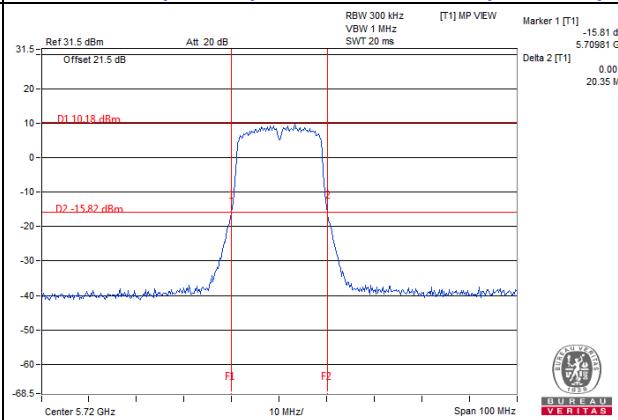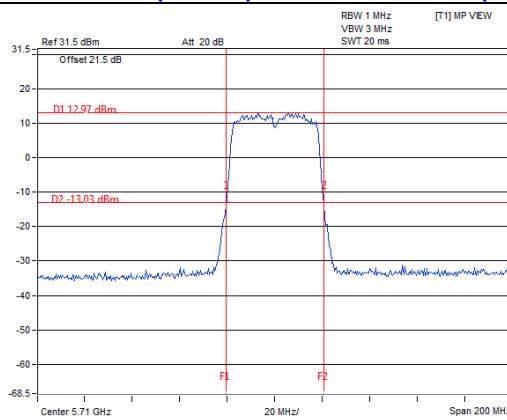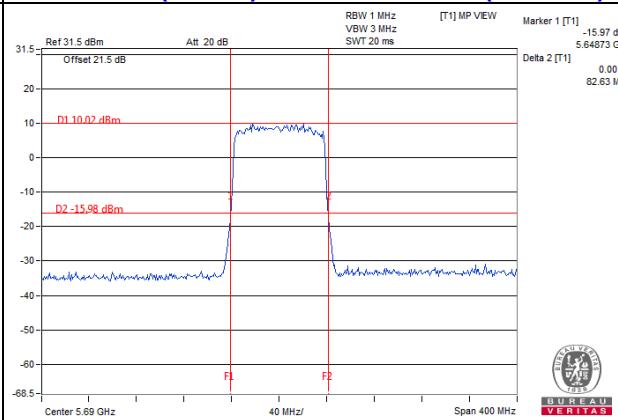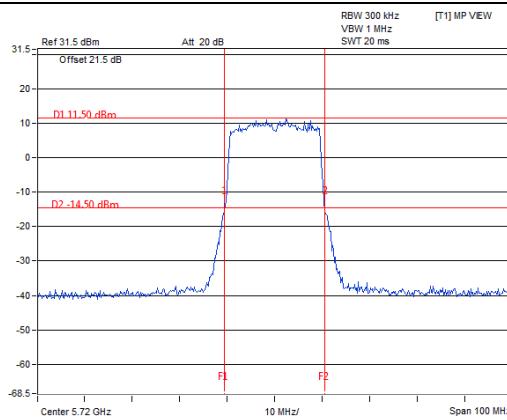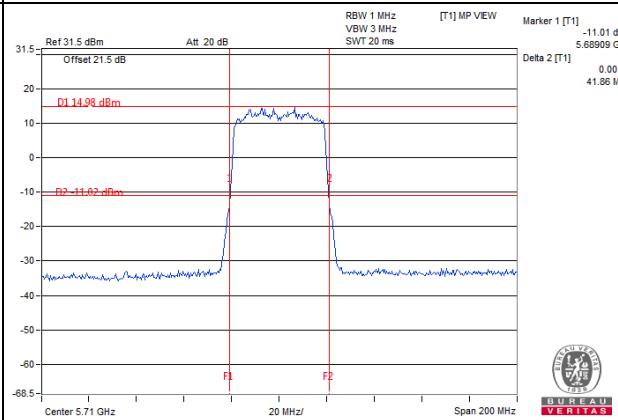802.11a_Chain 1 / CH144 (U-NII-2C)

802.11ac (VHT20)_Chain 1 / CH144 (U-NII-2C)

802.11ac (VHT40)_Chain 3 / CH142 (U-NII-2C)

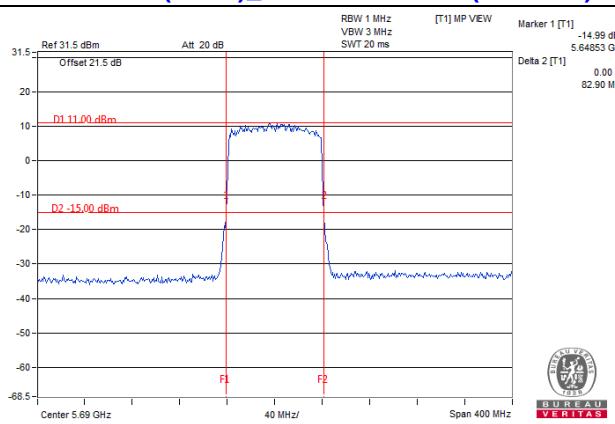802.11ac (VHT80)_Chain 3 / CH138 (U-NII-2C)

802.11ax (HE20)_Chain 3 / CH144 (U-NII-2C)

802.11ax (HE40)_Chain 3 / CH142 (U-NII-2C)

Note:

- For CH144 (U-NII-2C) = 5725MHz - Marker 1
- For CH142 (U-NII-2C) = 5725MHz - Marker 1
- For CH138 (U-NII-2C) = 5725MHz - Marker 1

802.11ax (HE80)_Chain 2 / CH138 (U-NII-2C)



Note:

For CH138 (U-NII-2C) = 5725MHz - Marker 1

4.4 Occupied Bandwidth Measurement

4.4.1 Test Setup



4.4.2 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.4.3 Test Procedure

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with resolution bandwidth in the range of 1% to 5% of the anticipated emission bandwidth, and a video bandwidth at least 3x the resolution bandwidth and set the detector to SAMPLE. The width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean power of a given emission.

4.4.4 Test Results

Non-Beamforming Mode

802.11a

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	16.80	16.68	16.68	16.68
116	5580	16.68	16.68	16.92	16.80
140	5700	16.80	16.68	16.92	16.80
144 (U-NII-2C Band)	5720	13.52	13.40	13.40	13.40
144 (U-NII-3 Band)	5720	3.28	3.28	3.40	3.28

802.11ax (HE20)

Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
100	5500	18.96	19.08	18.96	18.96
116	5580	18.96	18.84	19.08	18.96
140	5700	18.96	18.96	18.96	18.96
144 (U-NII-2C Band)	5720	14.60	14.48	14.48	14.48
144 (U-NII-3 Band)	5720	4.48	4.48	4.48	4.48

802.11ax (HE40)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
102	5510	38.16	38.16	38.16	38.88
110	5550	38.16	37.92	38.40	37.92
134	5670	37.92	38.16	37.92	38.16
142 (U-NII-2C Band)	5710	34.20	33.96	34.20	34.20
142 (U-NII-3 Band)	5710	3.96	3.96	3.96	3.96

802.11ax (HE80)


Channel	Channel Frequency (MHz)	Occupied Bandwidth (MHz)			
		Chain 0	Chain 1	Chain 2	Chain 3
106	5530	77.28	77.28	77.28	77.28
122	5610	77.76	77.28	77.28	77.28
138 (U-NII-2C Band)	5690	73.40	73.88	73.88	73.88
138 (U-NII-3 Band)	5690	3.40	3.40	3.40	3.40

Spectrum Plot of Max. Value


802.11a_Chain 2 / CH116

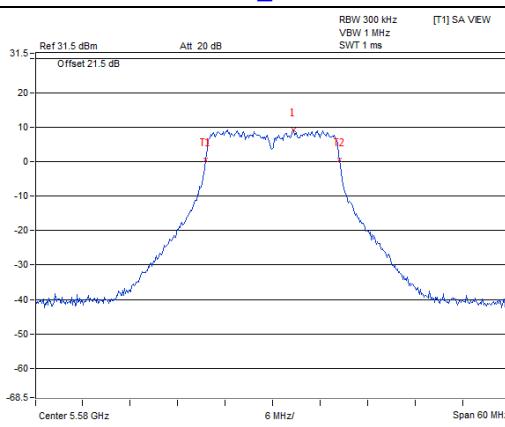


802.11ax (HE20)_Chain 1 / CH100

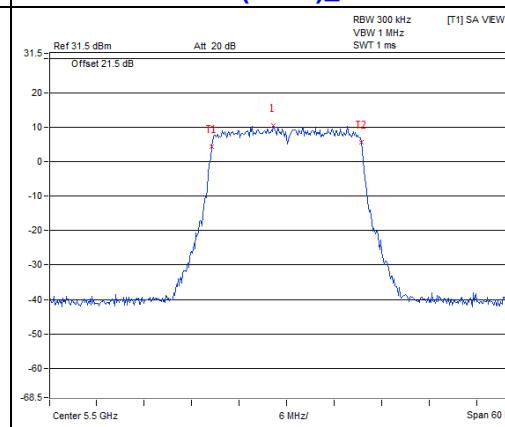

802.11ax (HE40)_Chain 3 / CH102

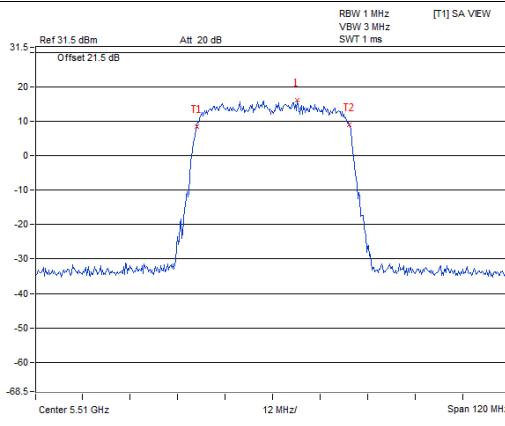

802.11ax (HE80)_Chain 0 / CH122

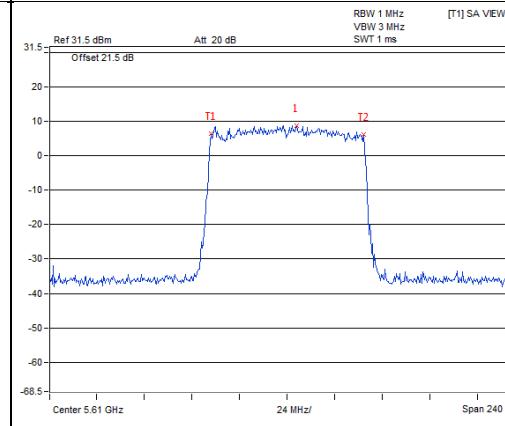


4.5 Peak Power Spectral Density Measurement

4.5.1 Limits of Peak Power Spectral Density Measurement

Operation Band	EUT Category		Limit
U-NII-1		Outdoor Access Point	17dBm/ MHz
		Fixed point-to-point Access Point	
		Indoor Access Point	
		Client device	11dBm/ MHz
U-NII-2A			11dBm/ MHz
U-NII-2C		✓	11dBm/ MHz
U-NII-3		✓	30dBm/ 500kHz

4.5.2 Test Setup



4.5.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.5.4 Test Procedure

For U-NII-2C band:

Using method SA-2

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 1 MHz, Set VBW \geq 3 MHz, Detector = RMS
3. Sweep time = auto, trigger set to "free run".
4. Trace average at least 100 traces in power averaging mode.
5. Record the max value and add 10 log (1/duty cycle)

For U-NII-3 band:

1. Set span to encompass the entire emission bandwidth (EBW) of the signal.
2. Set RBW = 300 kHz, Set VBW \geq 1 MHz, Detector = RMS
3. Use the peak marker function to determine the maximum power level in any 300 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 500 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(500\text{kHz}/300\text{kHz})$
5. Sweep time = auto, trigger set to "free run".
6. Trace average at least 100 traces in power averaging mode.
7. Record the max value and add 10 log (1/duty cycle)

4.5.5 Deviation from Test Standard

No deviation.

4.5.6 EUT Operating Condition

Same as Item 4.3.6.

4.5.7 Test Results

Non-Beamforming Mode

For U-NII-2C:

802.11a

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	-5.00	-1.06	-0.13	-0.63	0.97	5.65	11.00	Pass
116	5580	-1.36	-0.24	-1.79	-1.65	0.97	5.77	11.00	Pass
140	5700	-2.16	-3.88	0.79	1.66	0.97	6.63	11.00	Pass
144 (U-NII-2C Band)	5720	-3.43	-3.48	-0.87	1.77	0.97	6.05	11.00	Pass

- Note:
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - For U-NII-2C band: the directional gain = 4.89dBi < 6dBi, so the power density limit shall not be reduced.
 - For U-NII-3 band: the directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 - Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT20)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	2.90	2.94	3.79	4.55	0.27	9.89	11.00	Pass
116	5580	2.12	3.04	2.66	4.92	0.27	9.61	11.00	Pass
140	5700	2.41	4.09	3.23	3.92	0.27	9.75	11.00	Pass
144 (U-NII-2C Band)	5720	4.53	4.31	3.80	2.64	0.27	10.17	11.00	Pass

- Note:
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - For U-NII-2C band: the directional gain = 4.89dBi < 6dBi, so the power density limit shall not be reduced.
 - For U-NII-3 band: the directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 - Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT40)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	0.35	0.13	-0.22	1.78	0.25	6.85	11.00	Pass
110	5550	1.50	1.46	1.01	1.35	0.25	7.60	11.00	Pass
134	5670	0.00	0.40	1.25	1.25	0.25	7.03	11.00	Pass
142 (U-NII-2C Band)	5710	0.29	1.53	1.64	1.45	0.25	7.53	11.00	Pass

- Note:
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - For U-NII-2C band: the directional gain = 4.89dBi < 6dBi, so the power density limit shall not be reduced.
 - For U-NII-3 band: the directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 - Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	-2.92	-1.88	-2.35	-2.09	0.17	3.90	11.00	Pass
122	5610	-3.94	-2.18	-2.87	-2.11	0.17	3.48	11.00	Pass
138 (U-NII-2C Band)	5690	-2.76	-2.48	-1.58	-2.30	0.17	3.93	11.00	Pass

- Note:
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - For U-NII-2C band: the directional gain = 4.89dBi < 6dBi, so the power density limit shall not be reduced.
 - For U-NII-3 band: the directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 - Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
100	5500	2.94	4.12	3.42	2.67	0.22	9.56	11.00	Pass
116	5580	2.91	3.62	3.27	2.34	0.22	9.30	11.00	Pass
140	5700	4.20	1.59	4.44	3.51	0.22	9.81	11.00	Pass
144 (U-NII-2C Band)	5720	4.15	4.03	3.88	3.60	0.22	10.16	11.00	Pass

- Note:
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - For U-NII-2C band: the directional gain = 4.89dBi < 6dBi, so the power density limit shall not be reduced.
 - For U-NII-3 band: the directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 - Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE40)


Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
102	5510	0.57	-0.35	1.49	1.90	0.22	7.23	11.00	Pass
110	5550	1.01	1.51	1.18	1.31	0.22	7.50	11.00	Pass
134	5670	0.95	0.34	1.17	0.83	0.22	7.07	11.00	Pass
142 (U-NII-2C Band)	5710	1.07	1.28	0.94	1.50	0.22	7.44	11.00	Pass

- Note:
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - For U-NII-2C band: the directional gain = 4.89dBi < 6dBi, so the power density limit shall not be reduced.
 - For U-NII-3 band: the directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 - Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE80)


Chan.	Chan. Freq. (MHz)	PSD W/O Duty Factor (dBm/MHz)				Duty Factor (dB)	Total PSD With Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3				
106	5530	-3.54	-1.26	-1.85	-3.00	0.18	3.88	11.00	Pass
122	5610	-3.14	-2.46	-1.53	-3.10	0.18	3.69	11.00	Pass
138 (U-NII-2C Band)	5690	-2.42	-2.21	-1.90	-1.59	0.18	4.18	11.00	Pass

- Note:
- Method a) of power density measurement of KDB 662911 is using for calculating total power density. Total power density is summing entire spectra across corresponding frequency bins on the various outputs by computer.
 - For U-NII-2C band: the directional gain = 4.89dBi < 6dBi, so the power density limit shall not be reduced.
 - For U-NII-3 band: the directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 - Refer to section 3.3 for duty cycle spectrum plot.

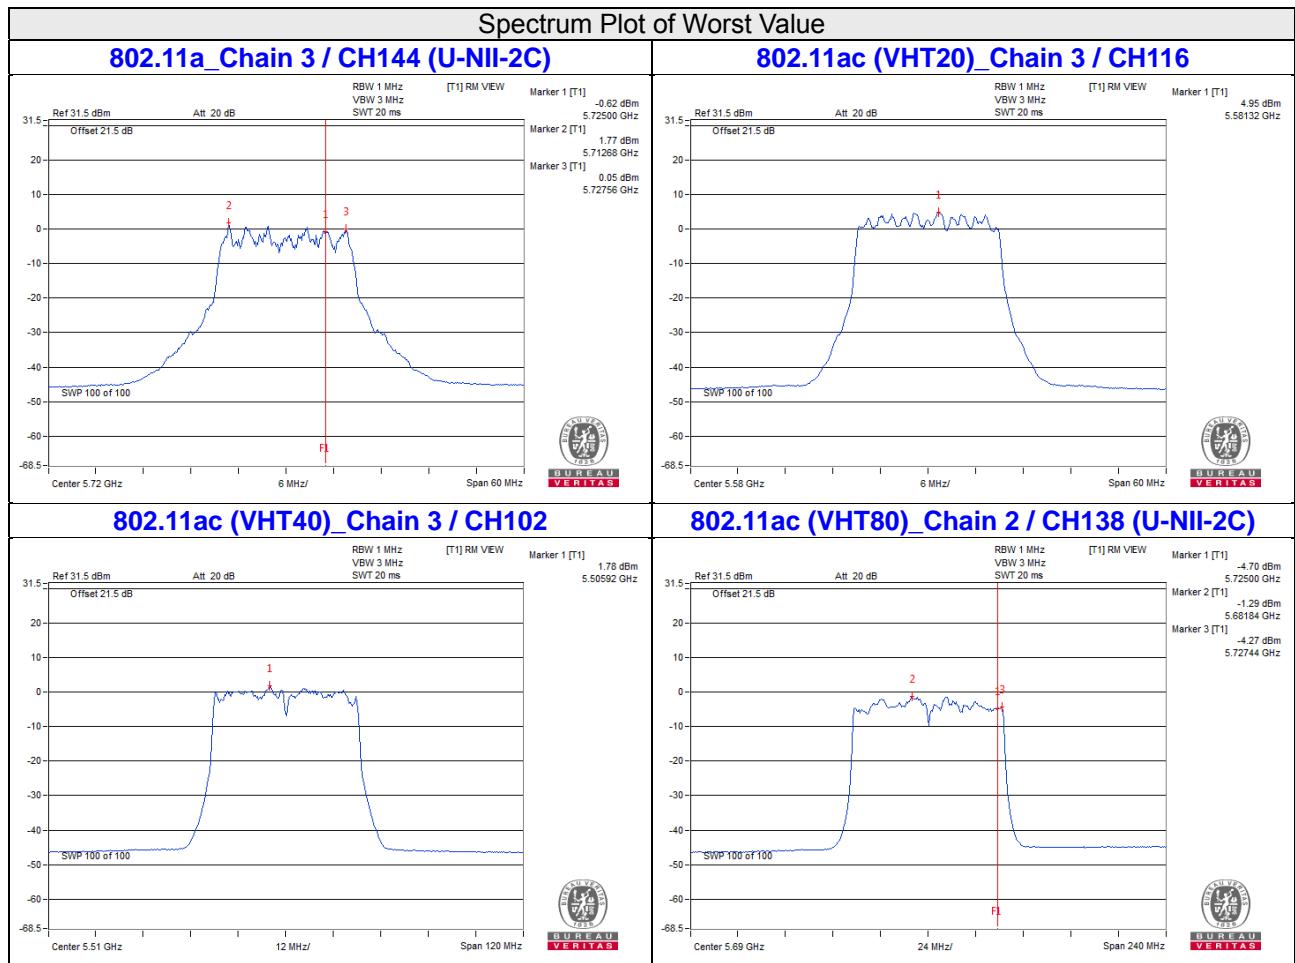


Spectrum Plot of Worst Value


802.11ax (HE20)_Chain 2 / CH140

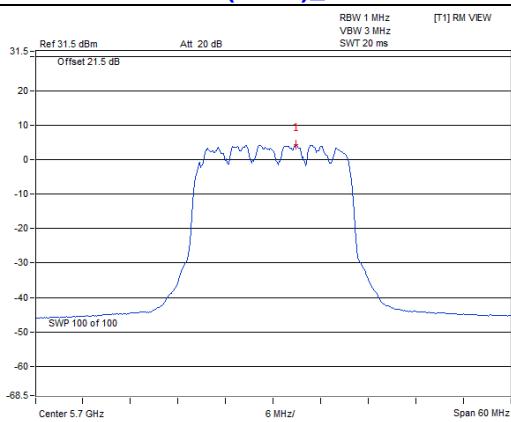

802.11ax (HE40)_Chain 3 / CH102

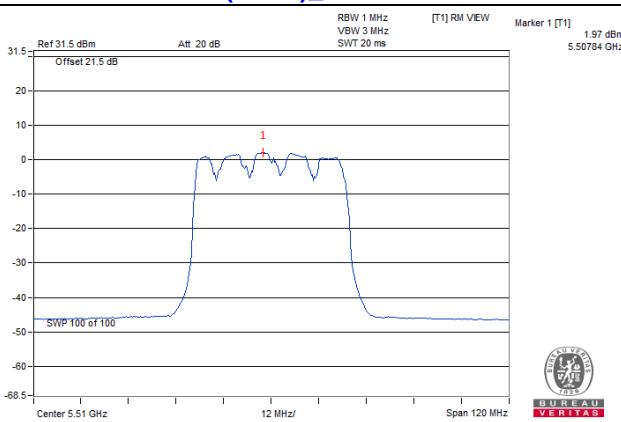

802.11ax (HE80)_Chain 1 / CH106

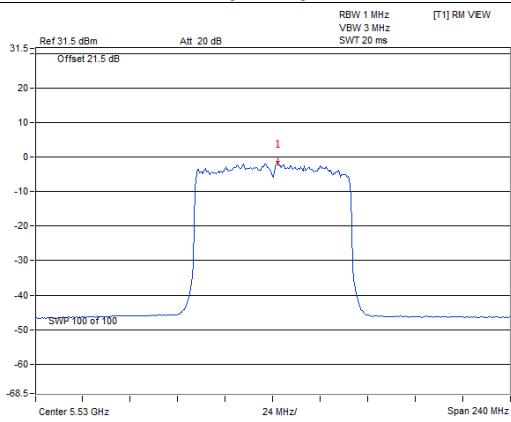

For U-NII-3:
802.11a

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		dBm/300kHz	dBm/500kHz		
144 (U-NII-3 Band)	5720	-6.05	-9.61	-8.68	-9.72	0.97	-1.25	0.97	30.00	Pass

Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT20)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		dBm/300kHz	dBm/500kHz		
144 (U-NII-3 Band)	5720	-6.06	-5.94	-5.84	-5.39	0.27	0.49	2.71	30.00	Pass

Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT40)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		dBm/300kHz	dBm/500kHz		
142 (U-NII-3 Band)	5710	-8.91	-9.22	-8.63	-9.58	0.25	-2.80	-0.58	30.00	Pass

Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ac (VHT80)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		dBm/300kHz	dBm/500kHz		
138 (U-NII-3 Band)	5690	-13.61	-13.87	-13.32	-14.25	0.17	-7.56	-5.34	30.00	Pass

Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE20)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		dBm/300kHz	dBm/500kHz		
144 (U-NII-3 Band)	5720	-6.48	-6.07	-6.59	-6.66	0.22	-0.21	2.01	30.00	Pass

Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE40)


Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		dBm/300kHz	dBm/500kHz		
142 (U-NII-3 Band)	5710	-9.71	-9.48	-9.30	-9.51	0.22	-3.26	-1.04	30.00	Pass


Note: 1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

802.11ax (HE80)

Chan.	Freq. (MHz)	PSD W/O Duty Factor (dBm/300kHz)				Duty Factor (dB)	Total PSD With Duty Factor		Limit (dBm/500kHz)	Pass /Fail
		Chain 0	Chain 1	Chain 2	Chain 3		dBm/300kHz	dBm/500kHz		
138 (U-NII-3 Band)	5690	-12.52	-13.46	-13.47	-13.78	0.18	-7.08	-4.86	30.00	Pass

- Note:
1. Method b) Measure and sum spectral maxima across the outputs of KDB 662911 is using for calculating total power density.
 2. The directional gain = 5.09dBi < 6dBi, so the power density limit shall not be reduced.
 3. Refer to section 3.3 for duty cycle spectrum plot.

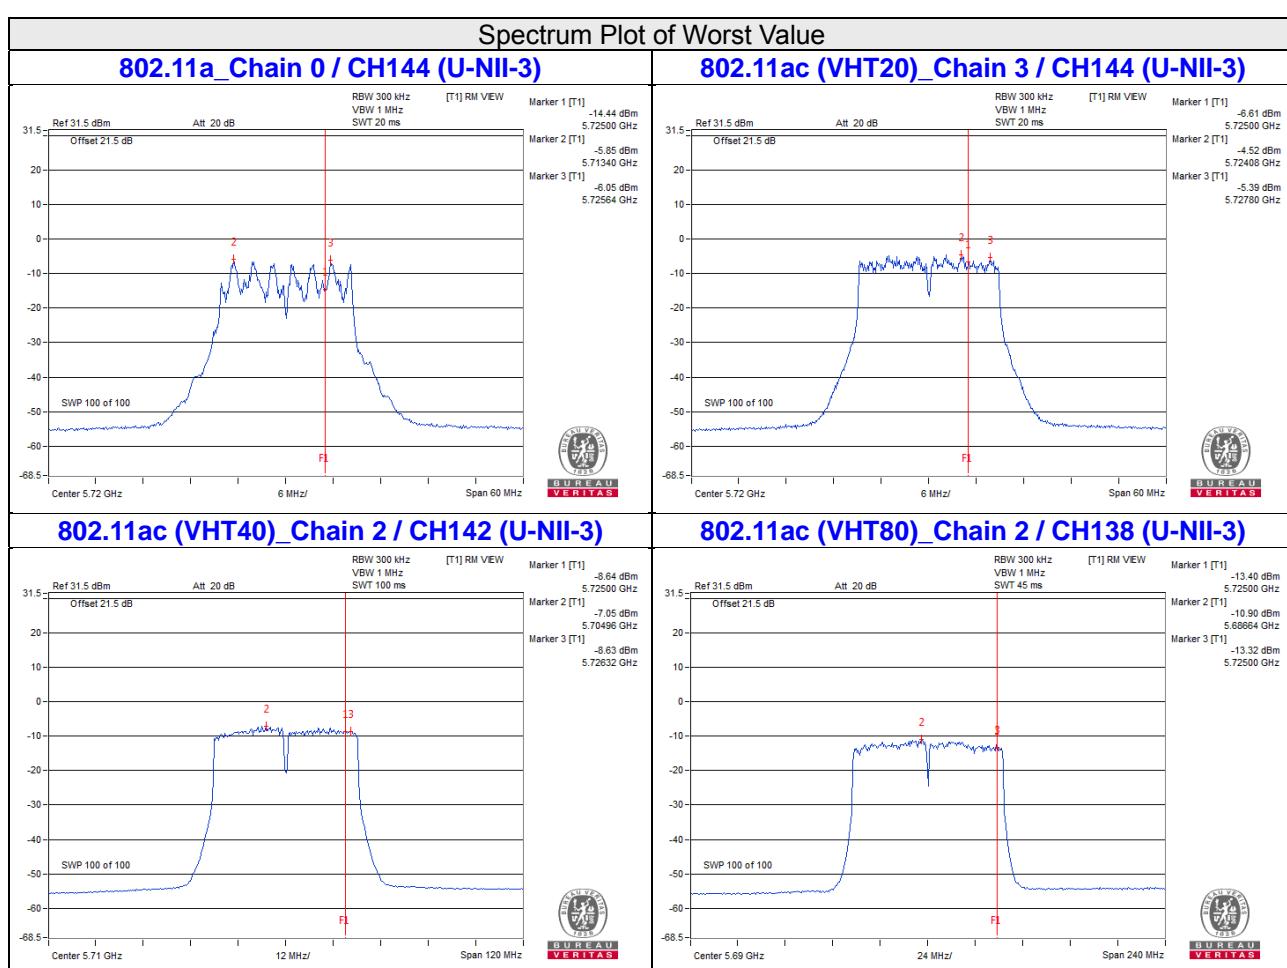

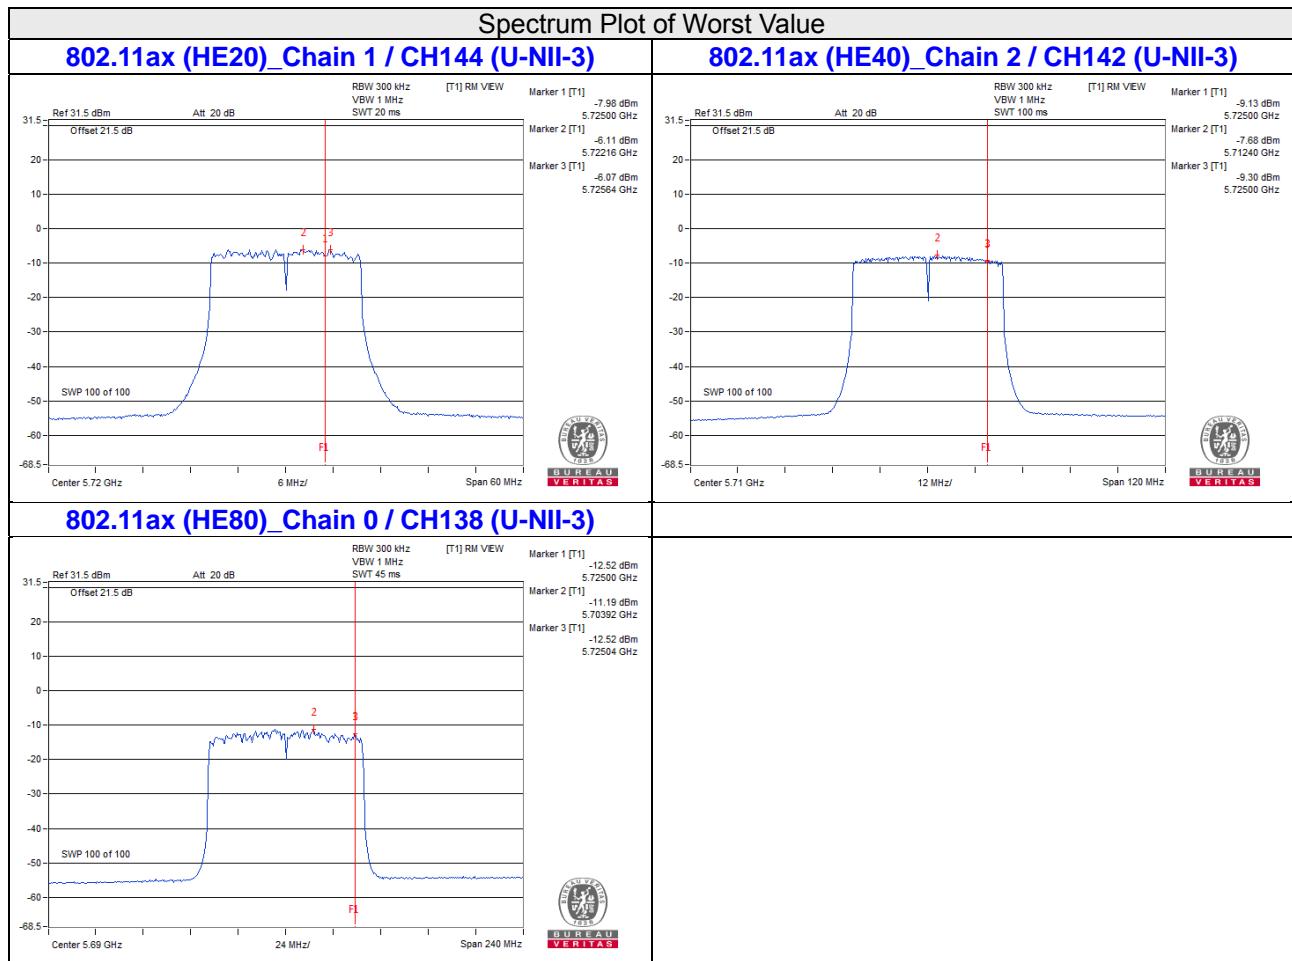


4.6 Frequency Stability Measurement

4.6.1 Limits of Frequency Stability Measurement

The frequency of the carrier signal shall be maintained within band of operation

4.6.2 Test Setup

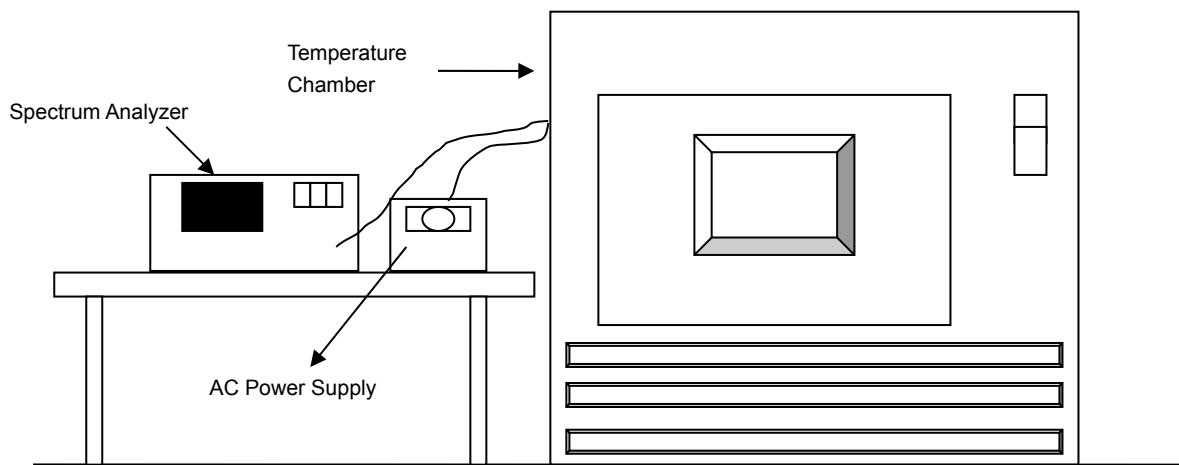

4.6.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.6.4 Test Procedure

- a. The EUT was placed inside the environmental test chamber and powered by nominal AC voltage.
- b. Turn the EUT on and couple its output to a spectrum analyzer.
- c. Turn the EUT off and set the chamber to the highest temperature specified.
- d. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT on and measure the operating frequency after 2, 5, and 10 Minutes.
- e. Repeat step (d) with the temperature chamber set to the next desired temperature until measurements down to the lowest specified temperature have been completed.
- f. The test chamber was allowed to stabilize at +20 degree C for a minimum of 30 Minutes. The supply voltage was then adjusted on the EUT from 85% to 115% and the frequency record.

4.6.5 Deviation from Test Standard

No deviation.

4.6.6 EUT Operating Condition

Set the EUT transmit at un-modulation mode to test frequency stability.

4.6.7 Test Results

Frequency Stability Versus Temp.

Operating Frequency: 5500 MHz

TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
50	120	5499.9996	Pass	5499.9988	Pass	5499.9987	Pass	5499.9992	Pass
40	120	5500.0049	Pass	5500.0044	Pass	5500.0072	Pass	5500.0056	Pass
30	120	5500.0198	Pass	5500.0169	Pass	5500.0172	Pass	5500.0153	Pass
20	120	5499.9765	Pass	5499.9758	Pass	5499.9775	Pass	5499.9766	Pass
10	120	5499.9916	Pass	5499.9922	Pass	5499.9909	Pass	5499.9915	Pass
0	120	5499.9756	Pass	5499.9738	Pass	5499.9771	Pass	5499.9784	Pass
-10	120	5499.9858	Pass	5499.9826	Pass	5499.986	Pass	5499.9844	Pass
-20	120	5499.974	Pass	5499.9766	Pass	5499.9718	Pass	5499.9738	Pass
-30	120	5500.0165	Pass	5500.0134	Pass	5500.0176	Pass	5500.0135	Pass

Frequency Stability Versus Voltage

Operating Frequency: 5500 MHz


TEMP. (°C)	Power Supply (Vac)	0 Minute		2 Minutes		5 Minutes		10 Minutes	
		Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail	Measured Frequency (MHz)	Pass/Fail
20	138	5499.9768	Pass	5499.9761	Pass	5499.9785	Pass	5499.9759	Pass
	120	5499.9765	Pass	5499.9758	Pass	5499.9775	Pass	5499.9766	Pass
	102	5499.9772	Pass	5499.9762	Pass	5499.9767	Pass	5499.9759	Pass

4.7 6dB Bandwidth Measurement

4.7.1 Limits of 6dB Bandwidth Measurement

The minimum of 6dB Bandwidth Measurement is 0.5MHz.

4.7.2 Test Setup



4.7.3 Test Instruments

Refer to section 4.1.2 to get information of above instrument.

4.7.4 Test Procedure

MEASUREMENT PROCEDURE REF

- a. Set resolution bandwidth (RBW) = 100kHz
- b. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
- c. Trace mode = max hold.
- d. Sweep = auto couple.
- e. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.7.5 Deviation from Test Standard

No deviation.

4.7.6 EUT Operating Condition

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.

4.7.7 Test Results

Non-Beamforming Mode

802.11a

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
144 (U-NII-3 Band)	5720	3.21	3.18	3.20	3.19	0.5	Pass

802.11ax (HE20)


Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
144 (U-NII-3 Band)	5720	4.47	4.44	4.50	4.47	0.5	Pass

802.11ax (HE40)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
142 (U-NII-3 Band)	5710	3.86	4.02	4.04	3.96	0.5	Pass

802.11ax (HE80)

Channel	Frequency (MHz)	6dB Bandwidth (MHz)				Minimum Limit (MHz)	Pass / Fail
		Chain 0	Chain 1	Chain 2	Chain 3		
138 (U-NII-3 Band)	5690	4.04	2.77	3.94	3.49	0.5	Pass

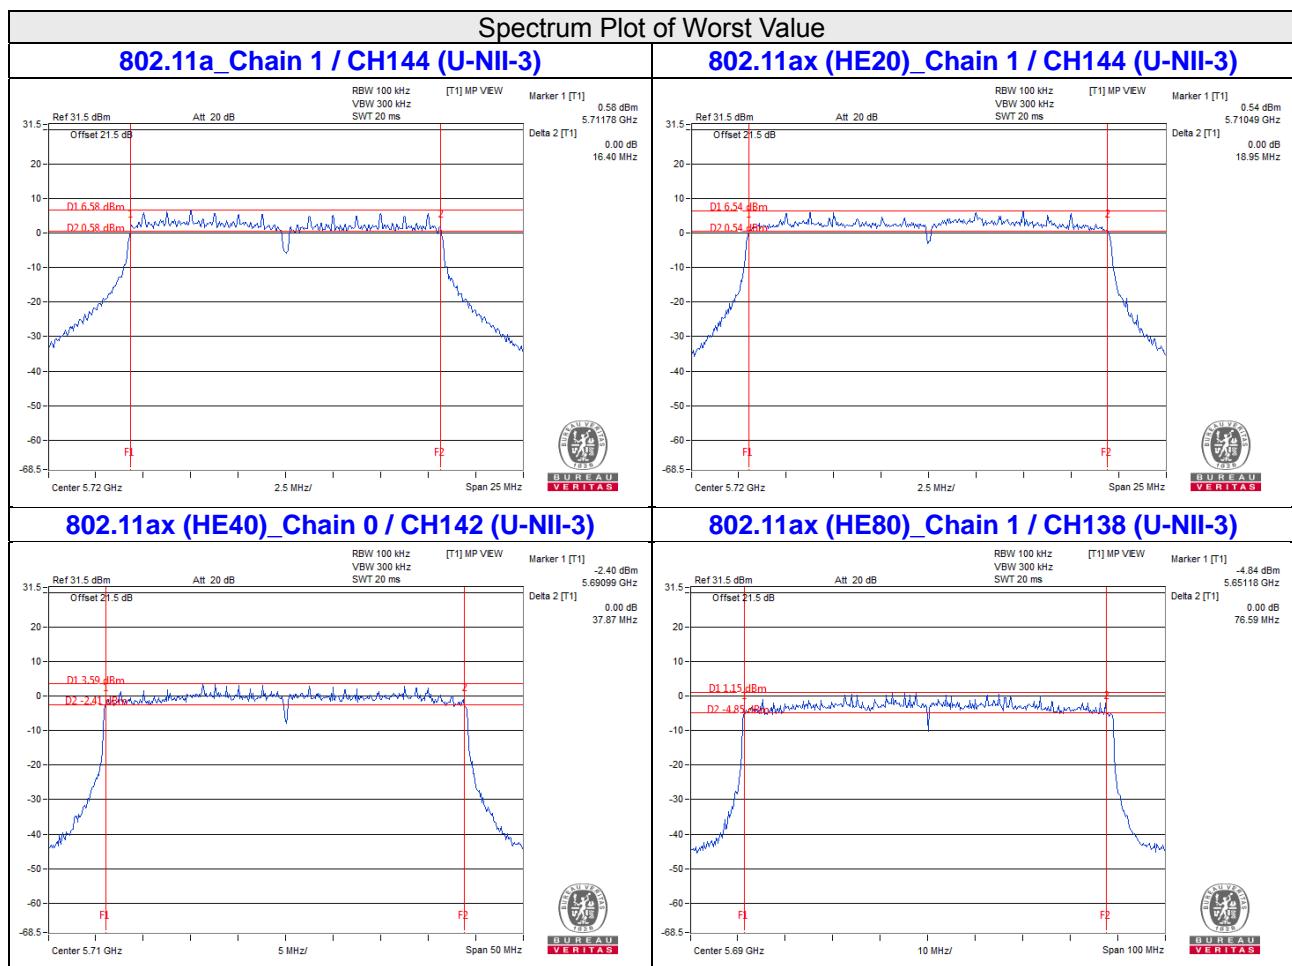

Note: The 6dB bandwidth above 5725MHz = Marker 1 + Delta 2 - 5725MHz

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565
Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232
Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---