



Middle channel: n261-BW:100MHz-1CC-BPSK-Beam ID 147 (40 GHz to 50 GHz)

20RB22-Horizontal Polarization

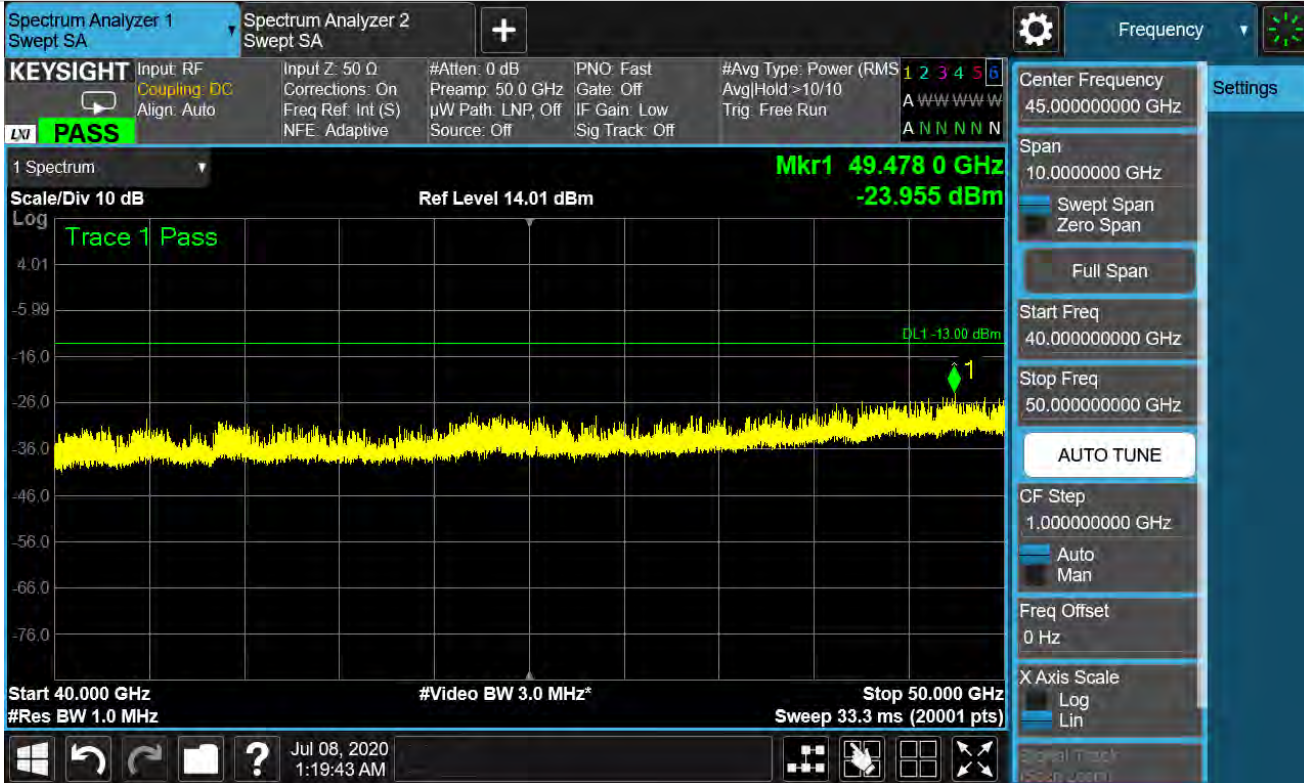


20RB22-Vertical Polarization

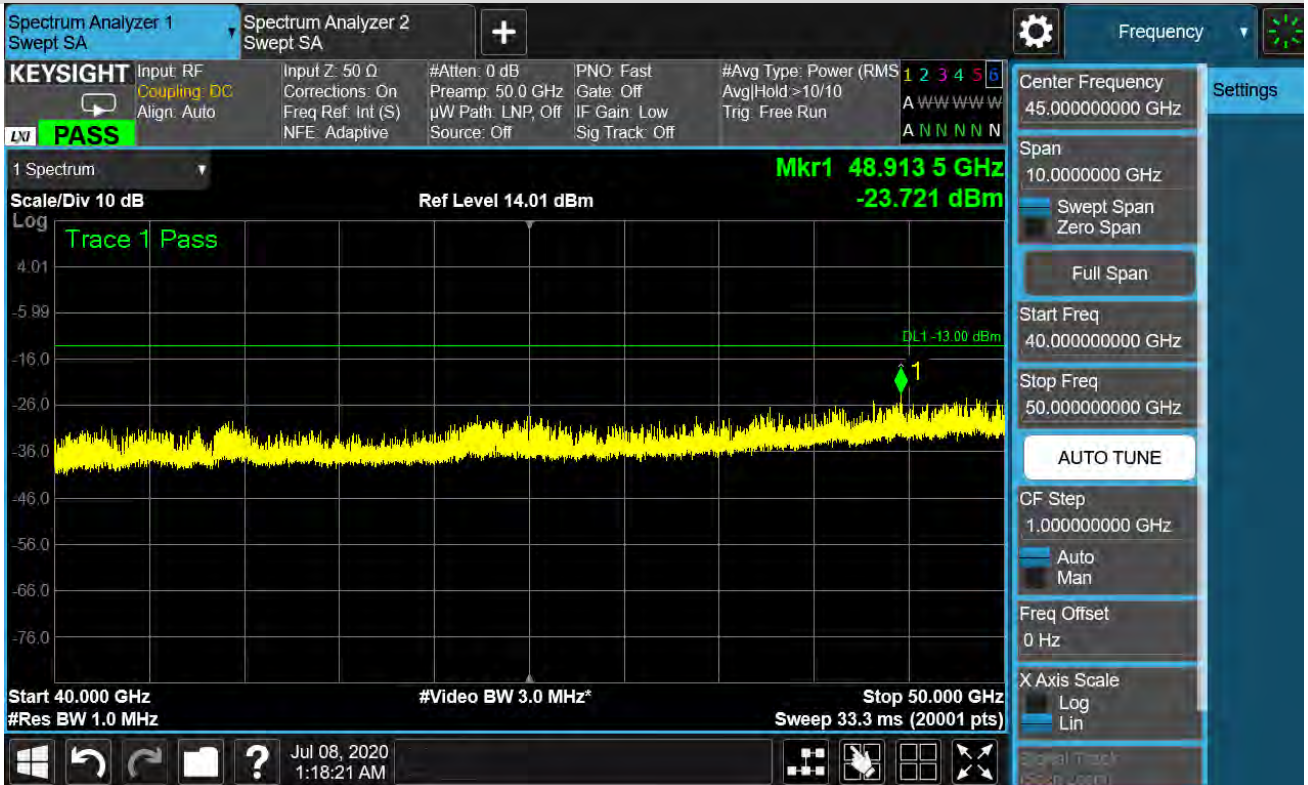


### High channel: n261-BW:100MHz-1CC-BPSK-Beam ID 147 (40 GHz to 50 GHz)

#### 20RB22-Horizontal Polarization

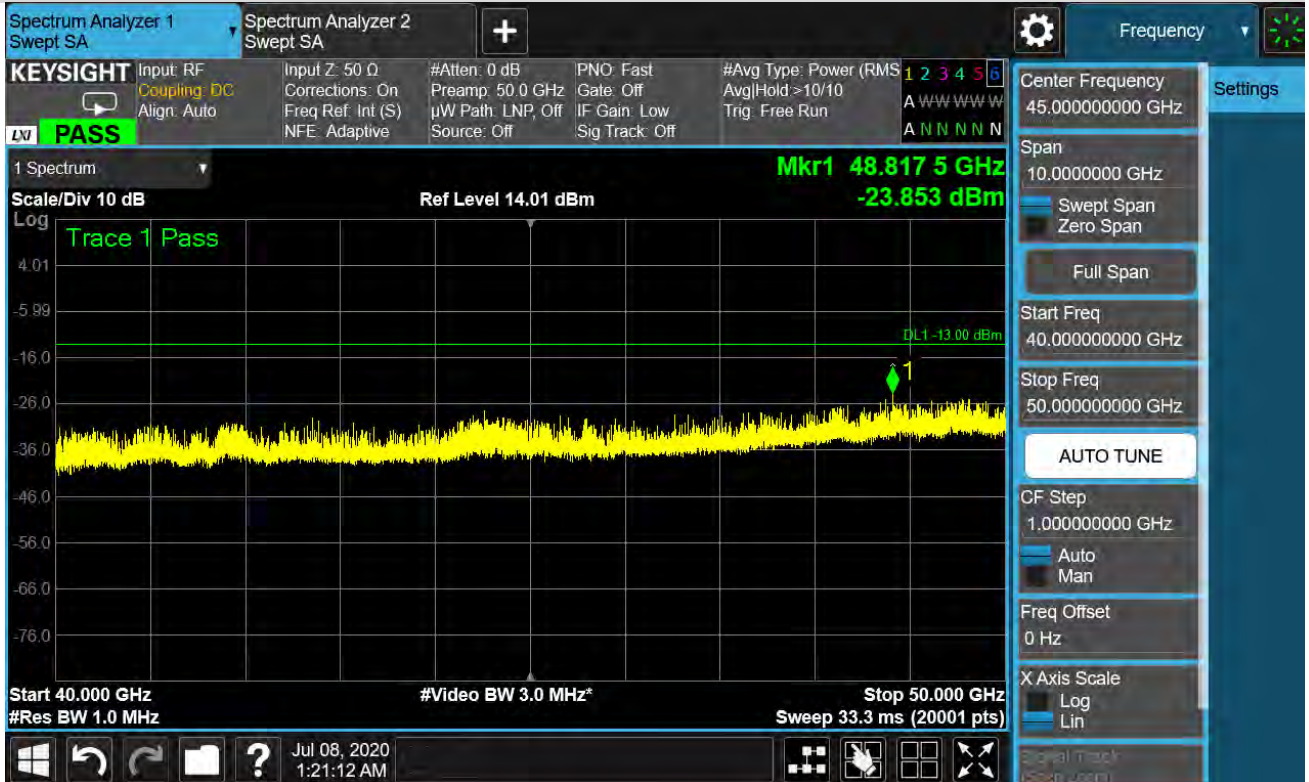

#### 20RB22-Vertical Polarization

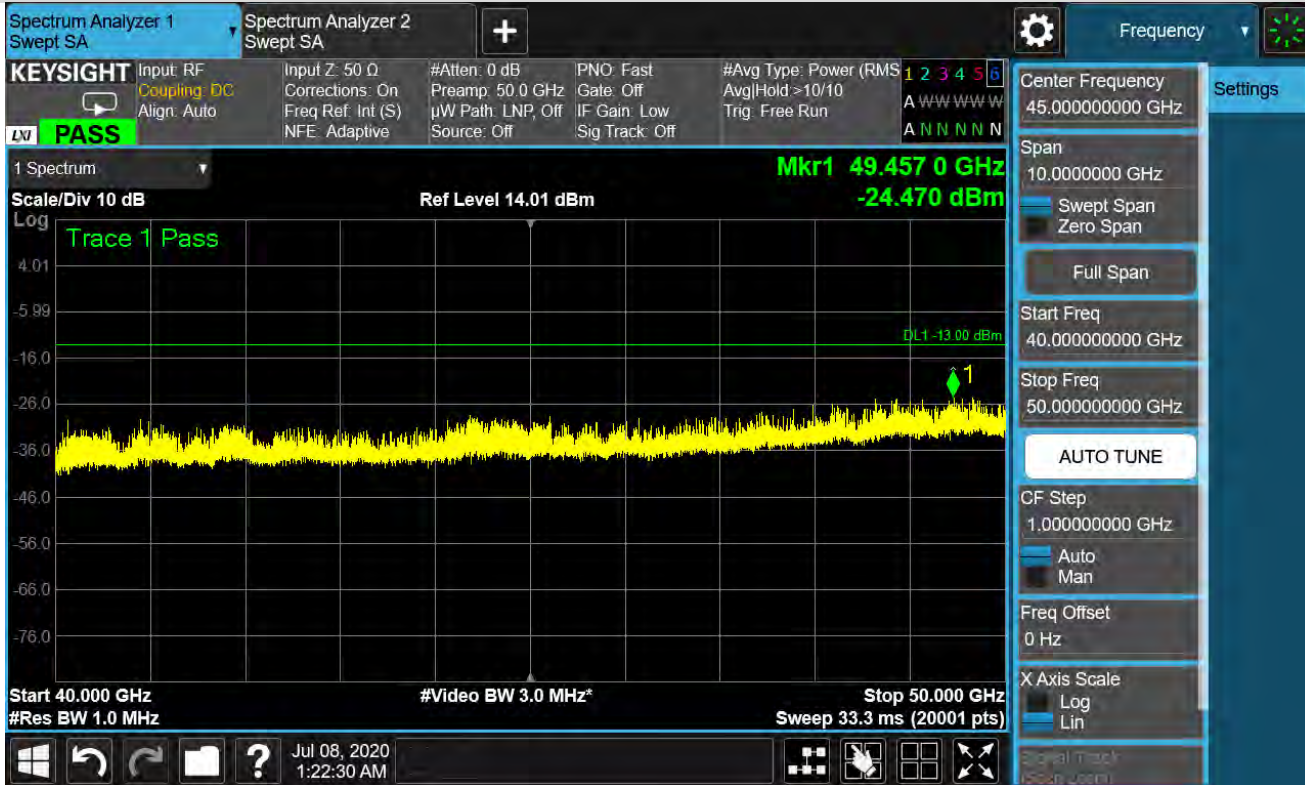




Low channel: n261-BW:100MHz-1CC-BPSK-Beam ID 19+147 (40 GHz to 50 GHz)

20RB22-Horizontal Polarization




20RB22-Vertical Polarization

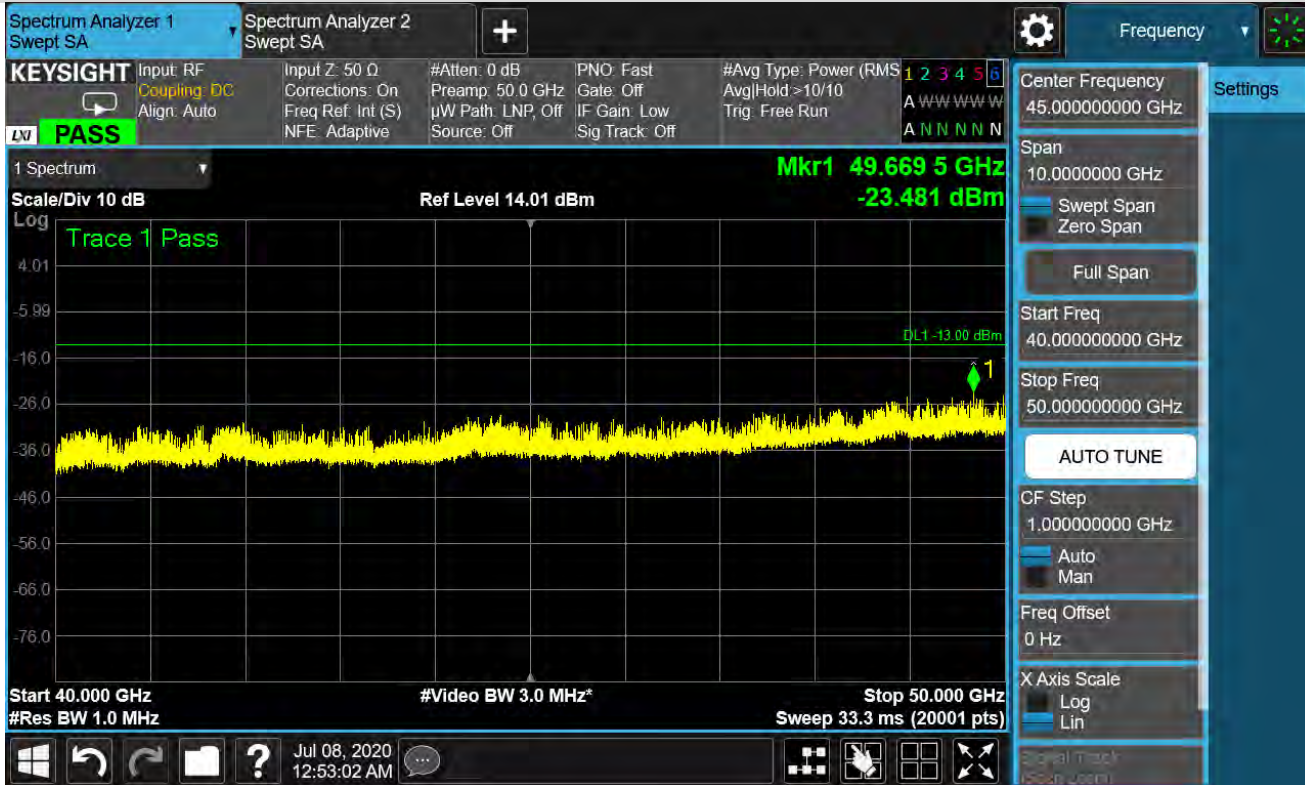

Middle channel: n261-BW:100MHz-1CC-BPSK-Beam ID 19+147 (40 GHz to 50 GHz)

20RB22-Horizontal Polarization

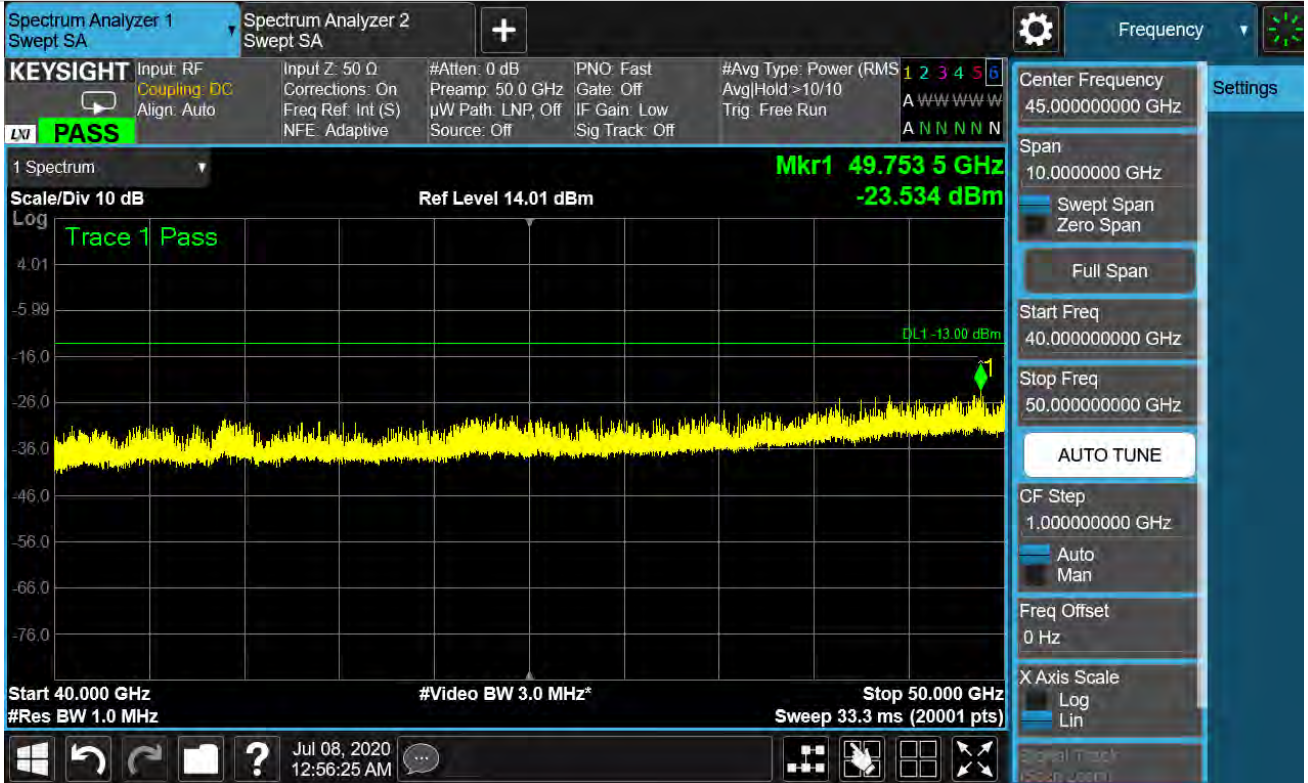


20RB22-Vertical Polarization






### High channel: n261-BW:100MHz-1CC-BPSK-Beam ID 19+147 (40 GHz to 50 GHz)

#### 20RB22-Horizontal Polarization

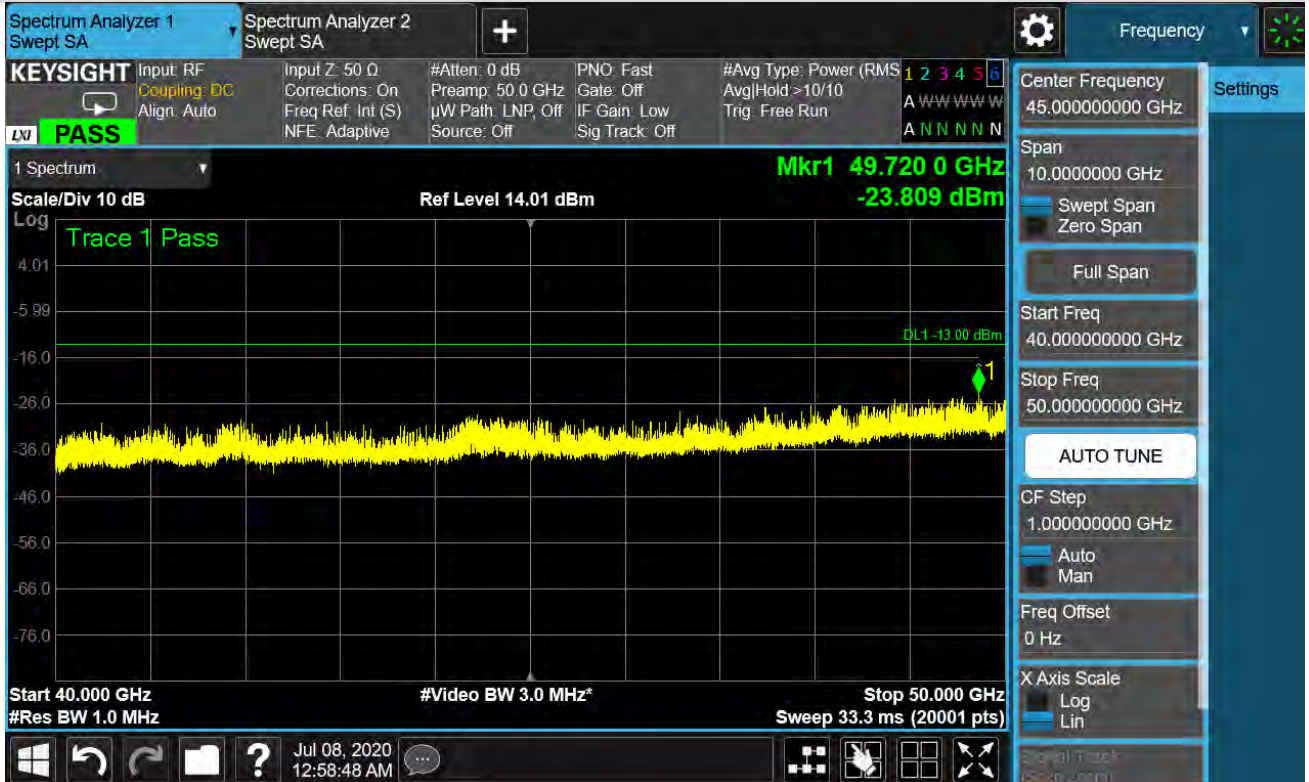

#### 20RB22-Vertical Polarization

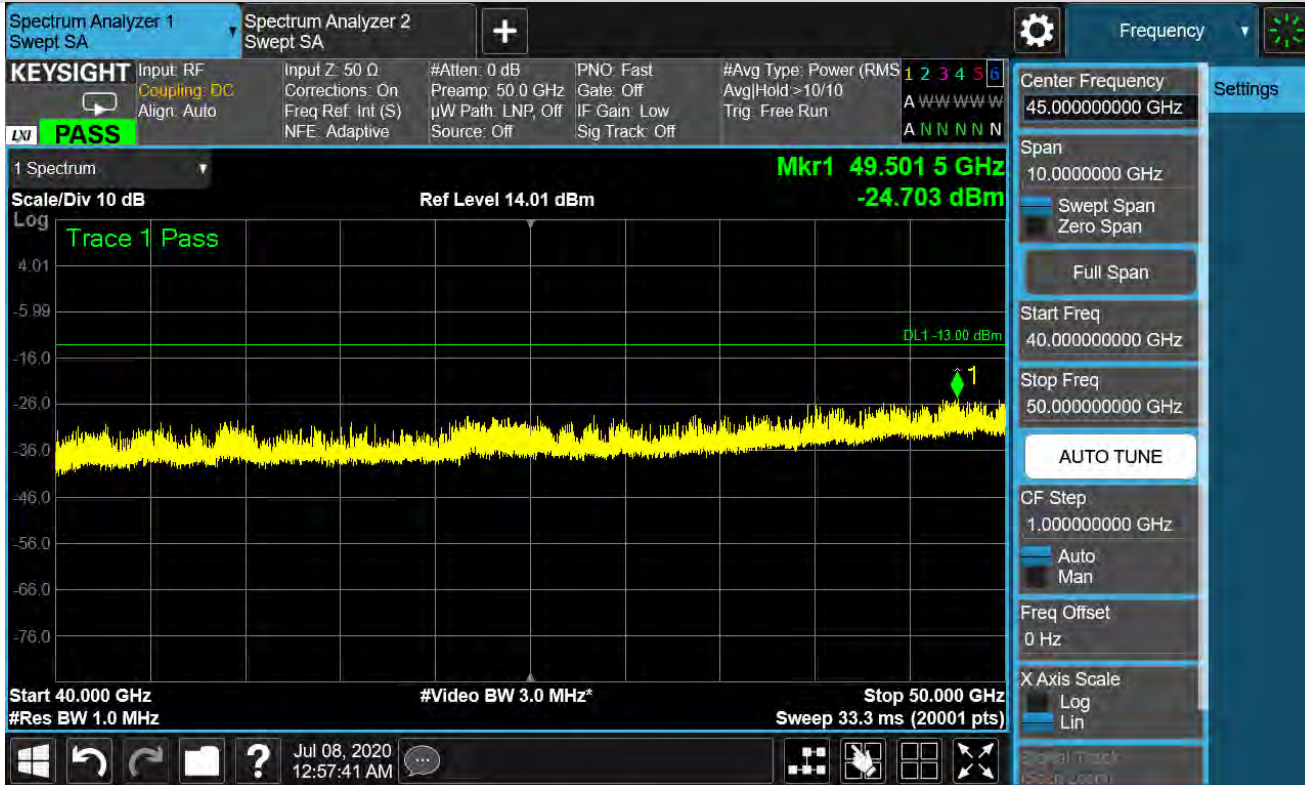


## n261:2CC-BW50MHz-RSE 40GHz to 50GHz

Low channel: n261-BW:50MHz-2CC-QPSK-Beam ID 148 (40 GHz to 50 GHz)

### Full RB-Horizontal Polarization




### Full RB-Vertical Polarization

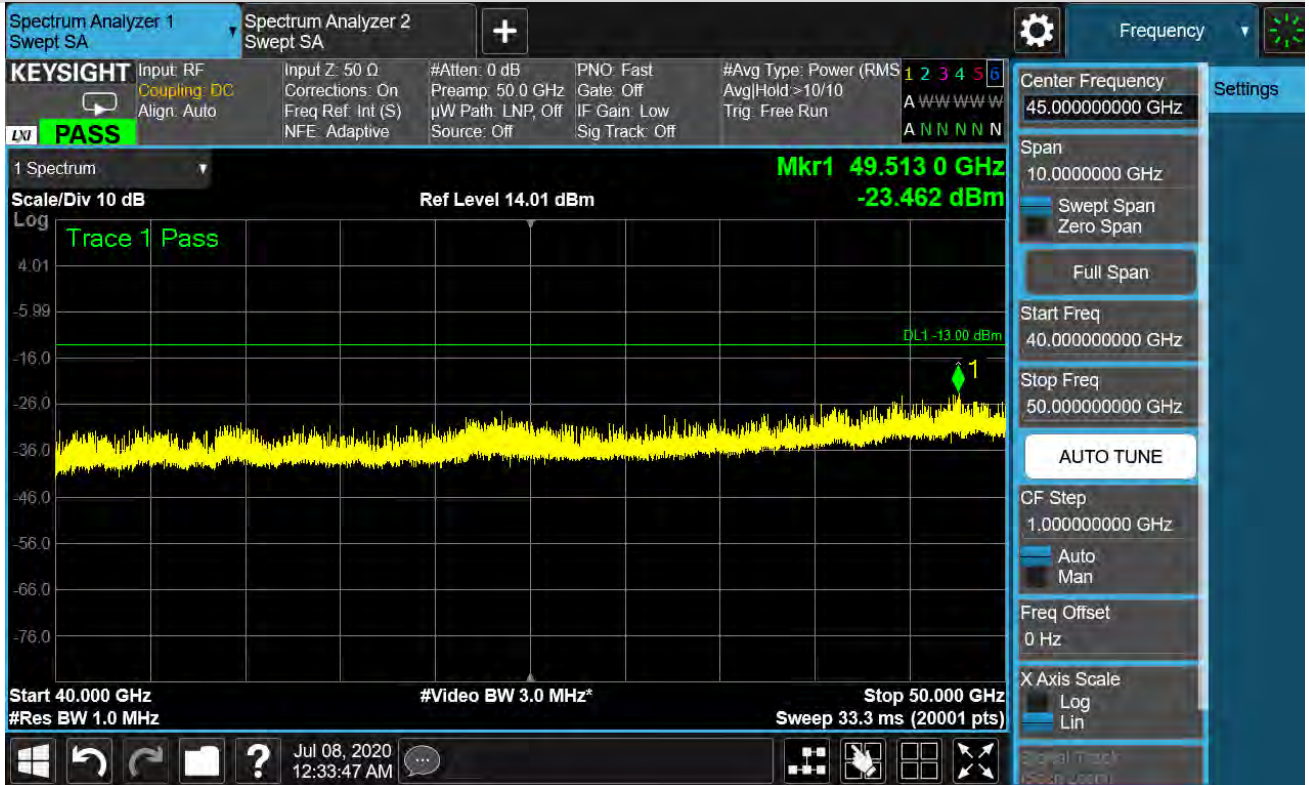




Middle channel: n261-BW:50MHz-2CC-QPSK-Beam ID 148 (40 GHz to 50 GHz)

Full RB-Horizontal Polarization

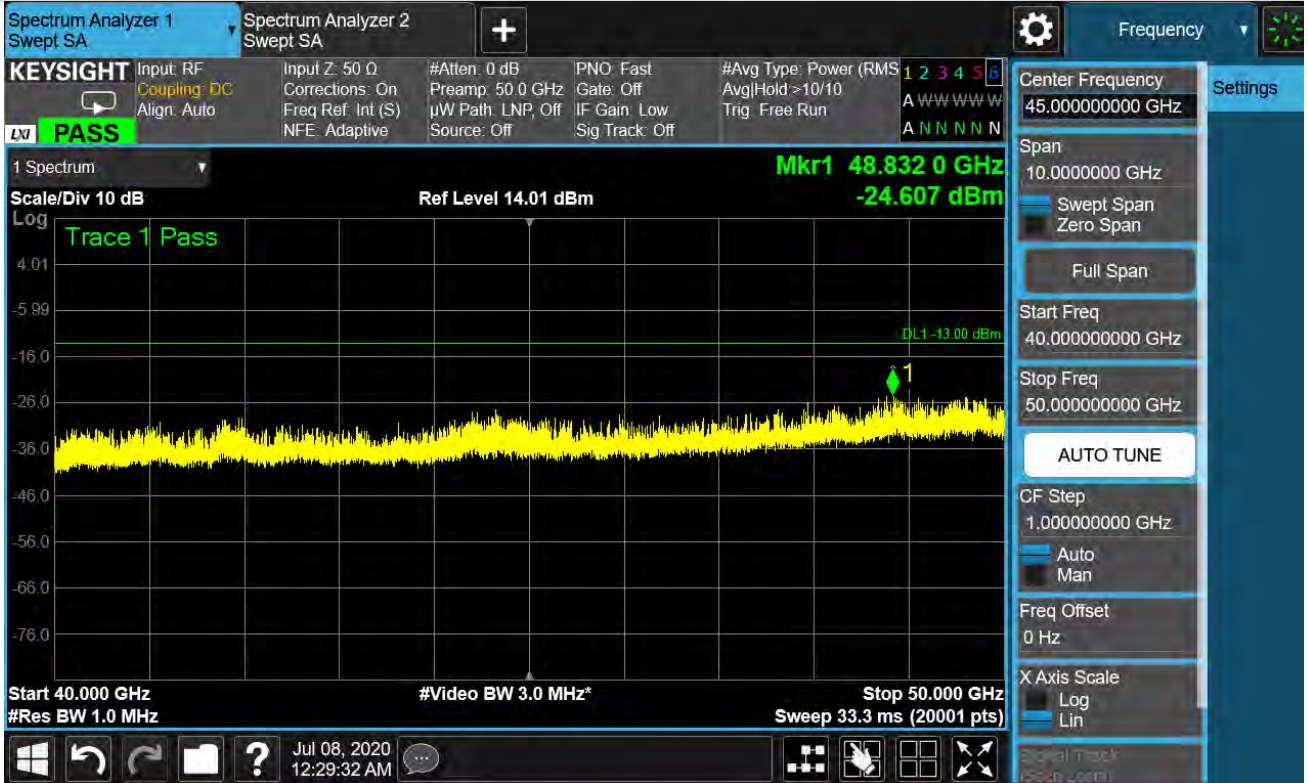

Full RB-Vertical Polarization

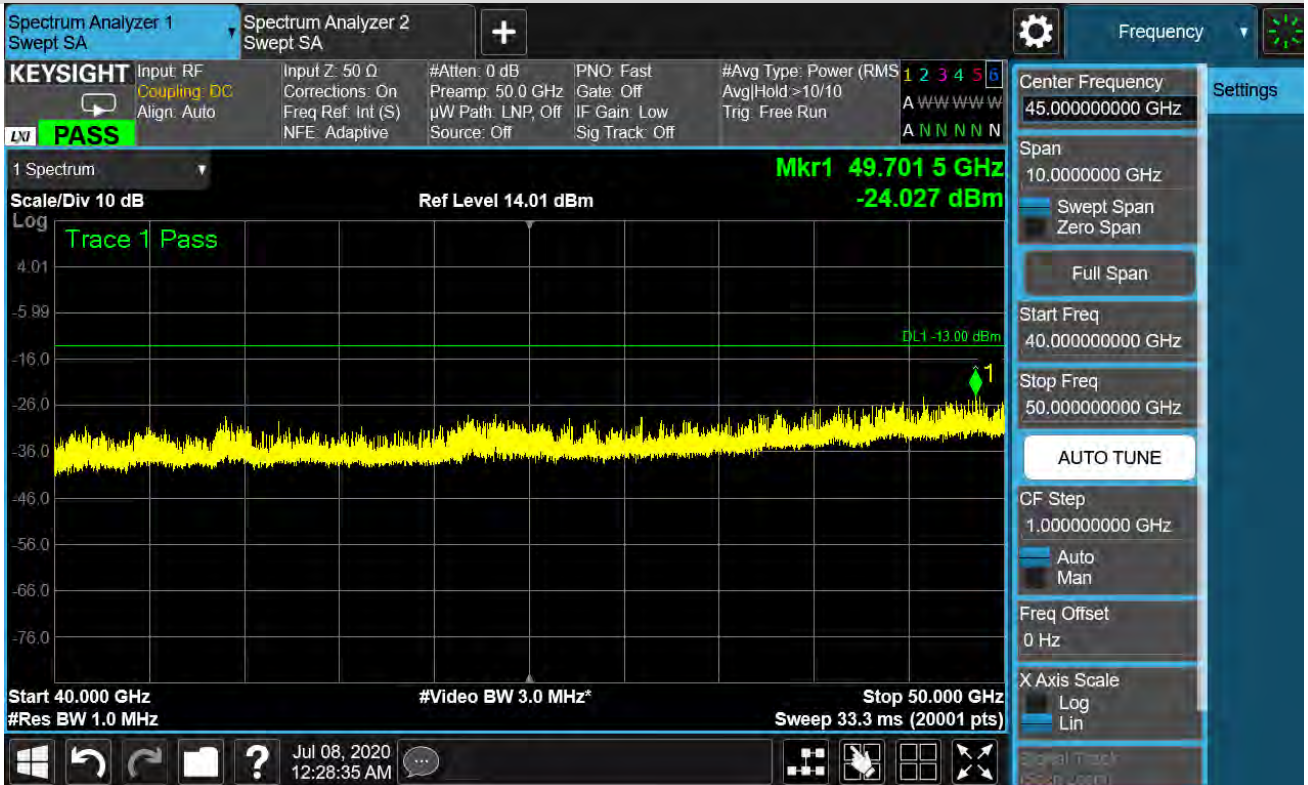


High channel: n261-BW:50MHz-2CC-QPSK-Beam ID 148 (40 GHz to 50 GHz)

Full RB-Horizontal Polarization



Full RB-Vertical Polarization

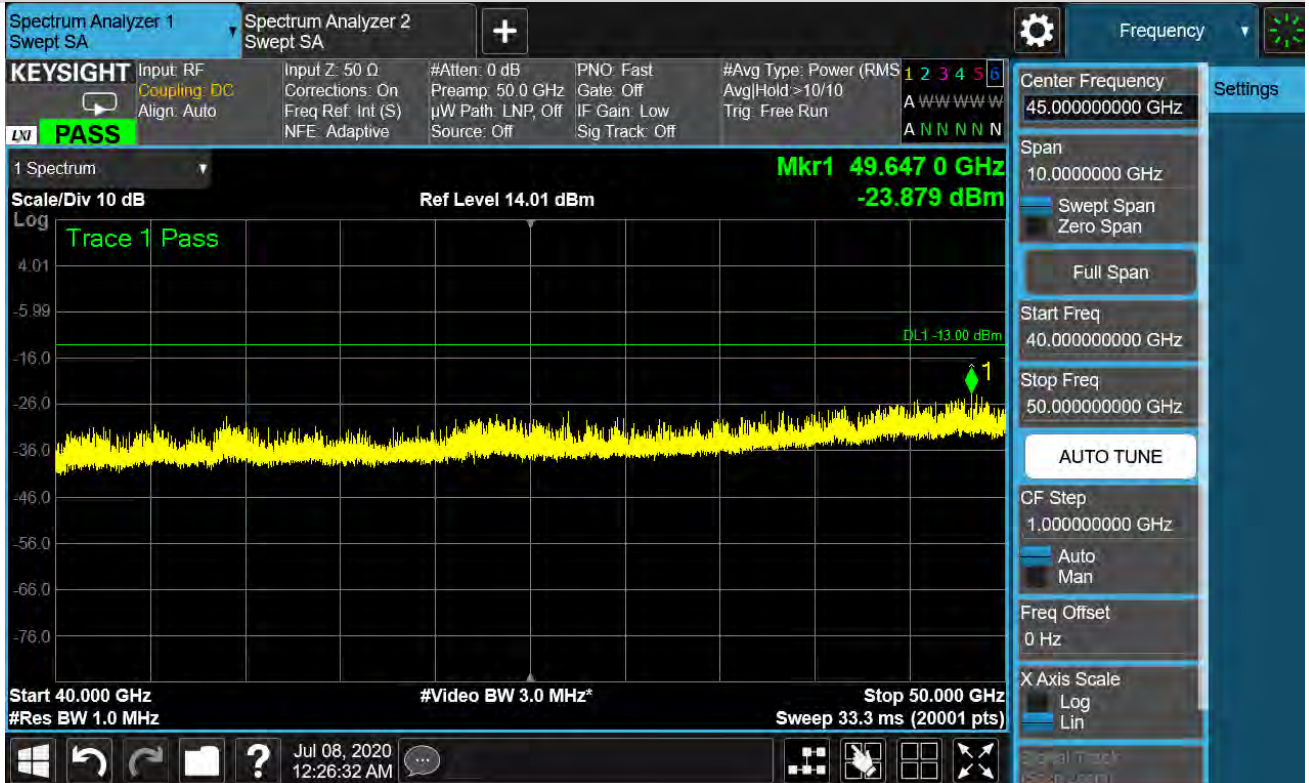





## n261:2CC-BW100MHz-RSE 40GHz to 50GHz

Low channel: n261-BW:100MHz-2CC-QPSK-Beam ID 19 (40 GHz to 50 GHz)

### Full RB-Horizontal Polarization

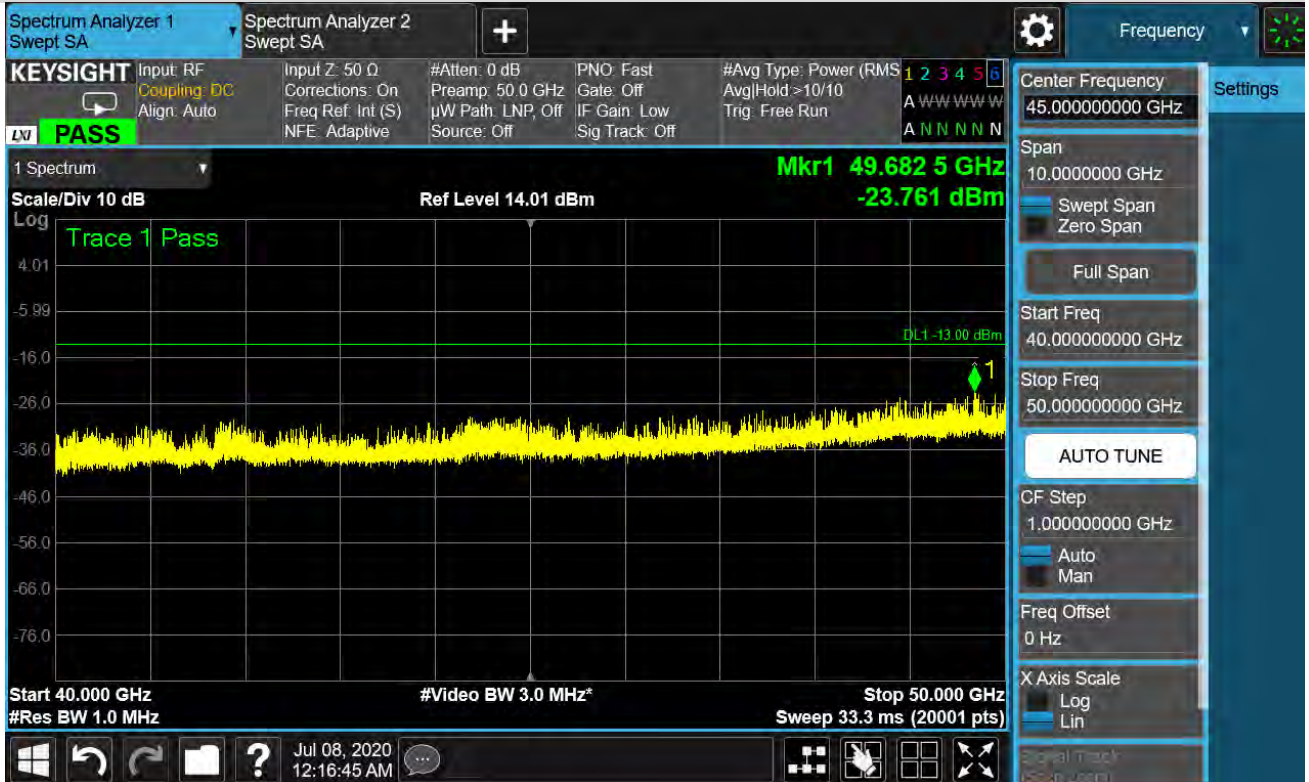


### Full RB-Vertical Polarization

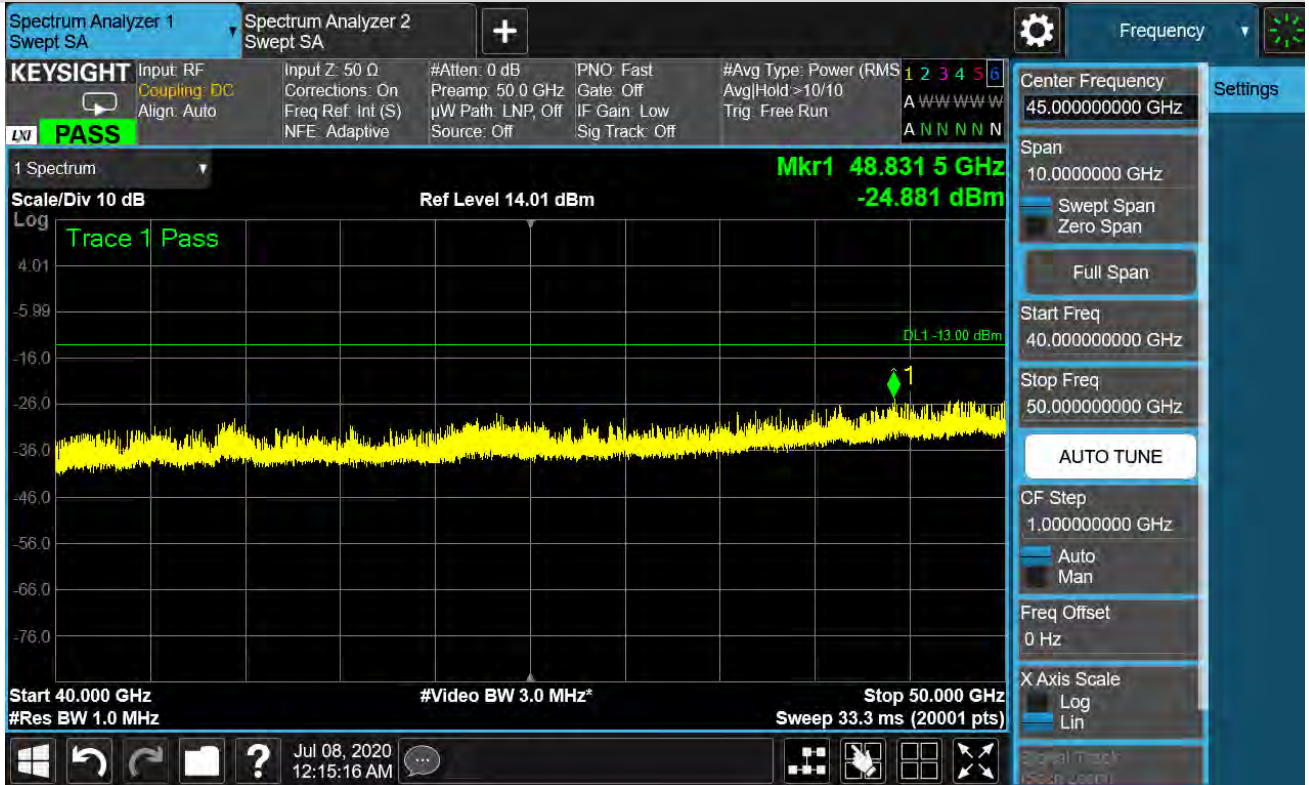

Middle channel: n261-BW:100MHz-2CC-QPSK-Beam ID 19 (40 GHz to 50 GHz)

Full RB-Horizontal Polarization

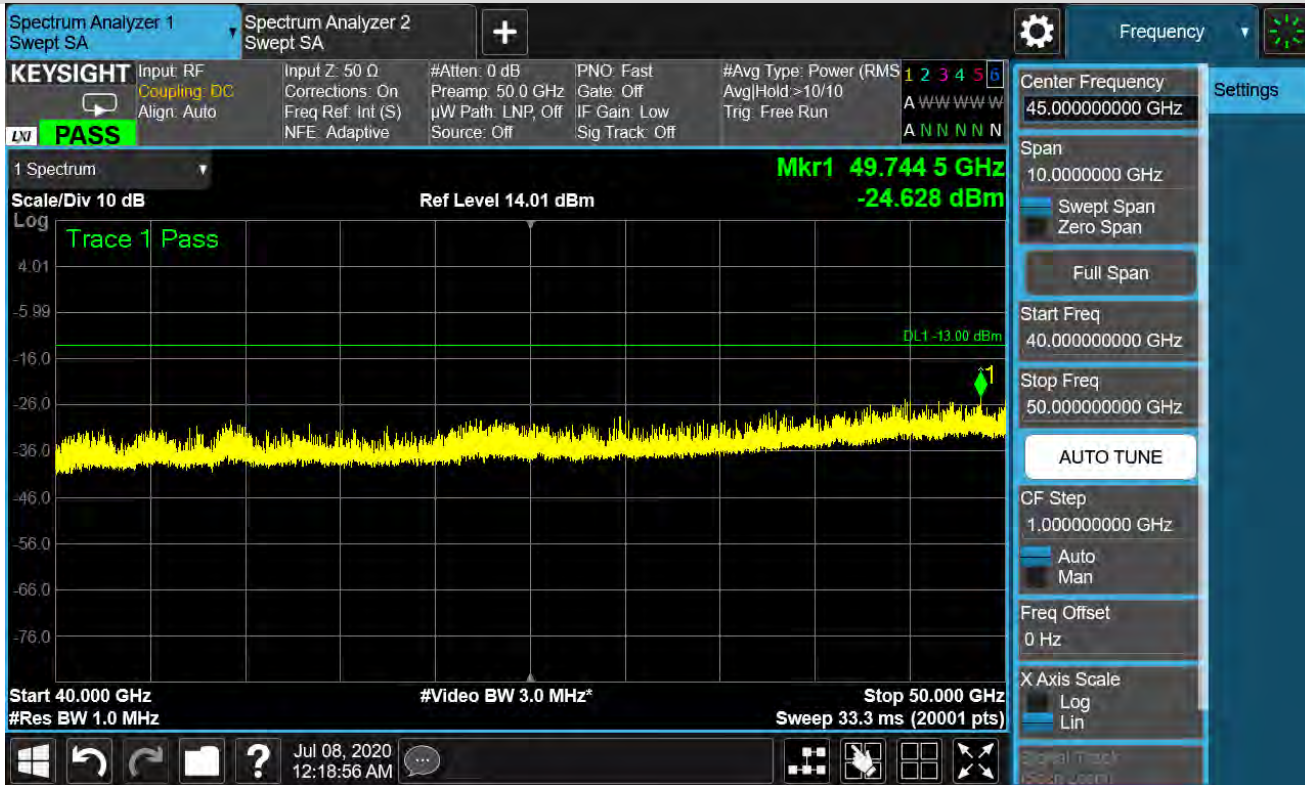


Full RB-Vertical Polarization






### High channel: n261-BW:100MHz-2CC-QPSK-Beam ID 19 (40 GHz to 50 GHz)

#### Full RB-Horizontal Polarization

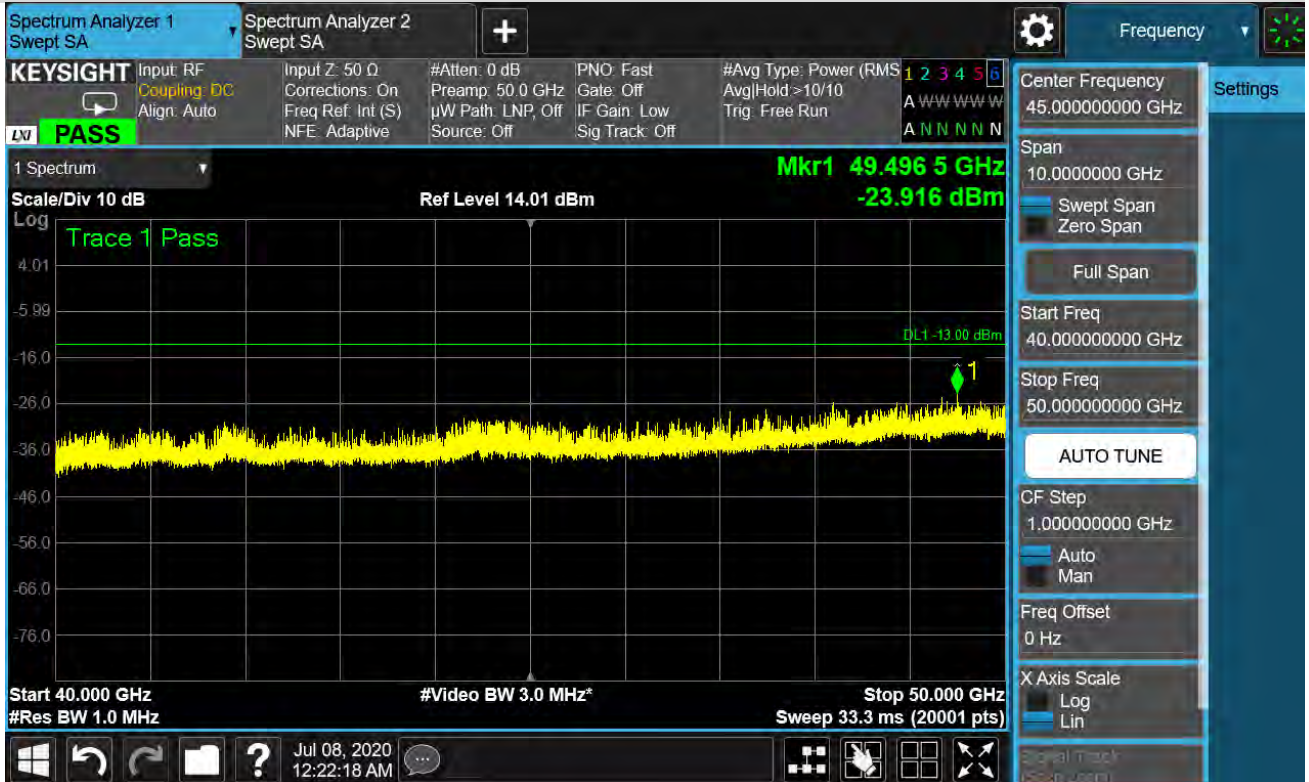

#### Full RB-Vertical Polarization

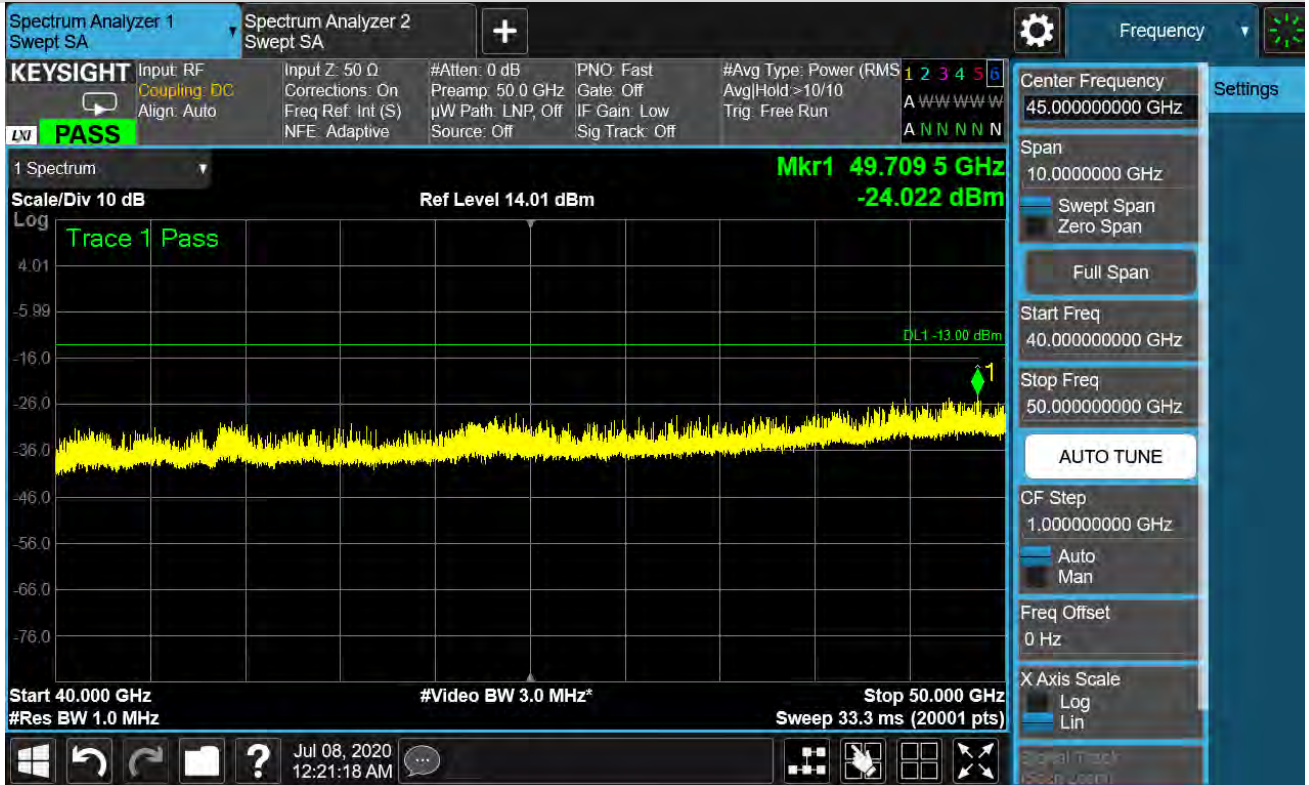

**n261:1CC-BW50MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 23 Low channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
55.04942	0	-19.3	0.01180	-13.53	0.04436	-17.4	0.01811	-21.95	0.00638	-24.43	-13	-11.43
	10	-35	0.00032	-23.14	0.00485	-28.1	0.00155	-35.77	0.00026			
	20	-32.7	0.00053	-23.72	0.00425	-32.6	0.00055	-41.76	0.00007			
	30	-33.2	0.00048	-18.02	0.01578	-34.3	0.00037	-34.25	0.00038			
	40	-24.9	0.00327	-15.67	0.02710	-31.4	0.00073	-33.01	0.00050			
	50	-24.7	0.00340	-21.51	0.00706	-42	0.00006	-40.35	0.00009			
	60	-27.1	0.00197	-21.53	0.00703	-40.5	0.00009	-38.85	0.00013			
	70	-37.1	0.00019	-24.11	0.00388	-31.1	0.00078	-36.47	0.00023			
	80	-35.6	0.00027	-30.85	0.00082	-36.1	0.00024	-42.25	0.00006			
	90	-36.5	0.00022	-18.61	0.01377	-42.7	0.00005	-43.99	0.00004			
	100	-43.2	0.00005	-28.23	0.00150	-44.3	0.00004	-44.18	0.00004			
	110	-40.9	0.00008	-41.98	0.00006	-44.3	0.00004	-44.26	0.00004			
	120	-42.6	0.00005	-35.76	0.00027	-44.3	0.00004	-44.11	0.00004			
	130	-44.2	0.00004	-35.62	0.00027	-44.2	0.00004	-44.2	0.00004			
	140	-38	0.00016	-33.68	0.00043	-44.2	0.00004	-44.26	0.00004			
	150	-42.3	0.00006	-40.13	0.00010	-43.7	0.00004	-43.61	0.00004			
	160	-42.2	0.00006	-41.26	0.00007	-42.5	0.00006	-43.35	0.00005			
	170	-43.3	0.00005	-37.72	0.00017	-44.1	0.00004	-43.49	0.00004			
	180	-43.6	0.00004	-42.29	0.00006	-42.8	0.00005	-42.43	0.00006			
	190	-41.2	0.00008	-41.91	0.00006	-43.1	0.00005	-43.28	0.00005			
	200	-42.9	0.00005	-43.4	0.00005	-43.9	0.00004	-41.75	0.00007			
	210	-43.7	0.00004	-42.57	0.00006	-43.4	0.00005	-42.18	0.00006			
	220	-44.2	0.00004	-43.43	0.00005	-44.2	0.00004	-44.21	0.00004			
	230	-43.8	0.00004	-42.62	0.00005	-44.1	0.00004	-40.71	0.00008			
	240	-43.7	0.00004	-43.78	0.00004	-43	0.00005	-42.48	0.00006			
	250	-43.2	0.00005	-44.26	0.00004	-41.6	0.00007	-39.24	0.00012			
	260	-44.1	0.00004	-42.83	0.00005	-39.5	0.00011	-41.25	0.00007			
	270	-39.6	0.00011	-42.53	0.00006	-40.6	0.00009	-42.41	0.00006			
	280	-32.7	0.00053	-44.11	0.00004	-40	0.00010	-41.23	0.00008			
	290	-33.4	0.00046	-43.53	0.00004	-33.3	0.00047	-43.21	0.00005			
	300	-30.3	0.00094	-44.06	0.00004	-30.5	0.00090	-42.75	0.00005			
	310	-27.1	0.00193	-43.69	0.00004	-38.9	0.00013	-39.09	0.00012			
	320	-36.5	0.00022	-42.53	0.00006	-30.9	0.00082	-40.28	0.00009			
	330	-33.9	0.00041	-33.93	0.00040	-29.8	0.00105	-38.72	0.00013			
	340	-29.7	0.00107	-31.34	0.00073	-35.8	0.00026	-33.58	0.00044			
	350	-28.9	0.00130	-23.34	0.00463	-43.9	0.00004	-33.78	0.00042			

Note: TRP fact=1dB (see page 379).




### n261:1CC-BW50MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Low channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (50 GHz to 75 GHz)

#### 10RB11-Horizontal Polarization-Y Axis (EUT)

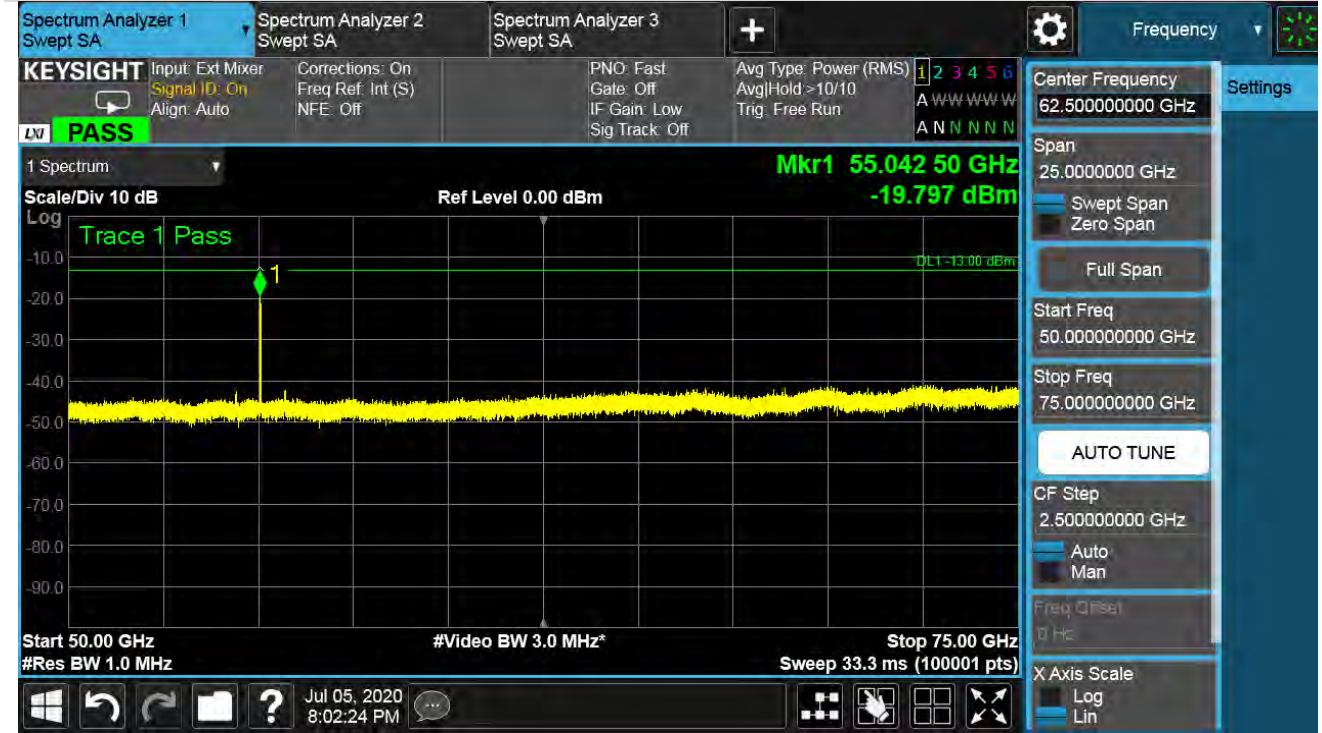

#### 10RB11-Vertical Polarization- Y Axis (EUT)

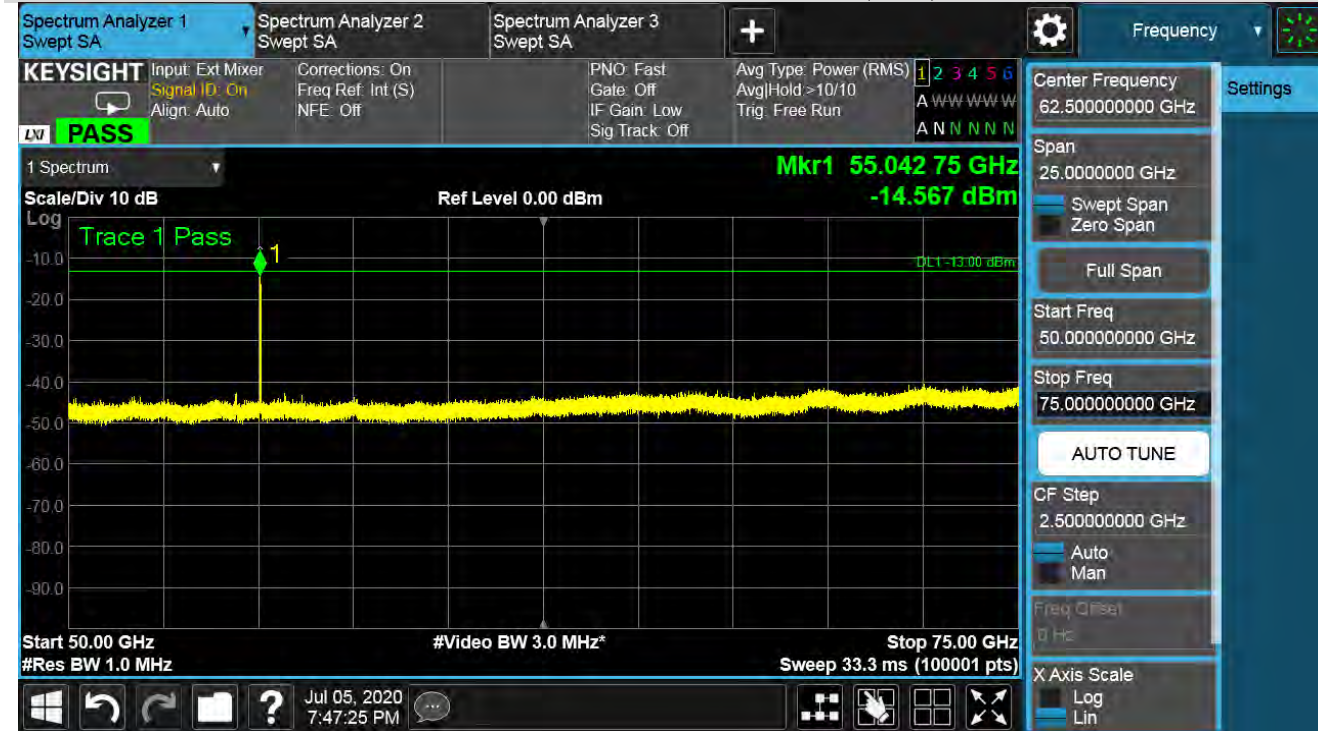


## n261:1CC-BW50MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Low channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (50 GHz to 75 GHz)

### 10RB11-Horizontal Polarization-Z Axis (EUT)

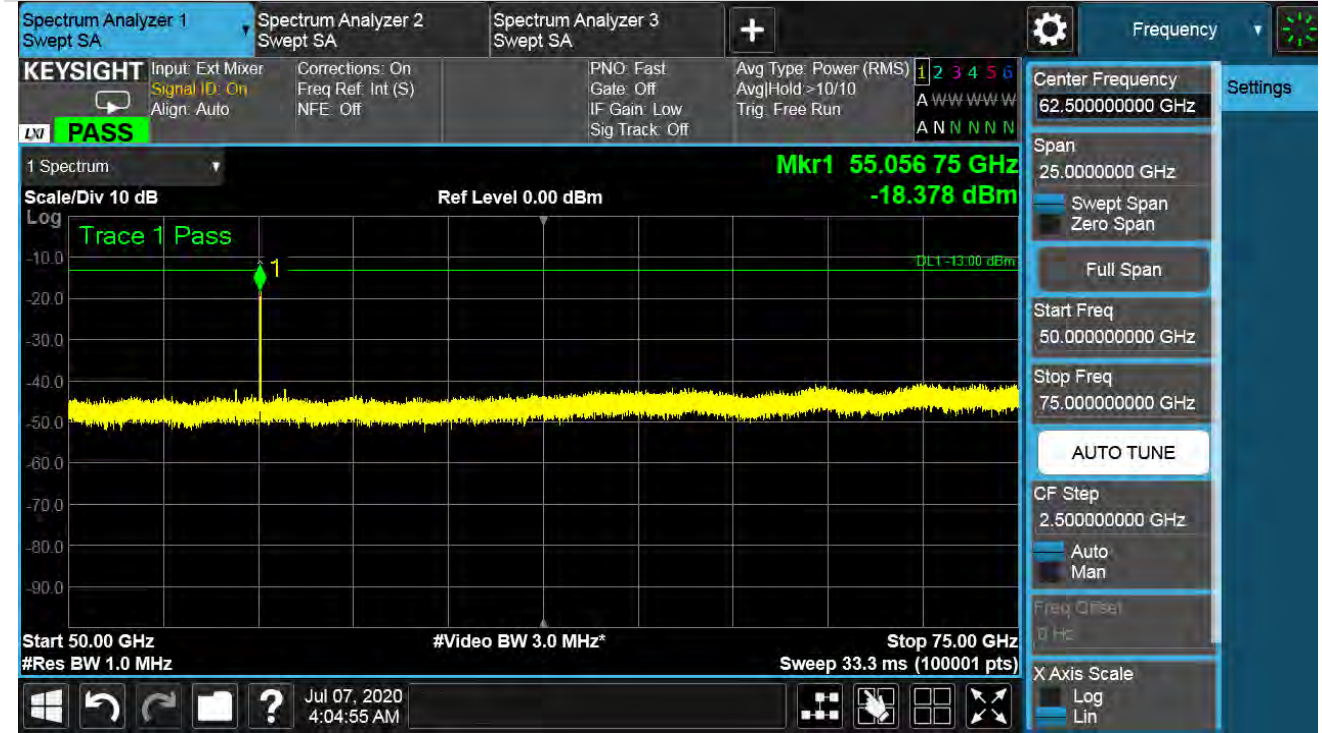

### 10RB11-Vertical Polarization- Z Axis (EUT)





**n261:1CC-BW50MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 23 Middle channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
55.84936	0	-19.6	0.01094	-9.57	0.11041	-12.5	0.05662	-21.57	0.00697	-20.82	-13	-7.82
	10	-32.1	0.00062	-23.54	0.00443	-27.8	0.00168	-25.1	0.00309			
	20	-28.1	0.00155	-13.37	0.04603	-29	0.00125	-38.14	0.00015			
	30	-31.7	0.00067	-32.54	0.00056	-32.6	0.00054	-36.97	0.00020			
	40	-23.9	0.00405	-10.05	0.09886	-25.8	0.00261	-30.23	0.00095			
	50	-33.2	0.00047	-21.06	0.00783	-41.2	0.00008	-43.73	0.00004			
	60	-32.2	0.00061	-17.35	0.01841	-34.8	0.00033	-33.17	0.00048			
	70	-29.6	0.00109	-26.35	0.00232	-32.3	0.00060	-29.87	0.00103			
	80	-31.1	0.00079	-14.62	0.03451	-37.1	0.00019	-38.35	0.00015			
	90	-30.7	0.00085	-19.86	0.01033	-43.9	0.00004	-43.44	0.00005			
	100	-37	0.00020	-34.18	0.00038	-43.2	0.00005	-44.27	0.00004			
	110	-38.2	0.00015	-43.69	0.00004	-44.2	0.00004	-44.19	0.00004			
	120	-41.4	0.00007	-38.63	0.00014	-43.8	0.00004	-44.25	0.00004			
	130	-44.3	0.00004	-33.35	0.00046	-43.6	0.00004	-43.92	0.00004			
	140	-39.7	0.00011	-33.12	0.00049	-42.2	0.00006	-42.99	0.00005			
	150	-44.2	0.00004	-40.76	0.00008	-43.8	0.00004	-43.19	0.00005			
	160	-44.2	0.00004	-40.41	0.00009	-43.7	0.00004	-44.29	0.00004			
	170	-43.4	0.00005	-36.25	0.00024	-44.1	0.00004	-44.16	0.00004			
	180	-44	0.00004	-42.13	0.00006	-43.5	0.00005	-43.62	0.00004			
	190	-44.1	0.00004	-43.86	0.00004	-43.8	0.00004	-42.94	0.00005			
	200	-42.6	0.00005	-42.47	0.00006	-43.9	0.00004	-44.29	0.00004			
	210	-43.1	0.00005	-43.81	0.00004	-43	0.00005	-43.15	0.00005			
	220	-43.9	0.00004	-40.61	0.00009	-43.7	0.00004	-42.89	0.00005			
	230	-44.2	0.00004	-42.14	0.00006	-43.4	0.00005	-39.08	0.00012			
	240	-43.7	0.00004	-42.51	0.00006	-37.9	0.00016	-35.18	0.00030			
	250	-43.4	0.00005	-41.72	0.00007	-37.6	0.00017	-36.35	0.00023			
	260	-43.6	0.00004	-43.34	0.00005	-42.7	0.00005	-39.36	0.00012			
	270	-42.1	0.00006	-44.25	0.00004	-42.8	0.00005	-42.65	0.00005			
	280	-32.3	0.00059	-44.19	0.00004	-40.1	0.00010	-41.34	0.00007			
	290	-28.5	0.00140	-44.32	0.00004	-31.9	0.00065	-37.96	0.00016			
	300	-24.9	0.00327	-43.64	0.00004	-32.5	0.00056	-38.43	0.00014			
	310	-29.5	0.00114	-41.82	0.00007	-37	0.00020	-38.75	0.00013			
	320	-29.1	0.00124	-37.18	0.00019	-28	0.00160	-31.19	0.00076			
	330	-34.5	0.00036	-29.66	0.00108	-25.5	0.00284	-37.36	0.00018			
	340	-24	0.00400	-23.63	0.00434	-29.6	0.00111	-39.56	0.00011			
	350	-26.7	0.00212	-22.16	0.00608	-32	0.00063	-41.15	0.00008			

Note: TRP fact=1dB (see page 379).

n261:1CC-BW50MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (50 GHz to 75 GHz)

10RB11-Horizontal Polarization-Y Axis (EUT)



10RB11-Vertical Polarization- Y Axis (EUT)






### n261:1CC-BW50MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (50 GHz to 75 GHz)

#### 10RB11-Horizontal Polarization-Z Axis (EUT)

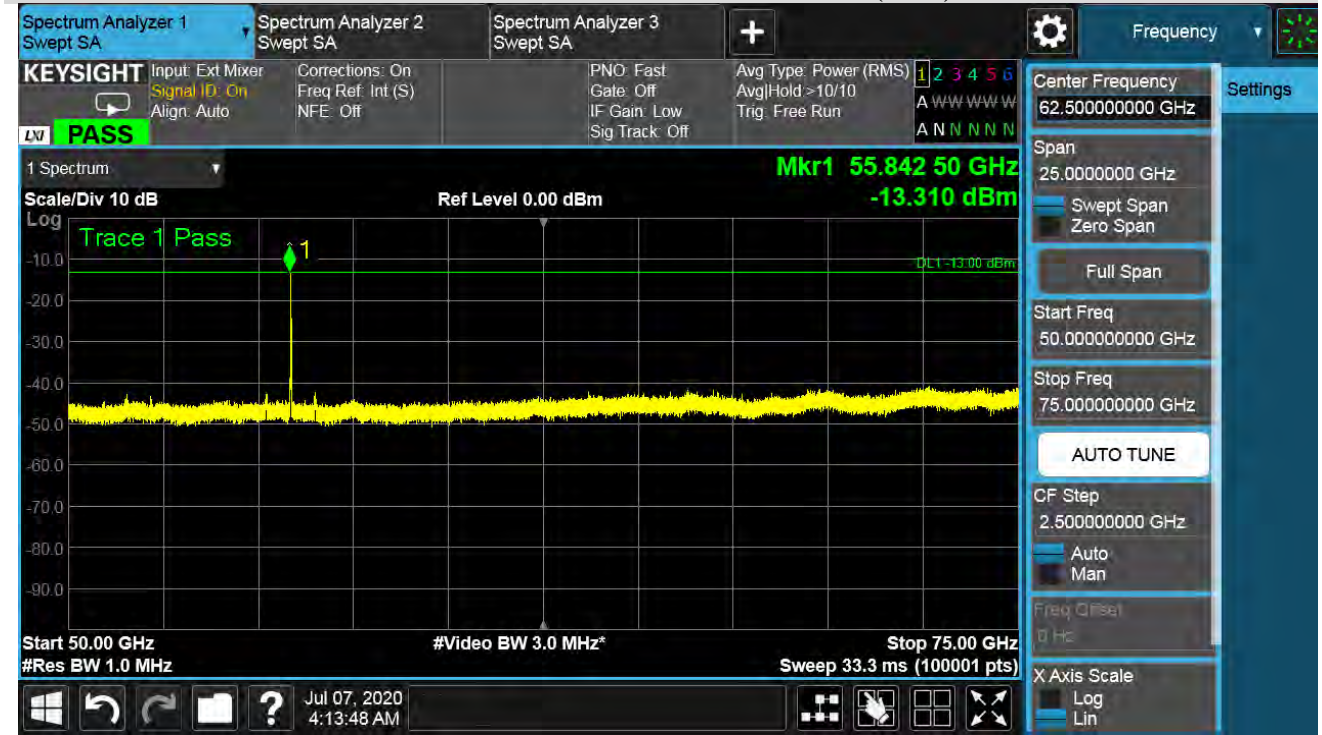

#### 10RB11-Vertical Polarization- Z Axis (EUT)



**n261:1CC-BW50MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 23 High channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				H-Pol.						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(dBm)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
56.6494	0	-19.7	0.01069	-10.12	0.09727	-13.7	0.04315	-24.22	0.00378	-21.96	-13	-8.96
	10	-30.8	0.00084	-28.35	0.00146	-42.5	0.00006	-35.18	0.00030			
	20	-37.1	0.00019	-25.12	0.00308	-33.7	0.00043	-43.11	0.00005			
	30	-25.5	0.00281	-27.45	0.00180	-30.5	0.00089	-37.29	0.00019			
	40	-37.9	0.00016	-18.24	0.01500	-29.7	0.00108	-41.47	0.00007			
	50	-34.3	0.00037	-19.63	0.01089	-41.5	0.00007	-40.25	0.00009			
	60	-31.1	0.00077	-35.47	0.00028	-40.8	0.00008	-32.42	0.00057			
	70	-40.6	0.00009	-39.88	0.00010	-40.5	0.00009	-32.63	0.00055			
	80	-33.8	0.00042	-41.68	0.00007	-36.3	0.00023	-39.53	0.00011			
	90	-35.8	0.00027	-38.56	0.00014	-42.9	0.00005	-44.93	0.00003			
	100	-40.2	0.00010	-38.22	0.00015	-44.6	0.00003	-44.57	0.00003			
	110	-43.1	0.00005	-40.98	0.00008	-44.9	0.00003	-44.35	0.00004			
	120	-44.5	0.00004	-45.05	0.00003	-44.5	0.00004	-44.82	0.00003			
	130	-43.4	0.00005	-41.36	0.00007	-43.1	0.00005	-44.72	0.00003			
	140	-40.3	0.00009	-44.88	0.00003	-45	0.00003	-44.91	0.00003			
	150	-42.7	0.00005	-44.54	0.00004	-44.4	0.00004	-43.86	0.00004			
	160	-44.1	0.00004	-44.48	0.00004	-44.8	0.00003	-44.21	0.00004			
	170	-44.2	0.00004	-43.6	0.00004	-44.8	0.00003	-44.96	0.00003			
	180	-44.2	0.00004	-44.09	0.00004	-44.6	0.00003	-44.51	0.00004			
	190	-42.3	0.00006	-44.81	0.00003	-44.2	0.00004	-44.73	0.00003			
	200	-44.3	0.00004	-42.64	0.00005	-44.8	0.00003	-44.85	0.00003			
	210	-37.9	0.00016	-44.63	0.00003	-44.6	0.00003	-44.07	0.00004			
	220	-29.2	0.00120	-44.92	0.00003	-41.7	0.00007	-44.36	0.00004			
	230	-25.1	0.00306	-44.73	0.00003	-41.8	0.00007	-43.63	0.00004			
	240	-22	0.00634	-43.92	0.00004	-44.1	0.00004	-43.14	0.00005			
	250	-22	0.00632	-44.35	0.00004	-38.8	0.00013	-37.45	0.00018			
	260	-30.8	0.00083	-44.82	0.00003	-43	0.00005	-40.75	0.00008			
	270	-30.9	0.00082	-44.35	0.00004	-39.6	0.00011	-43.89	0.00004			
	280	-31.8	0.00066	-44.51	0.00004	-38.6	0.00014	-41.2	0.00008			
	290	-35.3	0.00030	-36.15	0.00024	-33.5	0.00045	-41.65	0.00007			
	300	-28.4	0.00146	-28.91	0.00129	-41.3	0.00007	-37.61	0.00017			
	310	-29.7	0.00108	-17.82	0.01652	-37.4	0.00018	-40.85	0.00008			
	320	-22.5	0.00568	-12.56	0.05546	-28.2	0.00151	-39.48	0.00011			
	330	-26.7	0.00213	-15.91	0.02564	-26.7	0.00214	-30.75	0.00084			
	340	-24.4	0.00364	-21.04	0.00787	-31.5	0.00072	-32.86	0.00052			
	350	-33.1	0.00049	-18.72	0.01343	-38.5	0.00014	-34.35	0.00037			

Note: TRP fact=1dB (see page 379).



## n261:1CC-BW50MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (50 GHz to 75 GHz)

### 10RB11-Horizontal Polarization-Y Axis (EUT)



### 10RB11-Vertical Polarization- Y Axis (EUT)

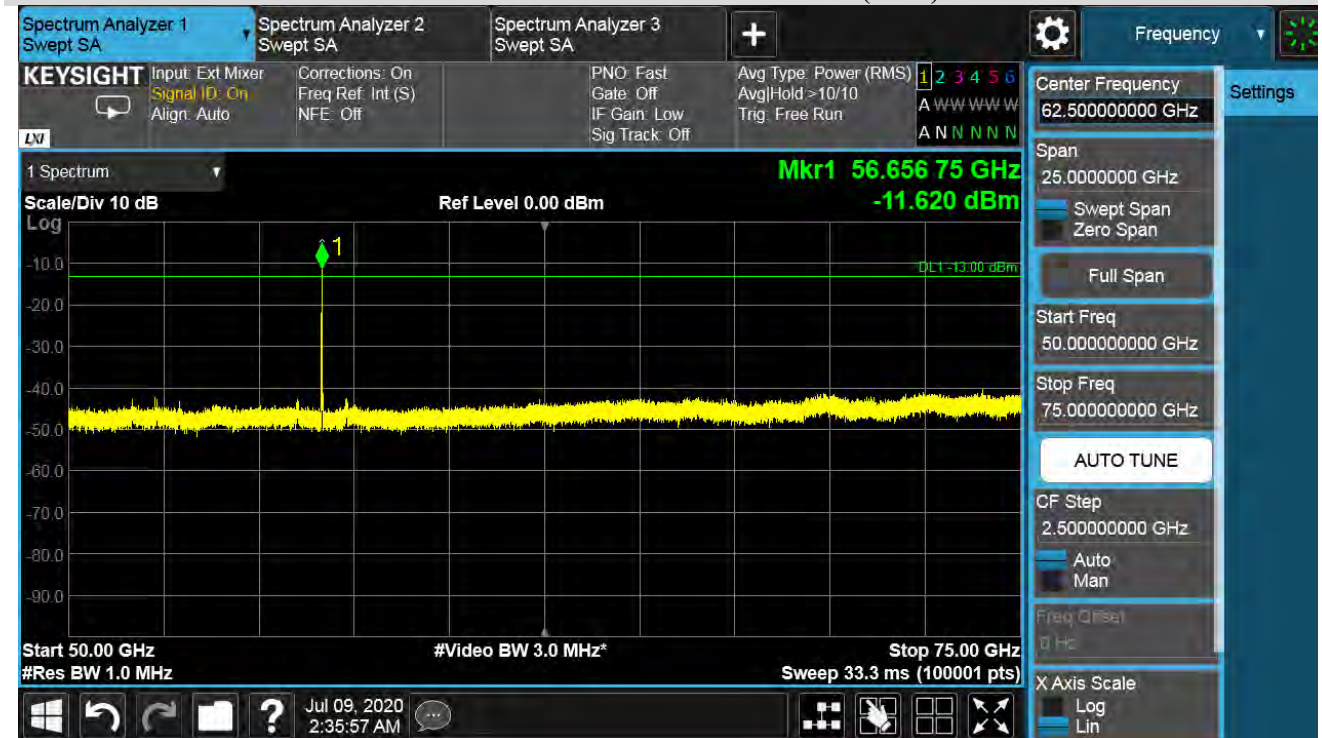


n261:1CC-BW50MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (50 GHz to 75 GHz)

10RB11-Horizontal Polarization-Z Axis (EUT)

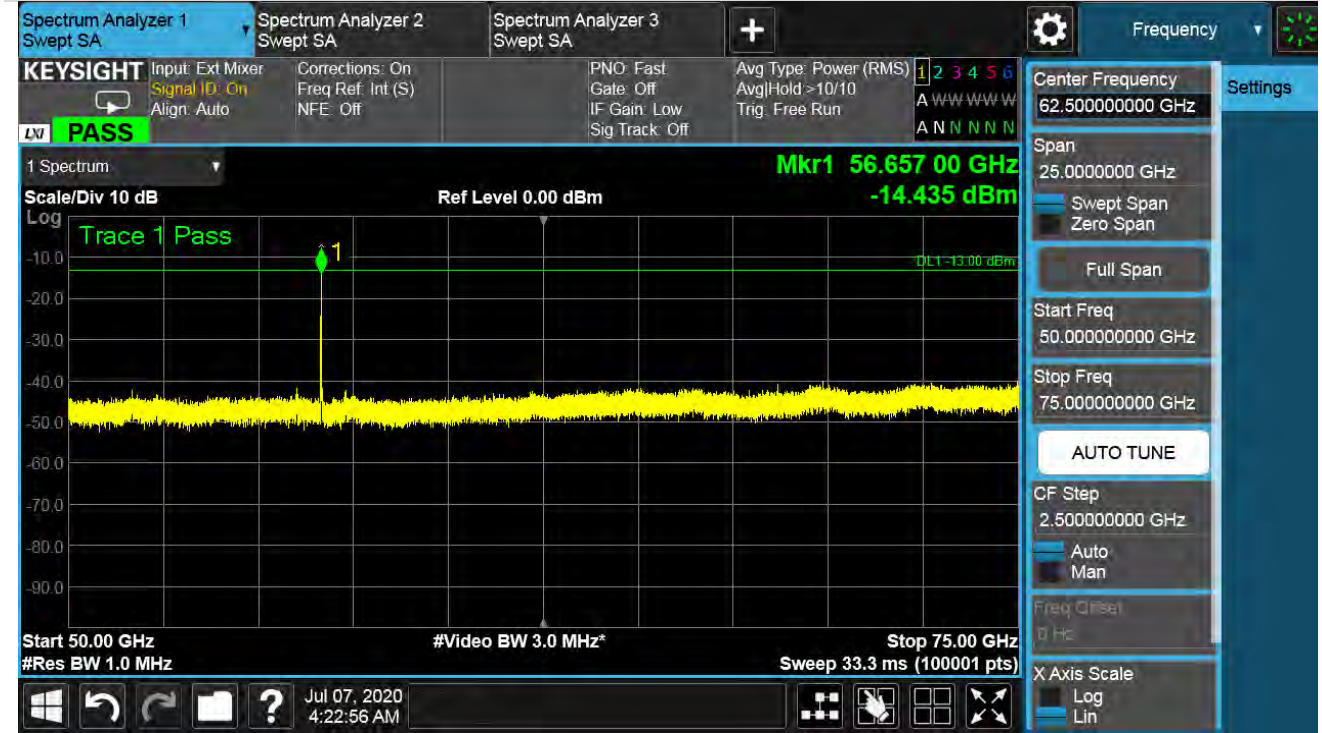

10RB11-Vertical Polarization- Z Axis (EUT)





**n261:1CC-BW50MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 19+147 Low channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)		
		Y-Axis (EUT)						H-Pol.					V-Pol.	
		H-Pol.						H-Pol.					V-Pol.	
		(dBm)	(dBm)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)				(dBm)	(mW)
55.04942	0	-19.8	0.01038	-15.3	0.02924	-23.1	0.00488	-20.8	0.00826	-25.14	-13	-12.14		
	10	-27.7	0.00169	-26.5	0.00223	-26.6	0.00221	-28.2	0.00151					
	20	-30.5	0.00088	-28.2	0.00151	-25.2	0.00304	-33.5	0.00045					
	30	-32.5	0.00057	-42.9	0.00005	-28.2	0.00151	-30.1	0.00098					
	40	-35.3	0.00029	-31.7	0.00067	-26.8	0.00211	-37.8	0.00017					
	50	-34	0.00040	-32.9	0.00051	-34.5	0.00036	-26.1	0.00247					
	60	-41.2	0.00008	-38.6	0.00014	-38.3	0.00015	-29.9	0.00103					
	70	-41.7	0.00007	-42.5	0.00006	-34	0.00040	-37.9	0.00016					
	80	-42.2	0.00006	-39.2	0.00012	-36.1	0.00025	-43.6	0.00004					
	90	-44.1	0.00004	-41.1	0.00008	-32.5	0.00056	-44.4	0.00004					
	100	-43.5	0.00005	-44	0.00004	-28.4	0.00144	-44.3	0.00004					
	110	-42.7	0.00005	-42.6	0.00005	-25.3	0.00296	-44.4	0.00004					
	120	-44.2	0.00004	-43.6	0.00004	-35.8	0.00026	-44	0.00004					
	130	-41.1	0.00008	-42.9	0.00005	-24.8	0.00333	-42.8	0.00005					
	140	-43.4	0.00005	-42.7	0.00005	-27.3	0.00187	-44.2	0.00004					
	150	-44.3	0.00004	-44.2	0.00004	-36.4	0.00023	-44.1	0.00004					
	160	-44	0.00004	-43.6	0.00004	-43.9	0.00004	-44.1	0.00004					
	170	-44	0.00004	-42.2	0.00006	-44.1	0.00004	-43.4	0.00005					
	180	-44.3	0.00004	-44.3	0.00004	-42.1	0.00006	-43.5	0.00004					
	190	-43.6	0.00004	-43.8	0.00004	-43.1	0.00005	-43.3	0.00005					
	200	-42.5	0.00006	-44.3	0.00004	-44	0.00004	-43.1	0.00005					
	210	-41.5	0.00007	-43.7	0.00004	-43.6	0.00004	-41.8	0.00007					
	220	-42.9	0.00005	-42.9	0.00005	-44.2	0.00004	-39.2	0.00012					
	230	-43	0.00005	-44.3	0.00004	-42.4	0.00006	-32	0.00064					
	240	-42.4	0.00006	-43.5	0.00004	-44.3	0.00004	-29.2	0.00121					
	250	-43.7	0.00004	-41.2	0.00008	-42.7	0.00005	-33.9	0.00041					
	260	-41.5	0.00007	-36.7	0.00021	-43	0.00005	-38.6	0.00014					
	270	-32	0.00064	-31.7	0.00067	-42.6	0.00006	-38.9	0.00013					
	280	-43.9	0.00004	-27.8	0.00164	-43.2	0.00005	-37.1	0.00020					
	290	-33.6	0.00043	-36.4	0.00023	-41.6	0.00007	-30.8	0.00083					
	300	-29.3	0.00117	-18.4	0.01459	-30.7	0.00086	-36.2	0.00024					
	310	-32	0.00063	-22.1	0.00614	-40.5	0.00009	-23.1	0.00493					
	320	-27	0.00199	-17.3	0.01849	-40.6	0.00009	-27.9	0.00163					
	330	-24.6	0.00348	-32.8	0.00052	-32	0.00064	-23.8	0.00416					
	340	-31.1	0.00079	-28.3	0.00149	-41.8	0.00007	-26.4	0.00230					
	350	-27.8	0.00167	-22.1	0.00614	-30.2	0.00096	-26.7	0.00213					


Note: TRP fact=1dB (see page 379).

n261:1CC-BW50MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Low channel: n261-BW:50MHz-1CC-BPSK-Beam ID 19+147 (50 GHz to 75 GHz)

10RB11-Horizontal Polarization-Y Axis (EUT)

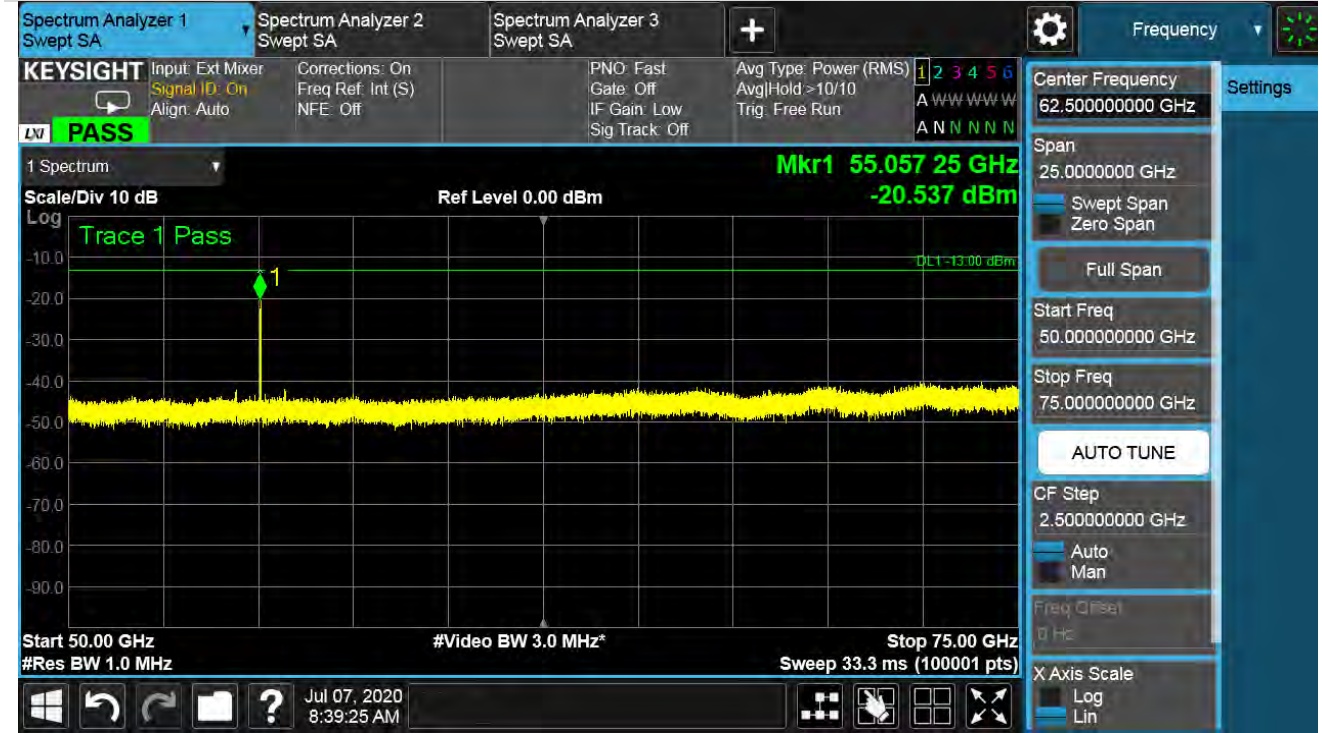

10RB11-Vertical Polarization- Y Axis (EUT)

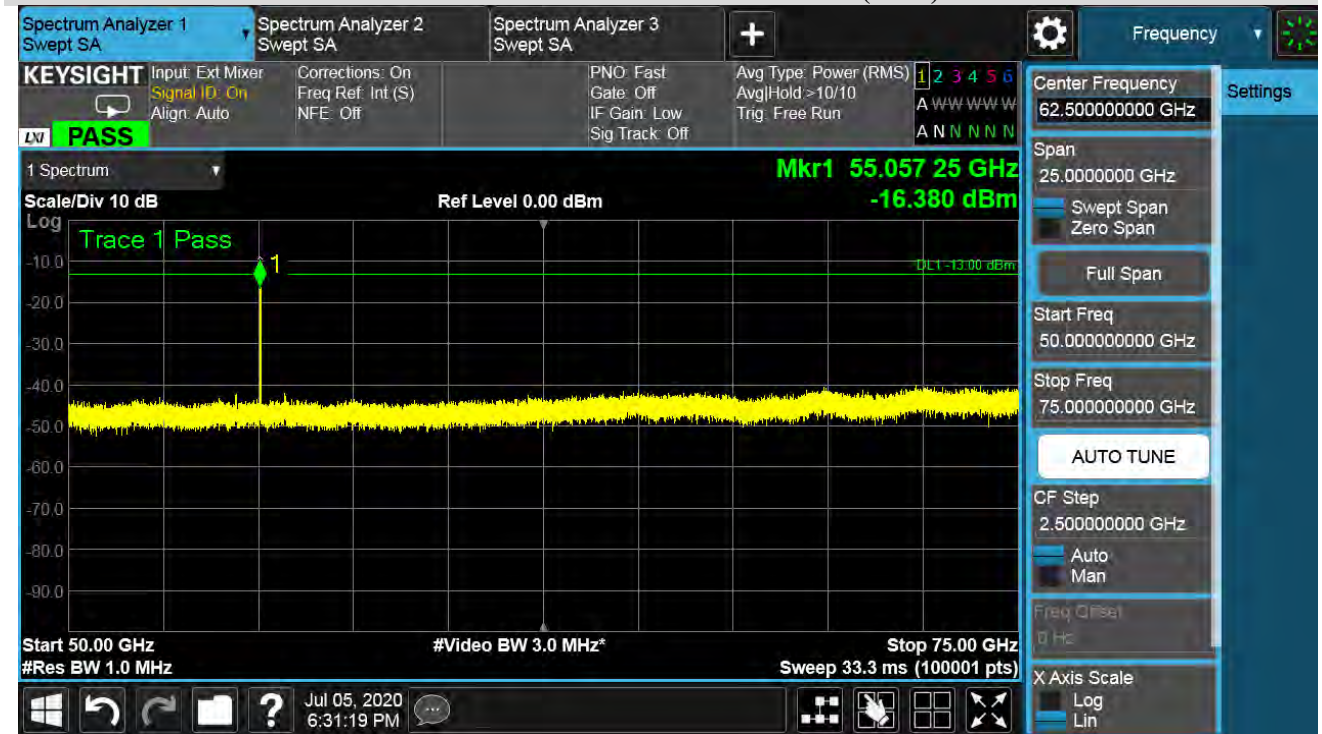



n261:1CC-BW50MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Low channel: n261-BW:50MHz-1CC-BPSK-Beam ID 19+147 (50 GHz to 75 GHz)

10RB11-Horizontal Polarization-Z Axis (EUT)



10RB11-Vertical Polarization- Z Axis (EUT)



**n261:1CC-BW50MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 19+147 Middle channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
55.84936	0	-17.7	0.01706	-13.8	0.04159	-22.4	0.00574	-20.8	0.00830	-24.05	-13	-11.05
	10	-28.8	0.00132	-26.7	0.00215	-27.6	0.00175	-39.1	0.00012			
	20	-30.7	0.00085	-23.5	0.00446	-35	0.00032	-31.6	0.00069			
	30	-29	0.00127	-42.4	0.00006	-29.1	0.00122	-31.2	0.00076			
	40	-30.6	0.00088	-26.7	0.00215	-30.7	0.00085	-36.2	0.00024			
	50	-35.7	0.00027	-33.4	0.00046	-26.9	0.00207	-27.8	0.00165			
	60	-40.1	0.00010	-38.1	0.00016	-27.4	0.00181	-28.9	0.00130			
	70	-38.8	0.00013	-44	0.00004	-27.4	0.00181	-36.8	0.00021			
	80	-35.2	0.00030	-41.5	0.00007	-29.3	0.00118	-44	0.00004			
	90	-42.7	0.00005	-39	0.00013	-26.6	0.00220	-43.9	0.00004			
	100	-41.4	0.00007	-44.2	0.00004	-31.7	0.00067	-43.5	0.00005			
	110	-43.3	0.00005	-43.6	0.00004	-30.2	0.00096	-44.3	0.00004			
	120	-43.6	0.00004	-41.4	0.00007	-35.5	0.00028	-44.2	0.00004			
	130	-44.1	0.00004	-43	0.00005	-44.2	0.00004	-43.6	0.00004			
	140	-43.5	0.00005	-43.8	0.00004	-44.2	0.00004	-41.9	0.00007			
	150	-43.5	0.00004	-42.7	0.00005	-42.2	0.00006	-44	0.00004			
	160	-43.2	0.00005	-44.2	0.00004	-41.3	0.00007	-43.2	0.00005			
	170	-43.9	0.00004	-44	0.00004	-41.9	0.00006	-43.8	0.00004			
	180	-43.2	0.00005	-44.2	0.00004	-41.4	0.00007	-43.6	0.00004			
	190	-42.7	0.00005	-43.7	0.00004	-44.3	0.00004	-41.8	0.00007			
	200	-43.5	0.00004	-44.2	0.00004	-44	0.00004	-44.2	0.00004			
	210	-41.1	0.00008	-44.1	0.00004	-44.2	0.00004	-41.8	0.00007			
	220	-42.1	0.00006	-44.3	0.00004	-43	0.00005	-42.9	0.00005			
	230	-44.2	0.00004	-44	0.00004	-42.3	0.00006	-37	0.00020			
	240	-43.5	0.00005	-42.9	0.00005	-42.5	0.00006	-36.9	0.00020			
	250	-40.6	0.00009	-42.3	0.00006	-43.4	0.00005	-39.8	0.00011			
	260	-43.3	0.00005	-35.8	0.00027	-37.9	0.00016	-39.9	0.00010			
	270	-35.4	0.00029	-33.4	0.00046	-43.6	0.00004	-42.9	0.00005			
	280	-33.8	0.00042	-26.7	0.00213	-34.7	0.00034	-37.1	0.00020			
	290	-31.9	0.00065	-33.9	0.00040	-34.1	0.00039	-37.6	0.00018			
	300	-29.5	0.00112	-19.7	0.01084	-34.5	0.00036	-33.6	0.00044			
	310	-26.9	0.00205	-20.8	0.00826	-33.8	0.00041	-23.2	0.00476			
	320	-34.1	0.00039	-15.4	0.02877	-33.8	0.00041	-32.3	0.00059			
	330	-17.4	0.01837	-29.2	0.00121	-23.8	0.00419	-25.9	0.00258			
	340	-25.7	0.00267	-22.7	0.00532	-26.7	0.00214	-32.3	0.00058			
	350	-30.2	0.00096	-20.5	0.00883	-29.9	0.00104	-28	0.00160			

Note: TRP fact=1dB (see page 379).



n261:1CC-BW50MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:50MHz-1CC-BPSK-Beam ID 19+147(50 GHz to 75 GHz)

10RB11-Horizontal Polarization-Y Axis (EUT)



10RB11-Vertical Polarization- Y Axis (EUT)




n261:1CC-BW50MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:50MHz-1CC-BPSK-Beam ID 19+147(50 GHz to 75 GHz)

10RB11-Horizontal Polarization-Z Axis (EUT)

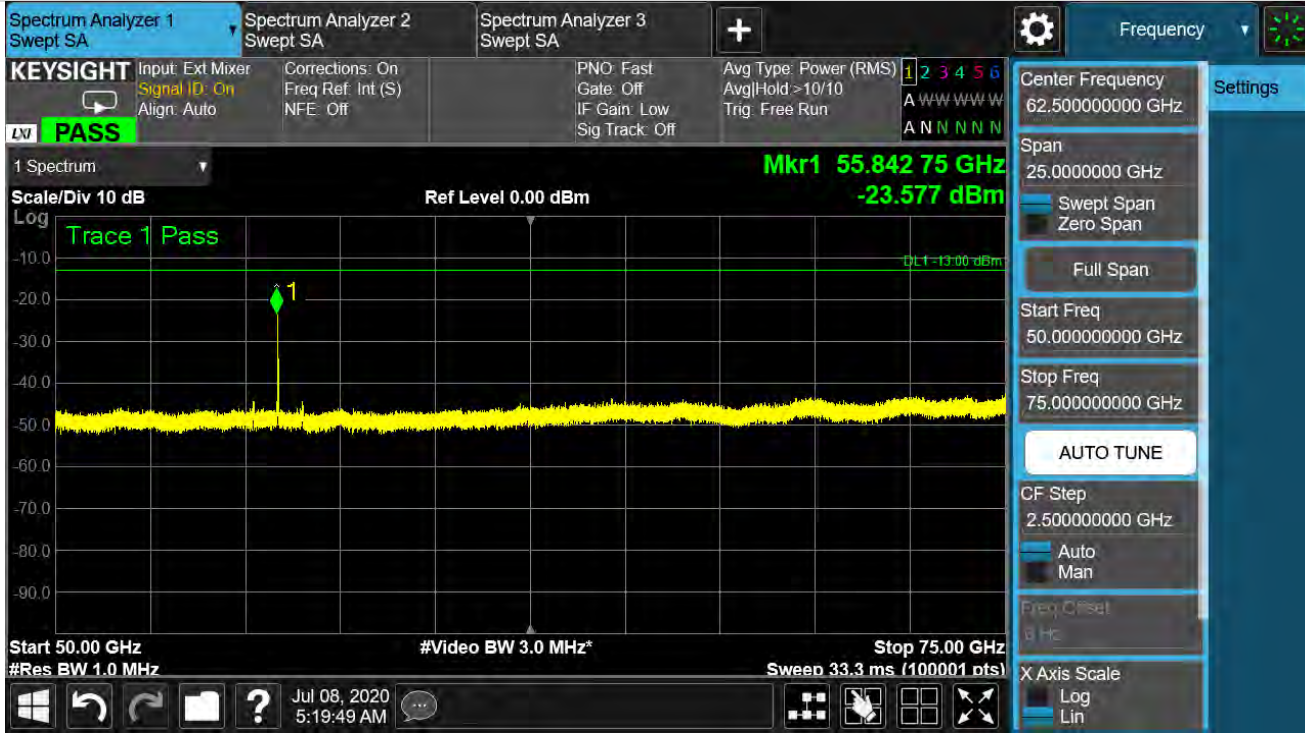

10RB11-Vertical Polarization- Z Axis (EUT)





**n261:1CC-BW50MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 19+147 High channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
56.6494	0	-19.7	0.01067	-16.3	0.02328	-23.3	0.00463	-25.6	0.00278	-25.58	-13	-12.58
	10	-39.4	0.00011	-26.4	0.00229	-27.1	0.00193	-30.1	0.00099			
	20	-38.6	0.00014	-20.5	0.00897	-38.2	0.00015	-41	0.00008			
	30	-30.2	0.00097	-17.6	0.01746	-26.4	0.00228	-32.7	0.00054			
	40	-30.6	0.00087	-17.8	0.01644	-29.4	0.00114	-28.8	0.00133			
	50	-32.5	0.00057	-35.7	0.00027	-26.6	0.00218	-38.5	0.00014			
	60	-34.6	0.00035	-25	0.00314	-29.1	0.00122	-32.7	0.00053			
	70	-37.9	0.00016	-38.8	0.00013	-30.1	0.00098	-31.4	0.00073			
	80	-40.1	0.00010	-26.3	0.00232	-25.3	0.00294	-27	0.00201			
	90	-41.3	0.00007	-35.4	0.00029	-27.9	0.00164	-34	0.00040			
	100	-38.5	0.00014	-41	0.00008	-28.7	0.00135	-42	0.00006			
	110	-39.1	0.00012	-43.9	0.00004	-32.2	0.00060	-44.7	0.00003			
	120	-44.9	0.00003	-42.4	0.00006	-37.6	0.00017	-44.4	0.00004			
	130	-42.6	0.00006	-43.2	0.00005	-42.9	0.00005	-44.3	0.00004			
	140	-43.9	0.00004	-44.3	0.00004	-43.7	0.00004	-44.9	0.00003			
	150	-44.1	0.00004	-44.4	0.00004	-43.5	0.00005	-44.4	0.00004			
	160	-43.7	0.00004	-44	0.00004	-44.9	0.00003	-44.6	0.00003			
	170	-43.6	0.00004	-44.2	0.00004	-43.5	0.00005	-44.8	0.00003			
	180	-44.4	0.00004	-44.5	0.00004	-42.7	0.00005	-43.8	0.00004			
	190	-43.6	0.00004	-44	0.00004	-44.2	0.00004	-44.9	0.00003			
	200	-44.8	0.00003	-44.4	0.00004	-43.8	0.00004	-44.6	0.00003			
	210	-45	0.00003	-44.2	0.00004	-44.6	0.00003	-44.3	0.00004			
	220	-44.1	0.00004	-45	0.00003	-44.5	0.00004	-43.9	0.00004			
	230	-44.6	0.00003	-44.6	0.00003	-44.3	0.00004	-43.7	0.00004			
	240	-44.8	0.00003	-43.5	0.00004	-41.9	0.00006	-43.7	0.00004			
	250	-43	0.00005	-43.5	0.00005	-38.5	0.00014	-44.7	0.00003			
	260	-37.8	0.00017	-41.1	0.00008	-34.2	0.00038	-41.6	0.00007			
	270	-29.1	0.00123	-43.5	0.00004	-33.8	0.00042	-44.5	0.00004			
	280	-30.9	0.00081	-41.8	0.00007	-39.1	0.00012	-41.6	0.00007			
	290	-30.1	0.00098	-44.9	0.00003	-37	0.00020	-41.4	0.00007			
	300	-31.8	0.00067	-36.4	0.00023	-33.2	0.00048	-35.4	0.00029			
	310	-30.1	0.00098	-33.3	0.00047	-36.2	0.00024	-31.6	0.00069			
	320	-42.3	0.00006	-29.9	0.00104	-30.8	0.00082	-34.2	0.00038			
	330	-23.9	0.00411	-31.9	0.00065	-25.1	0.00310	-31.6	0.00070			
	340	-24.5	0.00356	-24.1	0.00387	-30.2	0.00095	-28.3	0.00149			
	350	-29.5	0.00111	-23.5	0.00451	-37.3	0.00019	-31	0.00079			

Note: TRP fact=1dB (see page 379).

### n261:1CC-BW50MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:50MHz-1CC-BPSK-Beam ID 19+147 (50 GHz to 75 GHz)

#### 10RB11-Horizontal Polarization-Y Axis (EUT)



#### 10RB11-Vertical Polarization- Y Axis (EUT)

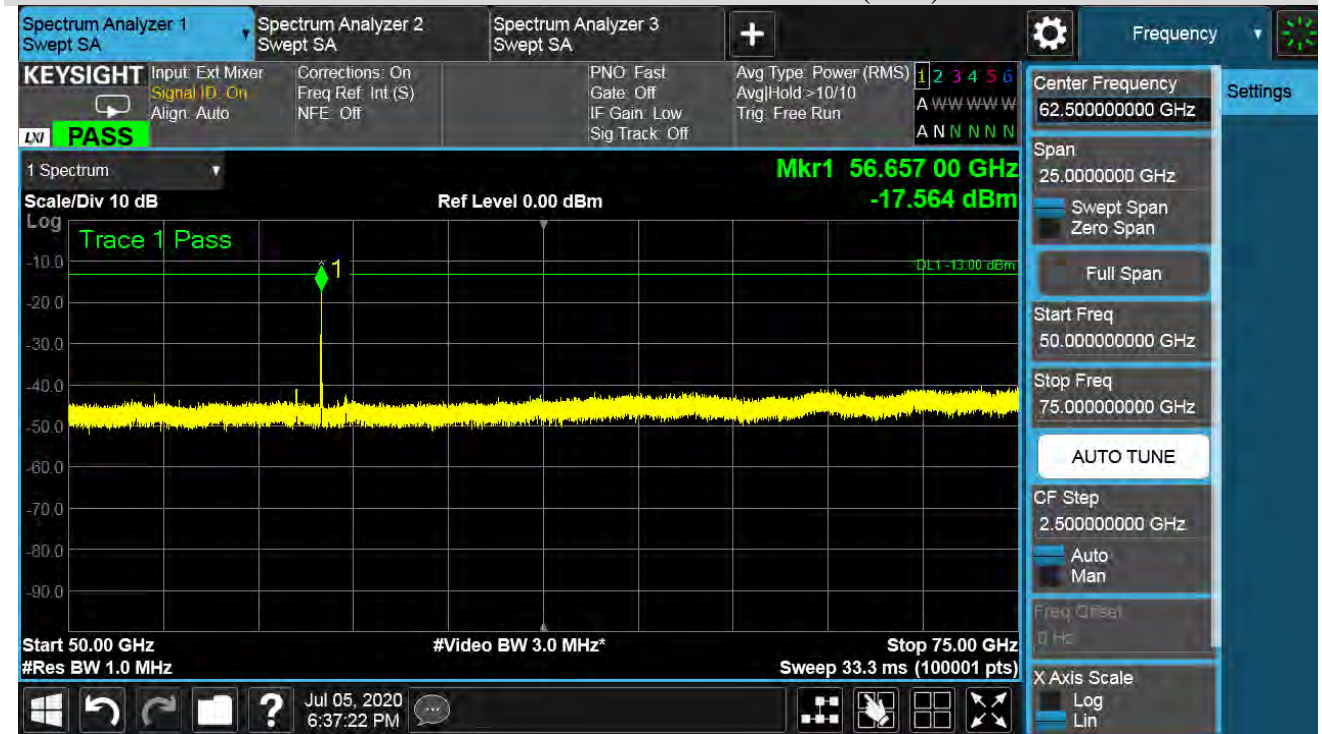



n261:1CC-BW50MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:50MHz-1CC-BPSK-Beam ID 19+147 (50 GHz to 75 GHz)

10RB11-Horizontal Polarization-Z Axis (EUT)



10RB11-Vertical Polarization- Z Axis (EUT)

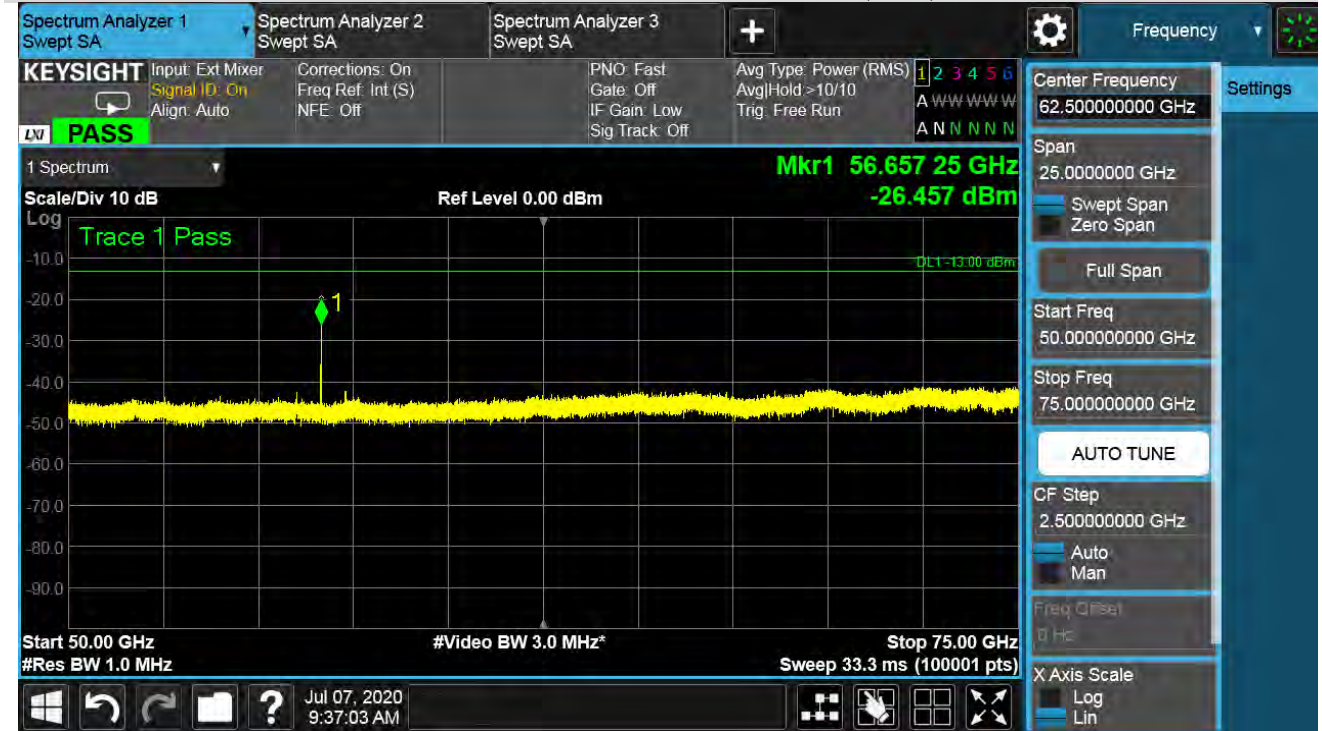

**n261:1CC-BW100MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 147 Low channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
55.0968	0	-21.6	0.00689	-14.17	0.03828	-26.7	0.00212	-20.97	0.00800	-25.99	-13	-12.99
	10	-28.6	0.00138	-30.01	0.00100	-44.1	0.00004	-34.87	0.00033			
	20	-37.7	0.00017	-26.23	0.00238	-31.1	0.00078	-29.99	0.00100			
	30	-25.5	0.00285	-29.26	0.00119	-41.4	0.00007	-30.75	0.00084			
	40	-29.3	0.00116	-16.17	0.02415	-33	0.00051	-39.76	0.00011			
	50	-30	0.00101	-24.17	0.00383	-40.2	0.00010	-27.21	0.00190			
	60	-34.2	0.00038	-23.25	0.00473	-28.5	0.00142	-30.69	0.00085			
	70	-35.2	0.00030	-31.29	0.00074	-33.9	0.00041	-40.61	0.00009			
	80	-32.5	0.00056	-41.32	0.00007	-36.6	0.00022	-43.61	0.00004			
	90	-33.7	0.00043	-31.17	0.00076	-42.5	0.00006	-44.38	0.00004			
	100	-40.1	0.00010	-39.47	0.00011	-31.8	0.00065	-43.89	0.00004			
	110	-42.4	0.00006	-40.85	0.00008	-39.8	0.00011	-43.47	0.00004			
	120	-44.6	0.00003	-39.46	0.00011	-29.9	0.00103	-44.29	0.00004			
	130	-43.9	0.00004	-39.32	0.00012	-34.1	0.00039	-44.32	0.00004			
	140	-42.6	0.00006	-42.68	0.00005	-34.7	0.00034	-44.31	0.00004			
	150	-43.8	0.00004	-42.03	0.00006	-39.8	0.00010	-44.13	0.00004			
	160	-42.9	0.00005	-42.93	0.00005	-44.1	0.00004	-43.74	0.00004			
	170	-44.1	0.00004	-44.07	0.00004	-44.2	0.00004	-44.46	0.00004			
	180	-44	0.00004	-44.12	0.00004	-44.2	0.00004	-44.25	0.00004			
	190	-43.1	0.00005	-44.25	0.00004	-44.3	0.00004	-44.13	0.00004			
	200	-43.7	0.00004	-43.98	0.00004	-44.3	0.00004	-43.49	0.00004			
	210	-44.1	0.00004	-43.65	0.00004	-44.1	0.00004	-42.28	0.00006			
	220	-43.9	0.00004	-44.05	0.00004	-44.3	0.00004	-43.88	0.00004			
	230	-44.3	0.00004	-43.97	0.00004	-44.2	0.00004	-34.94	0.00032			
	240	-43.8	0.00004	-44.28	0.00004	-44.2	0.00004	-33.09	0.00049			
	250	-44.3	0.00004	-44.18	0.00004	-43.3	0.00005	-38.25	0.00015			
	260	-41.3	0.00007	-43.85	0.00004	-44.4	0.00004	-43.56	0.00004			
	270	-43.9	0.00004	-44.09	0.00004	-43.2	0.00005	-43.43	0.00005			
	280	-43.7	0.00004	-42.54	0.00006	-42.2	0.00006	-30.05	0.00099			
	290	-41.1	0.00008	-39.91	0.00010	-40.9	0.00008	-33.92	0.00041			
	300	-31.9	0.00065	-36.73	0.00021	-38.4	0.00015	-40.75	0.00008			
	310	-34.9	0.00033	-35.21	0.00030	-40.6	0.00009	-23.89	0.00408			
	320	-39	0.00013	-34.78	0.00033	-41.4	0.00007	-29.07	0.00124			
	330	-34	0.00040	-38.56	0.00014	-35.7	0.00027	-22.24	0.00597			
	340	-30.6	0.00087	-24.89	0.00324	-43.9	0.00004	-28.45	0.00143			
	350	-32.7	0.00053	-29.12	0.00122	-34	0.00040	-26.51	0.00223			

Note: TRP fact=1dB (see page 379).



## n261:1CC-BW100MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Low channel: n261-BW:100MHz-1CC-BPSK-Beam ID 147 (50 GHz to 75 GHz)

### 10RB11-Horizontal Polarization-Y Axis (EUT)



### 10RB11-Vertical Polarization- Y Axis (EUT)

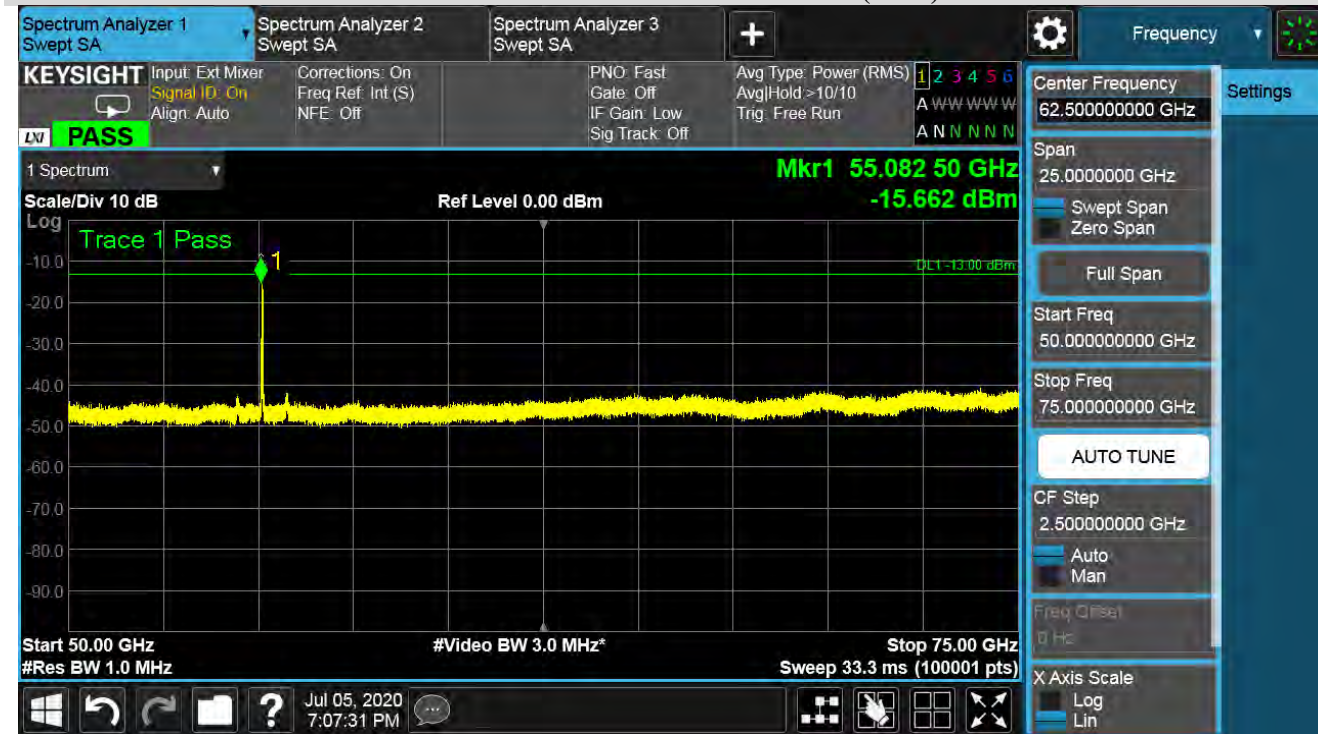


## n261:1CC-BW100MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

**Low channel: n261-BW:100MHz-1CC-BPSK-Beam ID 147 (50 GHz to 75 GHz)**

### 10RB11-Horizontal Polarization-Z Axis (EUT)

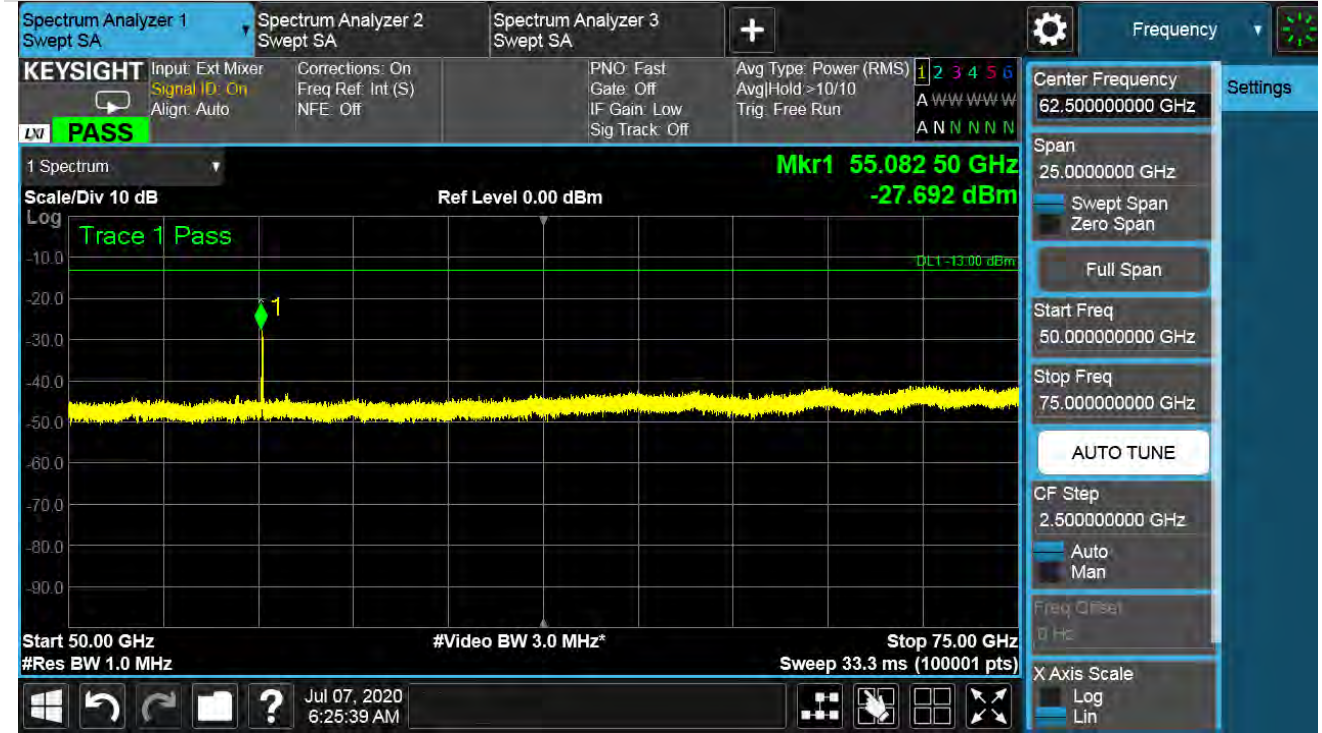

### 10RB11-Vertical Polarization- Z Axis (EUT)

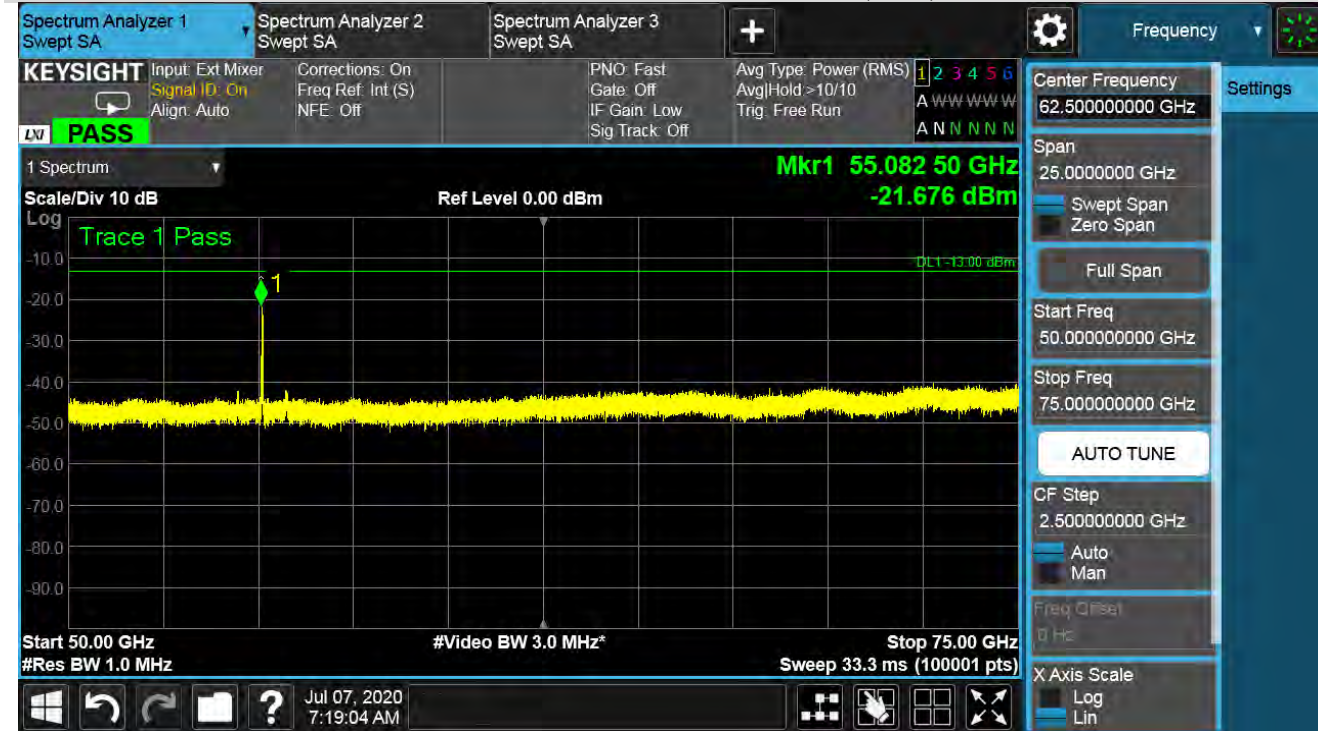



**n261:1CC-BW100MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 147 Middle channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
55.8465	0	-21.5	0.00703	-8.58	0.13868	-19.9	0.01021	-20.45	0.00902	-22.08	-13	-9.08
	10	-44.1	0.00004	-23.63	0.00434	-43.5	0.00004	-28.57	0.00139			
	20	-33.6	0.00044	-26.43	0.00228	-31.9	0.00065	-23.26	0.00472			
	30	-38.3	0.00015	-17.35	0.01841	-40.9	0.00008	-29.62	0.00109			
	40	-35.9	0.00026	-11.96	0.06368	-40	0.00010	-34.52	0.00035			
	50	-35.5	0.00029	-15.56	0.02780	-33	0.00050	-25.44	0.00286			
	60	-38.2	0.00015	-28.03	0.00157	-33.4	0.00046	-27.02	0.00199			
	70	-41.3	0.00007	-34.78	0.00033	-28.7	0.00136	-35.95	0.00025			
	80	-43.6	0.00004	-25.35	0.00292	-40.8	0.00008	-43.61	0.00004			
	90	-44.2	0.00004	-25.83	0.00261	-43.5	0.00004	-44.01	0.00004			
	100	-42.9	0.00005	-33.05	0.00050	-43.9	0.00004	-42.97	0.00005			
	110	-44.1	0.00004	-38.82	0.00013	-44.1	0.00004	-43.67	0.00004			
	120	-40	0.00010	-33.68	0.00043	-44.2	0.00004	-44.22	0.00004			
	130	-42.8	0.00005	-33.34	0.00046	-44.2	0.00004	-43.92	0.00004			
	140	-42.9	0.00005	-38.35	0.00015	-43.9	0.00004	-44.13	0.00004			
	150	-43.6	0.00004	-39.18	0.00012	-44.2	0.00004	-44.18	0.00004			
	160	-44	0.00004	-38.79	0.00013	-44.2	0.00004	-44.36	0.00004			
	170	-43.8	0.00004	-44.22	0.00004	-43.5	0.00004	-44.17	0.00004			
	180	-44.2	0.00004	-44.17	0.00004	-43.9	0.00004	-44.35	0.00004			
	190	-44.1	0.00004	-41.88	0.00006	-42.6	0.00005	-43.62	0.00004			
	200	-44.2	0.00004	-41.75	0.00007	-44.3	0.00004	-42.66	0.00005			
	210	-43.7	0.00004	-42.17	0.00006	-43.4	0.00005	-37.71	0.00017			
	220	-42.9	0.00005	-43.68	0.00004	-41.5	0.00007	-38.72	0.00013			
	230	-43.5	0.00005	-44.11	0.00004	-39.5	0.00011	-35.47	0.00028			
	240	-43.8	0.00004	-43.76	0.00004	-36.2	0.00024	-33.23	0.00048			
	250	-43.8	0.00004	-41.67	0.00007	-38.3	0.00015	-36.67	0.00022			
	260	-35.7	0.00027	-43.15	0.00005	-39.1	0.00012	-41.35	0.00007			
	270	-29.6	0.00109	-40.17	0.00010	-38.4	0.00014	-38.81	0.00013			
	280	-35.6	0.00028	-38.04	0.00016	-40.1	0.00010	-30.85	0.00082			
	290	-41.7	0.00007	-36.62	0.00022	-32.7	0.00053	-31.84	0.00065			
	300	-35.9	0.00026	-28.52	0.00141	-34.1	0.00039	-30.19	0.00096			
	310	-33.8	0.00042	-28.46	0.00143	-40.3	0.00009	-23.01	0.00500			
	320	-31.7	0.00068	-31.38	0.00073	-30.5	0.00088	-27.59	0.00174			
	330	-24.7	0.00340	-43.97	0.00004	-34.8	0.00033	-23.35	0.00462			
	340	-35.3	0.00029	-21.18	0.00762	-35.6	0.00027	-27.39	0.00182			
	350	-38.8	0.00013	-32.41	0.00057	-36.1	0.00024	-24.72	0.00337			

Note: TRP fact=1dB (see page 379).

### n261:1CC-BW100MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:100MHz-1CC-BPSK-Beam ID 147 (50 GHz to 75 GHz)

#### 10RB11-Horizontal Polarization-Y Axis (EUT)



#### 10RB11-Vertical Polarization- Y Axis (EUT)





### n261:1CC-BW100MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:100MHz-1CC-BPSK-Beam ID 147 (50 GHz to 75 GHz)

#### 10RB11-Horizontal Polarization-Z Axis (EUT)



#### 10RB11-Vertical Polarization- Z Axis (EUT)

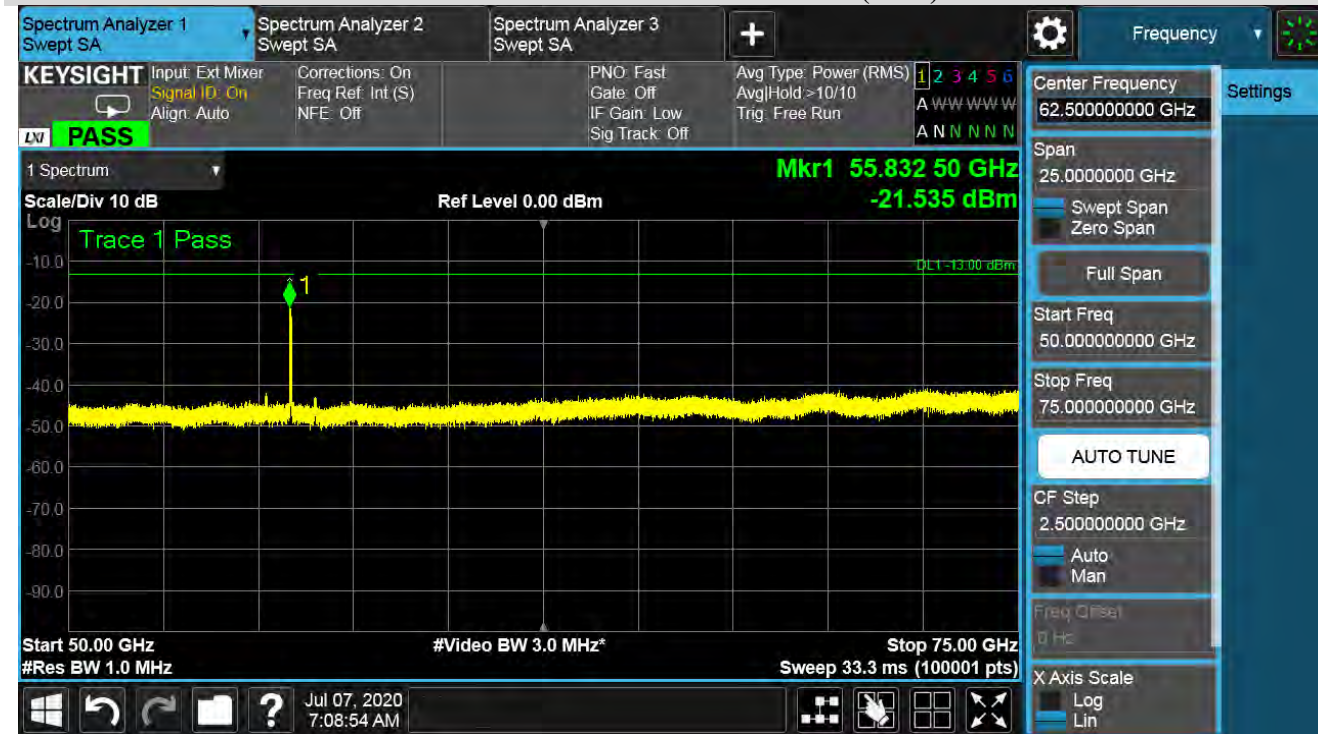

**n261:1CC-BW100MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 147 High channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
56.5967	0	-22.6	0.00551	-9.91	0.10209	-19.8	0.01054	-25.77	0.00265	-23.48	-13	-10.48
	10	-36.9	0.00021	-34.29	0.00037	-38.1	0.00016	-34.26	0.00037			
	20	-29.8	0.00104	-26.15	0.00243	-29.1	0.00124	-28.62	0.00137			
	30	-35.6	0.00027	-20.65	0.00861	-36.3	0.00024	-29.48	0.00113			
	40	-42.5	0.00006	-12.39	0.05768	-37.5	0.00018	-31.75	0.00067			
	50	-41.5	0.00007	-19.96	0.01009	-37.8	0.00017	-27.38	0.00183			
	60	-40.3	0.00009	-28.73	0.00134	-28.2	0.00152	-30.49	0.00089			
	70	-43.1	0.00005	-34.45	0.00036	-25.3	0.00296	-40.27	0.00009			
	80	-44	0.00004	-24.79	0.00332	-33.8	0.00041	-44.53	0.00004			
	90	-44.7	0.00003	-26.05	0.00248	-44.2	0.00004	-44.07	0.00004			
	100	-44.6	0.00003	-37.28	0.00019	-44.3	0.00004	-43.96	0.00004			
	110	-44.5	0.00004	-38.79	0.00013	-44.7	0.00003	-44.13	0.00004			
	120	-44.1	0.00004	-37.09	0.00020	-44.9	0.00003	-44.72	0.00003			
	130	-43.3	0.00005	-35.04	0.00031	-44.2	0.00004	-44.67	0.00003			
	140	-44.6	0.00003	-42.59	0.00006	-43.9	0.00004	-44.75	0.00003			
	150	-44.1	0.00004	-38.79	0.00013	-44.7	0.00003	-44.66	0.00003			
	160	-43.9	0.00004	-39.28	0.00012	-44.8	0.00003	-44.51	0.00004			
	170	-44.1	0.00004	-44.65	0.00003	-44.8	0.00003	-44.73	0.00003			
	180	-43.8	0.00004	-44.78	0.00003	-44.9	0.00003	-44.58	0.00003			
	190	-44.8	0.00003	-43.68	0.00004	-44.7	0.00003	-44.39	0.00004			
	200	-44.8	0.00003	-44.04	0.00004	-44.9	0.00003	-44.71	0.00003			
	210	-42.9	0.00005	-40.15	0.00010	-43.9	0.00004	-40.57	0.00009			
	220	-44.8	0.00003	-43.93	0.00004	-44.1	0.00004	-39.97	0.00010			
	230	-43.4	0.00005	-44.81	0.00003	-43.7	0.00004	-40.75	0.00008			
	240	-44.3	0.00004	-43.91	0.00004	-40.9	0.00008	-40.43	0.00009			
	250	-44.6	0.00003	-43.18	0.00005	-41.3	0.00007	-38.26	0.00015			
	260	-42	0.00006	-42.29	0.00006	-39.6	0.00011	-38.95	0.00013			
	270	-30.8	0.00083	-41.46	0.00007	-36.3	0.00023	-35.67	0.00027			
	280	-34.7	0.00034	-38.56	0.00014	-41.7	0.00007	-29.58	0.00110			
	290	-36.3	0.00023	-37.78	0.00017	-36.4	0.00023	-31.44	0.00072			
	300	-31.9	0.00065	-30.31	0.00093	-35.3	0.00029	-28.69	0.00135			
	310	-43.8	0.00004	-26.15	0.00243	-34.8	0.00033	-29.25	0.00119			
	320	-41.5	0.00007	-28.94	0.00128	-36.2	0.00024	-28.59	0.00138			
	330	-23.8	0.00422	-43.84	0.00004	-32.8	0.00052	-31.52	0.00070			
	340	-27.7	0.00170	-26.76	0.00211	-32.7	0.00053	-37.82	0.00017			
	350	-28.3	0.00149	-28.07	0.00156	-40	0.00010	-27.16	0.00192			

Note: TRP fact=1dB (see page 379).




n261:1CC-BW100MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:100MHz-1CC-BPSK-Beam ID 147 (50 GHz to 75 GHz)

10RB11-Horizontal Polarization-Y Axis (EUT)

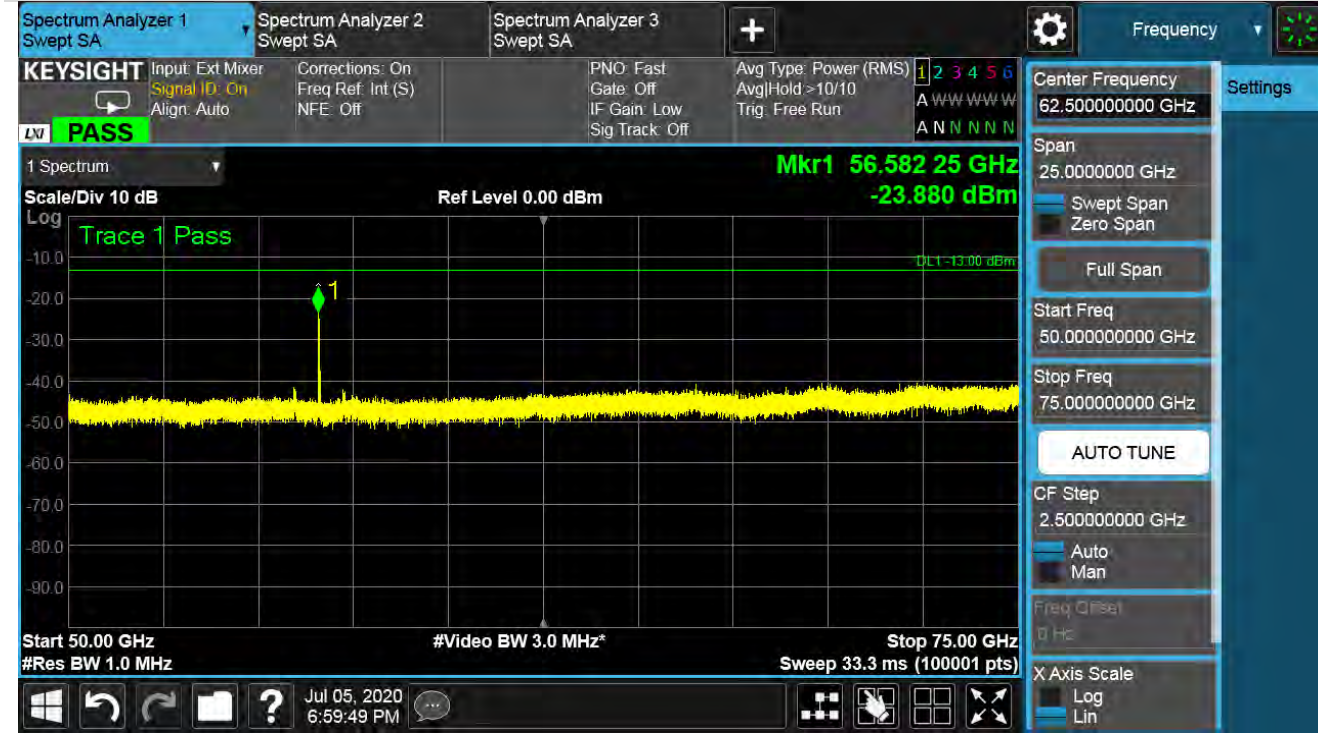

10RB11-Vertical Polarization- Y Axis (EUT)



### n261:1CC-BW100MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:100MHz-1CC-BPSK-Beam ID 147 (50 GHz to 75 GHz)

#### 10RB11-Horizontal Polarization-Z Axis (EUT)



#### 10RB11-Vertical Polarization- Z Axis (EUT)





**n261:1CC-BW100MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 19+147 Low channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
55.0968	0	-19.9	0.01014	-15.4	0.02891	-22.6	0.00555	-20.6	0.00863	-25.40	-13	-12.40
	10	-28.7	0.00134	-34.4	0.00037	-32.9	0.00052	-29	0.00127			
	20	-28	0.00159	-38.3	0.00015	-26.3	0.00234	-34.8	0.00033			
	30	-30.4	0.00091	-26.8	0.00208	-26	0.00252	-30.3	0.00094			
	40	-35.2	0.00030	-17.9	0.01611	-35.2	0.00030	-38.7	0.00014			
	50	-32.4	0.00057	-25.4	0.00287	-41.4	0.00007	-26.2	0.00239			
	60	-40.8	0.00008	-34.5	0.00036	-44	0.00004	-29.9	0.00102			
	70	-43.8	0.00004	-31.6	0.00069	-40.6	0.00009	-38	0.00016			
	80	-41.4	0.00007	-29.4	0.00114	-42.7	0.00005	-43.9	0.00004			
	90	-43.9	0.00004	-27.3	0.00185	-43.6	0.00004	-44.4	0.00004			
	100	-43.4	0.00005	-36.2	0.00024	-44.2	0.00004	-44.5	0.00004			
	110	-43.2	0.00005	-44.5	0.00004	-44.5	0.00004	-44.5	0.00004			
	120	-42.4	0.00006	-42.5	0.00006	-44.4	0.00004	-44.1	0.00004			
	130	-42.8	0.00005	-40.8	0.00008	-44.3	0.00004	-43	0.00005			
	140	-43.4	0.00005	-44.6	0.00003	-43.7	0.00004	-44.5	0.00004			
	150	-42.3	0.00006	-43.8	0.00004	-44.1	0.00004	-44.3	0.00004			
	160	-44.5	0.00004	-44.5	0.00004	-41.3	0.00007	-44	0.00004			
	170	-43.6	0.00004	-44	0.00004	-44.1	0.00004	-43.3	0.00005			
	180	-43.9	0.00004	-44.4	0.00004	-42.5	0.00006	-43.1	0.00005			
	190	-44.4	0.00004	-44.4	0.00004	-32.9	0.00052	-43.7	0.00004			
	200	-43.6	0.00004	-44.2	0.00004	-39.2	0.00012	-43.6	0.00004			
	210	-42.4	0.00006	-42.3	0.00006	-42	0.00006	-42.2	0.00006			
	220	-43.4	0.00005	-42.7	0.00005	-33.9	0.00041	-39.3	0.00012			
	230	-44.1	0.00004	-44	0.00004	-39.2	0.00012	-32.6	0.00055			
	240	-40.4	0.00009	-42.1	0.00006	-32.3	0.00059	-29.5	0.00114			
	250	-43.7	0.00004	-43.3	0.00005	-24.2	0.00384	-34.9	0.00033			
	260	-41.9	0.00006	-44.2	0.00004	-26.8	0.00207	-39.9	0.00010			
	270	-32.5	0.00056	-44.4	0.00004	-26.1	0.00243	-39.5	0.00011			
	280	-43.1	0.00005	-42.9	0.00005	-26.6	0.00219	-37.9	0.00016			
	290	-32.5	0.00056	-41	0.00008	-27	0.00198	-30.7	0.00086			
	300	-29.6	0.00111	-38.2	0.00015	-33.3	0.00047	-36.7	0.00021			
	310	-29.4	0.00115	-34.4	0.00036	-29.8	0.00105	-23.4	0.00453			
	320	-32	0.00063	-27.5	0.00178	-32.1	0.00062	-27.8	0.00165			
	330	-23	0.00502	-38.2	0.00015	-37.4	0.00018	-24.1	0.00387			
	340	-29.1	0.00124	-20	0.00991	-30.5	0.00090	-26.8	0.00208			
	350	-27.2	0.00193	-23.4	0.00462	-30.7	0.00086	-25.7	0.00267			


Note: TRP fact=1dB (see page 379).

### n261:1CC-BW100MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Low channel: n261-BW:100MHz-1CC-BPSK-Beam ID 19+147 (50 GHz to 75 GHz)

#### 10RB11-Horizontal Polarization-Y Axis (EUT)

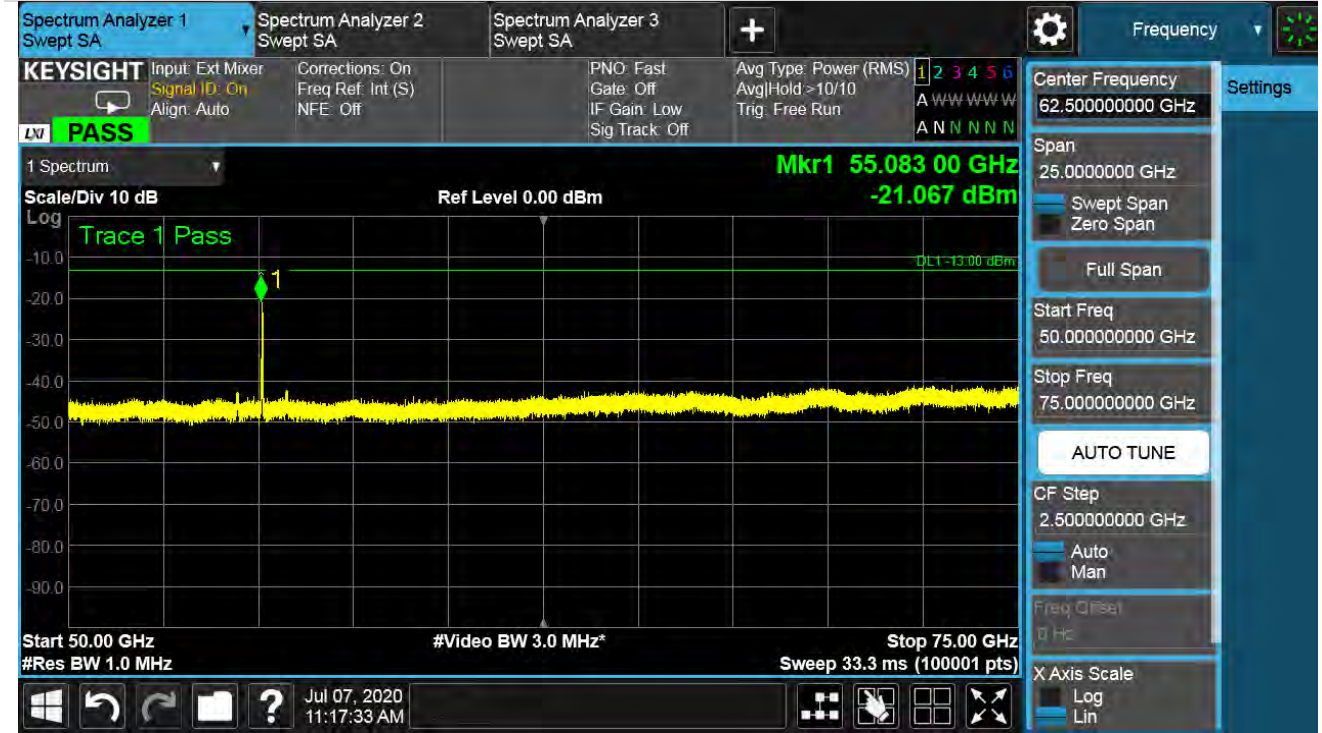

#### 10RB11-Vertical Polarization- Y Axis (EUT)

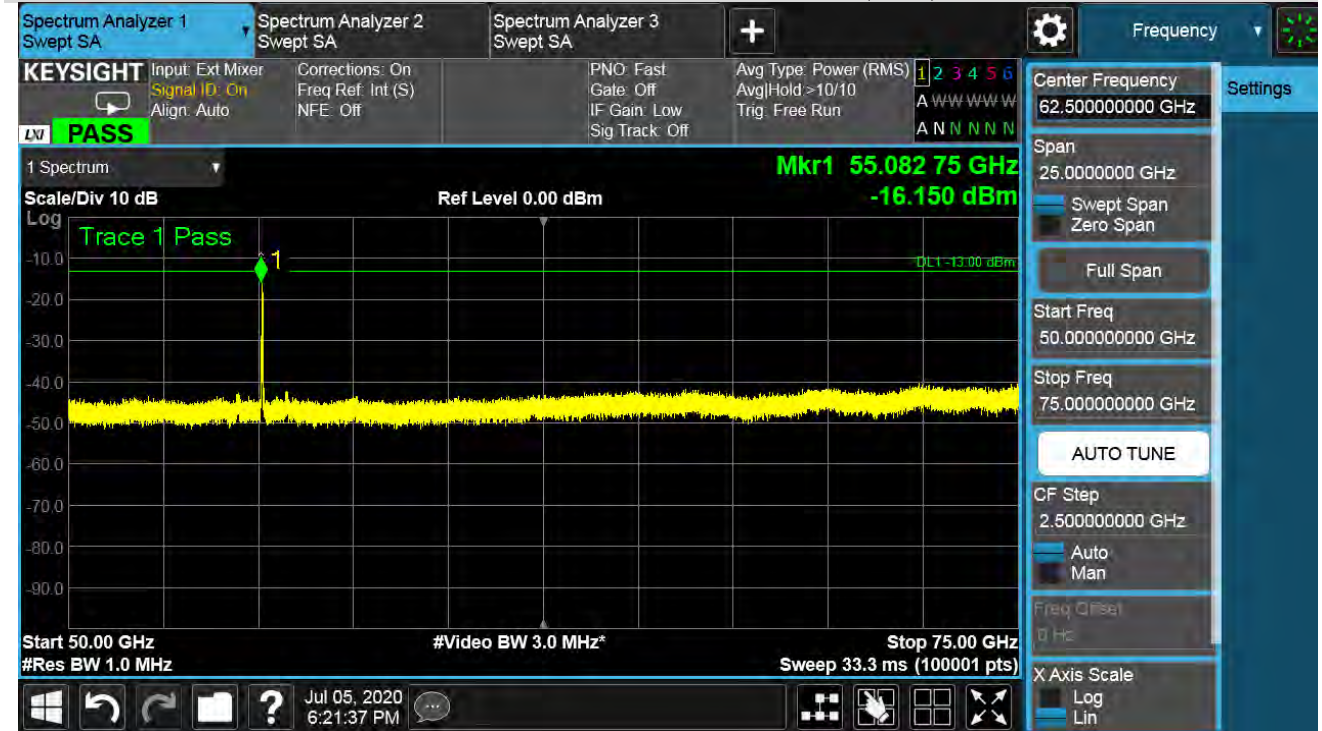




### n261:1CC-BW100MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Low channel: n261-BW:50MHz-1CC-BPSK-Beam ID 19+147 (50 GHz to 75 GHz)

#### 10RB11-Horizontal Polarization-Z Axis (EUT)

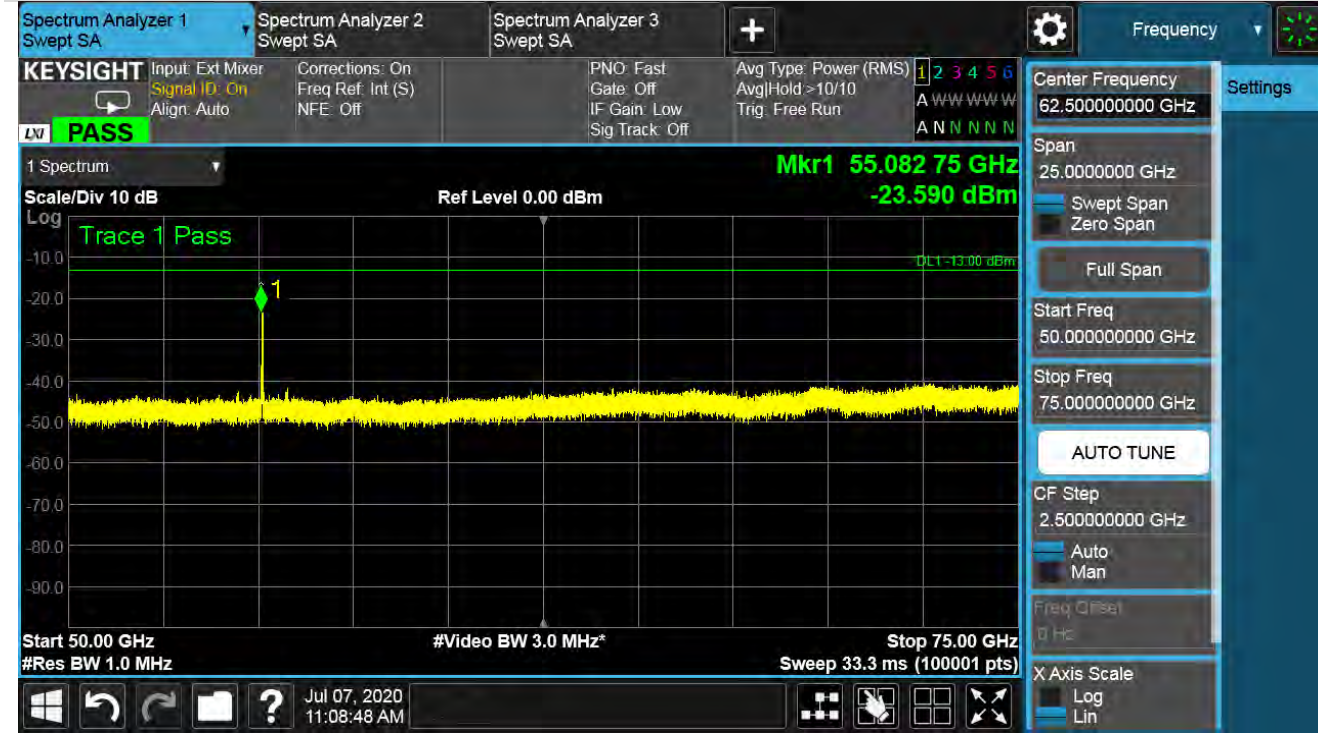

#### 10RB11-Vertical Polarization- Z Axis (EUT)

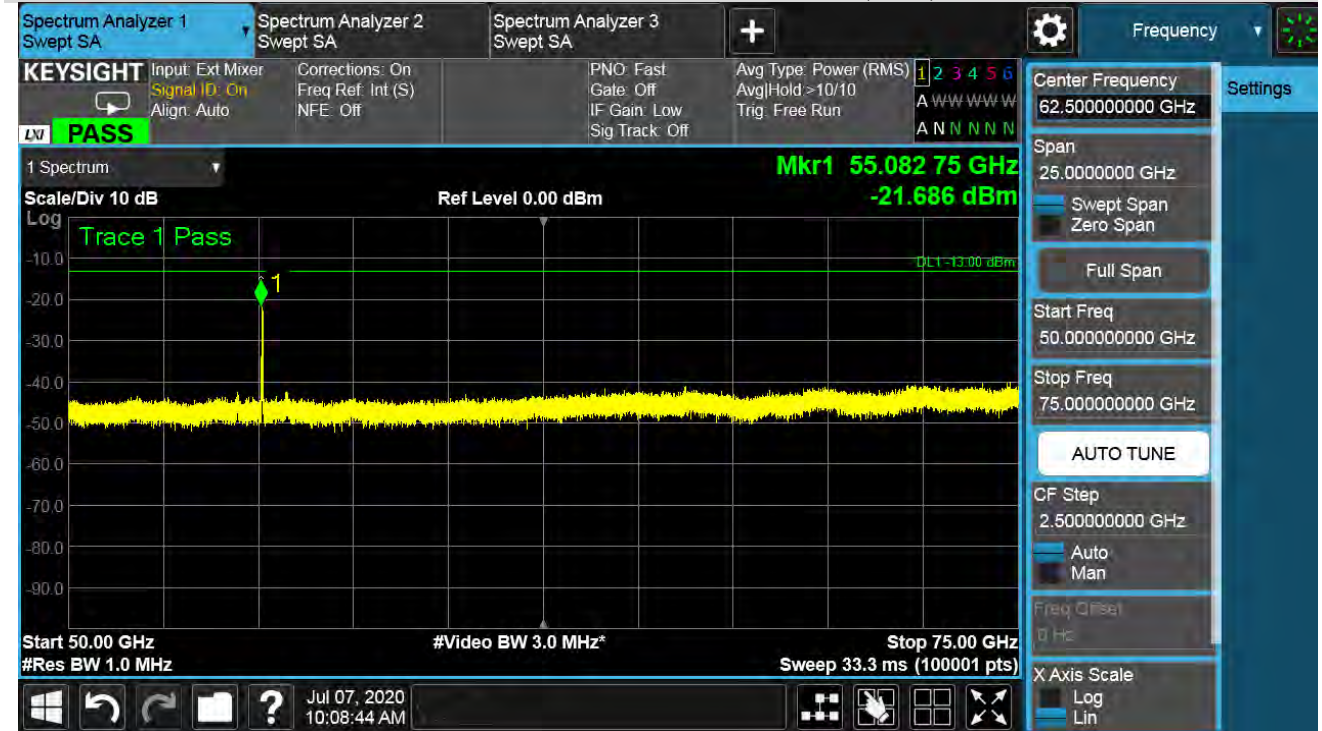

n261:1CC-BW100MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 19+147 Middle channel

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
55.8465	0	-17.4	0.01807	-13	0.04966	-22.1	0.00622	-20.5	0.00883	-23.67	-13	-10.67
	10	-29.3	0.00116	-22.8	0.00521	-26	0.00249	-37.4	0.00018			
	20	-28.4	0.00144	-41.5	0.00007	-31.3	0.00074	-31.4	0.00072			
	30	-29.2	0.00121	-18.9	0.01291	-28.4	0.00145	-30	0.00100			
	40	-30.6	0.00087	-14.7	0.03357	-29	0.00127	-37.6	0.00018			
	50	-35	0.00032	-23.4	0.00455	-27.2	0.00192	-27.3	0.00185			
	60	-40.3	0.00009	-31	0.00080	-28.3	0.00147	-29.4	0.00115			
	70	-39.9	0.00010	-30.7	0.00085	-29.4	0.00115	-37.2	0.00019			
	80	-35.7	0.00027	-27	0.00199	-29.9	0.00102	-43.9	0.00004			
	90	-42.8	0.00005	-26.5	0.00226	-25.3	0.00292	-44.2	0.00004			
	100	-41.9	0.00007	-35.1	0.00031	-32.8	0.00052	-43.7	0.00004			
	110	-42.3	0.00006	-42.7	0.00005	-30.1	0.00097	-44.3	0.00004			
	120	-43.2	0.00005	-44.4	0.00004	-35.1	0.00031	-44.3	0.00004			
	130	-44.3	0.00004	-38.9	0.00013	-43.4	0.00005	-43.8	0.00004			
	140	-43.8	0.00004	-42.7	0.00005	-44.2	0.00004	-42.6	0.00006			
	150	-43	0.00005	-44.5	0.00004	-43.3	0.00005	-43.8	0.00004			
	160	-43.6	0.00004	-42.7	0.00005	-44.2	0.00004	-43	0.00005			
	170	-43.3	0.00005	-44.4	0.00004	-41.6	0.00007	-43.8	0.00004			
	180	-43.7	0.00004	-43.3	0.00005	-41.7	0.00007	-43.4	0.00005			
	190	-42.1	0.00006	-44.2	0.00004	-44.3	0.00004	-42.3	0.00006			
	200	-42.3	0.00006	-43.6	0.00004	-44.2	0.00004	-44.1	0.00004			
	210	-41.6	0.00007	-43.9	0.00004	-43.7	0.00004	-41.8	0.00007			
	220	-42.6	0.00006	-41.5	0.00007	-42.1	0.00006	-42.8	0.00005			
	230	-43.7	0.00004	-42.7	0.00005	-43.8	0.00004	-37.1	0.00020			
	240	-43	0.00005	-43.3	0.00005	-41.1	0.00008	-37.5	0.00018			
	250	-40.4	0.00009	-41.5	0.00007	-41.4	0.00007	-40.2	0.00010			
	260	-42.6	0.00005	-43.5	0.00004	-34.8	0.00033	-40.4	0.00009			
	270	-34.8	0.00033	-42.6	0.00006	-34.2	0.00038	-42.6	0.00005			
	280	-33.2	0.00048	-39	0.00013	-41.1	0.00008	-36.6	0.00022			
	290	-31.3	0.00075	-38.9	0.00013	-34.3	0.00037	-37.3	0.00019			
	300	-29	0.00126	-34.7	0.00034	-32.4	0.00057	-33.5	0.00045			
	310	-27.4	0.00181	-32.2	0.00060	-35.6	0.00028	-22.6	0.00555			
	320	-32.6	0.00055	-26.3	0.00233	-35.4	0.00029	-32.7	0.00053			
	330	-18	0.01600	-33.2	0.00048	-25.1	0.00313	-26	0.00254			
	340	-26.9	0.00204	-21.9	0.00653	-28.6	0.00138	-31.3	0.00073			
	350	-29.4	0.00114	-18	0.01578	-37.7	0.00017	-27.5	0.00179			

Note: TRP fact=1dB (see page 379).



n261:1CC-BW100MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:100MHz-1CC-BPSK-Beam ID 19+147(50 GHz to 75 GHz)

10RB11-Horizontal Polarization-Y Axis (EUT)



10RB11-Vertical Polarization- Y Axis (EUT)

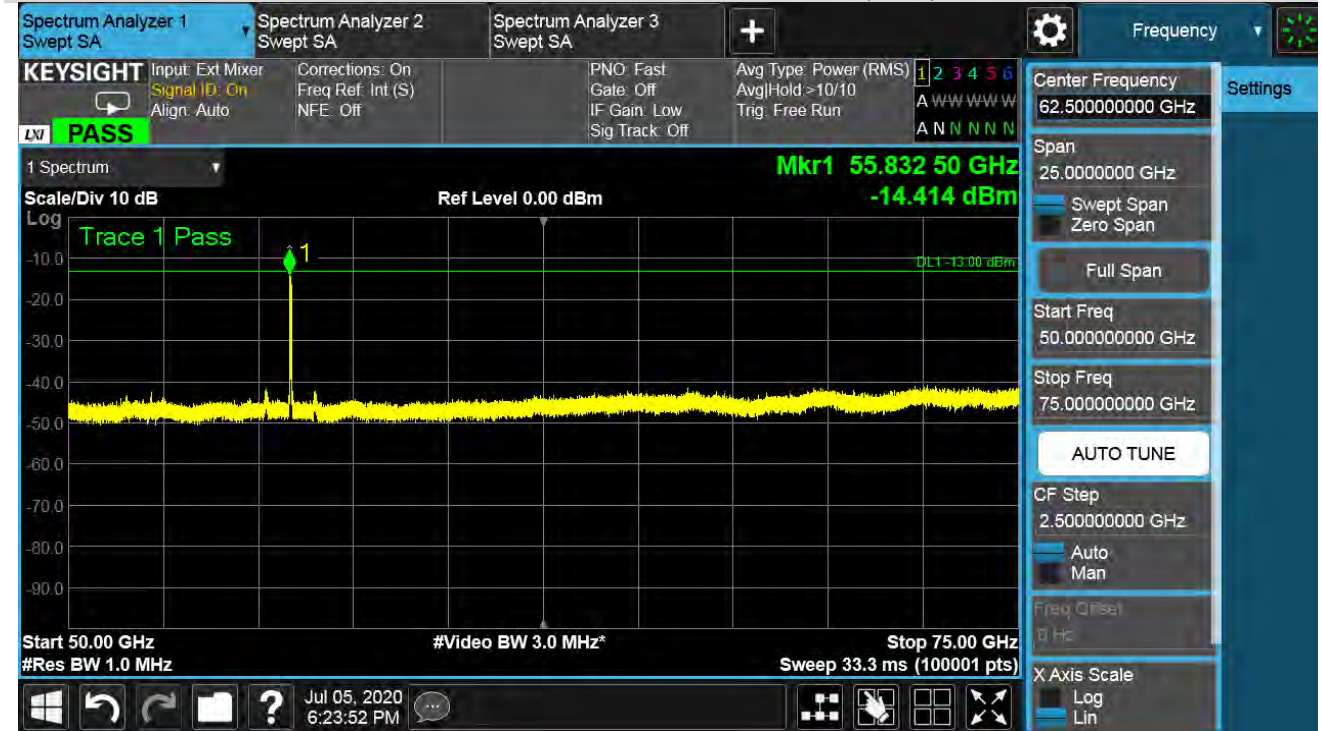


### n261:1CC-BW100MHz-RSE 50GHz to 75GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:100MHz-1CC-BPSK-Beam ID 19+147(50 GHz to 75 GHz)

#### 10RB11-Horizontal Polarization-Z Axis (EUT)

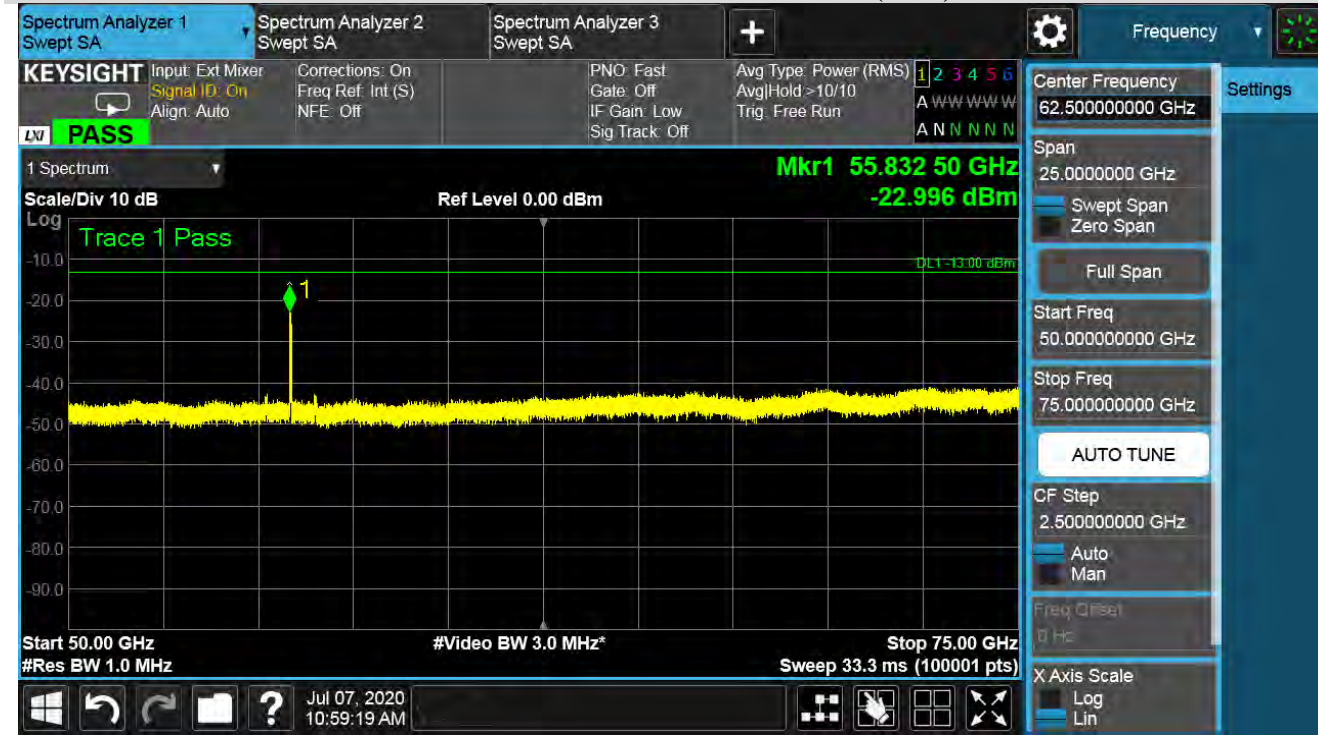

#### 10RB11-Vertical Polarization- Z Axis (EUT)





**n261:1CC-BW100MHz-2 CUTS TRP RSE 50GHz to 75GHz-  
Bema ID 19+147 High channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
56.5967	0	-20.2	0.00962	-15.5	0.02851	-23.3	0.00469	-26.1	0.00244	-25.54	-13	-12.54
	10	-38.6	0.00014	-24.3	0.00368	-27.2	0.00190	-28.8	0.00131			
	20	-37.9	0.00016	-32.4	0.00057	-41	0.00008	-41.1	0.00008			
	30	-29.1	0.00124	-17.9	0.01637	-27.1	0.00193	-35.3	0.00030			
	40	-31.4	0.00072	-18	0.01603	-30.5	0.00088	-27.7	0.00168			
	50	-31.6	0.00069	-25.6	0.00277	-26.9	0.00205	-37.5	0.00018			
	60	-34	0.00040	-31.3	0.00074	-28.7	0.00136	-31.3	0.00075			
	70	-36.4	0.00023	-32.2	0.00061	-28.5	0.00140	-31.1	0.00077			
	80	-40.4	0.00009	-25.7	0.00268	-25.2	0.00299	-26.5	0.00226			
	90	-40.7	0.00009	-28.6	0.00137	-27.6	0.00173	-34.5	0.00036			
	100	-37.9	0.00016	-39.8	0.00010	-29.9	0.00102	-43.2	0.00005			
	110	-37.5	0.00018	-43.4	0.00005	-33.5	0.00045	-44.8	0.00003			
	120	-44.3	0.00004	-42.9	0.00005	-37.7	0.00017	-44.2	0.00004			
	130	-42.3	0.00006	-41.8	0.00007	-42	0.00006	-44.8	0.00003			
	140	-43.3	0.00005	-43.9	0.00004	-43.6	0.00004	-44.6	0.00003			
	150	-42.2	0.00006	-44.6	0.00003	-44.1	0.00004	-43.3	0.00005			
	160	-43.1	0.00005	-43.2	0.00005	-44.5	0.00004	-44.6	0.00004			
	170	-42.7	0.00005	-43.5	0.00004	-42.1	0.00006	-44.6	0.00003			
	180	-43.8	0.00004	-43.7	0.00004	-43.7	0.00004	-44	0.00004			
	190	-43	0.00005	-43.3	0.00005	-44.1	0.00004	-44.8	0.00003			
	200	-44.6	0.00003	-44.6	0.00003	-43.8	0.00004	-44.8	0.00003			
	210	-44.8	0.00003	-42.7	0.00005	-44.6	0.00003	-43.8	0.00004			
	220	-44	0.00004	-42.9	0.00005	-43.7	0.00004	-42.8	0.00005			
	230	-44.2	0.00004	-43.7	0.00004	-44.8	0.00003	-44.2	0.00004			
	240	-44.3	0.00004	-43.9	0.00004	-41.2	0.00008	-43.2	0.00005			
	250	-41.7	0.00007	-44.4	0.00004	-39.1	0.00012	-44.8	0.00003			
	260	-37	0.00020	-44.1	0.00004	-33.4	0.00045	-40.4	0.00009			
	270	-28.1	0.00153	-43.7	0.00004	-32.6	0.00054	-44.7	0.00003			
	280	-29.7	0.00107	-41.1	0.00008	-39.7	0.00011	-41.3	0.00007			
	290	-29.5	0.00112	-40.1	0.00010	-36.4	0.00023	-41.8	0.00007			
	300	-30.9	0.00081	-34.5	0.00035	-32.9	0.00051	-31.8	0.00066			
	310	-29.4	0.00114	-31.5	0.00071	-35.9	0.00026	-30.7	0.00085			
	320	-41.9	0.00007	-28.8	0.00133	-30.4	0.00092	-35.5	0.00028			
	330	-23.4	0.00455	-32.6	0.00055	-24.5	0.00354	-33.1	0.00049			
	340	-24	0.00397	-27.6	0.00173	-30.7	0.00085	-29.7	0.00107			
	350	-30.6	0.00087	-21.6	0.00693	-40.9	0.00008	-31.7	0.00068			

Note: TRP fact=1dB (see page 379).

## n261:1CC-BW100MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:100MHz-1CC-BPSK-Beam ID 19+147 (50 GHz to 75 GHz)

### 10RB11-Horizontal Polarization-Y Axis (EUT)



### 10RB11-Vertical Polarization- Y Axis (EUT)

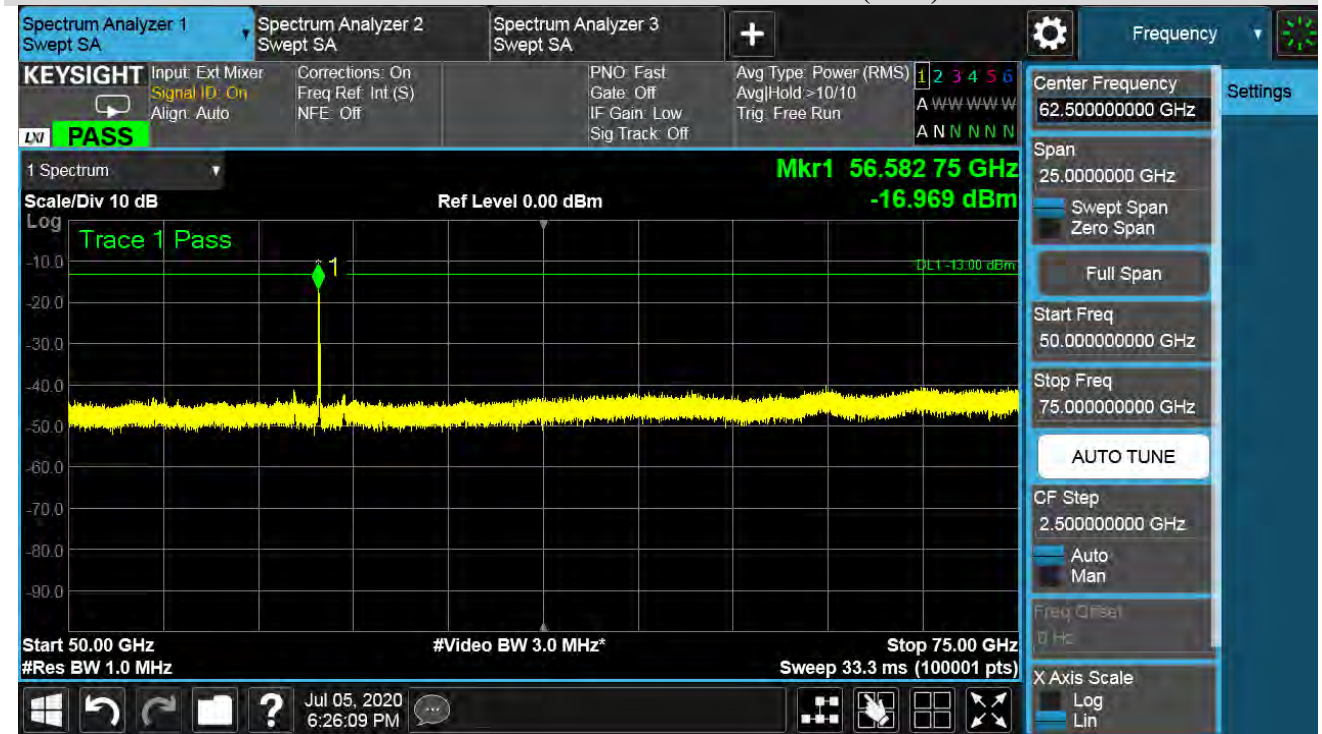




## n261:1CC-BW100MHz-RSE 50GHz to 75GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:100MHz-1CC-BPSK-Beam ID 19+147 (50 GHz to 75 GHz)

### 10RB11-Horizontal Polarization-Z Axis (EUT)

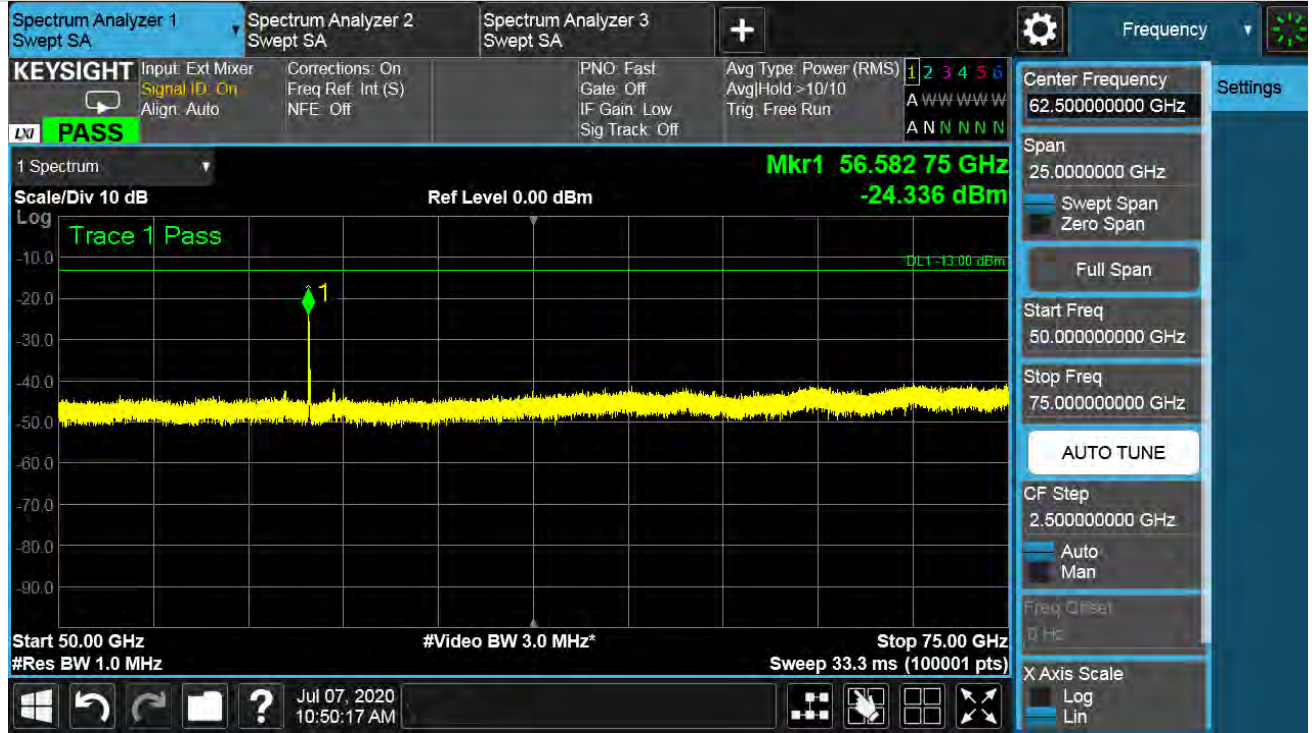


### 10RB11-Vertical Polarization- Z Axis (EUT)

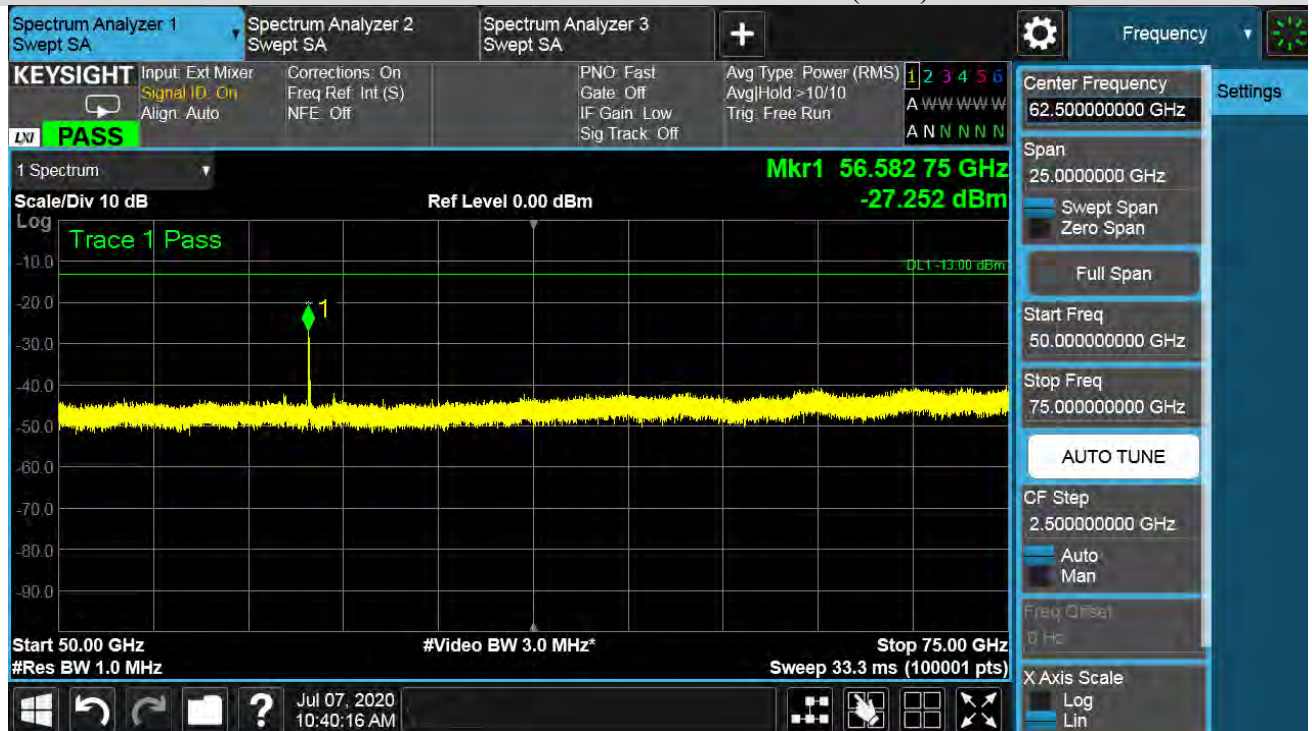


## n261:2CC-BW50MHz-RSE 50GHz to 75GHz

**Low channel: n261-BW:50MHz-2CC-QPSK-Beam ID 148 (50 GHz to 75 GHz)**

### Full RB-Horizontal Polarization

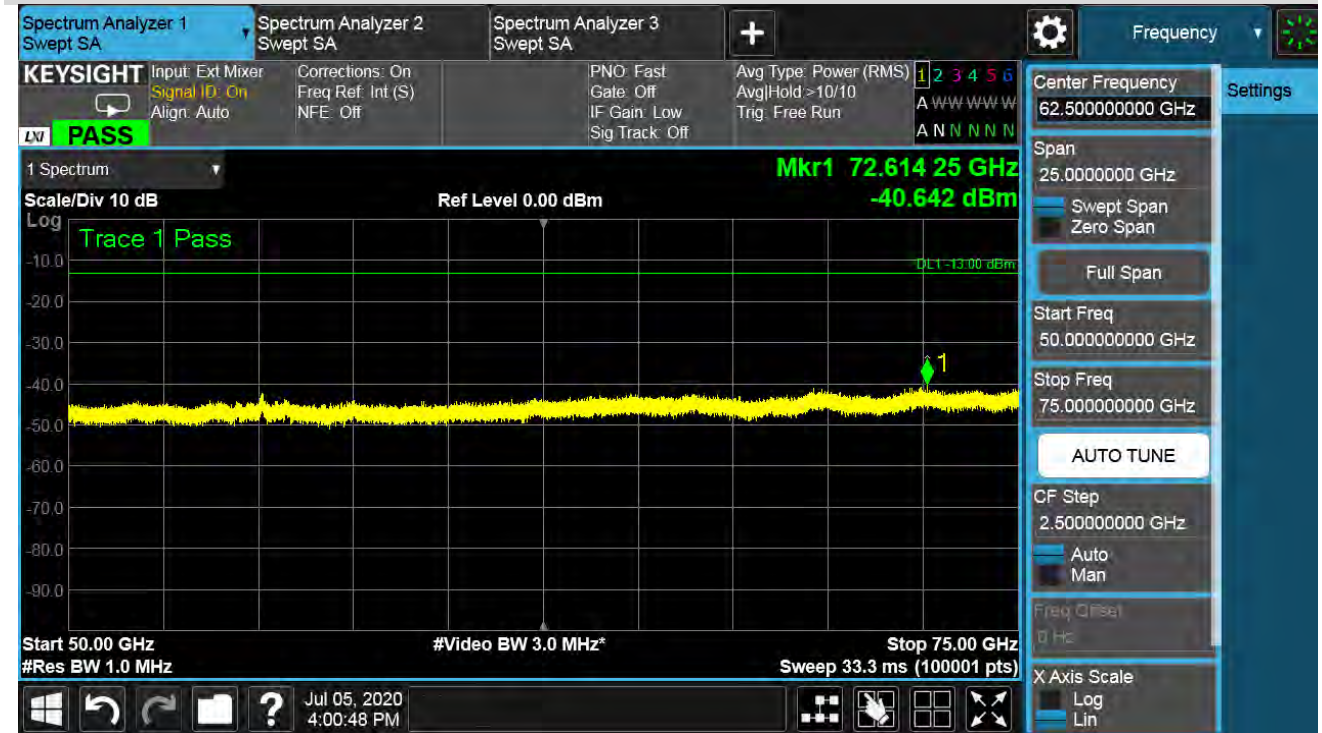

### Full RB-Vertical Polarization

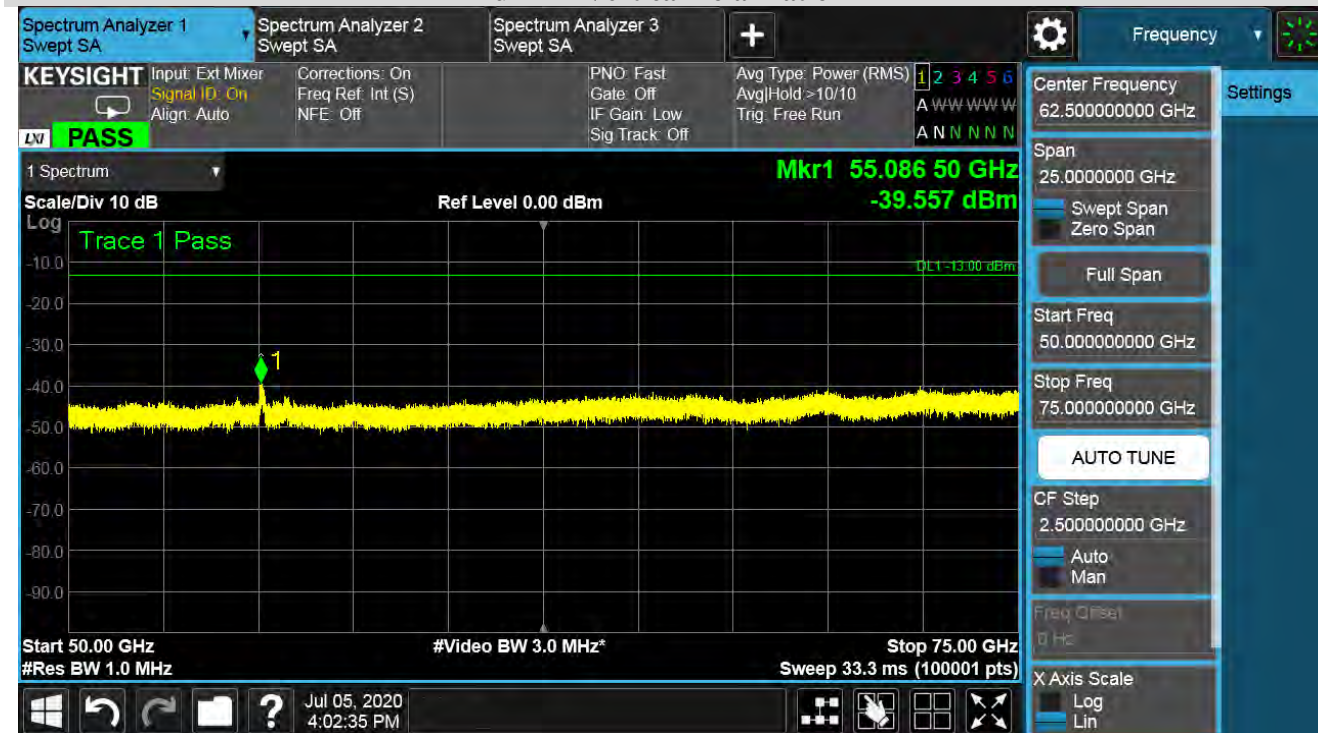





## n261:2CC-BW50MHz-RSE 50GHz to 75GHz

**Middle channel: n261-BW:50MHz-2CC-QPSK-Beam ID 148 (50 GHz to 75 GHz)**

### Full RB-Horizontal Polarization

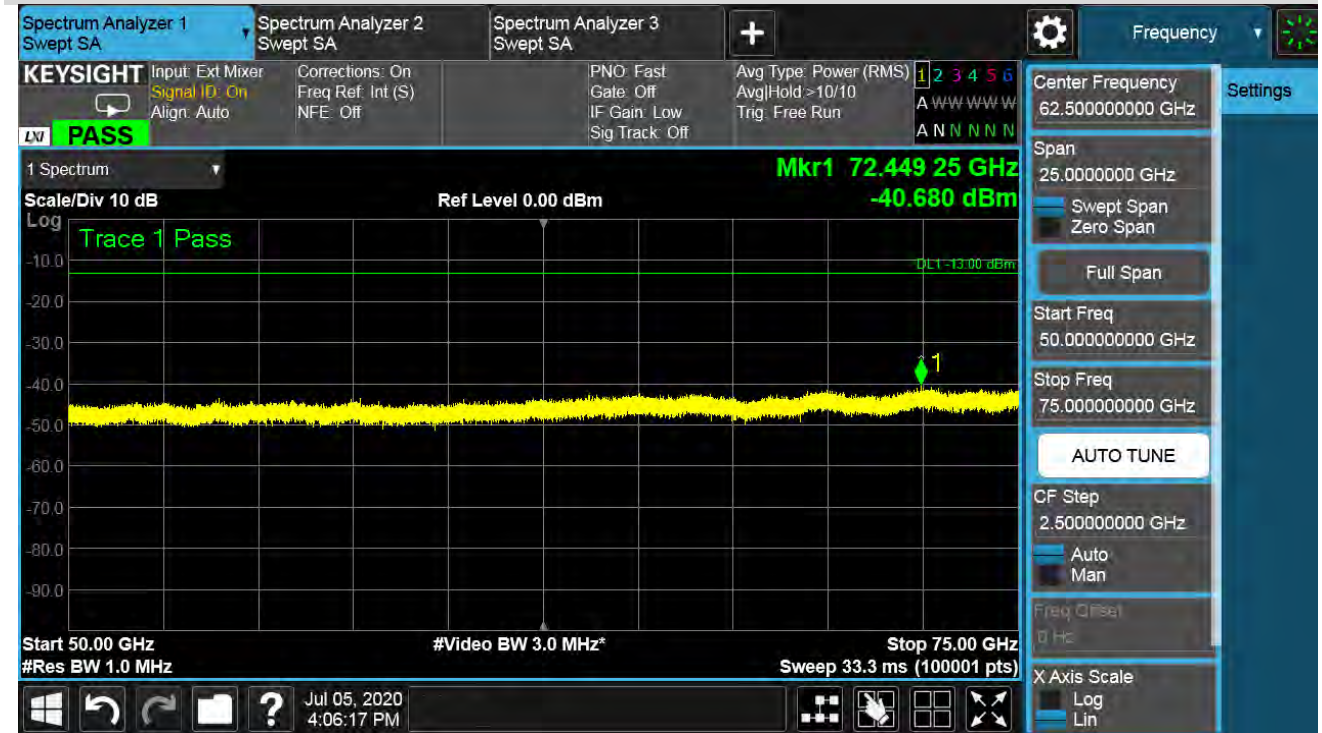

### Full RB-Vertical Polarization

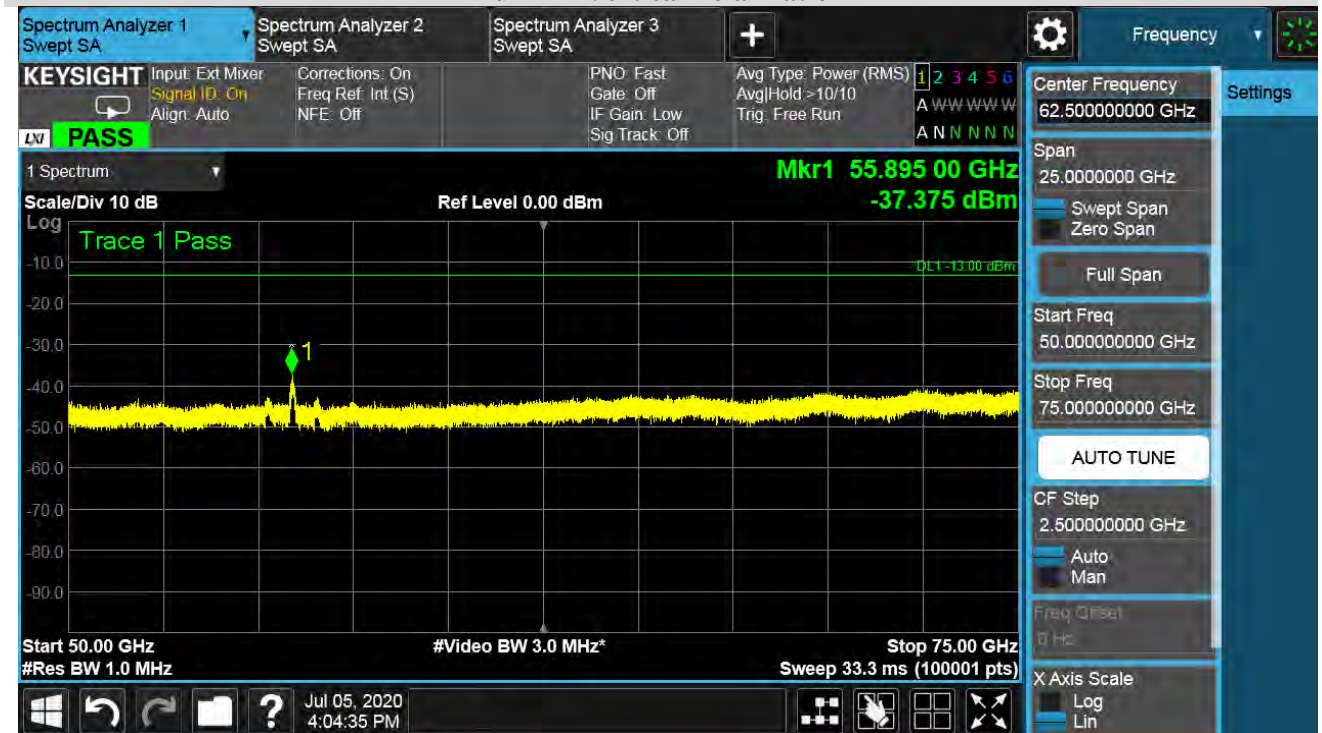


## n261:2CC-BW50MHz-RSE 50GHz to 75GHz

High channel: n261-BW:50MHz-2CC-QPSK-Beam ID 148 (50 GHz to 75 GHz)

### Full RB-Horizontal Polarization



### Full RB-Vertical Polarization

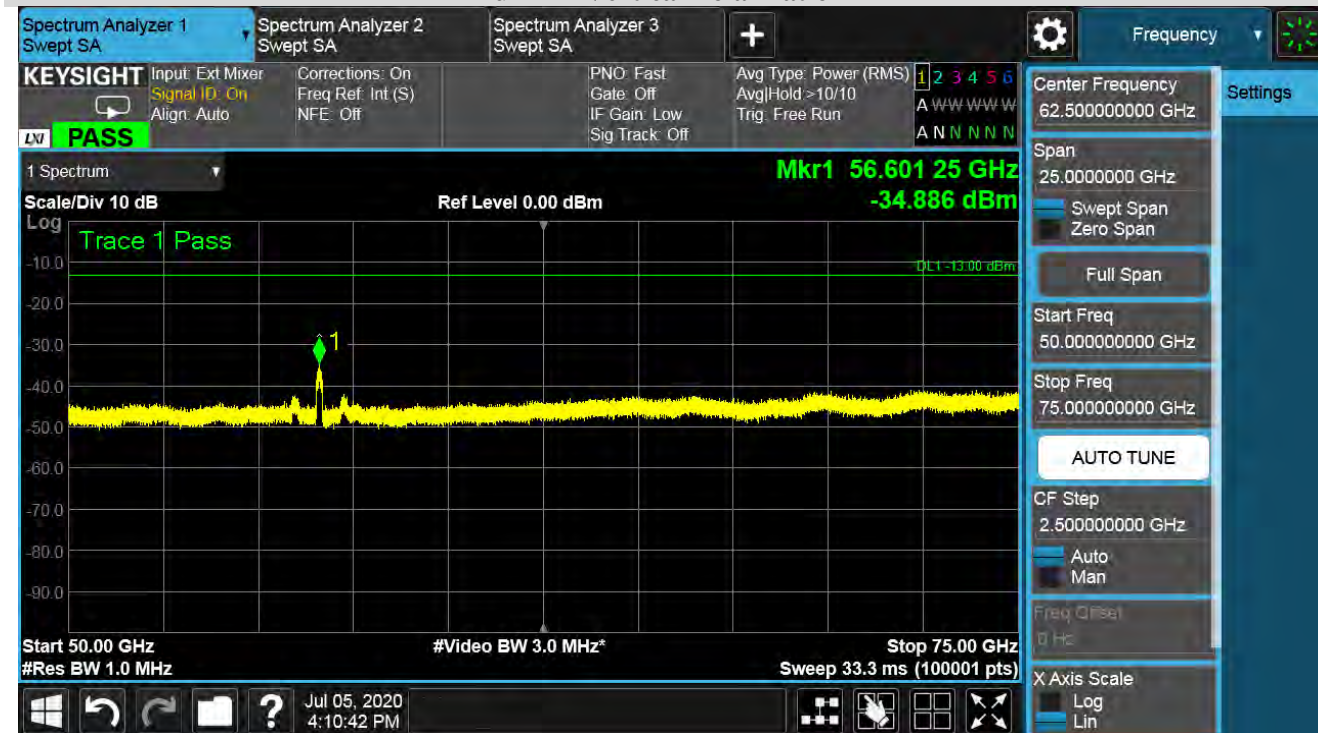





## n261:2CC-BW100MHz-RSE 50GHz to 75GHz

**Low channel: n261-BW:100MHz-2CC-QPSK-Beam ID 19 (50 GHz to 75 GHz)**

### 20RB22-Horizontal Polarization

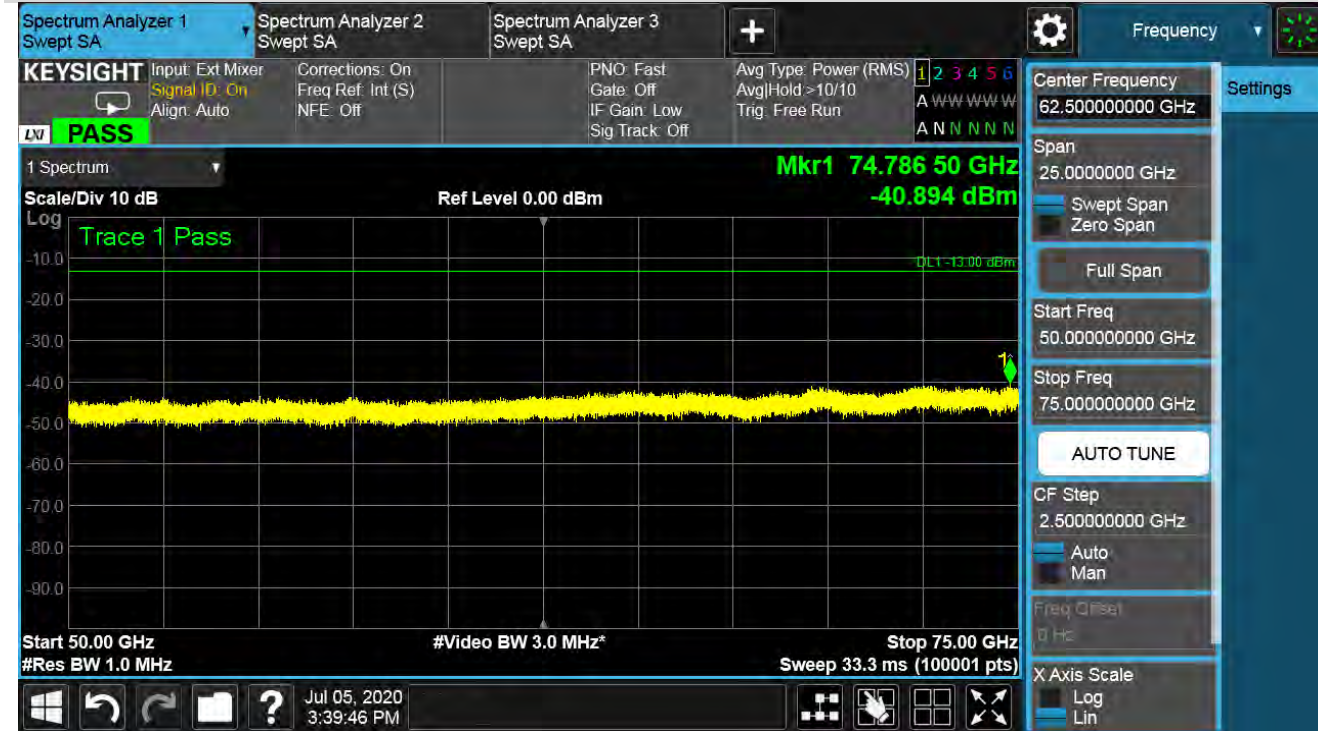


### 20RB22-Vertical Polarization

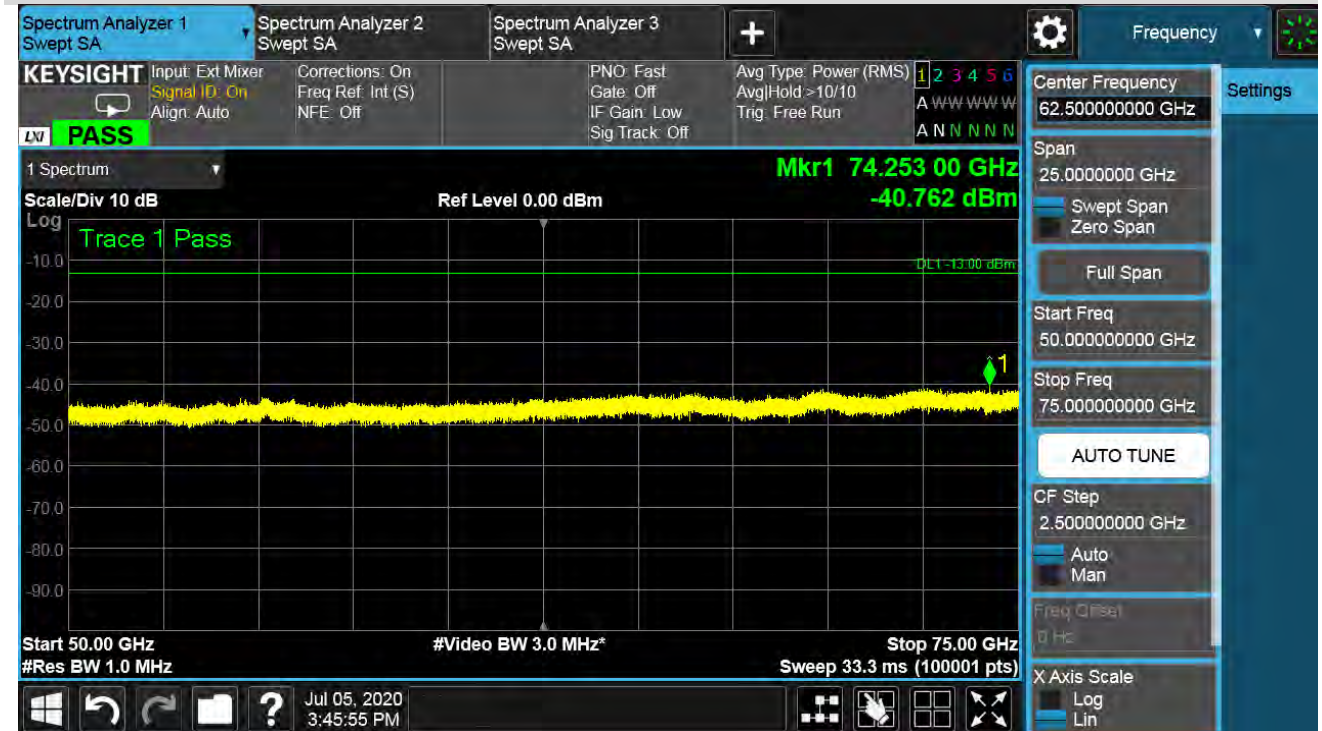


## n261:2CC-BW100MHz-RSE 50GHz to 75GHz

Middle channel: n261-BW:100MHz-2CC-QPSK-Beam ID 19 (50 GHz to 75 GHz)

### 20RB22-Horizontal Polarization

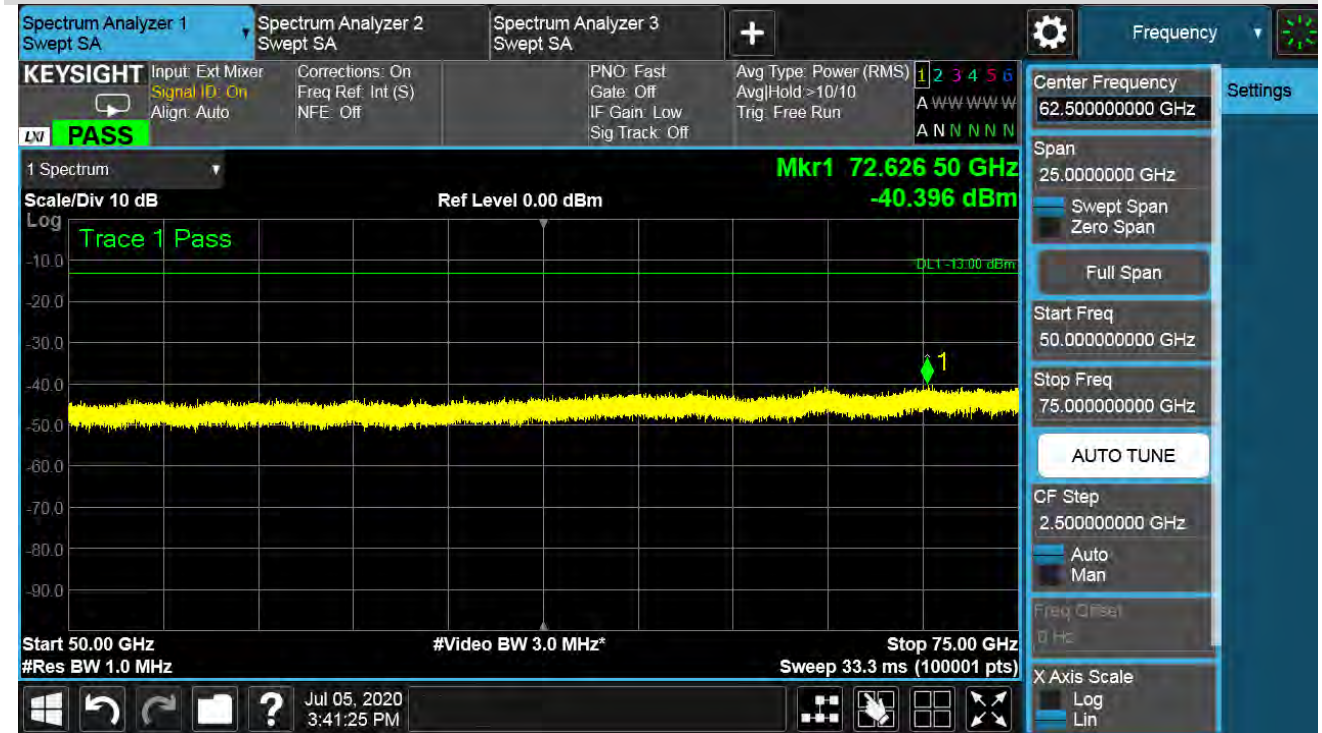

### 20RB22-Vertical Polarization

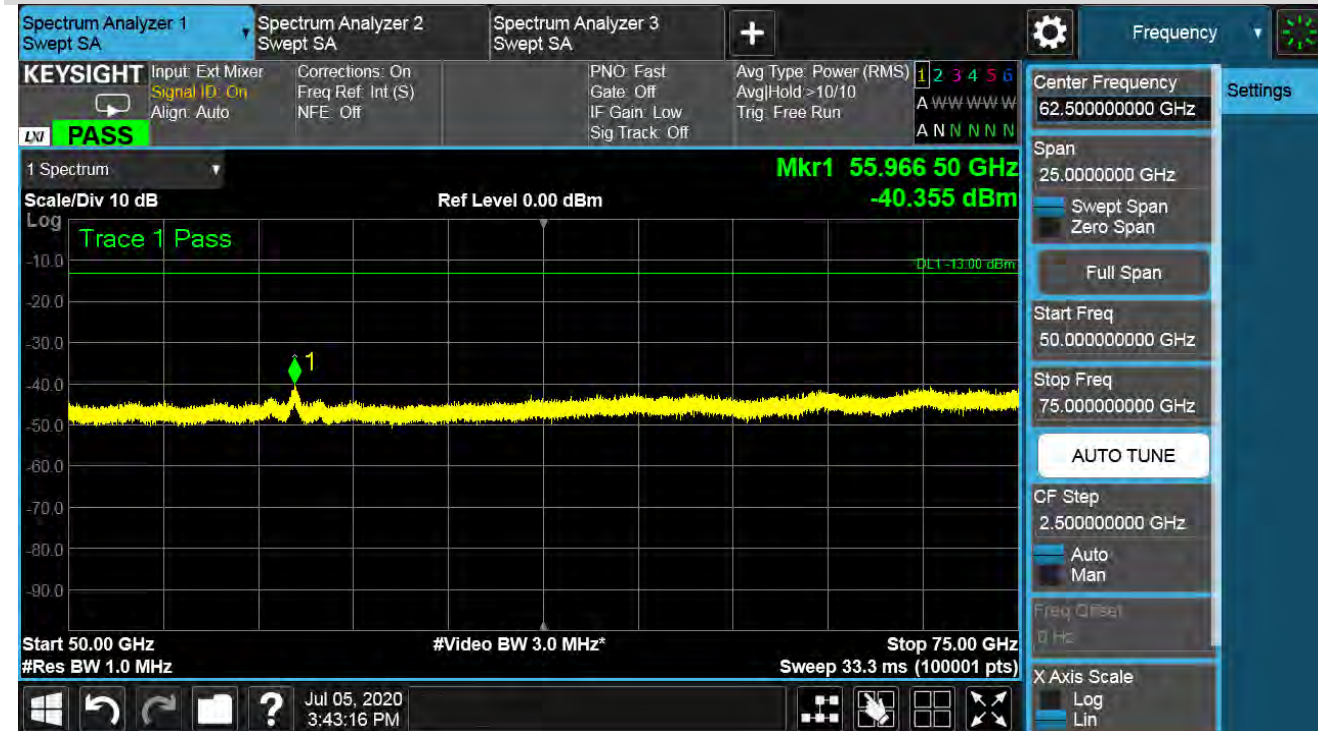





## n261:2CC-BW100MHz-RSE 50GHz to 75GHz

**High channel: n261-BW:100MHz-2CC-QPSK-Beam ID 19 (50 GHz to 75 GHz)**

### 20RB22-Horizontal Polarization

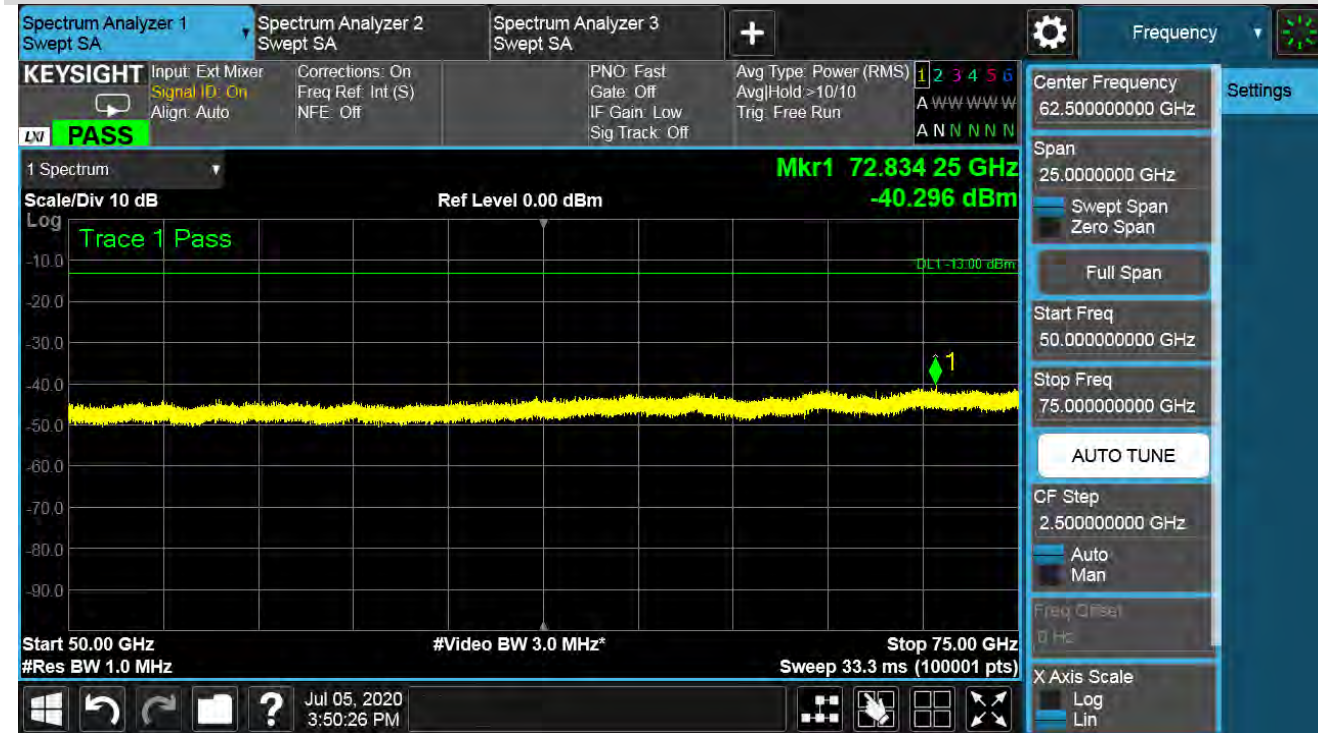

### 20RB22-Vertical Polarization

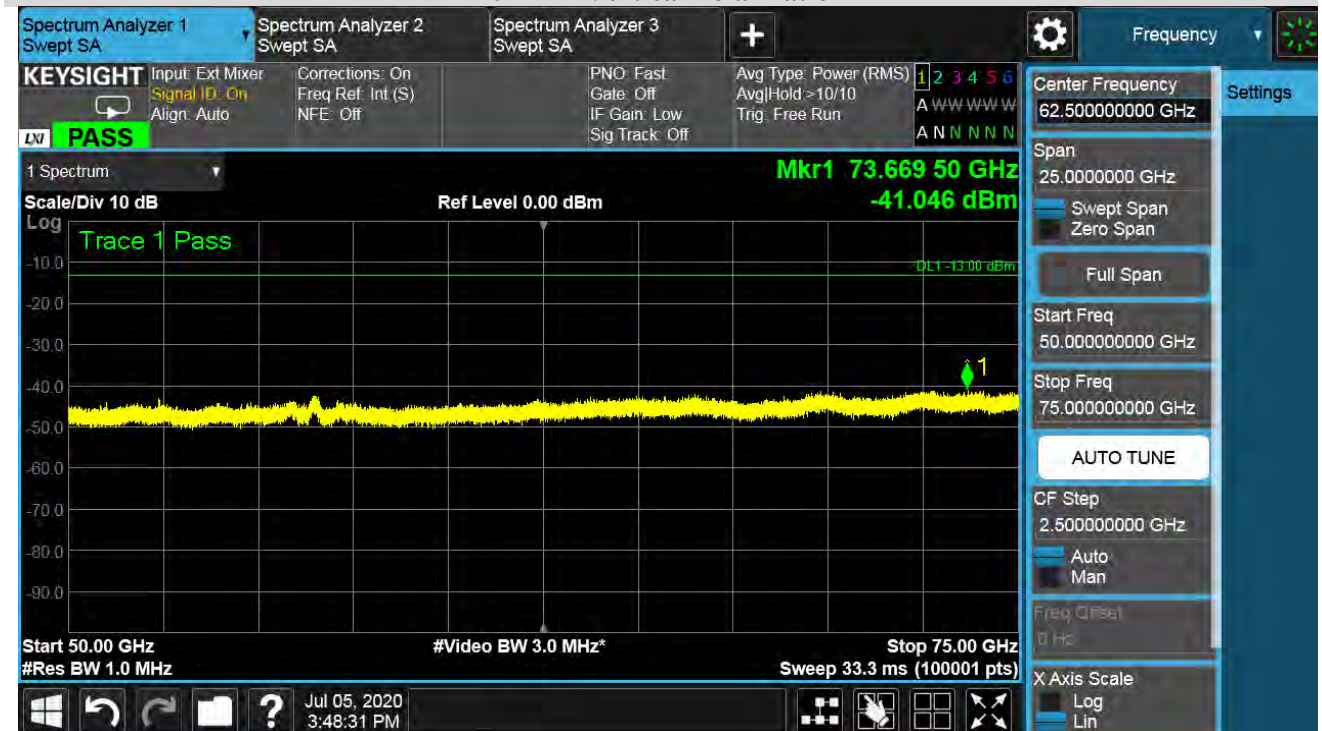

**n261:1CC-BW50MHz-2 CUTS TRP RSE 75 GHz to 100 GHz -  
Bema ID 23 Low channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
82.57413	0	-17.23	0.01892	-12.49	0.05636	-18.12	0.01542	-21.86	0.00652	-23.40	-13	-10.40
	10	-24.53	0.00352	-19.82	0.01042	-21.41	0.00723	-36.51	0.00022			
	20	-28.61	0.00138	-24.05	0.00394	-34.07	0.00039	-24.48	0.00356			
	30	-32.73	0.00053	-22.36	0.00581	-31.83	0.00066	-28.63	0.00137			
	40	-17.91	0.01618	-23.31	0.00467	-29.71	0.00107	-34.63	0.00034			
	50	-20.05	0.00989	-29.86	0.00103	-25.61	0.00275	-38.45	0.00014			
	60	-30.74	0.00084	-35.31	0.00029	-25.51	0.00281	-40.25	0.00009			
	70	-24.98	0.00318	-35.15	0.00031	-29.98	0.00100	-40.07	0.00010			
	80	-36.85	0.00021	-33.93	0.00040	-39.34	0.00012	-40.28	0.00009			
	90	-39.78	0.00011	-39.65	0.00011	-39.54	0.00011	-40.29	0.00009			
	100	-36.91	0.00020	-38.98	0.00013	-40.35	0.00009	-40.25	0.00009			
	110	-37.43	0.00018	-40.29	0.00009	-40.17	0.00010	-38.24	0.00015			
	120	-39.95	0.00010	-39.77	0.00011	-40.29	0.00009	-40.21	0.00010			
	130	-38.98	0.00013	-40.35	0.00009	-40.31	0.00009	-40.26	0.00009			
	140	-40.12	0.00010	-40.21	0.00010	-40.38	0.00009	-40.29	0.00009			
	150	-39.84	0.00010	-40.03	0.00010	-40.12	0.00010	-40.14	0.00010			
	160	-39.53	0.00011	-39.76	0.00011	-39.81	0.00010	-40.08	0.00010			
	170	-40.08	0.00010	-40.08	0.00010	-40.32	0.00009	-39.62	0.00011			
	180	-40.31	0.00009	-40.12	0.00010	-40.14	0.00010	-40.14	0.00010			
	190	-40.19	0.00010	-40.37	0.00009	-40.51	0.00009	-40.29	0.00009			
	200	-40.07	0.00010	-40.26	0.00009	-40.39	0.00009	-40.24	0.00009			
	210	-40.05	0.00010	-40.51	0.00009	-40.24	0.00009	-38.98	0.00013			
	220	-40.12	0.00010	-39.89	0.00010	-39.89	0.00010	-36.87	0.00021			
	230	-40.31	0.00009	-40.32	0.00009	-38.53	0.00014	-39.14	0.00012			
	240	-40.22	0.00010	-40.28	0.00009	-39.71	0.00011	-38.95	0.00013			
	250	-38.74	0.00013	-39.73	0.00011	-38.47	0.00014	-39.98	0.00010			
	260	-40.25	0.00009	-40.26	0.00009	-36.59	0.00022	-37.24	0.00019			
	270	-39.57	0.00011	-39.98	0.00010	-39.62	0.00011	-30.08	0.00098			
	280	-33.95	0.00040	-38.69	0.00014	-39.16	0.00012	-28.57	0.00139			
	290	-27.38	0.00183	-34.56	0.00035	-33.45	0.00045	-35.19	0.00030			
	300	-21.98	0.00634	-30.13	0.00097	-26.29	0.00235	-33.29	0.00047			
	310	-26.41	0.00229	-26.98	0.00200	-32.48	0.00056	-32.13	0.00061			
	320	-20.73	0.00845	-30.46	0.00090	-29.62	0.00109	-28.12	0.00154			
	330	-27.71	0.00169	-29.82	0.00104	-28.35	0.00146	-34.52	0.00035			
	340	-23.36	0.00461	-25.01	0.00316	-33.43	0.00045	-32.05	0.00062			
	350	-22.51	0.00561	-17.35	0.01841	-33.32	0.00047	-37.83	0.00016			

Note: TRP fact=1dB (see page 380).




## n261:1CC-BW50MHz-RSE 75 GHz to 100 GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Low channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (75 GHz to 100 GHz)

### 10RB11-Horizontal Polarization-Y Axis (EUT)

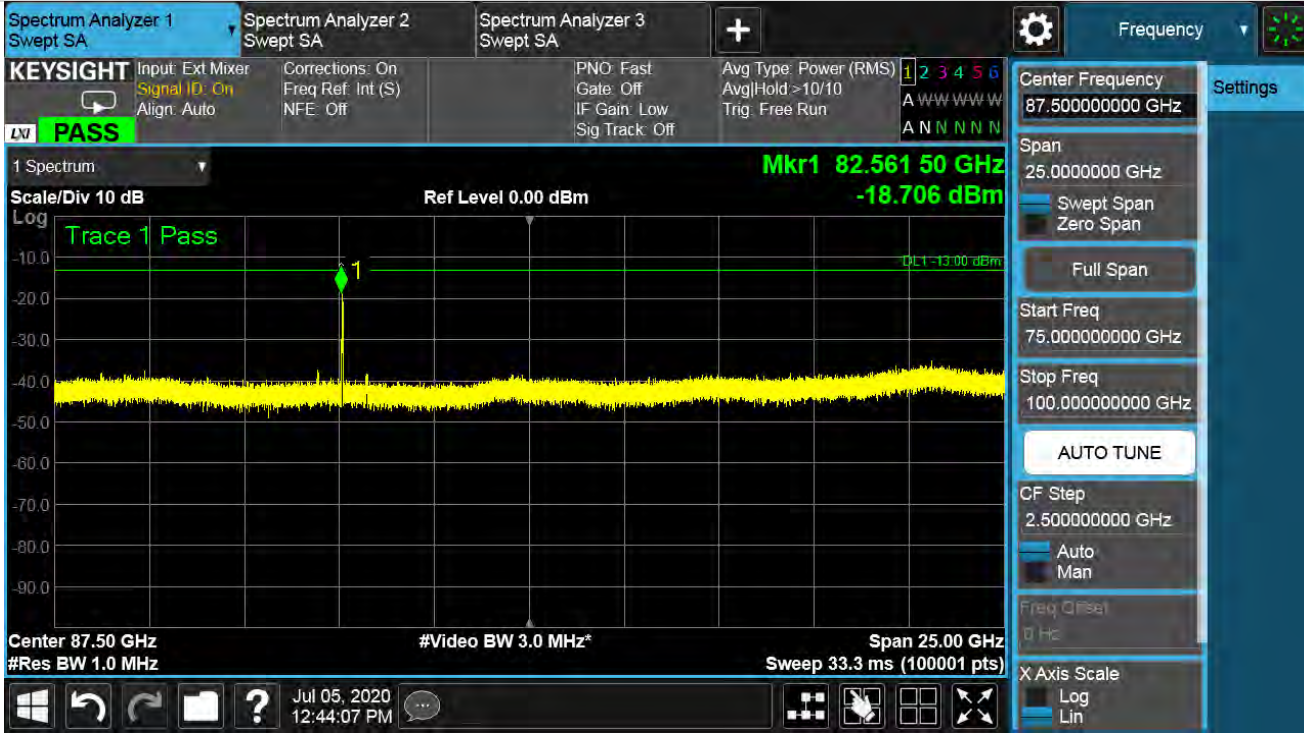

### 10RB11-Vertical Polarization- Y Axis (EUT)




### n261:1CC-BW50MHz-RSE 75 GHz to 100 GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Low channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 ((75 GHz to 100 GHz)

#### 10RB11-Horizontal Polarization-Z Axis (EUT)

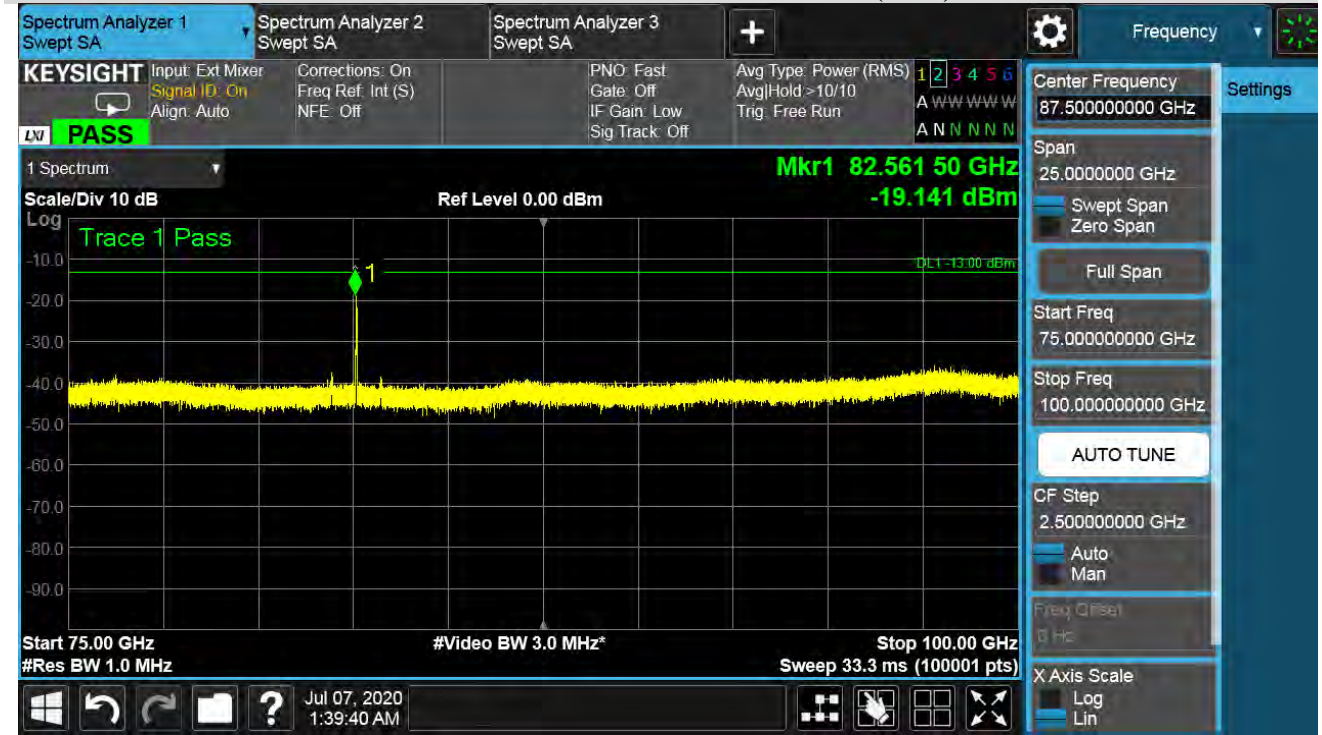

#### 10RB11-Vertical Polarization- Z Axis (EUT)

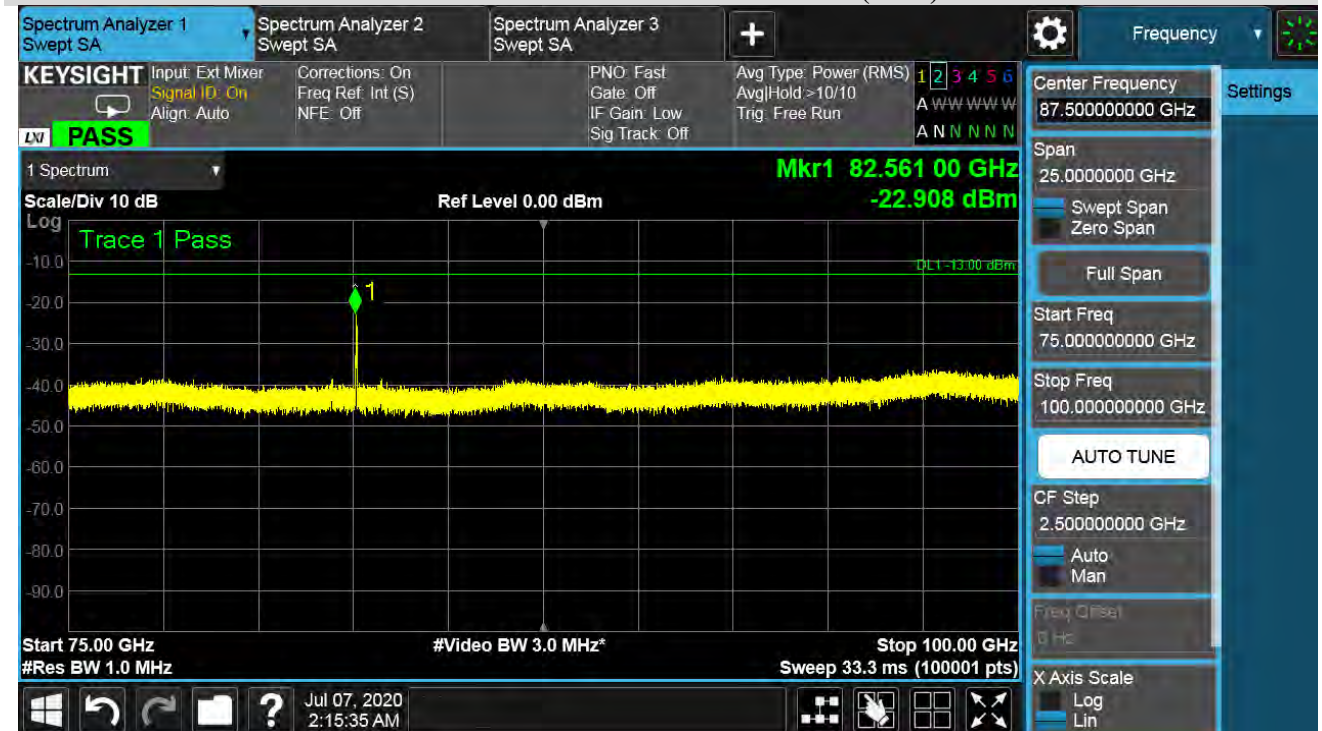



**n261:1CC-BW50MHz-2 CUTS TRP RSE 75 GHz to 100 GHz - Bema ID 23 Middle channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
83.77404	0	-14.16	0.03837	-14.68	0.03404	-26.95	0.00202	-24.59	0.00348	-22.14	-13	-9.14
	10	-21.32	0.00738	-22	0.00631	-30.17	0.00096	-29.26	0.00119			
	20	-25.39	0.00289	-26.18	0.00241	-42.81	0.00005	-37.45	0.00018			
	30	-29.42	0.00114	-24.44	0.00360	-40.49	0.00009	-29.55	0.00111			
	40	-14.55	0.03508	-25.39	0.00289	-38.2	0.00015	-36.64	0.00022			
	50	-16.64	0.02168	-31.76	0.00067	-34.03	0.00040	-29.41	0.00115			
	60	-27.23	0.00189	-37.15	0.00019	-33.79	0.00042	-29.13	0.00122			
	70	-21.36	0.00731	-36.82	0.00021	-38.22	0.00015	-38.57	0.00014			
	80	-33.18	0.00048	-35.43	0.00029	-47.43	0.00002	-39.45	0.00011			
	90	-35.99	0.00025	-41.05	0.00008	-47.62	0.00002	-40.48	0.00009			
	100	-33.08	0.00049	-40.23	0.00009	-48.25	0.00001	-40.71	0.00008			
	110	-33.6	0.00044	-41.42	0.00007	-47.89	0.00002	-40.79	0.00008			
	120	-35.97	0.00025	-40.79	0.00008	-47.9	0.00002	-40.57	0.00009			
	130	-34.85	0.00033	-41.35	0.00007	-47.89	0.00002	-40.32	0.00009			
	140	-35.9	0.00026	-41.12	0.00008	-47.77	0.00002	-40.81	0.00008			
	150	-35.45	0.00029	-40.86	0.00008	-47.37	0.00002	-40.62	0.00009			
	160	-34.99	0.00032	-40.51	0.00009	-47.05	0.00002	-40.53	0.00009			
	170	-35.5	0.00028	-40.63	0.00009	-47.44	0.00002	-40.35	0.00009			
	180	-35.57	0.00028	-40.6	0.00009	-47.08	0.00002	-40.62	0.00009			
	190	-35.26	0.00030	-40.82	0.00008	-47.36	0.00002	-40.29	0.00009			
	200	-35.04	0.00031	-40.64	0.00009	-47.09	0.00002	-40.38	0.00009			
	210	-35	0.00032	-40.85	0.00008	-46.76	0.00002	-40.72	0.00008			
	220	-34.99	0.00032	-40.21	0.00010	-46.3	0.00002	-40.63	0.00009			
	230	-35.16	0.00030	-40.55	0.00009	-44.83	0.00003	-40.14	0.00010			
	240	-35.01	0.00032	-40.33	0.00009	-45.84	0.00003	-38.67	0.00014			
	250	-33.39	0.00046	-39.62	0.00011	-44.57	0.00003	-40.51	0.00009			
	260	-34.89	0.00032	-40.08	0.00010	-42.62	0.00005	-40.11	0.00010			
	270	-34.14	0.00039	-39.65	0.00011	-45.6	0.00003	-40.48	0.00009			
	280	-28.43	0.00144	-38.24	0.00015	-45.05	0.00003	-39.92	0.00010			
	290	-21.84	0.00655	-34	0.00040	-39.19	0.00012	-34.34	0.00037			
	300	-16.3	0.02344	-29.56	0.00111	-31.9	0.00065	-35.22	0.00030			
	310	-20.64	0.00863	-26.38	0.00230	-37.96	0.00016	-30.48	0.00090			
	320	-14.93	0.03214	-29.81	0.00104	-34.98	0.00032	-38.15	0.00015			
	330	-21.79	0.00662	-29.02	0.00125	-33.66	0.00043	-31.66	0.00068			
	340	-17.39	0.01824	-24.08	0.00391	-38.55	0.00014	-31.23	0.00075			
	350	-16.41	0.02286	-16.25	0.02371	-38.39	0.00014	-32.36	0.00058			


Note: TRP fact=1dB (see page 380).

## n261:1CC-BW50MHz-RSE 75 GHz to 100 GHz

(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (75 GHz to 100 GHz))

### 10RB11-Horizontal Polarization-Y Axis (EUT)

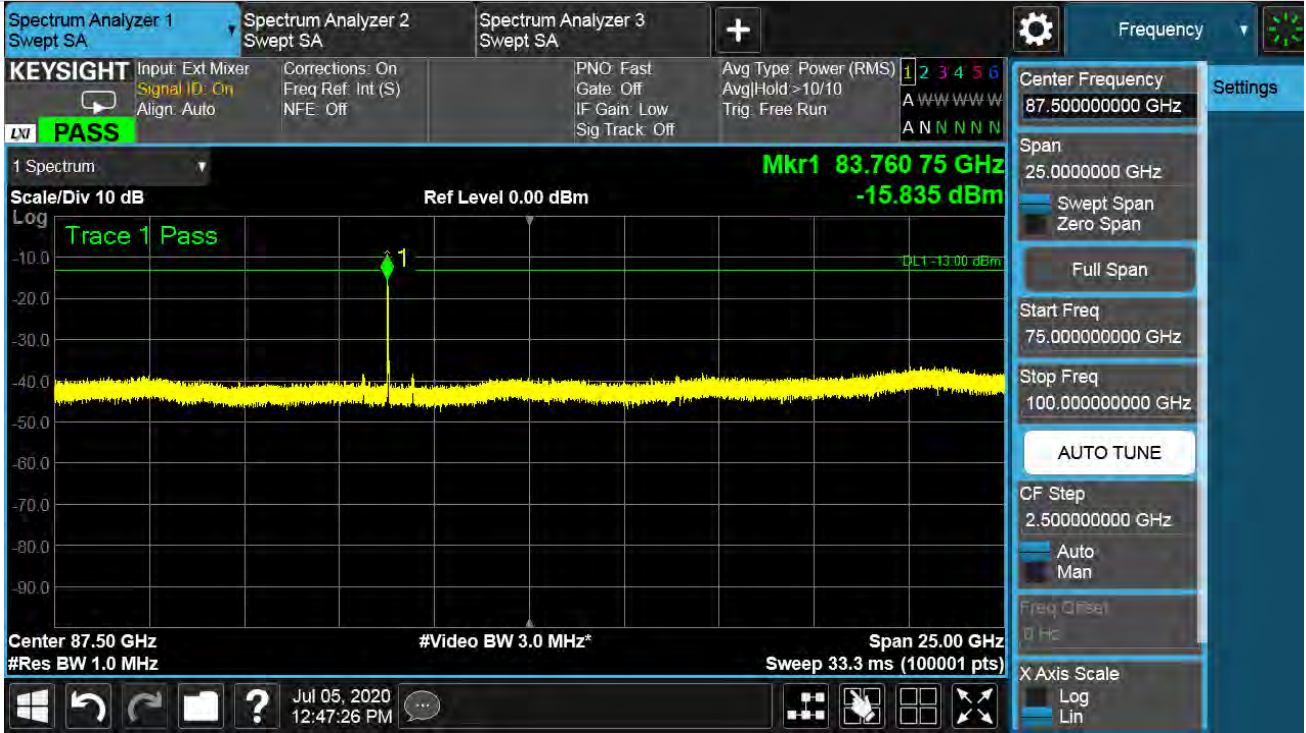

### 10RB11-Vertical Polarization- Y Axis (EUT)






## n261:1CC-BW50MHz-RSE 75 GHz to 100 GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

Middle channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (75 GHz to 100 GHz)

### 10RB11-Horizontal Polarization-Z Axis (EUT)

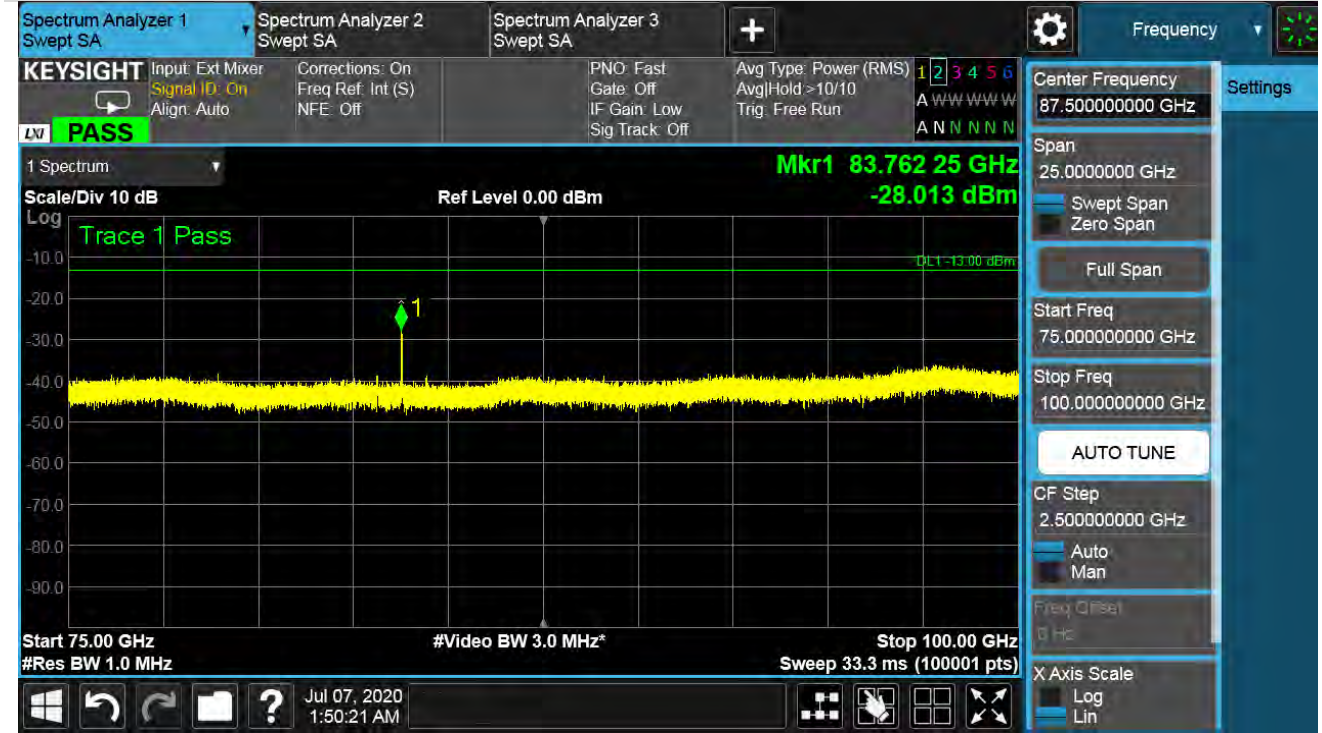

### 10RB11-Vertical Polarization- Z Axis (EUT)

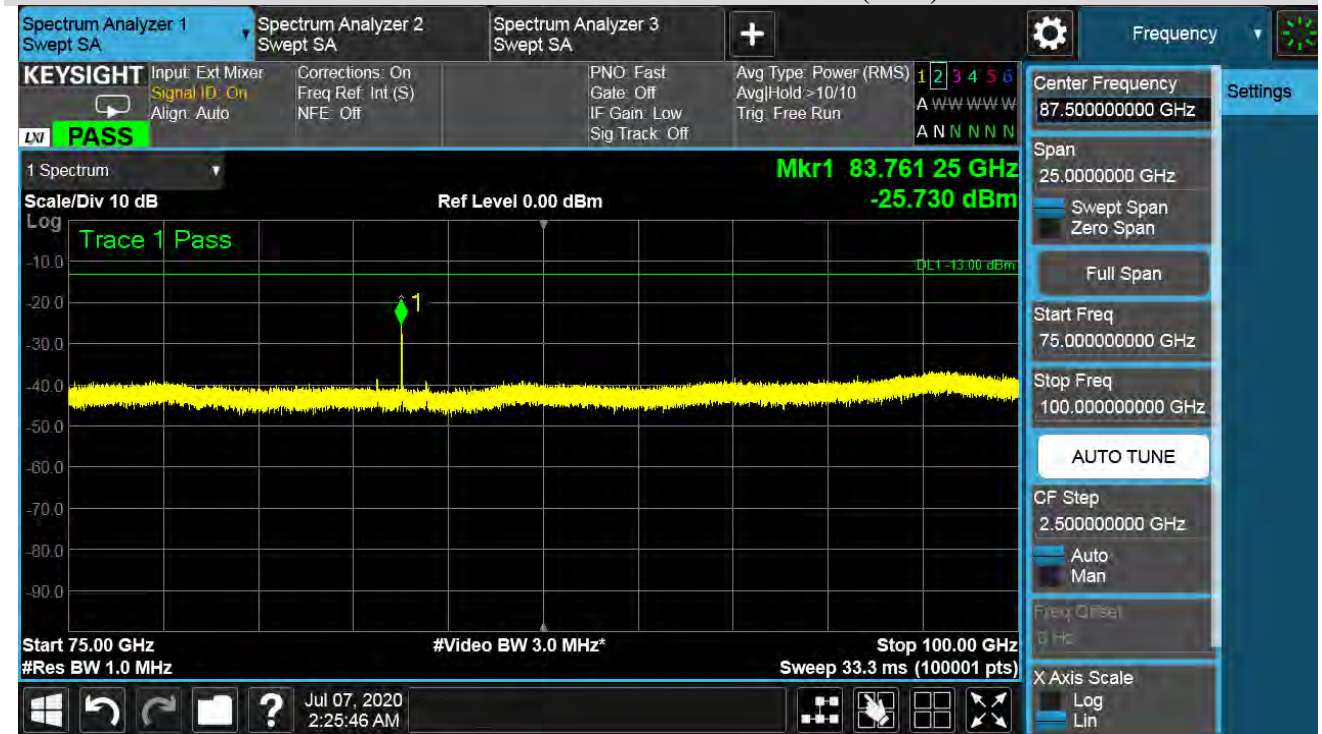

**n261:1CC-BW50MHz-2 CUTS TRP RSE 75 GHz to 100 GHz-  
Bema ID 23 High channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
84.9741	0	-13.98	0.03999	-14.38	0.03648	-24.78	0.00333	-23.12	0.00488	-21.61	-13	-8.61
	10	-21.12	0.00773	-21.52	0.00705	-31.17	0.00076	-37.71	0.00017			
	20	-25.12	0.00308	-25.67	0.00271	-32.79	0.00053	-25.61	0.00275			
	30	-29.09	0.00123	-23.98	0.00400	-35.87	0.00026	-29.57	0.00110			
	40	-14.13	0.03864	-24.88	0.00325	-40.81	0.00008	-35.49	0.00028			
	50	-16.24	0.02377	-31.33	0.00074	-40.92	0.00008	-39.27	0.00012			
	60	-26.78	0.00210	-36.74	0.00021	-40.71	0.00008	-41.01	0.00008			
	70	-20.95	0.00804	-36.57	0.00022	-40.93	0.00008	-40.79	0.00008			
	80	-32.71	0.00054	-35.17	0.00030	-40.93	0.00008	-40.94	0.00008			
	90	-35.6	0.00028	-40.72	0.00008	-41.03	0.00008	-40.94	0.00008			
	100	-32.54	0.00056	-39.98	0.00010	-40.71	0.00008	-40.76	0.00008			
	110	-32.87	0.00052	-41.15	0.00008	-40.35	0.00009	-38.74	0.00013			
	120	-35.32	0.00029	-40.49	0.00009	-40.53	0.00009	-40.61	0.00009			
	130	-34.28	0.00037	-41.04	0.00008	-40.26	0.00009	-40.47	0.00009			
	140	-35.31	0.00029	-40.77	0.00008	-40.68	0.00009	-40.43	0.00009			
	150	-34.86	0.00033	-40.47	0.00009	-40.21	0.00010	-40.27	0.00009			
	160	-34.44	0.00036	-40.13	0.00010	-41.23	0.00008	-40.01	0.00010			
	170	-34.97	0.00032	-40.41	0.00009	-40.95	0.00008	-39.47	0.00011			
	180	-35.17	0.00030	-40.37	0.00009	-39.35	0.00012	-39.83	0.00010			
	190	-35.03	0.00031	-40.58	0.00009	-40.63	0.00009	-39.91	0.00010			
	200	-34.82	0.00033	-40.33	0.00009	-36.42	0.00023	-39.77	0.00011			
	210	-34.72	0.00034	-40.47	0.00009	-36.35	0.00023	-38.49	0.00014			
	220	-34.71	0.00034	-39.83	0.00010	-39.59	0.00011	-36.37	0.00023			
	230	-34.85	0.00033	-40.17	0.00010	-33.94	0.00040	-38.58	0.00014			
	240	-34.75	0.00033	-39.96	0.00010	-30.18	0.00096	-38.19	0.00015			
	250	-33.07	0.00049	-39.28	0.00012	-28.91	0.00129	-39.21	0.00012			
	260	-34.49	0.00036	-39.62	0.00011	-39.22	0.00012	-36.37	0.00023			
	270	-33.66	0.00043	-39.23	0.00012	-34.41	0.00036	-29.05	0.00124			
	280	-27.93	0.00161	-37.79	0.00017	-35.01	0.00032	-27.35	0.00184			
	290	-21.18	0.00762	-33.51	0.00045	-35.37	0.00029	-33.89	0.00041			
	300	-15.78	0.02642	-28.99	0.00126	-29.98	0.00100	-31.97	0.00064			
	310	-20.17	0.00962	-25.8	0.00263	-34.53	0.00035	-30.76	0.00084			
	320	-14.48	0.03565	-29.13	0.00122	-39.43	0.00011	-26.59	0.00219			
	330	-21.41	0.00723	-28.47	0.00142	-37.24	0.00019	-32.8	0.00052			
	340	-16.94	0.02023	-23.53	0.00444	-35.28	0.00030	-30.27	0.00094			
	350	-16.03	0.02495	-15.73	0.02673	-29.69	0.00107	-36.04	0.00025			

Note: TRP fact=1dB (see page 380).




### n261:1CC-BW50MHz-RSE 75 GHz to 100 GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (75 GHz to 100 GHz)

#### 10RB11-Horizontal Polarization-Y Axis (EUT)

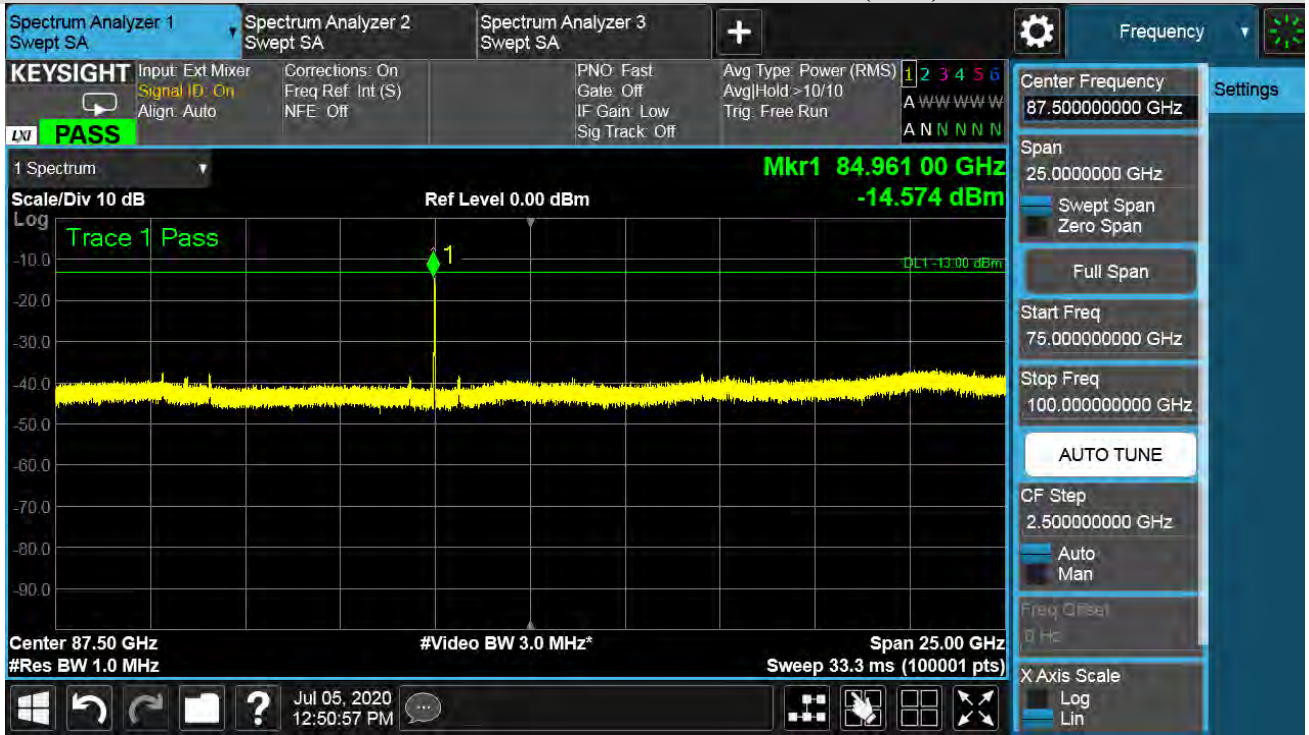

#### 10RB11-Vertical Polarization- Y Axis (EUT)

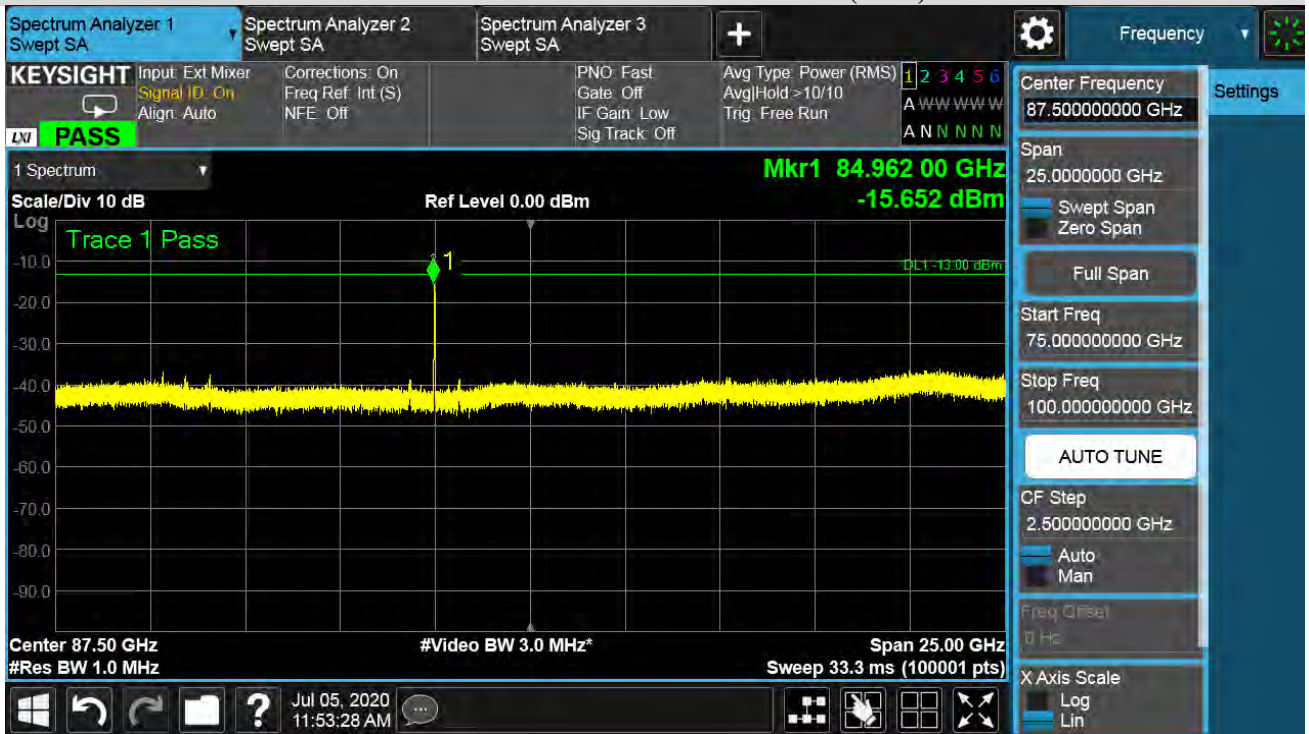


### n261:1CC-BW50MHz-RSE 75 GHz to 100 GHz


(Reference only. The final measured value should refer to the TRP level of 2 cuts measurement result)

High channel: n261-BW:50MHz-1CC-BPSK-Beam ID 23 (75 GHz to 100 GHz)

#### 10RB11-Horizontal Polarization-Z Axis (EUT)

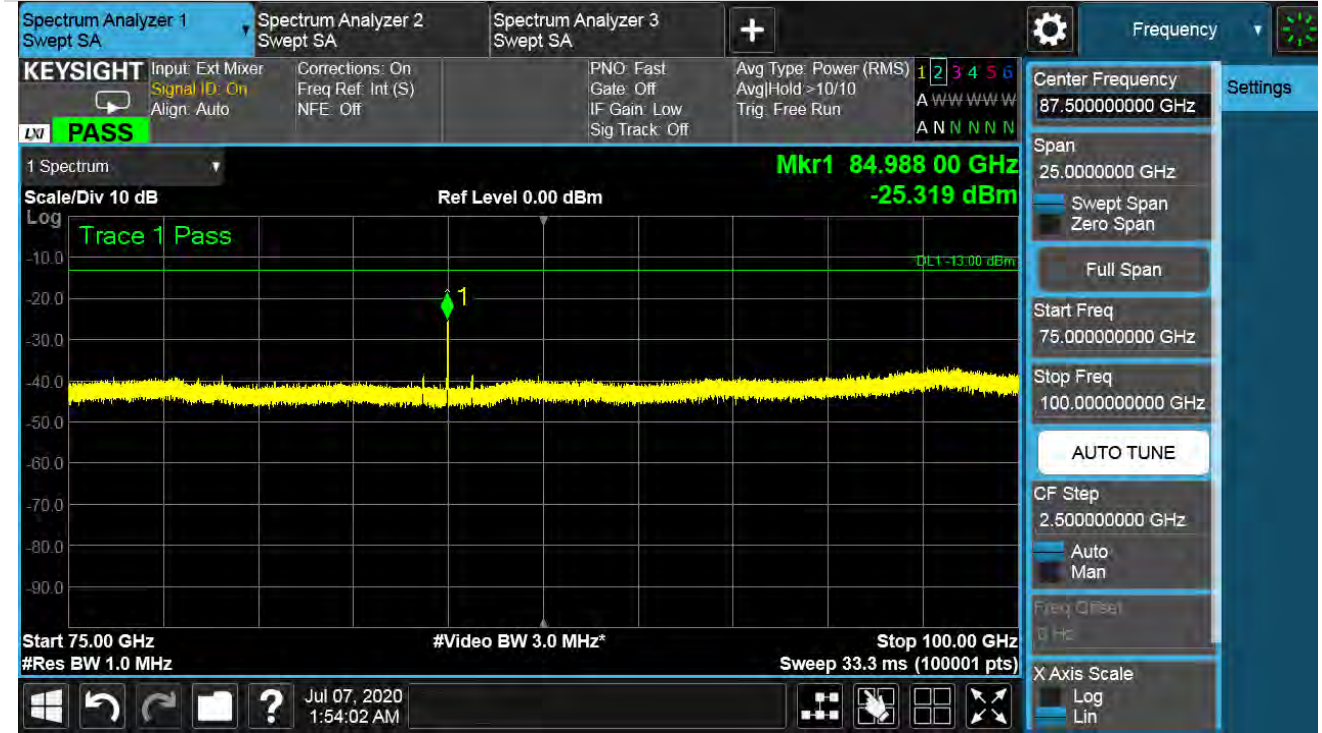

#### 10RB11-Vertical Polarization- Z Axis (EUT)

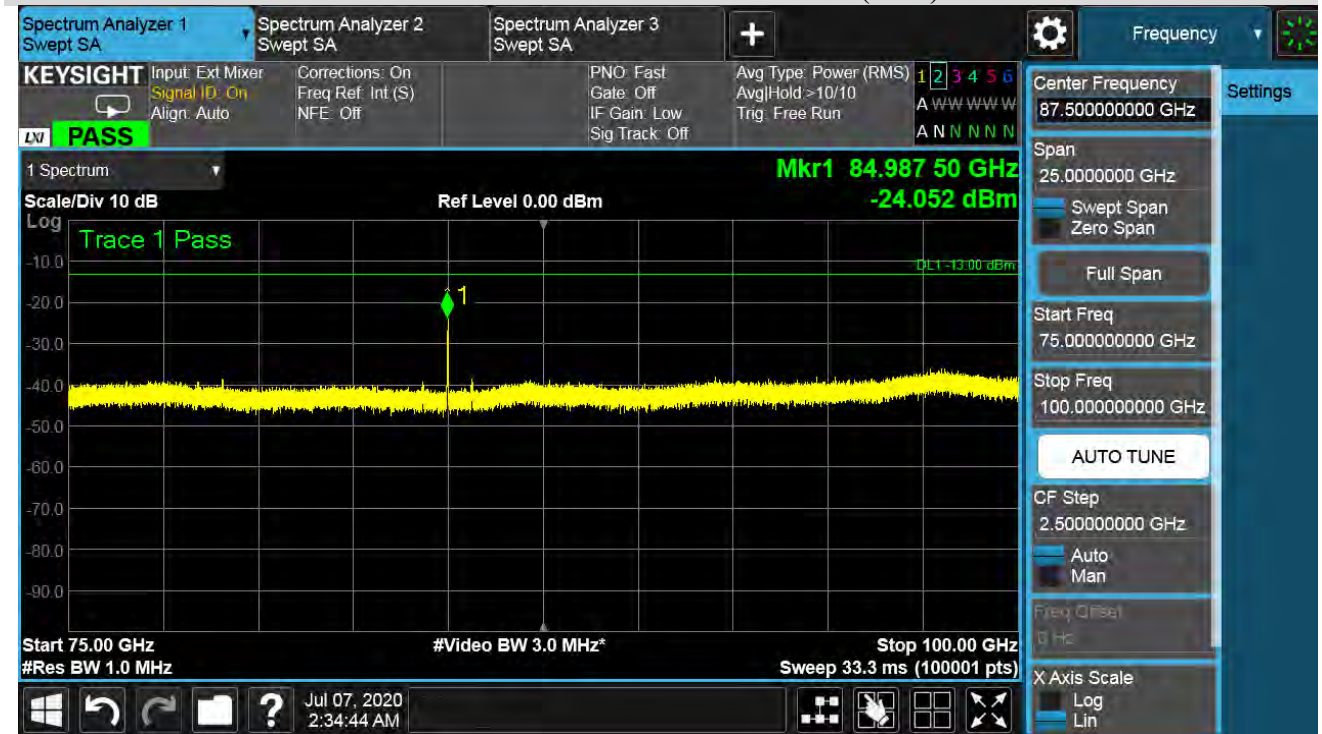



**n261:1CC-BW50MHz-2 CUTS TRP RSE 75 GHz to 100 GHz -  
Bema ID 19+147 Low channel**

Frequency (GHz)	Turn table (degree)	EIRP Test result/EUT axis/Polarizations								TRP with TRP fact (dBm)	Limit (dBm)	Margin (dB)
		Y-Axis (EUT)				Z-Axis (EUT)						
		H-Pol.		V-Pol.		H-Pol.		V-Pol.				
		(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)	(dBm)	(mW)			
82.57413	0	-14.2	0.03784	-7.58	0.17458	-10.6	0.08810	-14.3	0.03698	-18.85	-13	-5.85
	10	-28.3	0.00148	-15	0.03199	-21.7	0.00673	-22.5	0.00568			
	20	-24	0.00395	-24.7	0.00337	-30.9	0.00082	-32.3	0.00059			
	30	-23.1	0.00485	-29.5	0.00112	-17.9	0.01633	-29.2	0.00120			
	40	-21.2	0.00755	-20	0.01012	-21.8	0.00668	-33.9	0.00041			
	50	-23.6	0.00440	-22.8	0.00531	-23	0.00507	-27.7	0.00172			
	60	-19	0.01274	-21.2	0.00752	-15.3	0.02985	-26.7	0.00215			
	70	-24.4	0.00367	-34.8	0.00033	-18.1	0.01560	-37.1	0.00020			
	80	-40	0.00010	-35	0.00032	-30	0.00100	-39.2	0.00012			
	90	-39.9	0.00010	-37.8	0.00017	-38.5	0.00014	-40.1	0.00010			
	100	-38.3	0.00015	-37.5	0.00018	-39.5	0.00011	-40.2	0.00010			
	110	-39.4	0.00011	-38.5	0.00014	-39.9	0.00010	-40.3	0.00009			
	120	-38.5	0.00014	-40.1	0.00010	-39.8	0.00010	-40.2	0.00010			
	130	-39	0.00013	-37.1	0.00019	-40	0.00010	-40.3	0.00009			
	140	-39.4	0.00012	-39	0.00013	-40.1	0.00010	-40.2	0.00010			
	150	-38.7	0.00014	-38.6	0.00014	-40.2	0.00010	-40.4	0.00009			
	160	-38.1	0.00015	-39.2	0.00012	-40.2	0.00009	-40.2	0.00010			
	170	-39.6	0.00011	-40	0.00010	-40	0.00010	-39.9	0.00010			
	180	-39.5	0.00011	-40	0.00010	-40	0.00010	-40.2	0.00010			
	190	-40.3	0.00009	-39.8	0.00010	-40.1	0.00010	-40.1	0.00010			
	200	-40.2	0.00010	-39.7	0.00011	-40.1	0.00010	-39.7	0.00011			
	210	-40.1	0.00010	-39.2	0.00012	-39	0.00013	-39.8	0.00011			
	220	-40	0.00010	-39.6	0.00011	-39.3	0.00012	-39.3	0.00012			
	230	-40.1	0.00010	-39.8	0.00011	-36.7	0.00022	-35.9	0.00026			
	240	-39.6	0.00011	-40.1	0.00010	-34.3	0.00037	-33	0.00050			
	250	-38.7	0.00014	-39.9	0.00010	-31.3	0.00074	-36.8	0.00021			
	260	-38.8	0.00013	-39.9	0.00010	-35.6	0.00028	-35.3	0.00030			
	270	-35.6	0.00027	-39.3	0.00012	-26.5	0.00223	-39.5	0.00011			
	280	-31.9	0.00065	-38.9	0.00013	-31.6	0.00069	-39.4	0.00011			
	290	-28.6	0.00139	-33.9	0.00041	-21.9	0.00647	-36.8	0.00021			
	300	-20.9	0.00811	-21.2	0.00753	-20	0.01009	-28	0.00160			
	310	-15	0.03184	-21.6	0.00687	-16.9	0.02042	-25.4	0.00288			
	320	-20.8	0.00824	-21.2	0.00762	-21	0.00798	-25.8	0.00264			
	330	-24	0.00403	-30.4	0.00092	-27.4	0.00183	-34	0.00040			
	340	-37.4	0.00018	-19.3	0.01172	-22	0.00635	-36.5	0.00022			
	350	-25.9	0.00256	-15.1	0.03083	-21.9	0.00647	-19.8	0.01052			

Note: TRP fact=1dB (see page 380).