


Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5220MHz)+LTE Band 2 Link+BLE
 Test Date : 2020/06/22

Horizontal

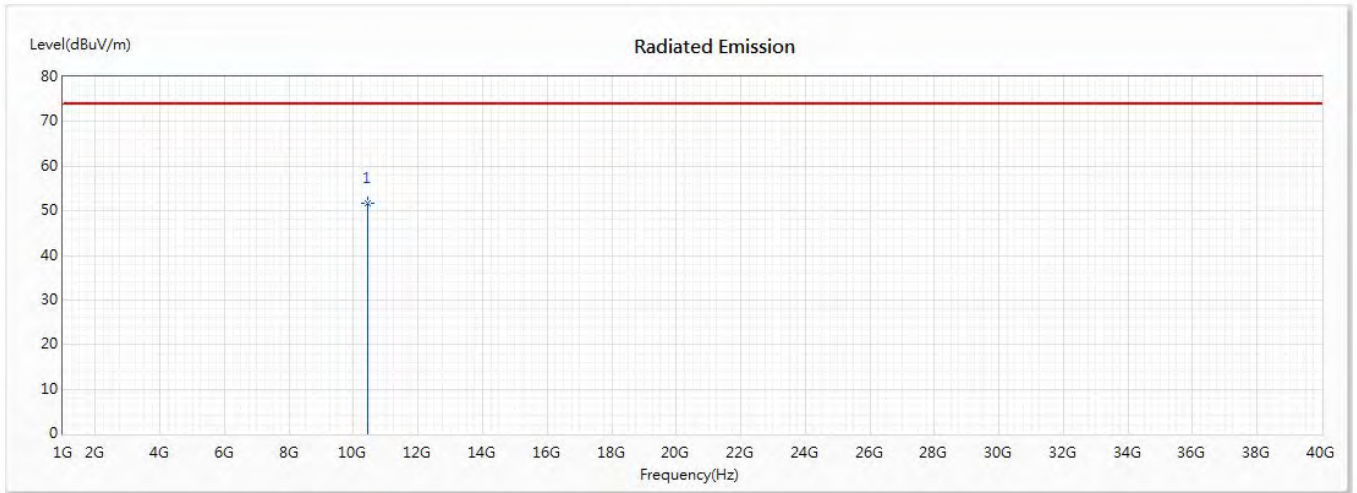


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10440	51.74	74.00	-22.26	45.98	5.76	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5220MHz)+LTE Band 2 Link+BLE
 Test Date : 2020/06/22

Vertical

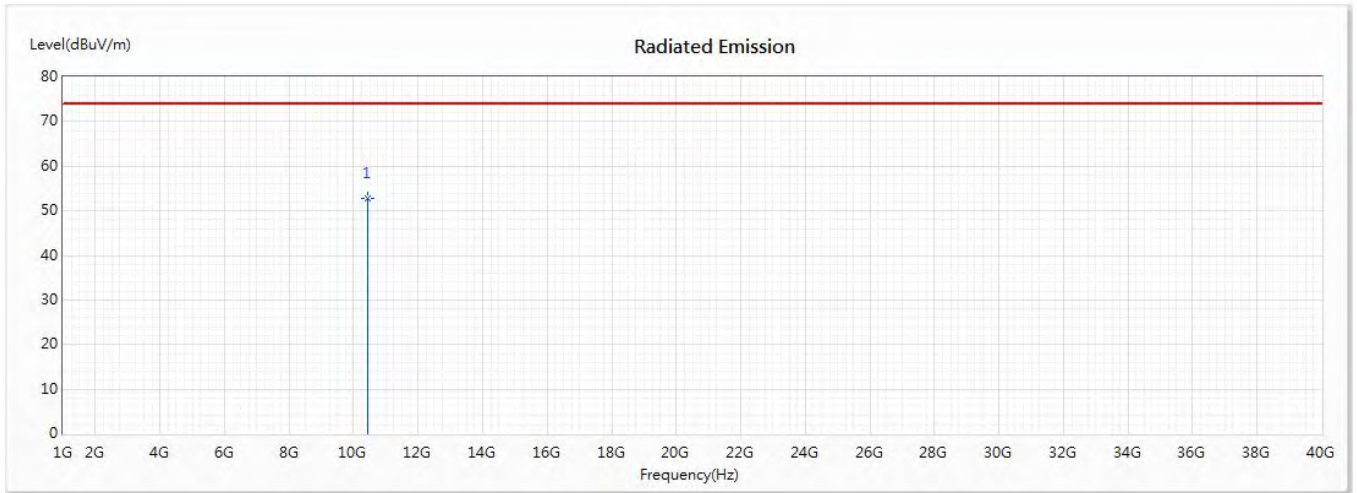


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10440	52.74	74.00	-21.26	46.98	5.76	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5240MHz)+LTE Band 2 Link+BLE
 Test Date : 2020/06/22

Horizontal

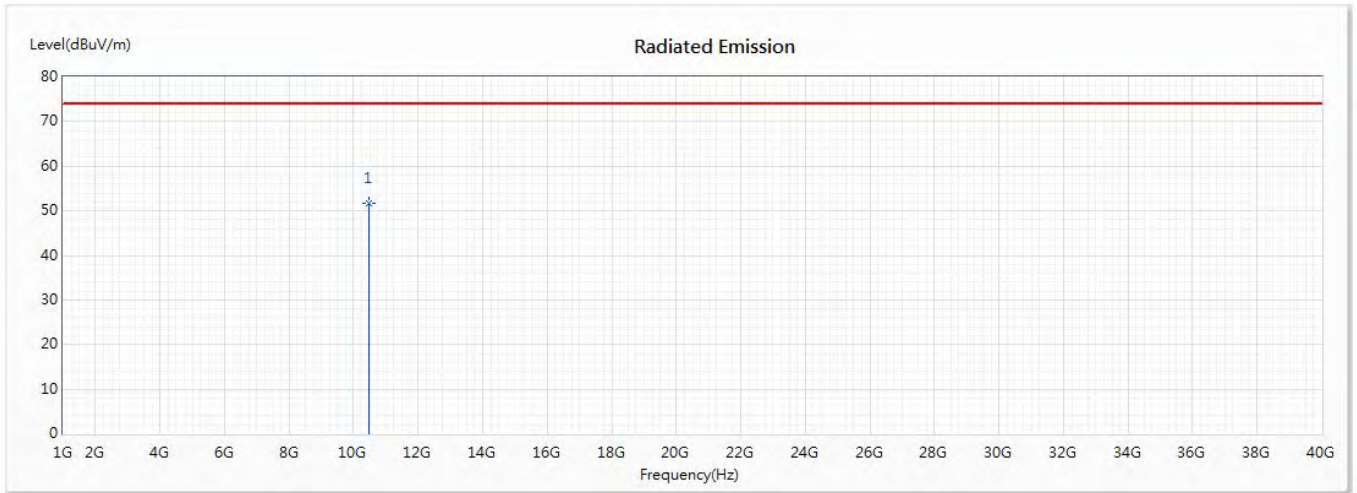


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10480	51.64	74.00	-22.36	45.94	5.70	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5240MHz)+LTE Band 2 Link+BLE
 Test Date : 2020/06/22

Vertical

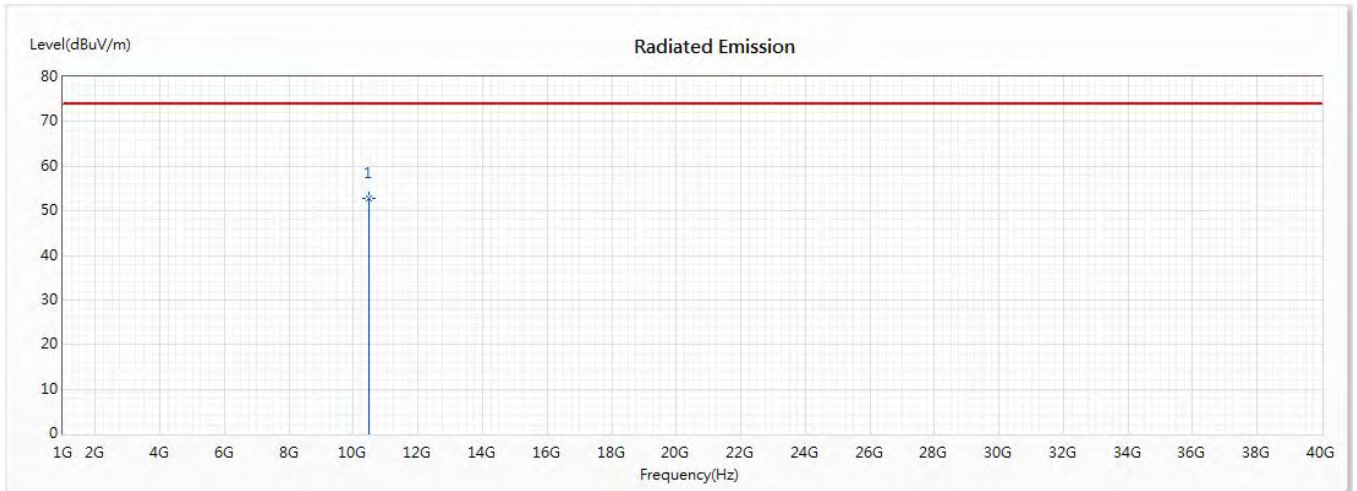


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10480	52.88	74.00	-21.12	47.18	5.70	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5745MHz) +LTE Band 5 Link+BLE
 Test Date : 2020/06/23

Horizontal

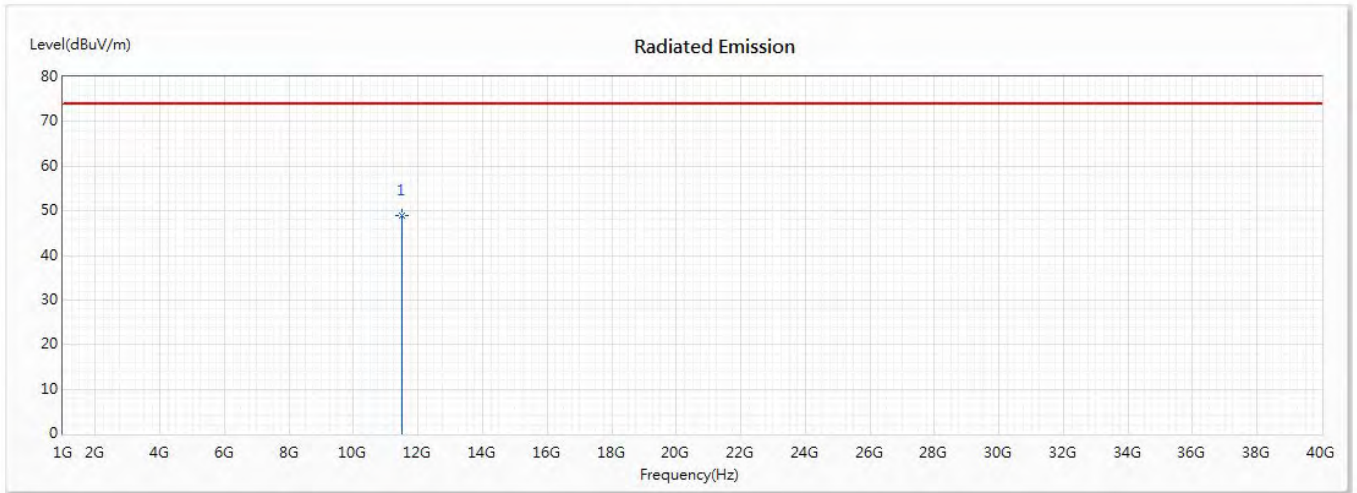


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11490	48.94	74.00	-25.06	42.76	6.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5745MHz) +LTE Band 5 Link+BLE
 Test Date : 2020/06/23

Vertical

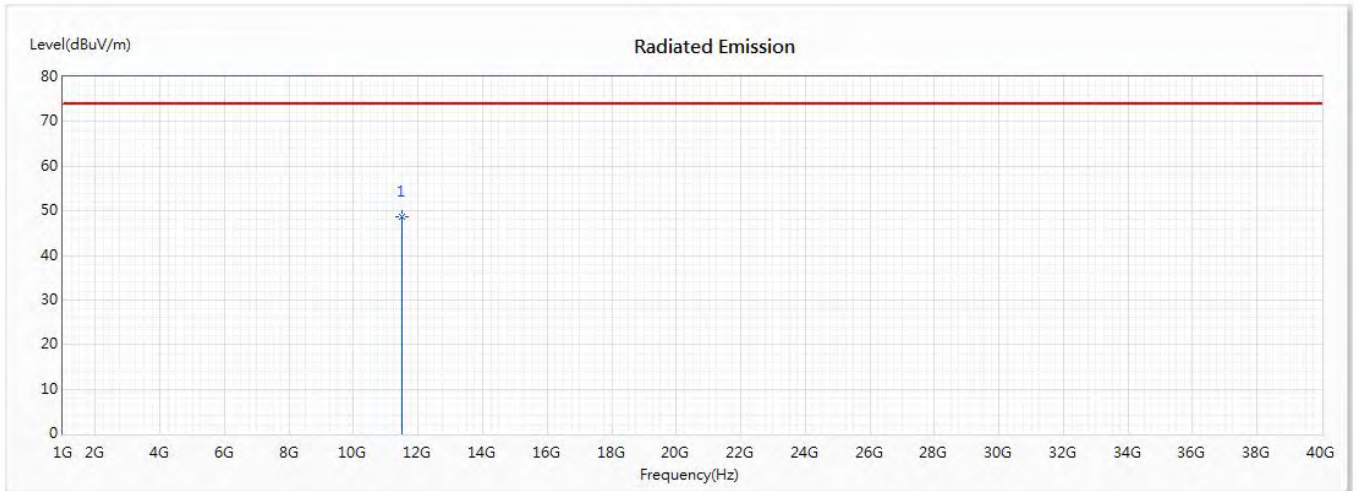


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11490	48.66	74.00	-25.34	42.48	6.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5785MHz) +LTE Band 5 Link+BLE
 Test Date : 2020/06/23

Horizontal

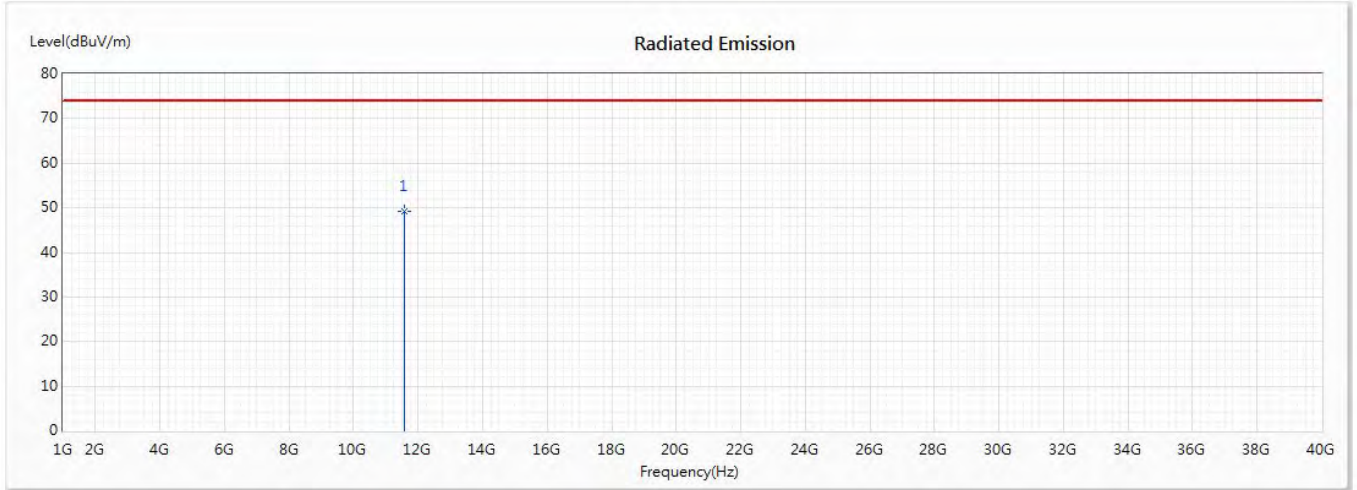


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11570	49.27	74.00	-24.73	42.86	6.41	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5785MHz) +LTE Band 5 Link+BLE
 Test Date : 2017/11/22

Vertical

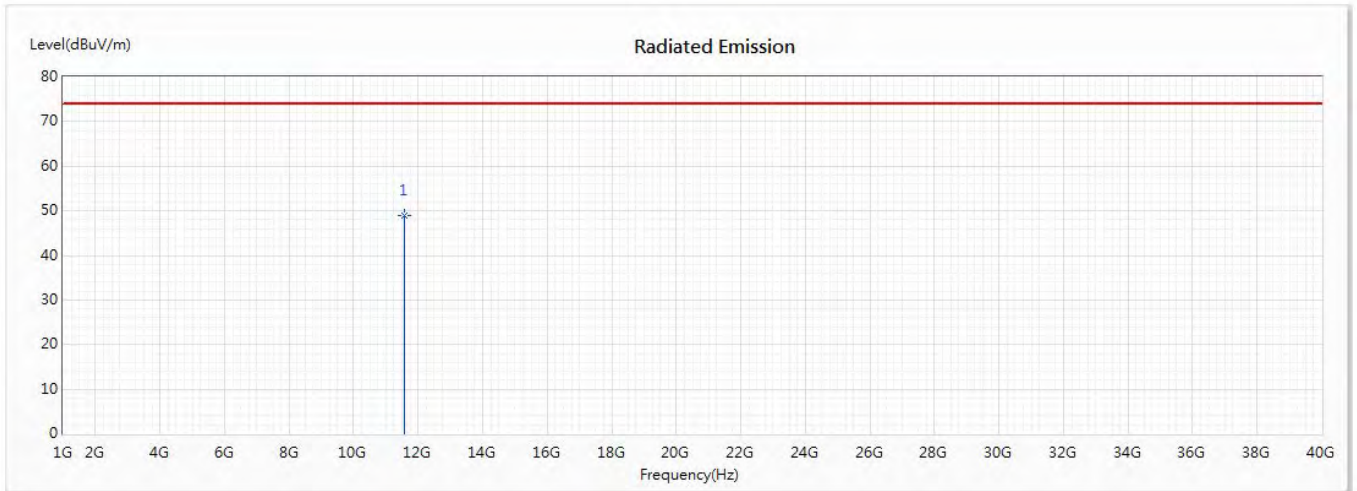


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11570	48.91	74.00	-25.09	42.50	6.41	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5825MHz) +LTE Band 5 Link+BLE
 Test Date : 2020/06/23

Horizontal

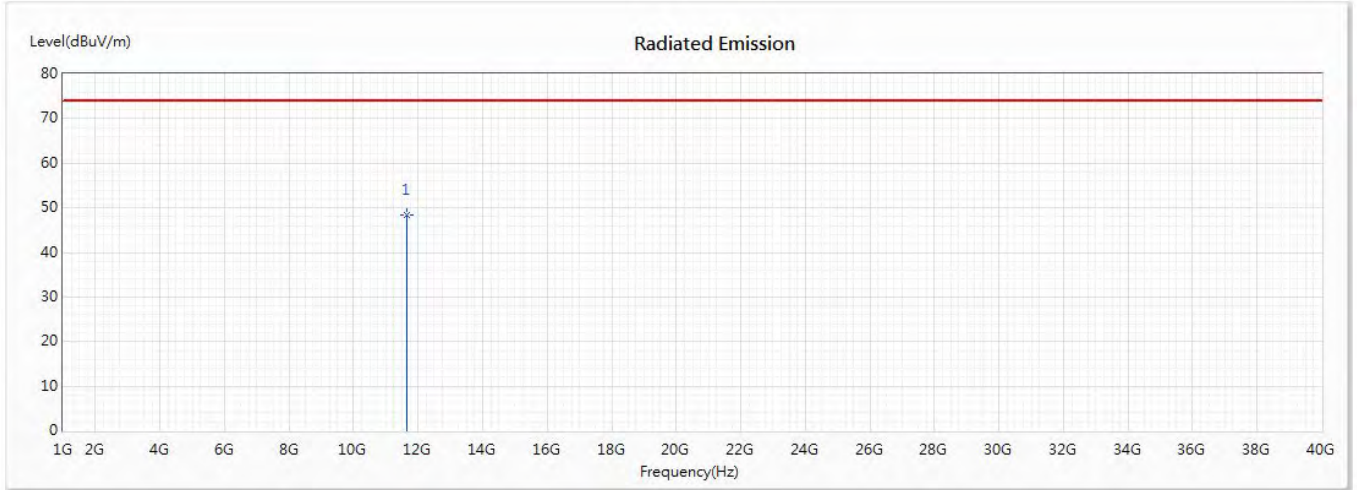


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11650	48.47	74.00	-25.53	42.09	6.38	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5825MHz) +LTE Band 5 Link+BLE
 Test Date : 2017/11/08

Vertical

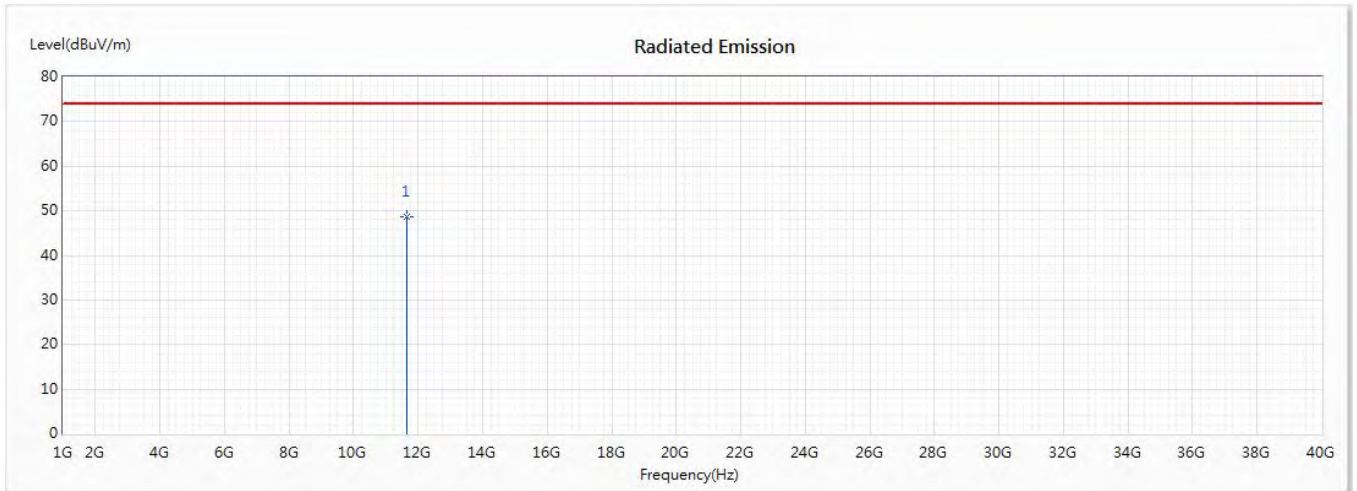


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11650	48.57	74.00	-25.43	42.19	6.38	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz) (RU Config-Full)
 +LTE Band 13 Link+BLE
 Test Date : 2020/06/23

Horizontal

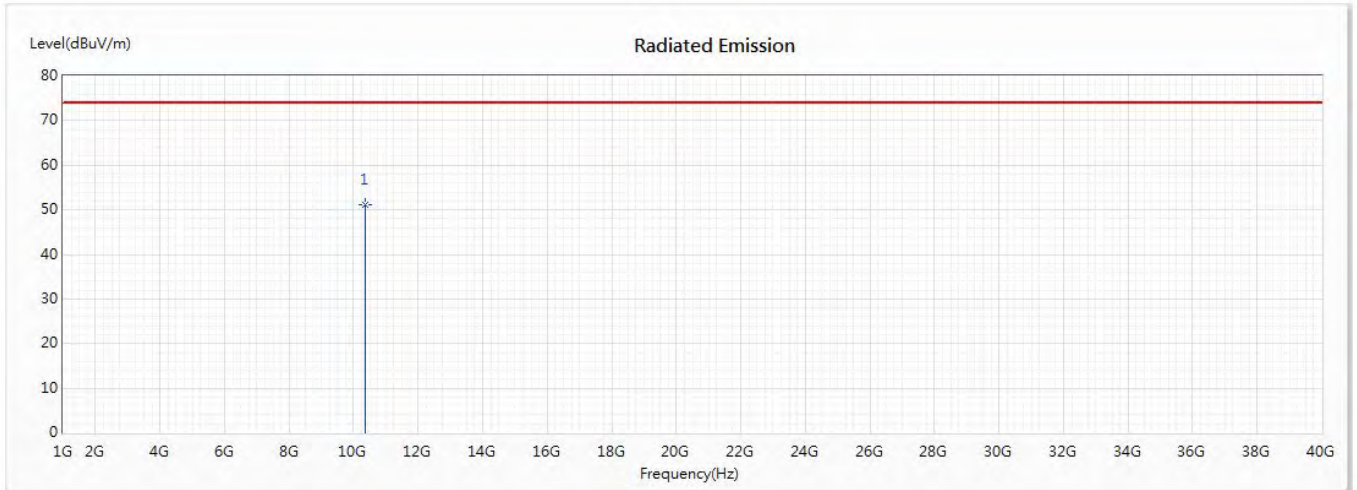


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10360	51.19	74.00	-22.81	45.70	5.49	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz) (RU Config-Full)
 +LTE Band 13 Link+BLE
 Test Date : 2020/06/23

Vertical

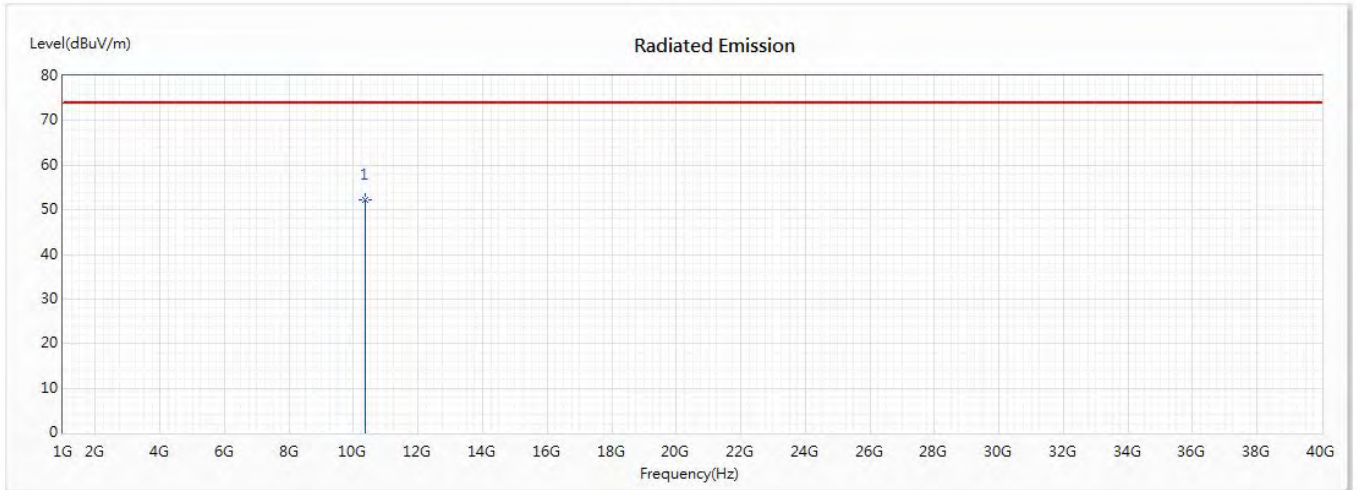


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10360	52.18	74.00	-21.82	46.69	5.49	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5220MHz) (RU Config-Full)
 +LTE Band 13 Link+BLE
 Test Date : 2020/06/23

Horizontal

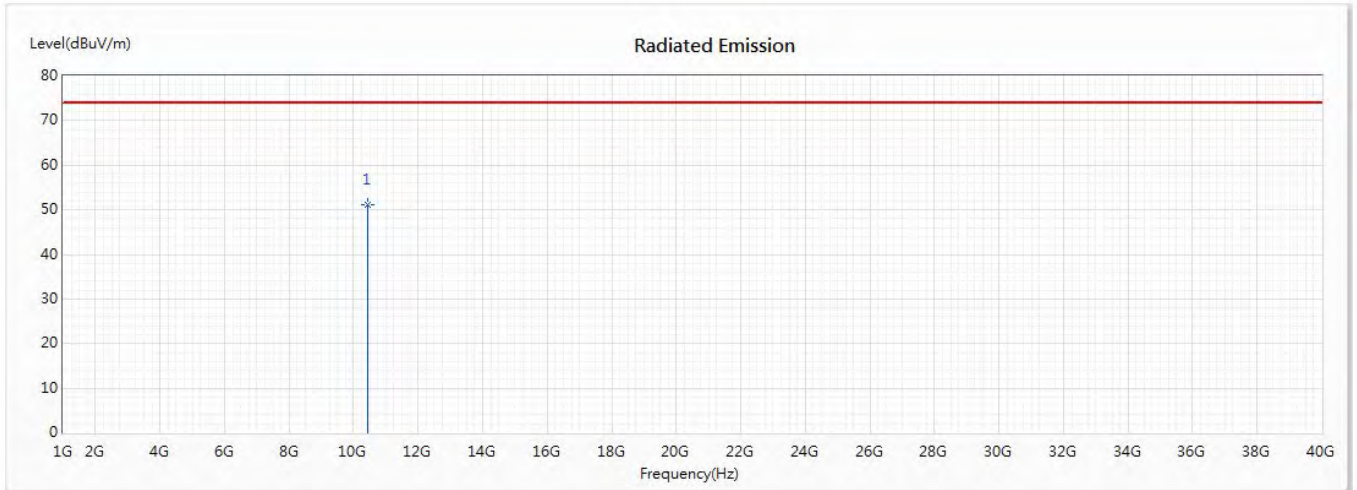


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10440	51.16	74.00	-22.84	45.40	5.76	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5220MHz) (RU Config-Full)
 +LTE Band 13 Link+BLE
 Test Date : 2020/06/23

Vertical

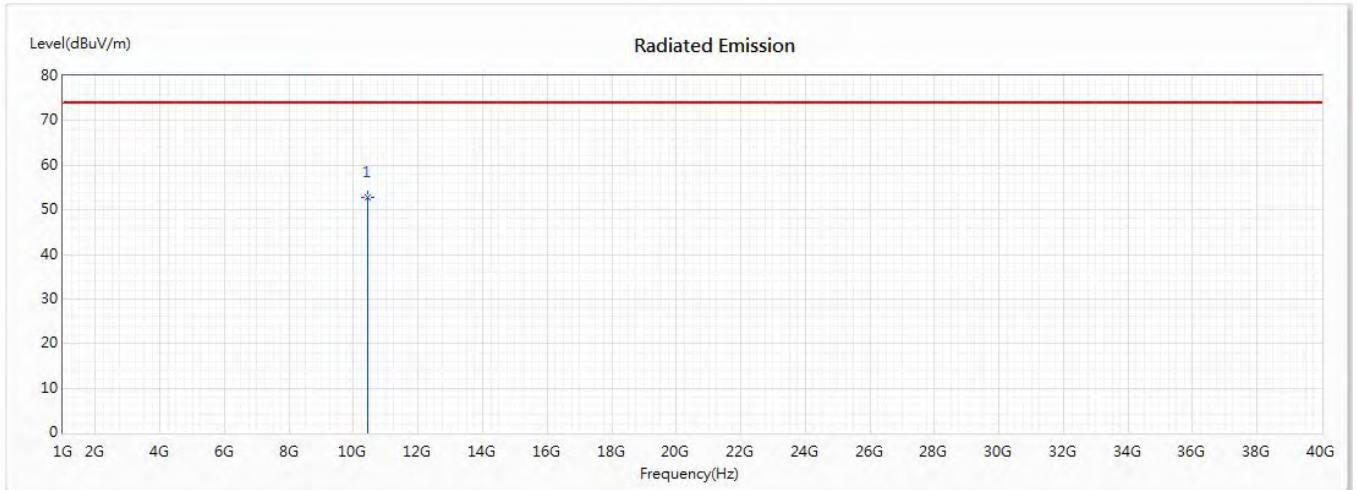


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10440	52.68	74.00	-21.32	46.92	5.76	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5240MHz) (RU Config-Full)
 +LTE Band 13 Link+BLE
 Test Date : 2020/06/23

Horizontal

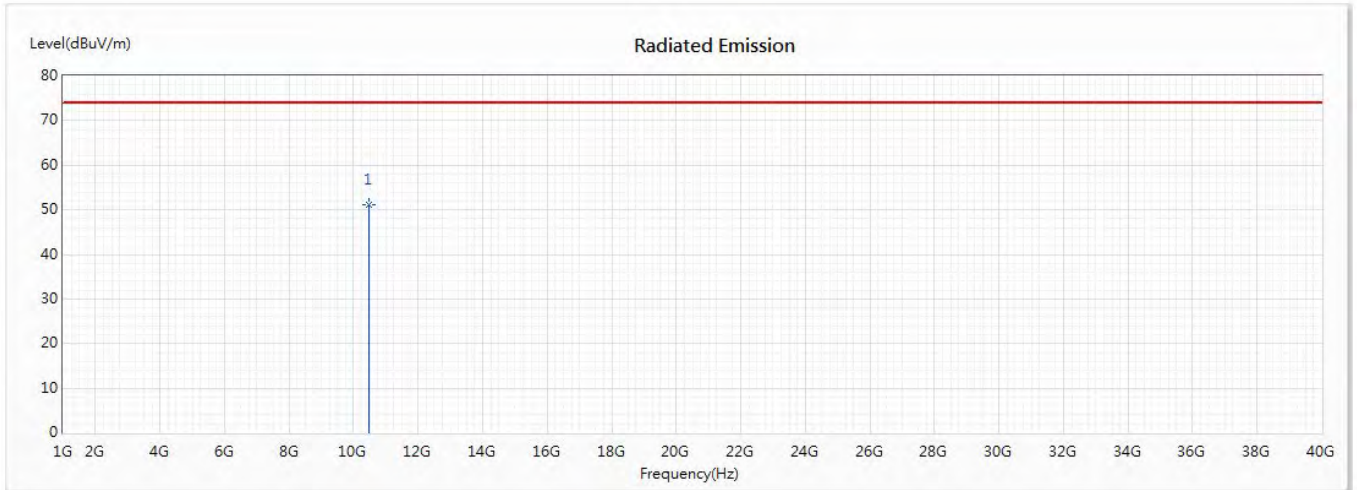


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10480	51.22	74.00	-22.78	45.52	5.70	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5240MHz) (RU Config-Full)
 +LTE Band 13 Link+BLE
 Test Date : 2020/06/23

Vertical

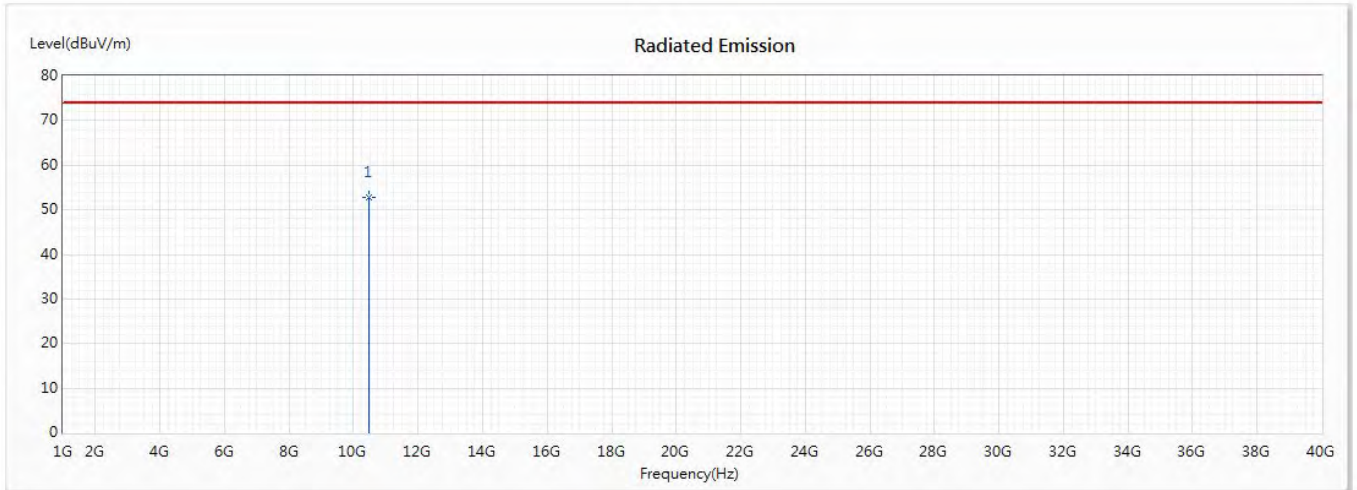


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10480	52.81	74.00	-21.19	47.11	5.70	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5745MHz) (RU Config-Full)
 +LTE Band 48 Link+BLE
 Test Date : 2020/06/23

Horizontal

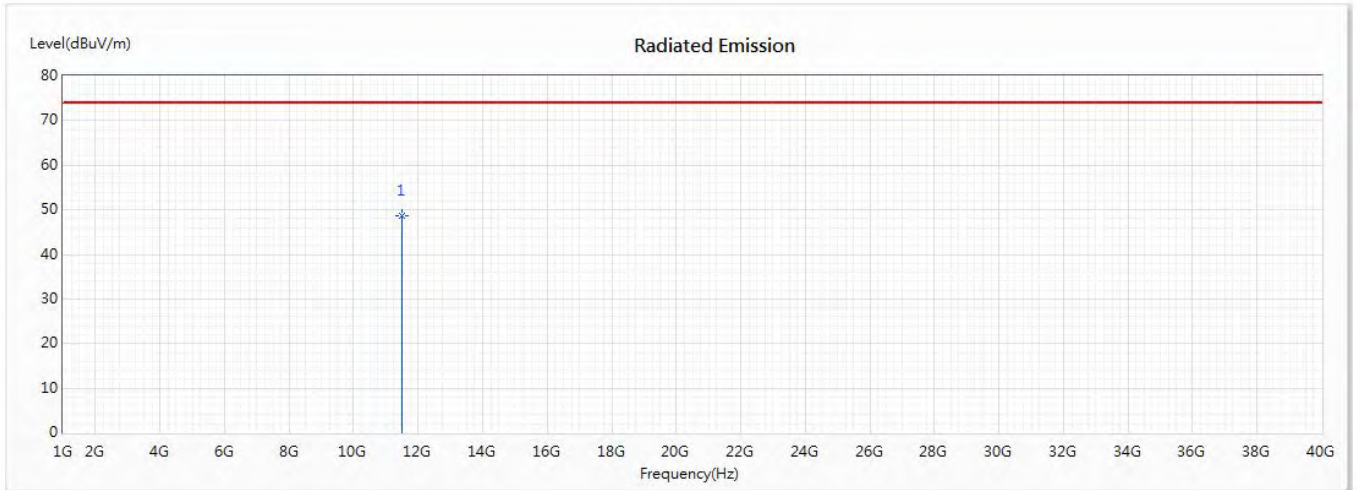


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11490	48.55	74.00	-25.45	42.37	6.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5745MHz) (RU Config-Full)
 +LTE Band 48 Link+BLE
 Test Date : 2020/06/23

Vertical

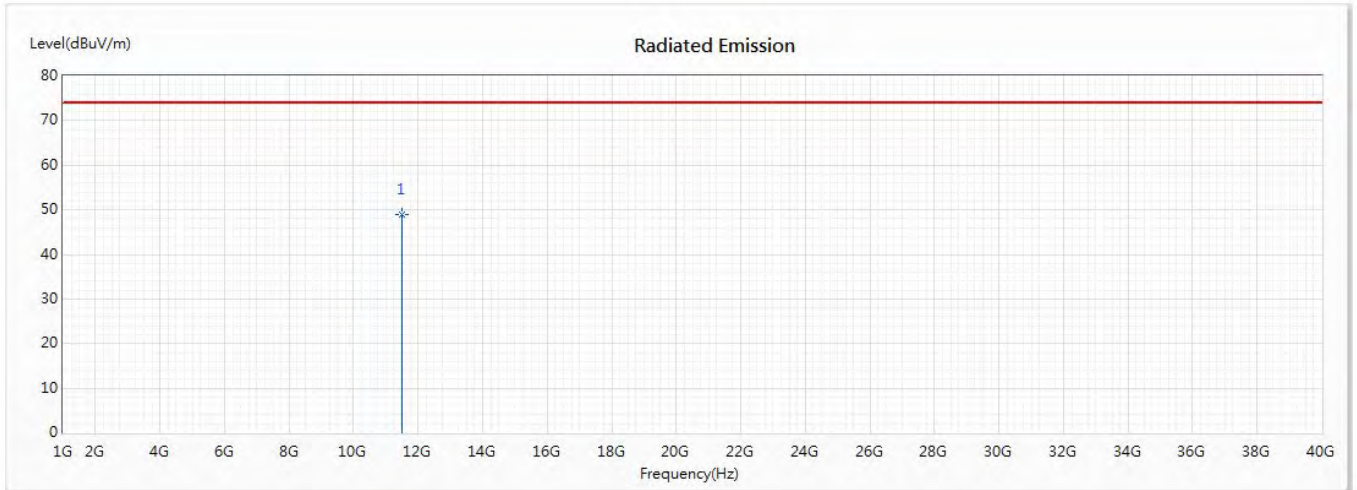


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11490	48.93	74.00	-25.07	42.75	6.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5785MHz) (RU Config-Full)
 +LTE Band 48 Link+BLE
 Test Date : 2020/06/23

Horizontal

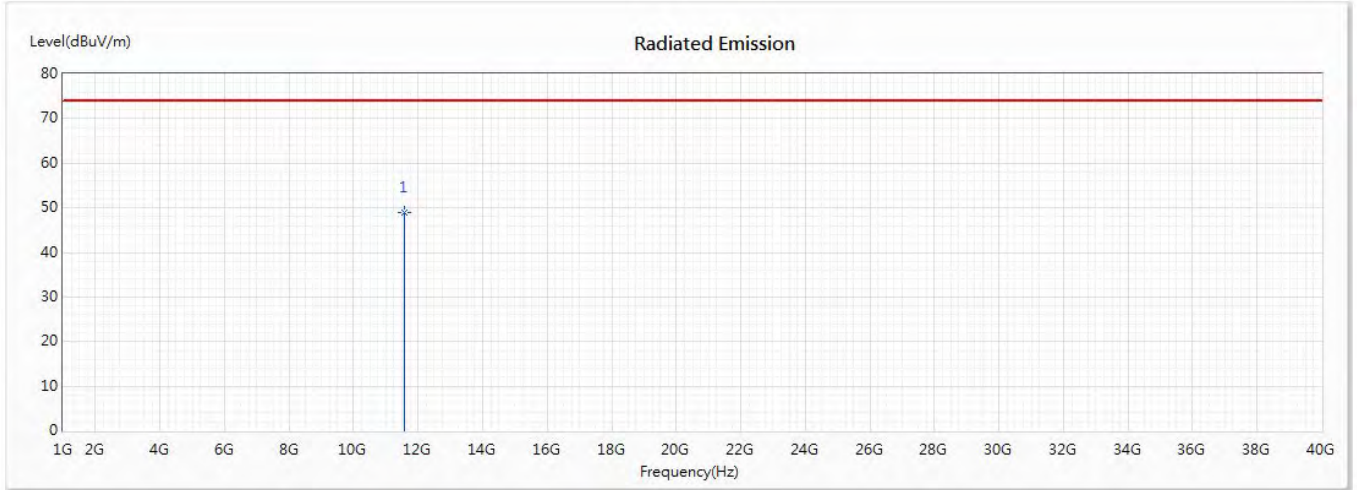


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11570	48.89	74.00	-25.11	42.48	6.41	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5785MHz) (RU Config-Full)
 +LTE Band 48 Link+BLE
 Test Date : 2020/06/23

Vertical

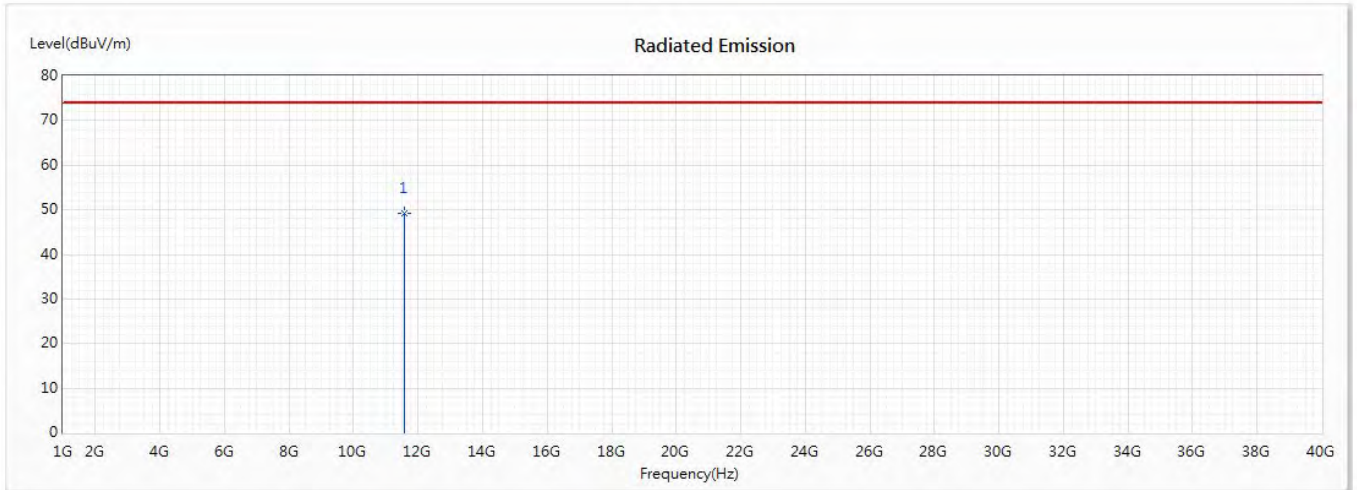


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11570	49.21	74.00	-24.79	42.80	6.41	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5825MHz) (RU Config-Full)
 +LTE Band 48 Link+BLE
 Test Date : 2020/06/23

Horizontal

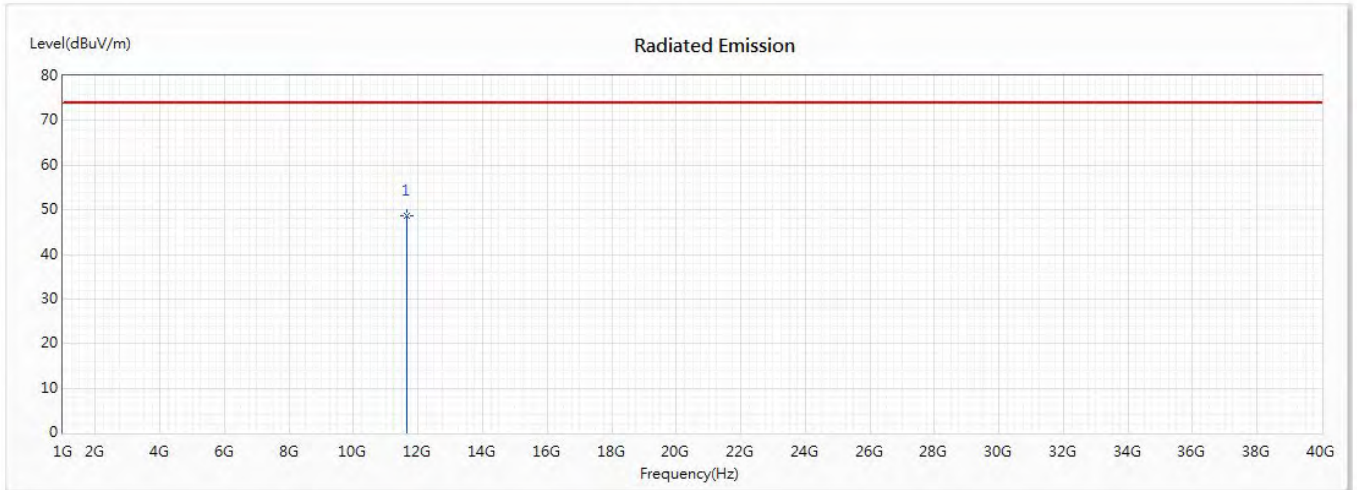


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11650	48.67	74.00	-25.33	42.29	6.38	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5825MHz) (RU Config-Full)
 +LTE Band 48 Link+BLE
 Test Date : 2020/06/23

Vertical

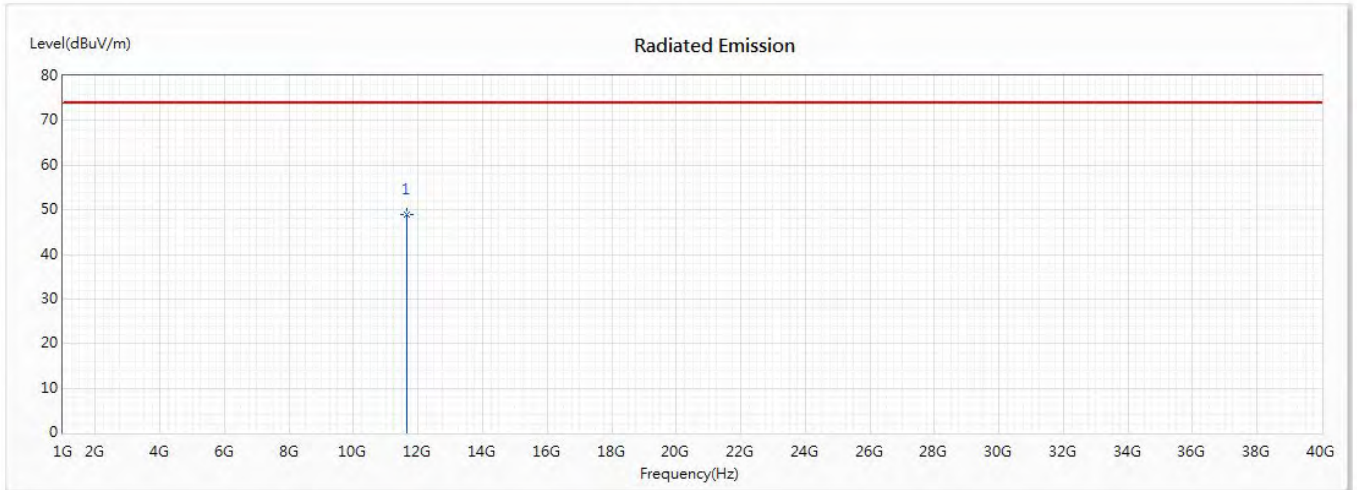


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11650	48.81	74.00	-25.19	42.43	6.38	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz) (RU Config-Full)
 +LTE Band 66 Link+BLE
 Test Date : 2020/06/23

Horizontal

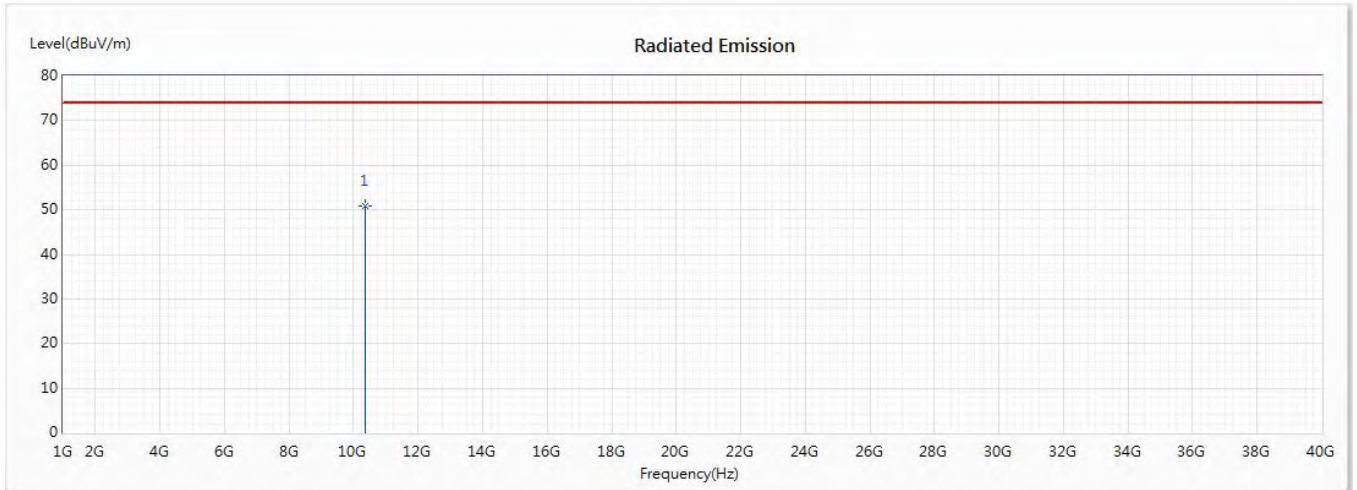


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10380	50.92	74.00	-23.08	45.65	5.27	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz) (RU Config-Full)
 +LTE Band 66 Link+BLE
 Test Date : 2020/06/23

Vertical

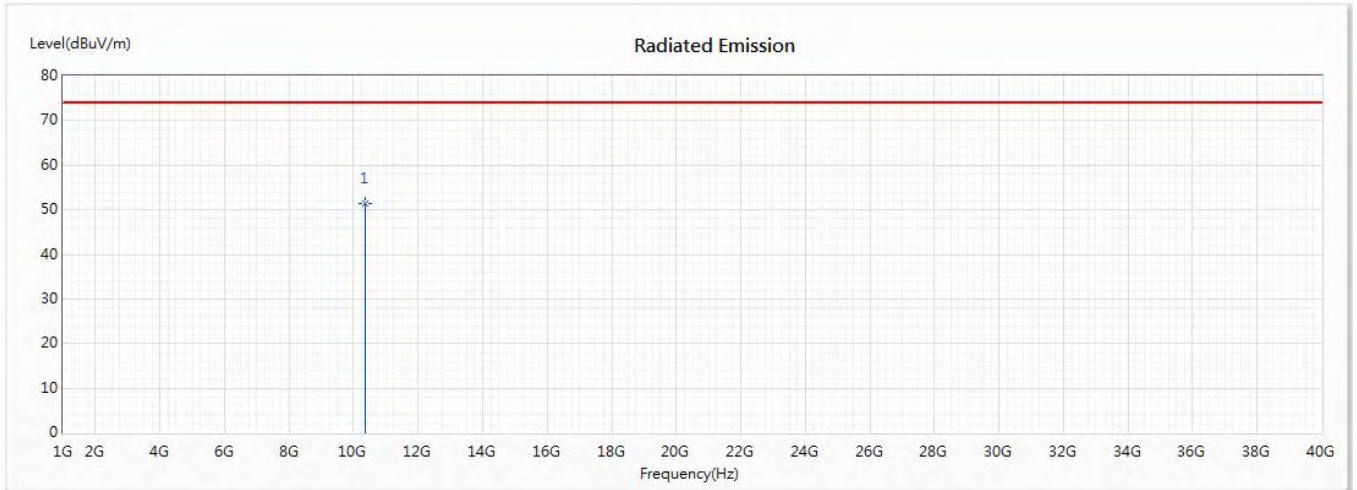


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10380	51.44	74.00	-22.56	46.17	5.27	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5230MHz) (RU Config-Full)
 +LTE Band 66 Link+BLE
 Test Date : 2020/06/23

Horizontal

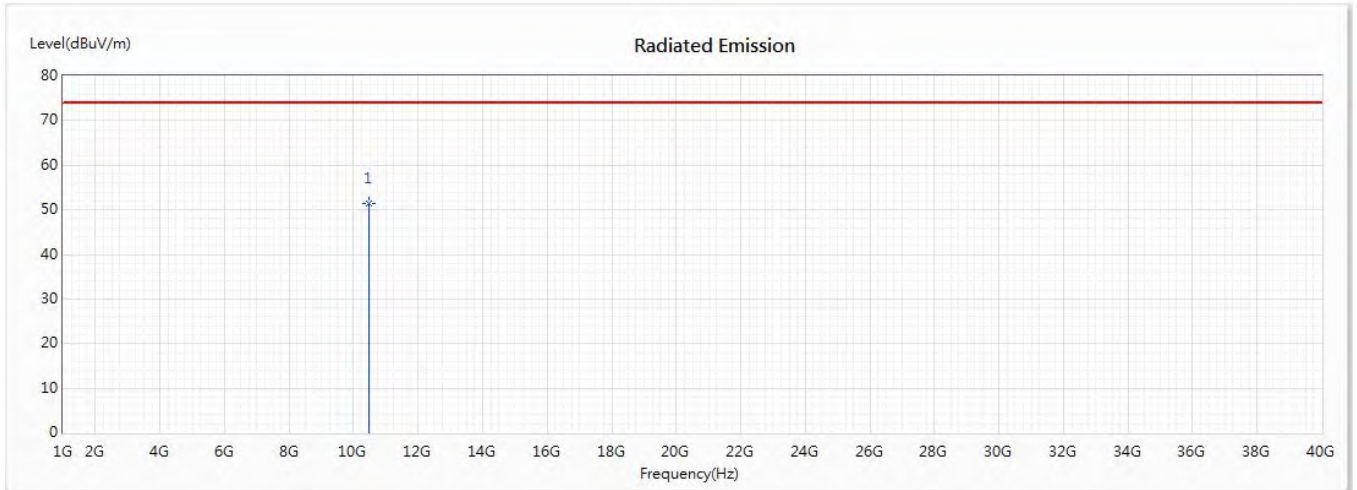


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10460	51.29	74.00	-22.71	45.48	5.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5230MHz) (RU Config-Full)
 +LTE Band 66 Link+BLE
 Test Date : 2020/06/23

Vertical

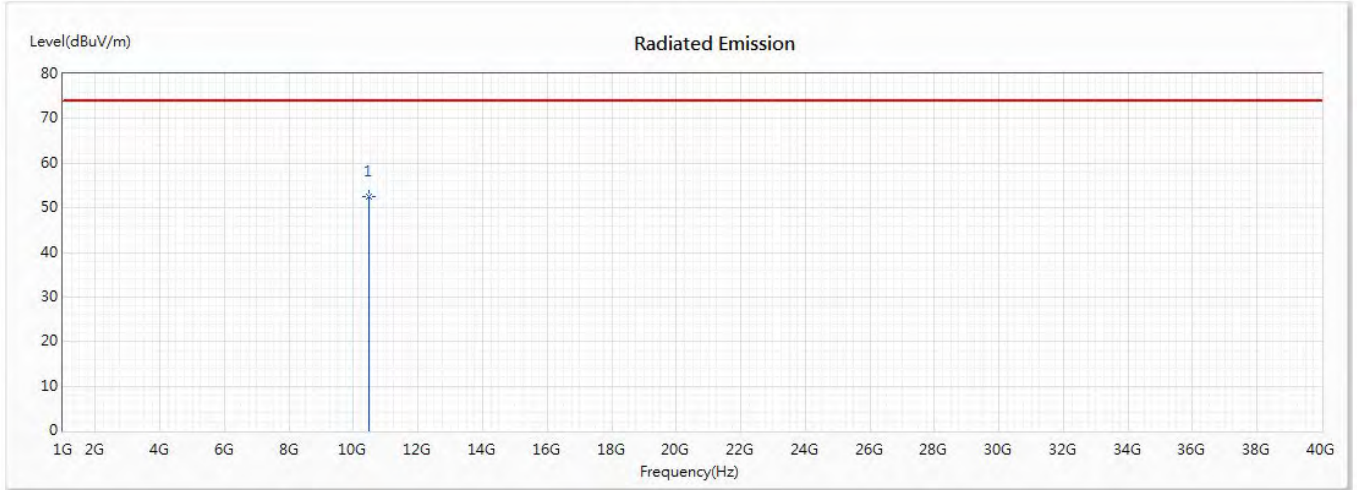


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10460	52.40	74.00	-21.60	46.59	5.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5755MHz) (RU Config-Full)
 +5GNR FR1 Band n2 Link +BLE
 Test Date : 2020/06/23

Horizontal

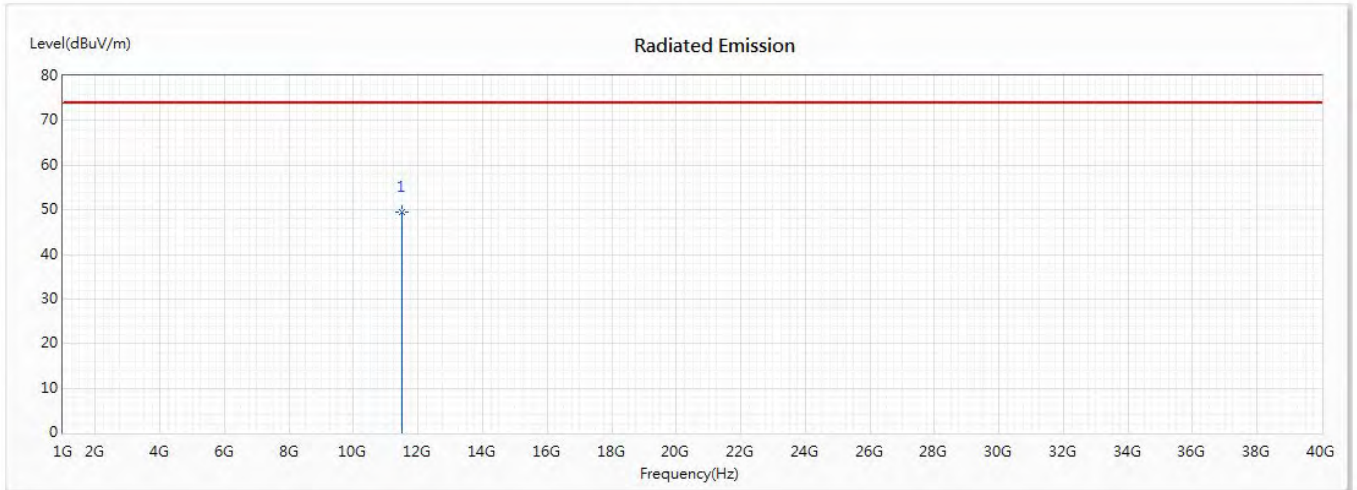


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11510	49.38	74.00	-24.62	43.32	6.06	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5755MHz) (RU Config-Full)
 +5GNR FR1 Band n2 Link +BLE
 Test Date : 2020/06/23

Vertical

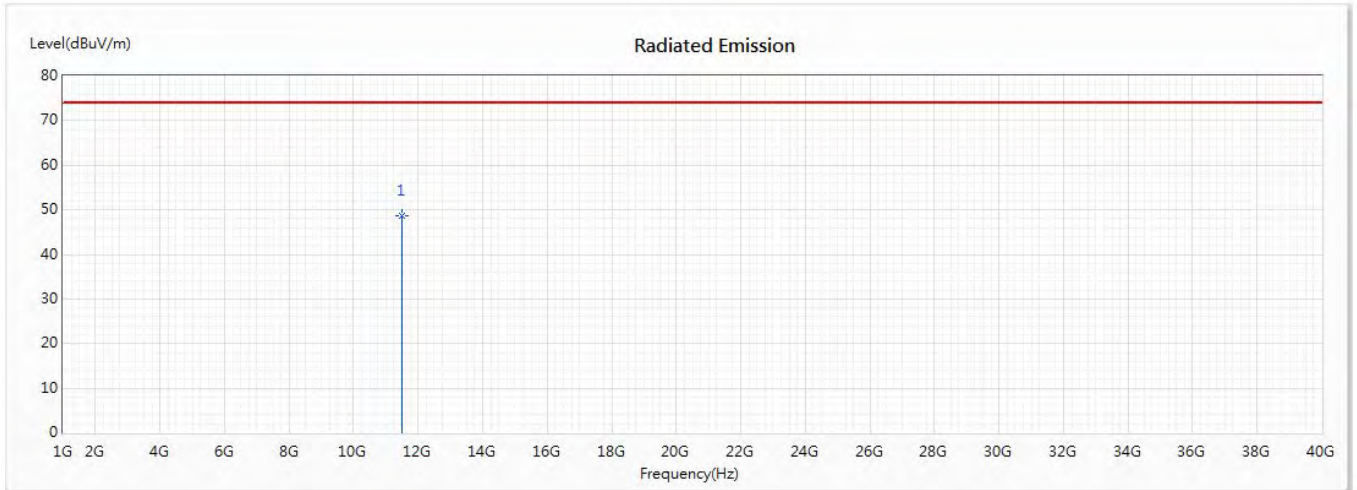


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11510	48.67	74.00	-25.33	42.61	6.06	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5795MHz) (RU Config-Full)
 +5GNR FR1 Band n2 Link +BLE
 Test Date : 2020/06/23

Horizontal

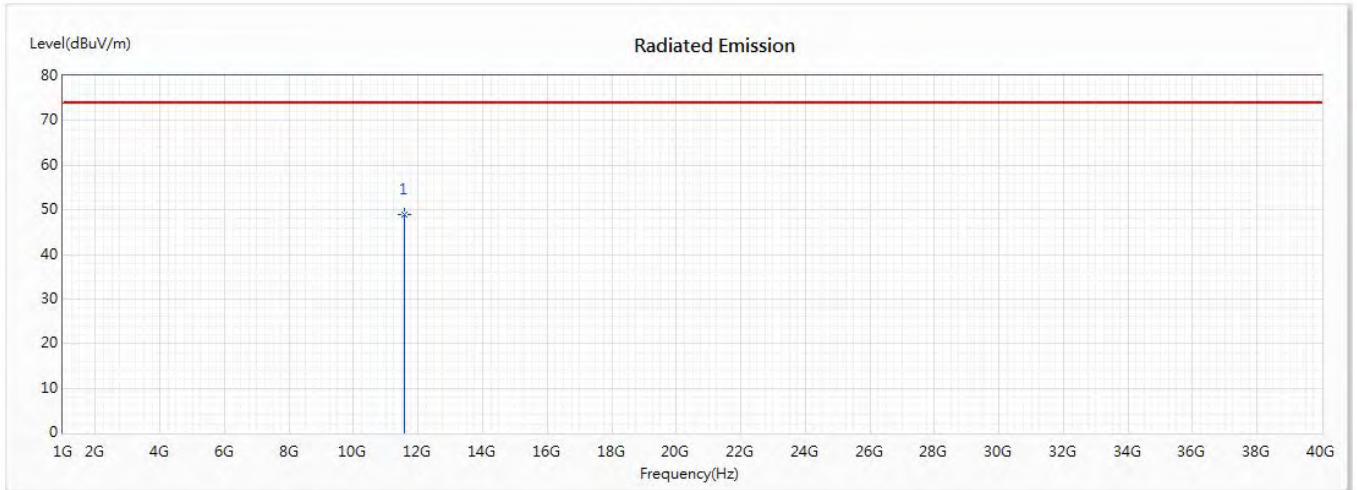


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11590	48.91	74.00	-25.09	42.34	6.57	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5795MHz) (RU Config-Full)
 +5GNR FR1 Band n2 Link +BLE
 Test Date : 2020/06/23

Vertical

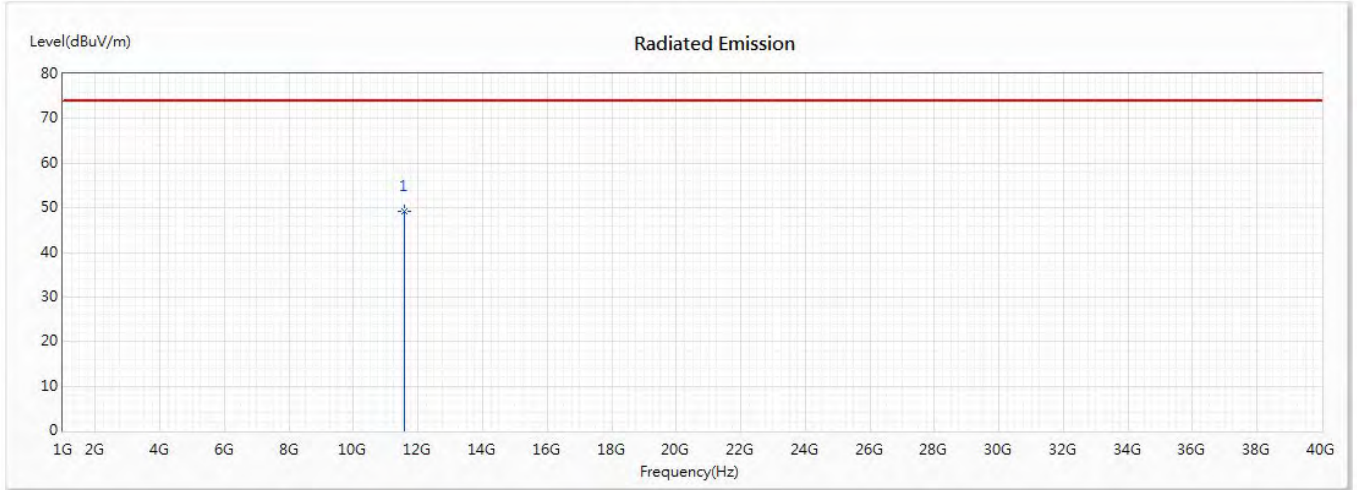


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11590	49.11	74.00	-24.89	42.54	6.57	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz) (RU Config-Full)
 +5GNR FR1 Band n5 Link +BLE
 Test Date : 2020/06/23

Horizontal

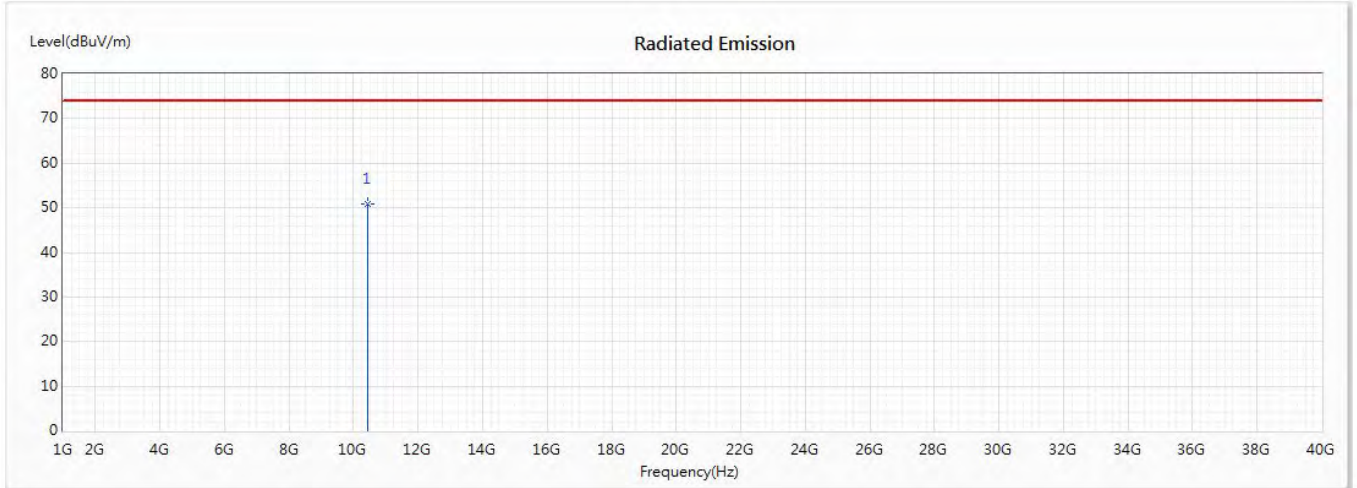


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10420	50.75	74.00	-23.25	45.28	5.47	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz) (RU Config-Full)
 +5GNR FR1 Band n5 Link +BLE
 Test Date : 2020/06/23

Vertical

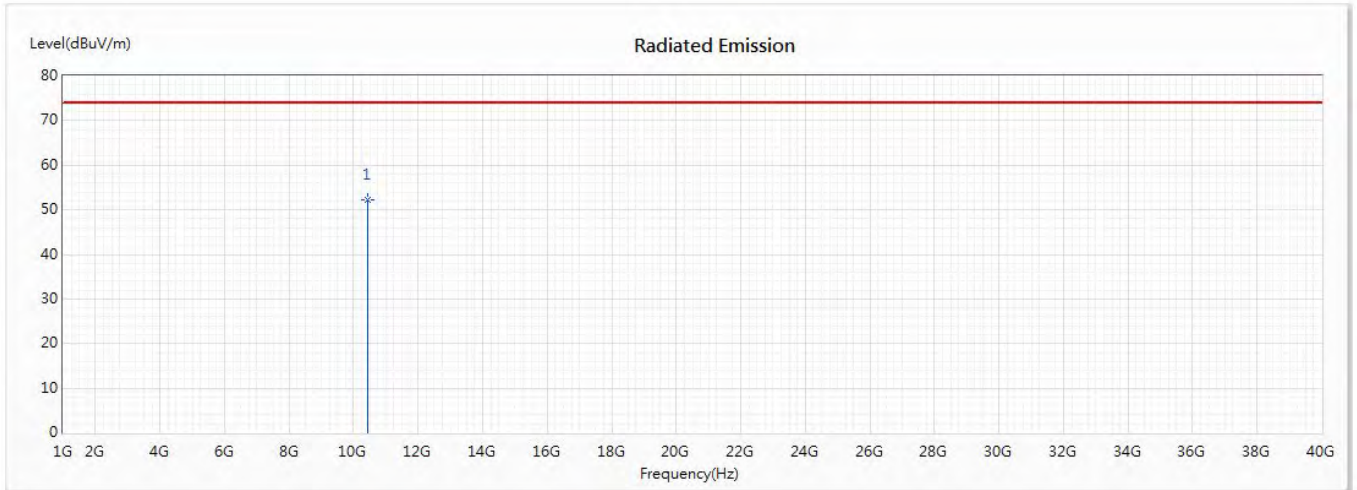


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10420	52.22	74.00	-21.78	46.75	5.47	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5775MHz) (RU Config-Full)
 +5GNR FR1 Band n66 Link +BLE
 Test Date : 2020/06/23

Horizontal

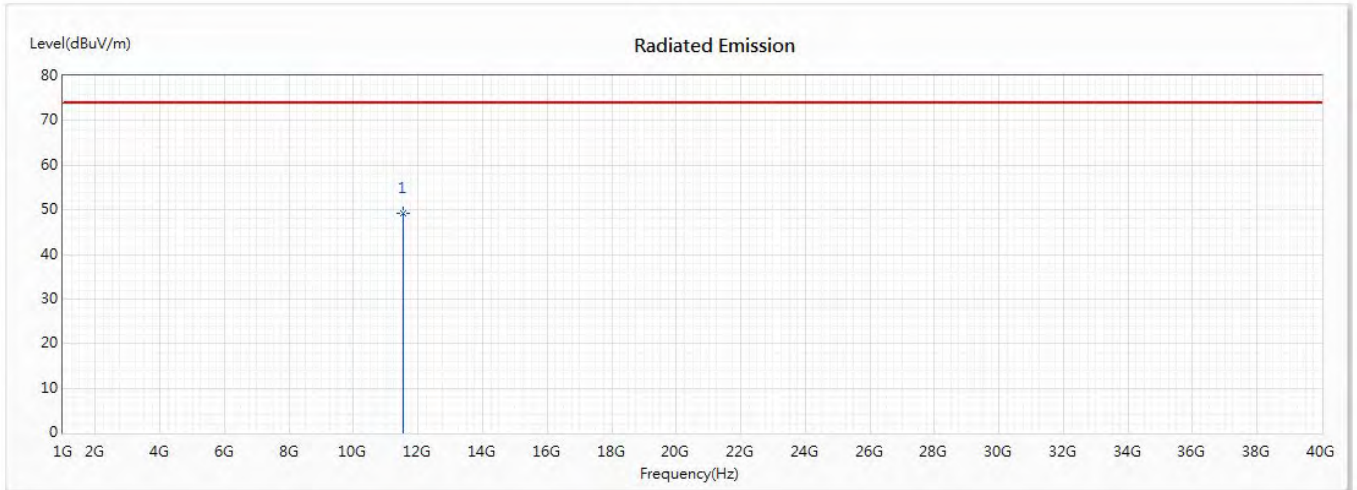


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11550	49.21	74.00	-24.79	43.04	6.17	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss –Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5775MHz) (RU Config-Full)
 +5GNR FR1 Band n66 Link +BLE
 Test Date : 2020/06/23

Vertical

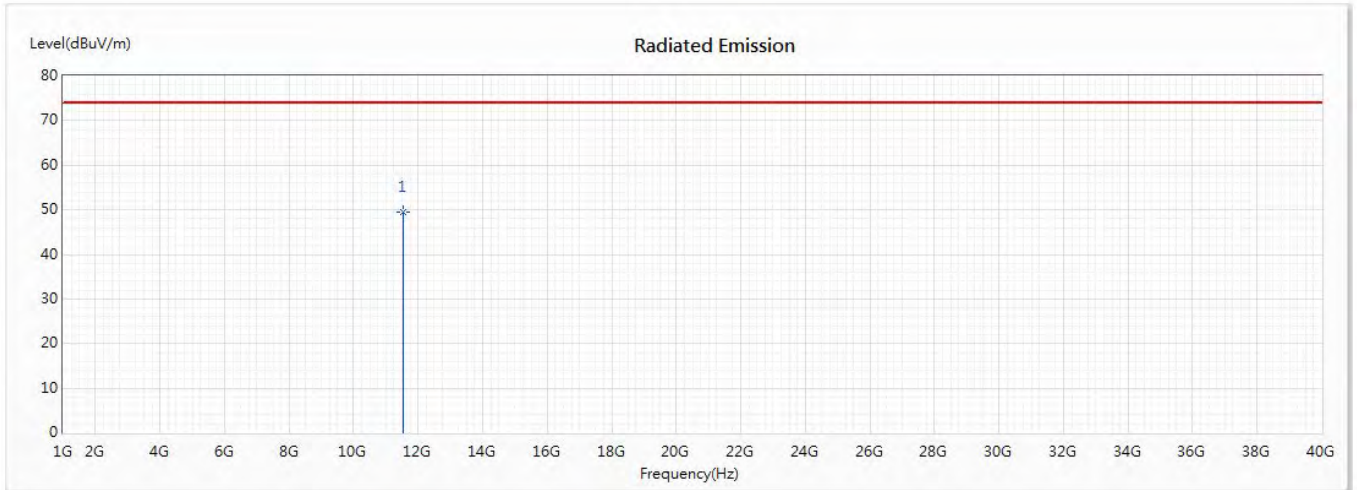


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11550	49.57	74.00	-24.43	43.40	6.17	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5180MHz)
 + LTE Band 2 Link+BLE
 Test Date : 2020/07/03

Horizontal

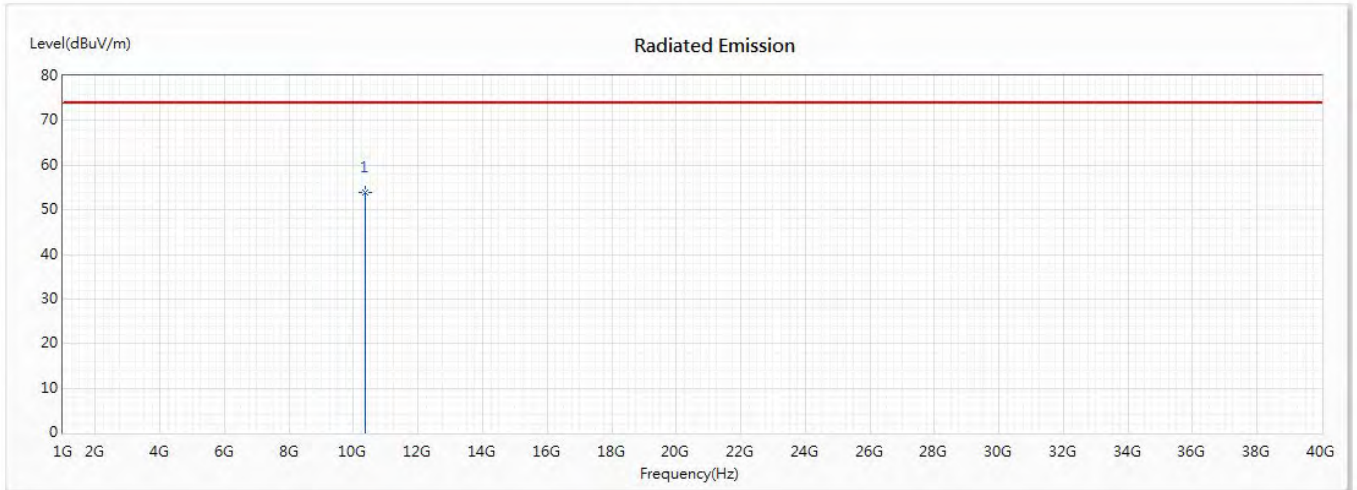


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10360	53.85	74.00	-20.15	48.36	5.49	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5180MHz)
 + LTE Band 2 Link+BLE
 Test Date : 2020/07/03

Vertical

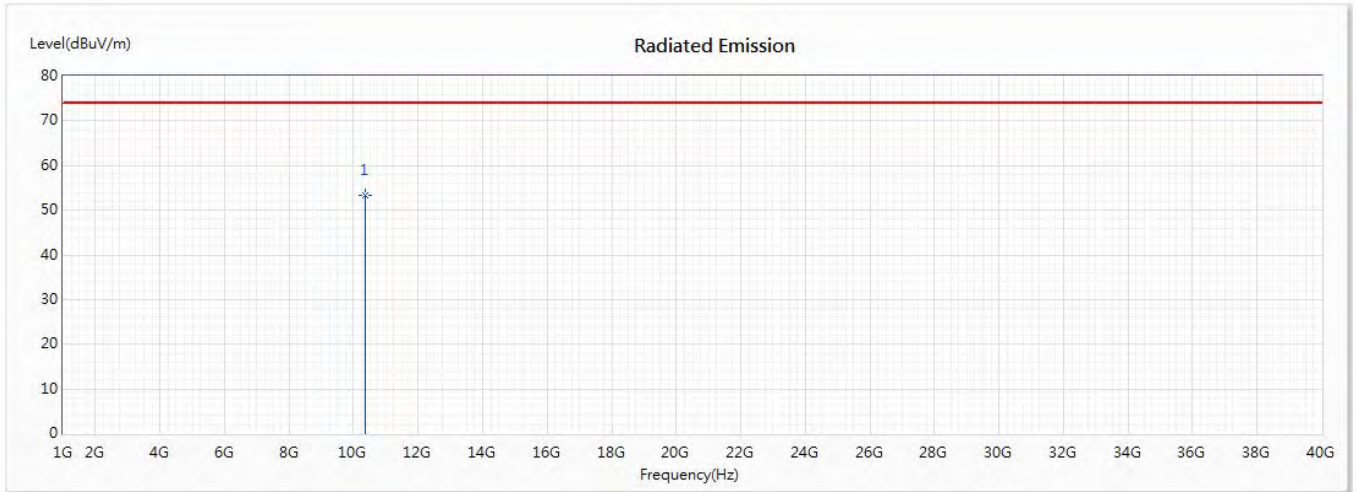


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10360	53.24	74.00	-20.76	47.75	5.49	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5220MHz)
 + LTE Band 2 Link+BLE
 Test Date : 2020/07/03

Horizontal

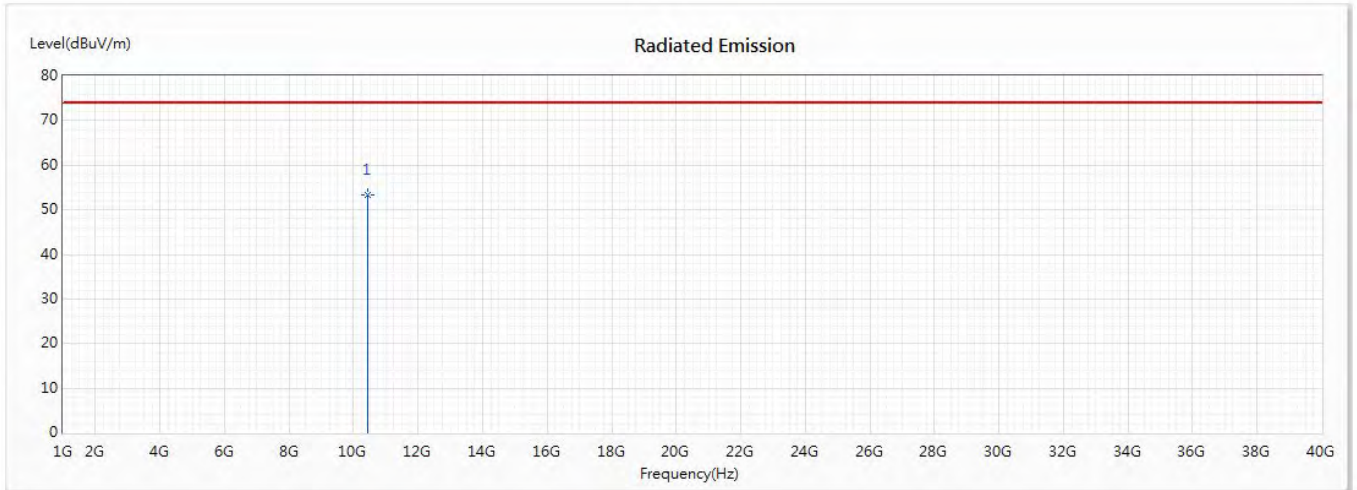


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10440	53.42	74.00	-20.58	47.66	5.76	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5220MHz)
 + LTE Band 2 Link+BLE
 Test Date : 2020/07/03

Vertical

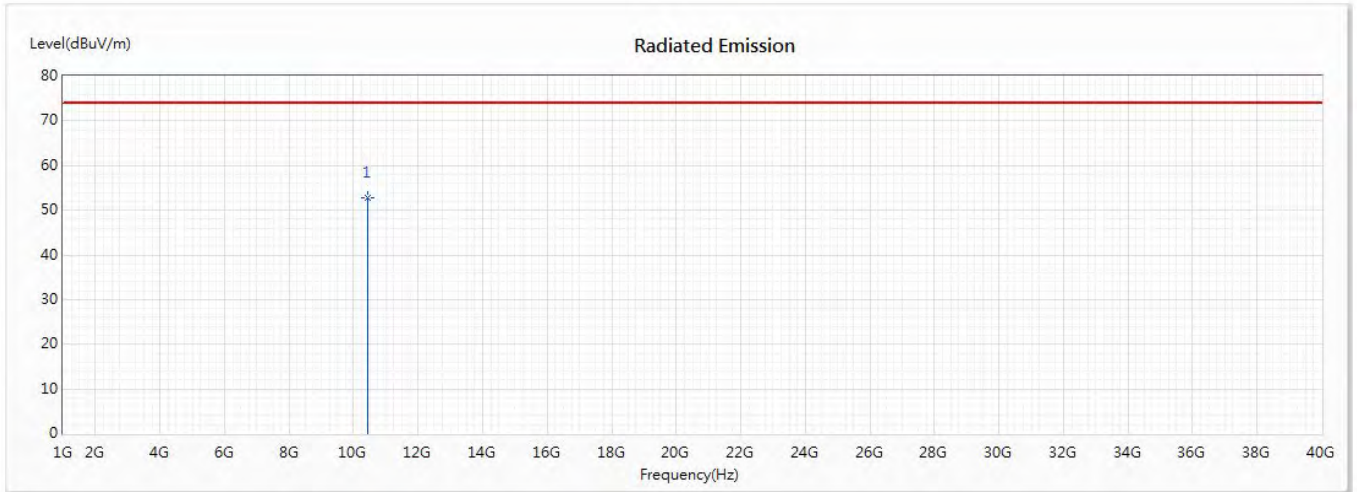


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10440	52.71	74.00	-21.29	46.95	5.76	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5240MHz)
 + LTE Band 2 Link+BLE
 Test Date : 2020/07/03

Horizontal

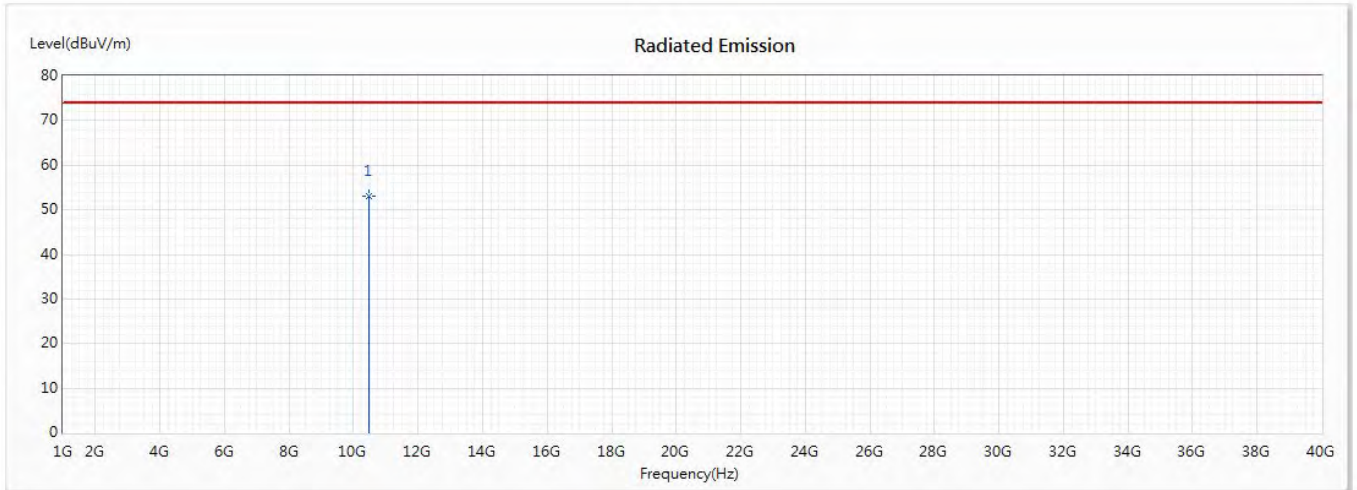


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10480	53.18	74.00	-20.82	47.48	5.70	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5240MHz)
 + LTE Band 2 Link+BLE
 Test Date : 2020/07/03

Vertical

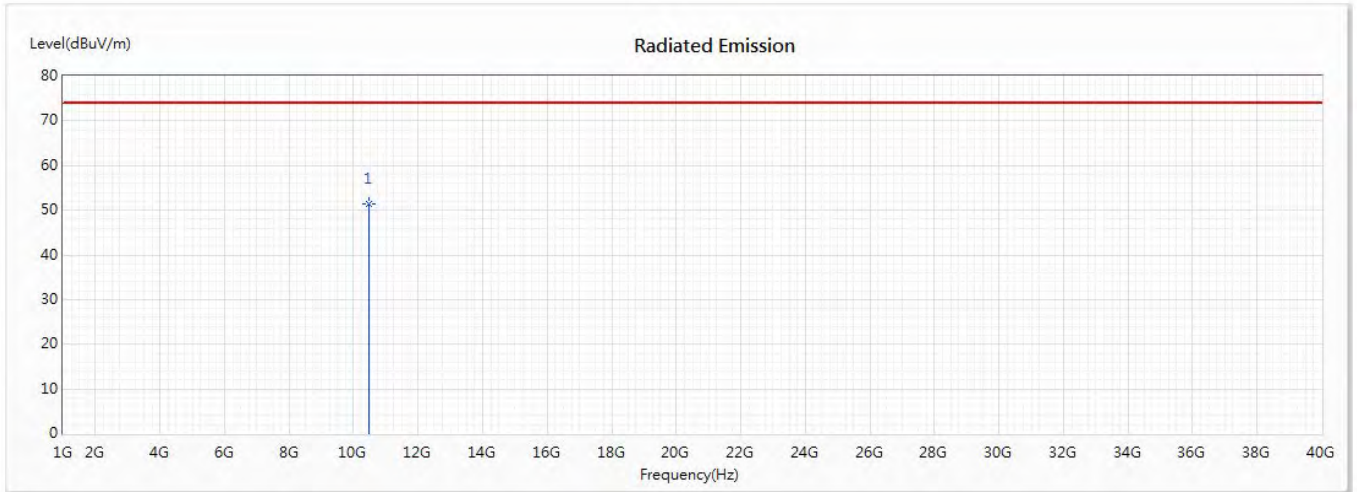


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10480	51.43	74.00	-22.57	45.73	5.70	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5745MHz)
 + LTE Band 5 Link+BLE
 Test Date : 2020/07/03

Horizontal

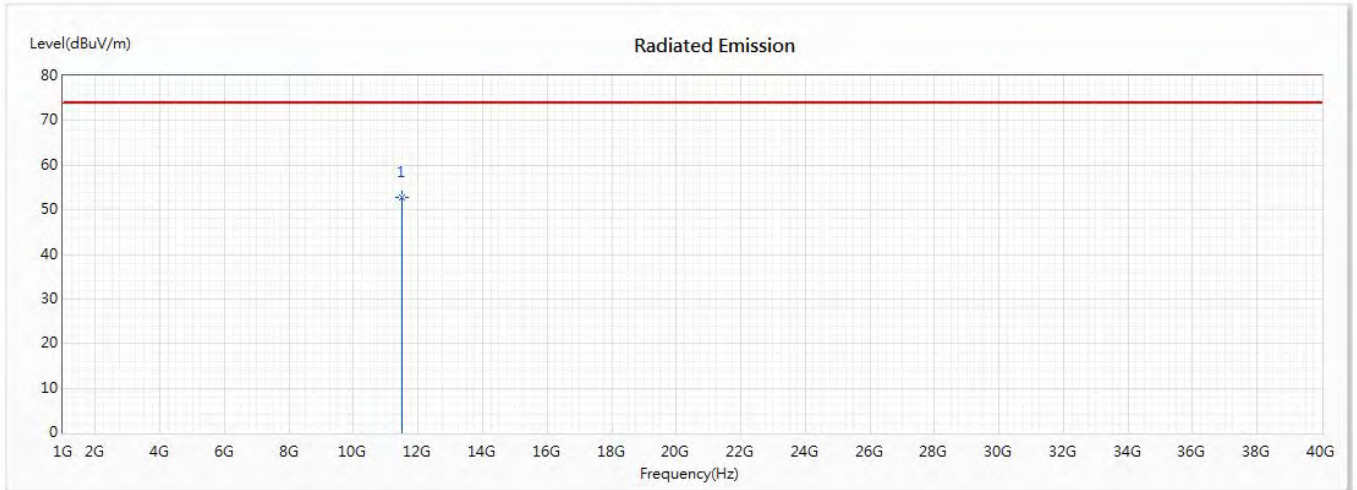


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11490	52.88	74.00	-21.12	46.70	6.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5745MHz)
 + LTE Band 5 Link+BLE
 Test Date : 2020/07/03

Vertical

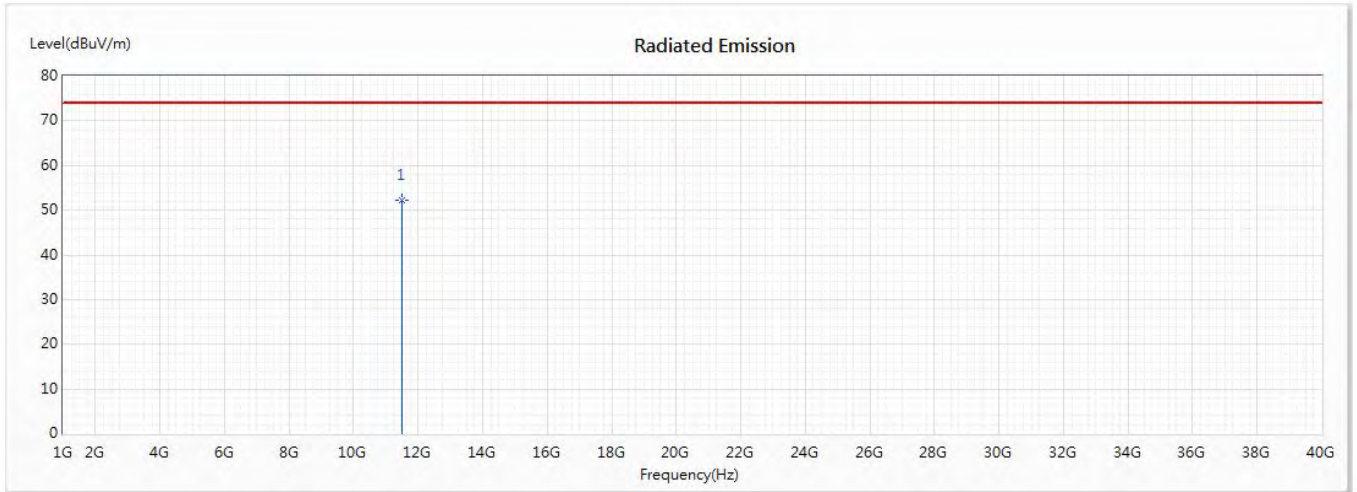


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11490	52.24	74.00	-21.76	46.06	6.18	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5785MHz)
 + LTE Band 5 Link+BLE
 Test Date : 2020/07/03

Horizontal

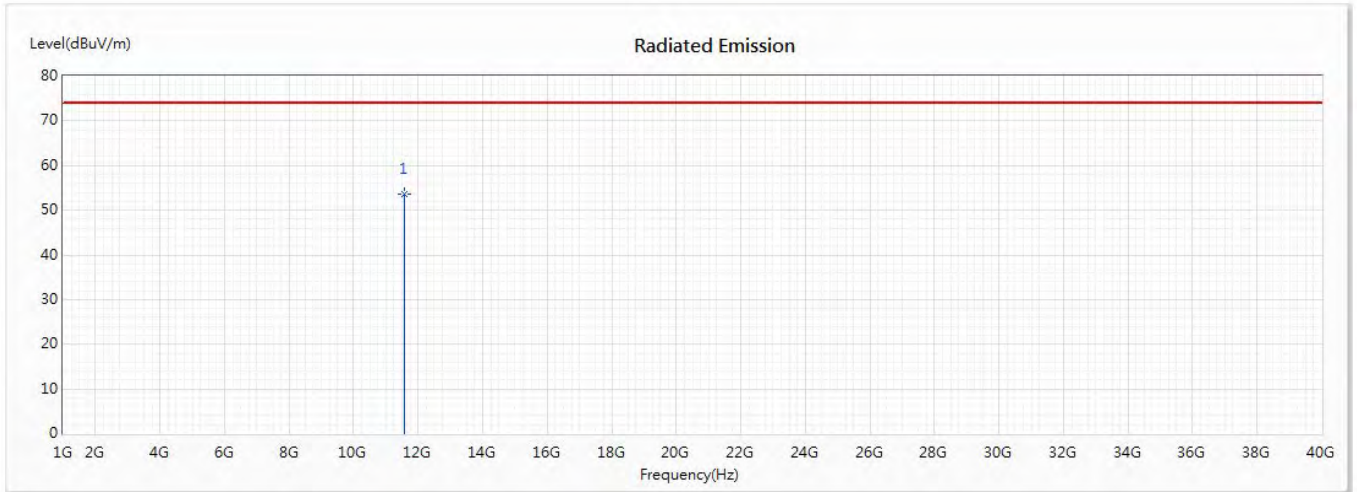


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11570	53.71	74.00	-20.29	47.30	6.41	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5785MHz)
 + LTE Band 5 Link+BLE
 Test Date : 2020/07/03

Vertical

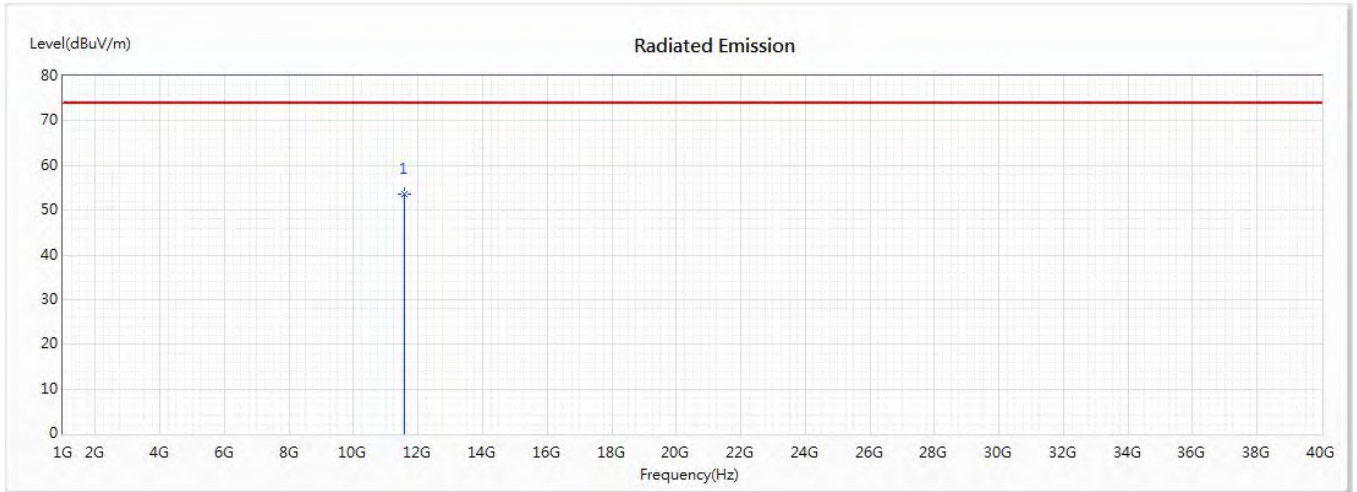


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11570	53.48	74.00	-20.52	47.07	6.41	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5825MHz)
 + LTE Band 5 Link+BLE
 Test Date : 2020/07/03

Horizontal

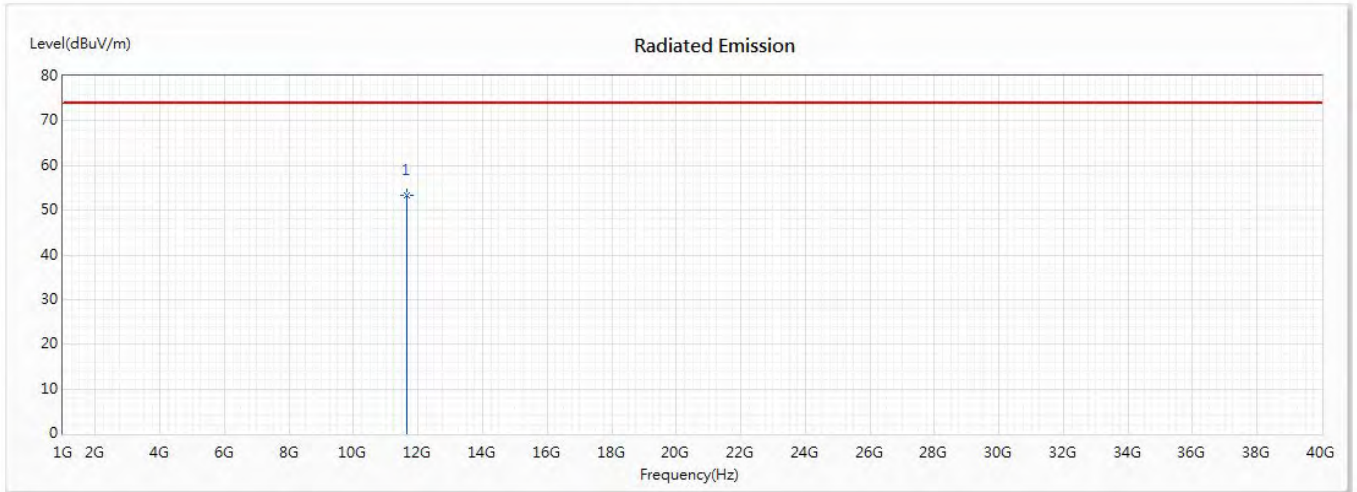


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11650	53.46	74.00	-20.54	47.08	6.38	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5825MHz)
 + LTE Band 5 Link+BLE
 Test Date : 2020/07/03

Vertical

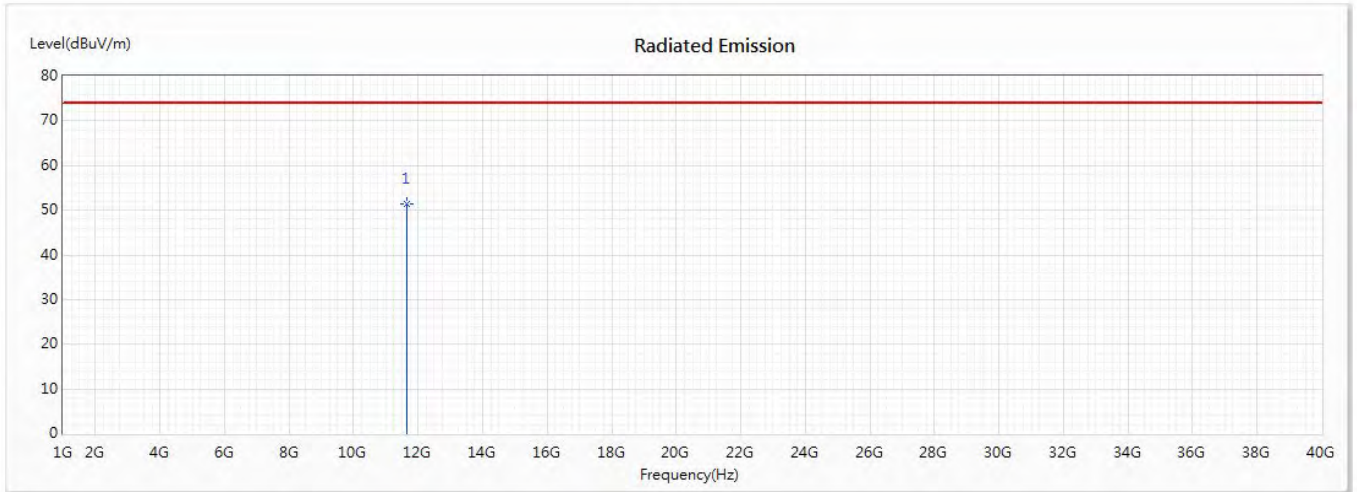


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11650	51.40	74.00	-22.60	45.02	6.38	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5190MHz)
 + LTE Band 13 Link+BLE
 Test Date : 2020/07/03

Horizontal

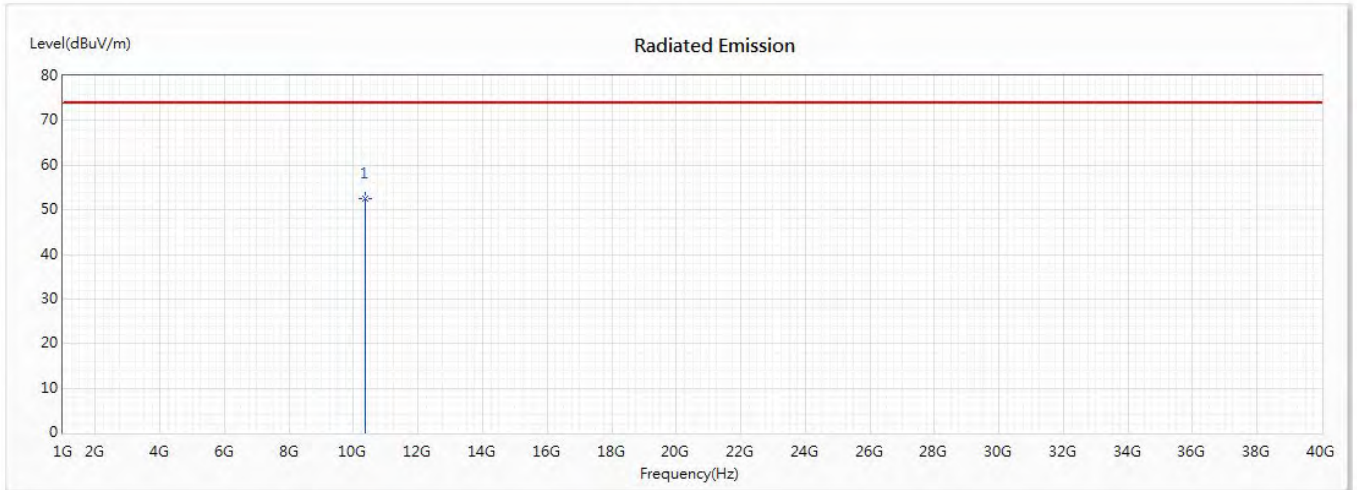


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10380	52.59	74.00	-21.41	47.32	5.27	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5190MHz)
 + LTE Band 13 Link+BLE
 Test Date : 2020/07/03

Vertical

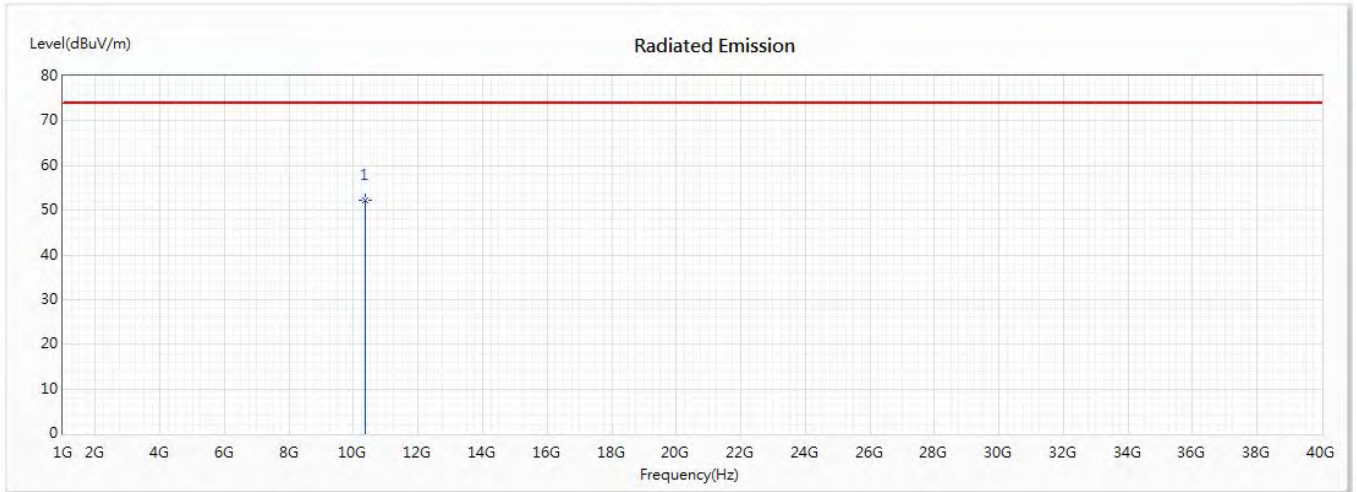


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10380	52.12	74.00	-21.88	46.85	5.27	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5230MHz)
 + LTE Band 13 Link+BLE
 Test Date : 2020/07/03

Horizontal

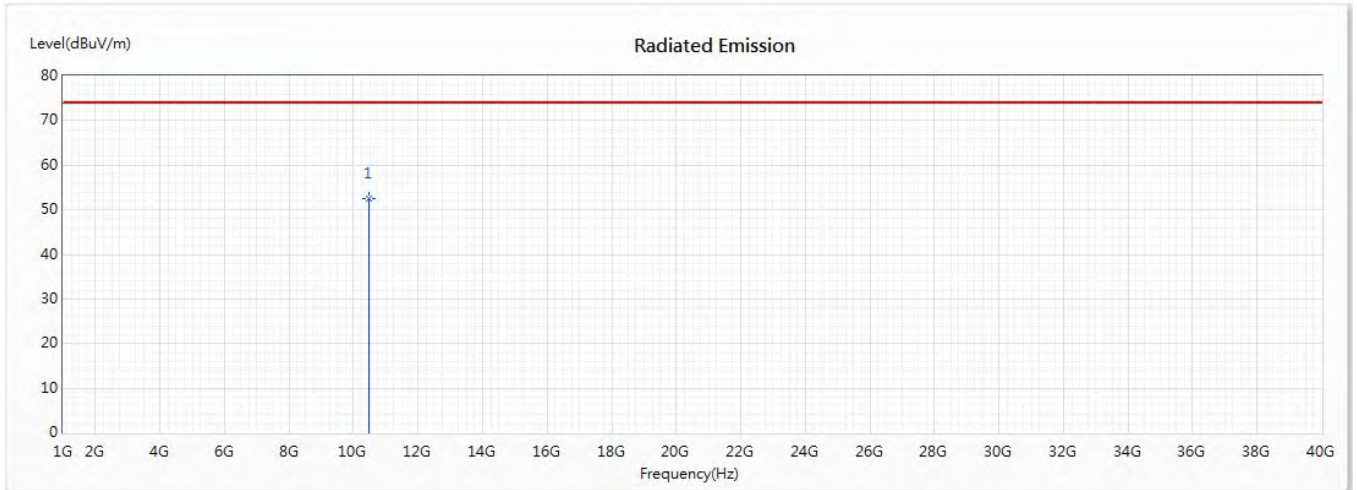


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10460	52.63	74.00	-21.37	46.82	5.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5230MHz)
 + LTE Band 13 Link+BLE
 Test Date : 2020/07/03

Vertical

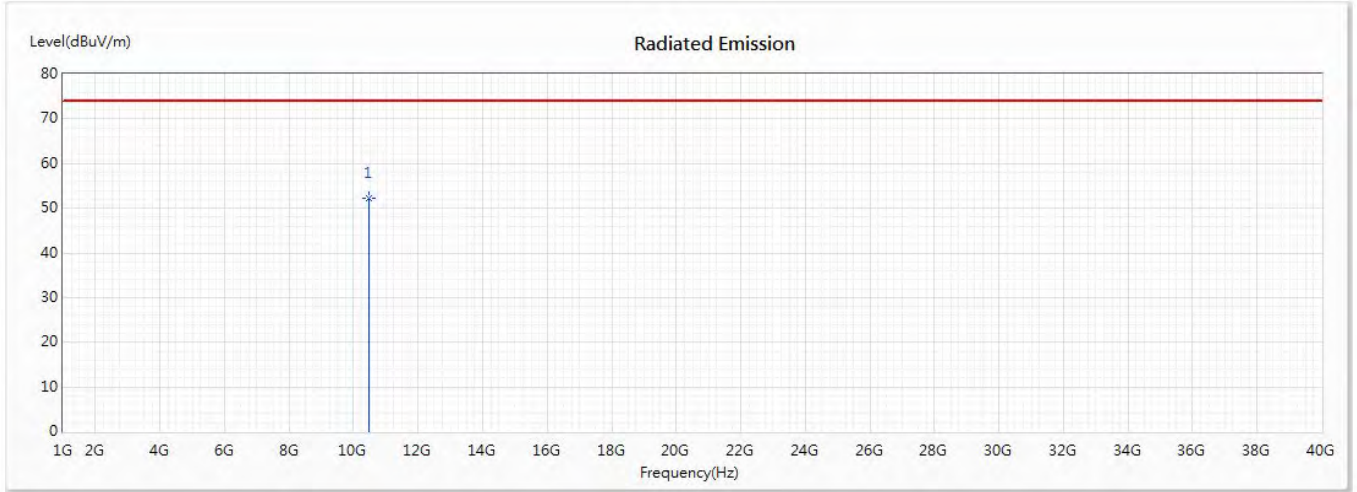


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10460	52.18	74.00	-21.82	46.37	5.81	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5755MHz)
 + LTE Band 48 Link+BLE
 Test Date : 2020/07/03

Horizontal

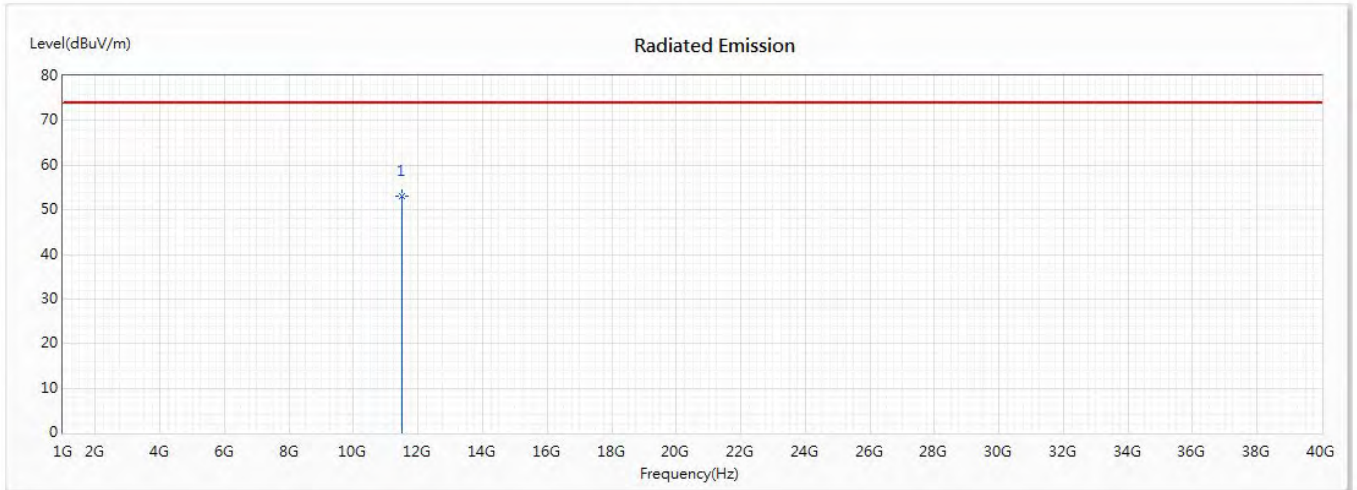


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11510	53.12	74.00	-20.88	47.06	6.06	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5755MHz)
 + LTE Band 48 Link+BLE
 Test Date : 2020/07/03

Vertical

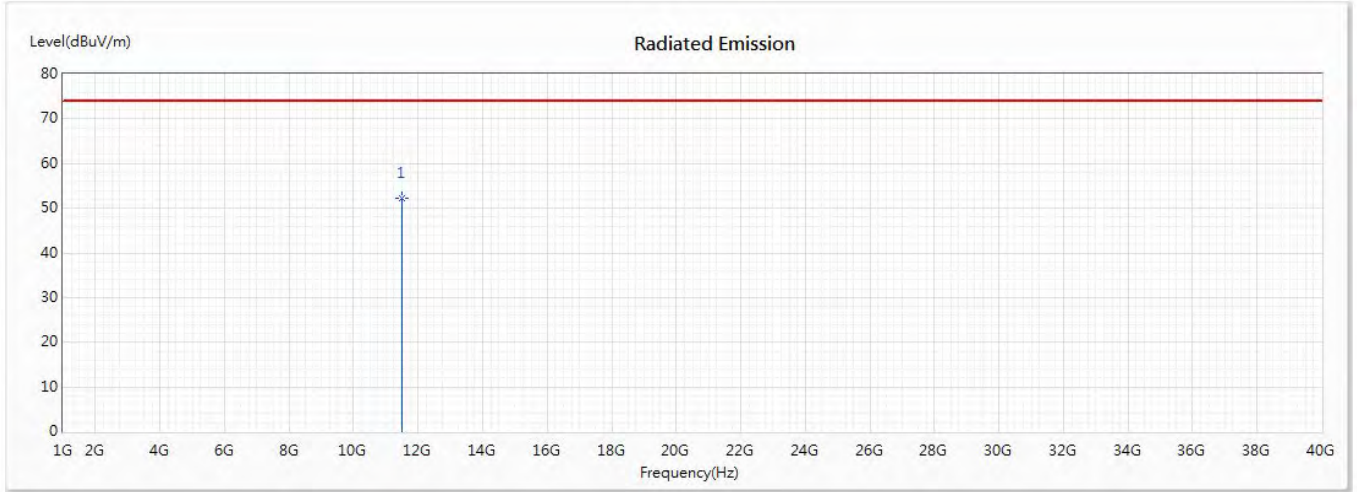


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11510	52.14	74.00	-21.86	46.08	6.06	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5795MHz)
 + LTE Band 48 Link+BLE
 Test Date : 2020/07/03

Horizontal

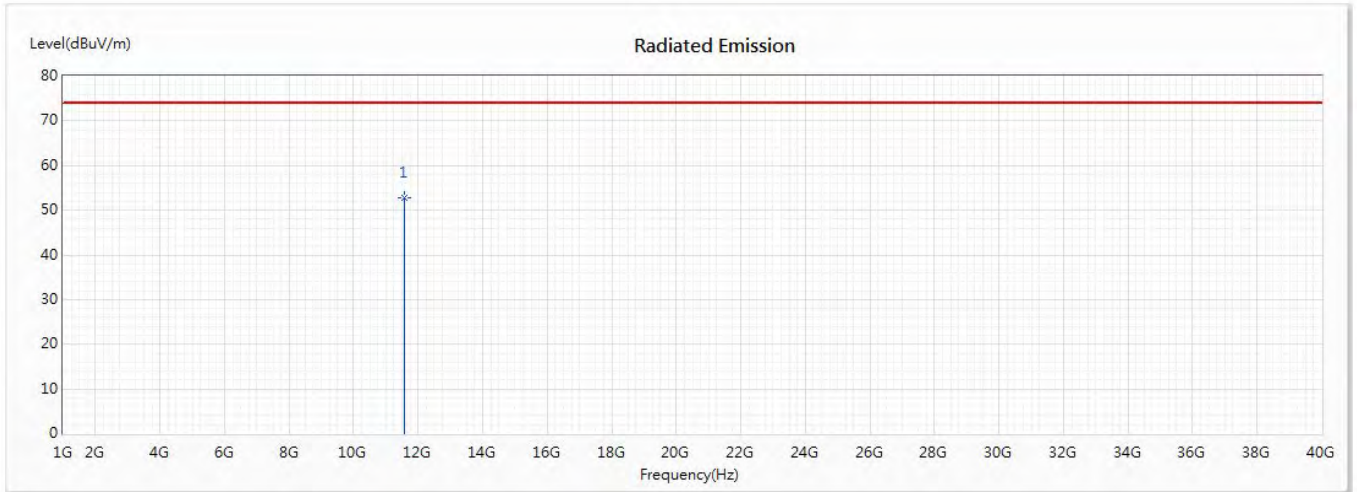


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11590	52.82	74.00	-21.18	46.25	6.57	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5795MHz)
 + LTE Band 48 Link+BLE
 Test Date : 2020/07/03

Vertical

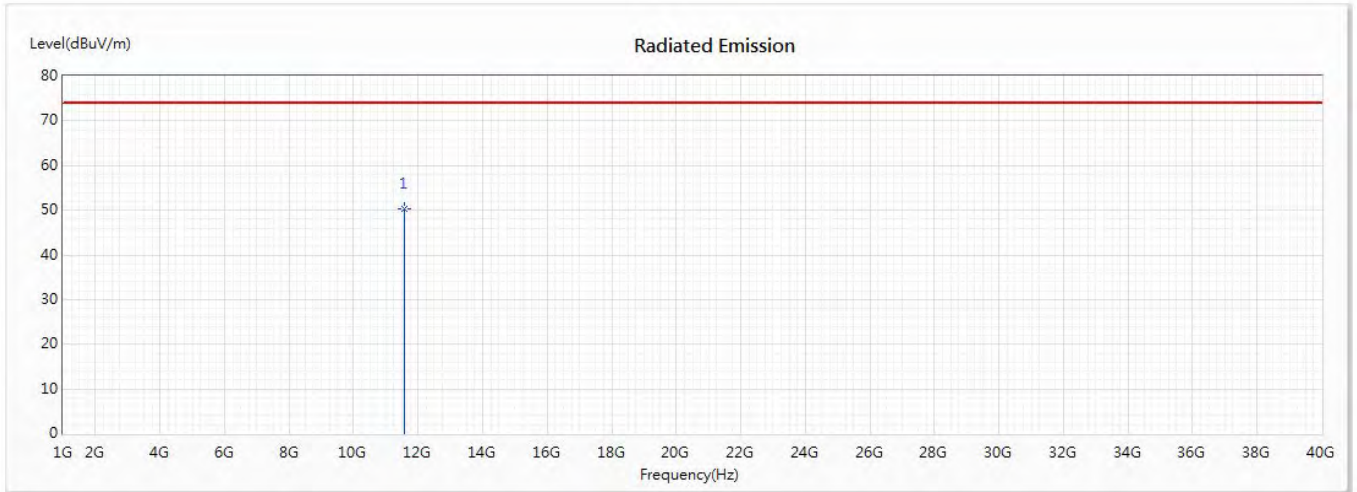


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11590	50.43	74.00	-23.57	43.86	6.57	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming)(5210MHz)
 + LTE Band 66 Link+BLE
 Test Date : 2020/07/03

Horizontal

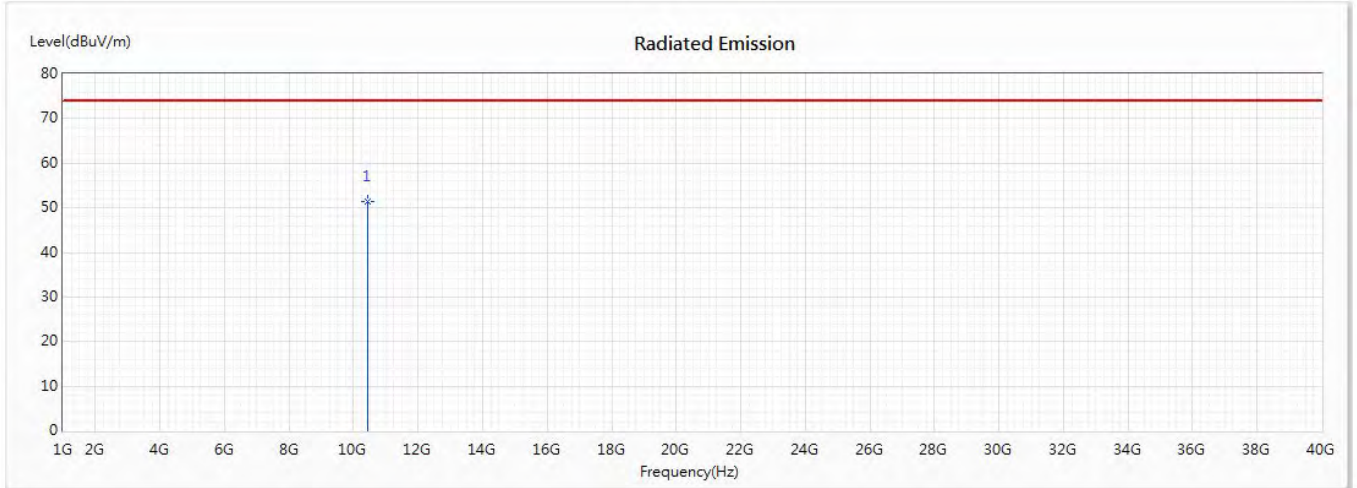


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10420	51.29	74.00	-22.71	45.82	5.47	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming)(5210MHz)
 + LTE Band 66 Link+BLE
 Test Date : 2020/07/03

Vertical

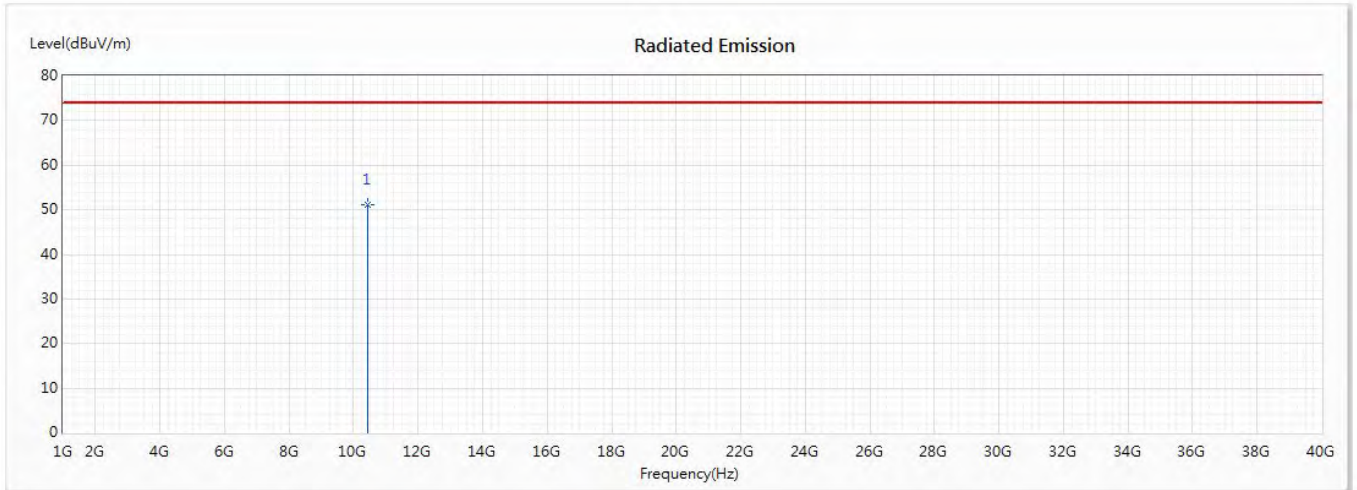


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	10420	51.21	74.00	-22.79	45.74	5.47	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming)(5775MHz)
 + 5GNR FR1 Band n2 Link +BLE
 Test Date : 2020/07/03

Horizontal

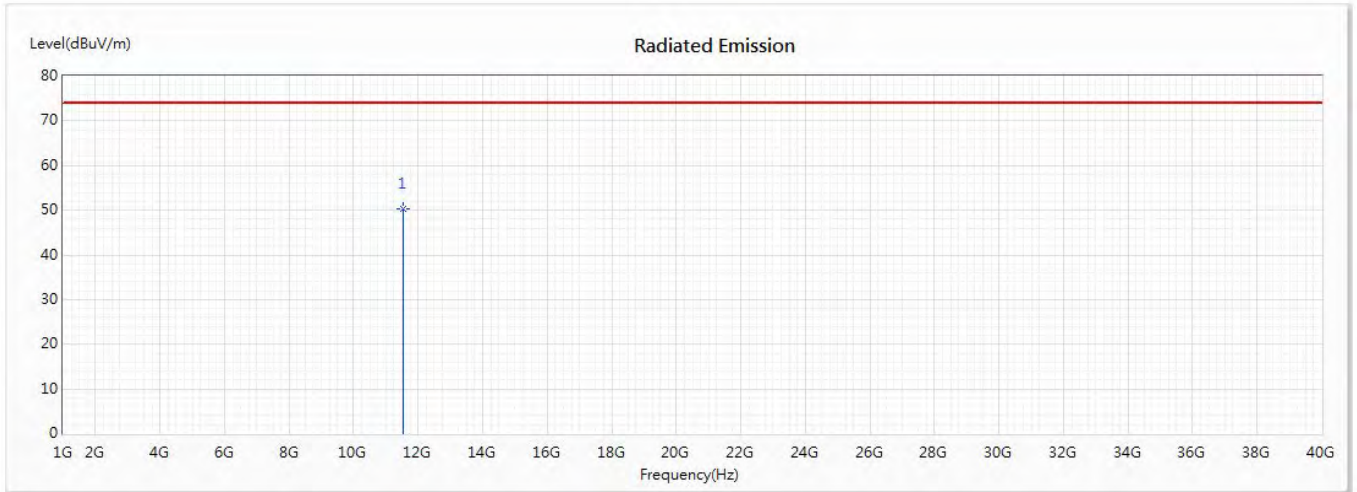


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11550	50.39	74.00	-23.61	44.22	6.17	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : Harmonic Radiated Emission Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming)(5775MHz)
 + 5GNR FR1 Band n2 Link +BLE
 Test Date : 2020/07/03

Vertical

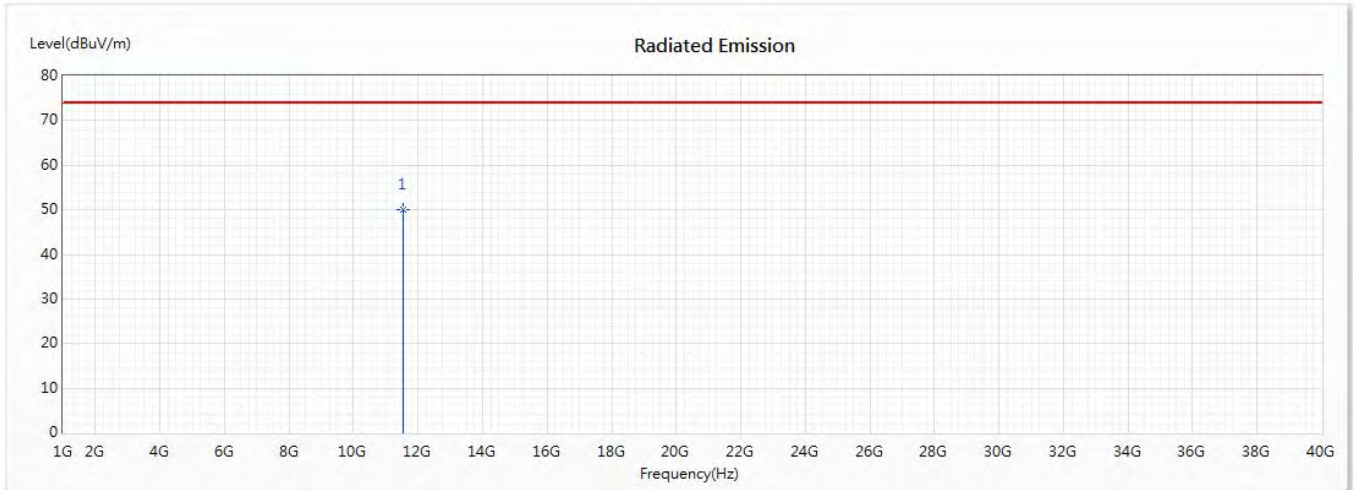


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	11550	49.92	74.00	-24.08	43.75	6.17	PK

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The average measurement was not performed when the peak measured data under the limit of average detection.
5. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5220MHz)+LTE Band 2 Link+BLE
 Test Date : 2020/06/25

Horizontal

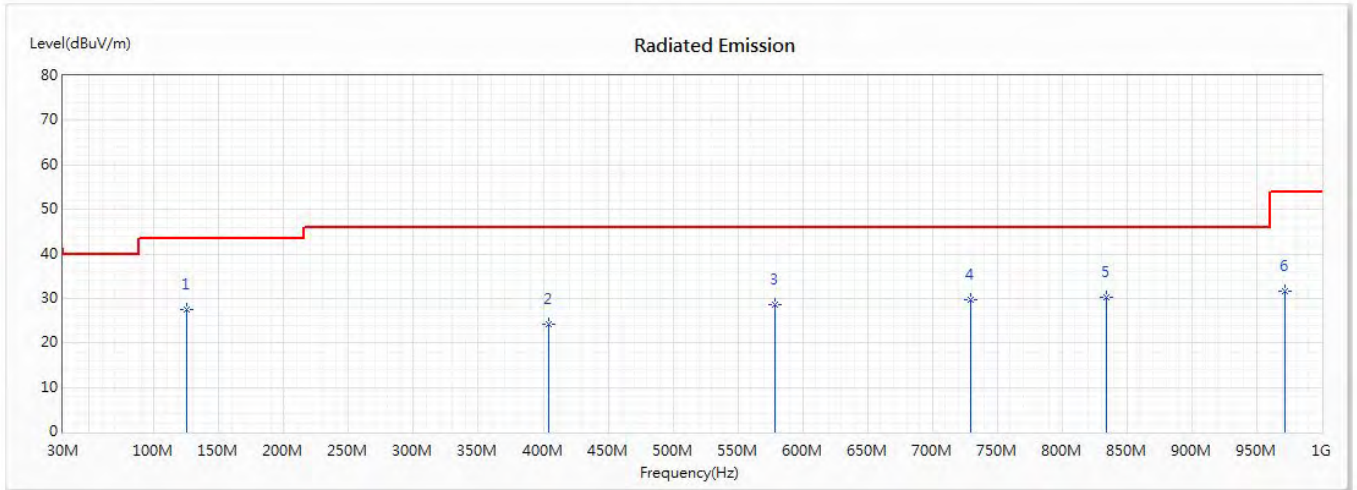


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	125.06	27.42	43.50	-16.08	40.48	-13.06	QP
2	404.42	24.23	46.00	-21.77	31.14	-6.91	QP
3	579.02	28.61	46.00	-17.39	31.74	-3.13	QP
4	729.37	29.68	46.00	-16.32	30.50	-0.82	QP
* 5	834.13	30.36	46.00	-15.64	29.97	0.39	QP
6	971.87	31.75	54.00	-22.25	29.56	2.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5220MHz)+LTE Band 2 Link+BLE
 Test Date : 2020/06/25

Vertical

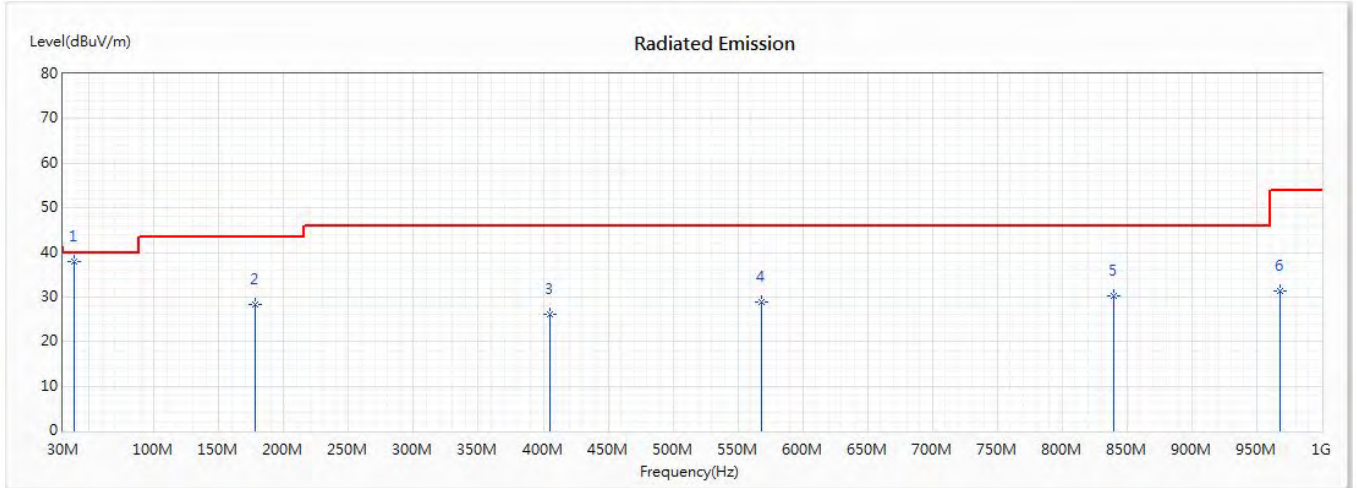


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	38.73	37.89	40.00	-2.11	49.05	-11.16	QP
2	178.41	28.18	43.50	-15.32	39.62	-11.44	QP
3	405.39	26.01	46.00	-19.99	32.91	-6.90	QP
4	568.35	28.73	46.00	-17.27	31.99	-3.26	QP
5	839.95	30.17	46.00	-15.83	29.65	0.52	QP
6	967.99	31.46	54.00	-22.54	29.20	2.26	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5785MHz) +LTE Band 5 Link+BLE
 Test Date : 2020/06/25

Horizontal

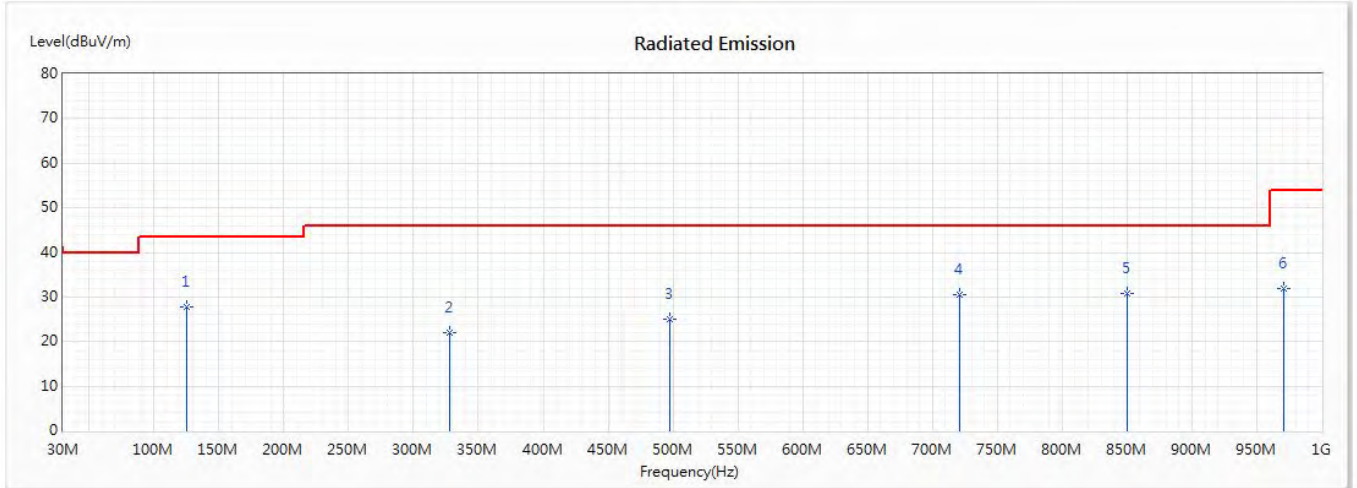


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	125.06	27.77	43.50	-15.73	40.83	-13.06	QP
2	327.79	22.00	46.00	-24.00	30.42	-8.42	QP
3	497.54	25.02	46.00	-20.98	29.48	-4.46	QP
4	720.64	30.38	46.00	-15.62	31.38	-1.00	QP
* 5	849.65	30.87	46.00	-15.13	30.04	0.83	QP
6	970.9	31.95	54.00	-22.05	29.77	2.18	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 1: Transmit (802.11a-CDD) +LTE Band 5 Link+BLE
 Test Date : 2020/06/25

Vertical

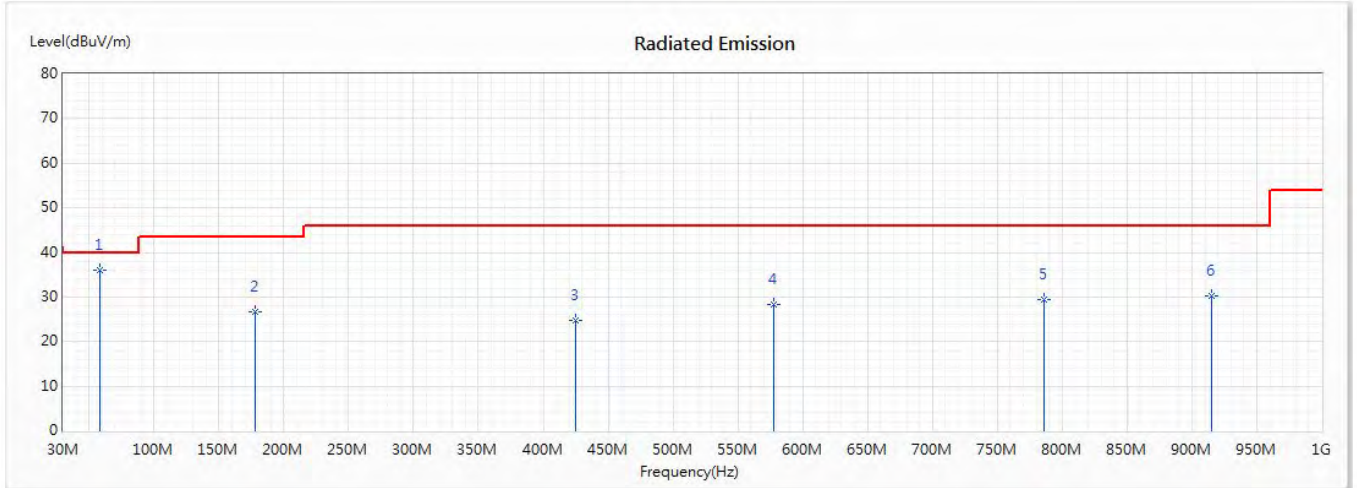


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	58.13	36.07	40.00	-3.93	46.96	-10.89	QP
2	178.41	26.64	43.50	-16.86	38.08	-11.44	QP
3	424.79	24.86	46.00	-21.14	31.19	-6.33	QP
4	578.05	28.25	46.00	-17.75	31.41	-3.16	QP
5	785.63	29.37	46.00	-16.63	29.37	0.00	QP
6	915.61	30.37	46.00	-15.63	28.69	1.68	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5220MHz) (RU Config-Full)
 +LTE Band 13 Link+BLE
 Test Date : 2020/06/25

Horizontal

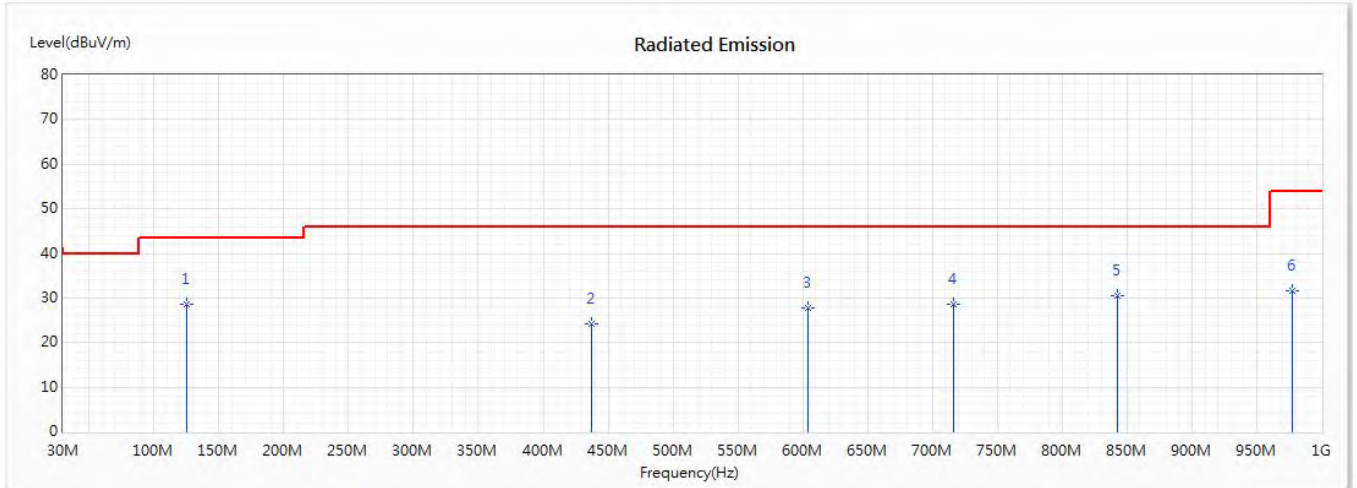


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	125.06	28.47	43.50	-15.03	41.53	-13.06	QP
2	437.4	24.14	46.00	-21.86	30.10	-5.96	QP
3	604.24	27.77	46.00	-18.23	30.18	-2.41	QP
4	715.79	28.53	46.00	-17.47	29.57	-1.04	QP
5	842.86	30.49	46.00	-15.51	29.90	0.59	QP
6	977.69	31.51	54.00	-22.49	29.36	2.15	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5220MHz) (RU Config-Full)
 +LTE Band 13 Link+BLE
 Test Date : 2020/06/25

Vertical

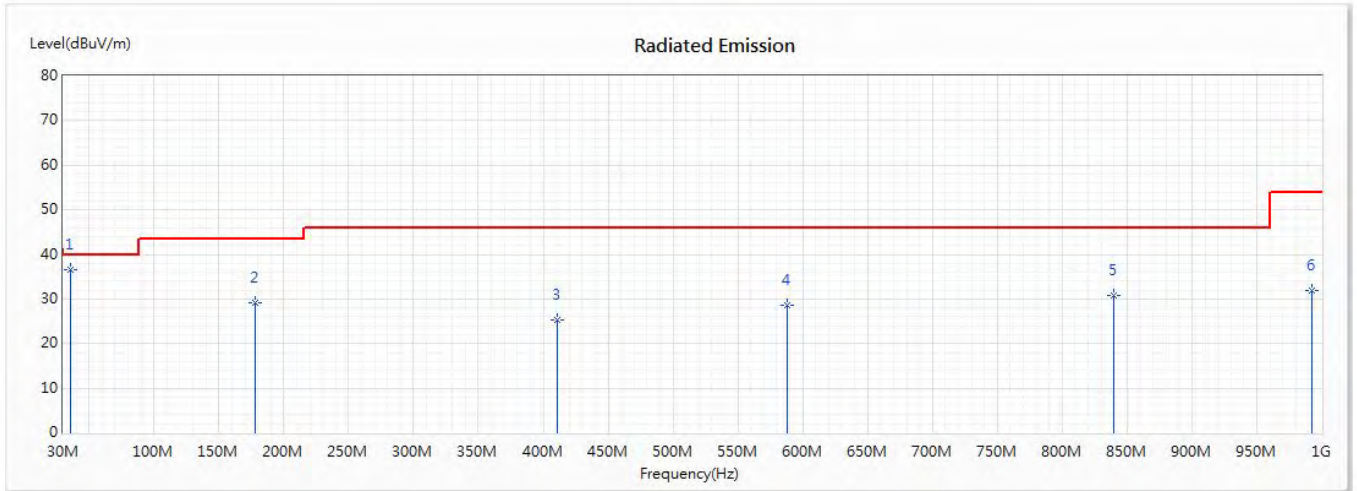


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	35.82	36.59	40.00	-3.41	48.12	-11.53	QP
2	178.41	29.27	43.50	-14.23	40.71	-11.44	QP
3	411.21	25.27	46.00	-20.73	32.10	-6.83	QP
4	587.75	28.48	46.00	-17.52	31.38	-2.90	QP
5	839.95	30.90	46.00	-15.10	30.38	0.52	QP
6	992.24	31.77	54.00	-22.23	29.36	2.41	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5785MHz) (RU Config-Full)
 +LTE Band 48 Link+BLE
 Test Date : 2020/06/25

Horizontal

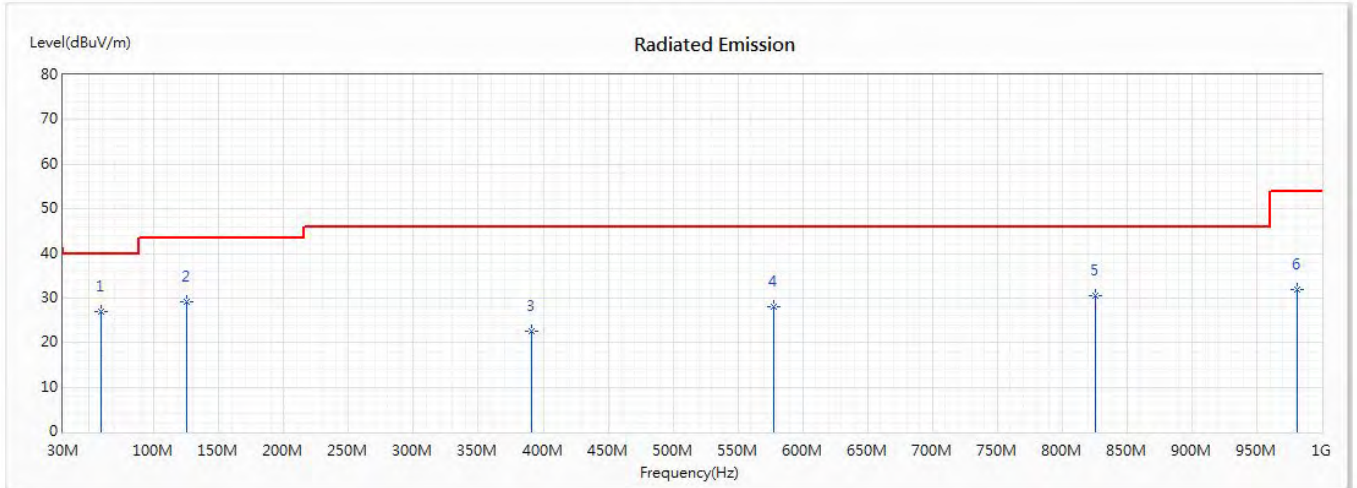


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	59.1	26.94	40.00	-13.06	37.99	-11.05	QP
2	125.06	29.07	43.50	-14.43	42.13	-13.06	QP
3	390.84	22.58	46.00	-23.42	29.71	-7.13	QP
4	578.05	28.04	46.00	-17.96	31.20	-3.16	QP
5	825.4	30.53	46.00	-15.47	30.25	0.28	QP
6	981.57	31.99	54.00	-22.01	29.83	2.16	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5785MHz) (RU Config-Full)
 +LTE Band 48 Link+BLE
 Test Date : 2020/06/25

Vertical

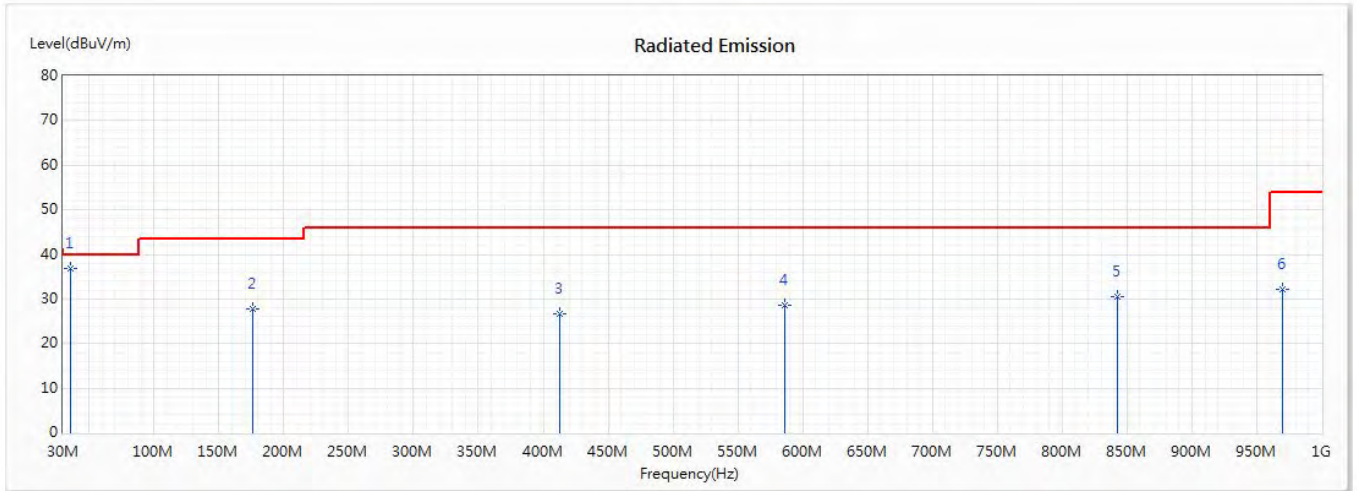


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	35.82	36.84	40.00	-3.16	48.37	-11.53	QP
2	176.47	27.65	43.50	-15.85	38.91	-11.26	QP
3	413.15	26.65	46.00	-19.35	33.39	-6.74	QP
4	585.81	28.49	46.00	-17.51	31.47	-2.98	QP
5	842.86	30.43	46.00	-15.57	29.84	0.59	QP
6	969.93	32.05	54.00	-21.95	29.87	2.18	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5230MHz) (RU Config-Full)
 +LTE Band 66 Link+BLE
 Test Date : 2020/06/25

Horizontal

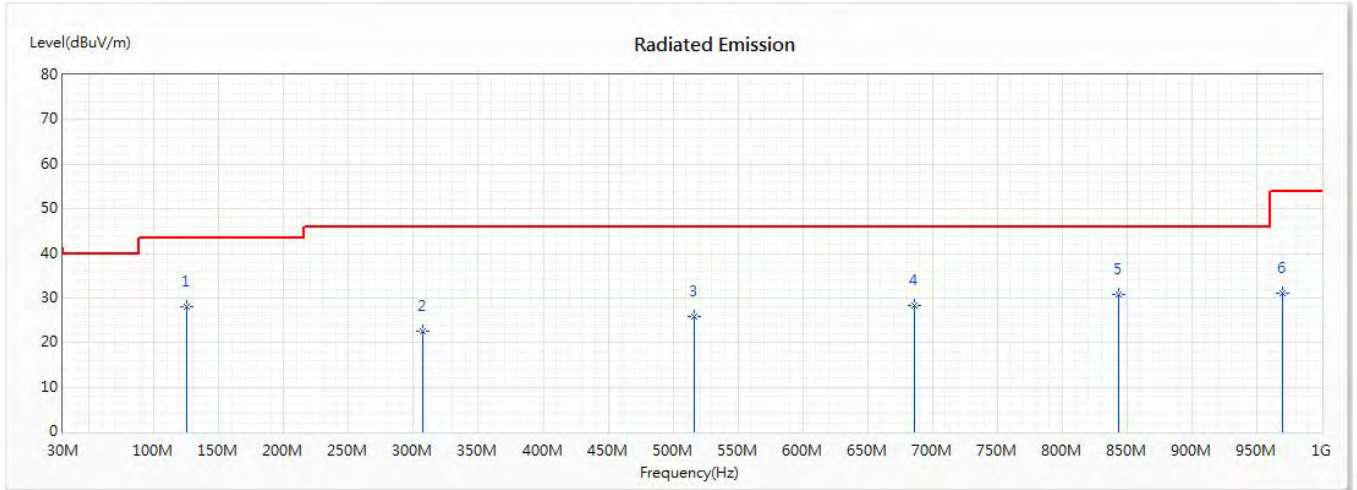


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	125.06	28.14	43.50	-15.36	41.20	-13.06	QP
2	307.42	22.56	46.00	-23.44	31.65	-9.09	QP
3	515.97	25.74	46.00	-20.26	29.78	-4.04	QP
4	685.72	28.38	46.00	-17.62	29.88	-1.50	QP
* 5	843.83	30.81	46.00	-15.19	30.20	0.61	QP
6	969.93	30.93	54.00	-23.07	28.75	2.18	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5230MHz) (RU Config-Full)
 +LTE Band 66 Link+BLE
 Test Date : 2020/06/25

Vertical

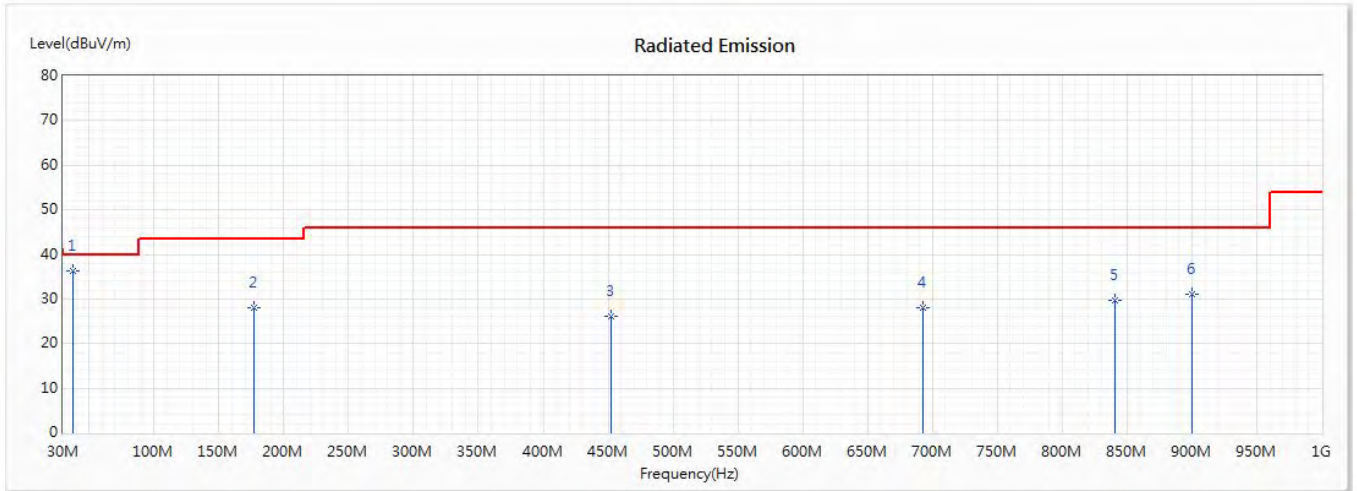


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	37.76	36.34	40.00	-3.66	47.67	-11.33	QP
2	177.44	28.07	43.50	-15.43	39.42	-11.35	QP
3	451.95	26.03	46.00	-19.97	31.49	-5.46	QP
4	692.51	28.01	46.00	-17.99	29.59	-1.58	QP
5	840.92	29.60	46.00	-16.40	29.05	0.55	QP
6	900.09	31.00	46.00	-15.00	29.64	1.36	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5755MHz) (RU Config-Full)
 +5GNR FR1 Band n2 Link +BLE
 Test Date : 2020/07/03

Horizontal

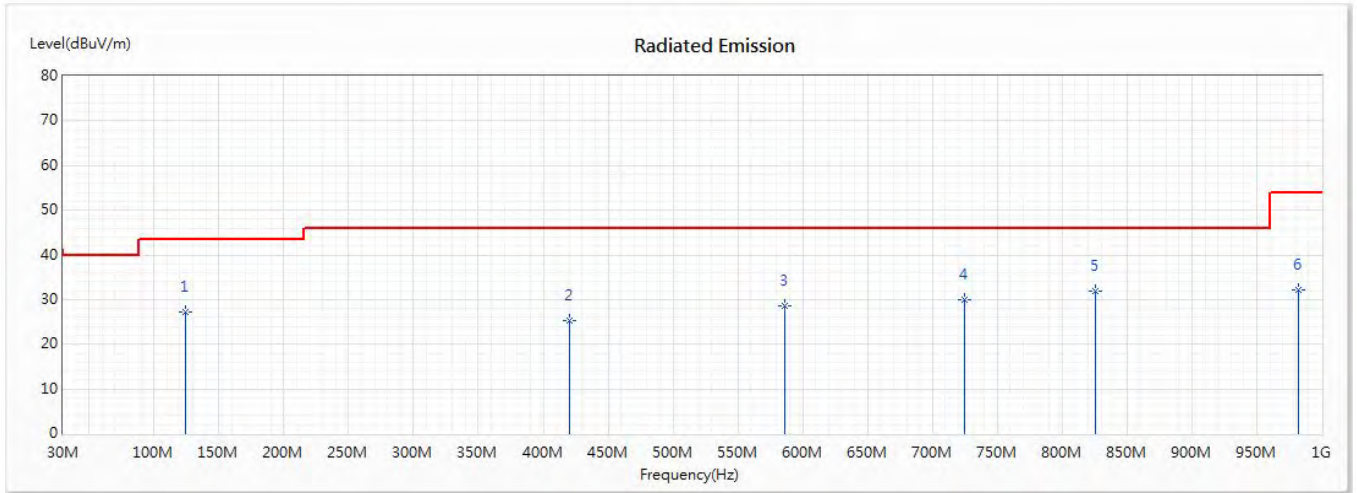


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	124.09	27.27	43.50	-16.23	40.44	-13.17	QP
2	419.94	25.23	46.00	-20.77	31.76	-6.53	QP
3	585.81	28.47	46.00	-17.53	31.45	-2.98	QP
4	724.52	29.94	46.00	-16.06	30.78	-0.84	QP
* 5	825.4	31.79	46.00	-14.21	31.51	0.28	QP
6	982.54	32.08	54.00	-21.92	29.88	2.20	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5755MHz) (RU Config-Full)
 +5GNR FR1 Band n2 Link +BLE
 Test Date : 2020/07/03

Vertical

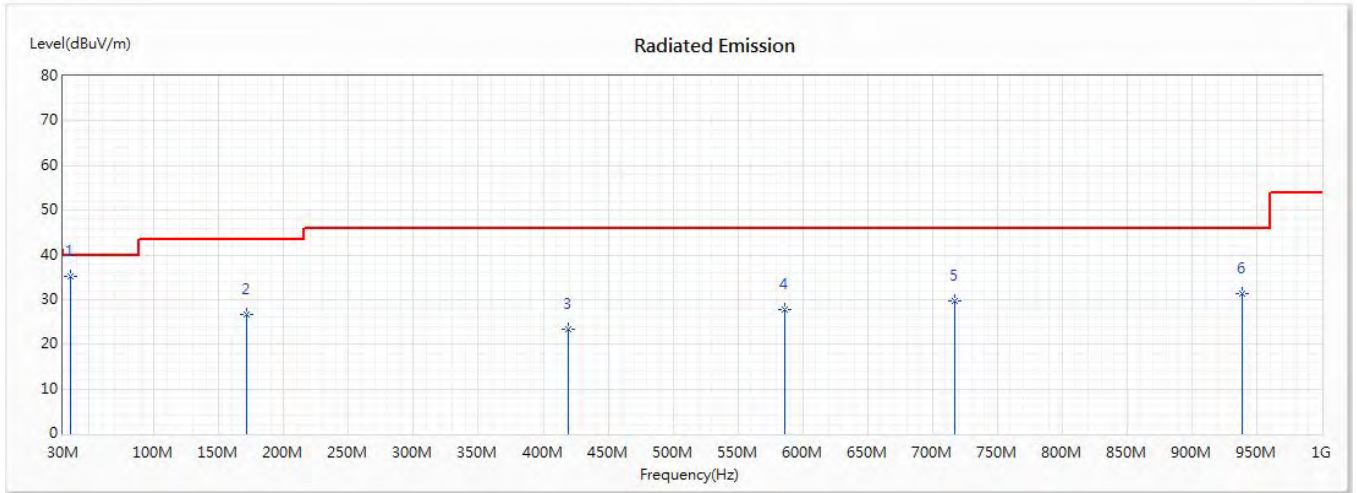


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	35.76	35.07	40.00	-4.93	46.60	-11.53	QP
2	171.62	26.56	43.50	-16.94	37.27	-10.71	QP
3	418.97	23.31	46.00	-22.69	29.88	-6.57	QP
4	585.81	27.90	46.00	-18.10	30.88	-2.98	QP
5	716.76	29.74	46.00	-16.26	30.77	-1.03	QP
6	938.89	31.36	46.00	-14.64	29.55	1.81	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz) (RU Config-Full)
 +5G NR FR1 Band n5 Link +BLE
 Test Date : 2020/06/25

Horizontal

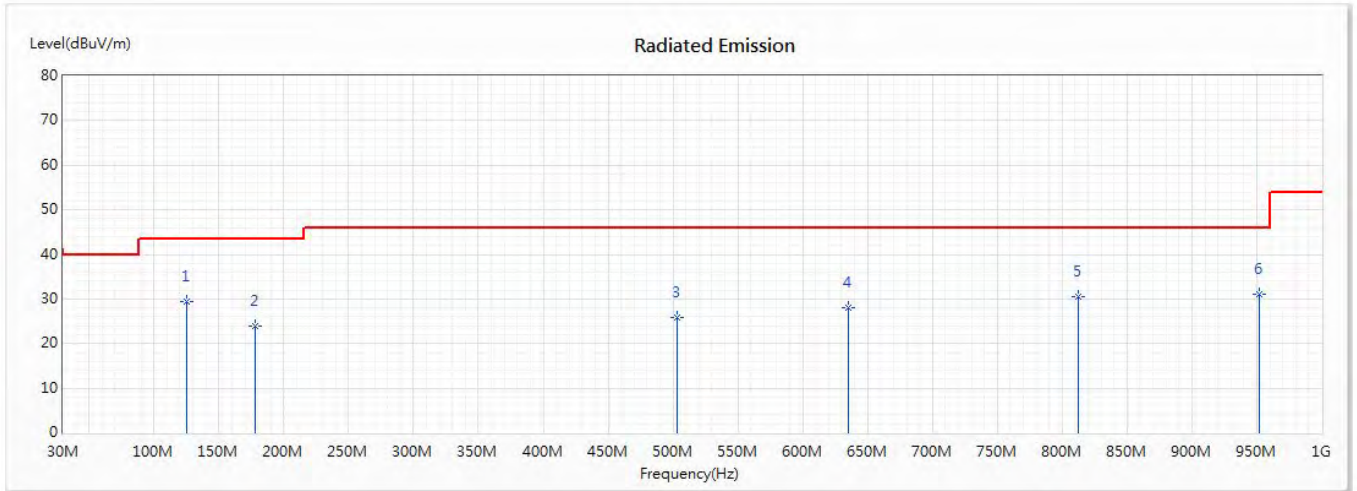


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	125.06	29.53	43.50	-13.97	42.59	-13.06	QP
2	178.41	23.89	43.50	-19.61	35.33	-11.44	QP
3	503.36	25.76	46.00	-20.24	30.15	-4.39	QP
4	635.28	27.97	46.00	-18.03	30.11	-2.14	QP
5	812.79	30.39	46.00	-15.61	30.27	0.12	QP
6	951.5	30.99	46.00	-15.01	28.91	2.08	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz) (RU Config-Full)
 +5G NR FR1 Band n5 Link +BLE
 Test Date : 2020/06/25

Vertical

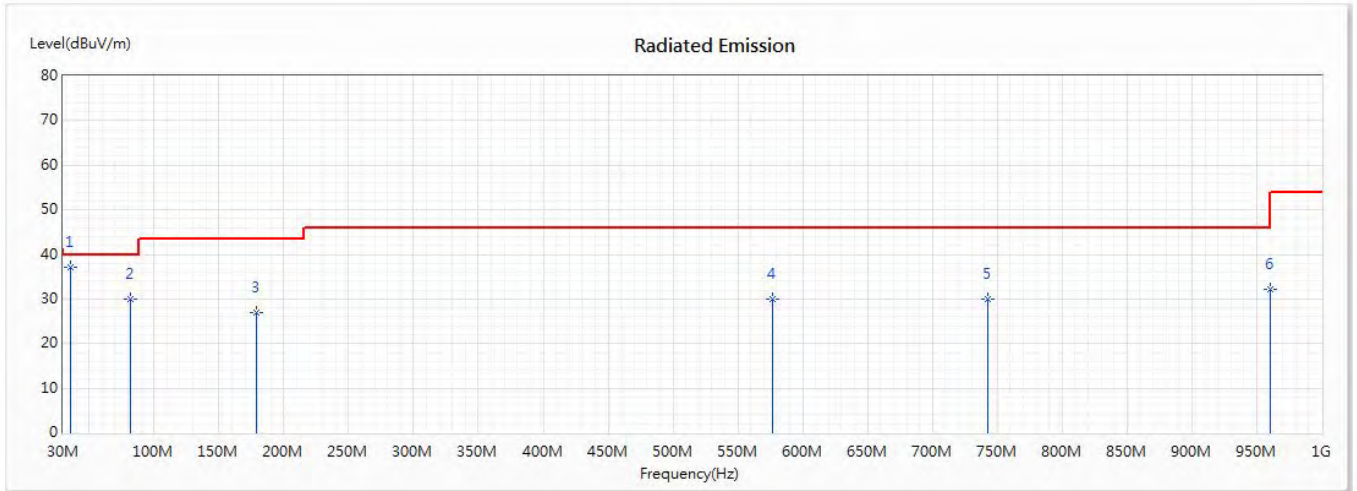


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	35.82	37.01	40.00	-2.99	48.54	-11.53	QP
2	81.41	30.06	40.00	-9.94	45.50	-15.44	QP
3	179.38	26.94	43.50	-16.56	38.48	-11.54	QP
4	577.08	30.02	46.00	-15.98	33.20	-3.18	QP
5	742.95	30.05	46.00	-15.95	30.58	-0.53	QP
6	960.23	32.25	54.00	-21.75	30.08	2.17	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5775MHz) (RU Config-Full)
 +5G NR FR1 Band n66 Link +BLE
 Test Date : 2020/06/25

Horizontal

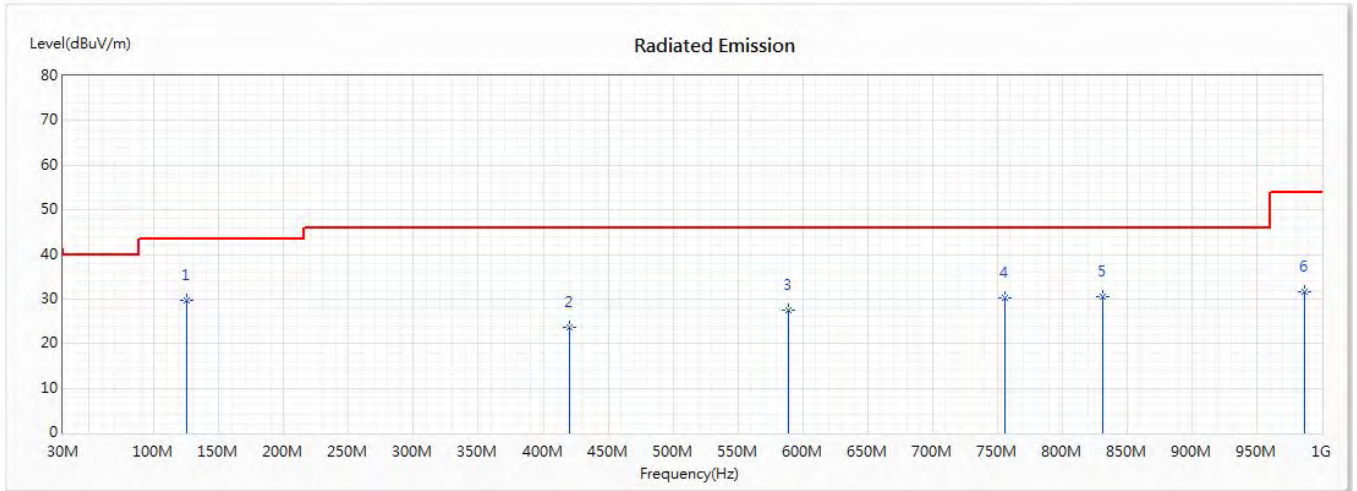


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	125.06	29.67	43.50	-13.83	42.73	-13.06	QP
2	419.94	23.57	46.00	-22.43	30.10	-6.53	QP
3	588.72	27.40	46.00	-18.60	30.26	-2.86	QP
4	755.56	30.19	46.00	-15.81	30.45	-0.26	QP
5	831.22	30.63	46.00	-15.37	30.31	0.32	QP
6	986.42	31.65	54.00	-22.35	29.31	2.34	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5775MHz) (RU Config-Full)
 +5GNR FR1 Band n66 Link +BLE
 Test Date : 2020/06/25

Vertical

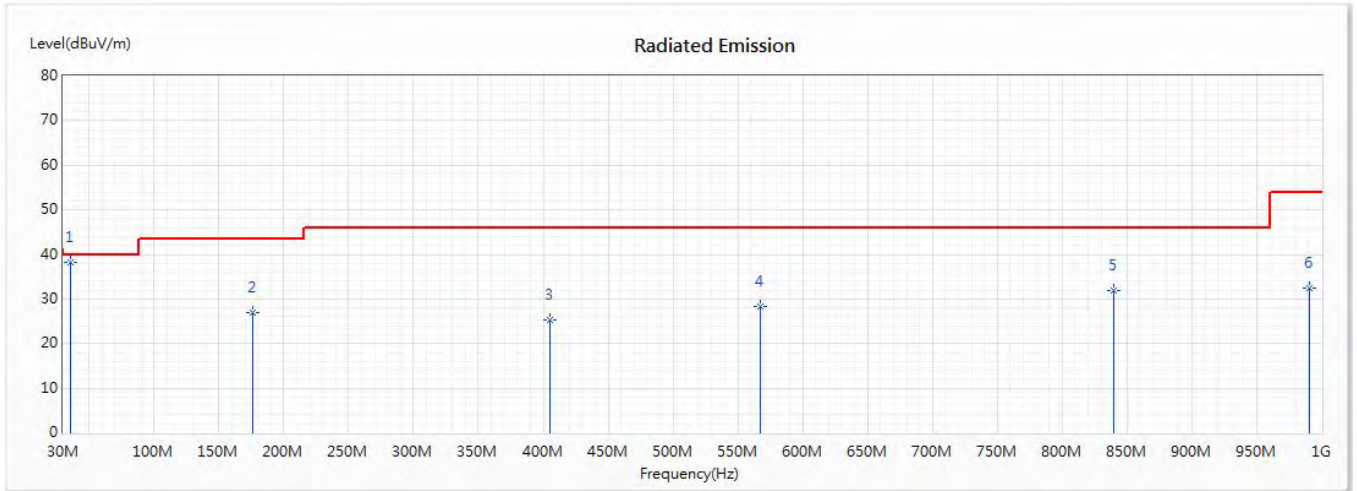


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	35.82	38.17	40.00	-1.83	49.70	-11.53	QP
2	176.47	26.90	43.50	-16.60	38.16	-11.26	QP
3	405.39	25.31	46.00	-20.69	32.21	-6.90	QP
4	567.38	28.26	46.00	-17.74	31.54	-3.28	QP
5	839.95	31.95	46.00	-14.05	31.43	0.52	QP
6	990.3	32.56	54.00	-21.44	30.14	2.42	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5220MHz)
 + LTE Band 2 Link +BLE
 Test Date : 2020/06/25

Horizontal

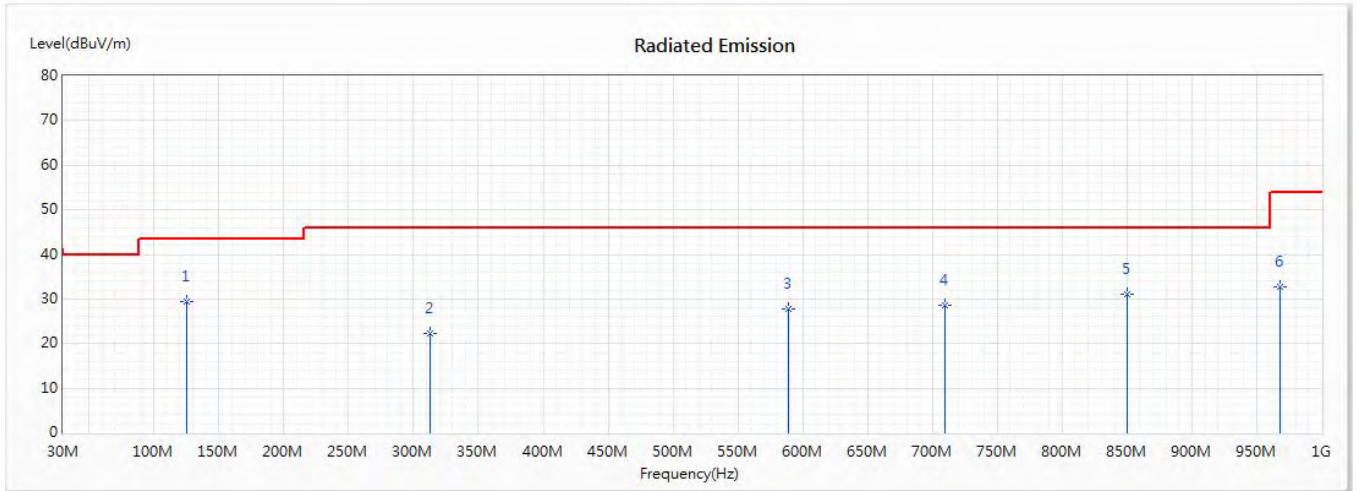


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	125.06	29.34	43.50	-14.16	42.40	-13.06	QP
2	313.24	22.33	46.00	-23.67	31.23	-8.90	QP
3	588.72	27.67	46.00	-18.33	30.53	-2.86	QP
4	709.97	28.66	46.00	-17.34	29.81	-1.15	QP
5	849.65	31.16	46.00	-14.84	30.33	0.83	QP
6	967.99	32.60	54.00	-21.40	30.34	2.26	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5220MHz)
 + LTE Band 2 Link +BLE
 Test Date : 2020/06/25

Vertical

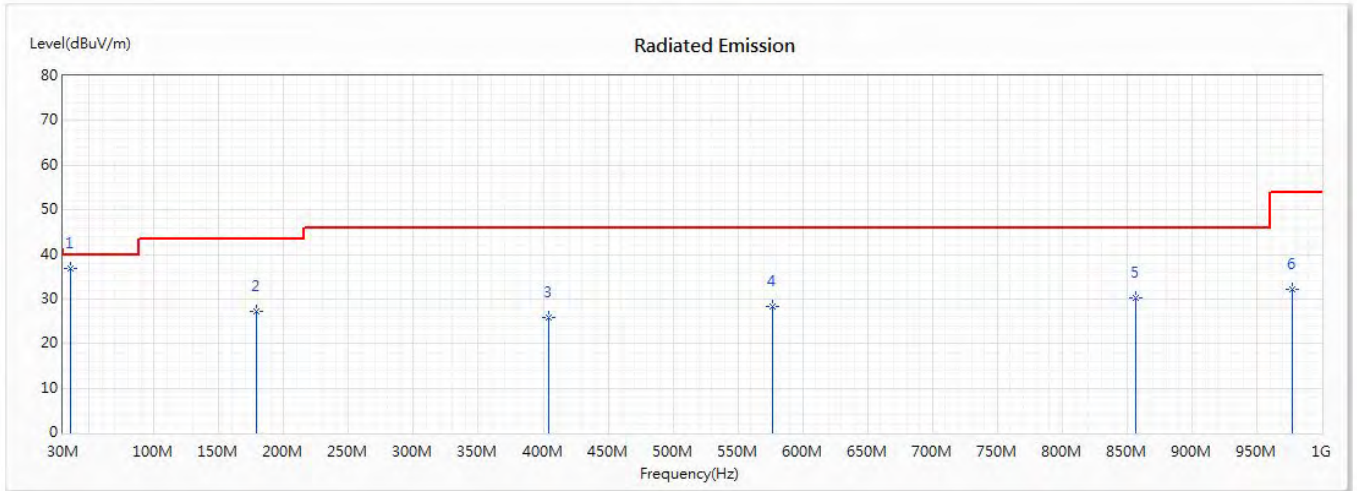


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	35.82	36.94	40.00	-3.06	48.47	-11.53	QP
2	179.38	27.17	43.50	-16.33	38.71	-11.54	QP
3	404.42	25.85	46.00	-20.15	32.76	-6.91	QP
4	577.08	28.19	46.00	-17.81	31.37	-3.18	QP
5	856.44	30.35	46.00	-15.65	29.52	0.83	QP
6	977.69	32.23	54.00	-21.77	30.08	2.15	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5785MHz)
 + LTE Band 5 Link +BLE
 Test Date : 2020/06/25

Horizontal

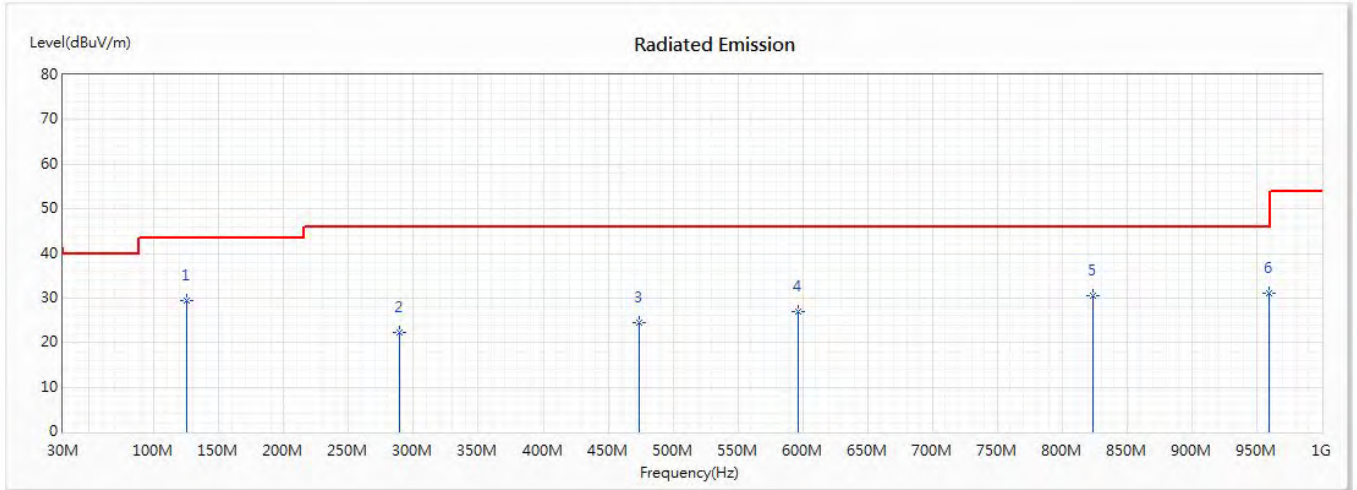


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	125.06	29.32	43.50	-14.18	42.38	-13.06	QP
2	288.99	22.14	46.00	-23.86	31.74	-9.60	QP
3	474.26	24.38	46.00	-21.62	29.19	-4.81	QP
4	596.48	27.05	46.00	-18.95	29.62	-2.57	QP
5	823.46	30.60	46.00	-15.40	30.32	0.28	QP
6	959.26	31.20	46.00	-14.80	29.04	2.16	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming)(5785MHz)
 + LTE Band 5 Link +BLE
 Test Date : 2020/06/25

Vertical

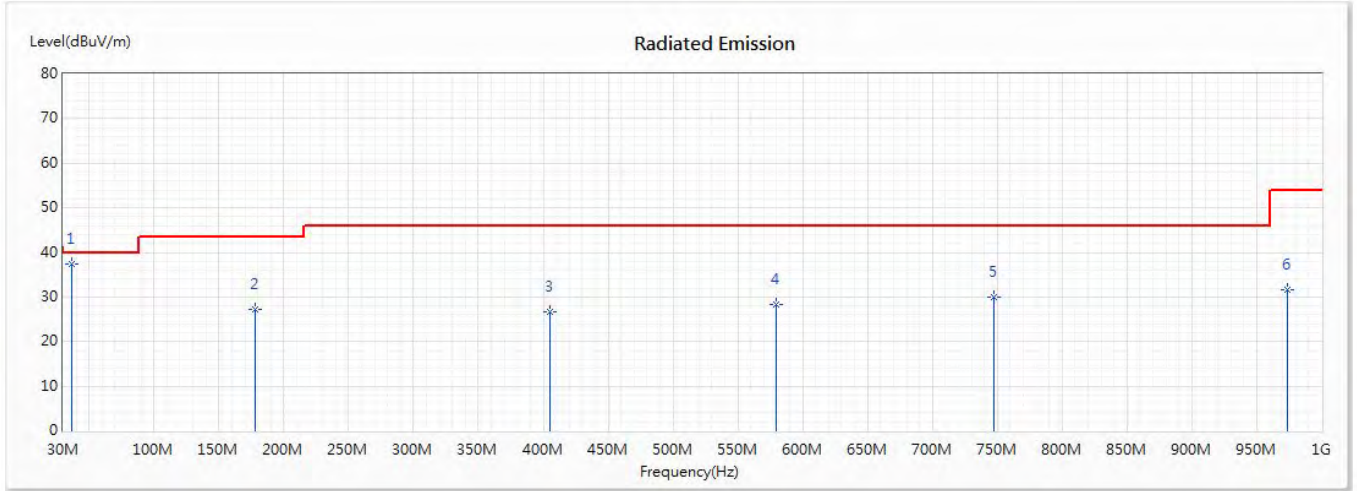


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	36.79	37.27	40.00	-2.73	48.71	-11.44	QP
2	178.41	27.28	43.50	-16.22	38.72	-11.44	QP
3	405.39	26.68	46.00	-19.32	33.58	-6.90	QP
4	579.99	28.44	46.00	-17.56	31.56	-3.12	QP
5	747.8	30.07	46.00	-15.93	30.55	-0.48	QP
6	973.81	31.50	54.00	-22.50	29.31	2.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5230MHz)
 + LTE Band 13 Link +BLE
 Test Date : 2020/06/25

Horizontal

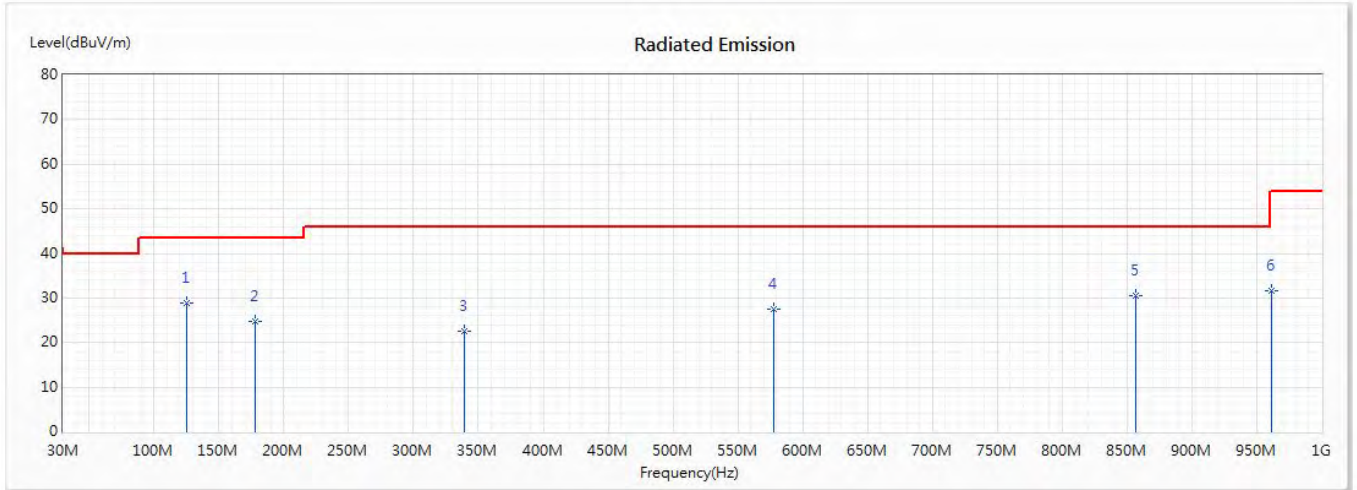


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	125.06	28.91	43.50	-14.59	41.97	-13.06	QP
2	178.41	24.68	43.50	-18.82	36.12	-11.44	QP
3	339.43	22.46	46.00	-23.54	30.73	-8.27	QP
4	578.05	27.57	46.00	-18.43	30.73	-3.16	QP
5	856.44	30.49	46.00	-15.51	29.66	0.83	QP
6	961.2	31.49	54.00	-22.51	29.27	2.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5230MHz)
 + LTE Band 13 Link +BLE
 Test Date : 2020/06/25

Vertical

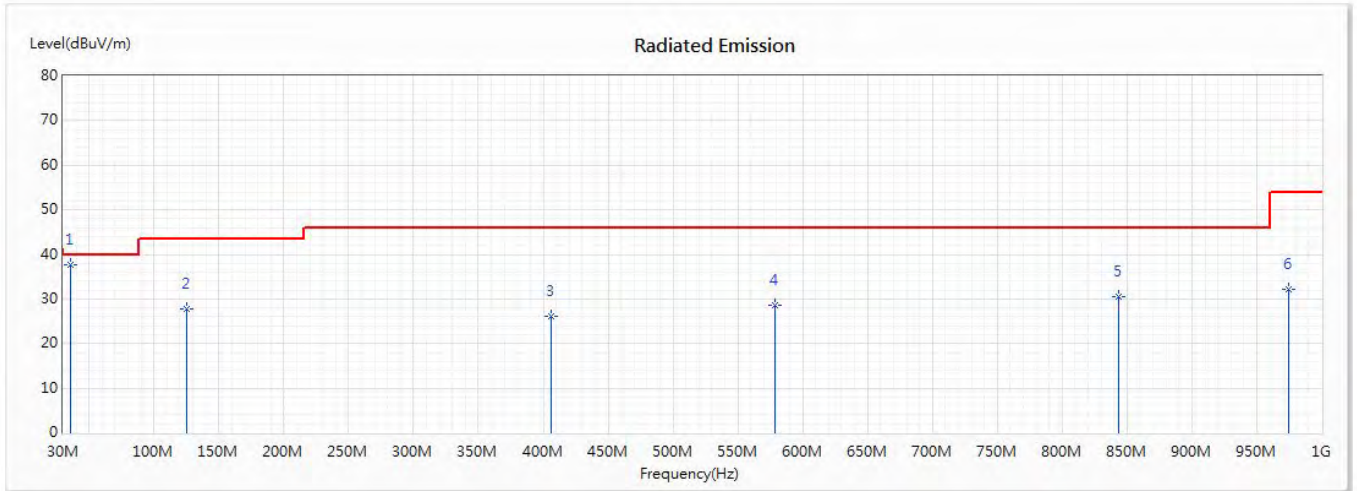


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	35.82	37.53	40.00	-2.47	49.06	-11.53	QP
2	125.06	27.88	43.50	-15.62	40.94	-13.06	QP
3	406.36	25.99	46.00	-20.01	32.88	-6.89	QP
4	579.02	28.55	46.00	-17.45	31.68	-3.13	QP
5	843.83	30.60	46.00	-15.40	29.99	0.61	QP
6	974.78	32.05	54.00	-21.95	29.86	2.19	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5755MHz)
 + LTE Band 48 Link +BLE
 Test Date : 2020/07/03

Horizontal

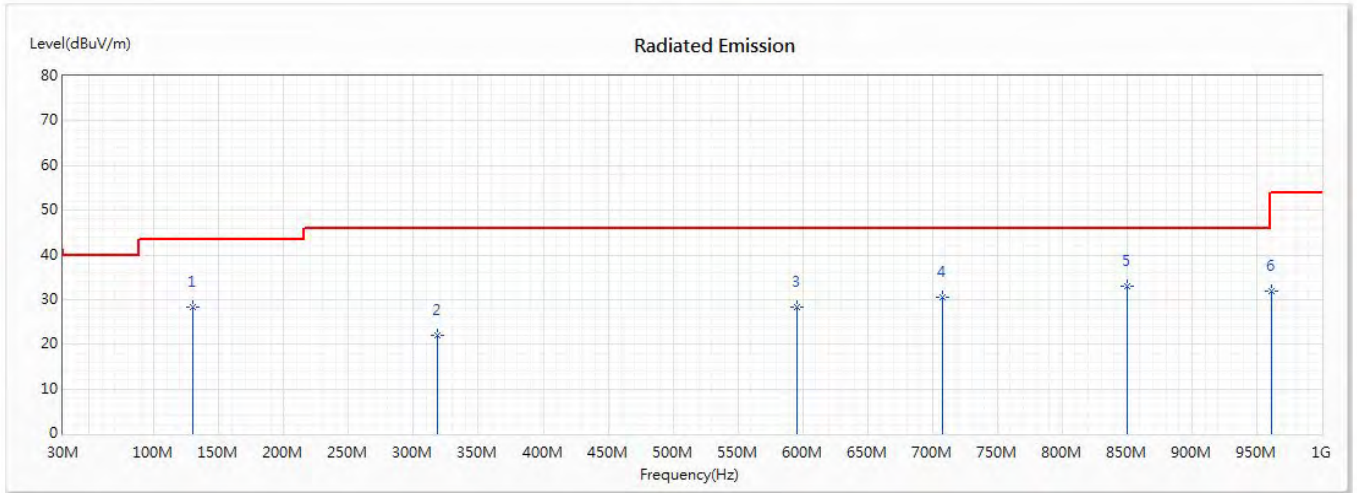


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	129.91	28.42	43.50	-15.08	40.76	-12.34	QP
2	318.09	22.13	46.00	-23.87	30.89	-8.76	QP
3	595.51	28.30	46.00	-17.70	30.89	-2.59	QP
4	708.03	30.42	46.00	-15.58	31.66	-1.24	QP
* 5	849.65	32.86	46.00	-13.14	32.03	0.83	QP
6	961.2	32.02	54.00	-21.98	29.80	2.22	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5755MHz)
 + LTE Band 48 Link +BLE
 Test Date : 2020/07/03

Vertical

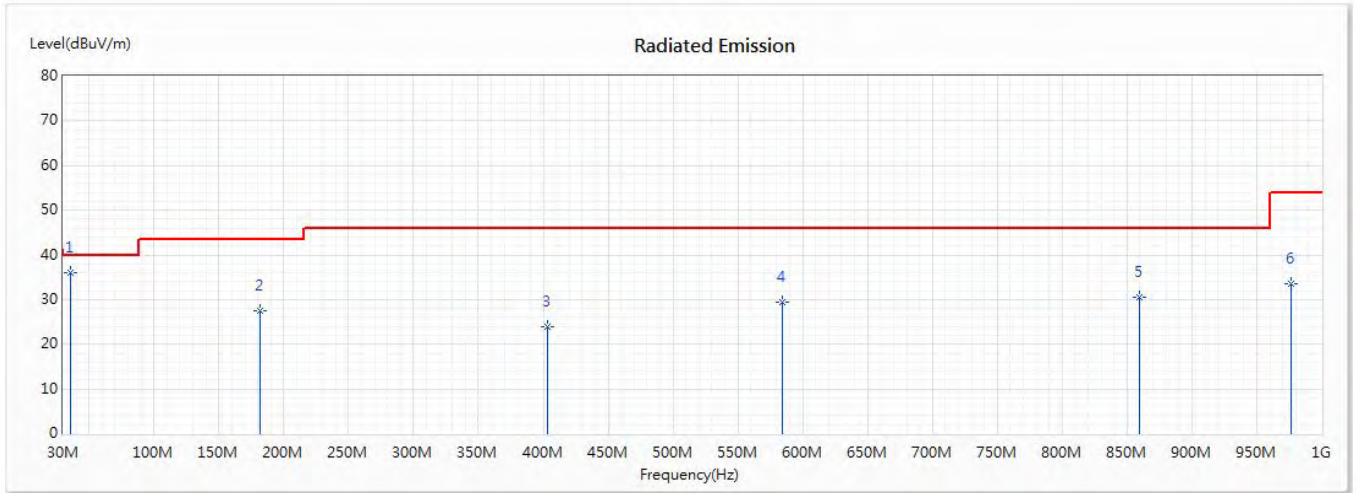


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	35.82	36.15	40.00	-3.85	47.68	-11.53	QP
2	181.32	27.56	43.50	-15.94	39.27	-11.71	QP
3	403.45	24.01	46.00	-21.99	30.95	-6.94	QP
4	583.87	29.30	46.00	-16.70	32.33	-3.03	QP
5	859.35	30.54	46.00	-15.46	29.76	0.78	QP
6	976.72	33.59	54.00	-20.41	31.43	2.16	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming)(5210MHz)
 + LTE Band 66 Link +BLE
 Test Date : 2020/06/25

Horizontal

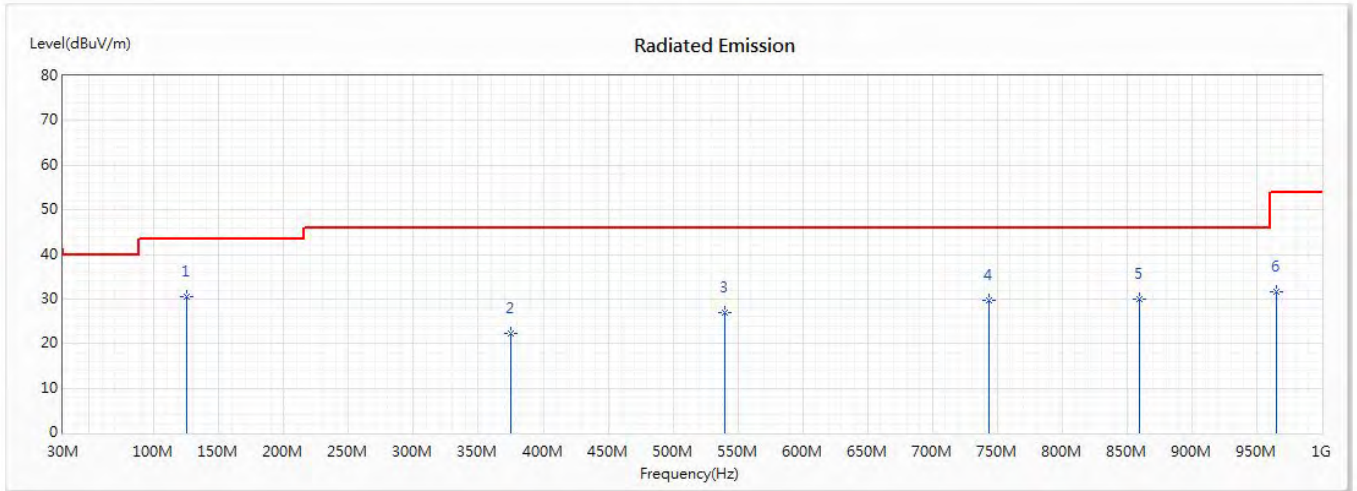


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	125.06	30.63	43.50	-12.87	43.69	-13.06	QP
2	375.32	22.24	46.00	-23.76	29.61	-7.37	QP
3	540.22	26.82	46.00	-19.18	30.57	-3.75	QP
4	743.92	29.71	46.00	-16.29	30.22	-0.51	QP
5	859.35	30.08	46.00	-15.92	29.30	0.78	QP
6	965.08	31.57	54.00	-22.43	29.20	2.37	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming)(5210MHz)
 + LTE Band 66 Link +BLE
 Test Date : 2020/06/25

Vertical

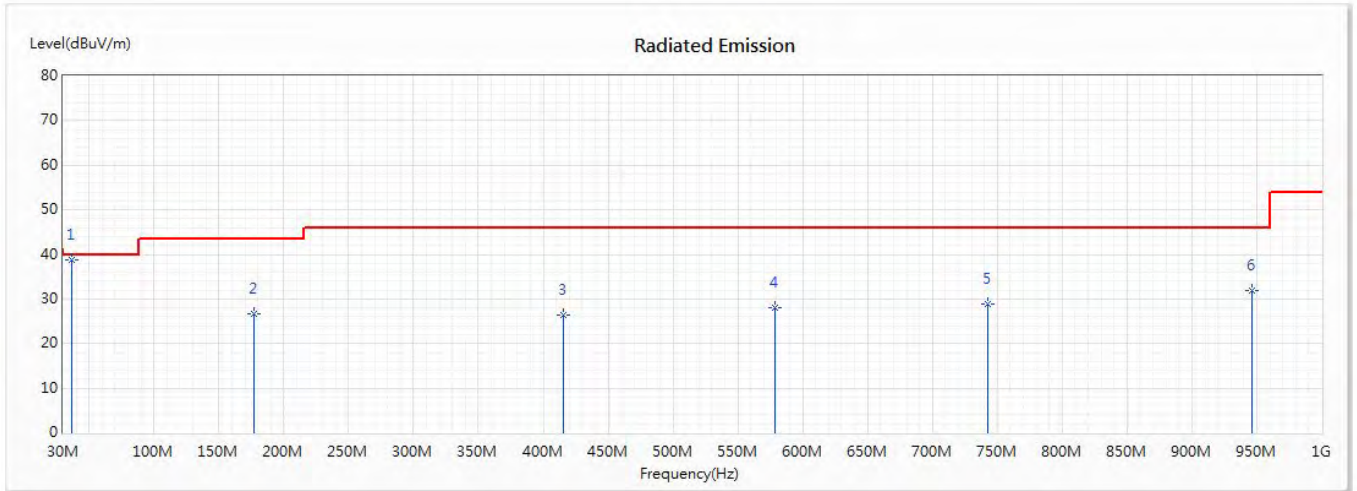


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	36.79	38.75	40.00	-1.25	50.19	-11.44	QP
2	177.44	26.68	43.50	-16.82	38.03	-11.35	QP
3	415.09	26.30	46.00	-19.70	32.96	-6.66	QP
4	579.02	28.06	46.00	-17.94	31.19	-3.13	QP
5	742.95	28.81	46.00	-17.19	29.34	-0.53	QP
6	946.65	31.85	46.00	-14.15	29.81	2.04	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming) (5775MHz)
 +5G NR FR1 Band n2 Link +BLE
 Test Date : 2020/06/25

Horizontal

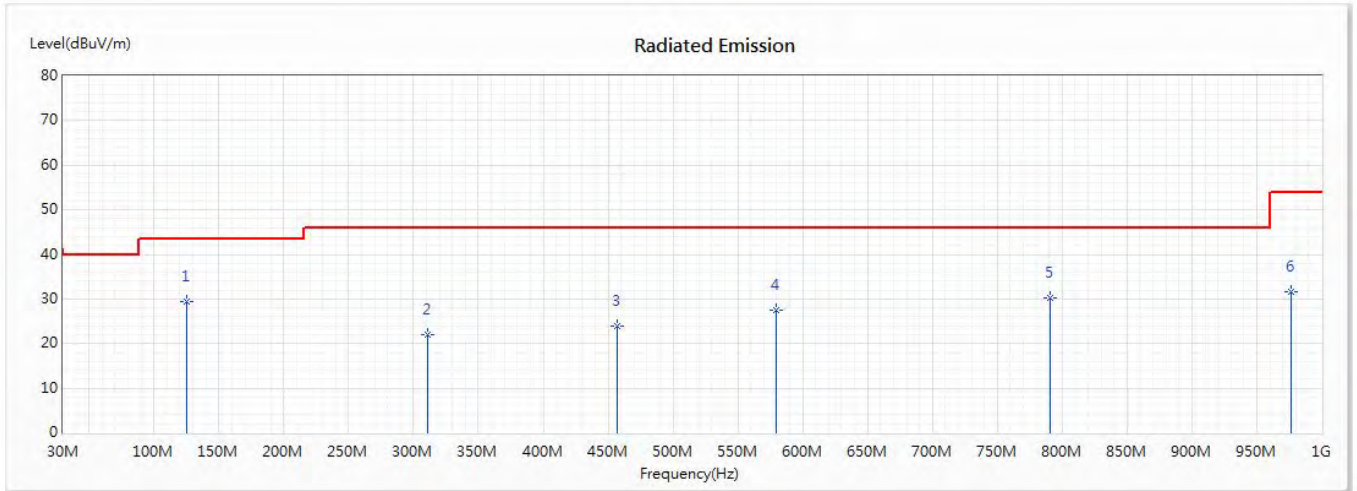


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	125.06	29.43	43.50	-14.07	42.49	-13.06	QP
2	311.3	22.10	46.00	-23.90	31.09	-8.99	QP
3	456.8	23.98	46.00	-22.02	29.32	-5.34	QP
4	579.99	27.42	46.00	-18.58	30.54	-3.12	QP
5	790.48	30.30	46.00	-15.70	30.30	0.00	QP
6	976.72	31.72	54.00	-22.28	29.56	2.16	QP

Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

Product : LV55
 Test Item : General Radiated Emission
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming) (5775MHz)
 +5G NR FR1 Band n2 Link +BLE
 Test Date : 2020/06/25

Vertical

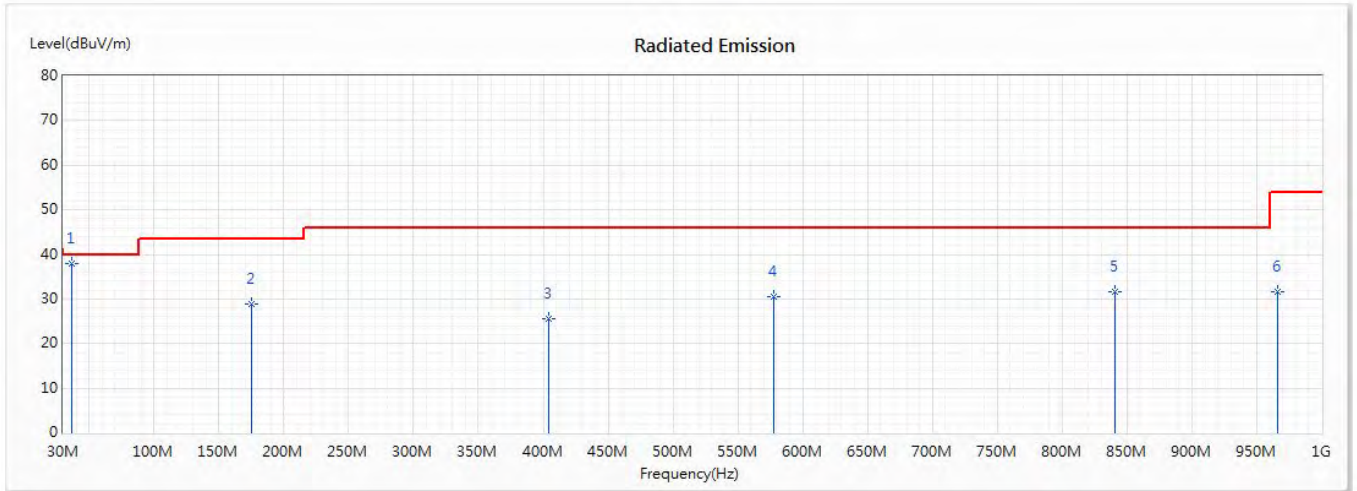

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	36.79	37.83	40.00	-2.17	49.27	-11.44	QP
2	175.5	28.82	43.50	-14.68	39.99	-11.17	QP
3	404.42	25.63	46.00	-20.37	32.54	-6.91	QP
4	578.05	30.46	46.00	-15.54	33.62	-3.16	QP
5	840.92	31.74	46.00	-14.26	31.19	0.55	QP
6	966.05	31.69	54.00	-22.31	29.36	2.33	QP


Note:

1. All Readings below 1GHz are Quasi-Peak, above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. Correct Factor = Antenna factor + Cable loss – Amplifier gain.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. No emission found between lowest internal used/generated frequency to 30MHz.

6. Band Edge

6.1. Test Setup

RF Radiated Measurement:

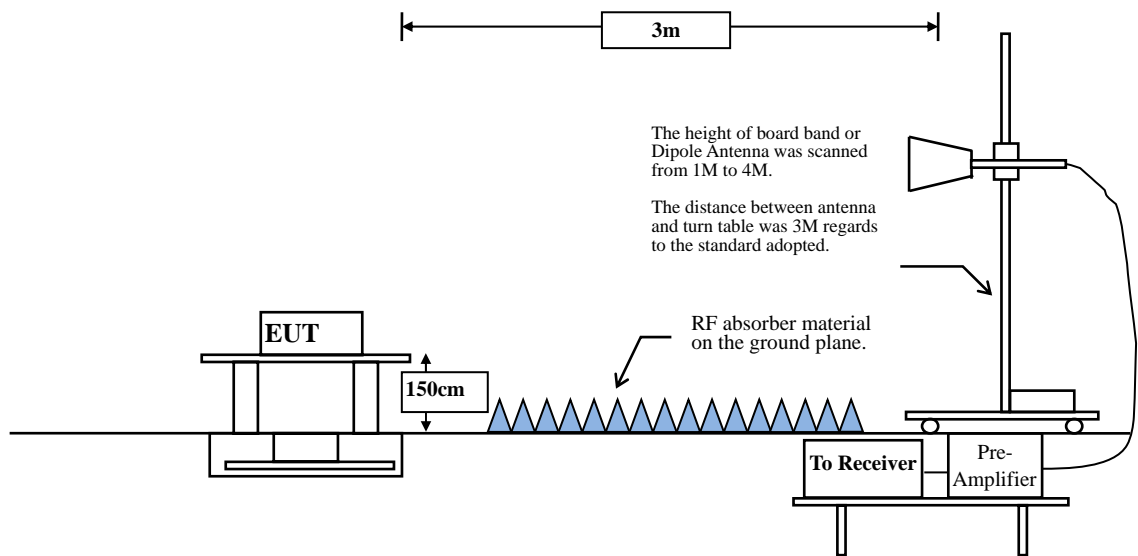

6.2. Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	uV/m @3m	dBµV/m@3m
30-88	100	40
88-216	150	43.5
216-960	200	46
Above 960	500	54

- Remarks :
1. RF Voltage (dBµV) = 20 log RF Voltage (uV)
 2. In the Above Table, the tighter limit applies at the band edges.
 3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

6.3. Test Procedure

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10:2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 kHz, above 1GHz are 1 MHz. The EUT was setup to ANSI C63.10, 2013; tested to UNII test procedure of FCC KDB-789033 for compliance to FCC 47CFR Subpart E requirements.

RBW and VBW Parameter setting:

According to KDB 789033 section II.G.5 Procedure for Unwanted Maximum Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW \geq 3MHz.

According to KDB 789033 section II.G.6 Procedures for Average Unwanted Emissions Measurements above 1000 MHz.

RBW = 1MHz.

VBW = 10Hz, when duty cycle \geq 98 %

VBW \geq 1/T, when duty cycle < 98 %

(T refers to the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.)

CDD Mode:

5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11a	94.79	1.4492	690	1k
802.11ax20 (RU Config-Full)	96.47	5.5507	180	200
802.11ax40 (RU Config-Full)	95.49	5.5217	181	200
802.11ax80 (RU Config-Full)	96.95	5.5217	181	200
802.11ax20 (RU Config-edges mode)	90.35	3.3913	295	300
802.11ax40 (RU Config-edges mode)	86.57	3.3623	297	300
802.11ax80 (RU Config-edges mode)	52.31	0.4260	2347	3000

Beamforming Mode:


5GHz band	Duty Cycle (%)	T (ms)	1/T (Hz)	VBW (Hz)
802.11ax20	67.81	2.0145	496	500
802.11ax40	67.15	1.3333	750	1000
802.11ax80	59.52	1.8116	552	1000

Note: Duty Cycle Refer to Section 8

6.4. Test Result of Band Edge

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5180MHz)
 Test Date : 2020/06/30

Horizontal

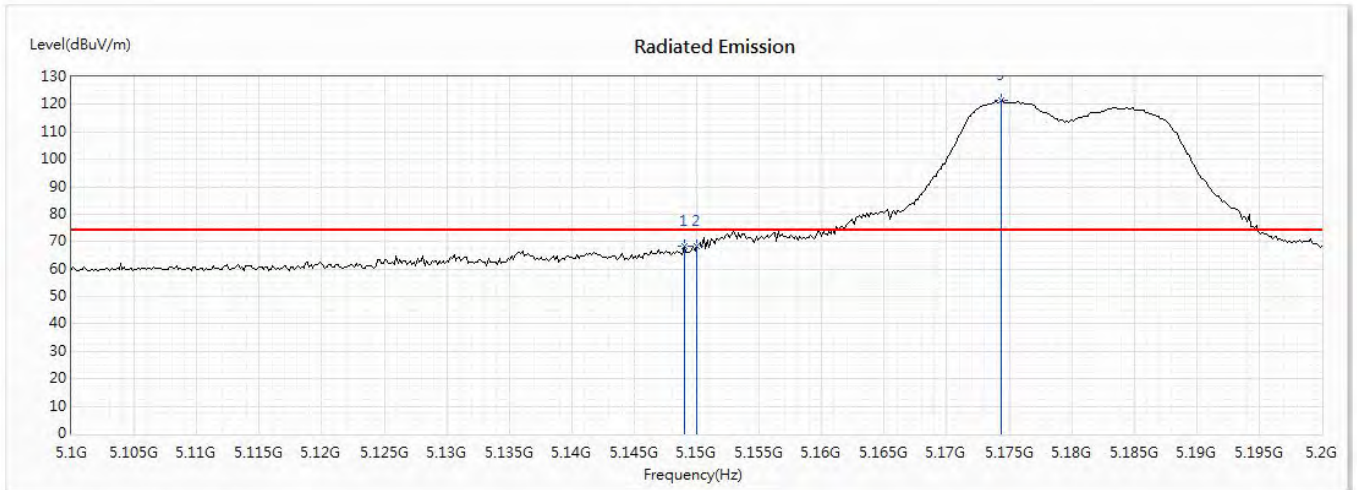


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5148.986	68.42	74.00	-5.58	50.69	17.73	PK
2	5150	68.24	74.00	-5.76	50.51	17.73	PK
3	5174.348	121.71	--	--	103.95	17.76	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5180MHz)
 Test Date : 2020/06/30

Horizontal

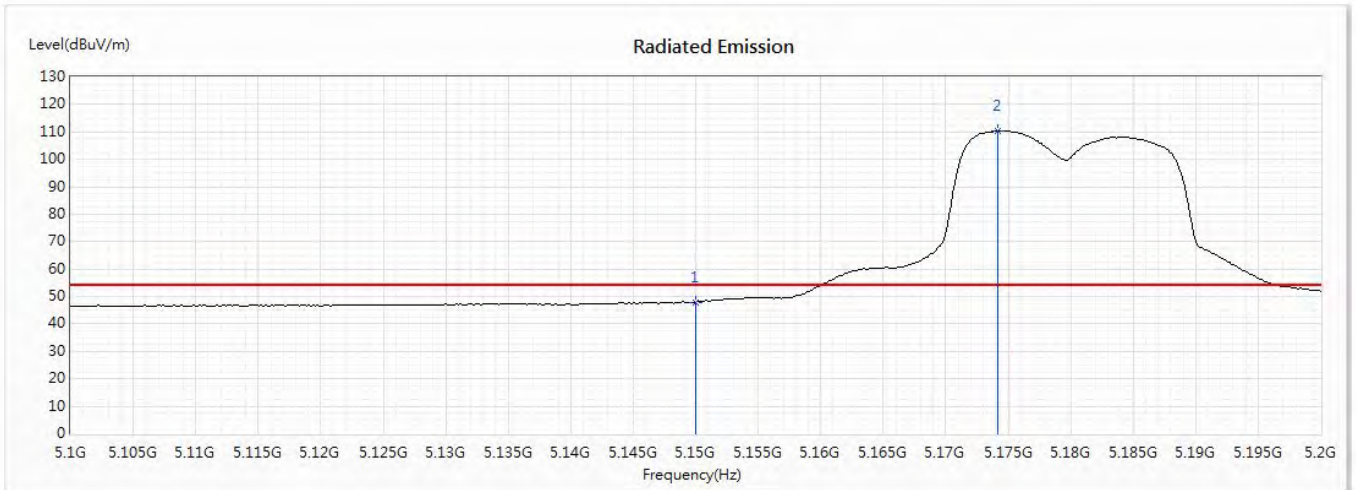


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	47.98	54.00	-6.02	30.25	17.73	AV
2	5174.203	110.46	--	--	92.70	17.76	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5180MHz)
 Test Date : 2020/06/30

Vertical

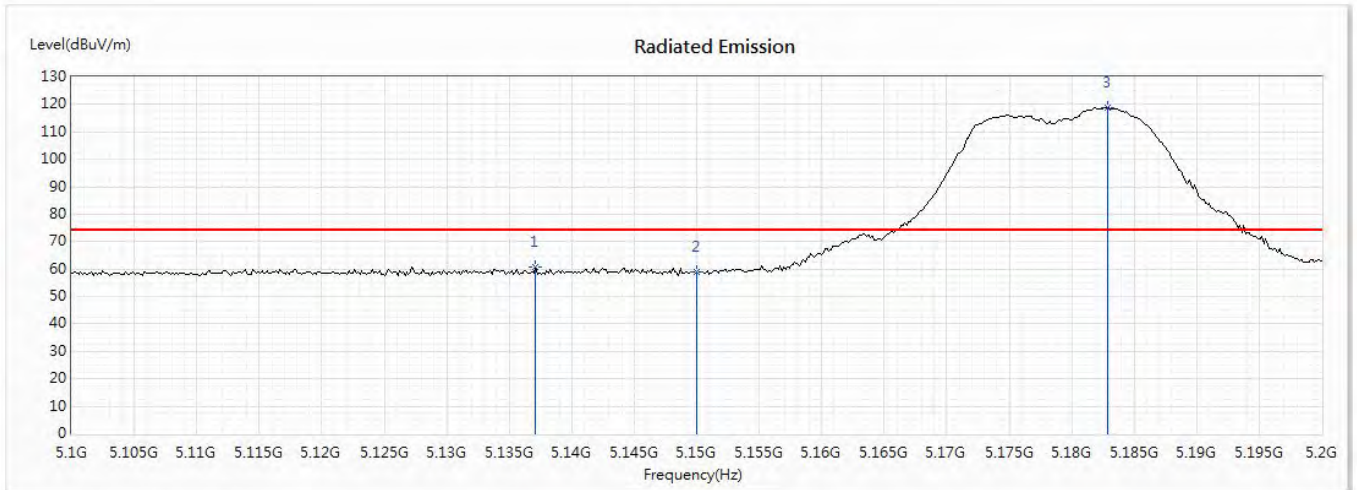


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5137.101	60.71	74.00	-13.29	43.00	17.71	PK
2	5150	58.90	74.00	-15.10	41.17	17.73	PK
3	5182.899	118.84	--	--	101.06	17.78	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5180MHz)
 Test Date : 2020/06/30

Vertical

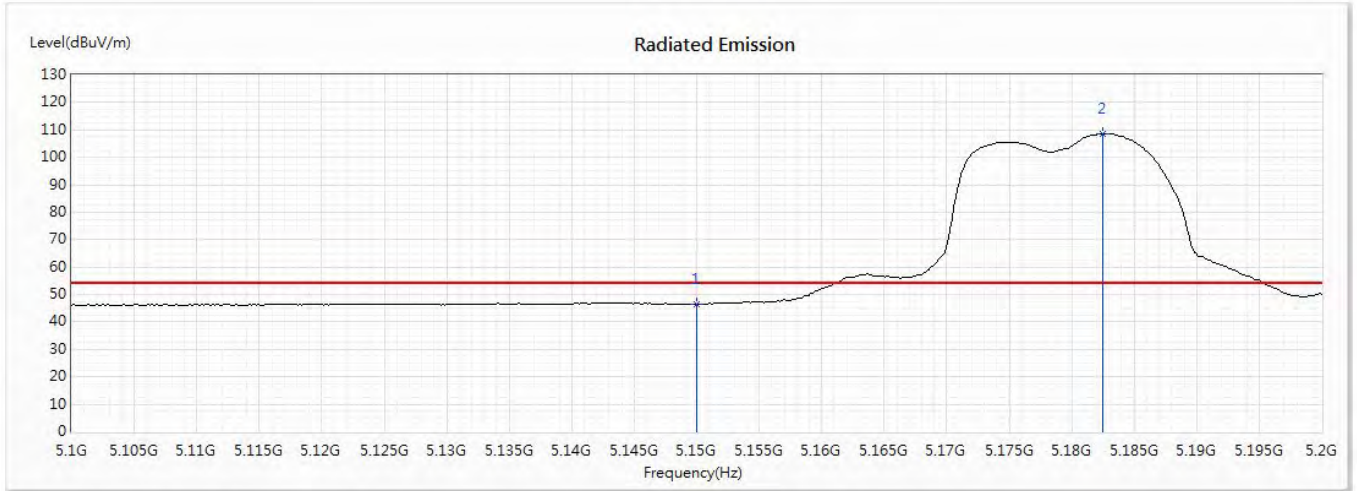


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	46.48	54.00	-7.52	28.75	17.73	AV
2	5182.464	108.67	--	--	90.89	17.78	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5745MHz)
 Test Date : 2020/06/26


Horizontal

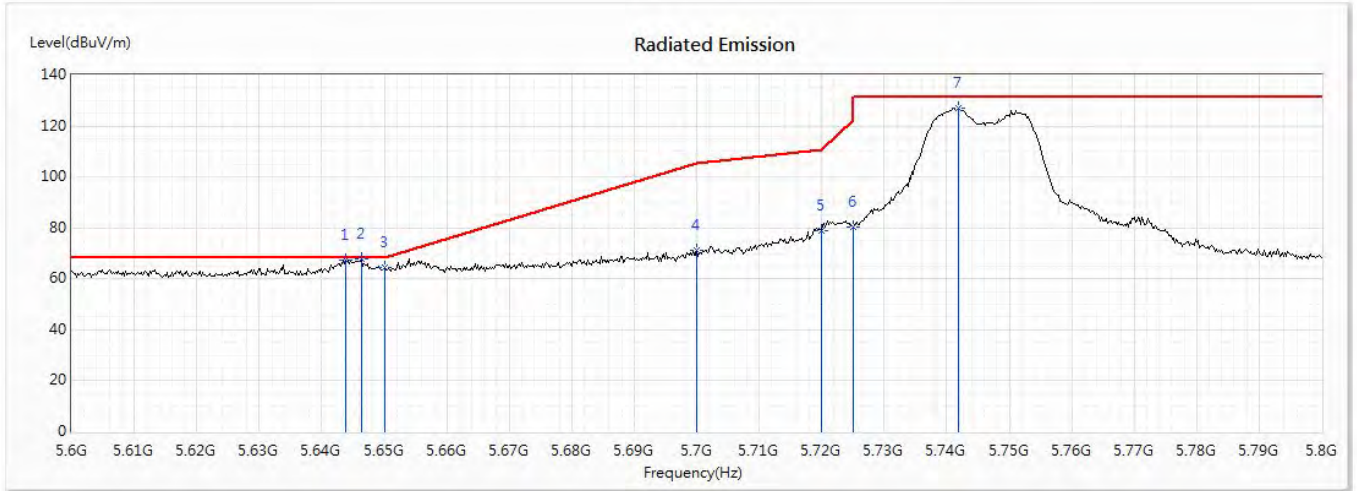

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5643.8	67.49	68.22	-0.73	48.85	18.64	PK
* 2	5646.4	67.76	68.22	-0.46	49.12	18.64	PK
3	5650	64.44	68.22	-3.78	45.79	18.65	PK
4	5700	71.02	105.20	-34.18	52.21	18.81	PK
5	5720	79.11	110.80	-31.69	60.21	18.90	PK
6	5725	80.46	122.20	-41.74	61.53	18.93	PK
7	5741.8	126.97	--	--	107.95	19.02	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5745MHz)
 Test Date : 2020/06/26


Vertical

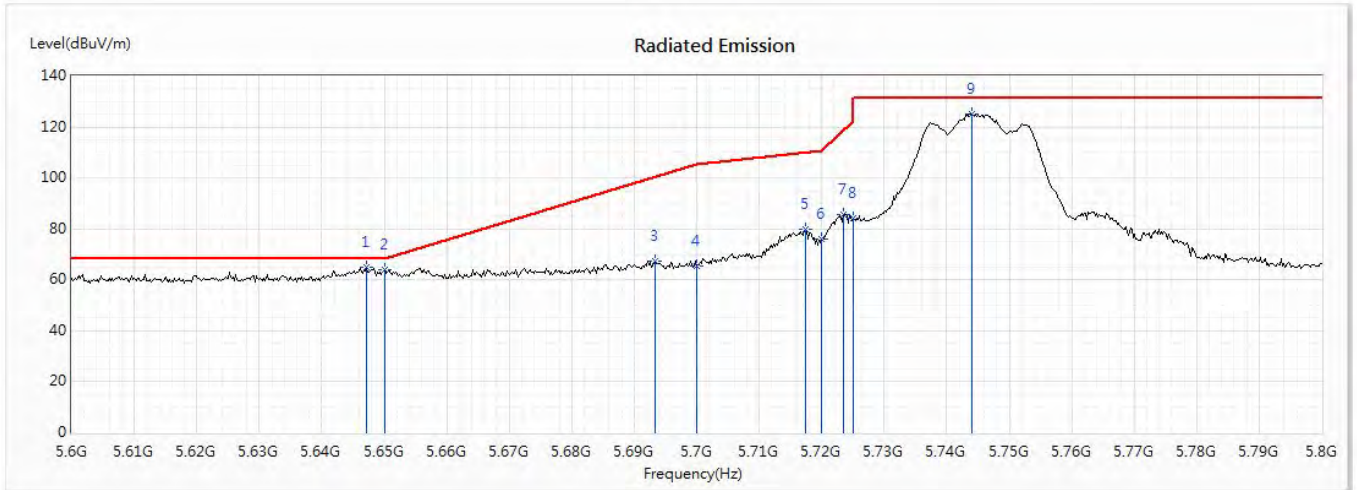

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5647.2	64.93	68.22	-3.29	46.29	18.64	PK
2	5650	63.75	68.22	-4.47	45.10	18.65	PK
3	5693.4	67.35	100.34	-32.99	48.56	18.79	PK
4	5700	65.21	105.20	-39.99	46.40	18.81	PK
5	5717.4	79.68	110.07	-30.39	60.79	18.89	PK
6	5720	76.23	110.80	-34.57	57.33	18.90	PK
7	5723.4	85.82	118.55	-32.73	66.90	18.92	PK
8	5725	84.29	122.20	-37.91	65.36	18.93	PK
9	5744	125.26	--	--	106.23	19.03	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5825MHz)
 Test Date : 2020/06/26


Horizontal

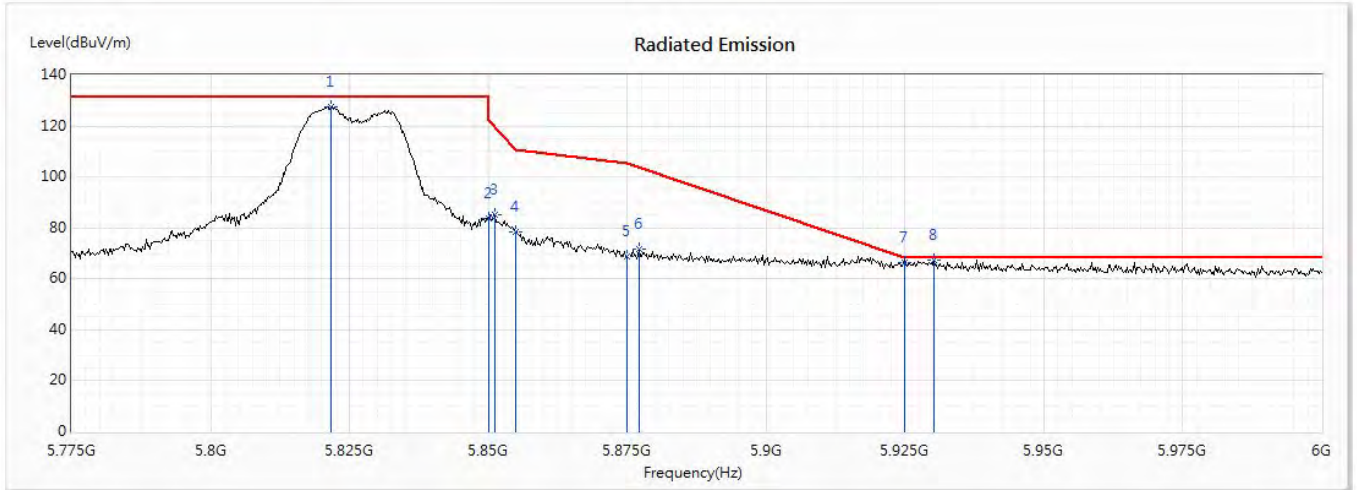

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5821.575	127.70	--	--	108.51	19.19	PK
2	5850	83.84	122.20	-38.36	64.51	19.33	PK
3	5851.275	85.17	119.29	-34.12	65.84	19.33	PK
4	5855	78.65	110.80	-32.15	59.31	19.34	PK
5	5875	68.75	105.20	-36.45	49.40	19.35	PK
6	5877.15	71.58	103.60	-32.03	52.22	19.36	PK
7	5925	66.32	68.22	-1.90	46.90	19.42	PK
* 8	5930.25	67.46	68.22	-0.76	48.03	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 1: Transmit (802.11a-CDD) (5825MHz)
 Test Date : 2020/06/26


Vertical

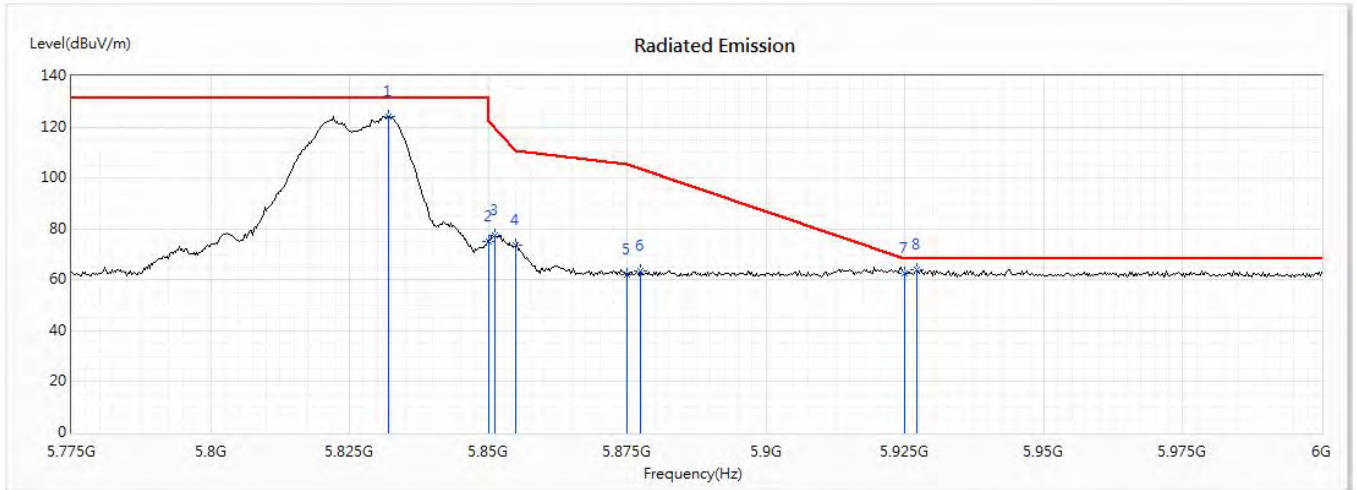

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5831.925	124.06	--	--	104.82	19.24	PK
2	5850	75.16	122.20	-47.04	55.83	19.33	PK
3	5851.275	77.60	119.29	-41.69	58.27	19.33	PK
4	5855	73.64	110.80	-37.16	54.30	19.34	PK
5	5875	62.14	105.20	-43.06	42.79	19.35	PK
6	5877.375	63.46	103.44	-39.98	44.10	19.36	PK
7	5925	62.38	68.22	-5.84	42.96	19.42	PK
* 8	5927.1	63.90	68.22	-4.32	44.47	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz) (RU Config-Full)
 Test Date : 2020/06/30

Horizontal

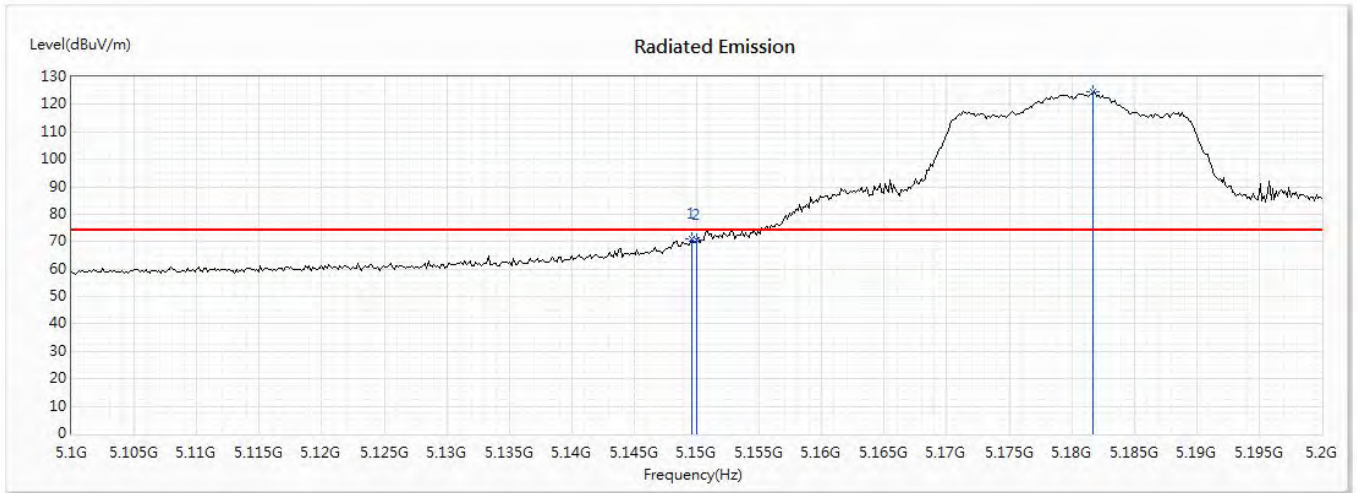


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5149.565	70.89	74.00	-3.11	53.16	17.73	PK
2	5150	70.50	74.00	-3.50	52.77	17.73	PK
3	5181.739	124.46	--	--	106.69	17.77	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz) (RU Config-Full)
 Test Date : 2020/06/30

Horizontal

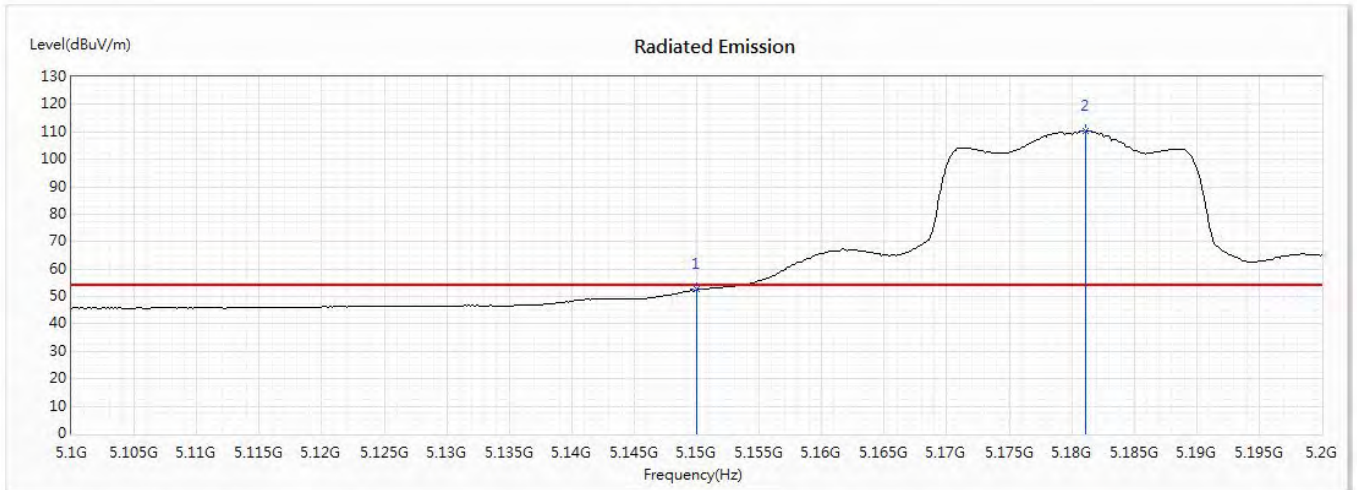


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	52.54	54.00	-1.46	34.81	17.73	AV
2	5181.159	110.24	--	--	92.47	17.77	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz) (RU Config-Full)
 Test Date : 2020/06/30

Vertical

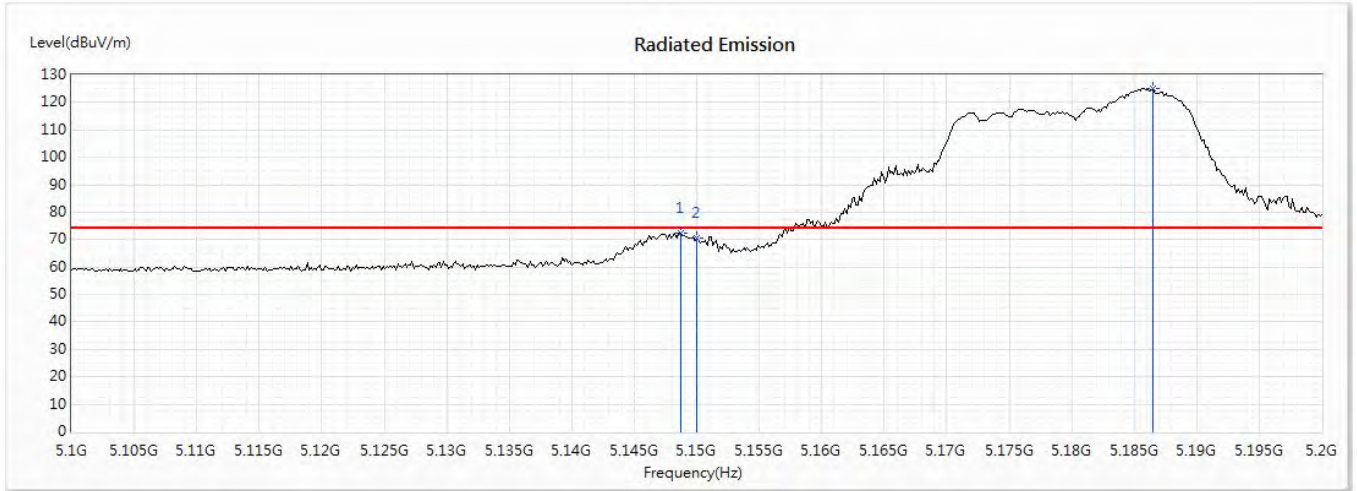


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5148.696	72.30	74.00	-1.70	54.57	17.73	PK
2	5150	70.60	74.00	-3.40	52.87	17.73	PK
3	5186.522	125.11	--	--	107.32	17.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz) (RU Config-Full)
 Test Date : 2020/06/30

Vertical

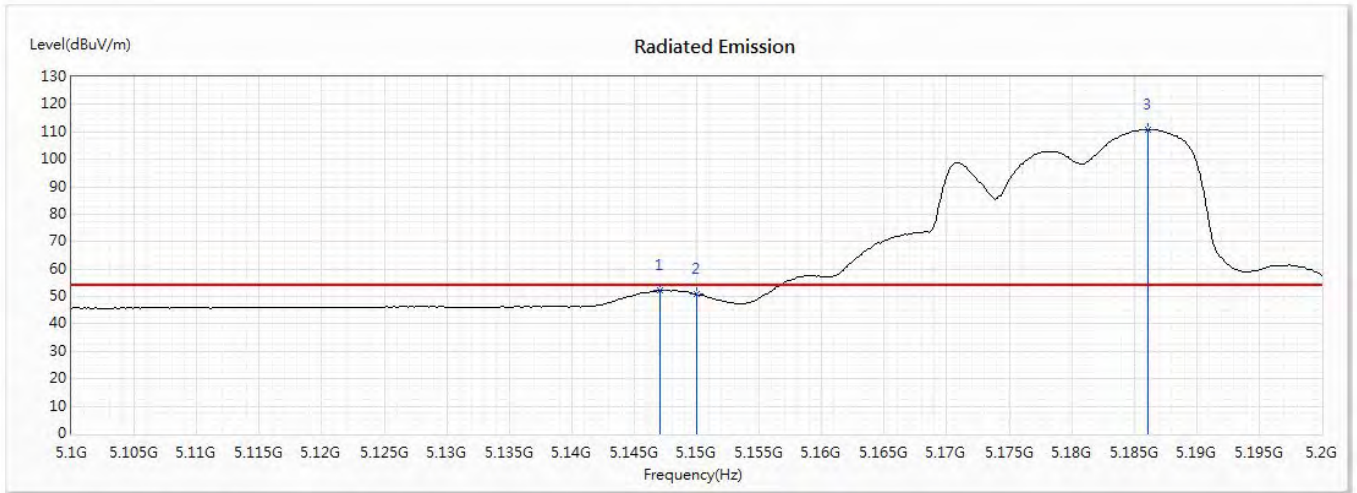


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5147.101	52.31	54.00	-1.69	34.58	17.73	AV
2	5150	50.79	54.00	-3.21	33.06	17.73	AV
3	5186.087	110.83	--	--	93.04	17.79	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5745MHz) (RU Config-Full)
 Test Date : 2020/06/26


Horizontal

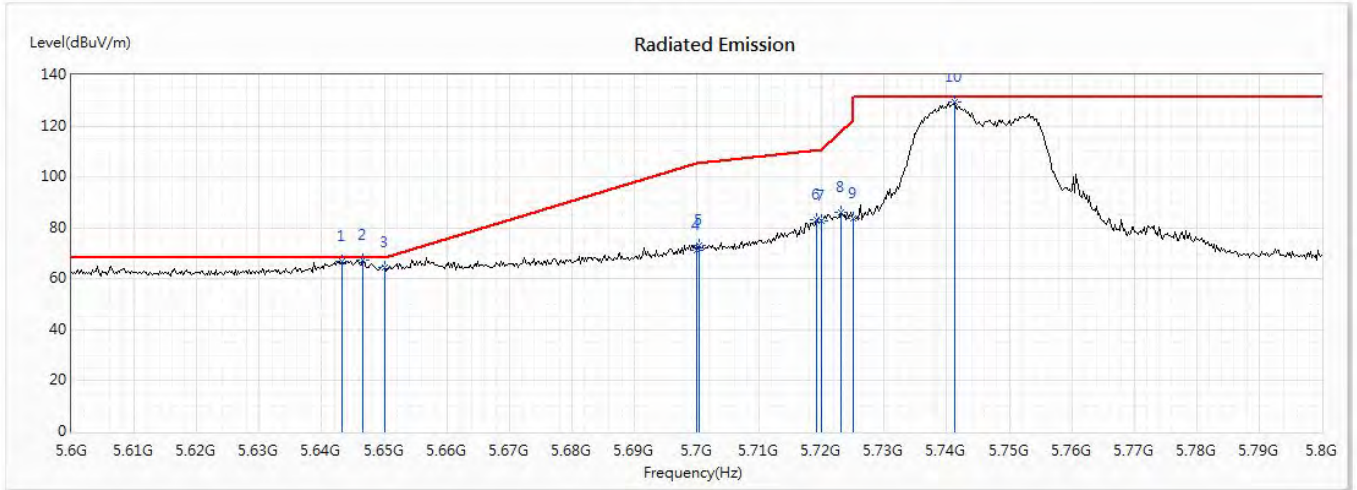

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5643.2	67.11	68.22	-1.11	48.47	18.64	PK
* 2	5646.6	67.32	68.22	-0.90	48.68	18.64	PK
3	5650	64.70	68.22	-3.52	46.05	18.65	PK
4	5700	71.24	105.20	-33.96	52.43	18.81	PK
5	5700.4	73.20	105.31	-32.11	54.38	18.82	PK
6	5719.2	83.24	110.58	-27.33	64.34	18.90	PK
7	5720	82.60	110.80	-28.20	63.70	18.90	PK
8	5723	85.94	117.64	-31.70	67.02	18.92	PK
9	5725	83.60	122.20	-38.60	64.67	18.93	PK
10	5741.2	129.25	--	--	110.24	19.01	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5745MHz) (RU Config-Full)
 Test Date : 2020/06/26


Vertical

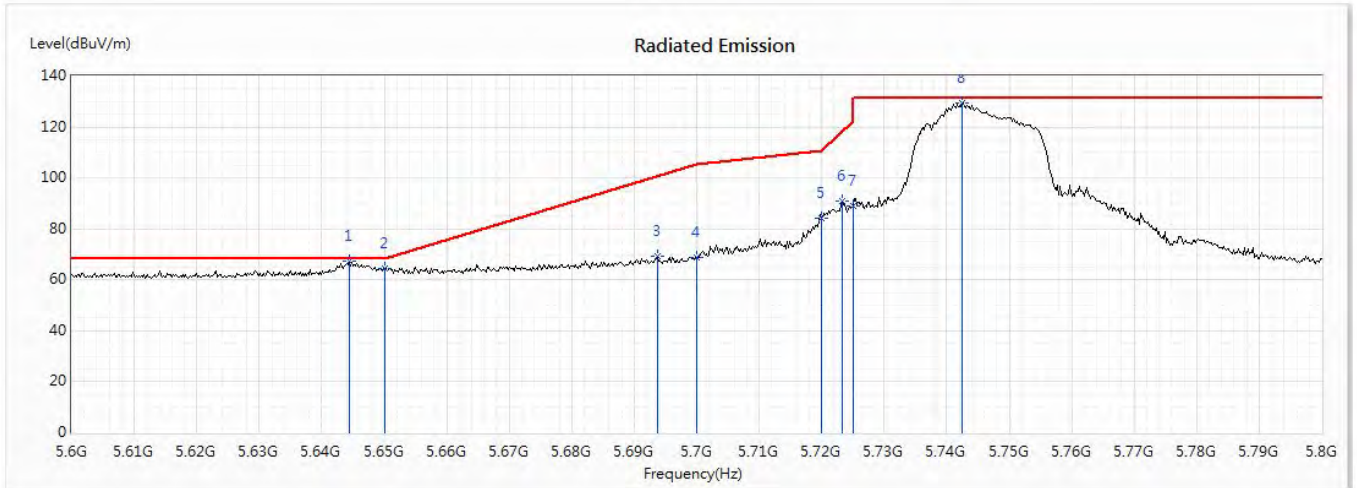

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5644.4	67.47	68.22	-0.75	48.83	18.64	PK
2	5650	64.53	68.22	-3.69	45.88	18.65	PK
3	5693.8	69.41	100.63	-31.23	50.62	18.79	PK
4	5700	68.83	105.20	-36.37	50.02	18.81	PK
5	5720	84.13	110.80	-26.67	65.23	18.90	PK
6	5723.2	91.09	118.10	-27.01	72.17	18.92	PK
7	5725	88.87	122.20	-33.33	69.94	18.93	PK
8	5742.4	129.26	--	--	110.24	19.02	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5825MHz) (RU Config-Full)
 Test Date : 2020/06/26


Horizontal

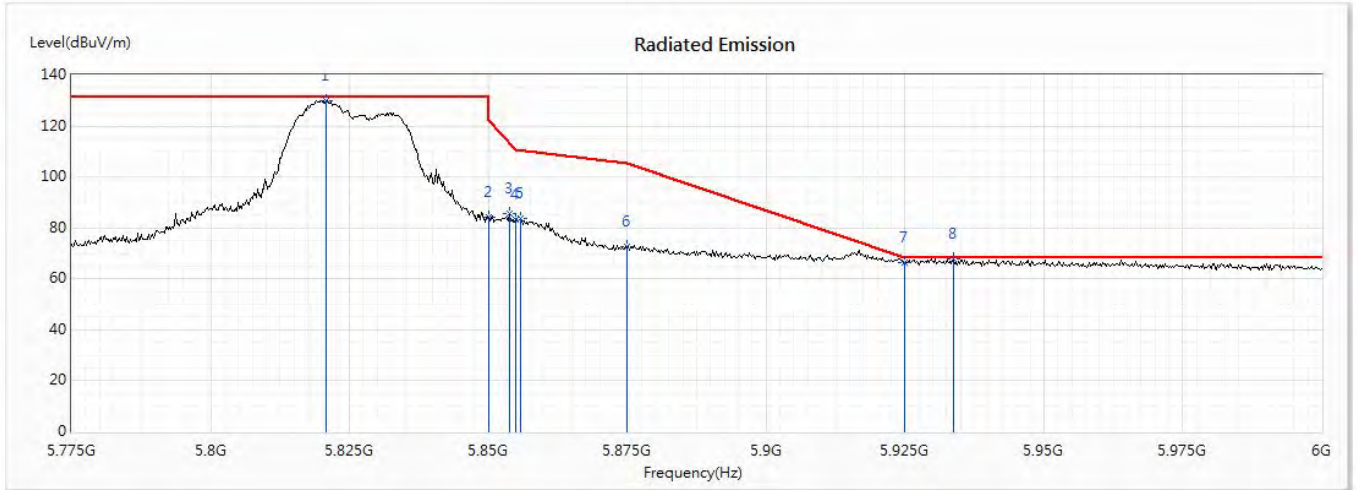

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5820.9	130.08	--	--	110.90	19.18	PK
2	5850	84.21	122.20	-37.99	64.88	19.33	PK
3	5853.75	85.46	113.65	-28.19	66.13	19.33	PK
4	5855	83.24	110.80	-27.56	63.90	19.34	PK
5	5855.775	83.77	110.58	-26.81	64.43	19.34	PK
6	5875	72.51	105.20	-32.69	53.16	19.35	PK
7	5925	66.56	68.22	-1.66	47.14	19.42	PK
* 8	5933.625	68.07	68.22	-0.15	48.64	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5825MHz) (RU Config-Full)
 Test Date : 2020/06/26


Vertical

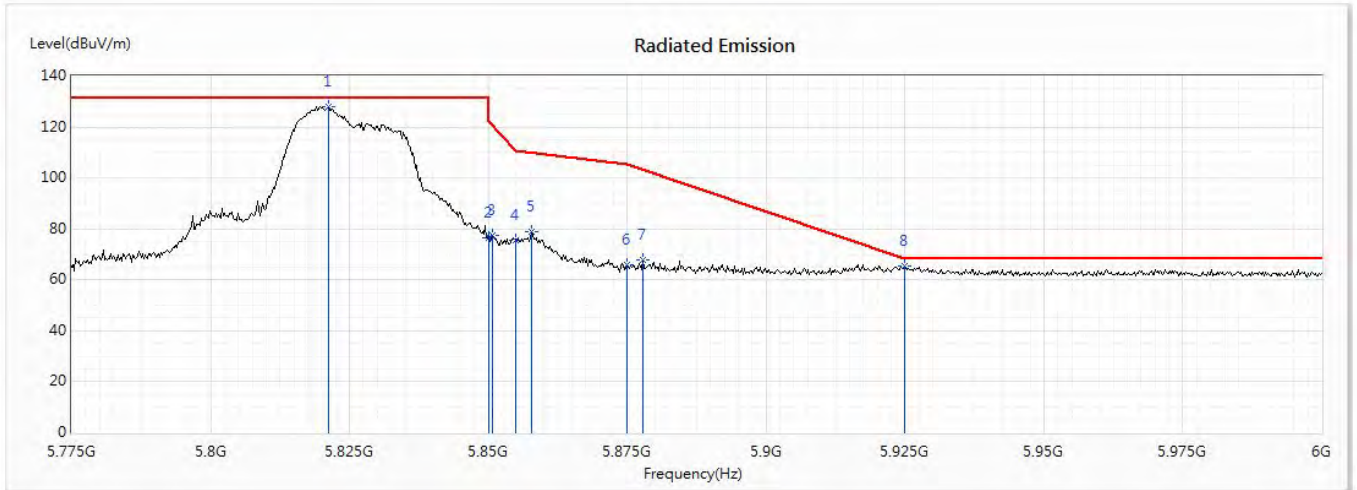

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5821.125	127.96	--	--	108.78	19.18	PK
2	5850	76.52	122.20	-45.68	57.19	19.33	PK
3	5850.825	77.38	120.32	-42.94	58.05	19.33	PK
4	5855	75.39	110.80	-35.41	56.05	19.34	PK
5	5857.8	78.69	110.01	-31.32	59.35	19.34	PK
6	5875	65.76	105.20	-39.44	46.41	19.35	PK
7	5877.825	67.86	103.10	-35.25	48.50	19.36	PK
* 8	5925	65.23	68.22	-2.99	45.81	19.42	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz) (RU Config-Full)
 Test Date : 2020/06/30

Horizontal

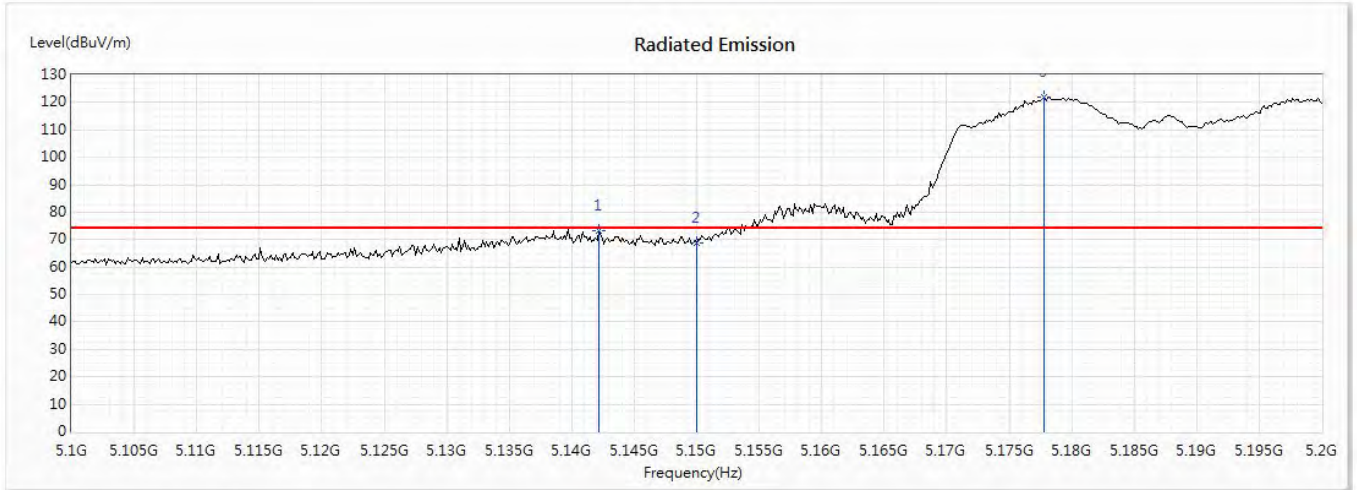


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5142.174	73.33	74.00	-0.67	55.61	17.72	PK
2	5150	69.00	74.00	-5.00	51.27	17.73	PK
3	5177.826	121.98	--	--	104.21	17.77	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz) (RU Config-Full)
 Test Date : 2020/06/30

Horizontal

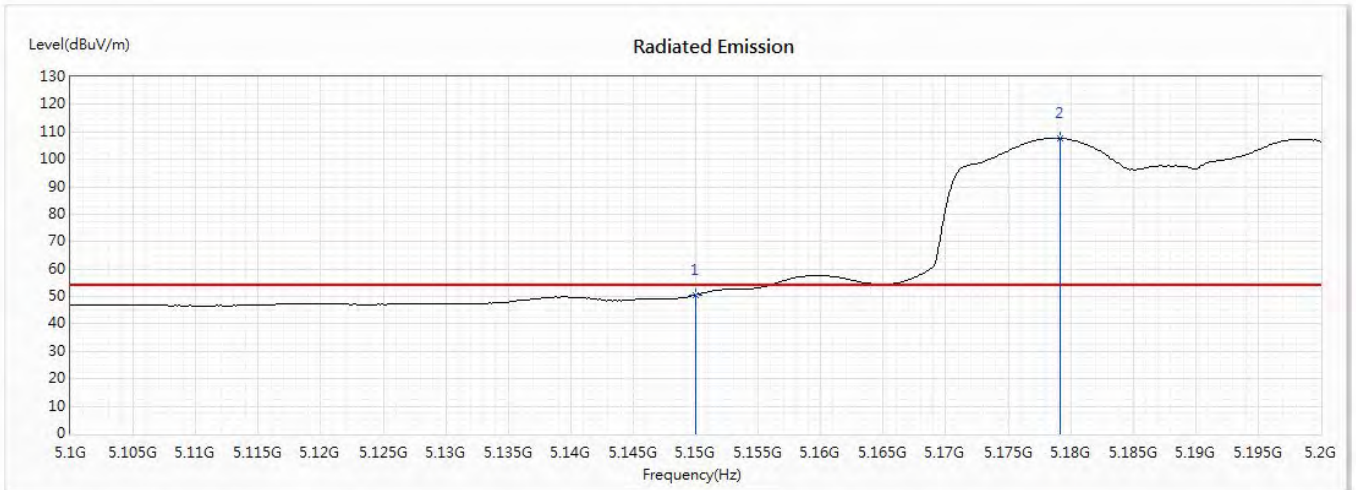


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	50.59	54.00	-3.41	32.86	17.73	AV
2	5179.13	107.69	--	--	89.92	17.77	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz) (RU Config-Full)
 Test Date : 2020/06/30

Vertical

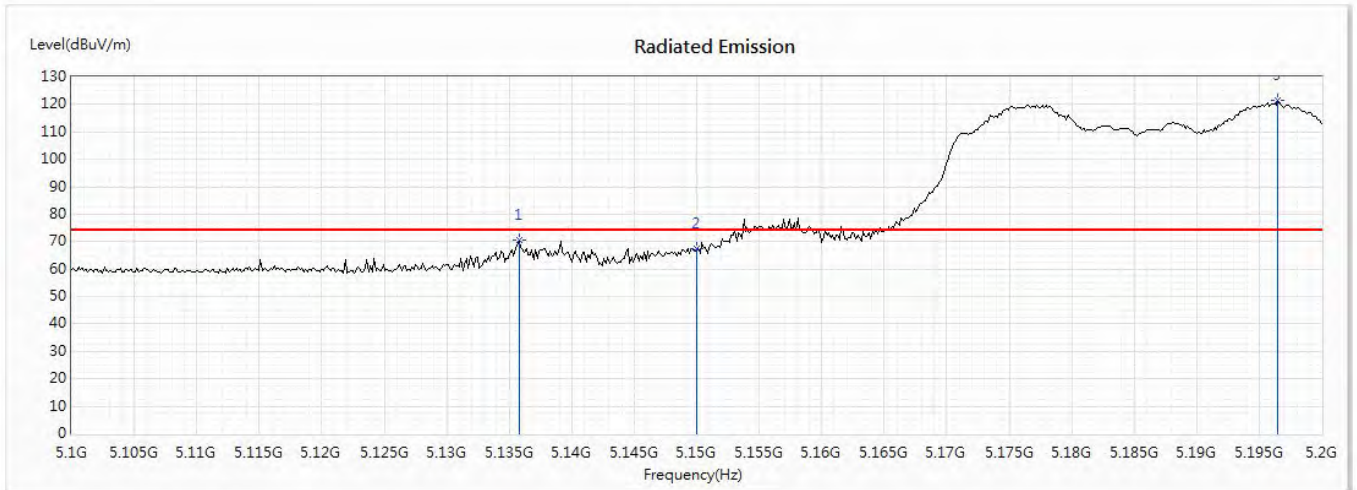


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5135.797	70.56	74.00	-3.44	52.85	17.71	PK
2	5150	67.29	74.00	-6.71	49.56	17.73	PK
3	5196.522	121.70	--	--	103.89	17.81	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz) (RU Config-Full)
 Test Date : 2020/06/30

Vertical

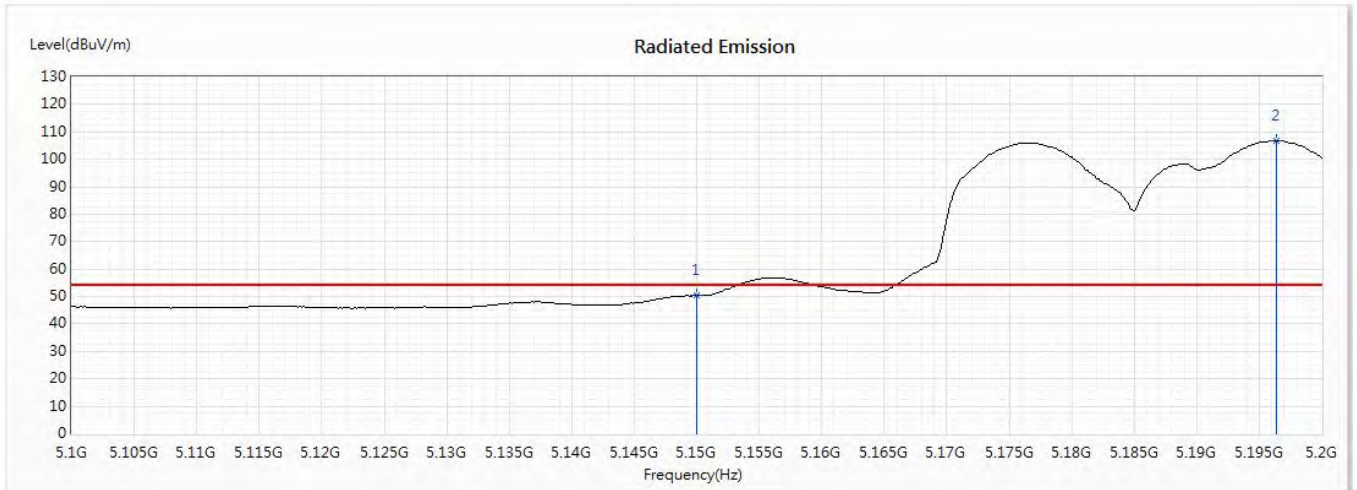


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	50.40	54.00	-3.60	32.67	17.73	AV
2	5196.377	106.67	--	--	88.86	17.81	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5755MHz) (RU Config-Full)
 Test Date : 2020/06/28


Horizontal

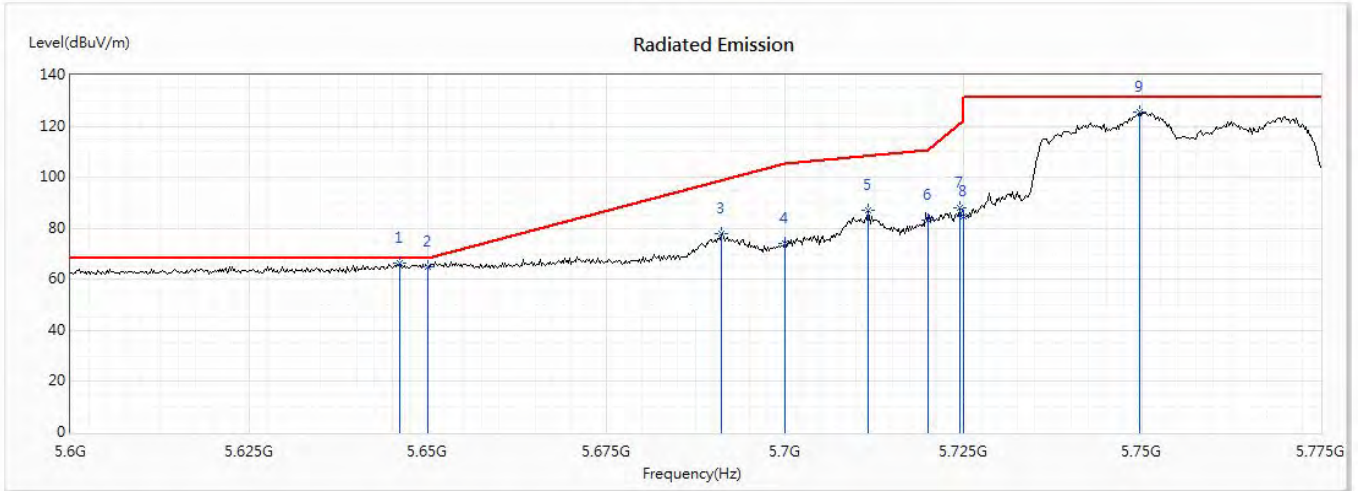

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5646.025	66.30	68.22	-1.92	47.66	18.64	PK
2	5650	65.08	68.22	-3.14	46.43	18.65	PK
3	5691.175	77.85	98.70	-20.85	59.07	18.78	PK
4	5700	74.14	105.20	-31.06	55.33	18.81	PK
5	5711.65	87.21	108.46	-21.25	68.34	18.87	PK
6	5720	83.38	110.80	-27.42	64.48	18.90	PK
7	5724.425	87.98	120.89	-32.91	69.05	18.93	PK
8	5725	84.83	122.20	-37.37	65.90	18.93	PK
9	5749.625	125.44	--	--	106.39	19.05	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5755MHz) (RU Config-Full)
 Test Date : 2020/06/28


Vertical

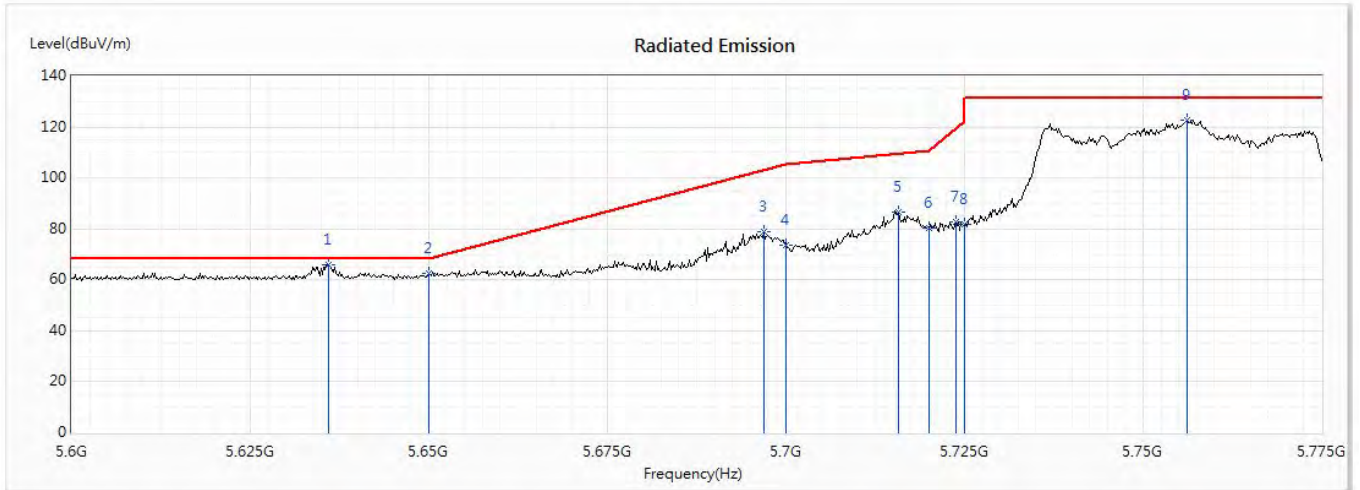

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5635.875	65.79	68.22	-2.43	47.17	18.62	PK
2	5650	62.36	68.22	-5.86	43.71	18.65	PK
3	5696.95	78.76	102.95	-24.19	59.96	18.80	PK
4	5700	73.81	105.20	-31.39	55.00	18.81	PK
5	5715.675	86.59	109.59	-23.00	67.71	18.88	PK
6	5720	80.40	110.80	-30.40	61.50	18.90	PK
7	5723.725	82.93	119.29	-36.36	64.01	18.92	PK
8	5725	81.55	122.20	-40.65	62.62	18.93	PK
9	5756.1	122.71	--	--	103.65	19.06	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5795MHz) (RU Config-Full)
 Test Date : 2020/06/28


Horizontal

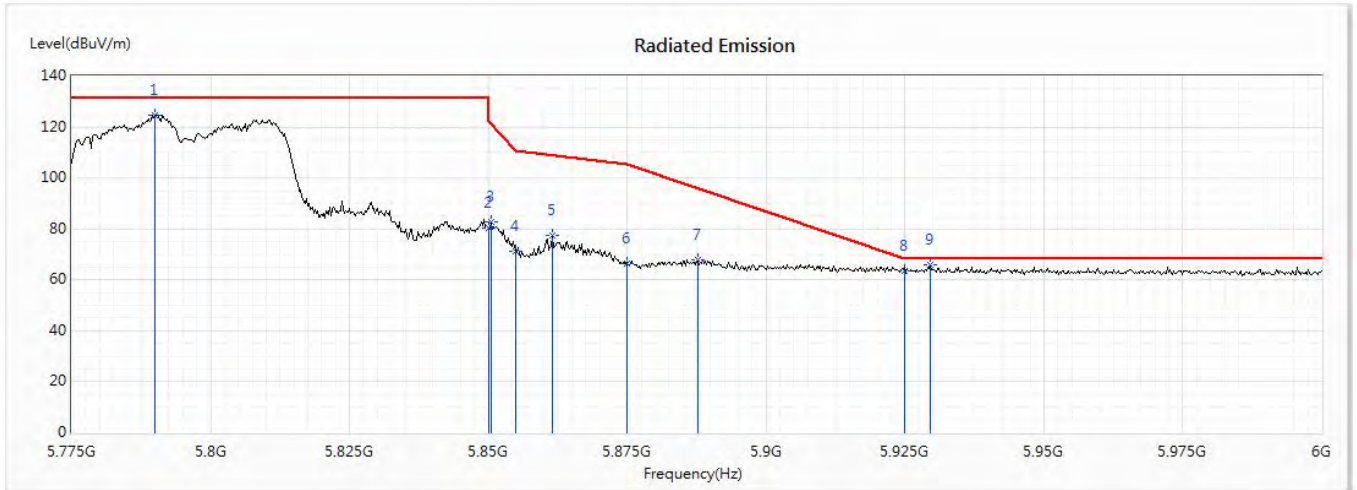

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5790.075	124.73	--	--	105.65	19.08	PK
2	5850	80.47	122.20	-41.73	61.14	19.33	PK
3	5850.6	82.93	120.83	-37.90	63.60	19.33	PK
4	5855	71.28	110.80	-39.52	51.94	19.34	PK
5	5861.625	77.25	108.94	-31.69	57.91	19.34	PK
6	5875	66.32	105.20	-38.88	46.97	19.35	PK
7	5887.725	67.92	95.76	-27.84	48.54	19.38	PK
8	5925	63.39	68.22	-4.83	43.97	19.42	PK
* 9	5929.575	65.82	68.22	-2.40	46.39	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5795MHz) (RU Config-Full)
 Test Date : 2020/06/28


Vertical

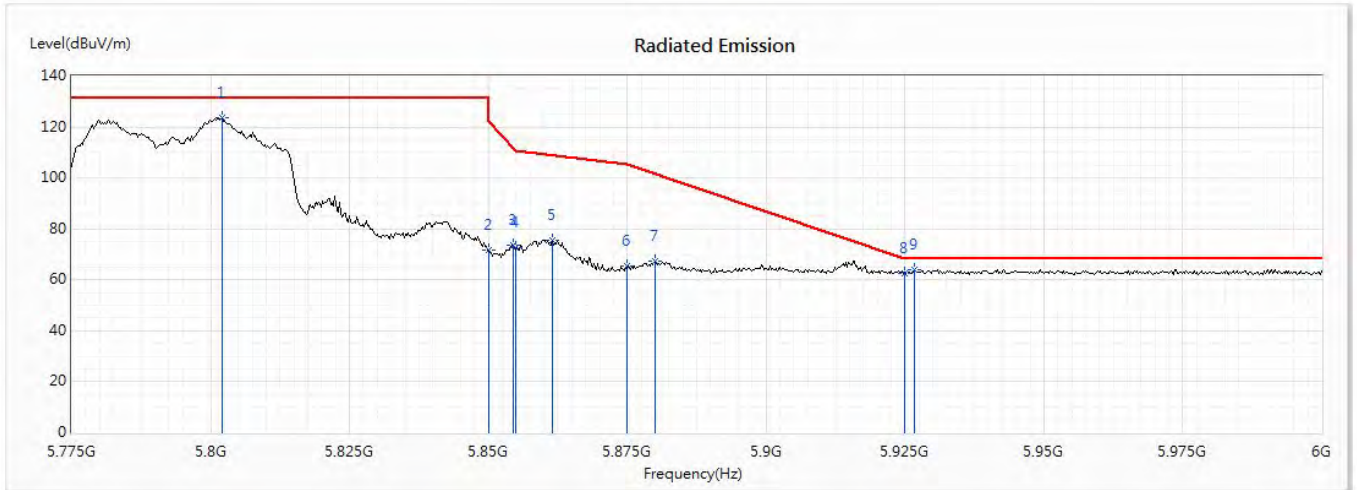

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5802	123.51	--	--	104.42	19.09	PK
2	5850	71.88	122.20	-50.32	52.55	19.33	PK
3	5854.425	73.81	112.11	-38.30	54.48	19.33	PK
4	5855	72.49	110.80	-38.31	53.15	19.34	PK
5	5861.625	75.73	108.94	-33.21	56.39	19.34	PK
6	5875	65.21	105.20	-39.99	45.86	19.35	PK
7	5880.075	67.53	101.43	-33.90	48.17	19.36	PK
8	5925	62.75	68.22	-5.47	43.33	19.42	PK
* 9	5926.65	64.21	68.22	-4.01	44.79	19.42	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz) (RU Config-Full)
 Test Date : 2020/06/30

Horizontal

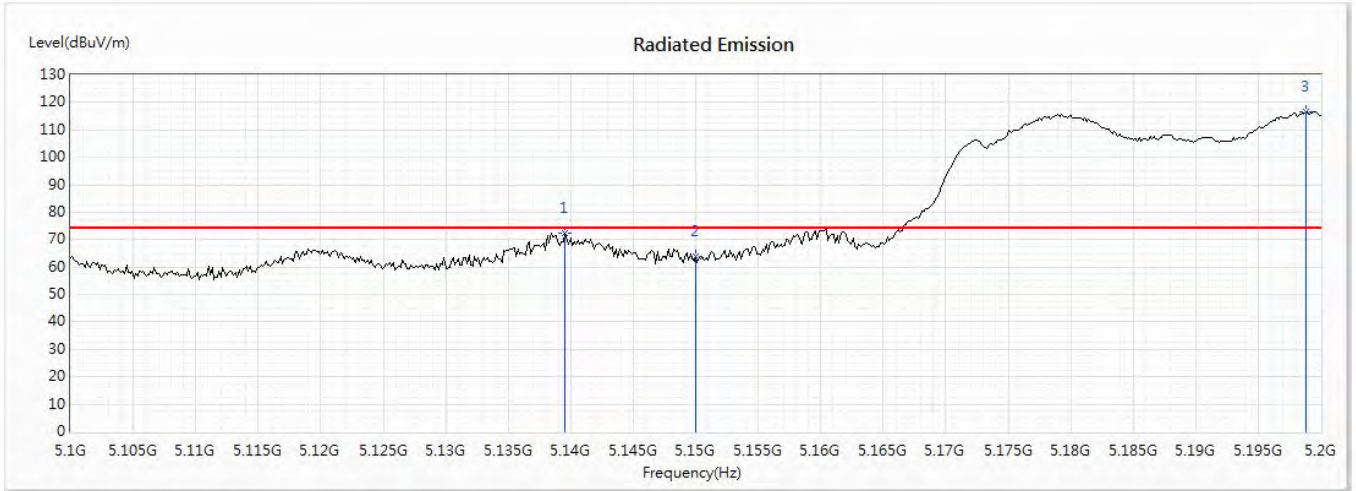


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5139.565	72.32	74.00	-1.68	54.61	17.71	PK
2	5150	63.82	74.00	-10.18	46.09	17.73	PK
3	5198.841	116.50	--	--	98.68	17.82	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz) (RU Config-Full)
 Test Date : 2020/06/30

Horizontal

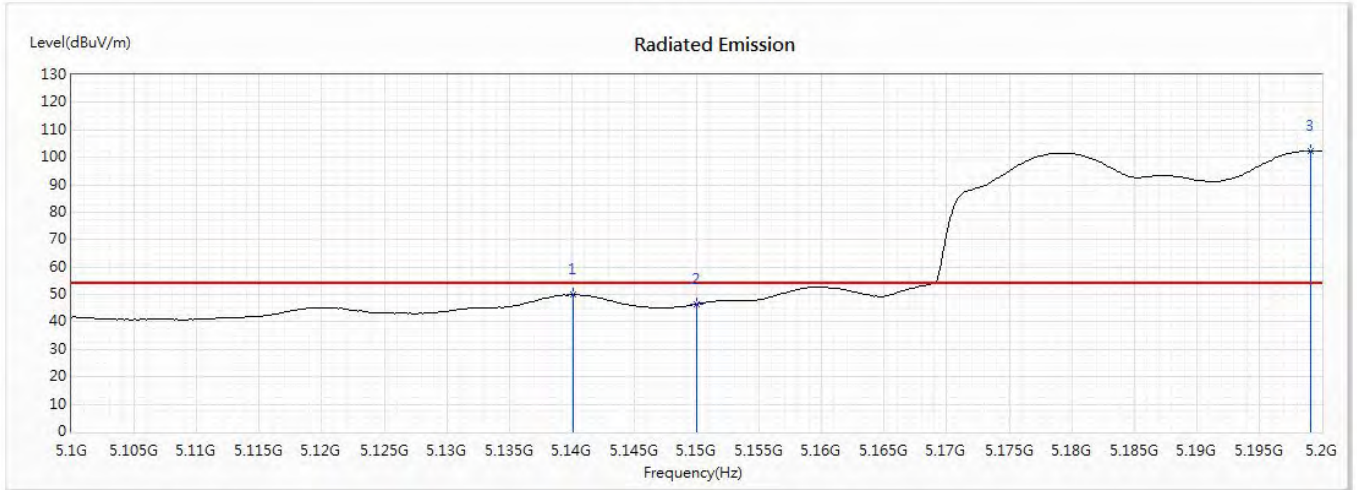


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5140.145	49.93	54.00	-4.07	32.22	17.71	AV
2	5150	46.39	54.00	-7.61	28.66	17.73	AV
3	5199.13	102.38	--	--	84.56	17.82	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz) (RU Config-Full)
 Test Date : 2020/06/30

Vertical

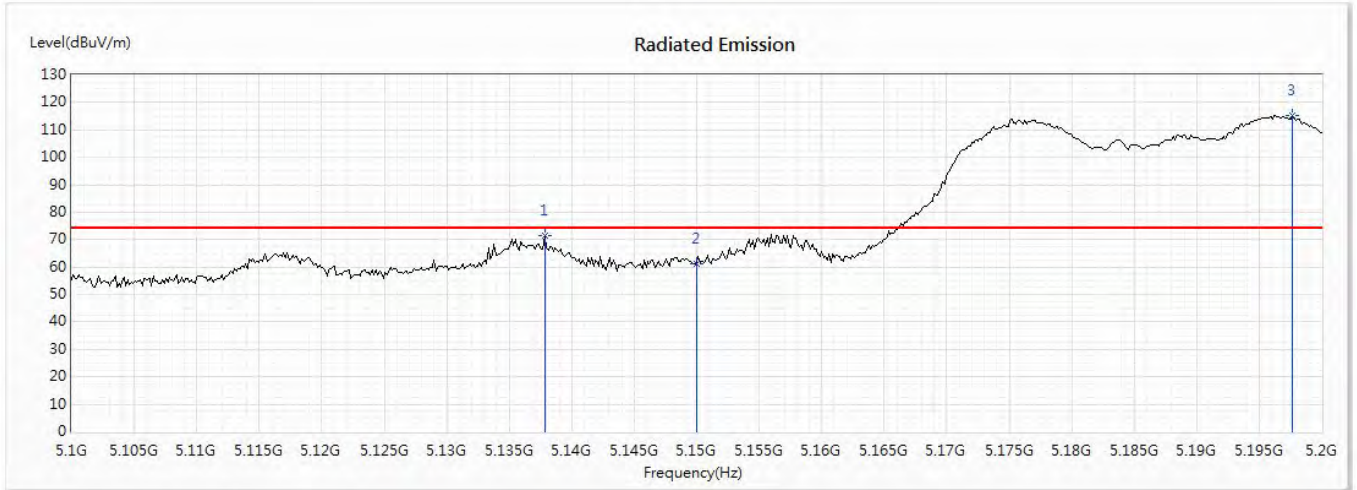


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5137.826	71.44	74.00	-2.56	53.73	17.71	PK
2	5150	61.41	74.00	-12.59	43.68	17.73	PK
3	5197.681	115.12	--	--	97.30	17.82	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz) (RU Config-Full)
 Test Date : 2020/06/30

Vertical

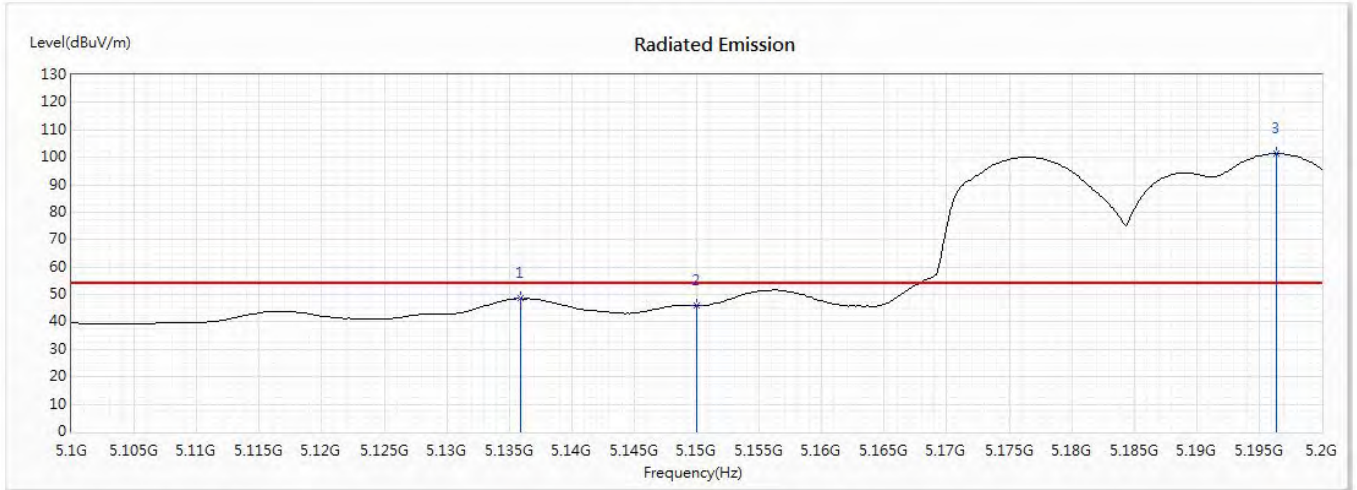


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5135.942	48.54	54.00	-5.46	30.83	17.71	AV
2	5150	45.97	54.00	-8.03	28.24	17.73	AV
3	5196.377	101.48	--	--	83.67	17.81	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5775MHz) (RU Config-Full)
 Test Date : 2020/06/30


Horizontal

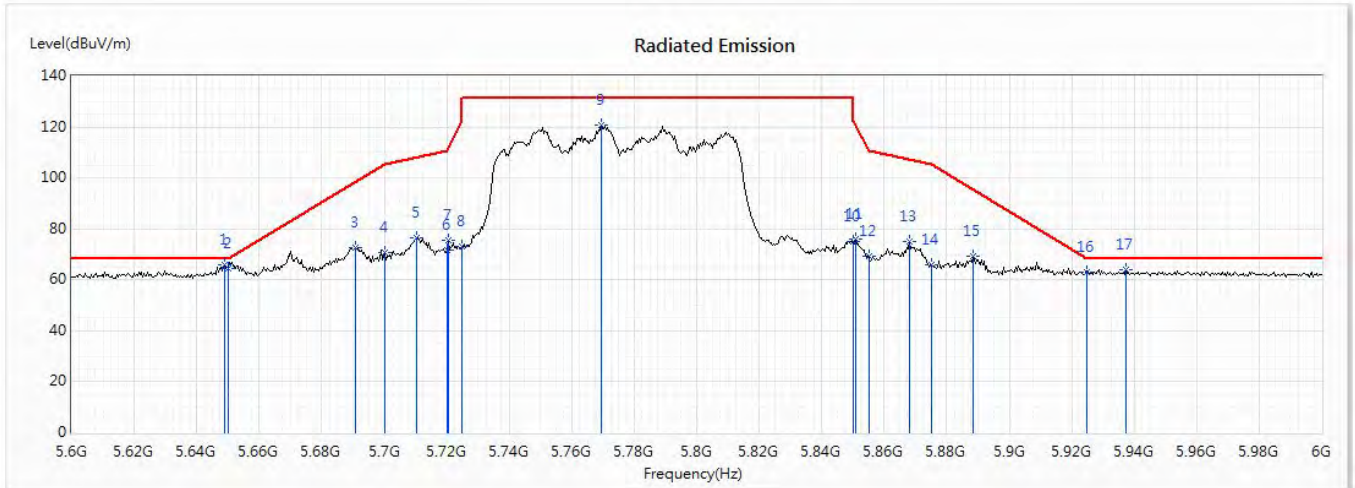

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5648.8	65.98	68.22	-2.24	47.33	18.65	PK
2	5650	64.31	68.22	-3.91	45.66	18.65	PK
3	5690.8	72.79	98.42	-25.63	54.01	18.78	PK
4	5700	70.53	105.20	-34.67	51.72	18.81	PK
5	5710.4	76.67	108.11	-31.44	57.81	18.86	PK
6	5720	71.84	110.80	-38.96	52.94	18.90	PK
7	5720.4	75.60	111.71	-36.12	56.69	18.91	PK
8	5725	73.07	122.20	-49.13	54.14	18.93	PK
9	5769.6	120.61	--	--	101.54	19.07	PK
10	5850	75.27	122.20	-46.93	55.94	19.33	PK
11	5850.8	76.03	120.38	-44.35	56.70	19.33	PK
12	5855	69.08	110.80	-41.72	49.74	19.34	PK
13	5868	74.94	107.16	-32.22	55.60	19.34	PK
14	5875	65.92	105.20	-39.28	46.57	19.35	PK
15	5888.4	69.04	95.26	-26.21	49.66	19.38	PK
16	5925	63.20	68.22	-5.02	43.78	19.42	PK
17	5937.2	64.10	68.22	-4.12	44.67	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5775MHz) (RU Config-Full)
 Test Date : 2020/06/30


Vertical

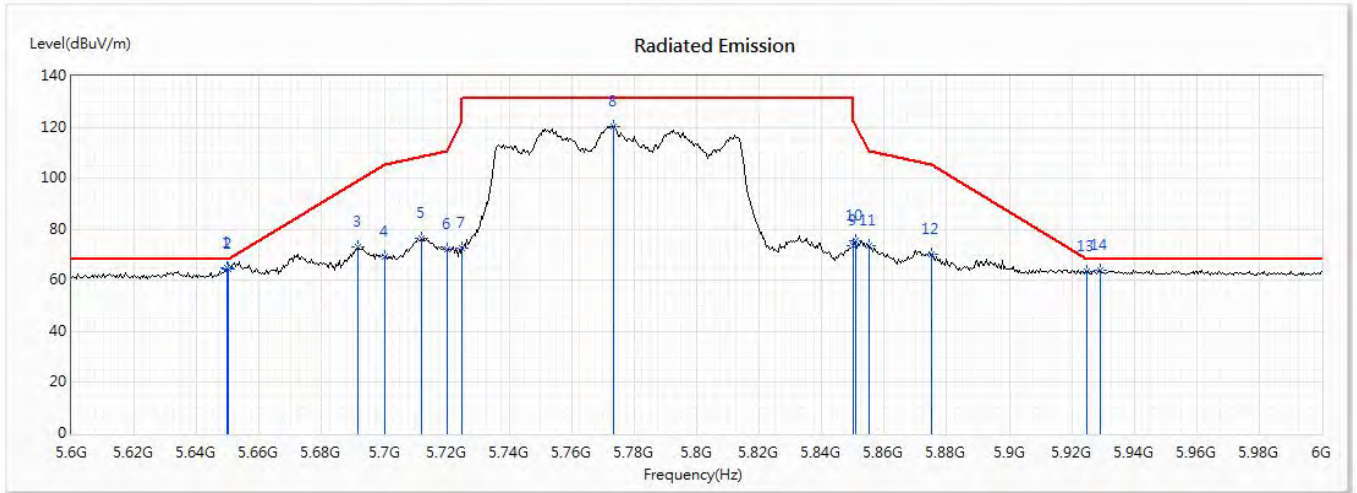

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5649.6	65.16	68.22	-3.06	46.51	18.65	PK
2	5650	64.50	68.22	-3.72	45.85	18.65	PK
3	5691.6	73.17	99.01	-25.84	54.39	18.78	PK
4	5700	69.17	105.20	-36.03	50.36	18.81	PK
5	5712	76.71	108.56	-31.85	57.84	18.87	PK
6	5720	72.13	110.80	-38.67	53.23	18.90	PK
7	5725	72.45	122.20	-49.75	53.52	18.93	PK
8	5773.2	120.15	--	--	101.08	19.07	PK
9	5850	73.56	122.20	-48.64	54.23	19.33	PK
10	5850.8	75.69	120.38	-44.69	56.36	19.33	PK
11	5855	73.49	110.80	-37.31	54.15	19.34	PK
12	5875	70.32	105.20	-34.88	50.97	19.35	PK
13	5925	63.54	68.22	-4.68	44.12	19.42	PK
14	5929.2	63.95	68.22	-4.27	44.52	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/01

Horizontal

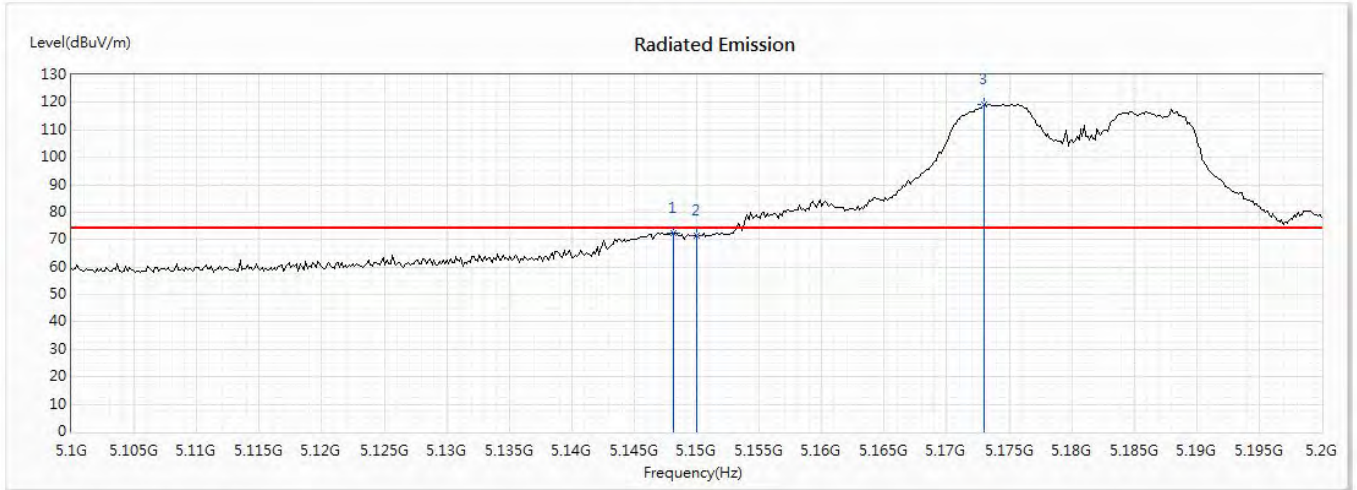


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5148.116	72.36	74.00	-1.64	54.63	17.73	PK
2	5150	71.57	74.00	-2.43	53.84	17.73	PK
3	5173.043	119.22	--	--	101.46	17.76	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/01

Horizontal

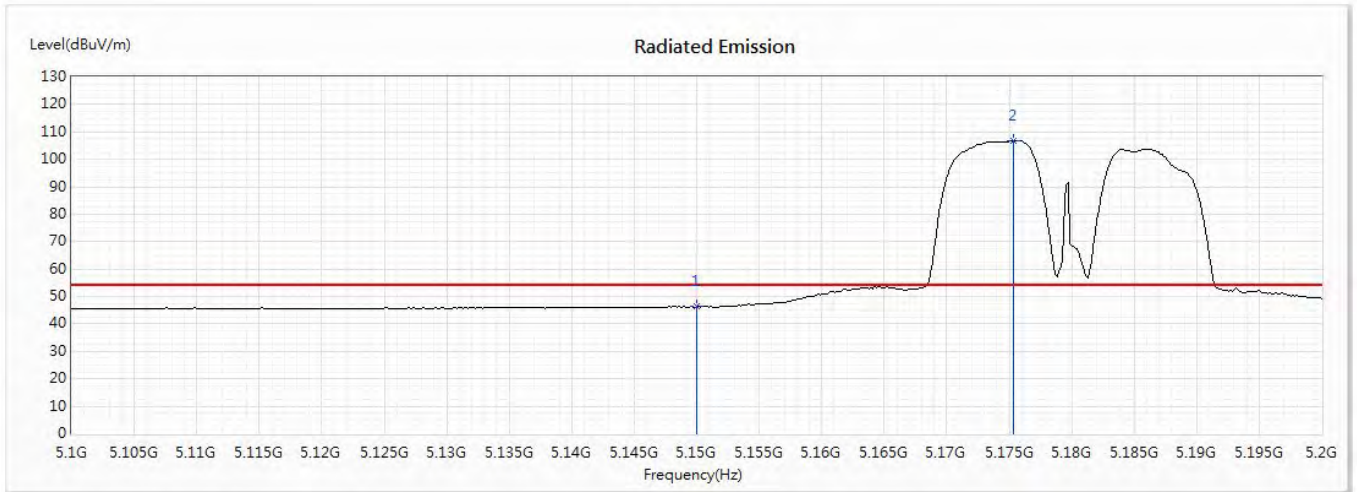


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	46.24	54.00	-7.76	28.51	17.73	AV
2	5175.362	106.79	--	--	89.02	17.77	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/01

Vertical

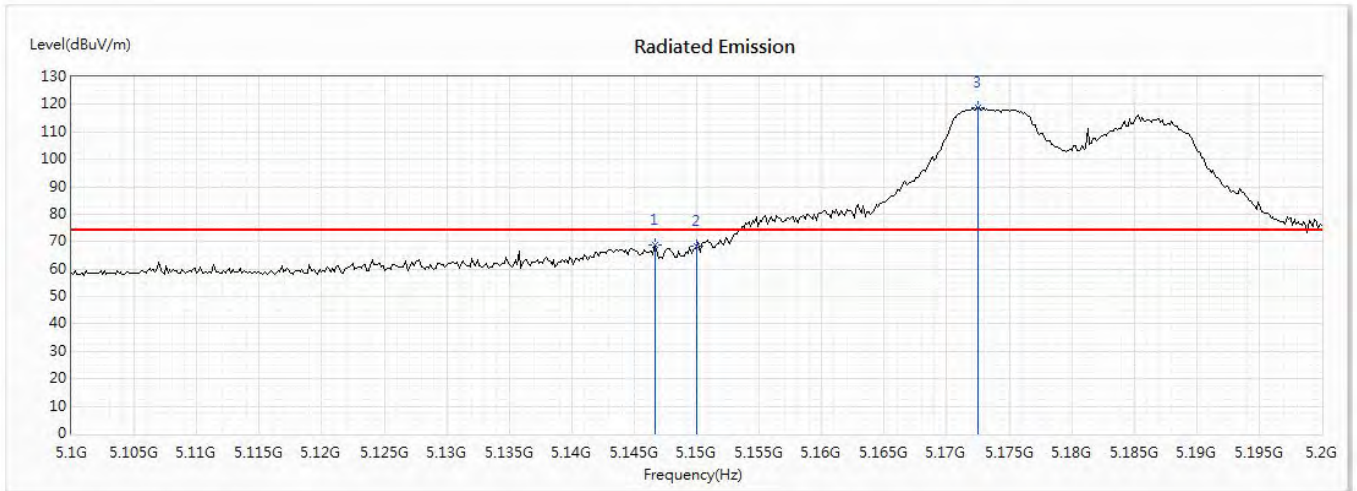


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5146.667	68.65	74.00	-5.35	50.92	17.73	PK
2	5150	68.22	74.00	-5.78	50.49	17.73	PK
3	5172.464	119.00	--	--	101.24	17.76	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5180MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/01

Vertical

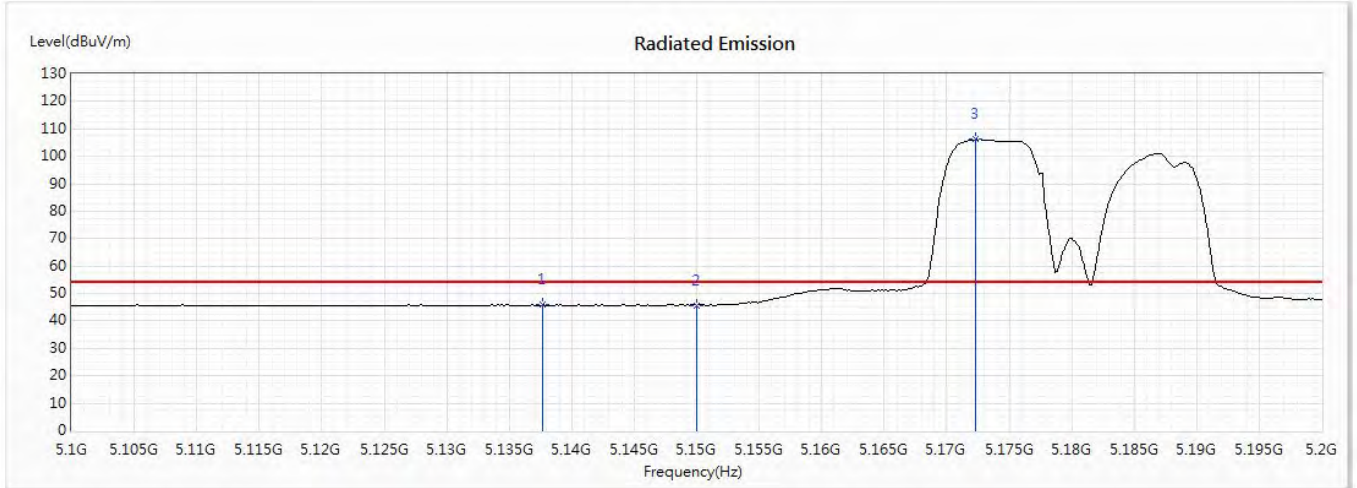


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5137.681	45.87	54.00	-8.13	28.16	17.71	AV
2	5150	45.78	54.00	-8.22	28.05	17.73	AV
3	5172.319	106.11	--	--	88.35	17.76	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5745MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Horizontal

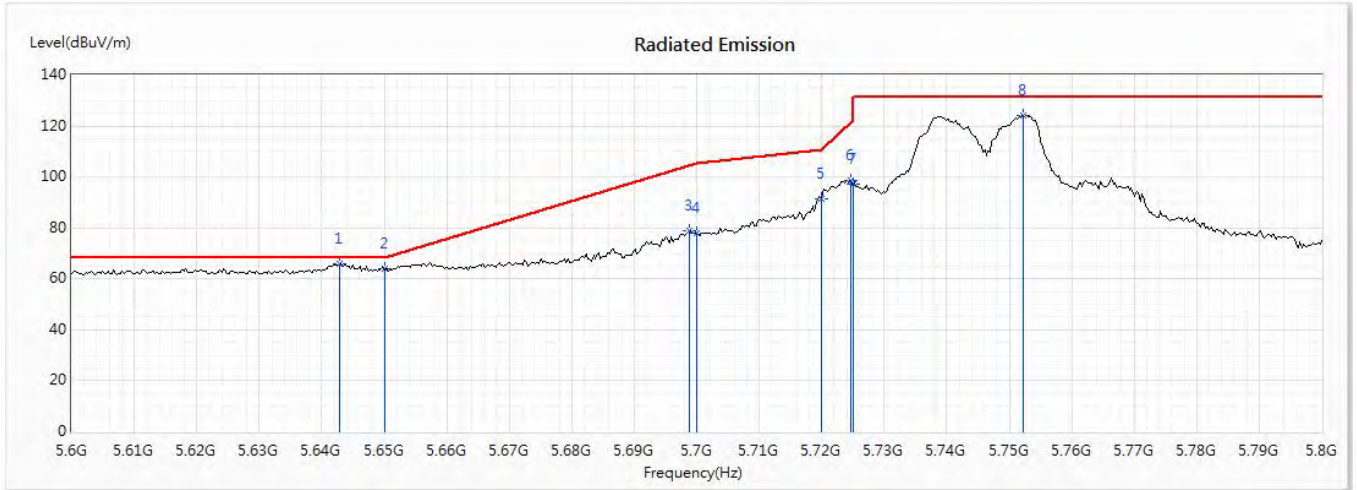

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5642.899	65.81	68.22	-2.41	47.17	18.64	PK
2	5650	64.13	68.22	-4.09	45.48	18.65	PK
3	5698.841	79.12	104.35	-25.22	60.31	18.81	PK
4	5700	77.71	105.20	-27.49	58.90	18.81	PK
5	5720	91.48	110.80	-19.32	72.58	18.90	PK
6	5724.638	98.46	121.37	-22.91	79.53	18.93	PK
7	5725	96.99	122.20	-25.21	78.06	18.93	PK
8	5752.174	124.12	--	--	105.06	19.06	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5745MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Vertical

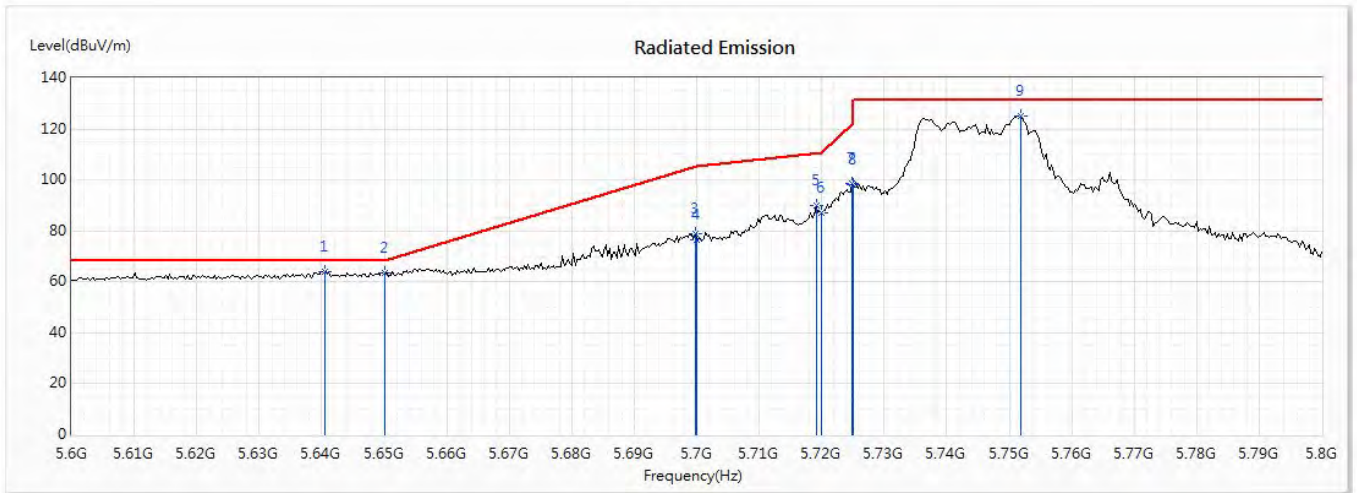

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5640.58	64.21	68.22	-4.01	45.58	18.63	PK
2	5650	63.35	68.22	-4.87	44.70	18.65	PK
3	5699.71	79.09	104.99	-25.89	60.28	18.81	PK
4	5700	76.65	105.20	-28.55	57.84	18.81	PK
5	5719.13	89.93	110.56	-20.62	71.03	18.90	PK
6	5720	87.03	110.80	-23.77	68.13	18.90	PK
7	5724.928	98.71	122.03	-23.32	79.78	18.93	PK
8	5725	98.31	122.20	-23.89	79.38	18.93	PK
9	5751.884	125.06	--	--	106.00	19.06	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5825MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Horizontal

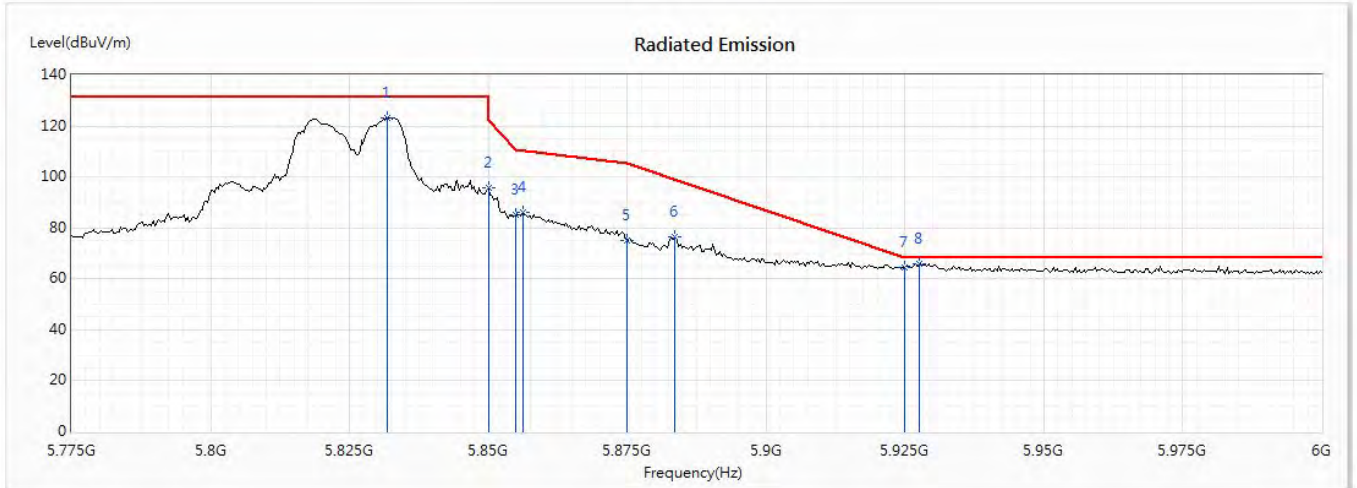

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5831.739	123.35	--	--	104.11	19.24	PK
2	5850	95.67	122.20	-26.53	76.34	19.33	PK
3	5855	84.94	110.80	-25.86	65.60	19.34	PK
4	5856.196	86.03	110.46	-24.43	66.69	19.34	PK
5	5875	75.15	105.20	-30.05	55.80	19.35	PK
6	5883.587	76.63	98.83	-22.20	57.26	19.37	PK
7	5925	64.52	68.22	-3.70	45.10	19.42	PK
* 8	5927.609	65.86	68.22	-2.36	46.43	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5825MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Vertical

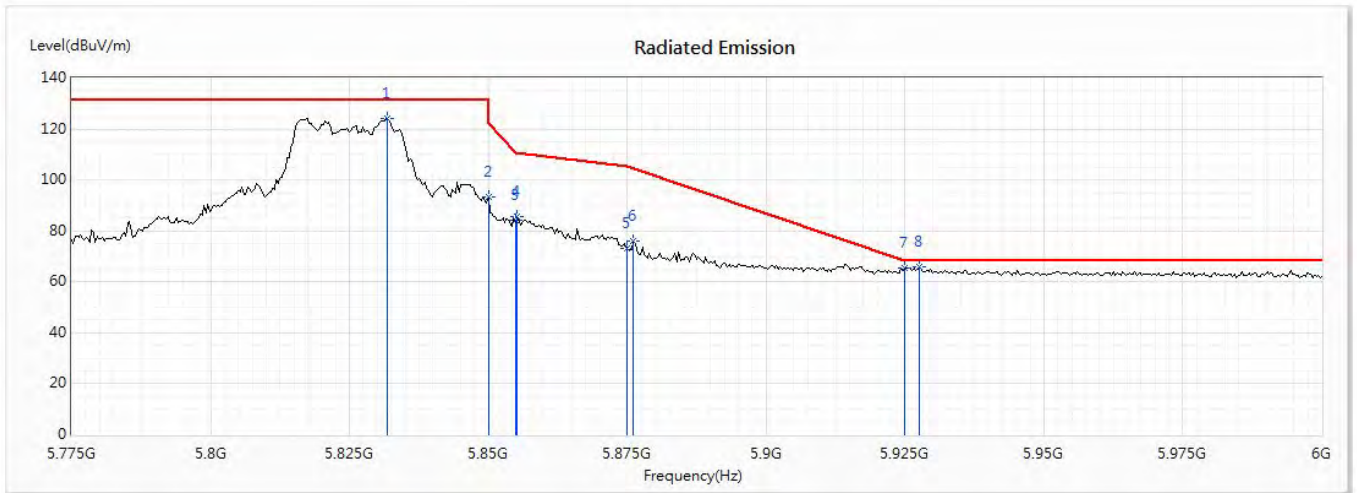

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5831.739	124.03	--	--	104.79	19.24	PK
2	5850	93.17	122.20	-29.03	73.84	19.33	PK
3	5855	83.99	110.80	-26.81	64.65	19.34	PK
4	5855.217	85.86	110.74	-24.88	66.52	19.34	PK
5	5875	73.15	105.20	-32.05	53.80	19.35	PK
6	5876.087	76.01	104.39	-28.38	56.65	19.36	PK
7	5925	65.19	68.22	-3.03	45.77	19.42	PK
* 8	5927.609	65.87	68.22	-2.35	46.44	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02

Horizontal

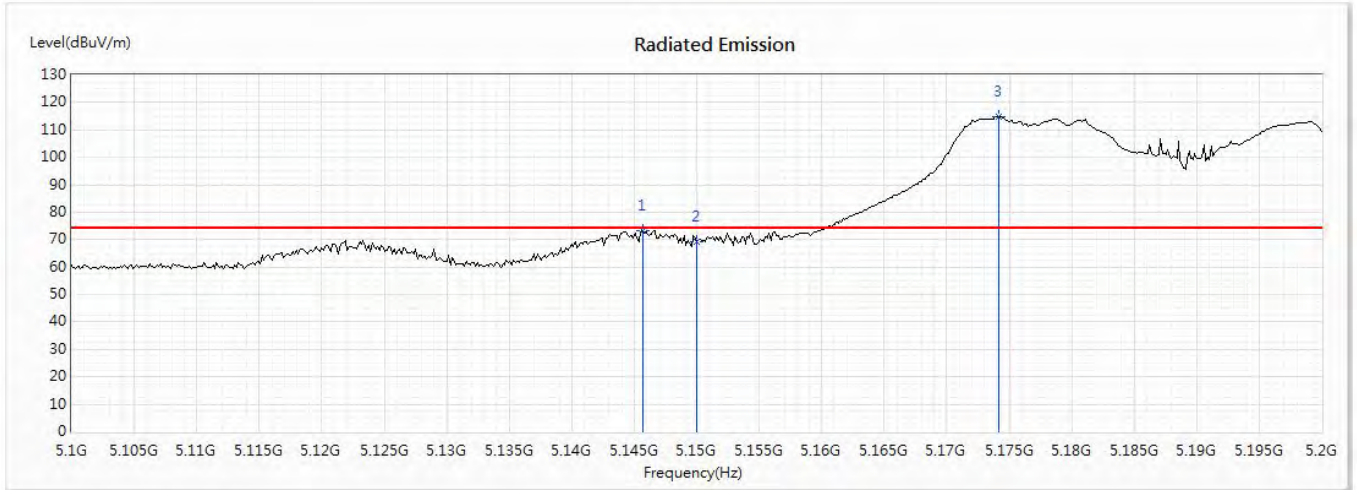


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5145.652	73.47	74.00	-0.53	55.74	17.73	PK
2	5150	69.19	74.00	-4.81	51.46	17.73	PK
3	5174.203	115.00	--	--	97.24	17.76	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02

Horizontal

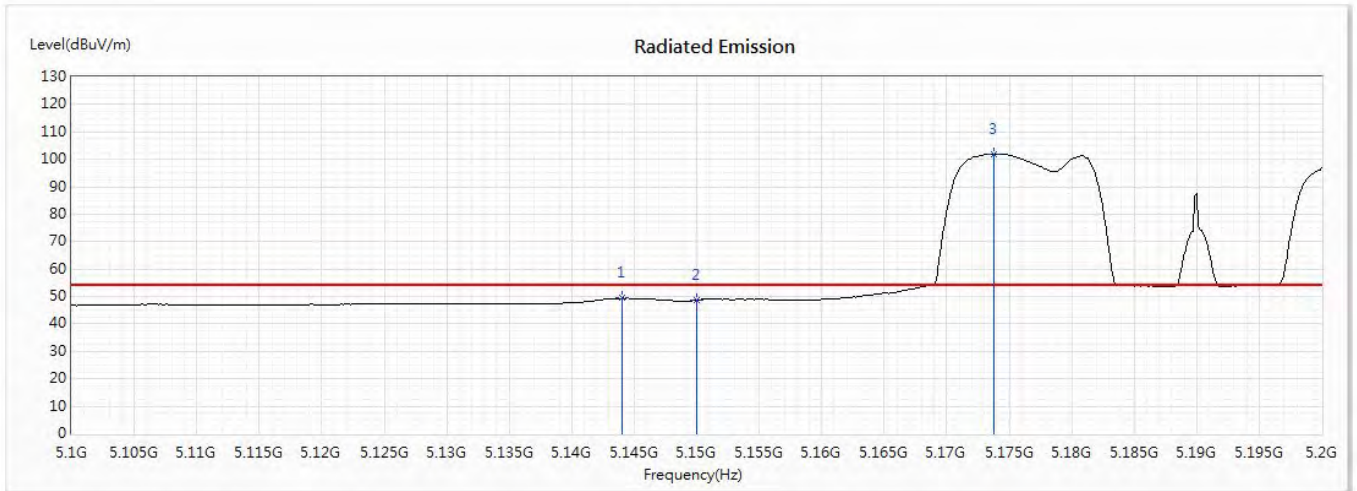


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5144.058	49.38	54.00	-4.62	31.66	17.72	AV
2	5150	48.53	54.00	-5.47	30.80	17.73	AV
3	5173.768	101.99	--	--	84.23	17.76	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02

Vertical

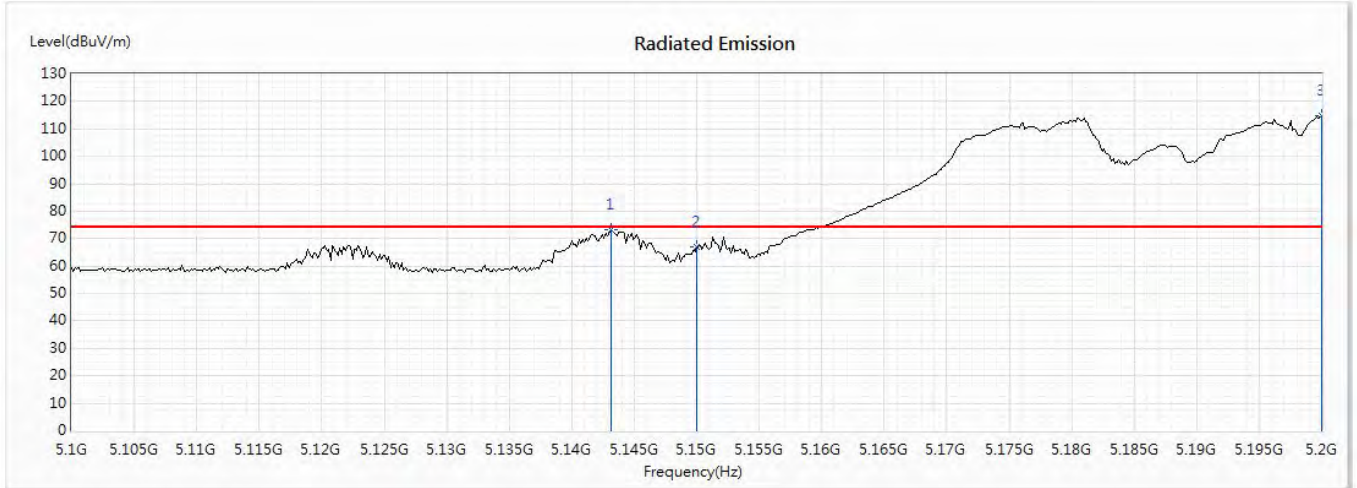


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5143.188	73.47	74.00	-0.53	55.75	17.72	PK
2	5150	67.04	74.00	-6.96	49.31	17.73	PK
3	5200	115.02	--	--	97.20	17.82	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5190MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02

Vertical

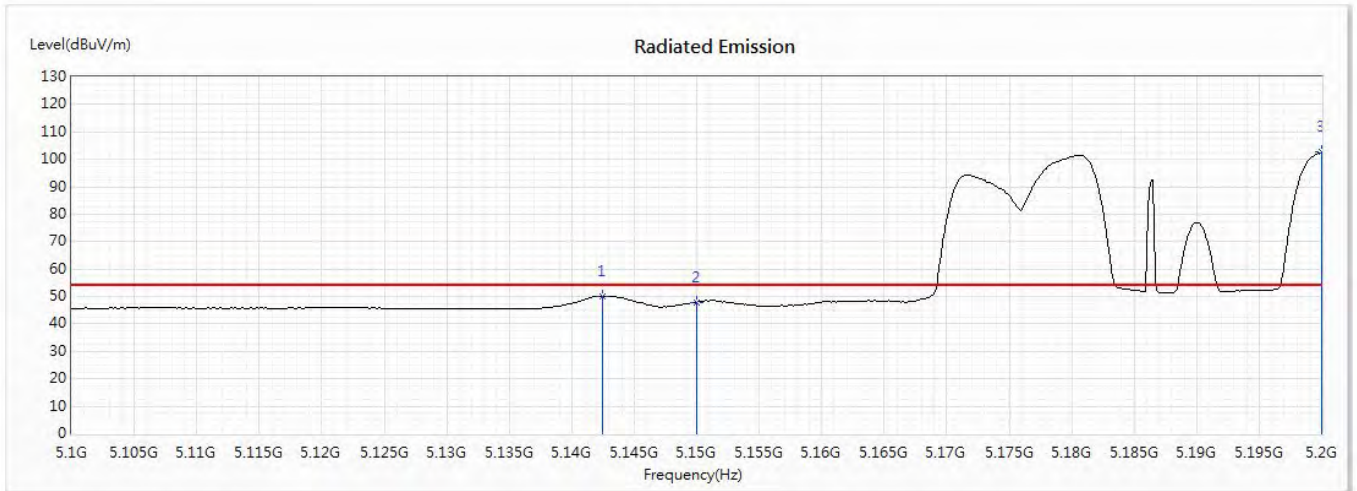


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5142.464	50.18	54.00	-3.82	32.46	17.72	AV
2	5150	47.97	54.00	-6.03	30.24	17.73	AV
3	5200	102.60	--	--	84.78	17.82	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5755MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Horizontal

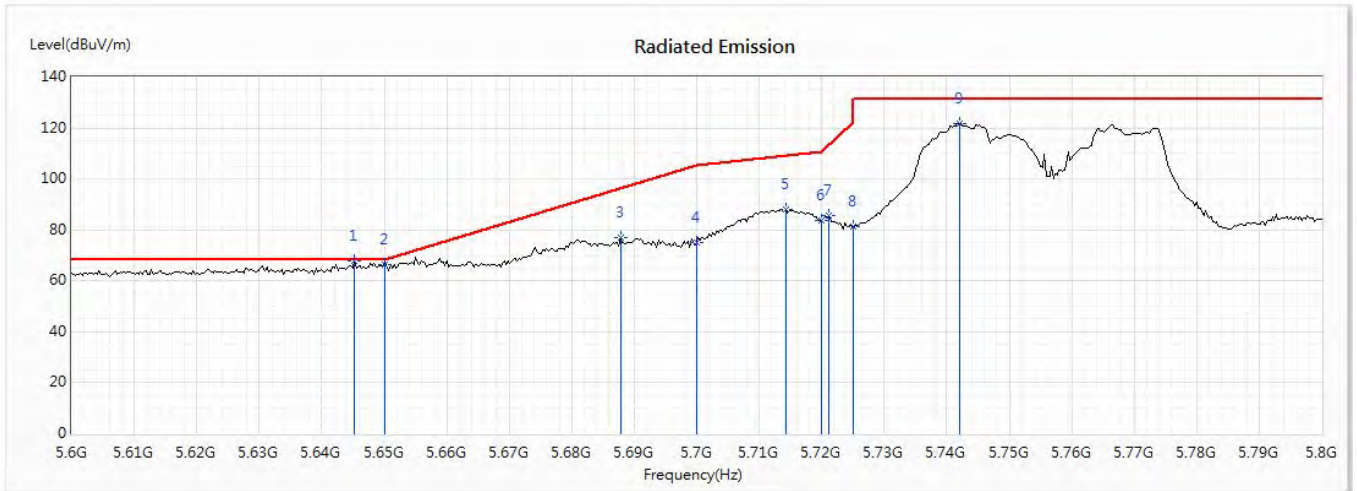

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5645.217	67.67	68.22	-0.55	49.03	18.64	PK
2	5650	66.60	68.22	-1.62	47.95	18.65	PK
3	5687.826	76.82	96.23	-19.41	58.04	18.78	PK
4	5700	74.91	105.20	-30.29	56.10	18.81	PK
5	5714.203	88.18	109.18	-21.00	69.30	18.88	PK
6	5720	83.51	110.80	-27.29	64.61	18.90	PK
7	5721.159	85.61	113.44	-27.84	66.70	18.91	PK
8	5725	81.38	122.20	-40.82	62.45	18.93	PK
9	5742.029	121.83	--	--	102.81	19.02	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5755MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Vertical

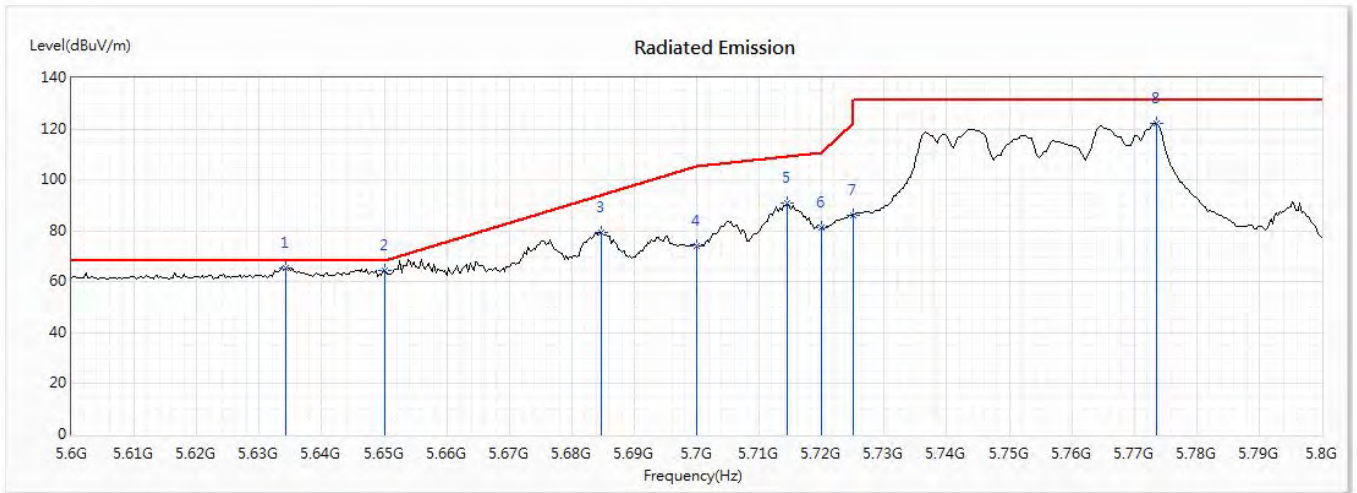

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5634.203	65.52	68.22	-2.70	46.90	18.62	PK
2	5650	64.25	68.22	-3.97	45.60	18.65	PK
3	5684.638	79.32	93.87	-14.55	60.56	18.76	PK
4	5700	74.00	105.20	-31.20	55.19	18.81	PK
5	5714.493	90.82	109.26	-18.44	71.94	18.88	PK
6	5720	81.47	110.80	-29.33	62.57	18.90	PK
7	5725	86.21	122.20	-35.99	67.28	18.93	PK
8	5773.623	122.18	--	--	103.11	19.07	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5795MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Horizontal

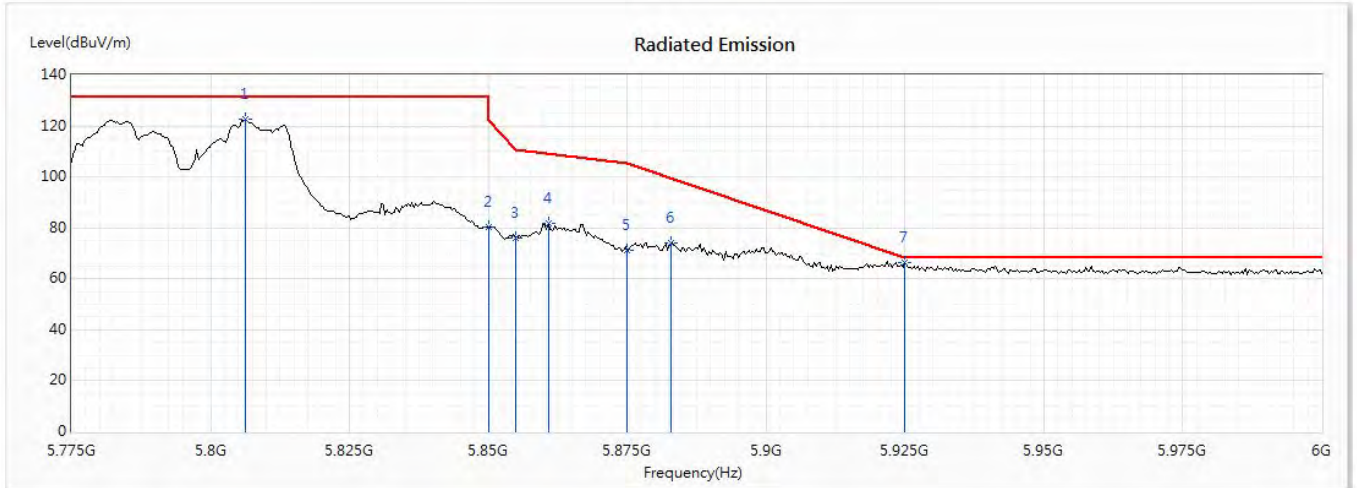

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5806.304	122.58	--	--	103.46	19.12	PK
2	5850	80.33	122.20	-41.87	61.00	19.33	PK
3	5855	76.25	110.80	-34.55	56.91	19.34	PK
4	5860.761	81.87	109.18	-27.32	62.53	19.34	PK
5	5875	71.35	105.20	-33.85	52.00	19.35	PK
6	5882.935	74.01	99.31	-25.31	54.64	19.37	PK
* 7	5925	66.46	68.22	-1.76	47.04	19.42	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5795MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Vertical

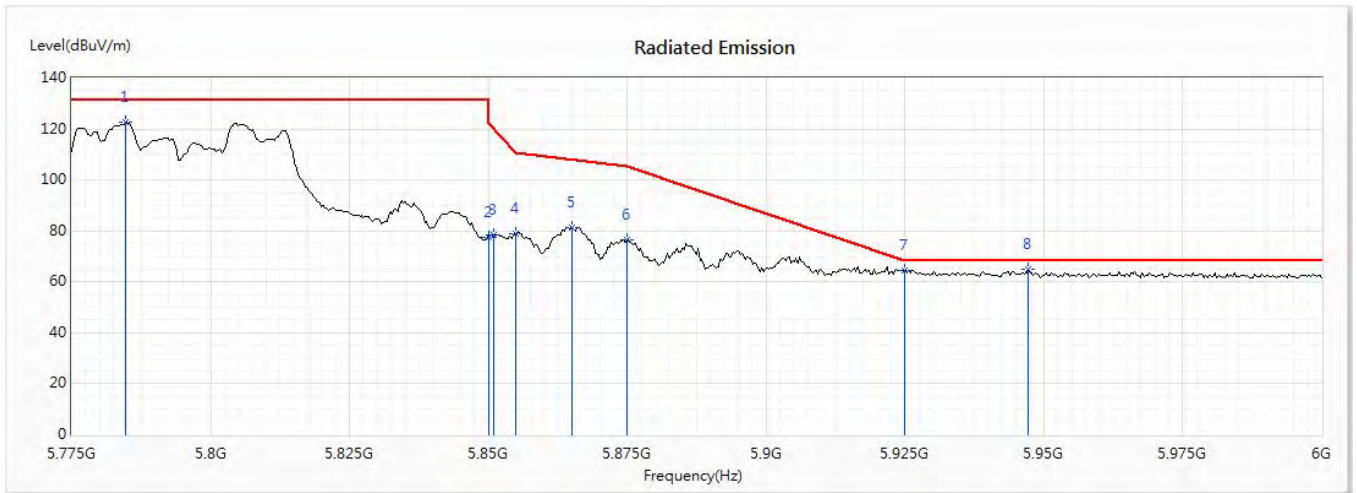

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5784.783	122.66	--	--	103.59	19.07	PK
2	5850	77.62	122.20	-44.58	58.29	19.33	PK
3	5850.978	78.61	119.97	-41.36	59.28	19.33	PK
4	5855	79.00	110.80	-31.80	59.66	19.34	PK
5	5865	81.13	108.00	-26.86	61.79	19.34	PK
6	5875	76.27	105.20	-28.93	56.92	19.35	PK
7	5925	64.30	68.22	-3.92	44.88	19.42	PK
* 8	5947.174	64.94	68.22	-3.28	45.50	19.44	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02

Horizontal

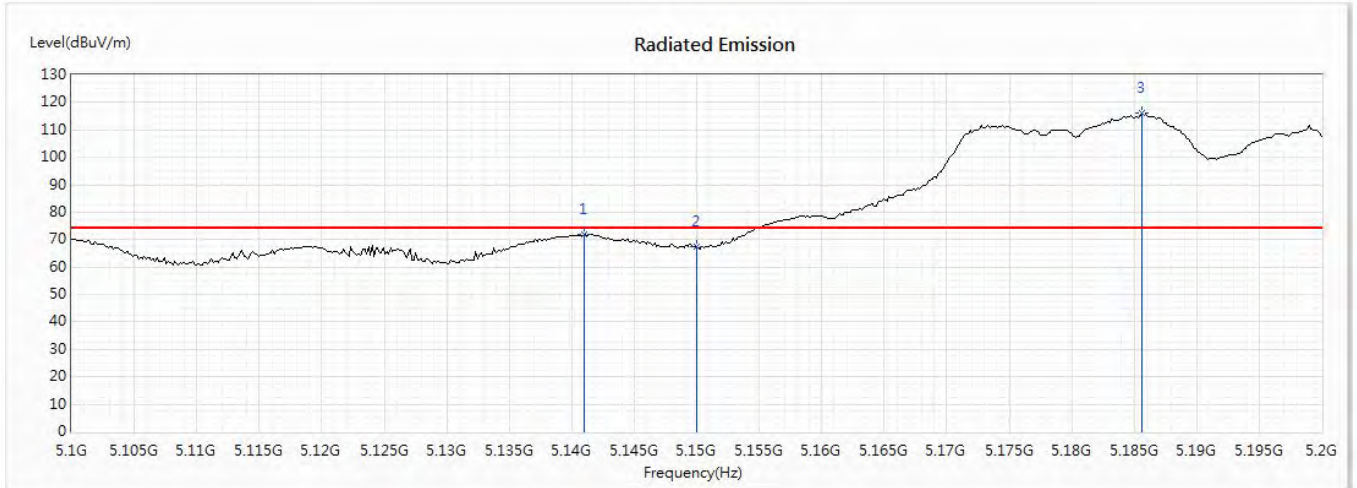


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5141.014	71.87	74.00	-2.13	54.16	17.71	PK
2	5150	67.57	74.00	-6.43	49.84	17.73	PK
3	5185.652	116.07	--	--	98.28	17.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02

Horizontal

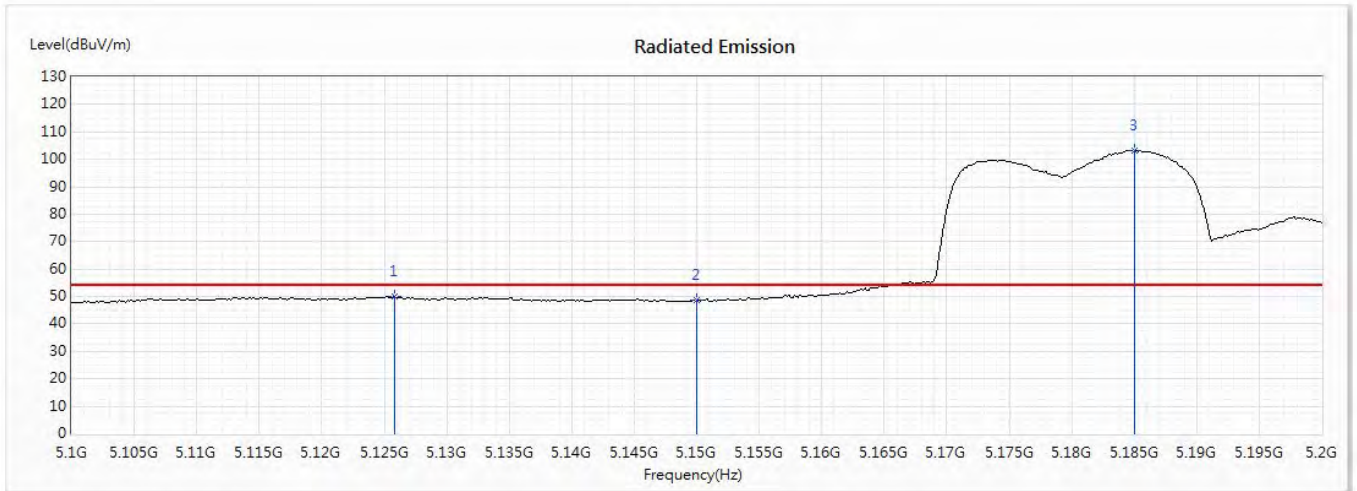


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5125.797	49.87	54.00	-4.13	32.18	17.69	AV
2	5150	48.58	54.00	-5.42	30.85	17.73	AV
3	5185.072	103.18	--	--	85.39	17.79	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02

Vertical

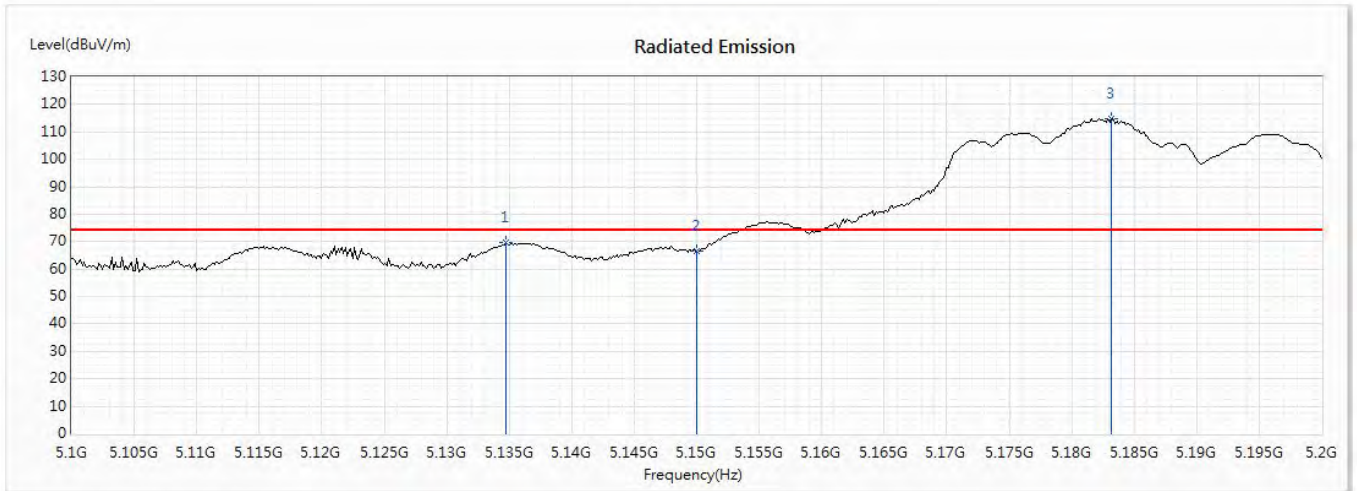


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5134.783	69.70	74.00	-4.30	52.00	17.70	PK
2	5150	66.70	74.00	-7.30	48.97	17.73	PK
3	5183.188	114.97	--	--	97.19	17.78	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5210MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02

Vertical

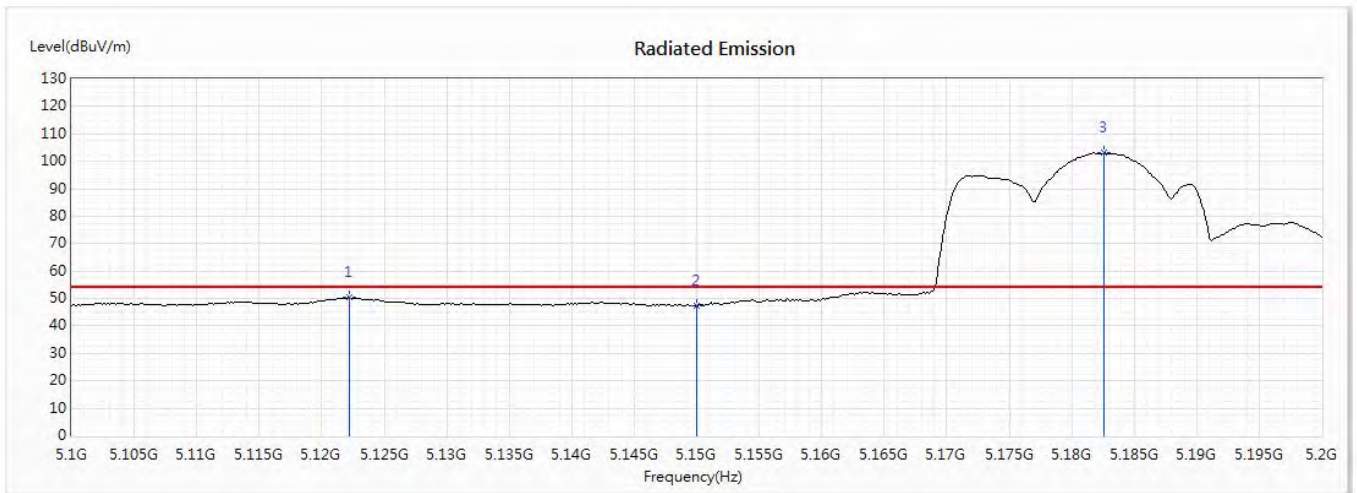


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5122.174	50.26	54.00	-3.74	32.57	17.69	AV
2	5150	47.48	54.00	-6.52	29.75	17.73	AV
3	5182.609	103.12	--	--	85.34	17.78	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5775MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Horizontal

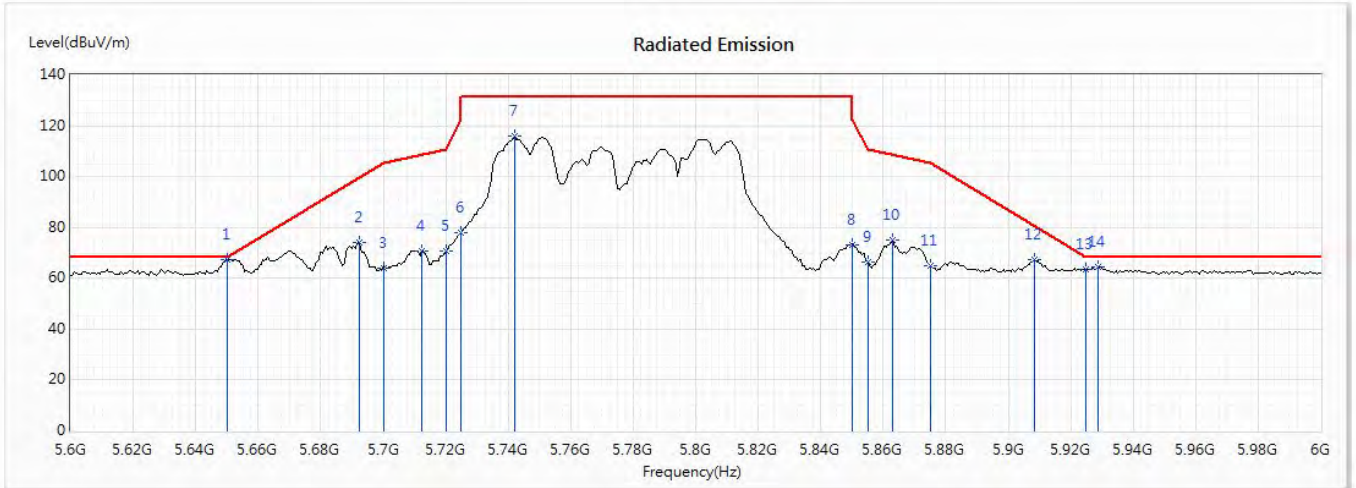

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5650	67.26	68.22	-0.96	48.61	18.65	PK
2	5692.174	74.23	99.43	-25.21	55.45	18.78	PK
3	5700	64.14	105.20	-41.06	45.33	18.81	PK
4	5712.464	70.64	108.69	-38.05	51.77	18.87	PK
5	5720	70.59	110.80	-40.21	51.69	18.90	PK
6	5725	78.14	122.20	-44.06	59.21	18.93	PK
7	5742.029	116.15	--	--	97.13	19.02	PK
8	5850	73.27	122.20	-48.93	53.94	19.33	PK
9	5855	66.25	110.80	-44.55	46.91	19.34	PK
10	5863.188	74.88	108.50	-33.63	55.54	19.34	PK
11	5875	65.07	105.20	-40.13	45.72	19.35	PK
12	5908.406	67.17	80.46	-13.29	47.78	19.39	PK
13	5925	63.44	68.22	-4.78	44.02	19.42	PK
14	5928.696	64.69	68.22	-3.53	45.26	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 9: Transmit (802.11ax-80MBW-CDD) (5775MHz)
 (RU Config-edges mode)
 Test Date : 2020/07/02


Vertical

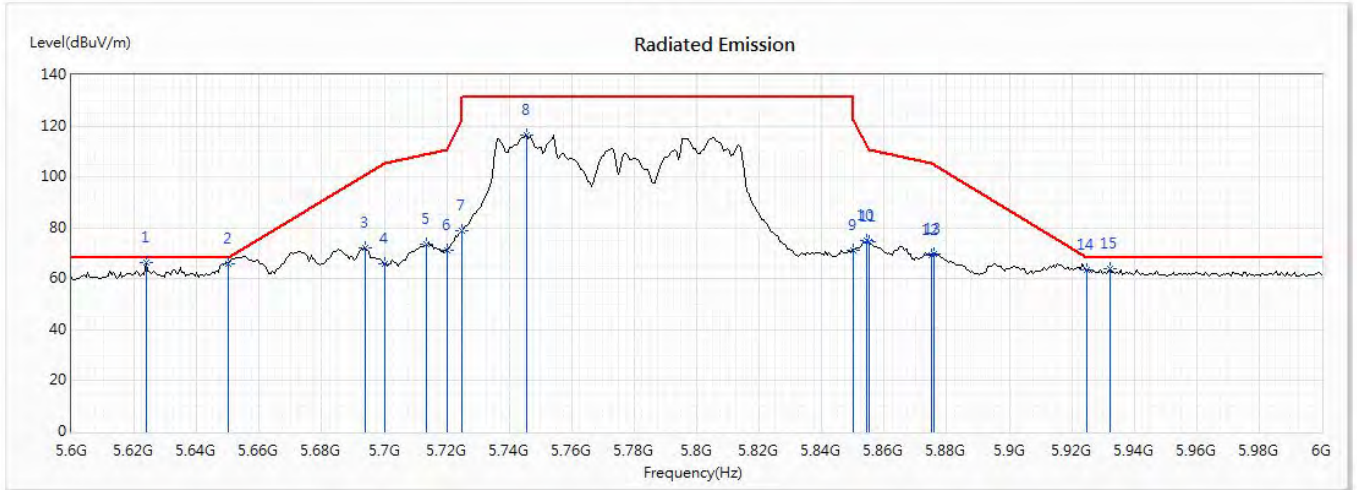

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5623.768	66.59	68.22	-1.63	48.01	18.58	PK
2	5650	65.87	68.22	-2.35	47.22	18.65	PK
3	5693.913	72.39	100.72	-28.33	53.60	18.79	PK
4	5700	65.99	105.20	-39.21	47.18	18.81	PK
5	5713.623	73.80	109.02	-35.22	54.93	18.87	PK
6	5720	71.31	110.80	-39.49	52.41	18.90	PK
7	5725	78.97	122.20	-43.23	60.04	18.93	PK
8	5745.507	116.37	--	--	97.34	19.03	PK
9	5850	71.22	122.20	-50.98	51.89	19.33	PK
10	5854.493	74.86	111.96	-37.09	55.53	19.33	PK
11	5855	74.35	110.80	-36.45	55.01	19.34	PK
12	5875	69.31	105.20	-35.89	49.96	19.35	PK
13	5875.942	69.88	104.50	-34.62	50.52	19.36	PK
14	5925	63.43	68.22	-4.79	44.01	19.42	PK
15	5932.174	63.81	68.22	-4.41	44.38	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming) (5180MHz)
 Test Date : 2020/07/02

Horizontal

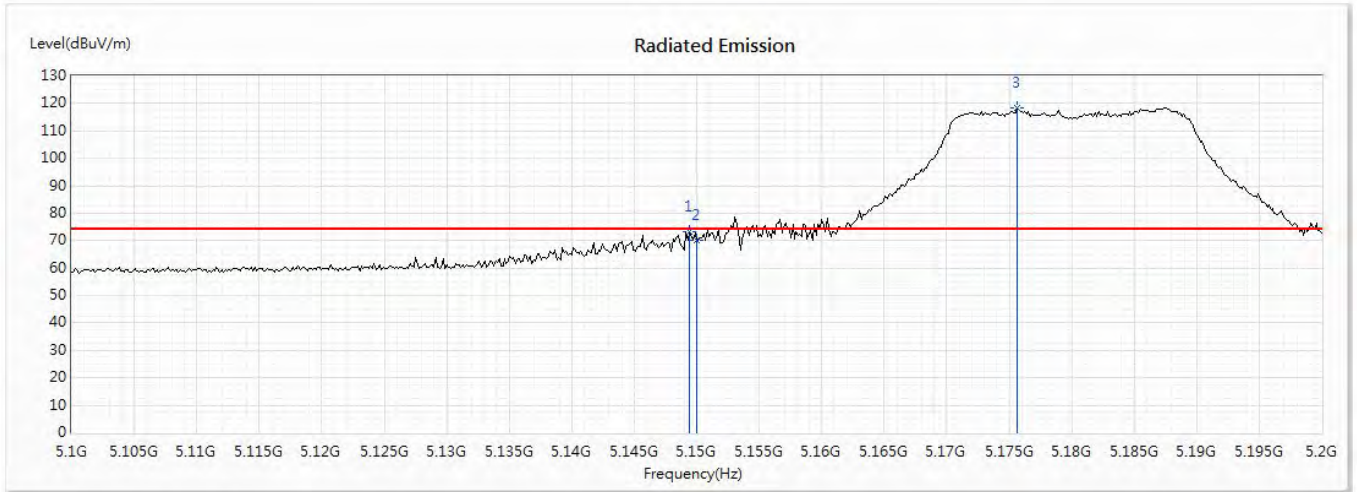


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5149.42	73.22	74.00	-0.78	55.49	17.73	PK
2	5150	69.92	74.00	-4.08	52.19	17.73	PK
3	5175.652	118.41	--	--	100.64	17.77	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming) (5180MHz)
 Test Date : 2020/07/02

Horizontal

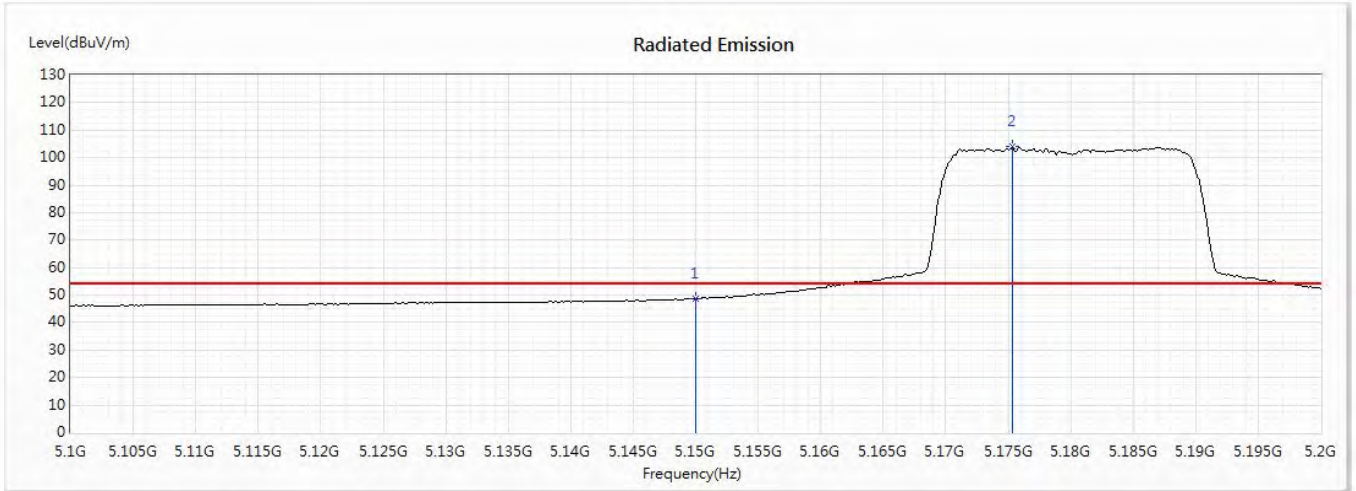


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	48.80	54.00	-5.20	31.07	17.73	AV
2	5175.362	104.01	--	--	86.24	17.77	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming) (5180MHz)
 Test Date : 2020/07/02

Vertical

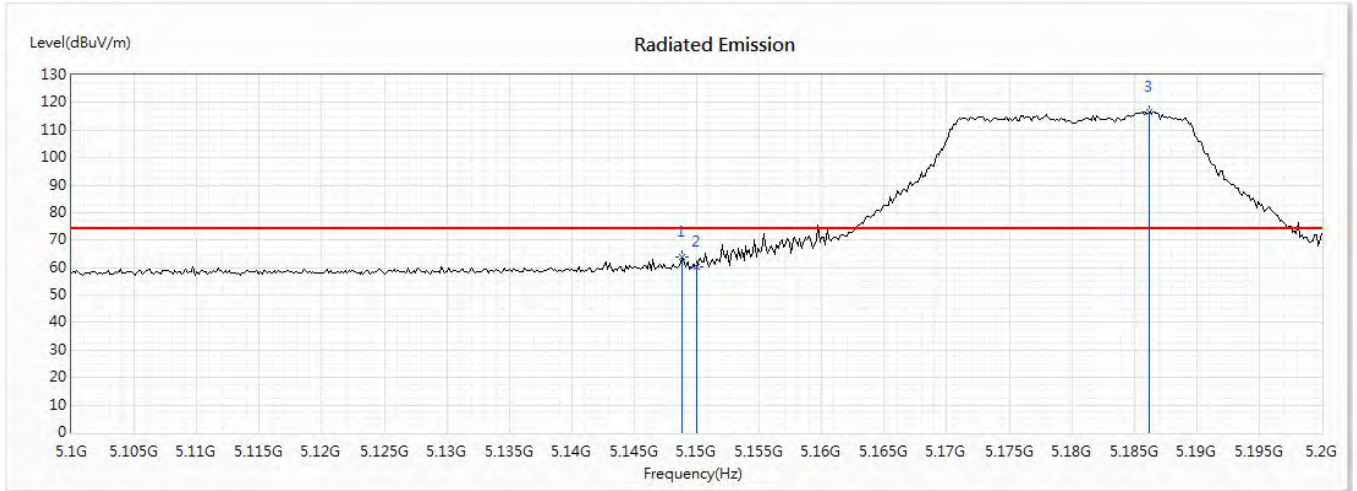


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5148.841	63.96	74.00	-10.04	46.23	17.73	PK
2	5150	60.21	74.00	-13.79	42.48	17.73	PK
3	5186.232	116.60	--	--	98.81	17.79	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming) (5180MHz)
 Test Date : 2020/07/02

Vertical

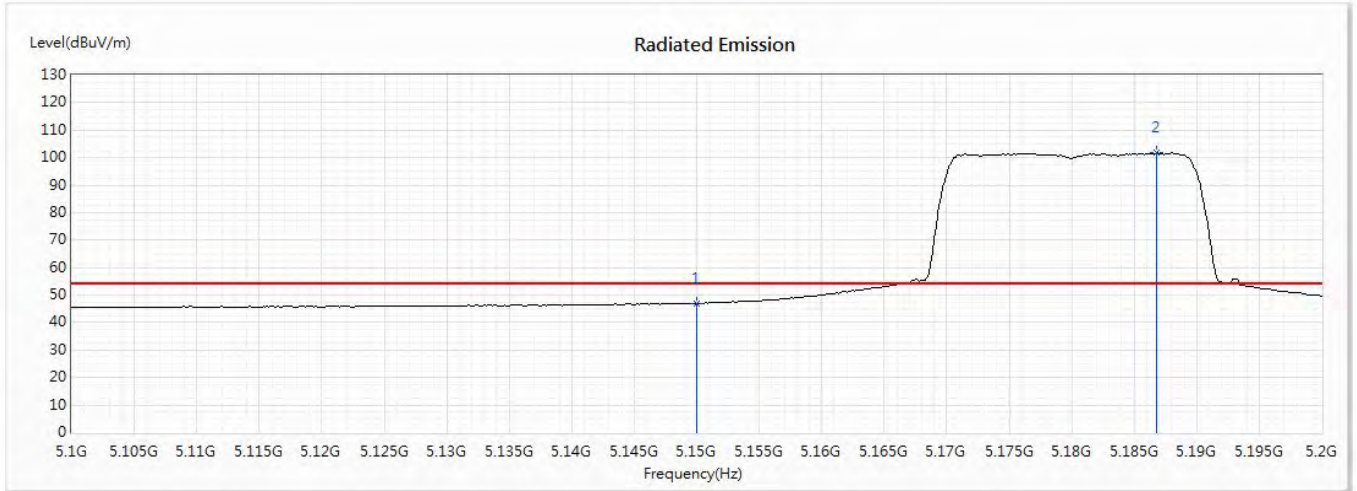


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	47.10	54.00	-6.90	29.37	17.73	AV
2	5186.812	101.76	--	--	83.97	17.79	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming) (5745MHz)
 Test Date : 2020/07/02


Horizontal

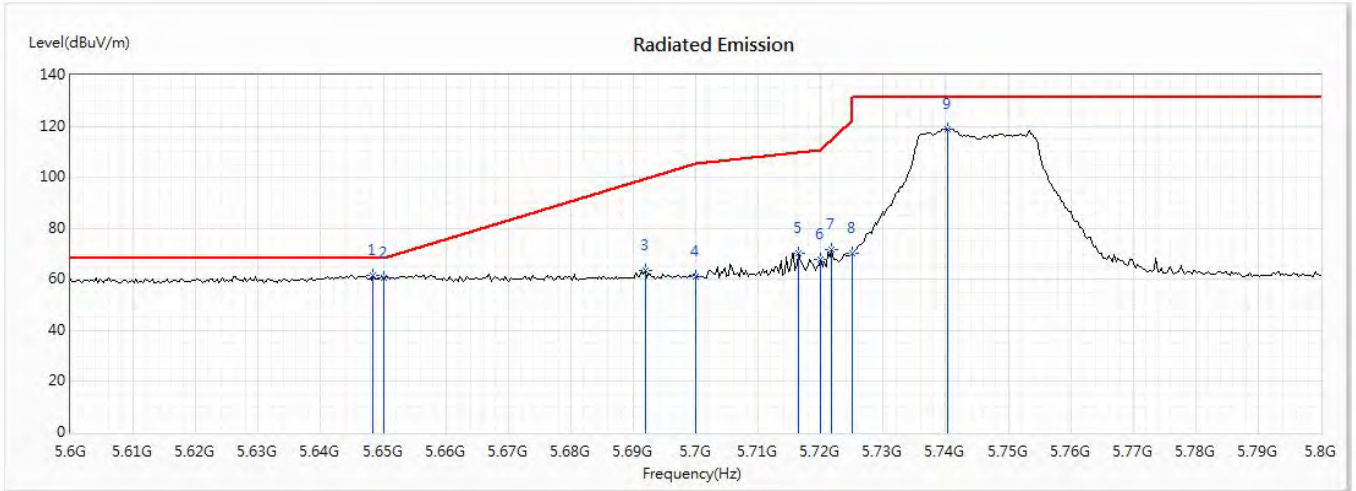

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5648.406	61.54	68.22	-6.68	42.89	18.65	PK
2	5650	60.75	68.22	-7.47	42.10	18.65	PK
3	5691.884	63.70	99.22	-35.52	44.92	18.78	PK
4	5700	61.30	105.20	-43.90	42.49	18.81	PK
5	5716.522	70.44	109.83	-39.39	51.55	18.89	PK
6	5720	67.74	110.80	-43.06	48.84	18.90	PK
7	5721.739	71.67	114.77	-43.09	52.75	18.92	PK
8	5725	70.01	122.20	-52.19	51.08	18.93	PK
9	5740.29	119.03	--	--	100.02	19.01	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming) (5745MHz)
 Test Date : 2020/07/02


Vertical

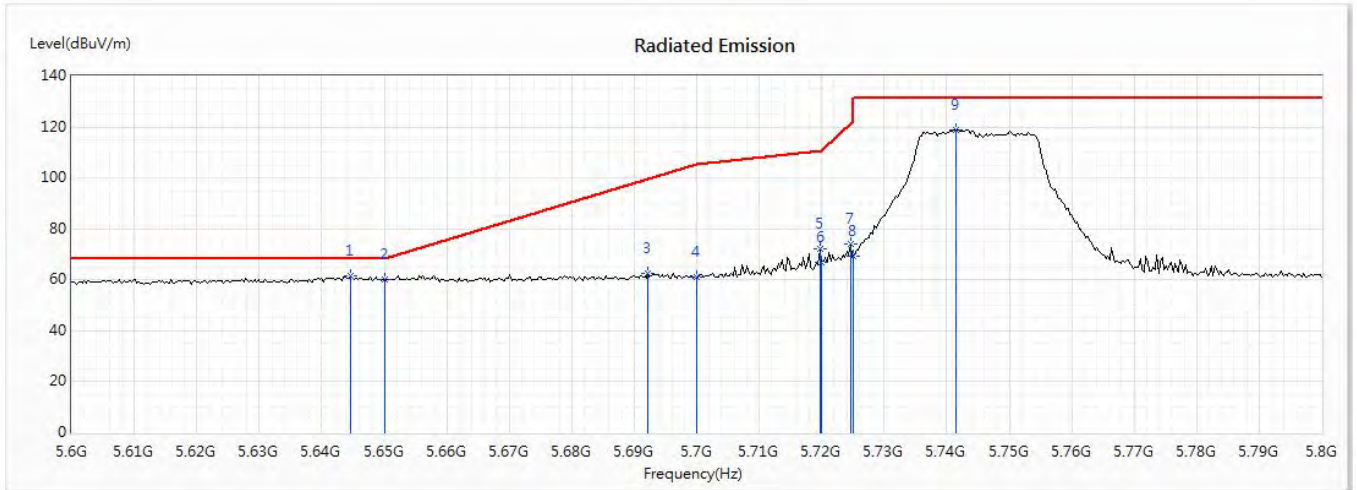

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5644.638	61.64	68.22	-6.58	43.00	18.64	PK
2	5650	60.21	68.22	-8.01	41.56	18.65	PK
3	5692.174	62.77	99.43	-36.66	43.99	18.78	PK
4	5700	61.22	105.20	-43.98	42.41	18.81	PK
5	5719.71	72.04	110.72	-38.68	53.14	18.90	PK
6	5720	66.65	110.80	-44.15	47.75	18.90	PK
7	5724.638	74.04	121.37	-47.34	55.11	18.93	PK
8	5725	69.31	122.20	-52.89	50.38	18.93	PK
9	5741.449	119.02	--	--	100.00	19.02	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming) (5825MHz)
 Test Date : 2020/07/02


Horizontal

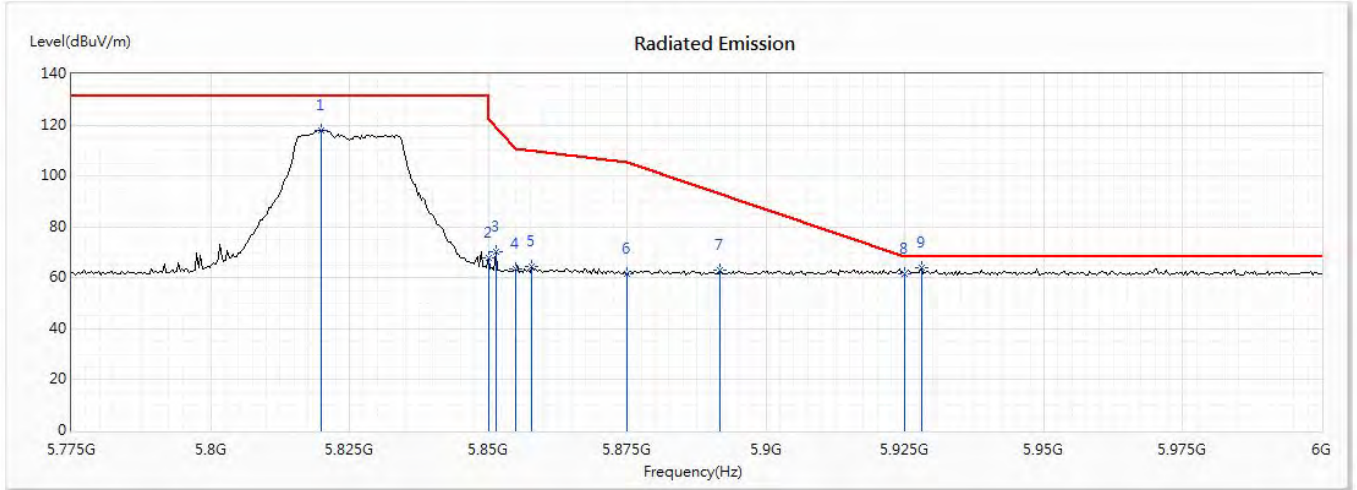

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5820	117.78	--	--	98.60	19.18	PK
2	5850	67.99	122.20	-54.21	48.66	19.33	PK
3	5851.304	70.05	119.23	-49.17	50.72	19.33	PK
4	5855	63.44	110.80	-47.36	44.10	19.34	PK
5	5857.826	64.67	110.01	-45.34	45.33	19.34	PK
6	5875	61.75	105.20	-43.45	42.40	19.35	PK
7	5891.739	62.96	92.78	-29.82	43.58	19.38	PK
8	5925	61.48	68.22	-6.74	42.06	19.42	PK
* 9	5927.935	63.87	68.22	-4.35	44.44	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 15: Transmit (802.11ax-20MBW-Beamforming) (5825MHz)
 Test Date : 2020/07/02


Vertical

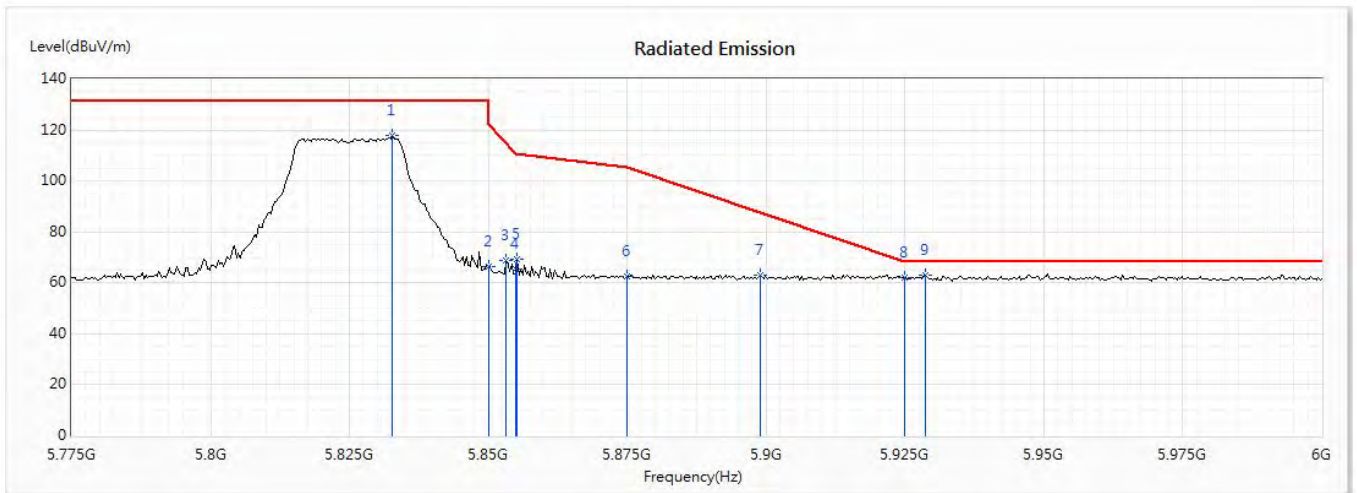

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5832.717	117.79	--	--	98.55	19.24	PK
2	5850	66.33	122.20	-55.87	47.00	19.33	PK
3	5853.261	68.93	114.76	-45.83	49.60	19.33	PK
4	5855	65.29	110.80	-45.51	45.95	19.34	PK
5	5855.217	69.07	110.74	-41.66	49.73	19.34	PK
6	5875	62.34	105.20	-42.86	42.99	19.35	PK
7	5898.913	63.08	87.47	-24.39	43.68	19.40	PK
8	5925	61.95	68.22	-6.27	42.53	19.42	PK
* 9	5928.587	63.13	68.22	-5.09	43.70	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming) (5190MHz)
 Test Date : 2020/07/02

Horizontal

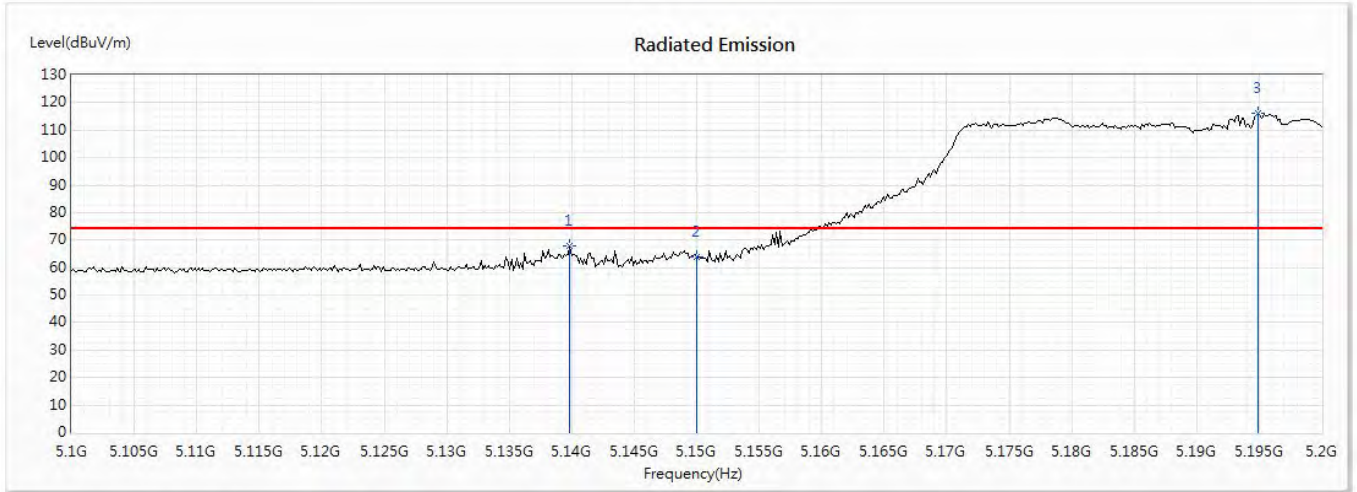


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5139.855	67.72	74.00	-6.28	50.01	17.71	PK
2	5150	63.86	74.00	-10.14	46.13	17.73	PK
3	5194.928	116.02	--	--	98.22	17.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming) (5190MHz)
 Test Date : 2020/07/02

Horizontal

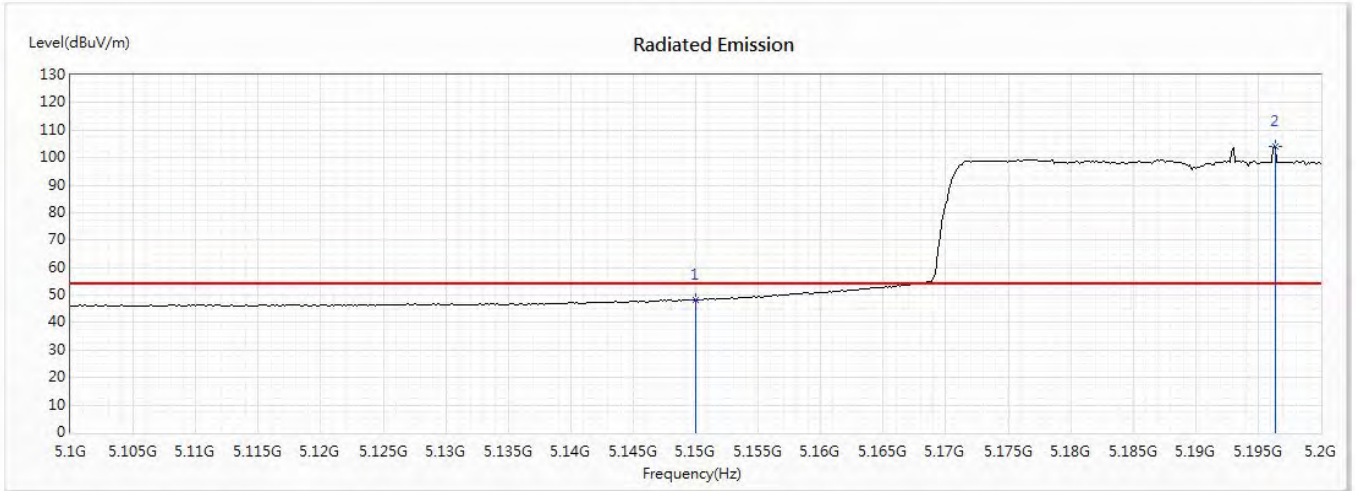


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	48.29	54.00	-5.71	30.56	17.73	AV
2	5196.377	104.09	--	--	86.28	17.81	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming) (5190MHz)
 Test Date : 2020/07/02

Vertical

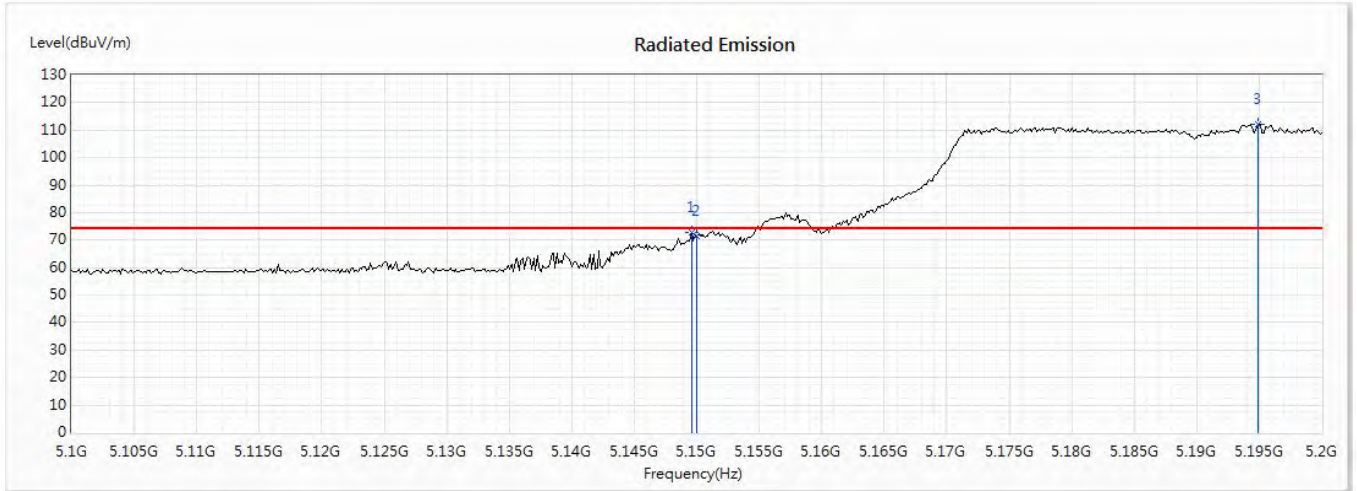


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5149.565	72.79	74.00	-1.21	55.06	17.73	PK
2	5150	71.31	74.00	-2.69	53.58	17.73	PK
3	5194.928	112.33	--	--	94.53	17.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming) (5190MHz)
 Test Date : 2020/07/02

Vertical

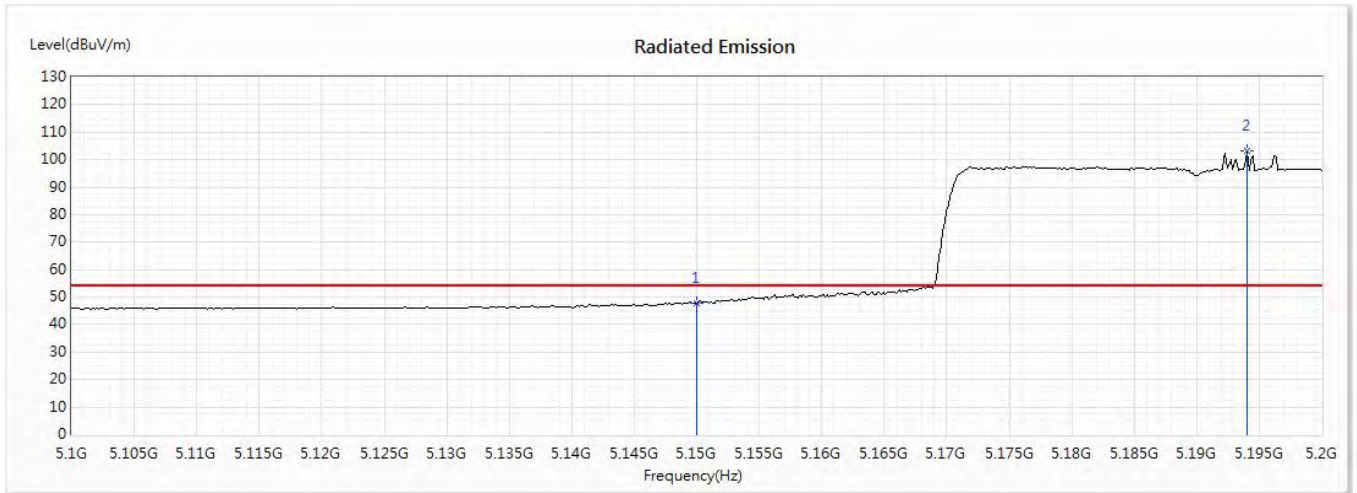


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	47.96	54.00	-6.04	30.23	17.73	AV
2	5194.058	103.28	--	--	85.48	17.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5755MHz)
 Test Date : 2020/07/02


Horizontal

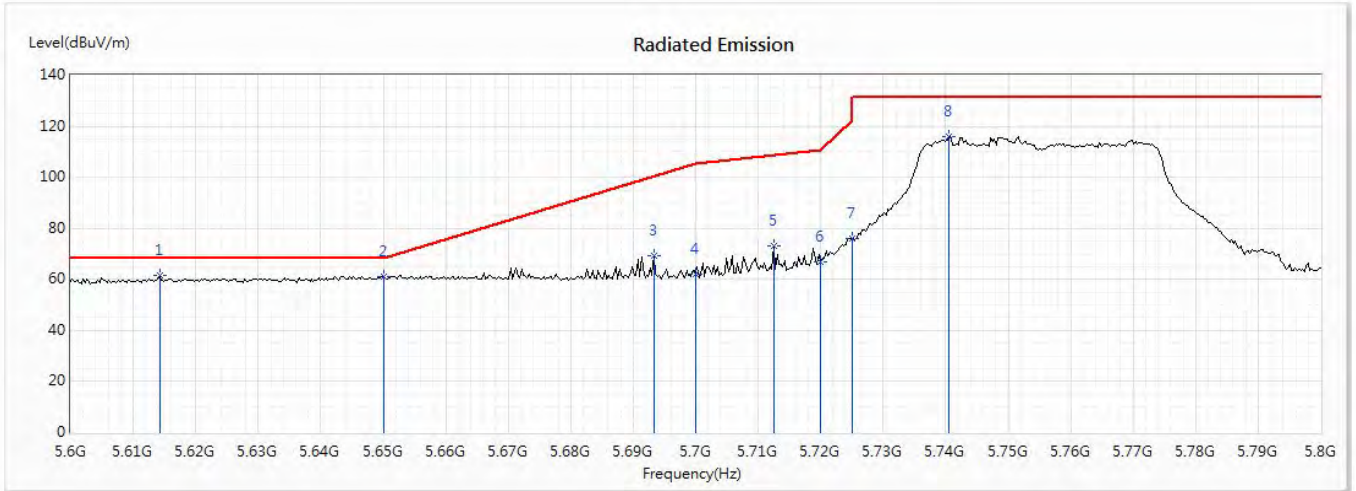

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5614.203	61.82	68.22	-6.40	43.27	18.55	PK
2	5650	60.98	68.22	-7.24	42.33	18.65	PK
3	5693.333	69.42	100.29	-30.87	50.63	18.79	PK
4	5700	62.00	105.20	-43.20	43.19	18.81	PK
5	5712.464	73.07	108.69	-35.62	54.20	18.87	PK
6	5720	66.88	110.80	-43.92	47.98	18.90	PK
7	5725	75.91	122.20	-46.29	56.98	18.93	PK
8	5740.58	115.97	--	--	96.96	19.01	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming)(5755MHz)
 Test Date : 2020/07/02


Vertical

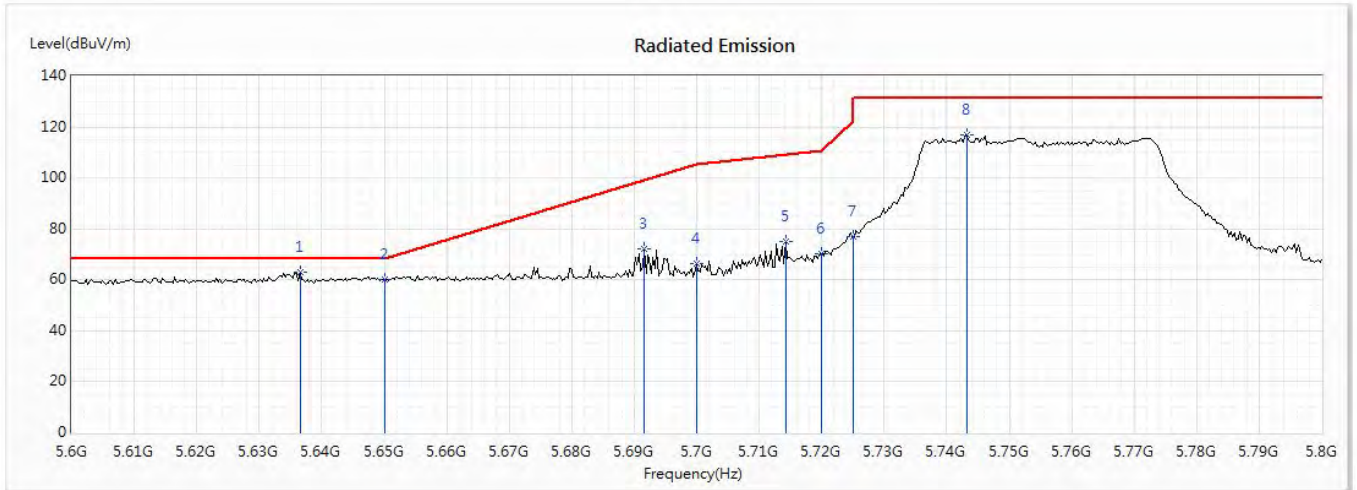

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
* 1	5636.522	63.09	68.22	-5.13	44.47	18.62	PK
2	5650	60.02	68.22	-8.20	41.37	18.65	PK
3	5691.594	72.32	99.01	-26.69	53.54	18.78	PK
4	5700	66.61	105.20	-38.59	47.80	18.81	PK
5	5714.203	75.03	109.18	-34.15	56.15	18.88	PK
6	5720	70.36	110.80	-40.44	51.46	18.90	PK
7	5725	77.19	122.20	-45.01	58.26	18.93	PK
8	5743.188	116.78	--	--	97.76	19.02	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming) (5795MHz)
 Test Date : 2020/07/02


Horizontal

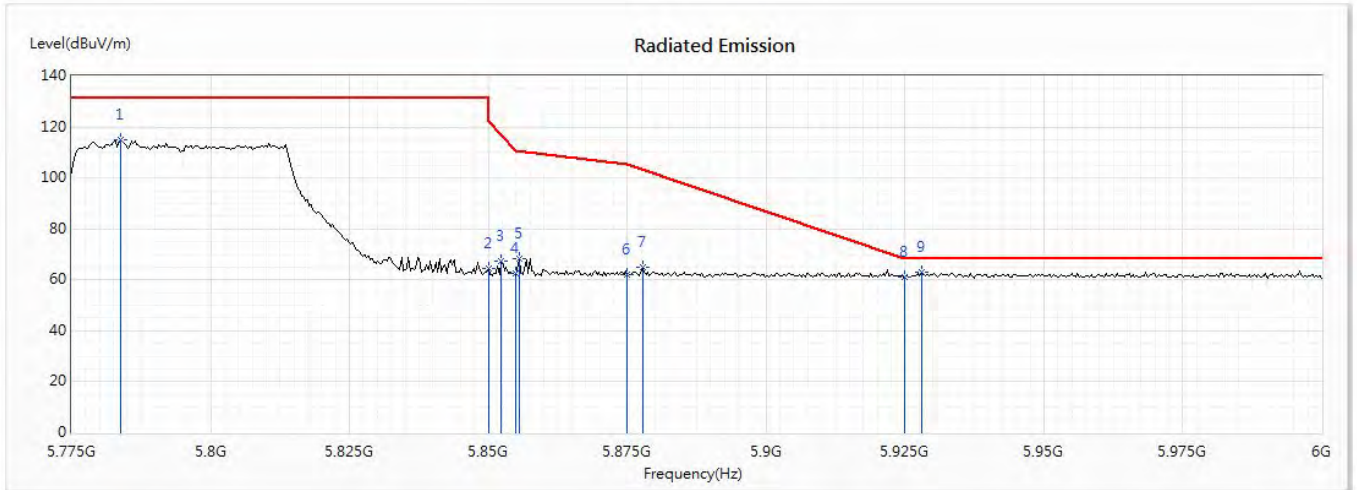

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5783.804	114.79	--	--	95.72	19.07	PK
2	5850	64.48	122.20	-57.72	45.15	19.33	PK
3	5852.283	67.21	116.99	-49.78	47.88	19.33	PK
4	5855	62.42	110.80	-48.38	43.08	19.34	PK
5	5855.543	68.38	110.65	-42.27	49.04	19.34	PK
6	5875	62.26	105.20	-42.94	42.91	19.35	PK
7	5877.717	64.98	103.18	-38.20	45.62	19.36	PK
8	5925	60.98	68.22	-7.24	41.56	19.42	PK
* 9	5927.935	62.79	68.22	-5.43	43.36	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 16: Transmit (802.11ax-40MBW-Beamforming) (5795MHz)
 Test Date : 2020/07/02


Vertical

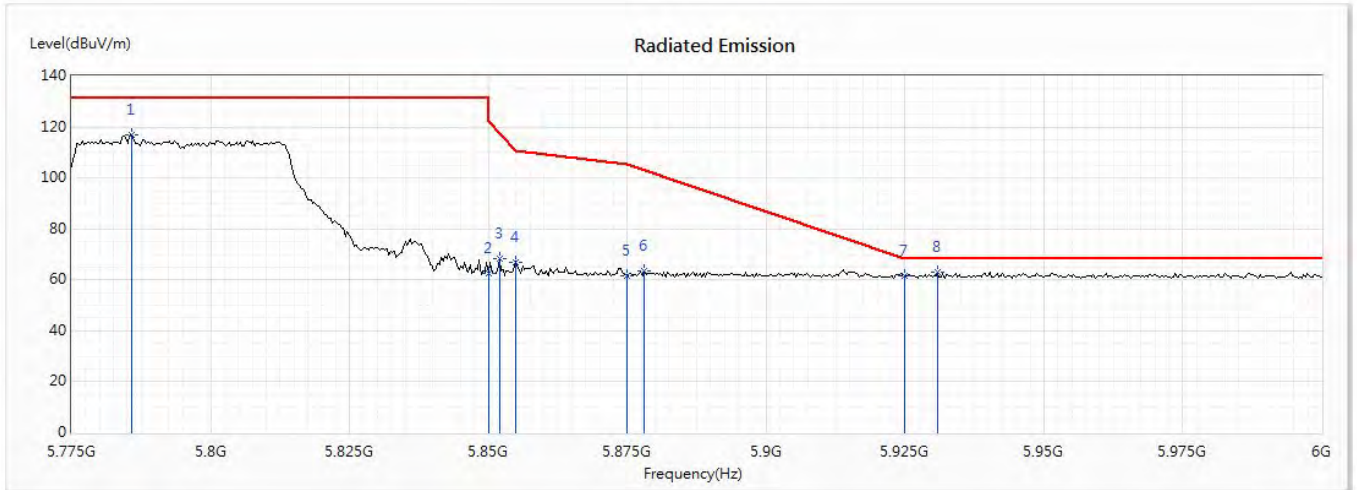

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5785.761	116.85	--	--	97.77	19.08	PK
2	5850	62.73	122.20	-59.47	43.40	19.33	PK
3	5851.957	68.22	117.74	-49.52	48.89	19.33	PK
4	5855	66.88	110.80	-43.92	47.54	19.34	PK
5	5875	61.82	105.20	-43.38	42.47	19.35	PK
6	5878.043	63.42	102.94	-39.52	44.06	19.36	PK
7	5925	61.43	68.22	-6.79	42.01	19.42	PK
* 8	5930.87	63.11	68.22	-5.11	43.68	19.43	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming) (5210MHz)
 Test Date : 2020/07/02

Horizontal

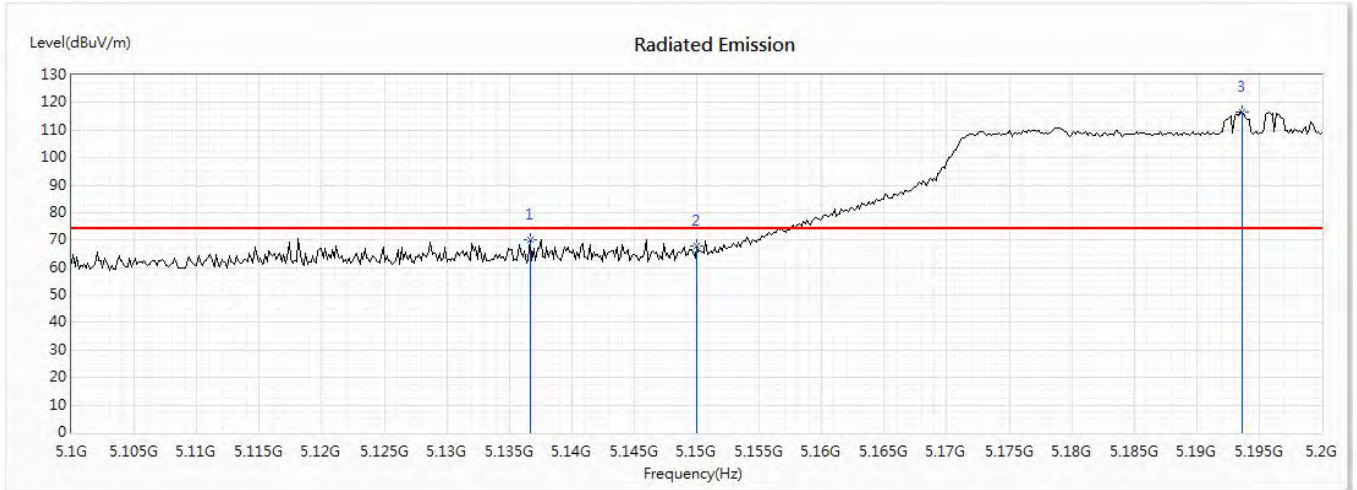


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5136.667	70.27	74.00	-3.73	52.56	17.71	PK
2	5150	67.85	74.00	-6.15	50.12	17.73	PK
3	5193.623	116.71	--	--	98.91	17.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming) (5210MHz)
 Test Date : 2020/07/02

Horizontal

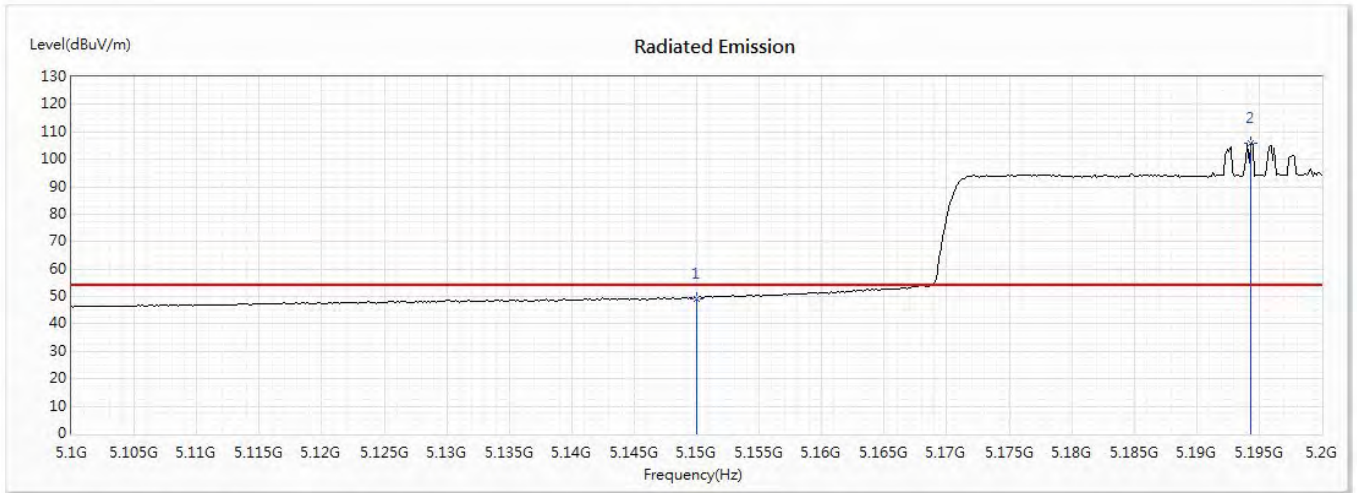


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5150	49.32	54.00	-4.68	31.59	17.73	AV
2	5194.348	105.66	--	--	87.86	17.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming) (5210MHz)
 Test Date : 2020/07/02

Vertical

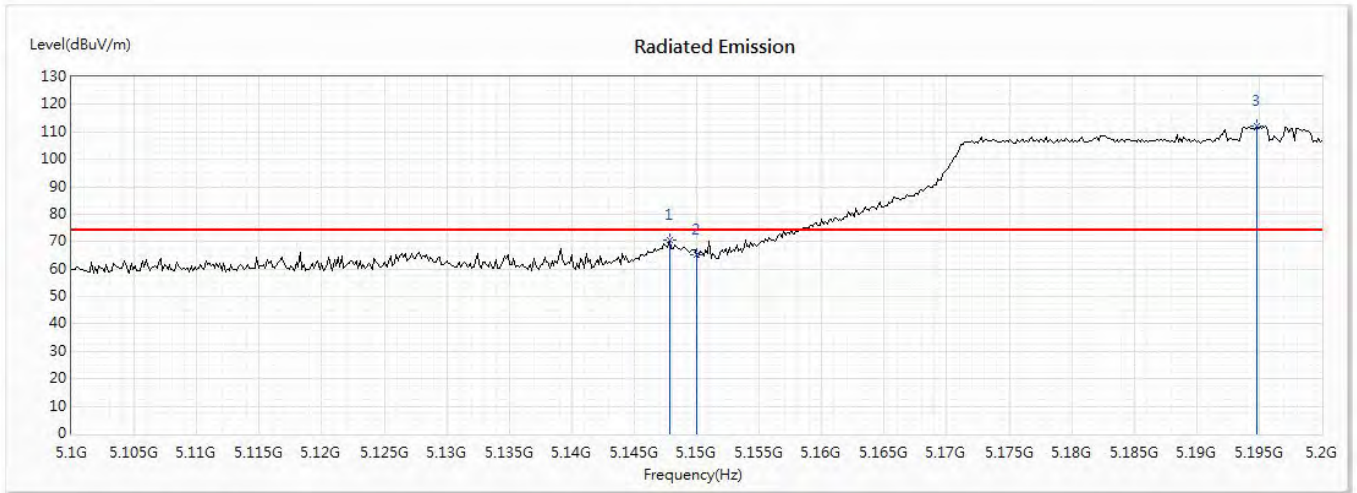


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5147.826	70.78	74.00	-3.22	53.05	17.73	PK
2	5150	65.43	74.00	-8.57	47.70	17.73	PK
3	5194.783	112.02	--	--	94.22	17.80	PK

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming) (5210MHz)
 Test Date : 2020/07/02

Vertical

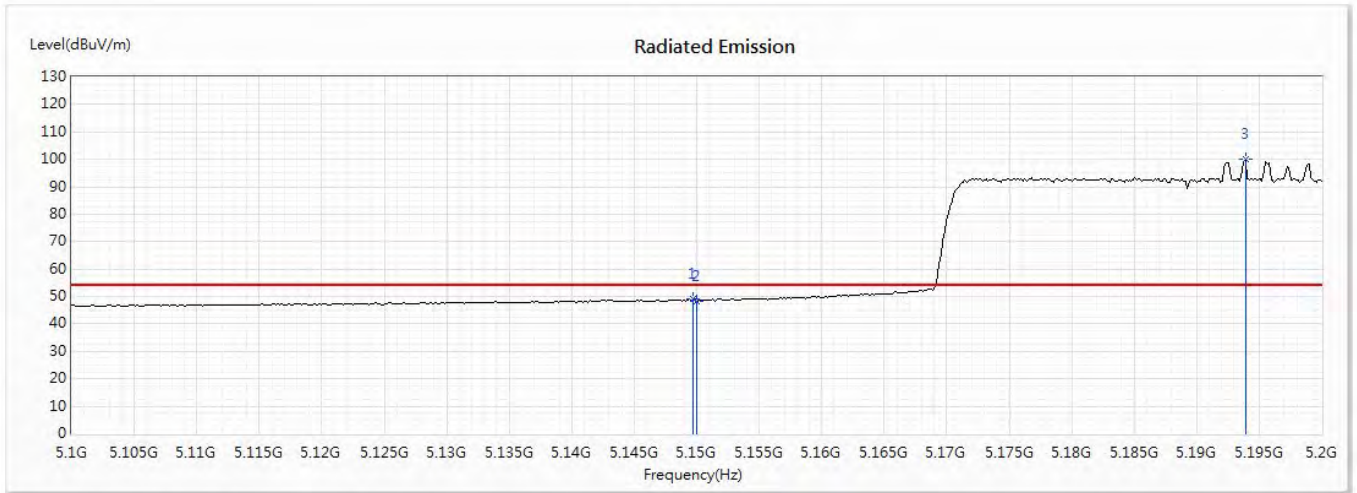


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5149.71	49.07	54.00	-4.93	31.34	17.73	AV
2	5150	48.31	54.00	-5.69	30.58	17.73	AV
3	5193.913	99.98	--	--	82.18	17.80	AV

Note:

1. All readings above 1GHz are performed with peak and/or average measurements as necessary.
2. Measurement Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection.

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming) (5775MHz)
 Test Date : 2020/07/02


Horizontal

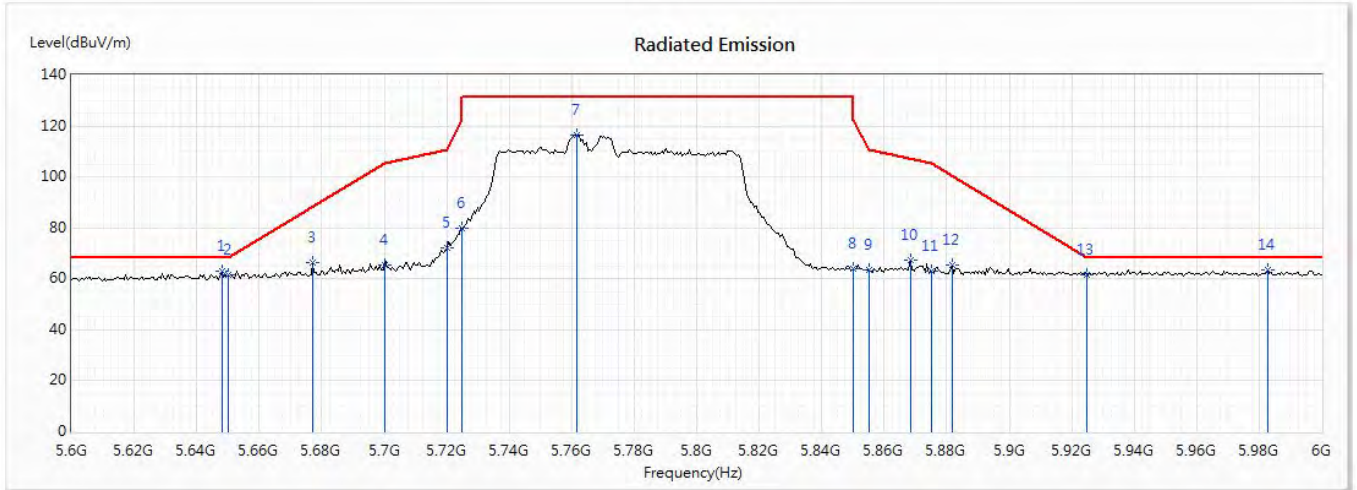

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5648.116	62.86	68.22	-5.36	44.21	18.65	PK
2	5650	61.65	68.22	-6.57	43.00	18.65	PK
3	5677.101	66.48	88.30	-21.83	47.75	18.73	PK
4	5700	65.66	105.20	-39.54	46.85	18.81	PK
5	5720	72.20	110.80	-38.60	53.30	18.90	PK
6	5725	79.64	122.20	-42.56	60.71	18.93	PK
7	5761.739	116.41	--	--	97.35	19.06	PK
8	5850	63.97	122.20	-58.23	44.64	19.33	PK
9	5855	63.54	110.80	-47.26	44.20	19.34	PK
10	5868.406	67.37	107.04	-39.68	48.03	19.34	PK
11	5875	62.90	105.20	-42.30	43.55	19.35	PK
12	5881.739	65.48	100.20	-34.71	46.12	19.36	PK
13	5925	61.74	68.22	-6.48	42.32	19.42	PK
* 14	5982.609	63.53	68.22	-4.69	43.99	19.54	PK

Product : LV55
 Test Item : Band Edge Data
 Test Mode : Mode 17: Transmit (802.11ax-80MBW-Beamforming) (5775MHz)
 Test Date : 2020/07/02

Vertical

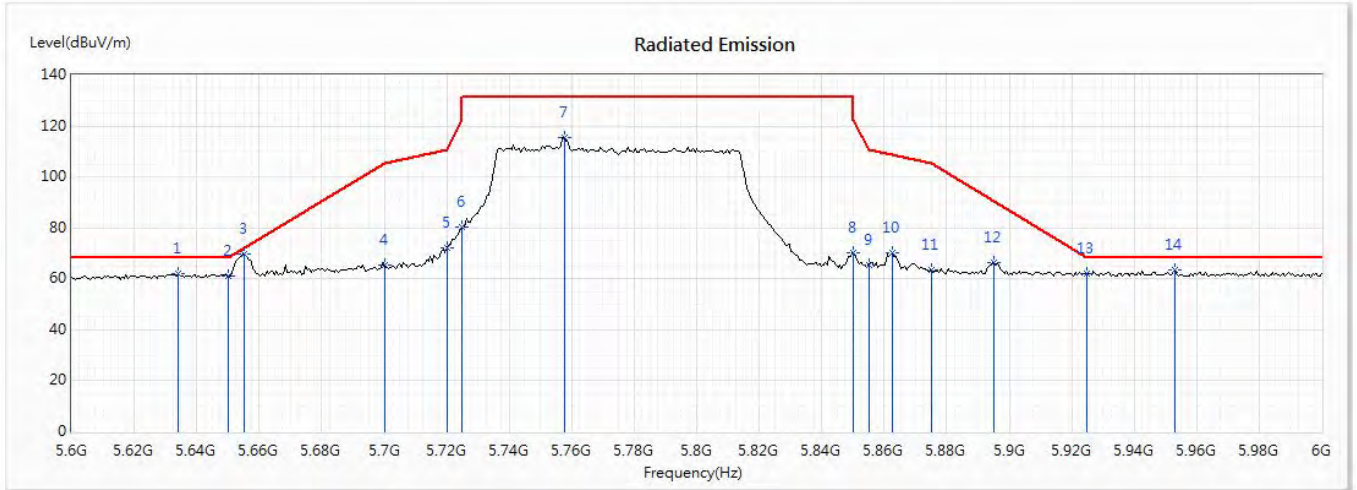


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB/m)	Detector Type
1	5634.203	62.26	68.22	-5.96	43.64	18.62	PK
2	5650	60.95	68.22	-7.27	42.30	18.65	PK
* 3	5655.072	69.59	71.99	-2.40	50.93	18.66	PK
4	5700	65.42	105.20	-39.78	46.61	18.81	PK
5	5720	72.18	110.80	-38.62	53.28	18.90	PK
6	5725	80.14	122.20	-42.06	61.21	18.93	PK
7	5757.681	115.57	--	--	96.51	19.06	PK
8	5850	70.19	122.20	-52.01	50.86	19.33	PK
9	5855	65.51	110.80	-45.29	46.17	19.34	PK
10	5862.609	70.07	108.67	-38.60	50.73	19.34	PK
11	5875	63.32	105.20	-41.88	43.97	19.35	PK
12	5895.072	66.51	90.32	-23.80	47.12	19.39	PK
13	5925	61.92	68.22	-6.30	42.50	19.42	PK
14	5953.043	63.30	68.22	-4.92	43.85	19.45	PK

Product : LV55
Test Item : Band Edge Data
Test Mode : Mode 1: Transmit (802.11a-CDD) (5240MHz)
Test Date : 2020/07/03


Chain	Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
Chain A	5240	5248.1918	<5250	PASS
Chain B	5240	5248.2418	<5250	PASS
Chain C	5240	5248.2418	<5250	PASS
Chain D	5240	5248.2418	<5250	PASS

Channel 48: (Chain A)

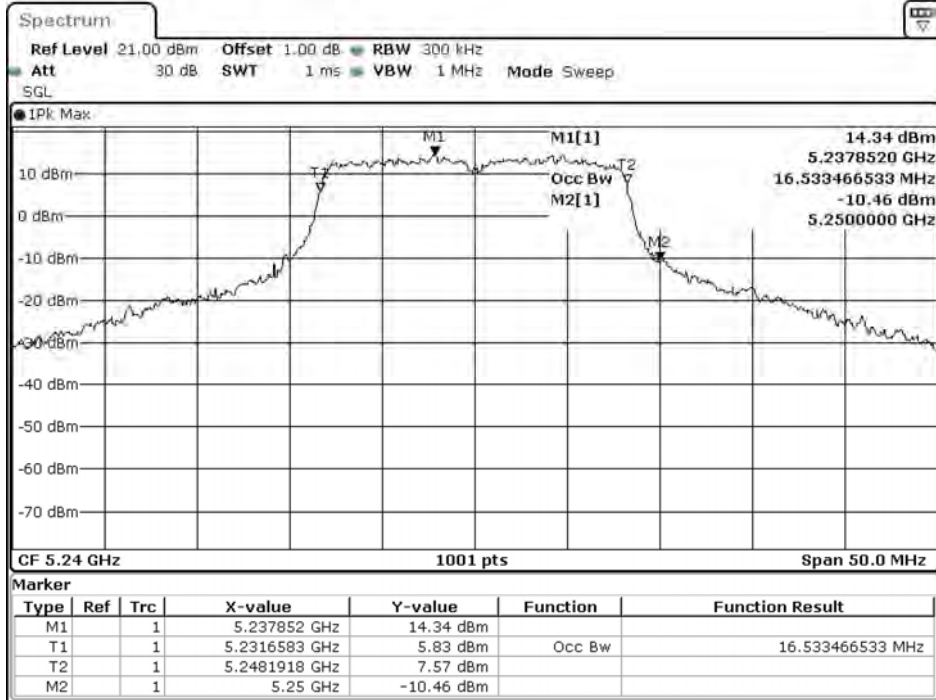


Date: 3.JUL.2020 21:59:07

Channel 48: (Chain B)

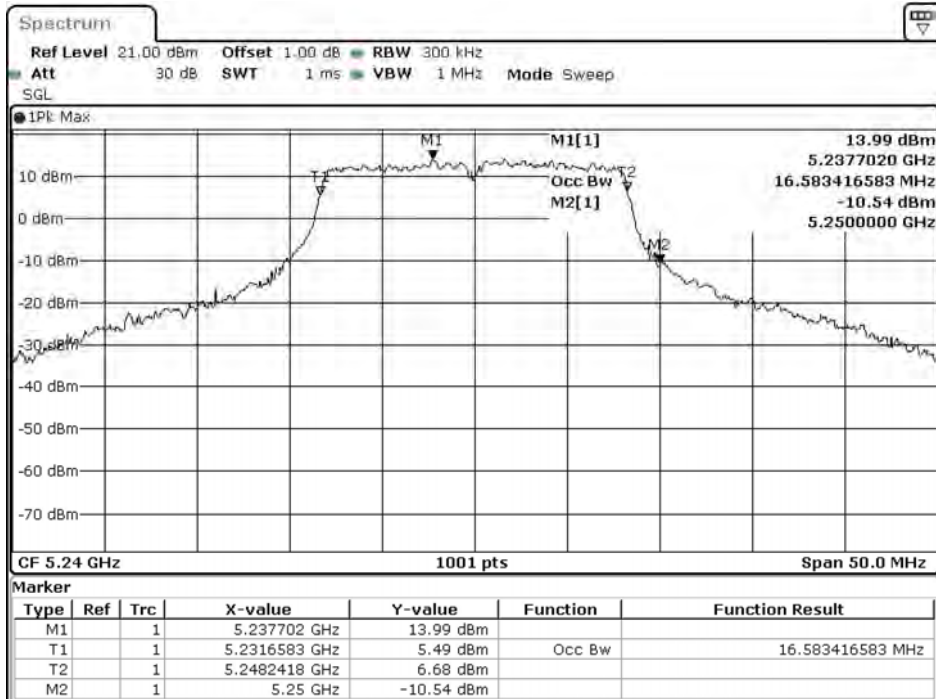


Date: 3.JUL.2020 22:02:10

Channel 48: (Chain C)

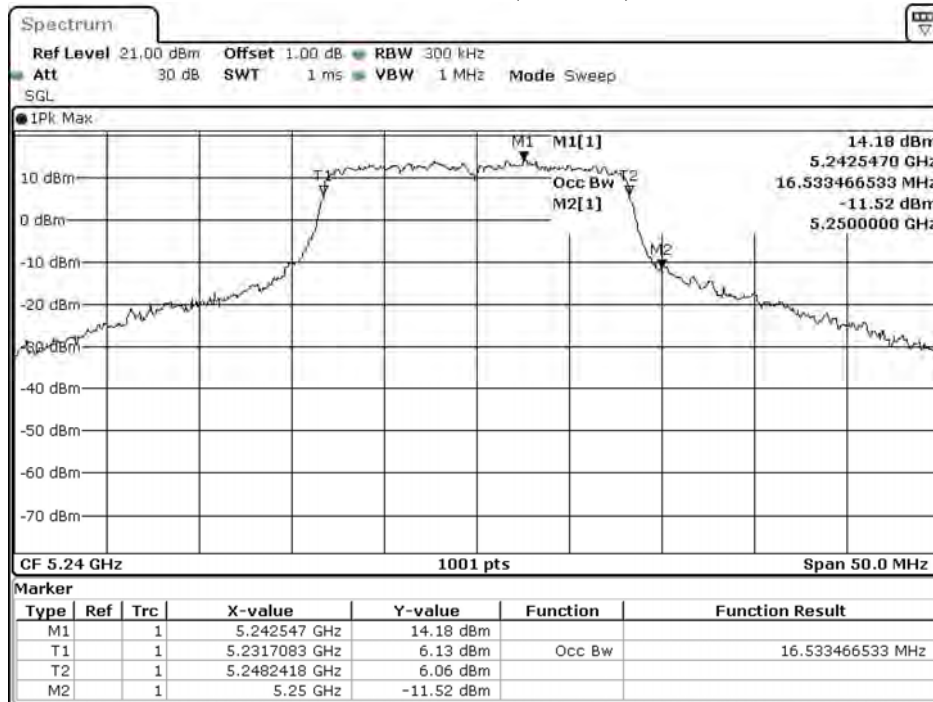

Date: 3.JUL.2020 14:04:34

Channel 48: (Chain D)

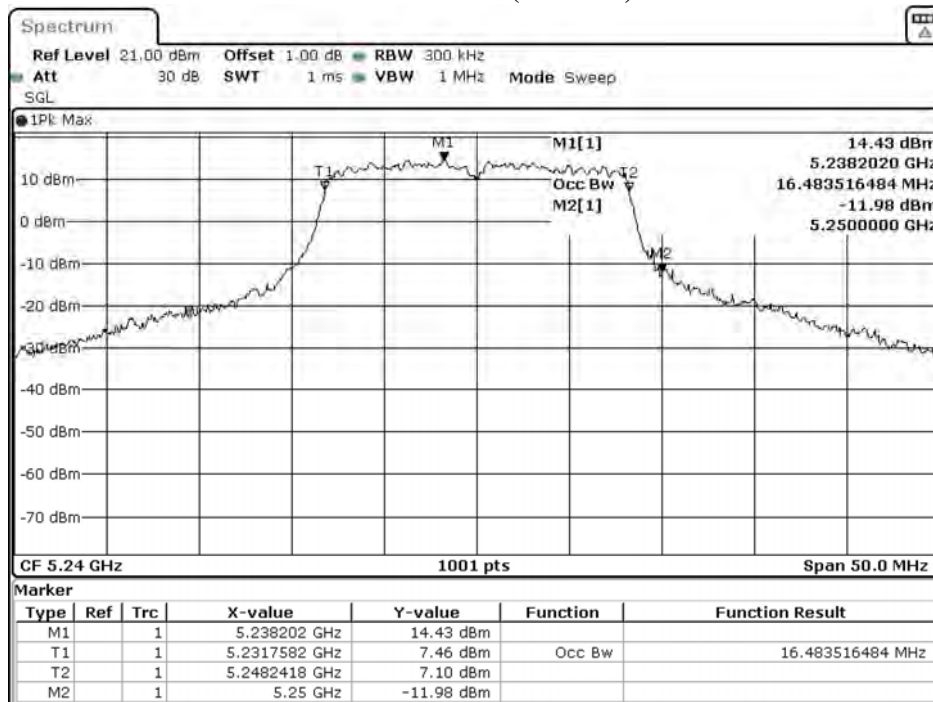


Date: 4.JUL.2020 02:02:27

Product : LV55
Test Item : Band Edge Data
Test Mode : Mode 7: Transmit (802.11ax-20MBW-CDD) (5240MHz) (RU Config-Full)
Test Date : 2020/07/03


Chain	Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
Chain A	5240	5249.4905	<5250	PASS
Chain B	5240	5249.4905	<5250	PASS
Chain C	5240	5249.5405	<5250	PASS
Chain D	5240	5249.5405	<5250	PASS

Channel 48: (Chain A)

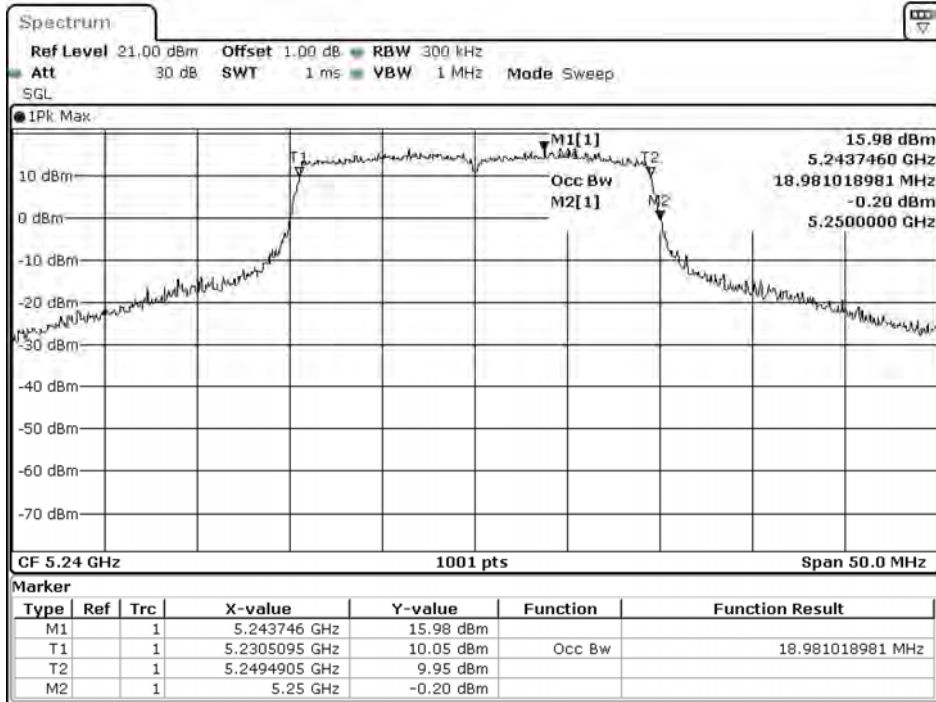


Date: 3.JUL.2020 22:13:43

Channel 48: (Chain B)

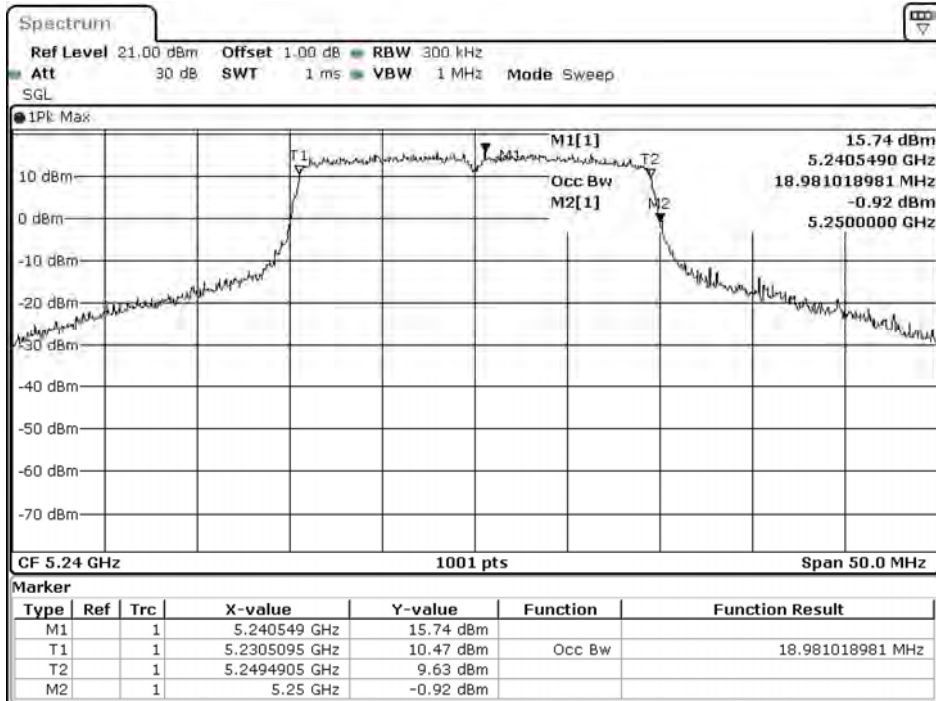


Date: 3.JUL.2020 22:16:47

Channel 48: (Chain C)

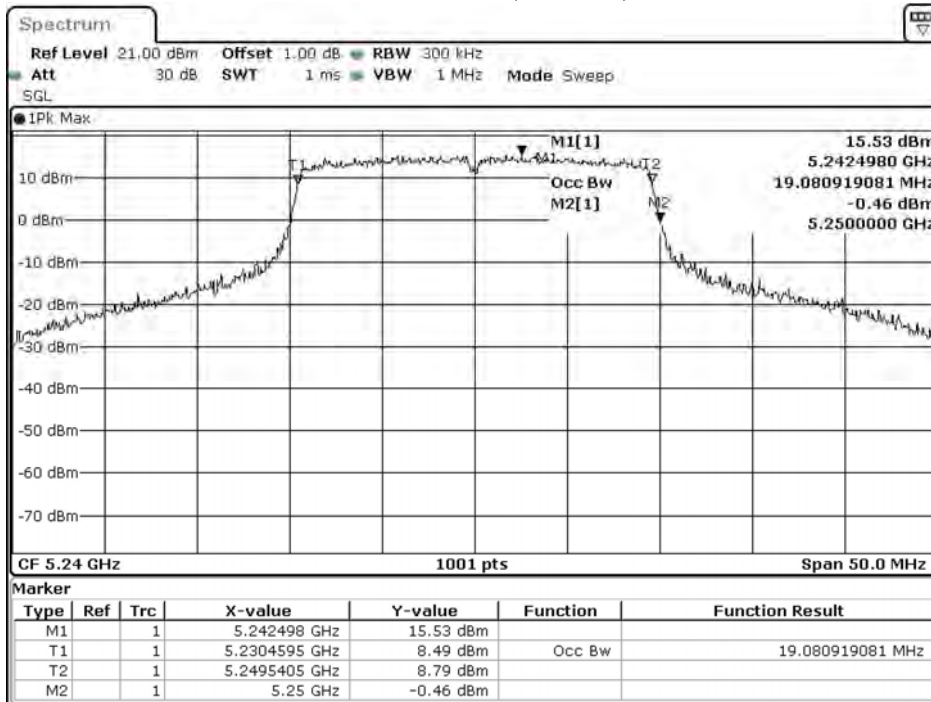

Date: 3.JUL.2020 14:19:11

Channel 48: (Chain D)

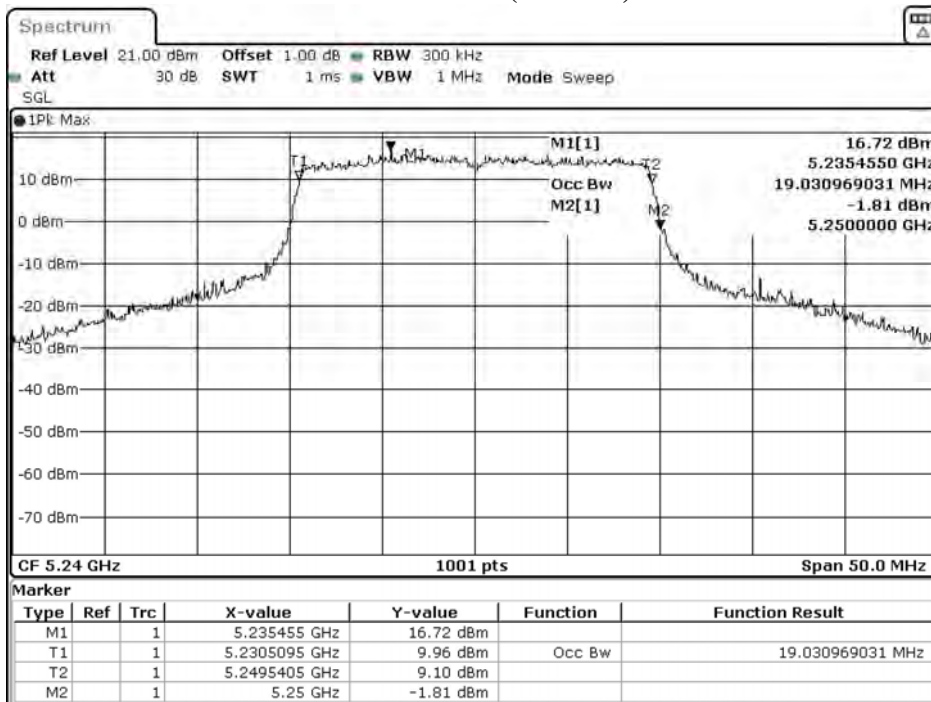

Date: 4.JUL.2020 02:17:04

Product : LV55
Test Item : Band Edge Data
Test Mode : Mode 8: Transmit (802.11ax-40MBW-CDD) (5230MHz) (RU Config-Full)
Test Date : 2020/07/03

Chain	Test Frequency (MHz)	Measurement Level (MHz)	Limit (MHz)	Result
Chain A	5230	5248.981	<5250	PASS
Chain B	5230	5248.981	<5250	PASS
Chain C	5230	5248.981	<5250	PASS
Chain D	5230	5248.981	<5250	PASS

