



2452MHz (30MHz-25GHz)

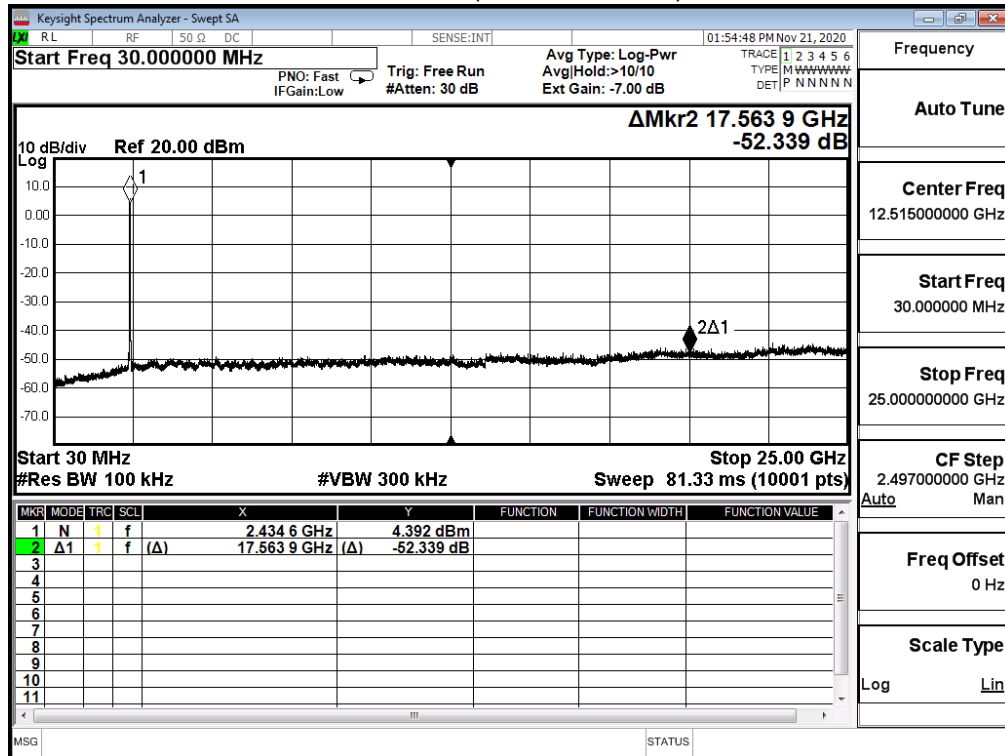


Product	Consumer Home Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: Transmit RU Mode_Full		
Date of Test	2020/11/09	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	61.0%

IEEE 802.11ax(40M)(ANT 1)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
3	2422	33.629	≥30	Pass
6	2437	38.258	≥30	Pass
9	2452	43.717	≥30	Pass


Channel 3 (2422MHz)

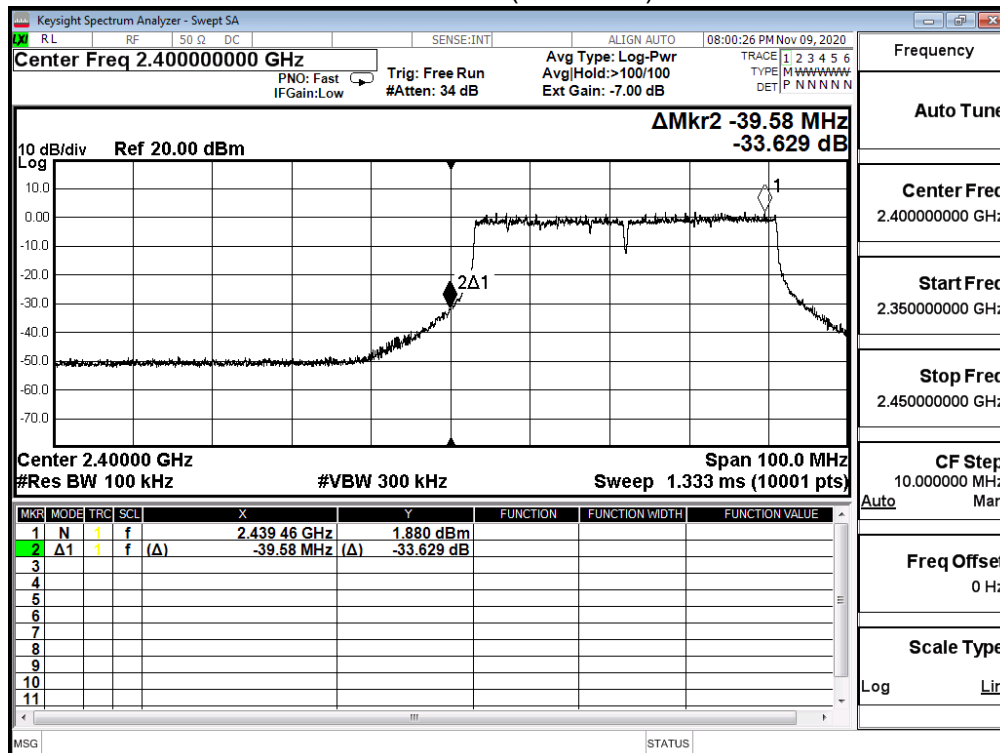


Channel 6 (2437MHz)

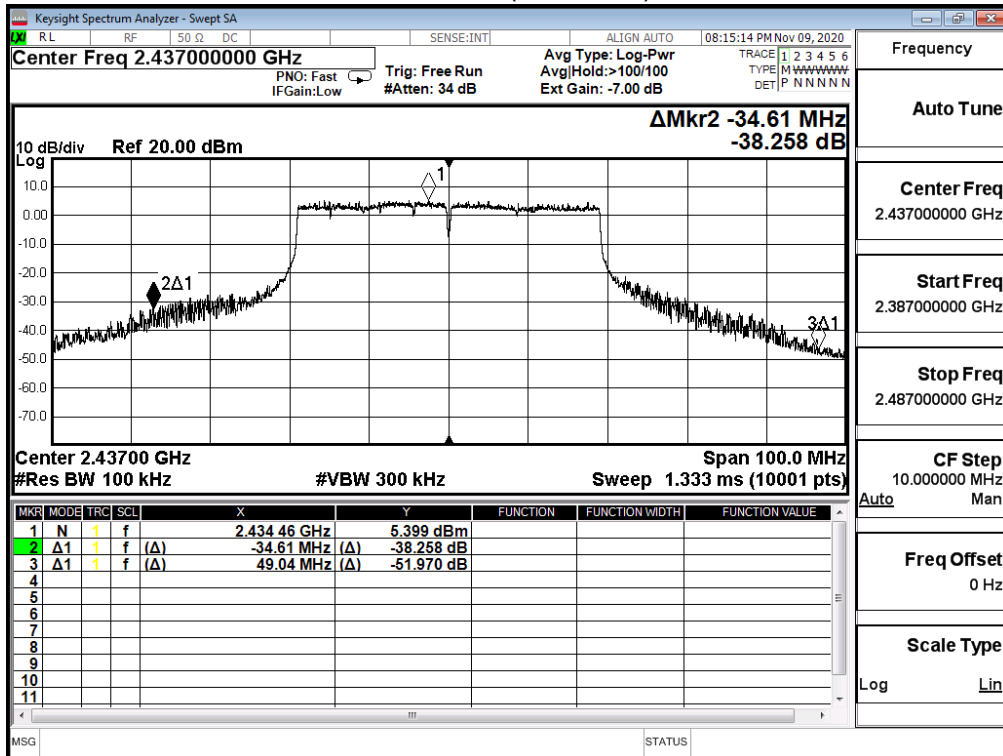


Channel 9 (2452MHz)

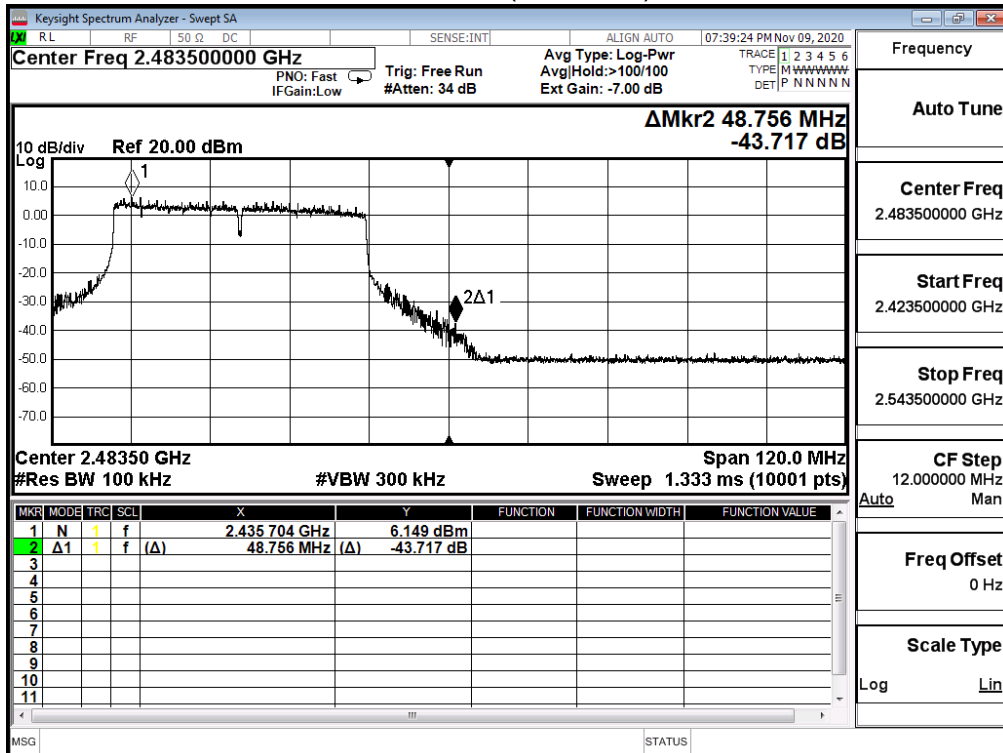


2422MHz 30MHz-25GHz)

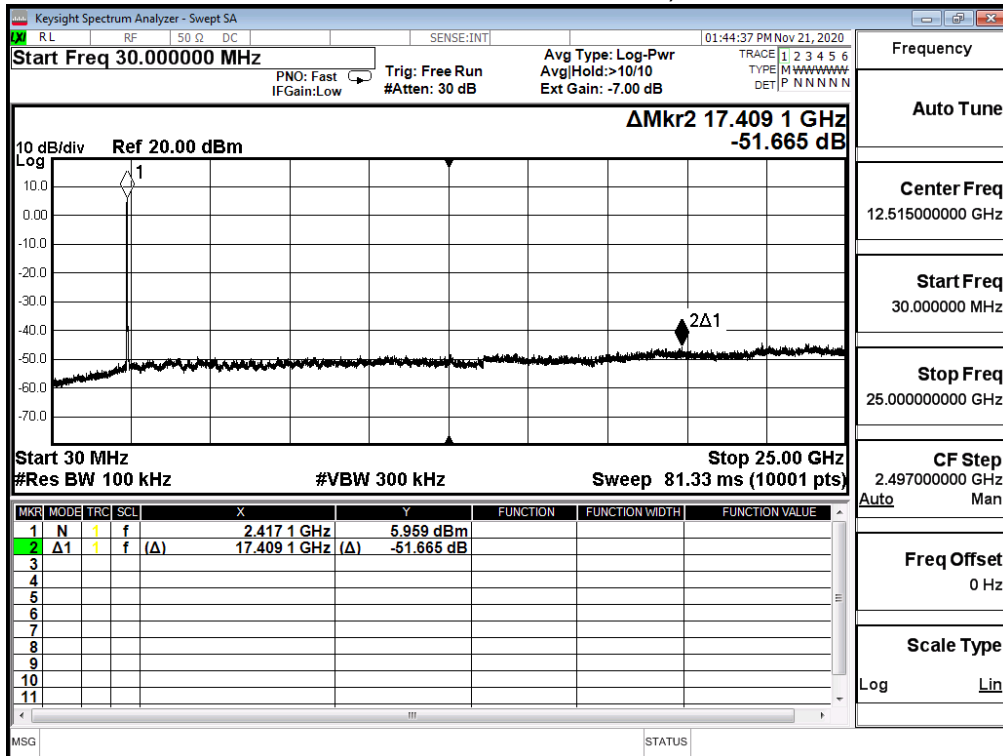

2437MHz (30MHz-25GHz)

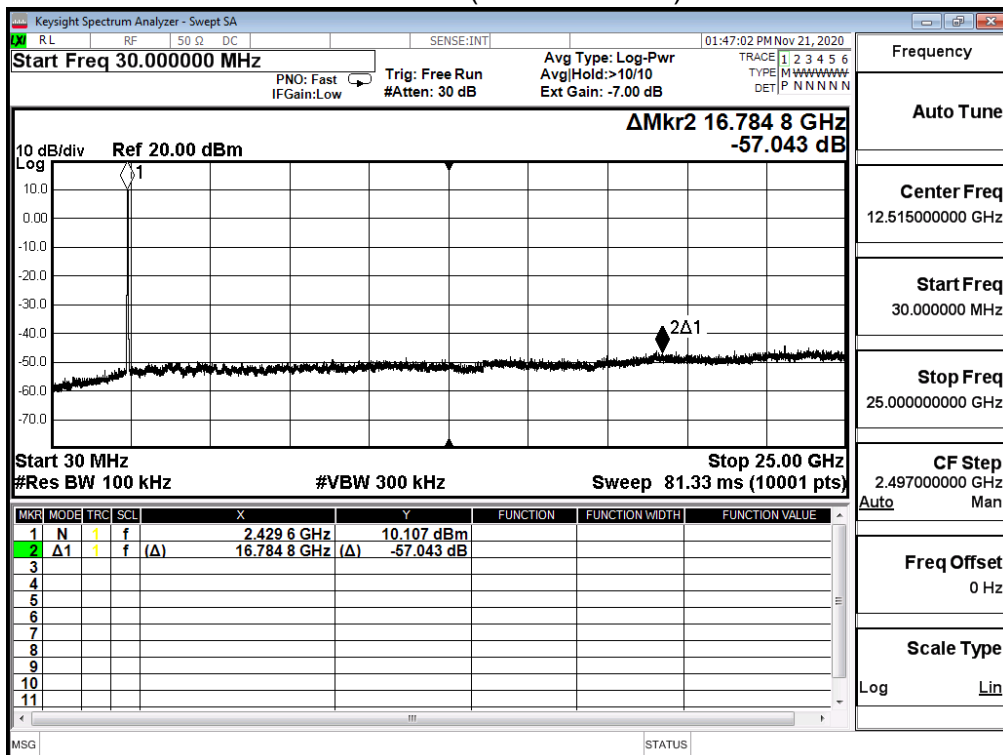


2452MHz (30MHz-25GHz)

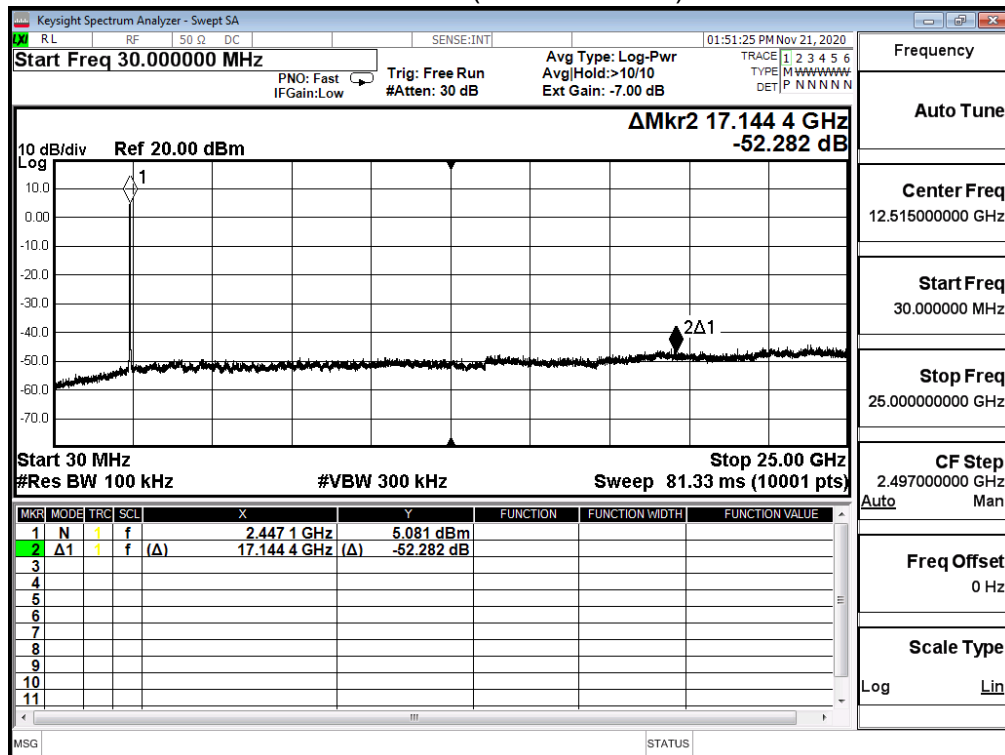


Product	Consumer Home Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: Transmit RU Mode_Full		
Date of Test	2020/11/09	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	61.0%

IEEE 802.11ax(40M)(ANT 2)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
3	2422	33.902	≥30	Pass
6	2437	40.002	≥30	Pass
9	2452	43.936	≥30	Pass


Channel 3 (2422MHz)

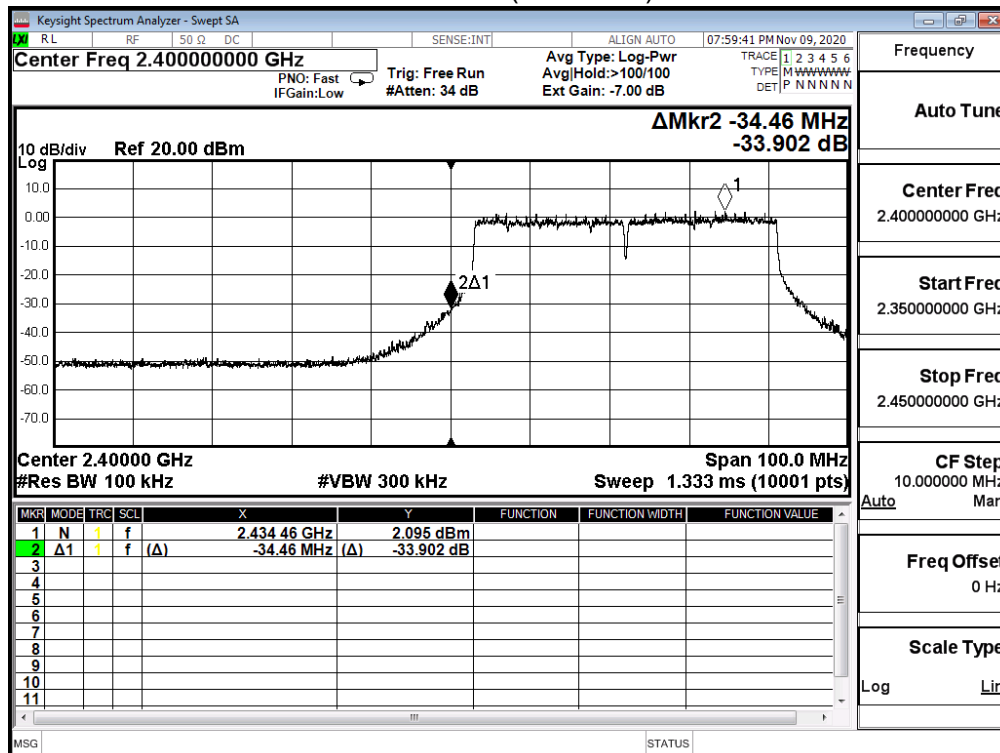


Channel 6 (2437MHz)

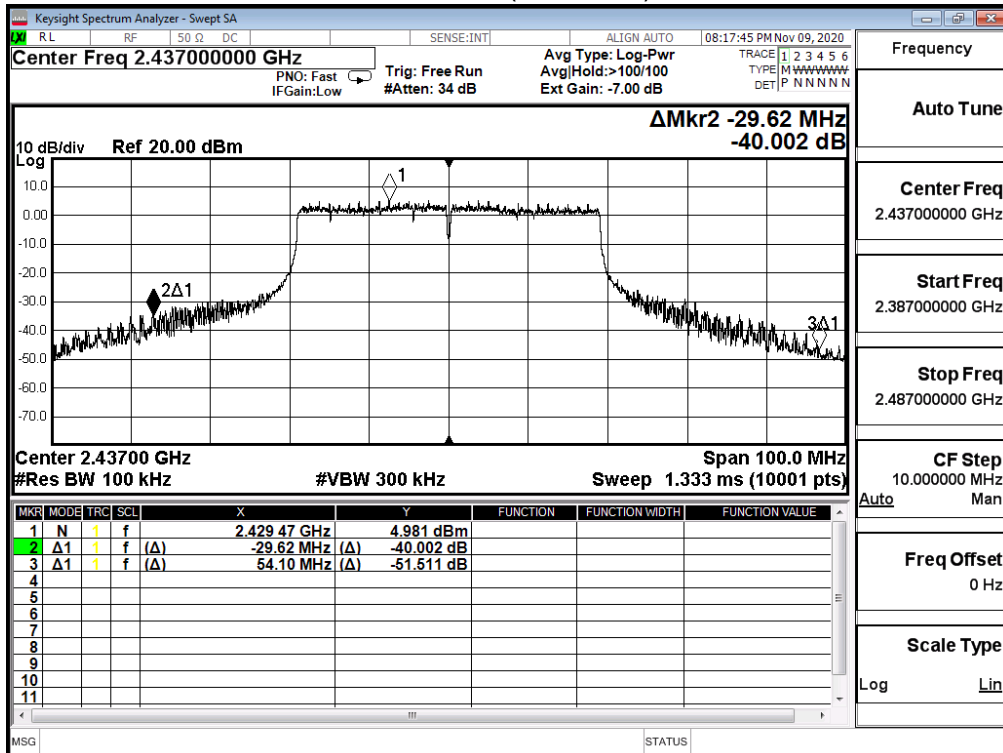


Channel 9 (2452MHz)

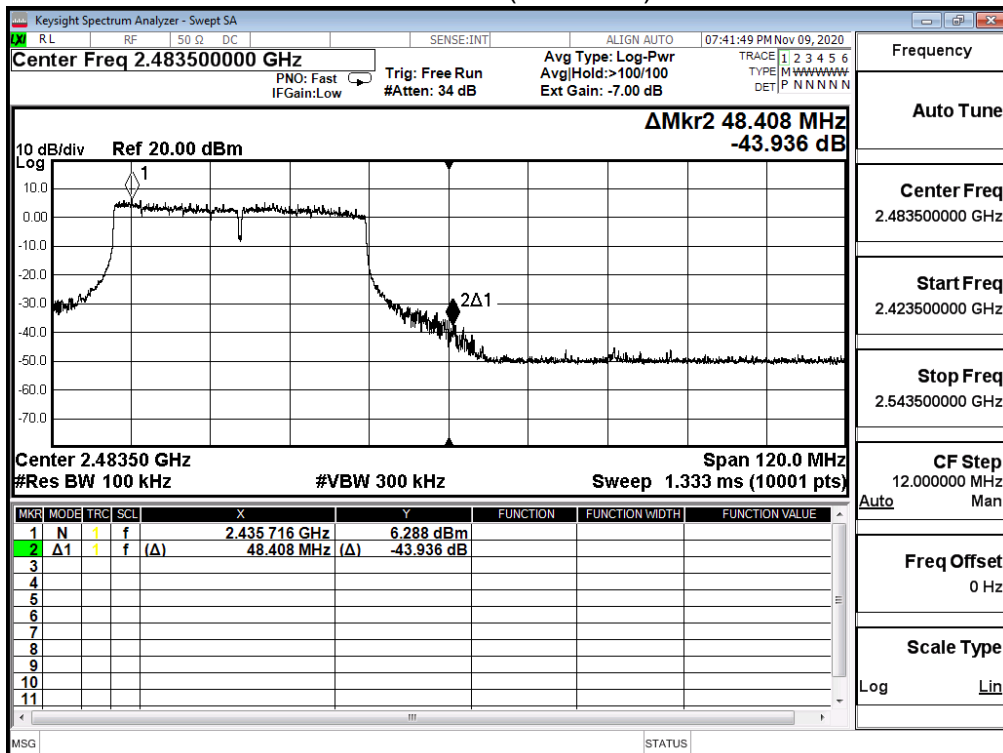


2422MHz 30MHz-25GHz)

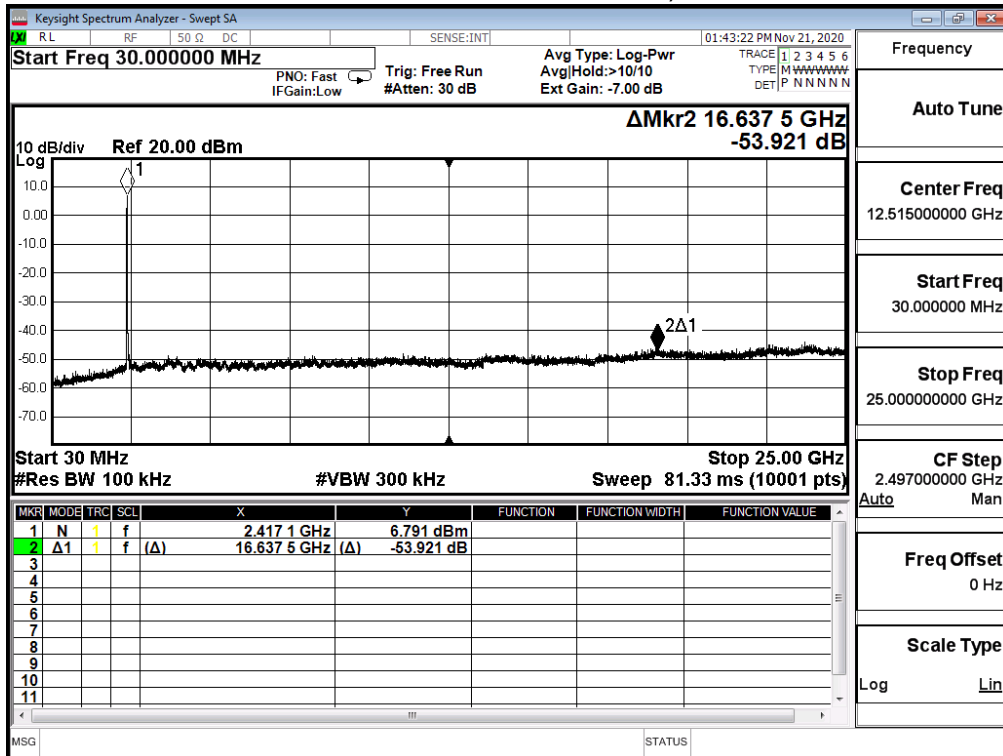

2437MHz (30MHz-25GHz)

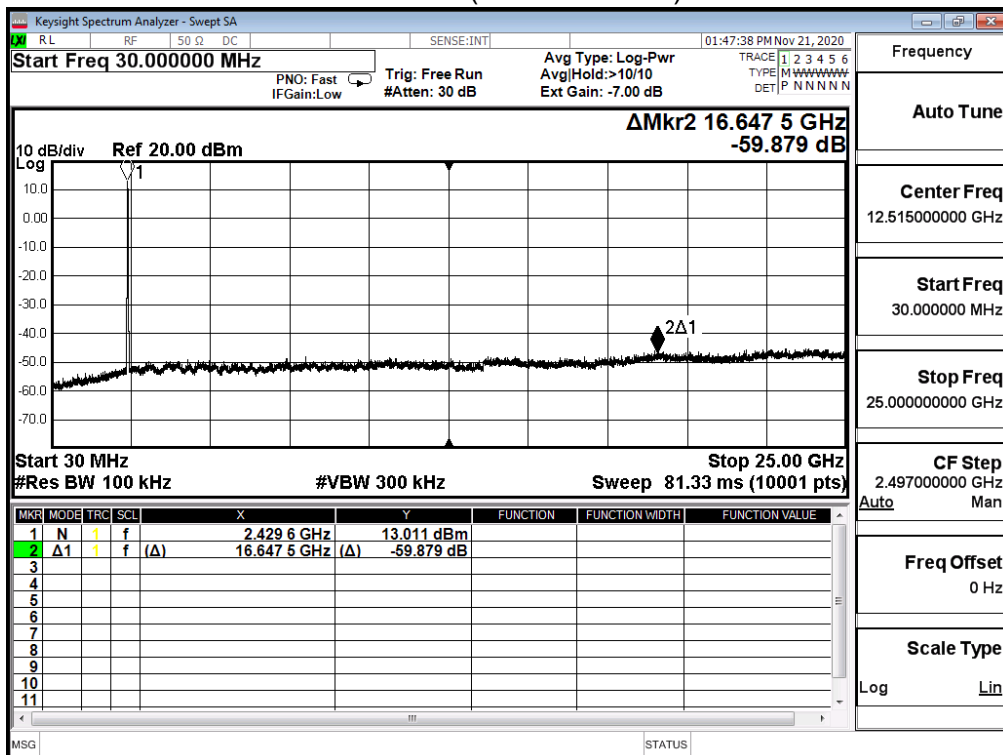


2452MHz (30MHz-25GHz)

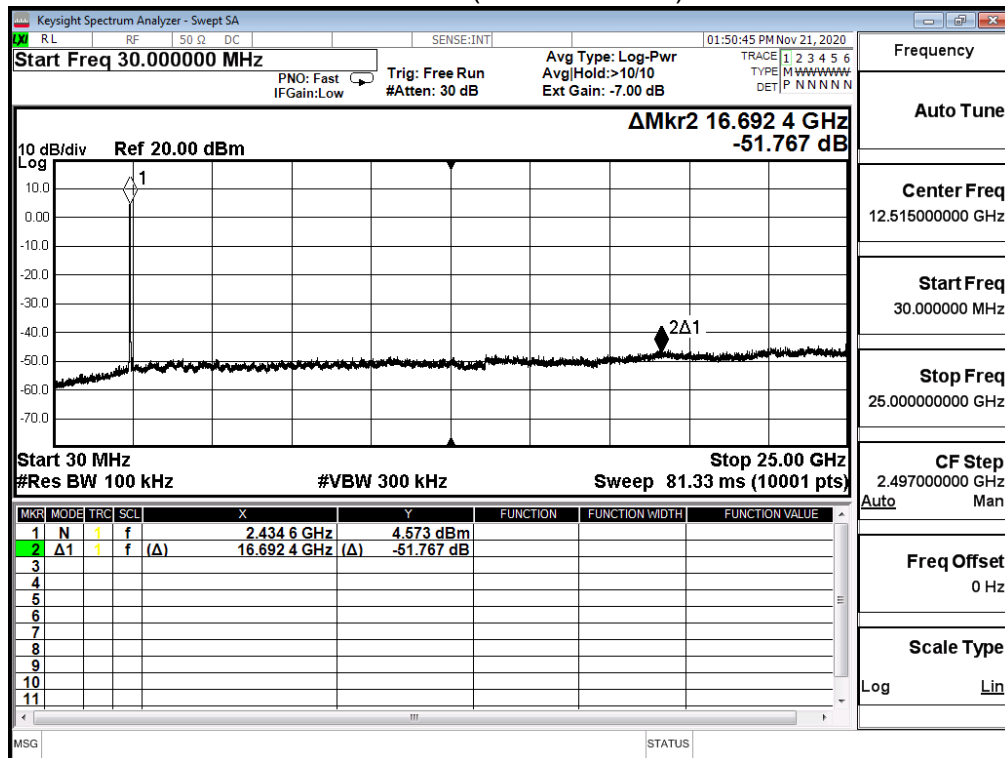


Product	Consumer Home Router		
Test Item	RF antenna conducted test		
Test Mode	Mode 2: Transmit RU Mode_Full		
Date of Test	2020/11/09	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	61.0%

IEEE 802.11ax(40M)(ANT 3)				
Channel	Frequency (MHz)	Measure Level (dBc)	Limit (dBc)	Result
3	2422	31.813	≥30	Pass
6	2437	38.850	≥30	Pass
9	2452	48.107	≥30	Pass


Channel 3 (2422MHz)

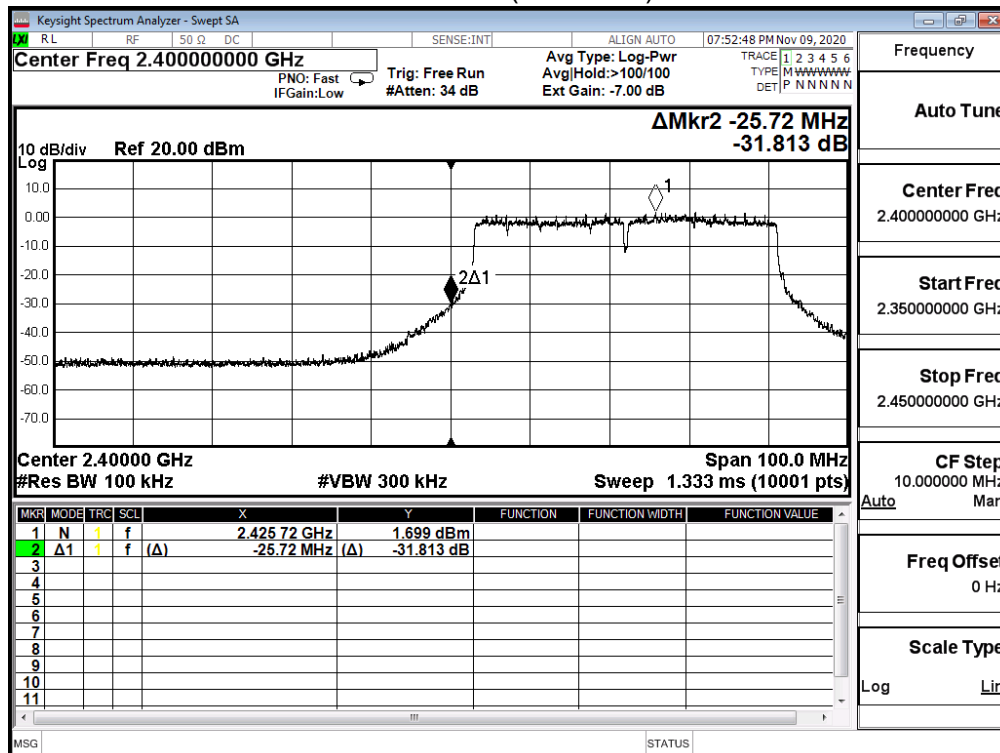


Channel 6 (2437MHz)

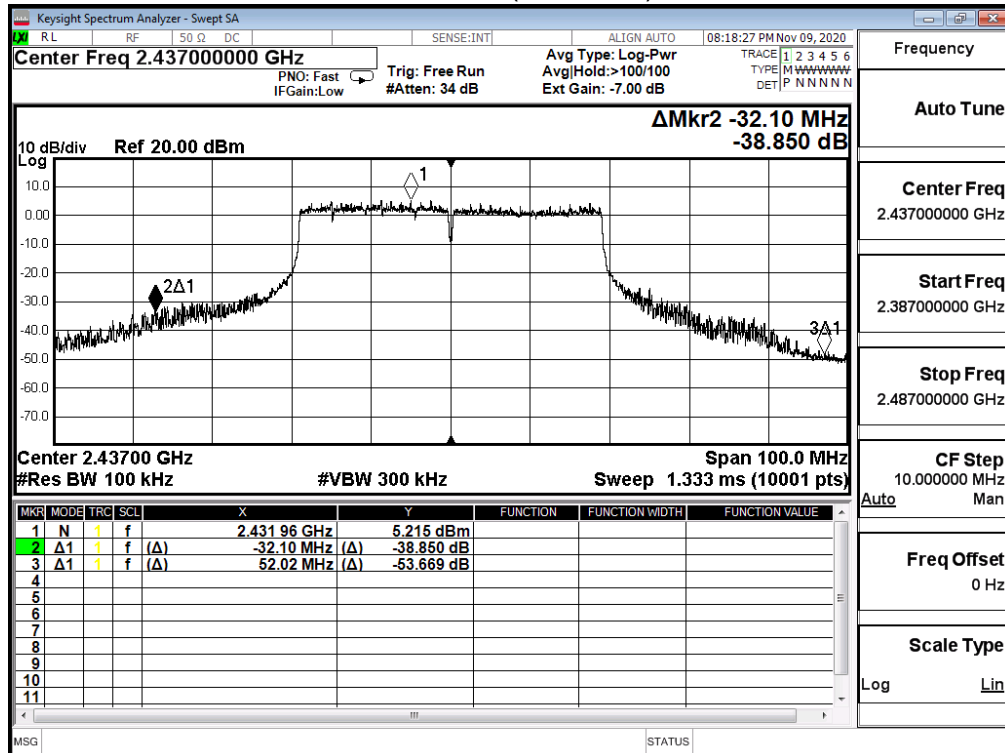


Channel 9 (2452MHz)

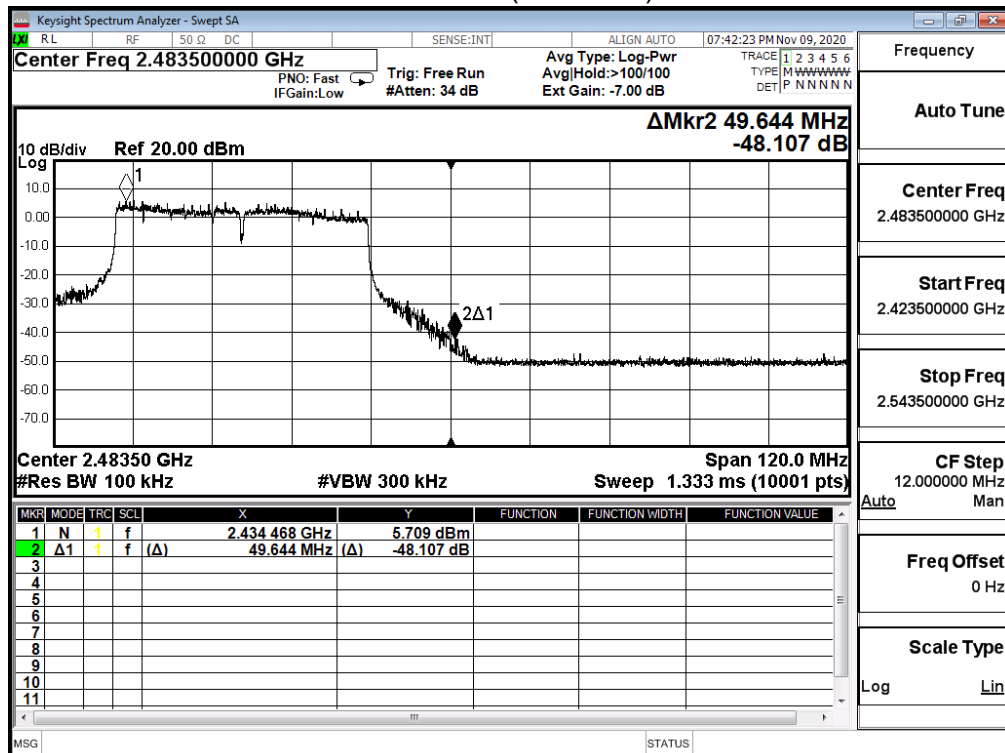


2422MHz 30MHz-25GHz)

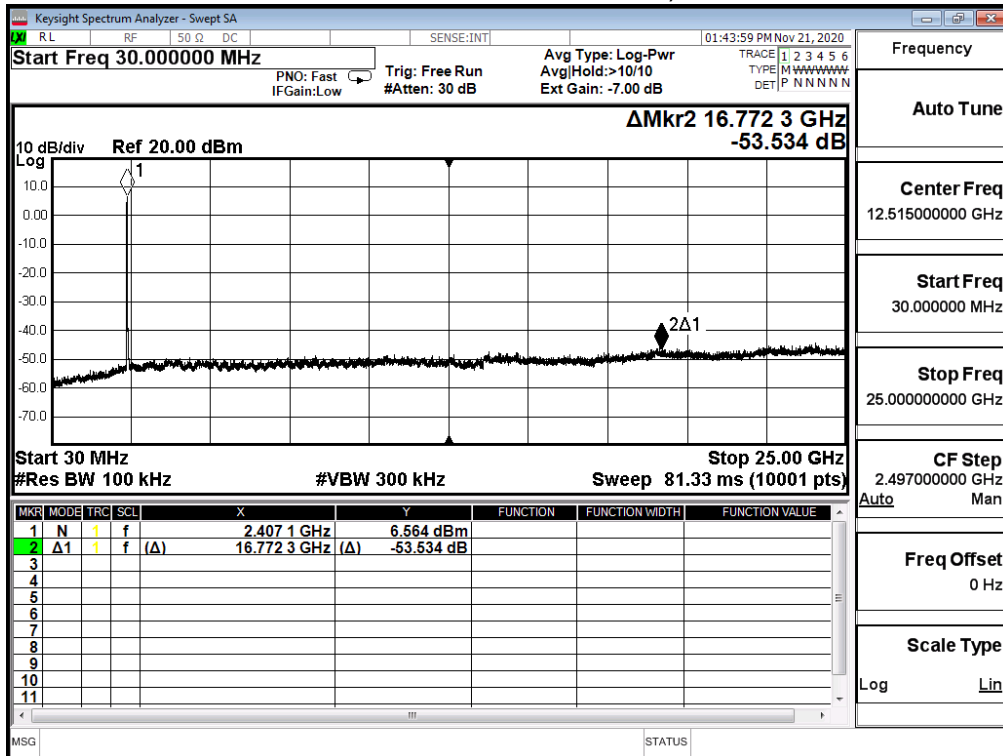

2437MHz (30MHz-25GHz)

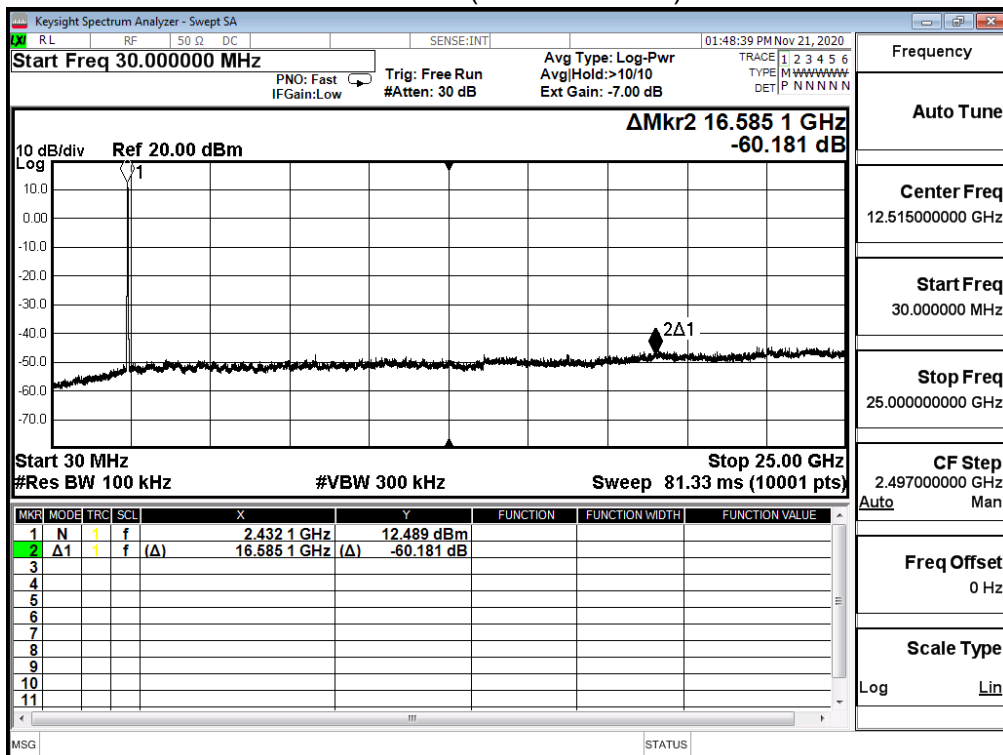


2452MHz (30MHz-25GHz)

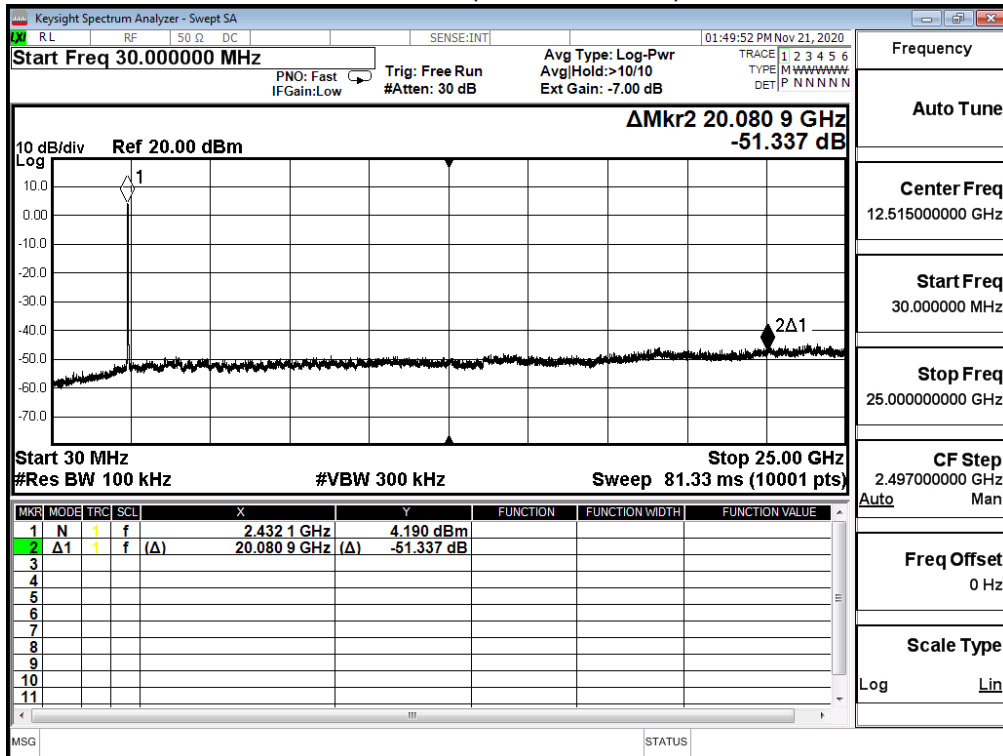

6. Radiated Emission Band Edge

6.1. Test Setup

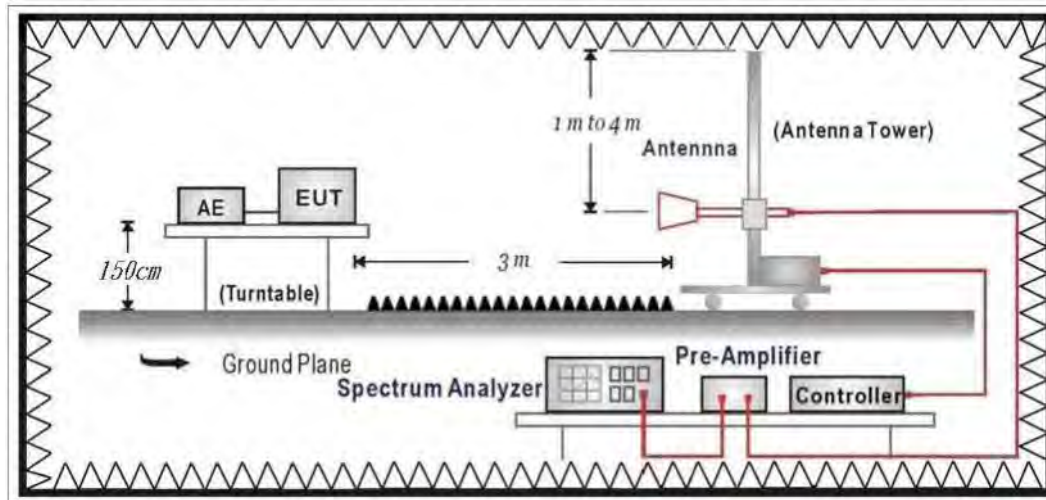

6.2. Limits

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 20dB below the level of the fundamental or to the general radiated emission limits in paragraph 15.209, whichever is the lesser attenuation.

6.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to DTS test procedure of KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements. The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

6.4. Test Specification

According to FCC Part 15 Subpart C Paragraph 15.247: 2019

6.5. Test Result

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11b,Ch 1,2.412G,BW20M	Humidity (%RH)	58.0

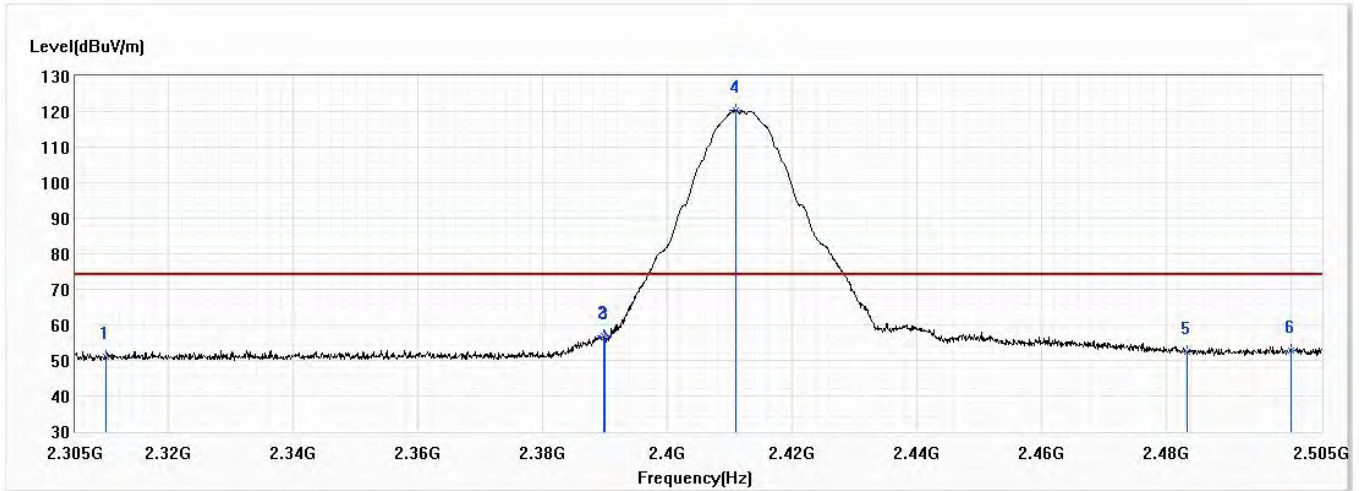


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	51.18	74.00	-22.82	39.56	11.62	PK
2	2389.800	56.79	74.00	-17.21	44.76	12.03	PK
3	2390.000	56.69	74.00	-17.31	44.66	12.03	PK
! 4	2410.900	120.30	74.00	46.30	108.15	12.15	PK
5	2483.500	52.41	74.00	-21.59	39.90	12.51	PK
6	2500.000	52.71	74.00	-21.29	40.11	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11b,Ch 1,2.412G,BW20M	Humidity (%RH)	58.0

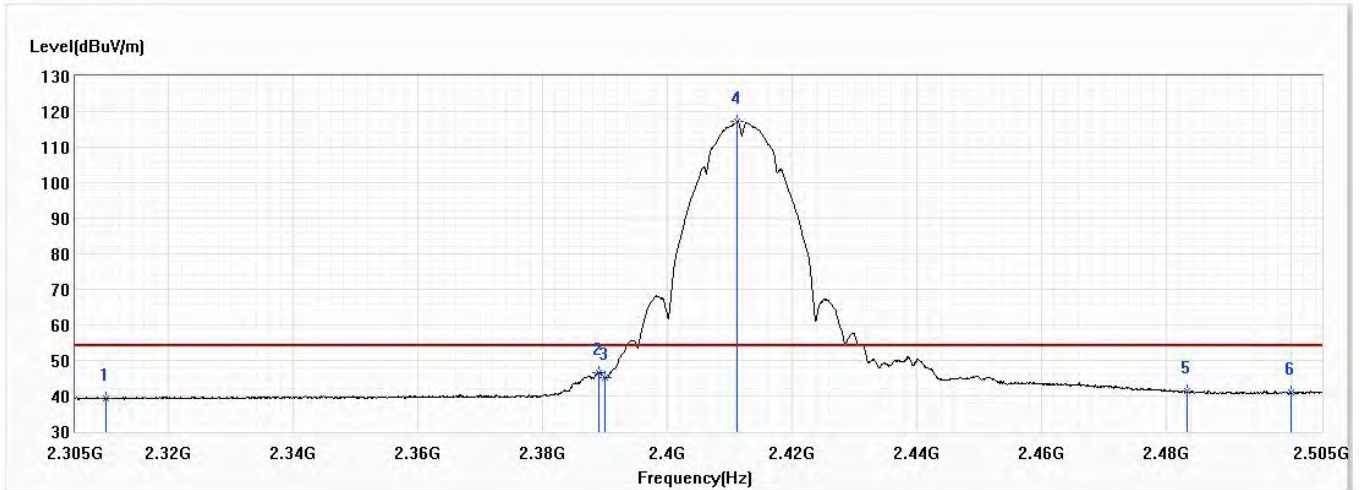


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	39.19	54.00	-14.81	27.57	11.62	AV
2	2389.000	46.67	54.00	-7.33	34.65	12.02	AV
3	2390.000	45.30	54.00	-8.70	33.27	12.03	AV
! 4	2411.200	117.19	54.00	63.19	105.04	12.15	AV
5	2483.500	41.37	54.00	-12.63	28.86	12.51	AV
6	2500.000	40.87	54.00	-13.13	28.27	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11b,Ch 1,2.412G,BW20M	Humidity (%RH)	58.0

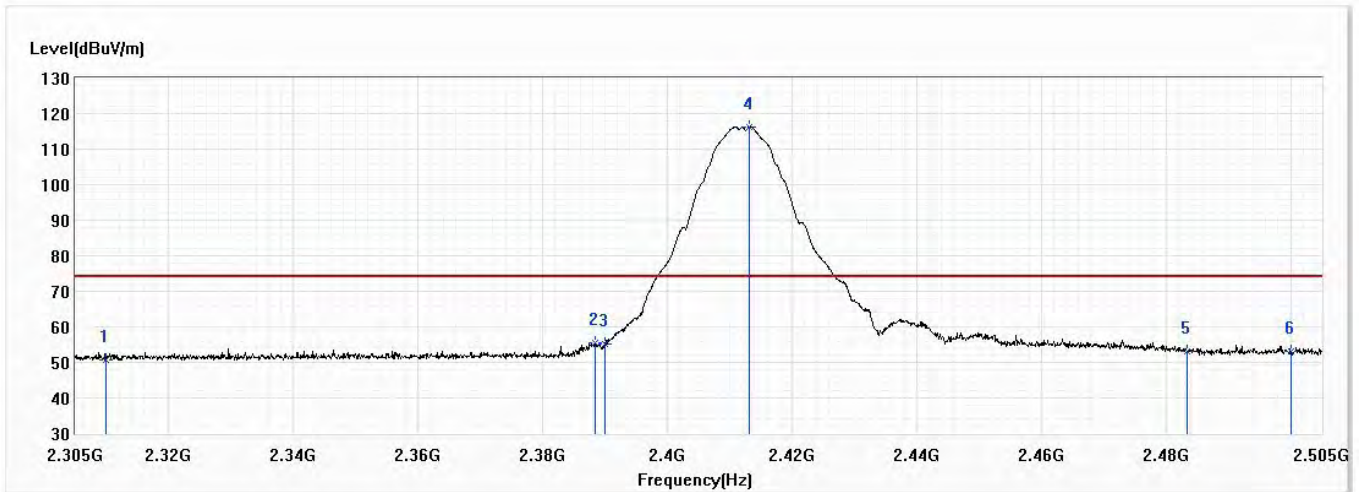


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.78	74.00	-23.22	39.16	11.62	PK
2	2388.500	55.46	74.00	-18.54	43.44	12.02	PK
3	2390.000	55.29	74.00	-18.71	43.26	12.03	PK
! 4	2413.200	116.21	74.00	42.21	104.06	12.15	PK
5	2483.500	52.96	74.00	-21.04	40.45	12.51	PK
6	2500.000	53.00	74.00	-21.00	40.40	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11b,Ch 1,2.412G,BW20M	Humidity (%RH)	58.0

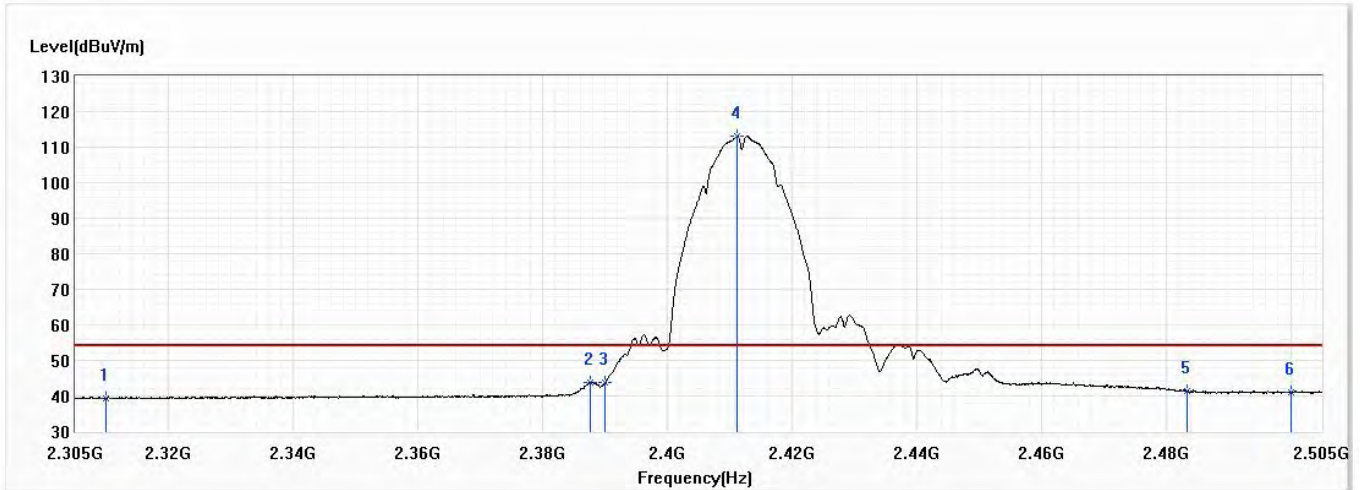


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	39.34	54.00	-14.66	27.72	11.62	AV
2	2387.600	43.88	54.00	-10.12	31.86	12.02	AV
3	2390.000	43.66	54.00	-10.34	31.63	12.03	AV
! 4	2411.100	113.10	54.00	59.10	100.95	12.15	AV
5	2483.500	41.43	54.00	-12.57	28.92	12.51	AV
6	2500.000	40.88	54.00	-13.12	28.28	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11b,Ch 6,2.437G,BW20M	Humidity (%RH)	58.0

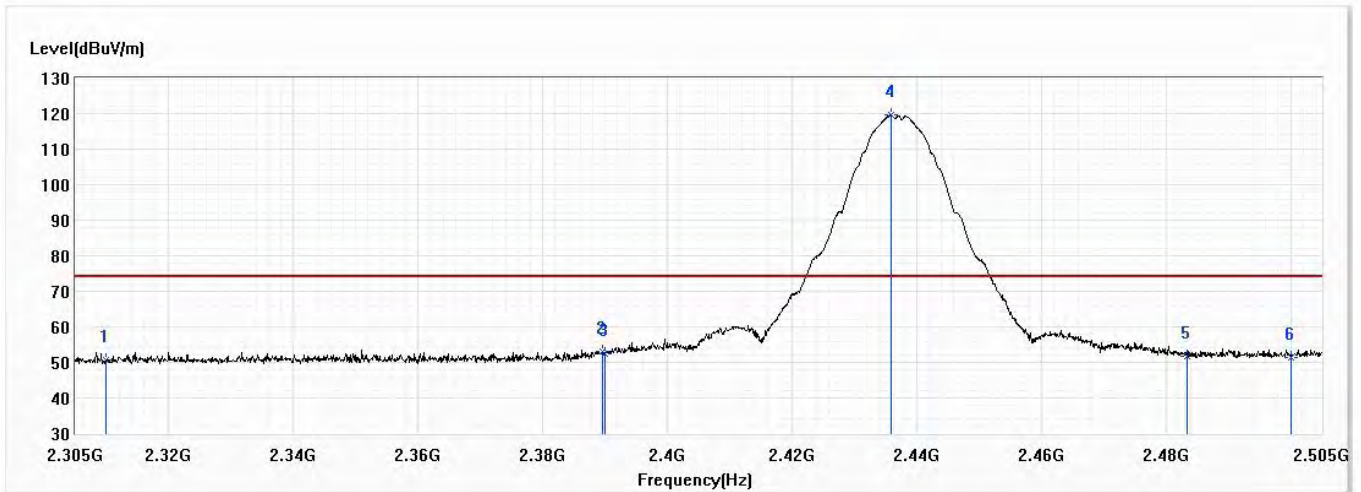


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.57	74.00	-23.43	38.95	11.62	PK
2	2389.600	53.15	74.00	-20.85	41.12	12.03	PK
3	2390.000	52.25	74.00	-21.75	40.22	12.03	PK
! 4	2435.900	119.51	74.00	45.51	107.23	12.28	PK
5	2483.500	51.84	74.00	-22.16	39.33	12.51	PK
6	2500.000	51.49	74.00	-22.51	38.89	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11b,Ch 6,2.437G,BW20M	Humidity (%RH)	58.0

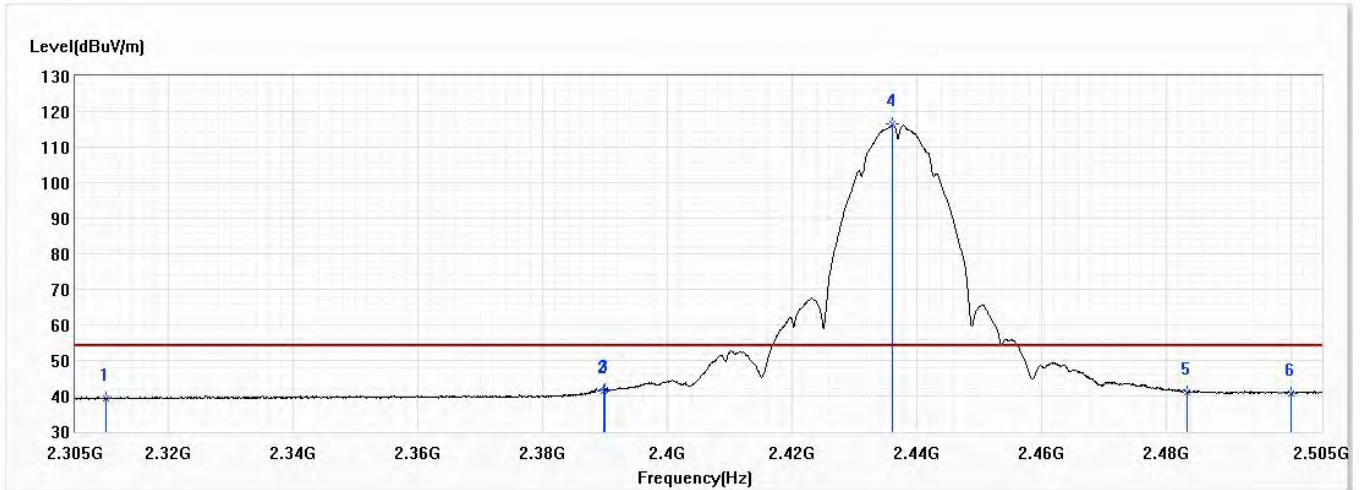


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	39.28	54.00	-14.72	27.66	11.62	AV
2	2389.700	41.48	54.00	-12.52	29.45	12.03	AV
3	2390.000	41.83	54.00	-12.17	29.80	12.03	AV
! 4	2436.200	116.40	54.00	62.40	104.12	12.28	AV
5	2483.500	41.16	54.00	-12.84	28.65	12.51	AV
6	2500.000	40.77	54.00	-13.23	28.17	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11b,Ch 6,2.437G,BW20M	Humidity (%RH)	58.0

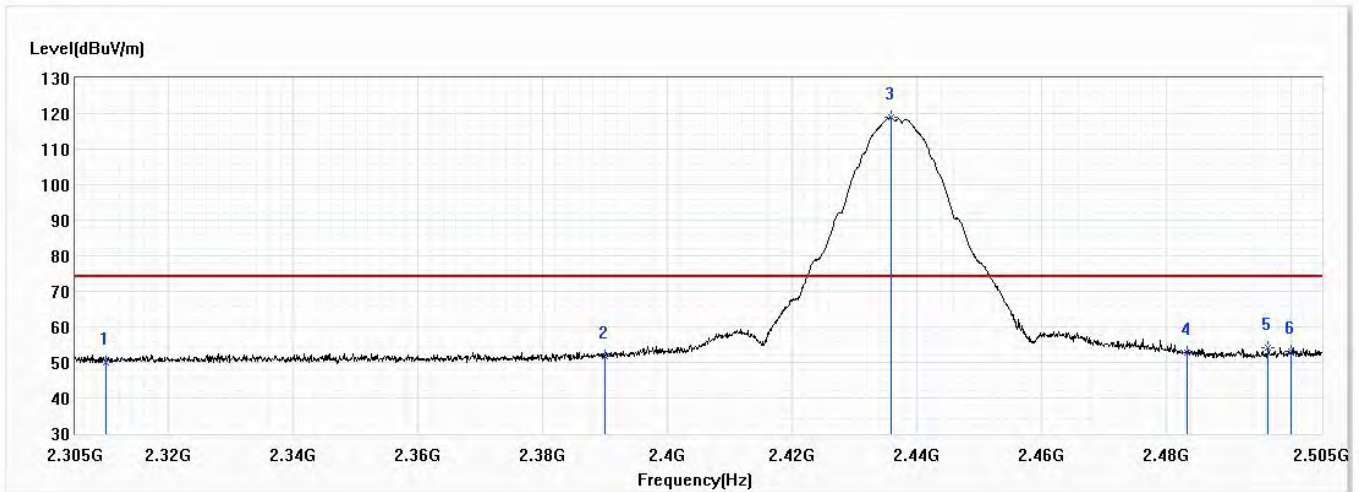


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.07	74.00	-23.93	38.45	11.62	PK
2	2390.000	51.64	74.00	-22.36	39.61	12.03	PK
! 3	2435.900	118.87	74.00	44.87	106.59	12.28	PK
4	2483.500	52.69	74.00	-21.31	40.18	12.51	PK
5	2496.400	54.28	74.00	-19.72	41.70	12.58	PK
6	2500.000	53.05	74.00	-20.95	40.45	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11b,Ch 6,2.437G,BW20M	Humidity (%RH)	58.0

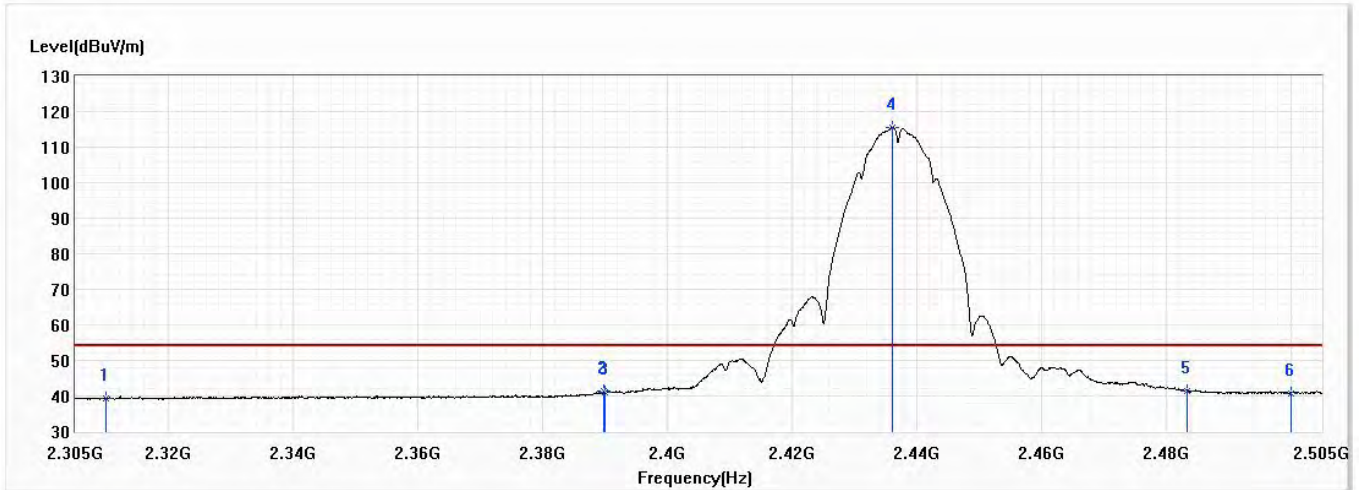


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	39.26	54.00	-14.74	27.64	11.62	AV
2	2389.700	41.25	54.00	-12.75	29.22	12.03	AV
3	2390.000	41.18	54.00	-12.82	29.15	12.03	AV
! 4	2436.200	115.65	54.00	61.65	103.37	12.28	AV
5	2483.500	41.48	54.00	-12.52	28.97	12.51	AV
6	2500.000	40.66	54.00	-13.34	28.06	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11b,Ch 11,2.462G,BW20M	Humidity (%RH)	58.0

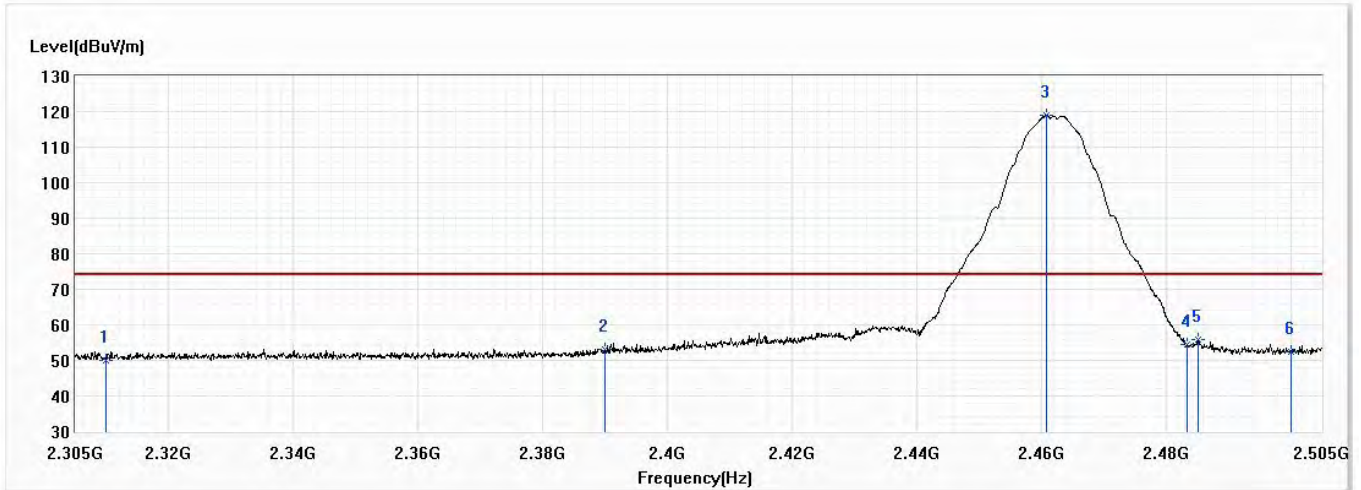


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.02	74.00	-23.98	38.40	11.62	PK
2	2390.000	53.04	74.00	-20.96	41.01	12.03	PK
! 3	2460.900	118.95	74.00	44.95	106.55	12.40	PK
4	2483.500	54.33	74.00	-19.67	41.82	12.51	PK
5	2485.100	55.73	74.00	-18.27	43.21	12.52	PK
6	2500.000	52.42	74.00	-21.58	39.82	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11b,Ch 11,2.462G,BW20M	Humidity (%RH)	58.0

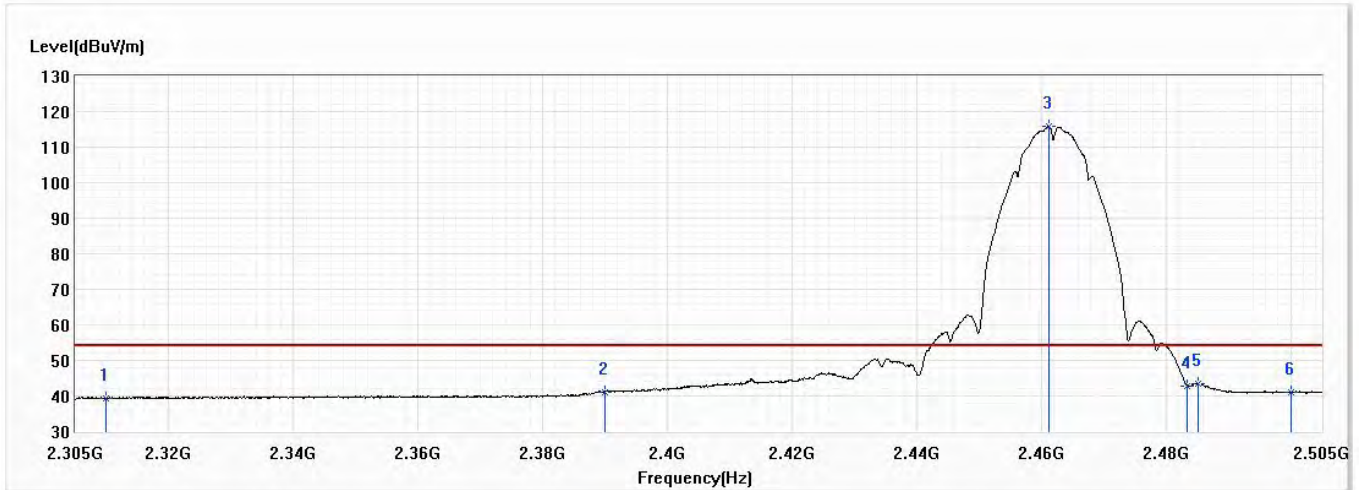


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	39.18	54.00	-14.82	27.56	11.62	AV
2	2390.000	41.19	54.00	-12.81	29.16	12.03	AV
! 3	2461.300	115.84	54.00	61.84	103.43	12.41	AV
4	2483.500	42.79	54.00	-11.21	30.28	12.51	AV
5	2485.100	43.40	54.00	-10.60	30.88	12.52	AV
6	2500.000	41.11	54.00	-12.89	28.51	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11b,Ch 11,2.462G,BW20M	Humidity (%RH)	58.0

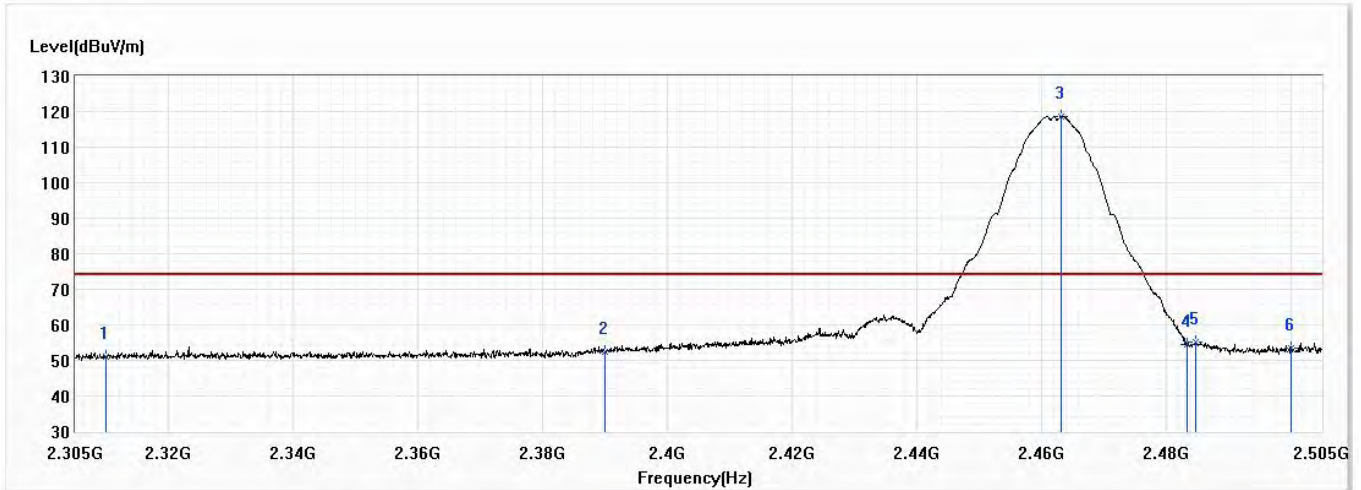


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.96	74.00	-23.04	39.34	11.62	PK
2	2390.000	52.44	74.00	-21.56	40.41	12.03	PK
! 3	2463.200	118.70	74.00	44.70	106.29	12.41	PK
4	2483.500	54.45	74.00	-19.55	41.94	12.51	PK
5	2484.700	55.01	74.00	-18.99	42.49	12.52	PK
6	2500.000	53.39	74.00	-20.61	40.79	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11b,Ch 11,2.462G,BW20M	Humidity (%RH)	58.0

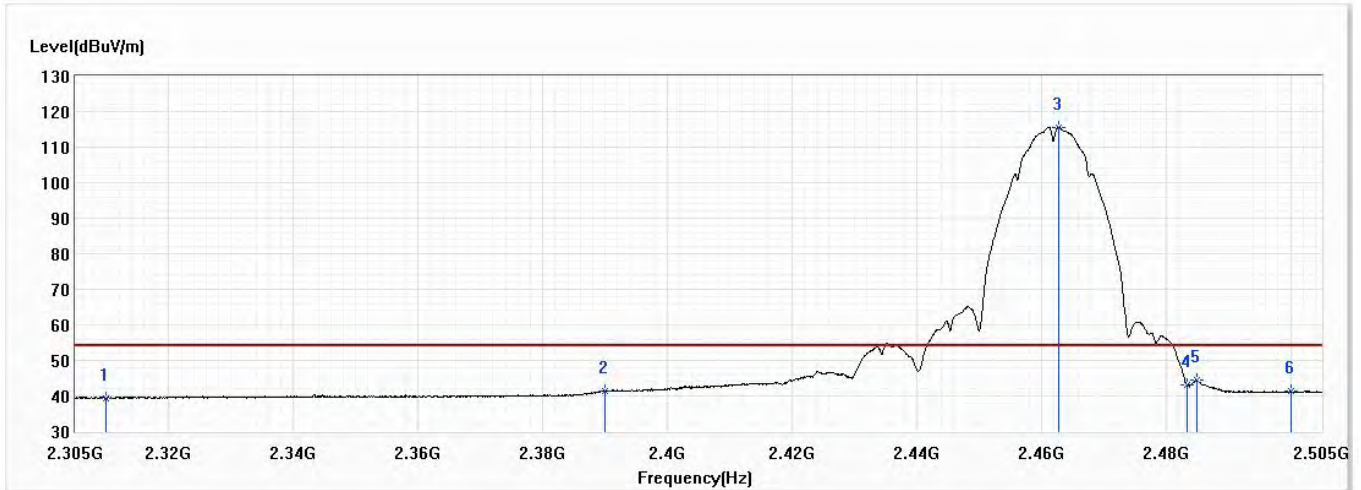


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	39.38	54.00	-14.62	27.76	11.62	AV
2	2390.000	41.40	54.00	-12.60	29.37	12.03	AV
! 3	2462.800	115.62	54.00	61.62	103.21	12.41	AV
4	2483.500	42.96	54.00	-11.04	30.45	12.51	AV
5	2484.900	44.46	54.00	-9.54	31.94	12.52	AV
6	2500.000	41.24	54.00	-12.76	28.64	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11g,Ch 1,2.412G,BW20M	Humidity (%RH)	58.0

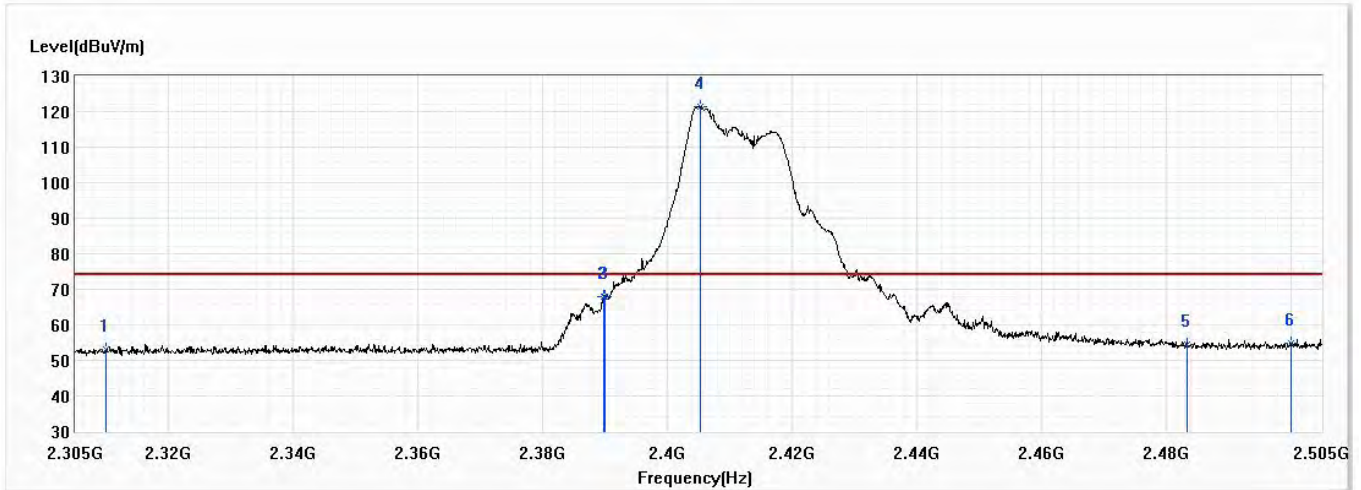


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.04	74.00	-20.96	41.42	11.62	PK
2	2389.700	68.00	74.00	-6.00	55.97	12.03	PK
3	2390.000	68.10	74.00	-5.90	56.07	12.03	PK
! 4	2405.200	121.49	74.00	47.49	109.38	12.11	PK
5	2483.500	54.52	74.00	-19.48	42.01	12.51	PK
6	2500.000	54.66	74.00	-19.34	42.06	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11g,Ch 1,2.412G,BW20M	Humidity (%RH)	58.0

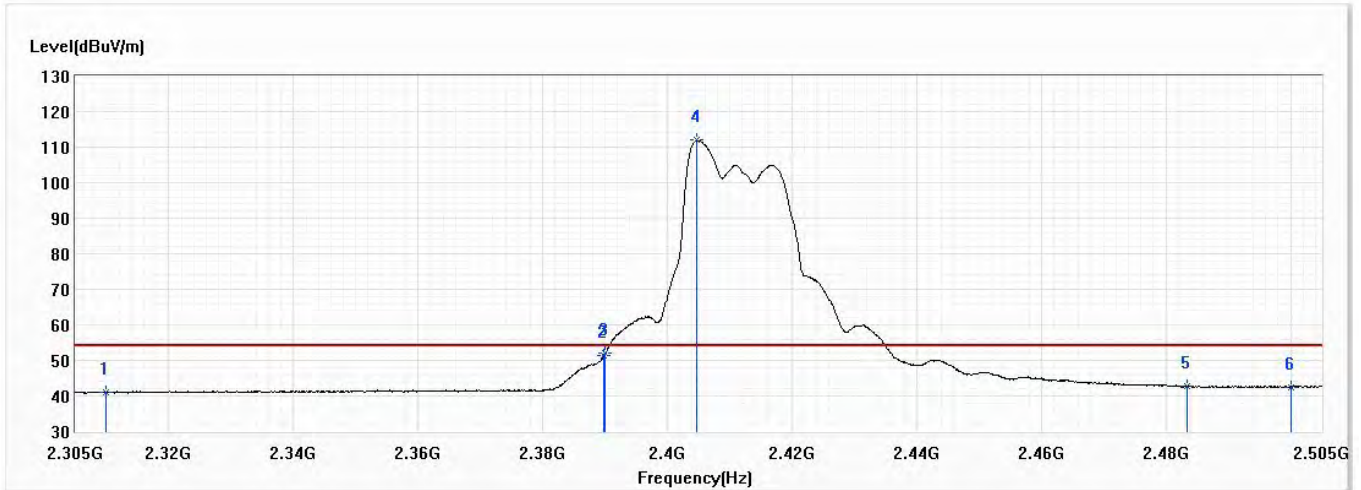


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.92	54.00	-13.08	29.30	11.62	AV
2	2389.800	51.22	54.00	-2.78	39.19	12.03	AV
3	2390.000	52.12	54.00	-1.88	40.09	12.03	AV
! 4	2404.800	111.95	54.00	57.95	99.84	12.11	AV
5	2483.500	42.70	54.00	-11.30	30.19	12.51	AV
6	2500.000	42.43	54.00	-11.57	29.83	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11g,Ch 1,2.412G,BW20M	Humidity (%RH)	58.0

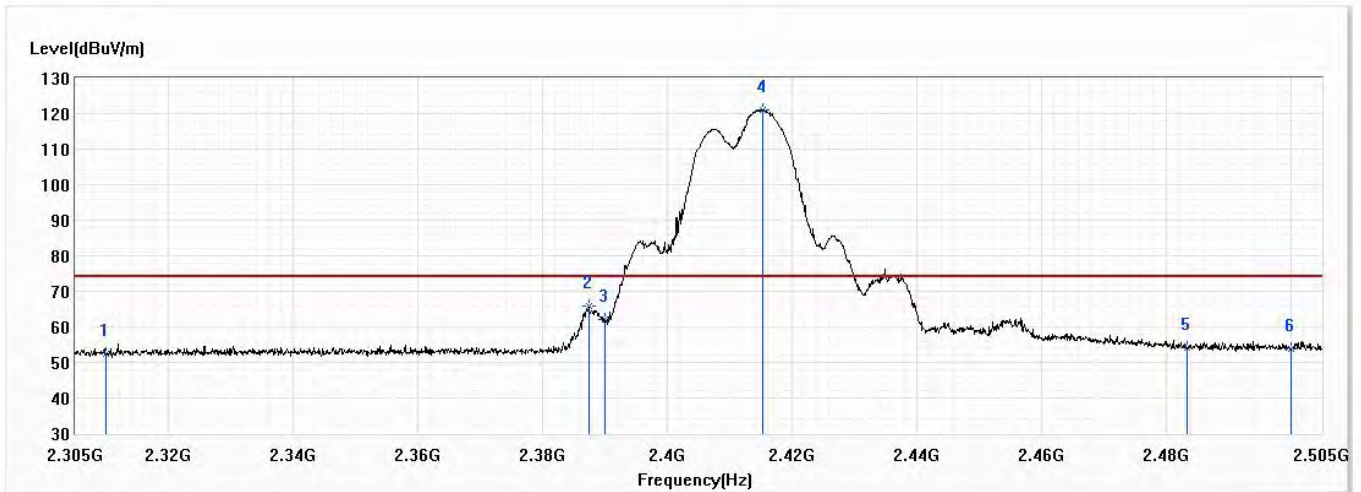


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	52.56	74.00	-21.44	40.94	11.62	PK
2	2387.400	65.69	74.00	-8.31	53.67	12.02	PK
3	2390.000	62.02	74.00	-11.98	49.99	12.03	PK
! 4	2415.300	121.14	74.00	47.14	108.98	12.16	PK
5	2483.500	54.09	74.00	-19.91	41.58	12.51	PK
6	2500.000	53.80	74.00	-20.20	41.20	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11g,Ch 1,2.412G,BW20M	Humidity (%RH)	58.0

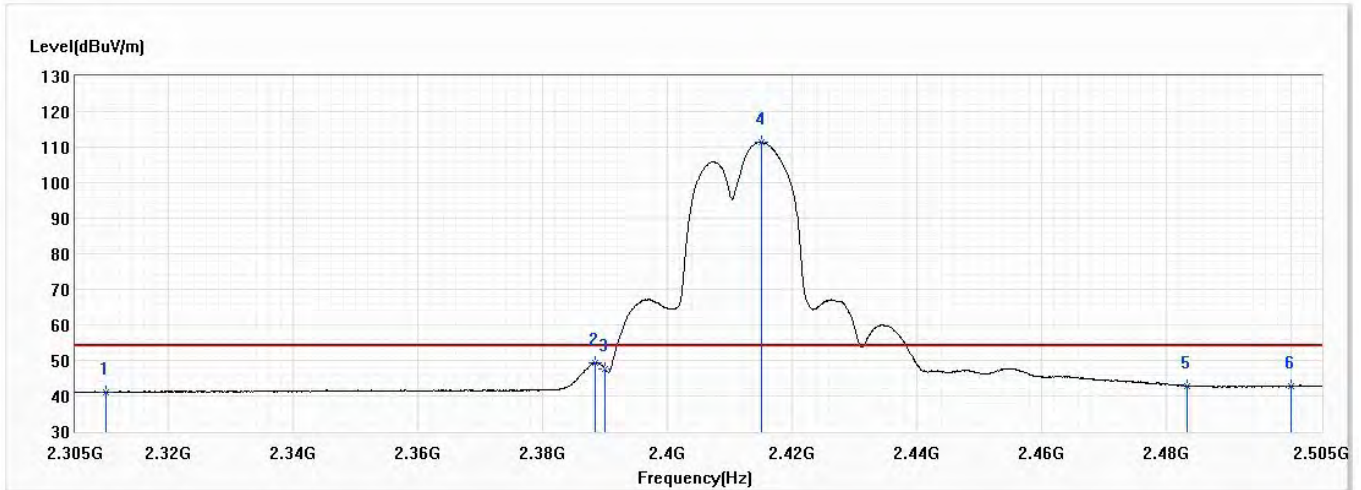


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.13	54.00	-12.87	29.51	11.62	AV
2	2388.500	49.38	54.00	-4.62	37.36	12.02	AV
3	2390.000	47.75	54.00	-6.25	35.72	12.03	AV
! 4	2415.100	111.54	54.00	57.54	99.38	12.16	AV
5	2483.500	42.88	54.00	-11.12	30.37	12.51	AV
6	2500.000	42.62	54.00	-11.38	30.02	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11g,Ch 6,2.437G,BW20M	Humidity (%RH)	58.0

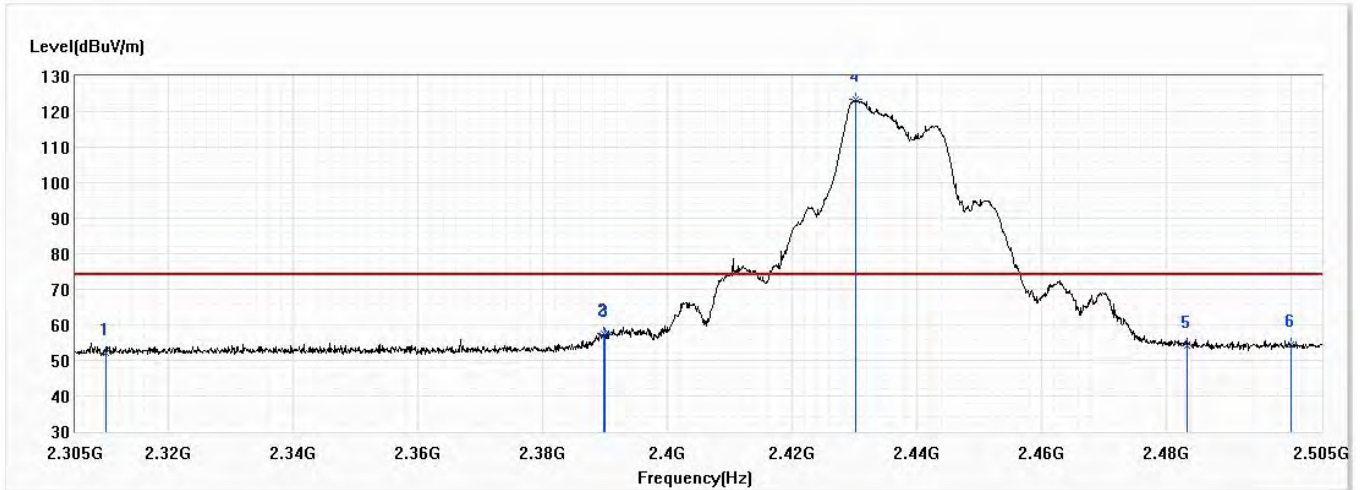


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	52.07	74.00	-21.93	40.45	11.62	PK
2	2389.700	57.69	74.00	-16.31	45.66	12.03	PK
3	2390.000	57.23	74.00	-16.77	45.20	12.03	PK
! 4	2430.300	123.28	74.00	49.28	111.04	12.24	PK
5	2483.500	54.02	74.00	-19.98	41.51	12.51	PK
6	2500.000	54.53	74.00	-19.47	41.93	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11g,Ch 6,2.437G,BW20M	Humidity (%RH)	58.0

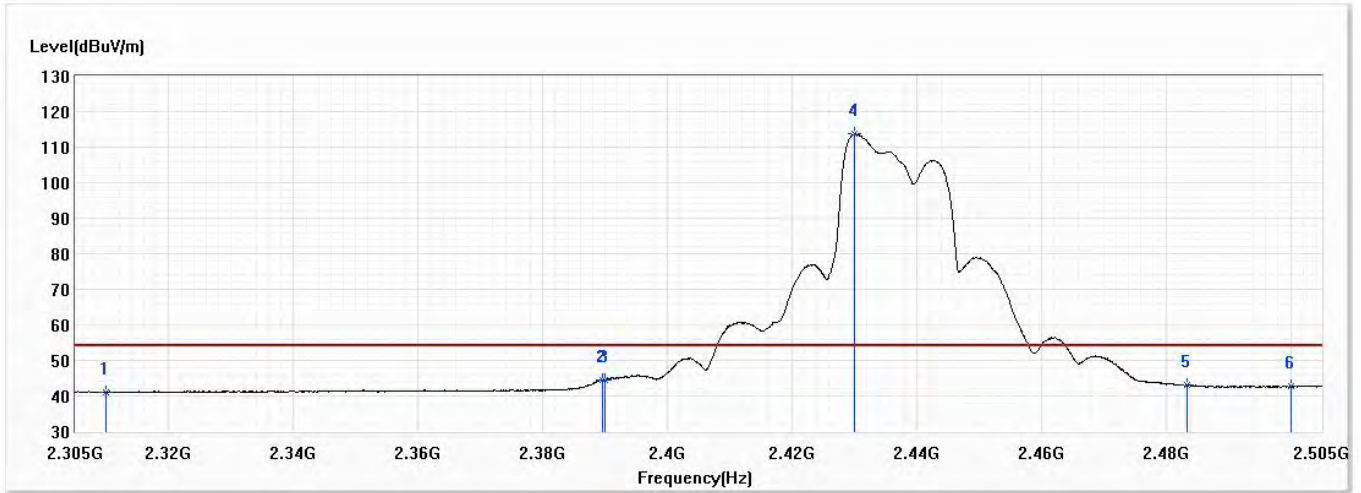


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.05	54.00	-12.95	29.43	11.62	AV
2	2389.600	44.39	54.00	-9.61	32.36	12.03	AV
3	2390.000	44.65	54.00	-9.35	32.62	12.03	AV
! 4	2430.100	113.70	54.00	59.70	101.46	12.24	AV
5	2483.500	42.94	54.00	-11.06	30.43	12.51	AV
6	2500.000	42.69	54.00	-11.31	30.09	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11g,Ch 6,2.437G,BW20M	Humidity (%RH)	58.0

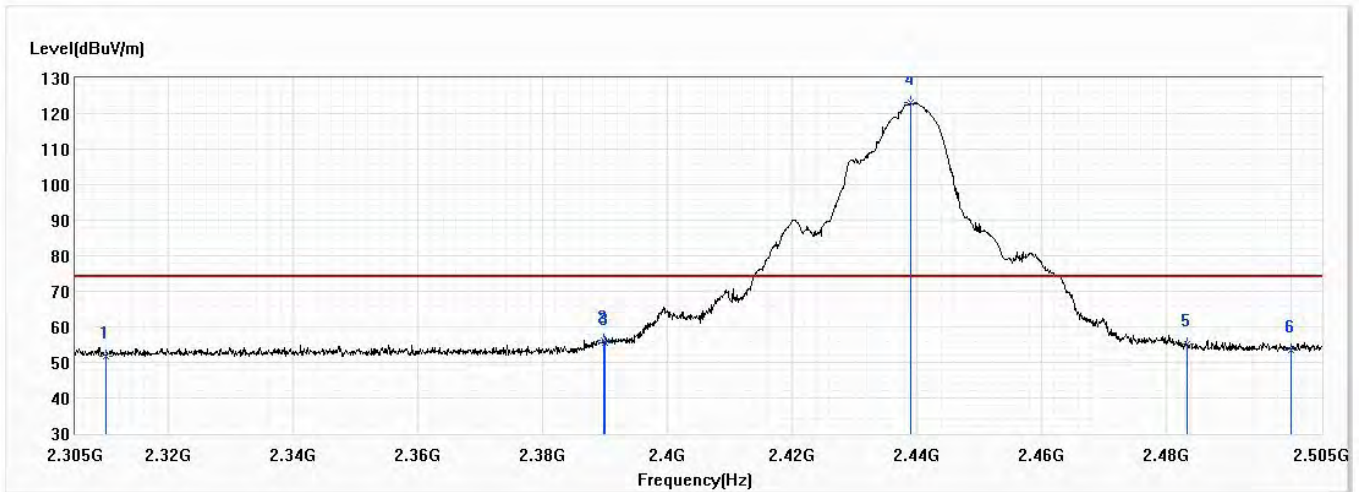


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	51.87	74.00	-22.13	40.25	11.62	PK
2	2389.700	56.28	74.00	-17.72	44.25	12.03	PK
3	2390.000	55.66	74.00	-18.34	43.63	12.03	PK
! 4	2439.100	122.96	74.00	48.96	110.68	12.28	PK
5	2483.500	55.19	74.00	-18.81	42.68	12.51	PK
6	2500.000	53.42	74.00	-20.58	40.82	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11g,Ch 6,2.437G,BW20M	Humidity (%RH)	58.0

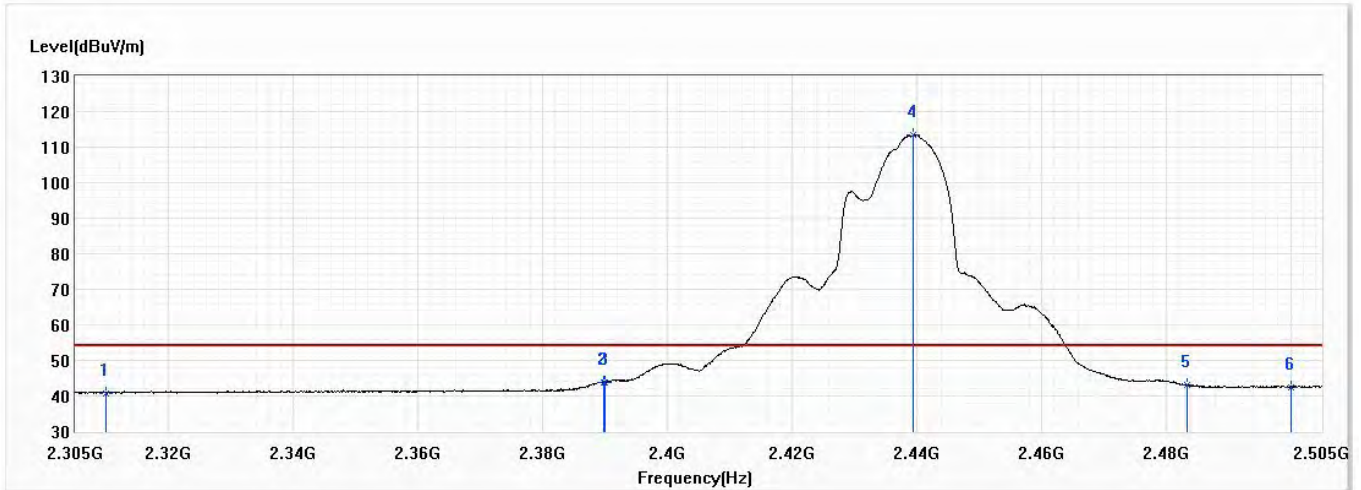


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.85	54.00	-13.15	29.23	11.62	AV
2	2389.800	43.96	54.00	-10.04	31.93	12.03	AV
3	2390.000	43.86	54.00	-10.14	31.83	12.03	AV
! 4	2439.500	113.60	54.00	59.60	101.32	12.28	AV
5	2483.500	43.11	54.00	-10.89	30.60	12.51	AV
6	2500.000	42.51	54.00	-11.49	29.91	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11g,Ch 11,2.462G,BW20M	Humidity (%RH)	58.0

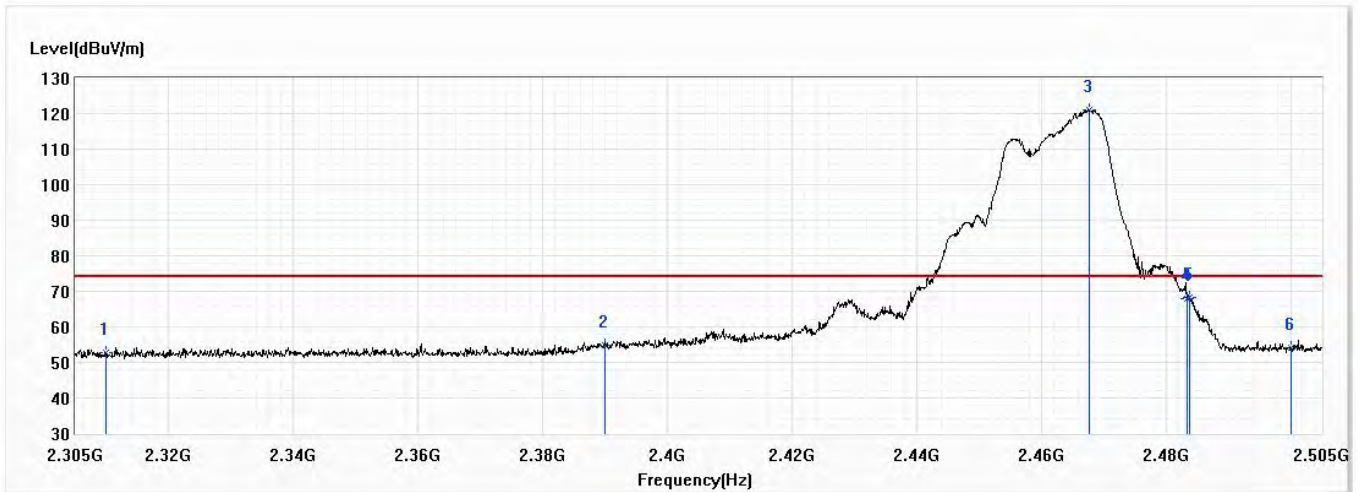


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	52.76	74.00	-21.24	41.14	11.62	PK
2	2390.000	54.84	74.00	-19.16	42.81	12.03	PK
! 3	2467.800	121.15	74.00	47.15	108.72	12.43	PK
4	2483.500	68.05	74.00	-5.95	55.54	12.51	PK
5	2483.900	68.16	74.00	-5.84	55.65	12.51	PK
6	2500.000	53.97	74.00	-20.03	41.37	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	24.0
Test Condition	802.11g,Ch 11,2.462G,BW20M	Humidity (%RH)	58.0

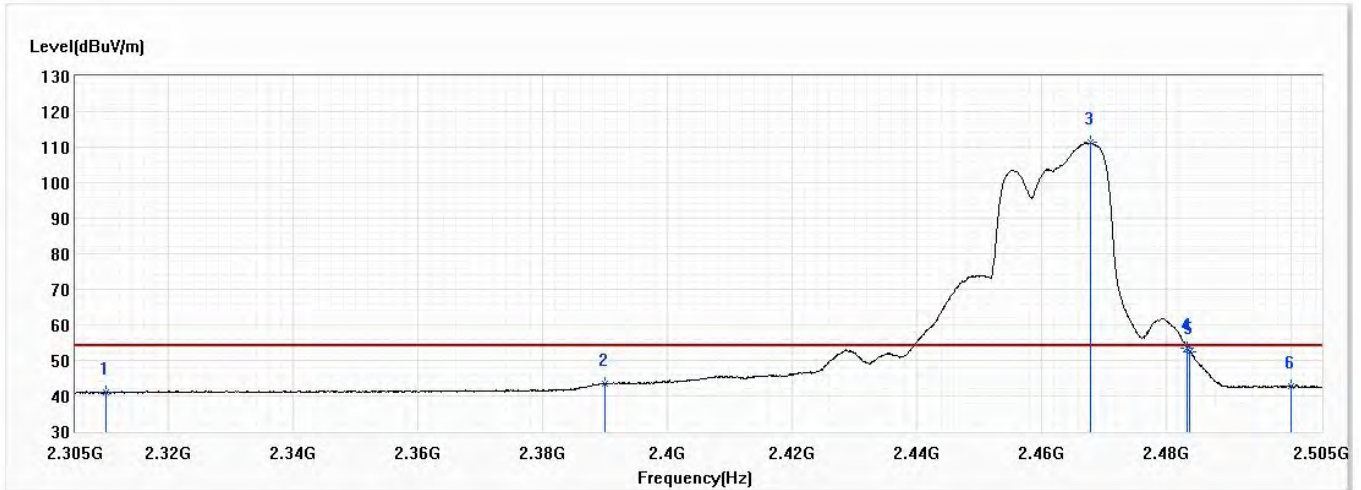


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.90	54.00	-13.10	29.28	11.62	AV
2	2390.000	43.37	54.00	-10.63	31.34	12.03	AV
! 3	2467.900	111.28	54.00	57.28	98.85	12.43	AV
4	2483.500	53.41	54.00	-0.59	40.90	12.51	AV
5	2483.800	52.43	54.00	-1.57	39.92	12.51	AV
6	2500.000	42.62	54.00	-11.38	30.02	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11g,Ch 11,2.462G,BW20M	Humidity (%RH)	58.0

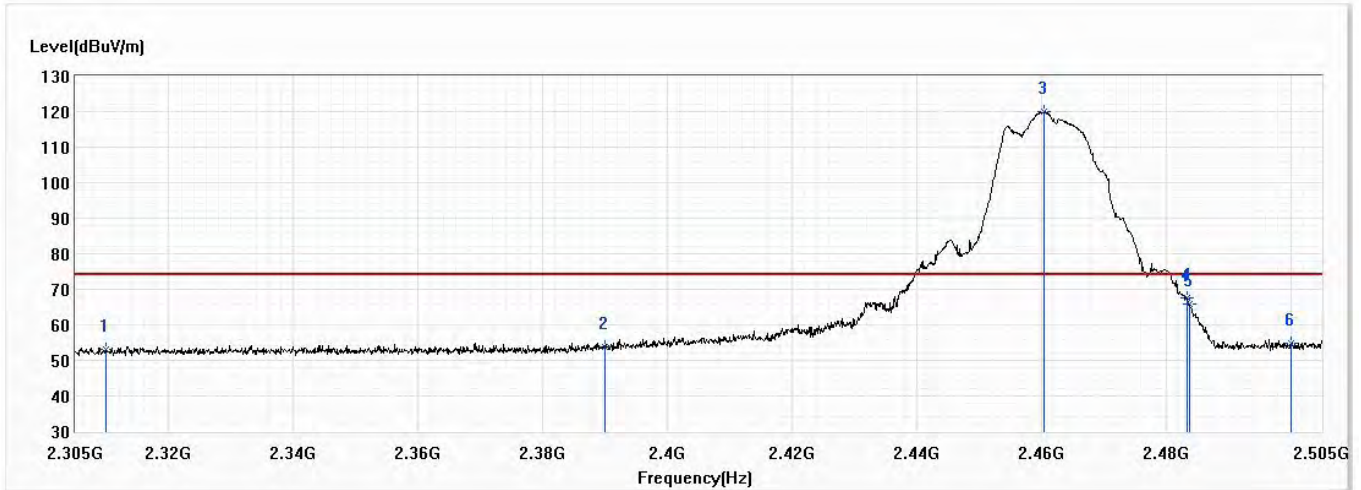


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.05	74.00	-20.95	41.43	11.62	PK
2	2390.000	53.88	74.00	-20.12	41.85	12.03	PK
! 3	2460.500	119.84	74.00	45.84	107.44	12.40	PK
4	2483.500	67.72	74.00	-6.28	55.21	12.51	PK
5	2483.800	65.86	74.00	-8.14	53.35	12.51	PK
6	2500.000	54.96	74.00	-19.04	42.36	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/10/19
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	24.0
Test Condition	802.11g,Ch 11,2.462G,BW20M	Humidity (%RH)	58.0

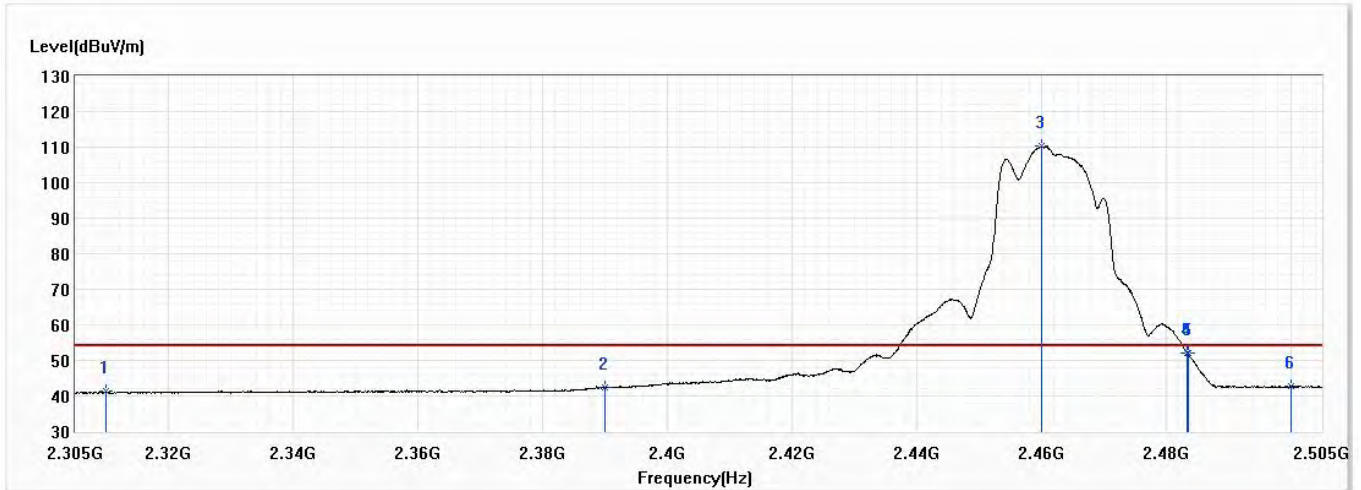


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.31	54.00	-12.69	29.69	11.62	AV
2	2390.000	42.34	54.00	-11.66	30.31	12.03	AV
! 3	2460.000	110.18	54.00	56.18	97.79	12.39	AV
4	2483.500	51.92	54.00	-2.08	39.41	12.51	AV
5	2483.600	51.90	54.00	-2.10	39.39	12.51	AV
6	2500.000	42.64	54.00	-11.36	30.04	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch1,2.412G,BW20M	Humidity (%RH)	53.0

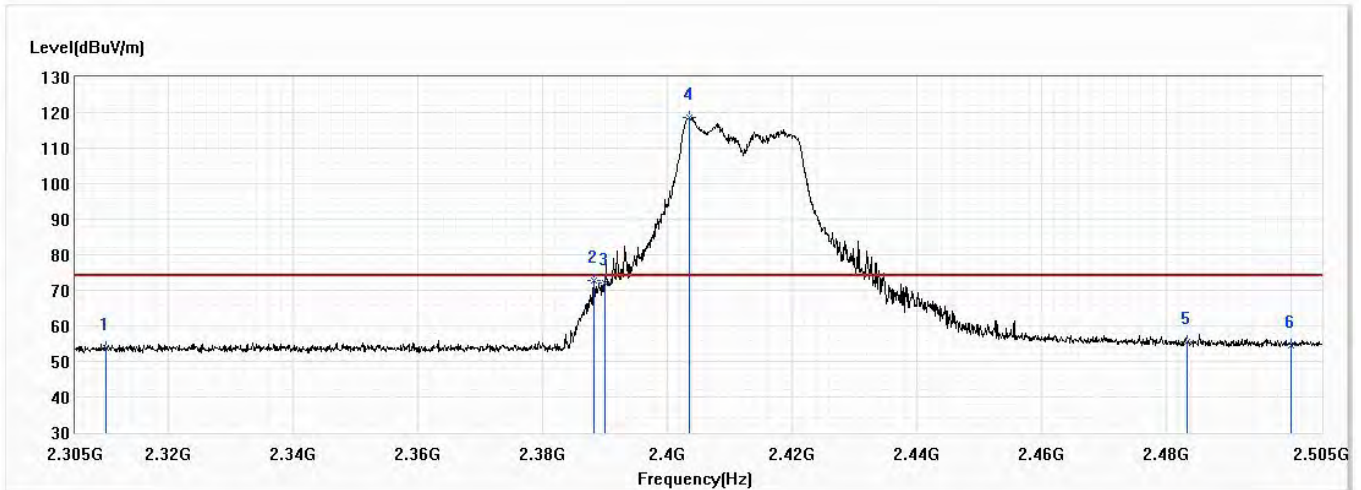


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.84	74.00	-20.16	42.22	11.62	PK
2	2388.300	72.90	74.00	-1.10	60.88	12.02	PK
3	2390.000	72.11	74.00	-1.89	60.08	12.03	PK
! 4	2403.500	118.79	74.00	44.79	106.68	12.11	PK
5	2483.500	55.53	74.00	-18.47	43.02	12.51	PK
6	2500.000	54.49	74.00	-19.51	41.89	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch1,2.412G,BW20M	Humidity (%RH)	53.0

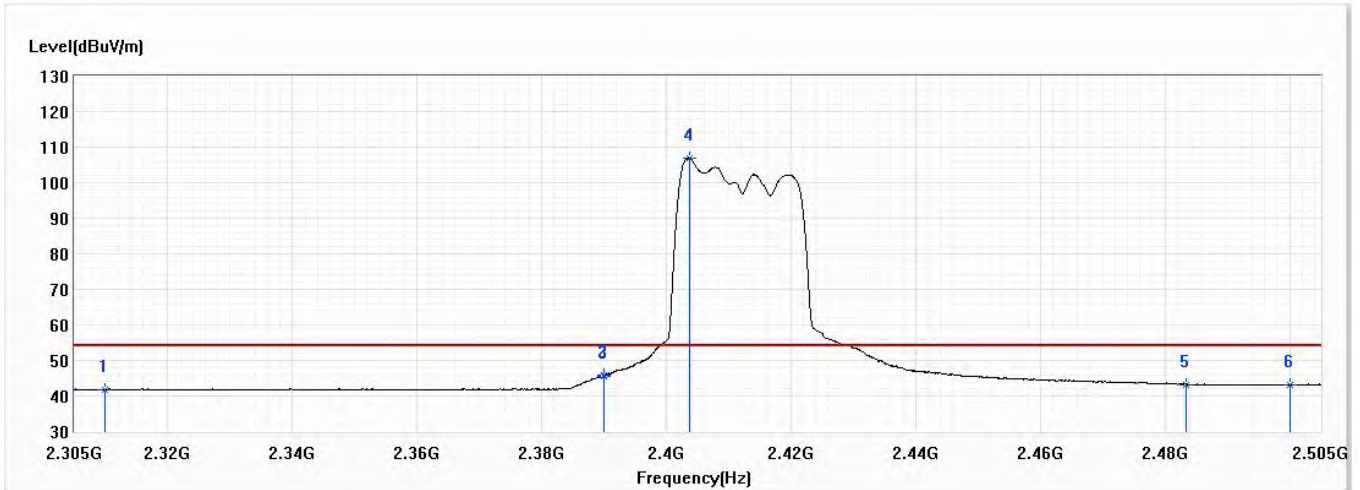


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.67	54.00	-12.33	30.05	11.62	AV
2	2389.900	45.70	54.00	-8.30	33.67	12.03	AV
3	2390.000	45.66	54.00	-8.34	33.63	12.03	AV
! 4	2403.700	106.96	54.00	52.96	94.85	12.11	AV
5	2483.500	43.27	54.00	-10.73	30.76	12.51	AV
6	2500.000	43.17	54.00	-10.83	30.57	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch1,2.412G,BW20M	Humidity (%RH)	53.0

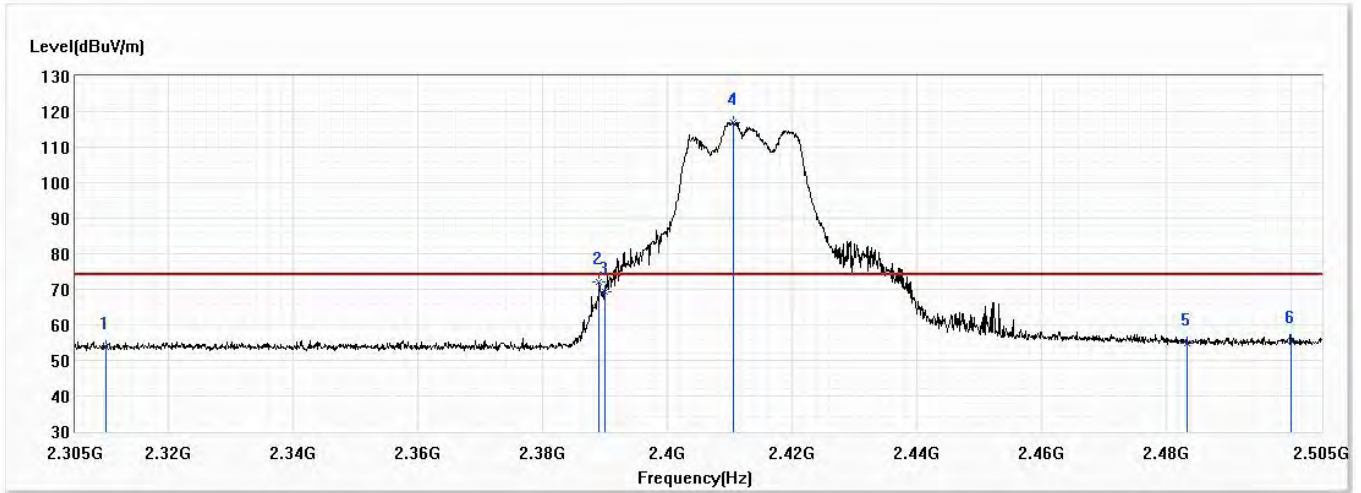


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.71	74.00	-20.29	42.09	11.62	PK
2	2389.100	72.11	74.00	-1.89	60.09	12.02	PK
3	2390.000	69.37	74.00	-4.63	57.34	12.03	PK
! 4	2410.500	116.99	74.00	42.99	104.84	12.15	PK
5	2483.500	54.79	74.00	-19.21	42.28	12.51	PK
6	2500.000	55.40	74.00	-18.60	42.80	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch1,2.412G,BW20M	Humidity (%RH)	53.0

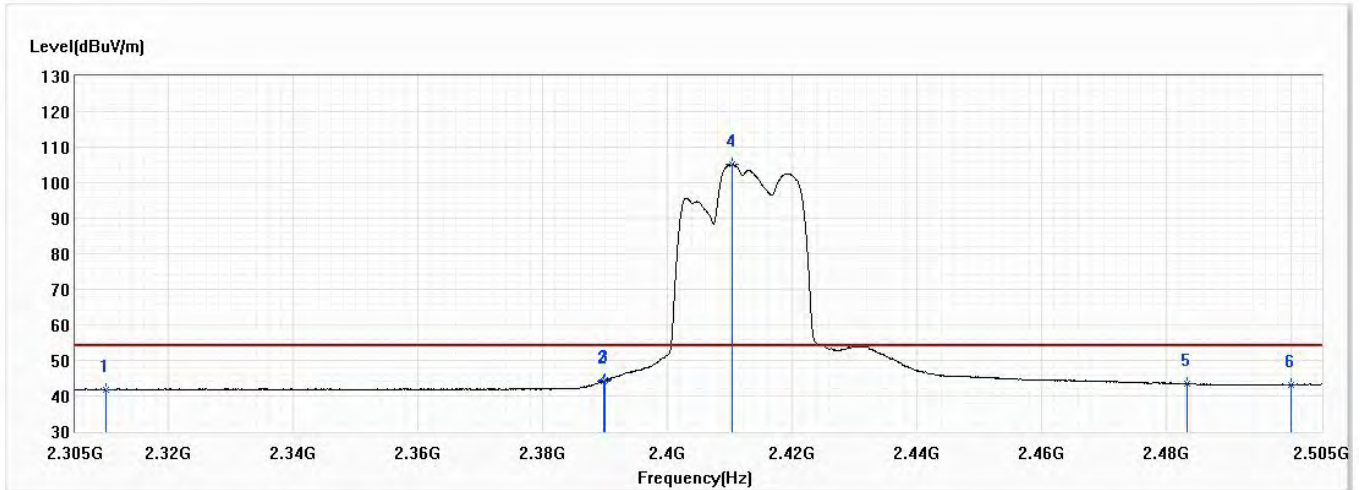


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.83	54.00	-12.17	30.21	11.62	AV
2	2389.700	44.12	54.00	-9.88	32.09	12.03	AV
3	2390.000	44.44	54.00	-9.56	32.41	12.03	AV
! 4	2410.400	105.08	54.00	51.08	92.94	12.14	AV
5	2483.500	43.42	54.00	-10.58	30.91	12.51	AV
6	2500.000	43.19	54.00	-10.81	30.59	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	53.0

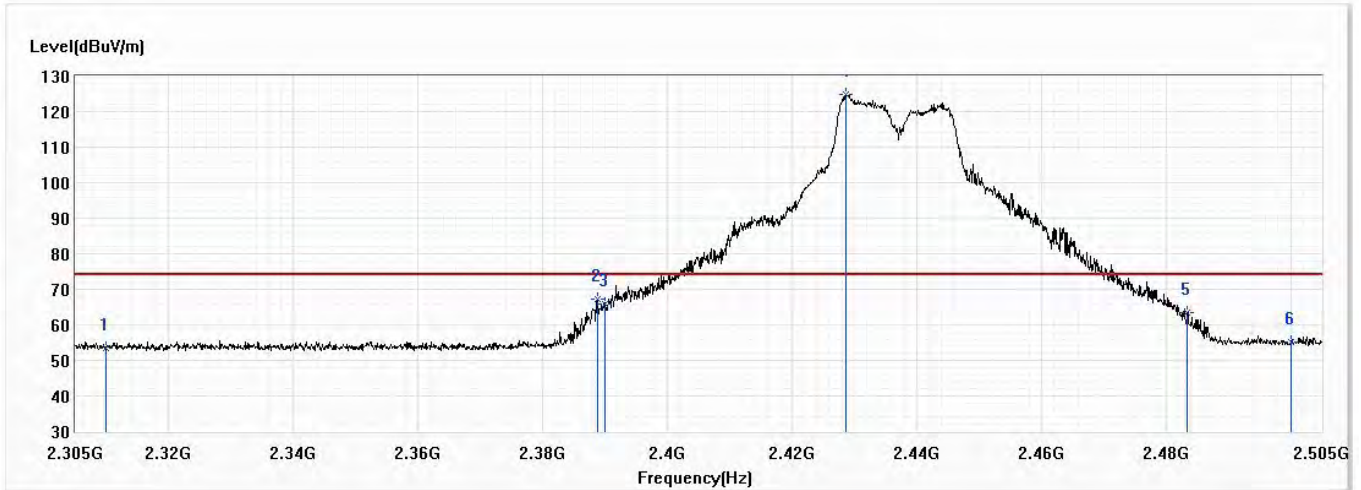


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.49	74.00	-20.51	41.87	11.62	PK
2	2388.800	67.11	74.00	-6.89	55.09	12.02	PK
3	2390.000	66.02	74.00	-7.98	53.99	12.03	PK
! 4	2428.700	124.98	74.00	50.98	112.74	12.24	PK
5	2483.500	63.58	74.00	-10.42	51.07	12.51	PK
6	2500.000	55.01	74.00	-18.99	42.41	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	53.0

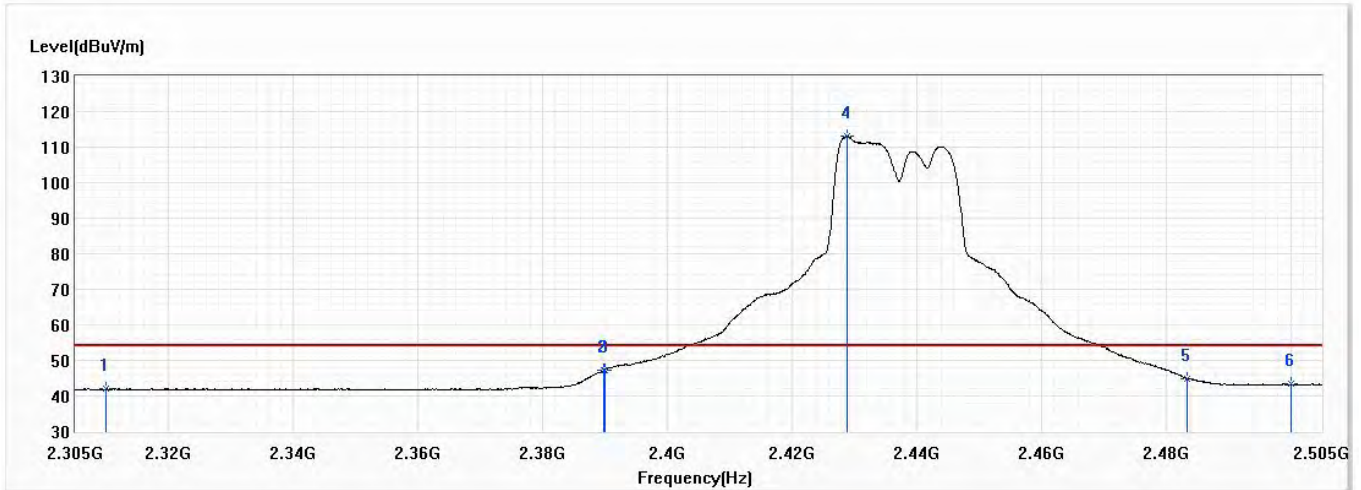


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.90	54.00	-12.10	30.28	11.62	AV
2	2389.700	47.23	54.00	-6.77	35.20	12.03	AV
3	2390.000	47.34	54.00	-6.66	35.31	12.03	AV
! 4	2428.900	113.12	54.00	59.12	100.88	12.24	AV
5	2483.500	44.96	54.00	-9.04	32.45	12.51	AV
6	2500.000	43.29	54.00	-10.71	30.69	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	53.0

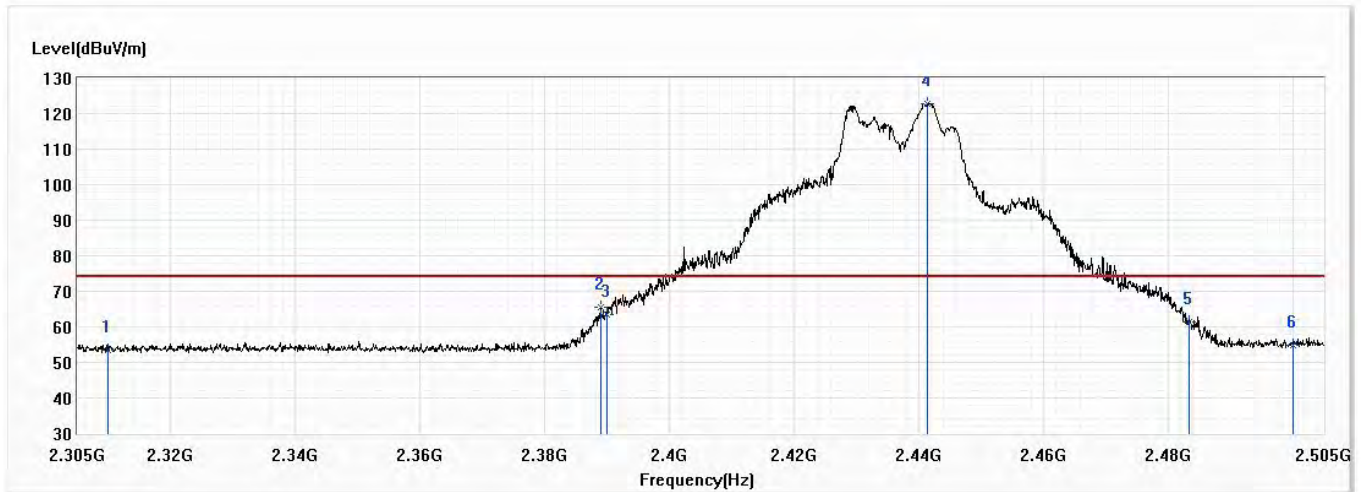

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.40	74.00	-20.60	41.78	11.62	PK
2	2389.000	65.44	74.00	-8.56	53.42	12.02	PK
3	2390.000	63.50	74.00	-10.50	51.47	12.03	PK
! 4	2441.500	122.93	74.00	48.93	110.63	12.30	PK
5	2483.500	61.46	74.00	-12.54	48.95	12.51	PK
6	2500.000	54.94	74.00	-19.06	42.34	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	53.0




No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.80	54.00	-12.20	30.18	11.62	AV
2	2389.700	45.85	54.00	-8.15	33.82	12.03	AV
3	2390.000	46.11	54.00	-7.89	34.08	12.03	AV
! 4	2441.600	111.44	54.00	57.44	99.14	12.30	AV
5	2483.500	44.92	54.00	-9.08	32.41	12.51	AV
6	2500.000	43.10	54.00	-10.90	30.50	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	53.0

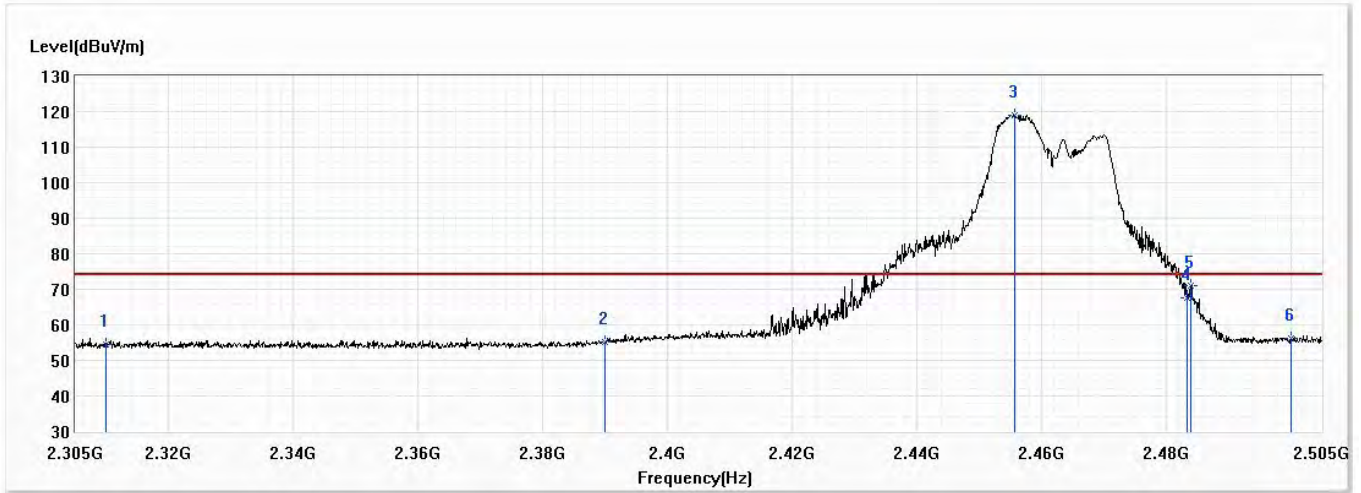


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	54.54	74.00	-19.46	42.92	11.62	PK
2	2390.000	55.08	74.00	-18.92	43.05	12.03	PK
! 3	2455.700	118.95	74.00	44.95	106.58	12.37	PK
4	2483.500	67.64	74.00	-6.36	55.13	12.51	PK
5	2484.000	71.13	74.00	-2.87	58.62	12.51	PK
6	2500.000	56.15	74.00	-17.85	43.55	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	53.0

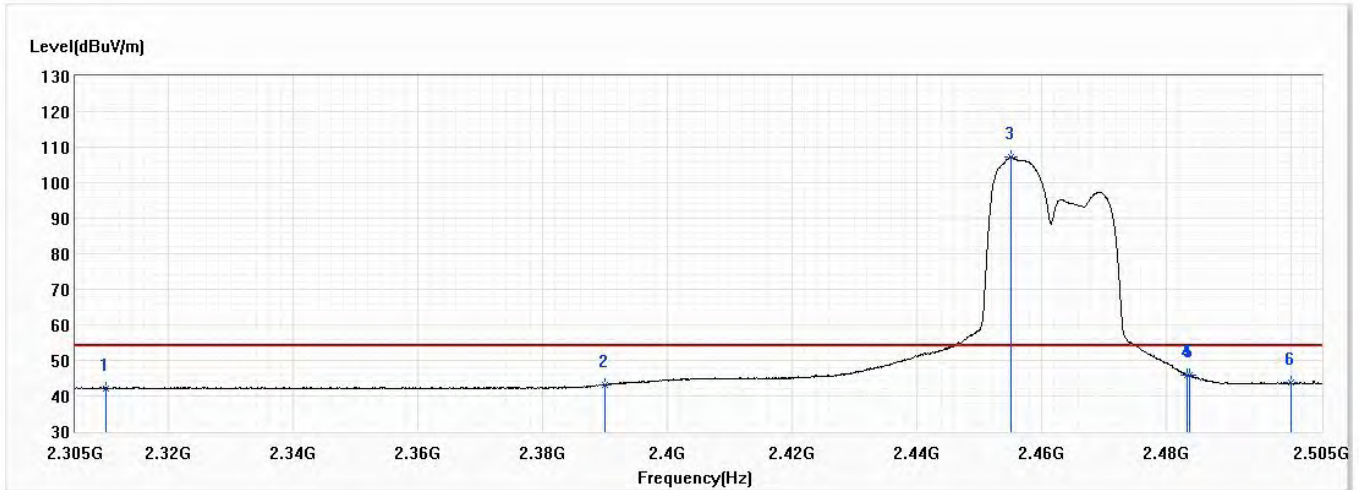


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	42.02	54.00	-11.98	30.40	11.62	AV
2	2390.000	43.22	54.00	-10.78	31.19	12.03	AV
! 3	2455.200	107.24	54.00	53.24	94.87	12.37	AV
4	2483.500	45.74	54.00	-8.26	33.23	12.51	AV
5	2483.800	45.75	54.00	-8.25	33.24	12.51	AV
6	2500.000	43.74	54.00	-10.26	31.14	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	53.0

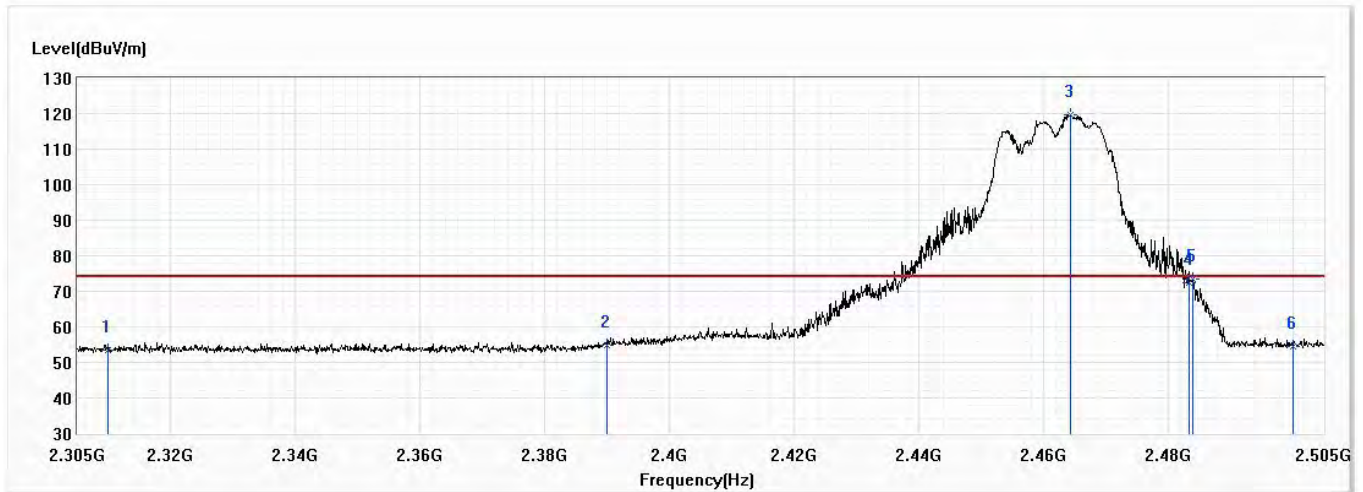


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.36	74.00	-20.64	41.74	11.62	PK
2	2390.000	54.95	74.00	-19.05	42.92	12.03	PK
! 3	2464.300	119.82	74.00	45.82	107.41	12.41	PK
4	2483.500	72.25	74.00	-1.75	59.74	12.51	PK
5	2484.000	73.49	74.00	-0.51	60.98	12.51	PK
6	2500.000	54.54	74.00	-19.46	41.94	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	53.0

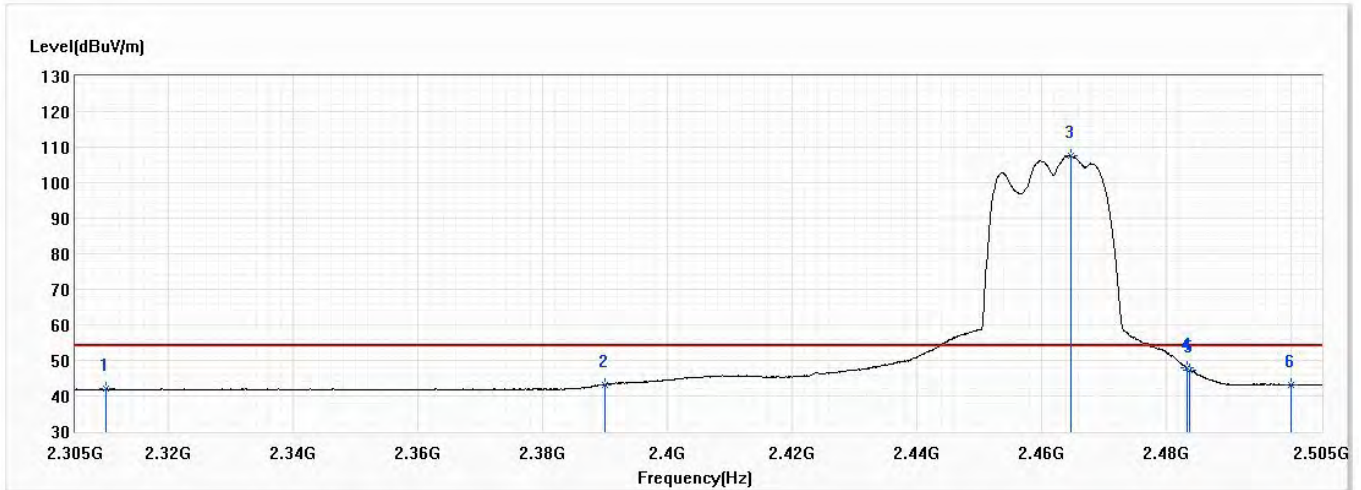


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.91	54.00	-12.09	30.29	11.62	AV
2	2390.000	43.22	54.00	-10.78	31.19	12.03	AV
! 3	2464.700	107.67	54.00	53.67	95.25	12.42	AV
4	2483.500	47.84	54.00	-6.16	35.33	12.51	AV
5	2483.800	47.31	54.00	-6.69	34.80	12.51	AV
6	2500.000	43.13	54.00	-10.87	30.53	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	53.0

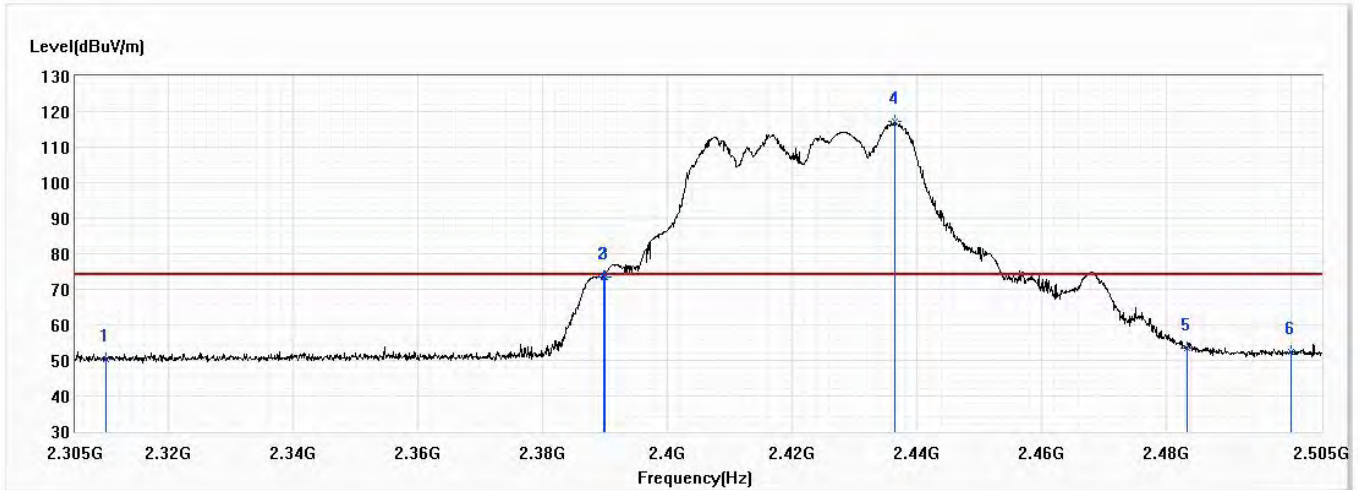


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.26	74.00	-23.74	38.64	11.62	PK
2	2389.800	73.49	74.00	-0.51	61.46	12.03	PK
3	2390.000	73.51	74.00	-0.49	61.48	12.03	PK
! 4	2436.500	117.07	74.00	43.07	104.79	12.28	PK
5	2483.500	53.33	74.00	-20.67	40.82	12.51	PK
6	2500.000	52.48	74.00	-21.52	39.88	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	53.0

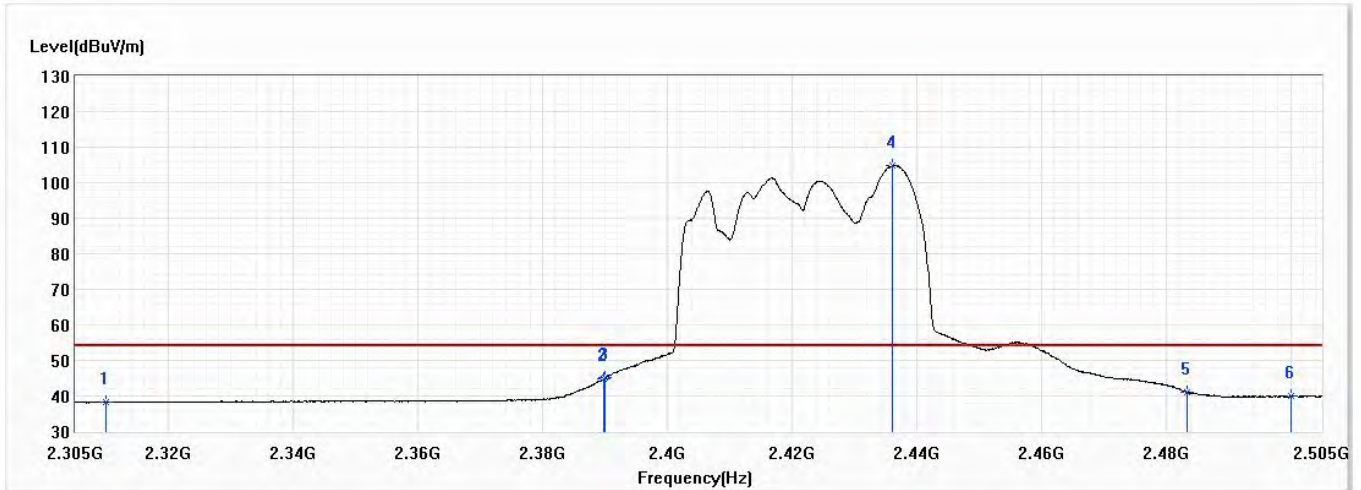


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	38.17	54.00	-15.83	26.55	11.62	AV
2	2389.700	44.80	54.00	-9.20	32.77	12.03	AV
3	2390.000	45.11	54.00	-8.89	33.08	12.03	AV
! 4	2436.200	104.85	54.00	50.85	92.57	12.28	AV
5	2483.500	41.14	54.00	-12.86	28.63	12.51	AV
6	2500.000	39.87	54.00	-14.13	27.27	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	53.0

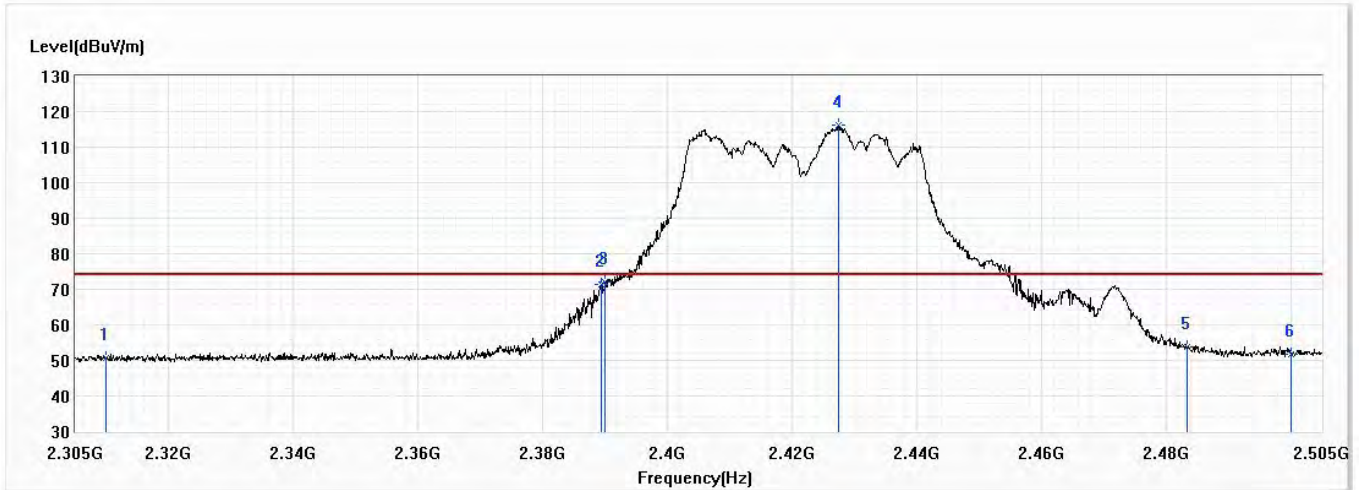


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.61	74.00	-23.39	38.99	11.62	PK
2	2389.400	71.51	74.00	-2.49	59.49	12.02	PK
3	2390.000	72.14	74.00	-1.86	60.11	12.03	PK
! 4	2427.400	116.04	74.00	42.04	103.81	12.23	PK
5	2483.500	53.71	74.00	-20.29	41.20	12.51	PK
6	2500.000	51.67	74.00	-22.33	39.07	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	53.0

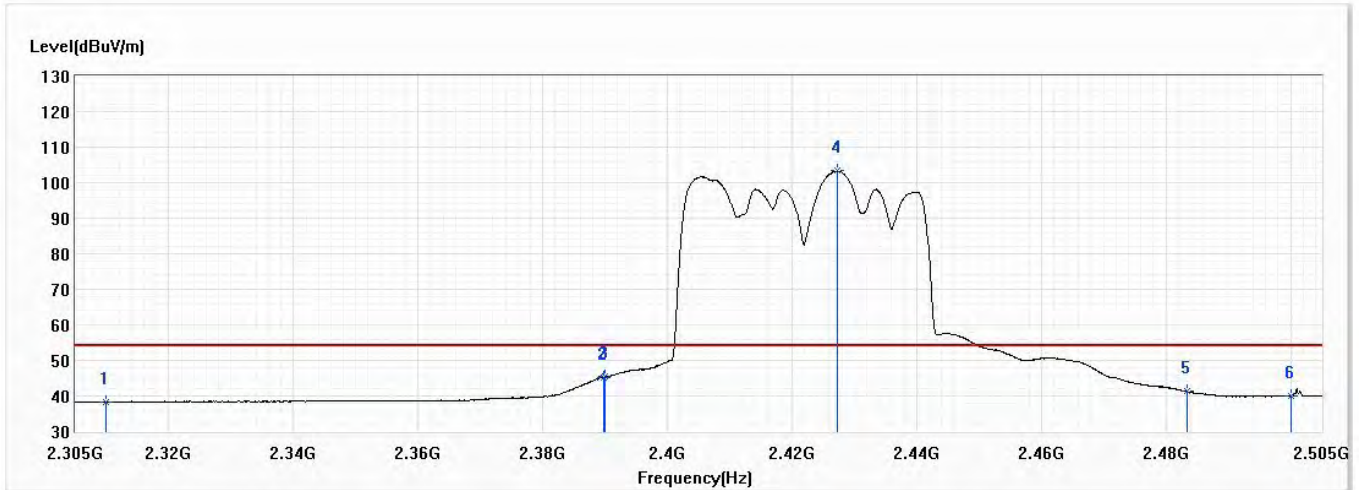


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	38.29	54.00	-15.71	26.67	11.62	AV
2	2389.700	45.09	54.00	-8.91	33.06	12.03	AV
3	2390.000	45.37	54.00	-8.63	33.34	12.03	AV
! 4	2427.300	103.34	54.00	49.34	91.11	12.23	AV
5	2483.500	41.22	54.00	-12.78	28.71	12.51	AV
6	2500.000	39.95	54.00	-14.05	27.35	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	53.0

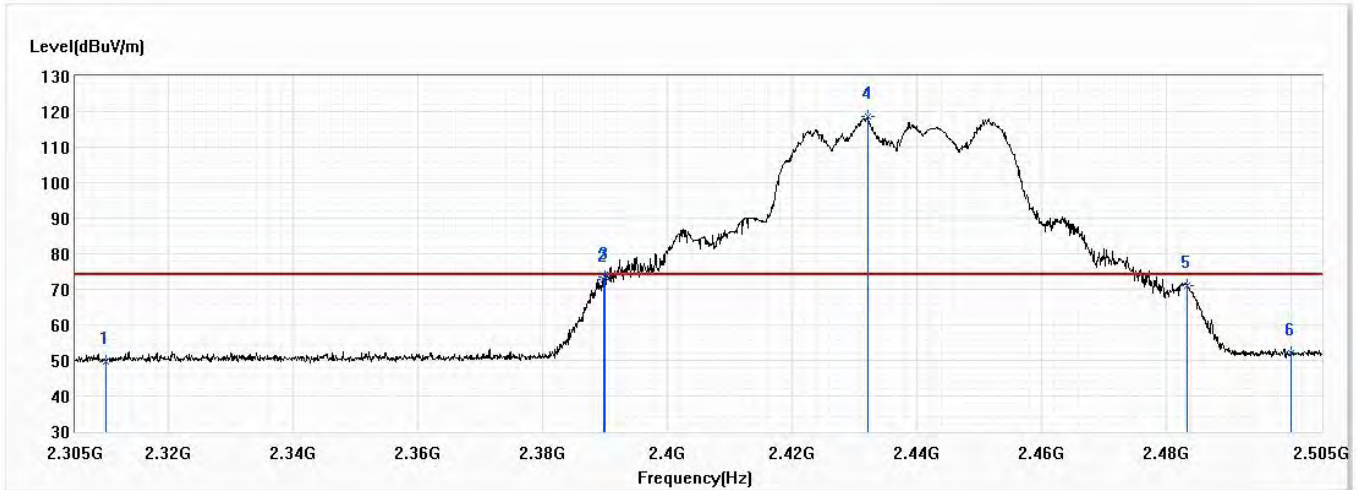


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	49.80	74.00	-24.20	38.18	11.62	PK
2	2389.700	72.60	74.00	-1.40	60.57	12.03	PK
3	2390.000	73.56	74.00	-0.44	61.53	12.03	PK
! 4	2432.100	118.48	74.00	44.48	106.23	12.25	PK
5	2483.500	71.08	74.00	-2.92	58.57	12.51	PK
6	2500.000	52.24	74.00	-21.76	39.64	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	53.0

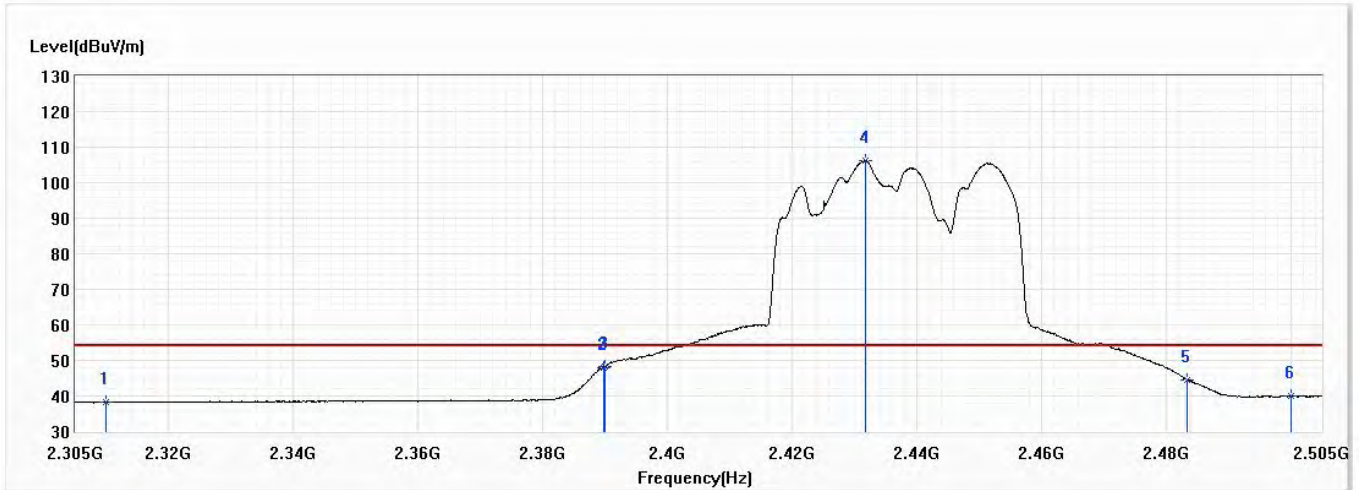


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	38.34	54.00	-15.66	26.72	11.62	AV
2	2389.700	48.10	54.00	-5.90	36.07	12.03	AV
3	2390.000	48.35	54.00	-5.65	36.32	12.03	AV
! 4	2431.700	106.26	54.00	52.26	94.01	12.25	AV
5	2483.500	44.60	54.00	-9.40	32.09	12.51	AV
6	2500.000	39.90	54.00	-14.10	27.30	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	53.0

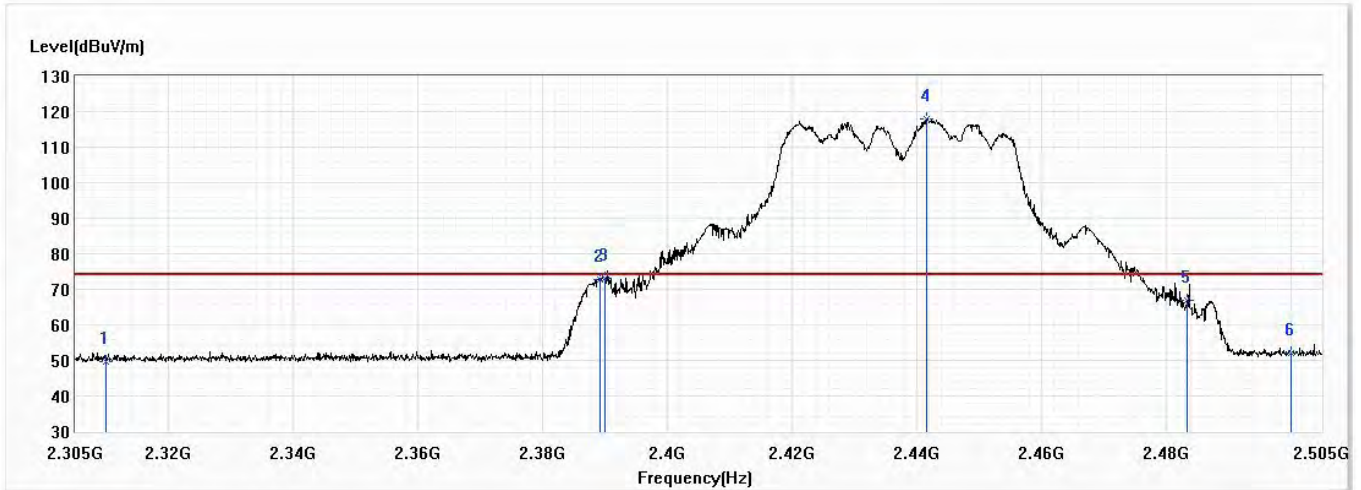


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	49.77	74.00	-24.23	38.15	11.62	PK
2	2389.200	72.89	74.00	-1.11	60.87	12.02	PK
3	2390.000	73.17	74.00	-0.83	61.14	12.03	PK
! 4	2441.700	117.83	74.00	43.83	105.53	12.30	PK
5	2483.500	66.78	74.00	-7.22	54.27	12.51	PK
6	2500.000	52.01	74.00	-21.99	39.41	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	53.0

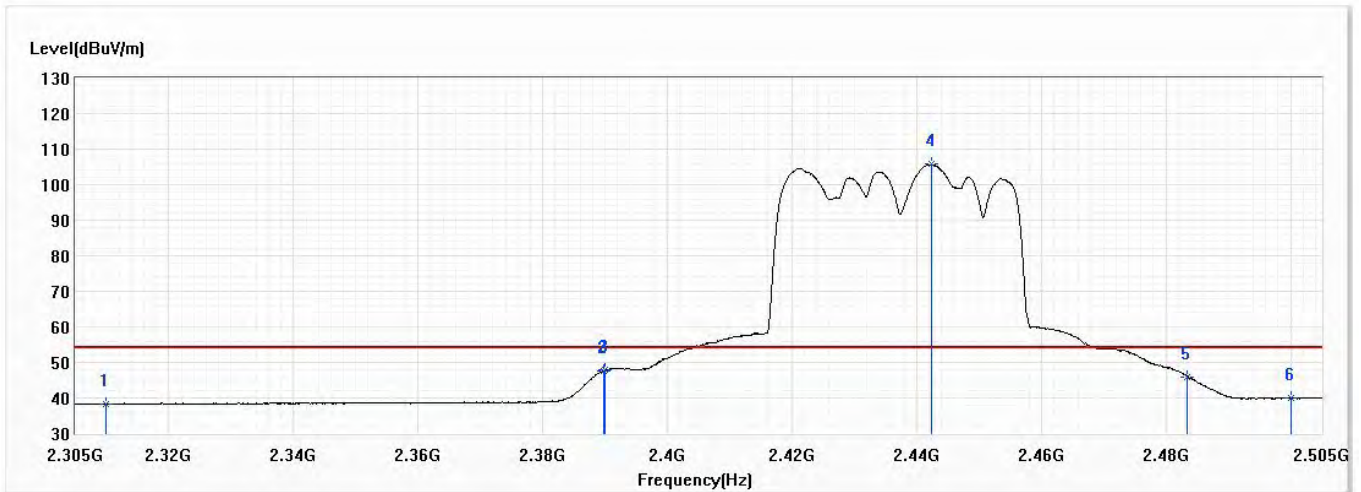


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	38.32	54.00	-15.68	26.70	11.62	AV
2	2389.700	47.60	54.00	-6.40	35.57	12.03	AV
3	2390.000	47.78	54.00	-6.22	35.75	12.03	AV
! 4	2442.400	105.71	54.00	51.71	93.41	12.30	AV
5	2483.500	45.91	54.00	-8.09	33.40	12.51	AV
6	2500.000	39.85	54.00	-14.15	27.25	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	53.0

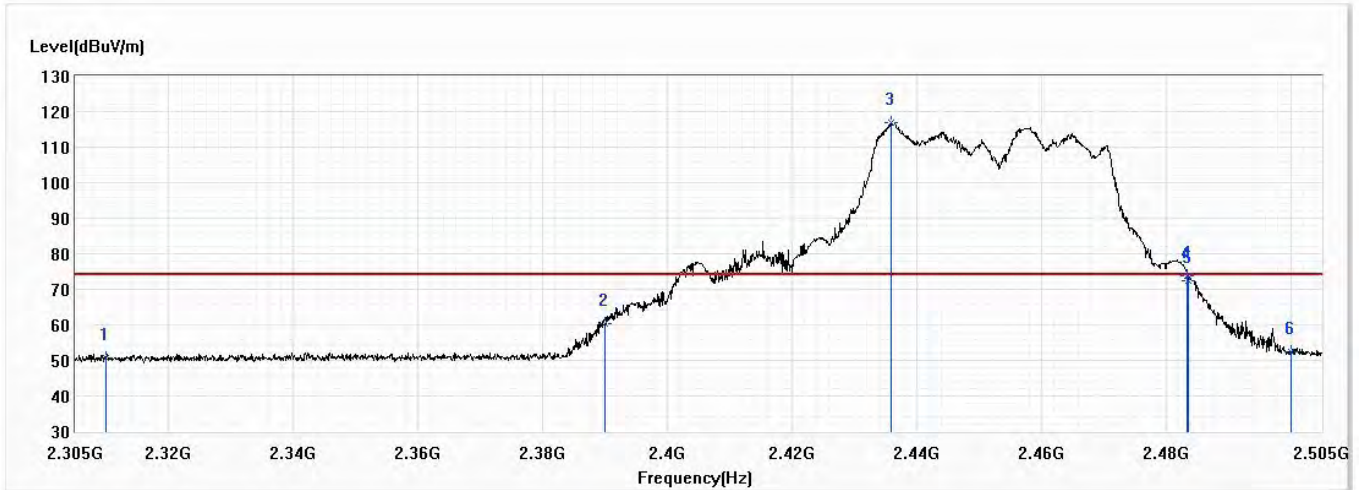


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.56	74.00	-23.44	38.94	11.62	PK
2	2390.000	60.30	74.00	-13.70	48.27	12.03	PK
! 3	2435.900	116.87	74.00	42.87	104.59	12.28	PK
4	2483.500	73.72	74.00	-0.28	61.21	12.51	PK
5	2483.700	72.44	74.00	-1.56	59.93	12.51	PK
6	2500.000	52.40	74.00	-21.60	39.80	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	53.0

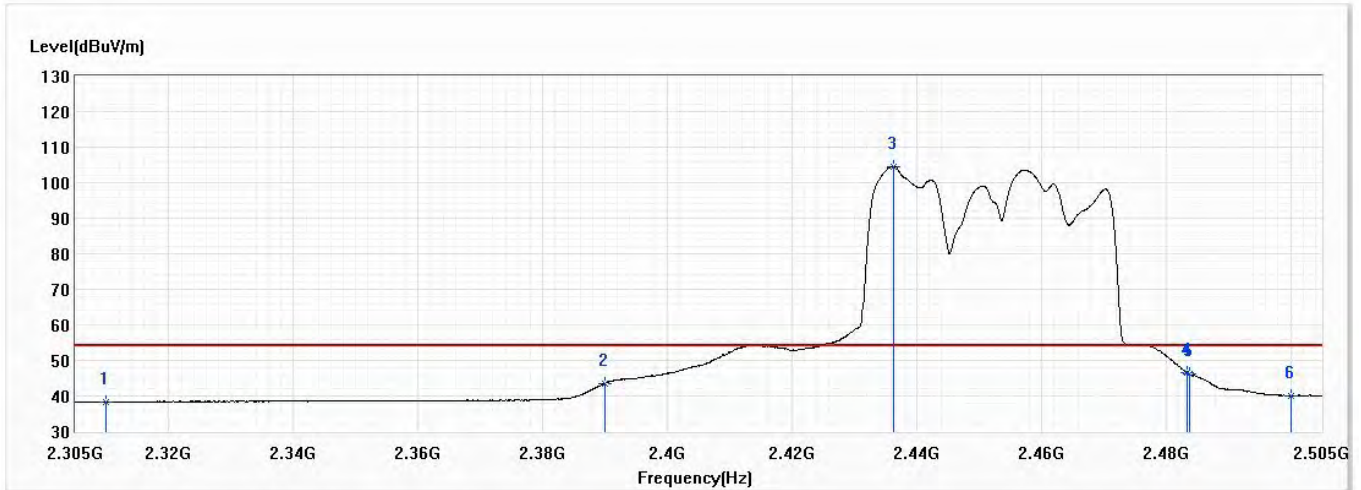


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	38.35	54.00	-15.65	26.73	11.62	AV
2	2390.000	43.56	54.00	-10.44	31.53	12.03	AV
! 3	2436.300	104.64	54.00	50.64	92.36	12.28	AV
4	2483.500	46.54	54.00	-7.46	34.03	12.51	AV
5	2483.800	46.26	54.00	-7.74	33.75	12.51	AV
6	2500.000	40.06	54.00	-13.94	27.46	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	53.0

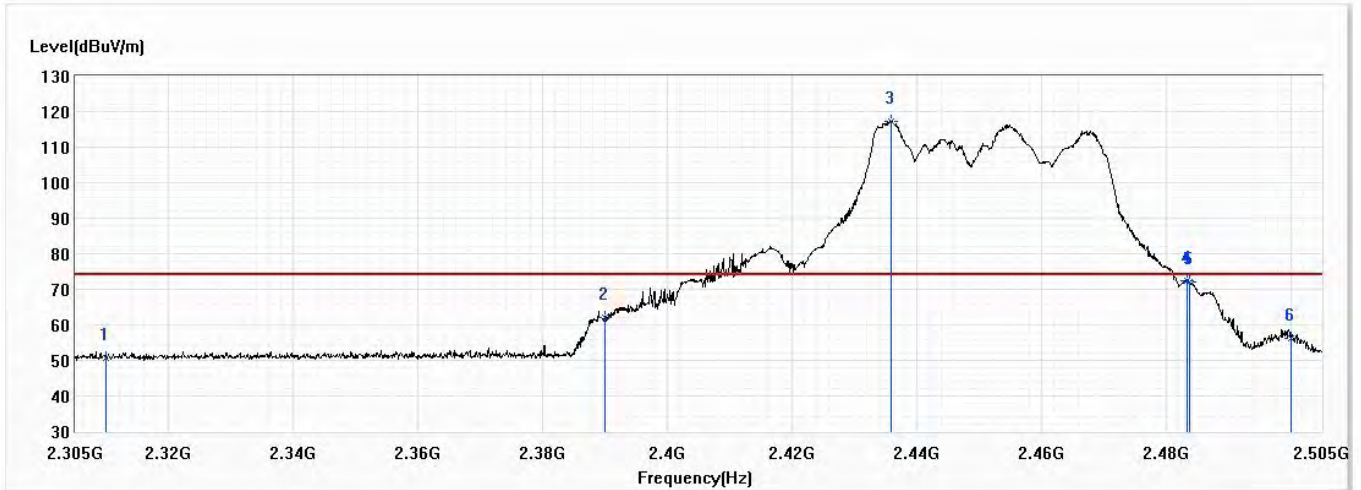


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	50.54	74.00	-23.46	38.92	11.62	PK
2	2390.000	62.24	74.00	-11.76	50.21	12.03	PK
! 3	2435.900	117.35	74.00	43.35	105.07	12.28	PK
4	2483.500	72.29	74.00	-1.71	59.78	12.51	PK
5	2483.800	71.96	74.00	-2.04	59.45	12.51	PK
6	2500.000	56.21	74.00	-17.79	43.61	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/6
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	53.0

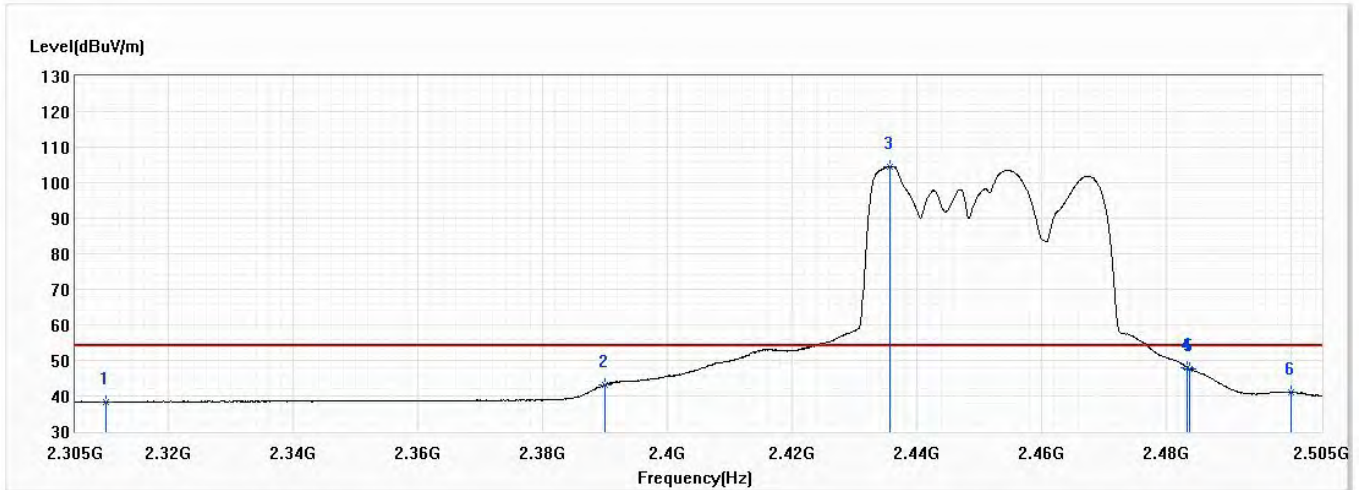


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	38.29	54.00	-15.71	26.67	11.62	AV
2	2390.000	43.18	54.00	-10.82	31.15	12.03	AV
! 3	2435.700	104.64	54.00	50.64	92.36	12.28	AV
4	2483.500	48.01	54.00	-5.99	35.50	12.51	AV
5	2483.800	47.74	54.00	-6.26	35.23	12.51	AV
6	2500.000	40.98	54.00	-13.02	28.38	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch 1,2.412G,BW20M	Humidity (%RH)	53.0

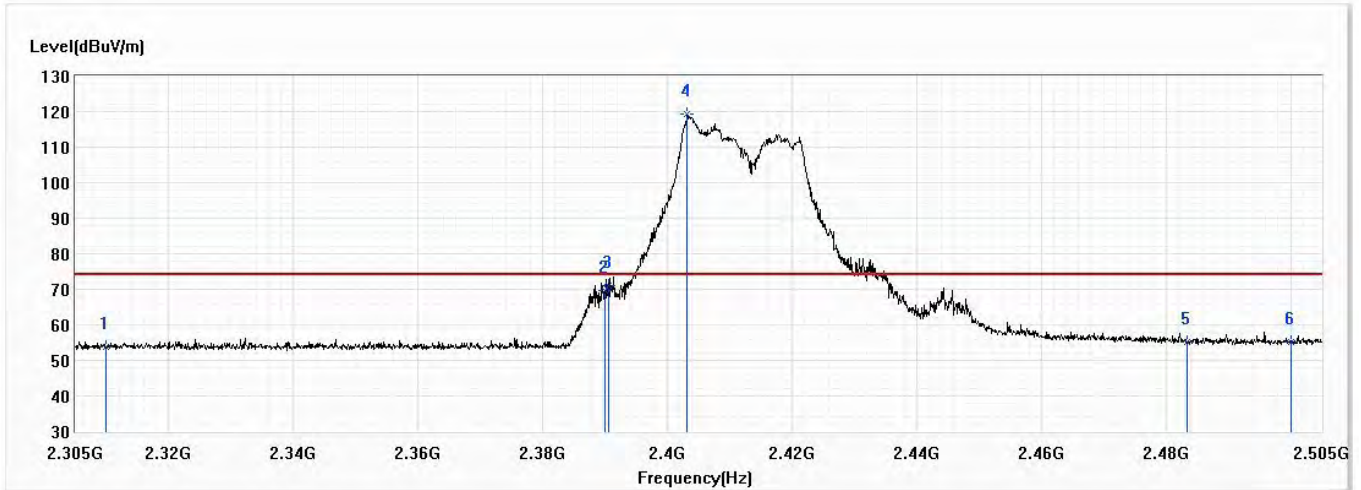


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.81	74.00	-20.19	42.19	11.62	PK
2	2390.000	69.76	74.00	-4.24	57.73	12.03	PK
3	2390.600	71.00	74.00	-3.00	58.97	12.03	PK
! 4	2403.200	119.46	74.00	45.46	107.35	12.11	PK
5	2483.500	55.30	74.00	-18.70	42.79	12.51	PK
6	2500.000	55.21	74.00	-18.79	42.61	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch 1,2.412G,BW20M	Humidity (%RH)	53.0

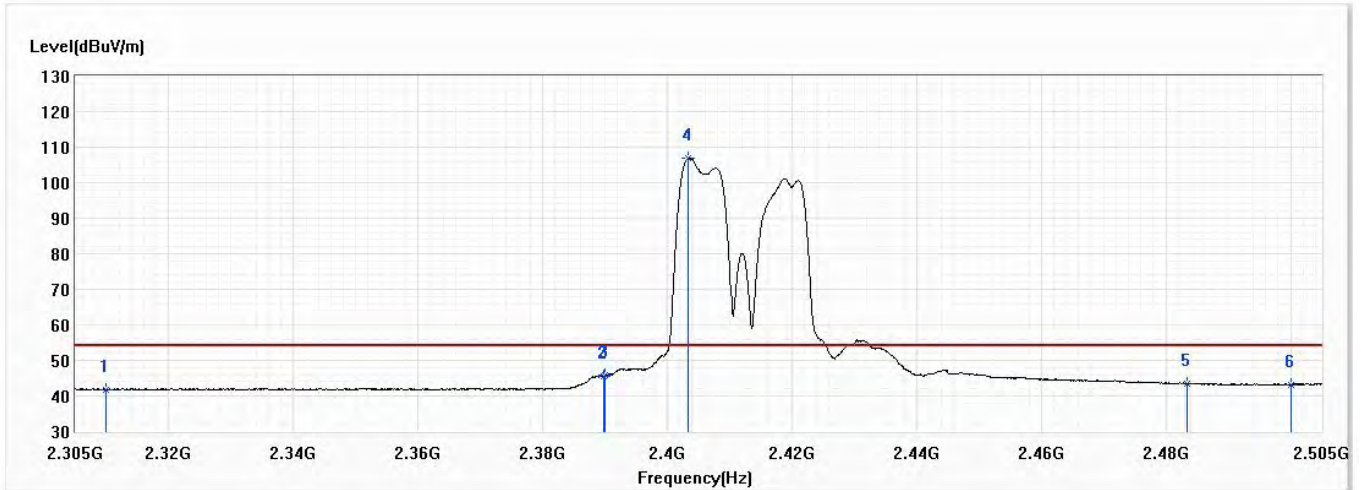


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.85	54.00	-12.15	30.23	11.62	AV
2	2389.800	45.59	54.00	-8.41	33.56	12.03	AV
3	2390.000	45.99	54.00	-8.01	33.96	12.03	AV
! 4	2403.400	106.82	54.00	52.82	94.71	12.11	AV
5	2483.500	43.48	54.00	-10.52	30.97	12.51	AV
6	2500.000	43.18	54.00	-10.82	30.58	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch 1,2.412G,BW20M	Humidity (%RH)	53.0

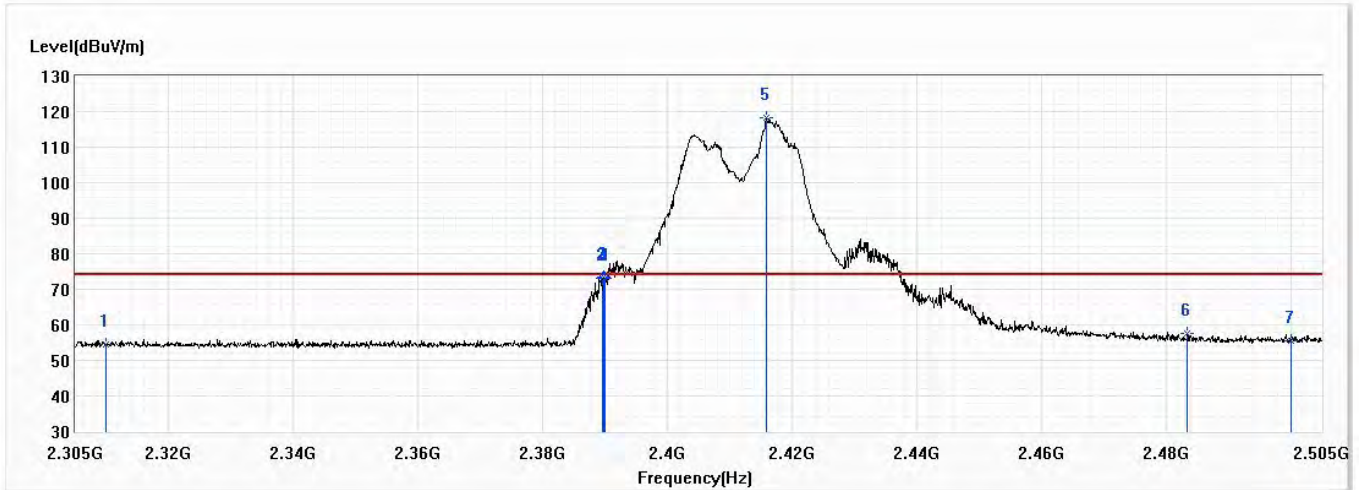


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	54.58	74.00	-19.42	42.96	11.62	PK
2	2389.600	72.96	74.00	-1.04	60.93	12.03	PK
3	2389.700	73.53	74.00	-0.47	61.50	12.03	PK
4	2390.000	73.00	74.00	-1.00	60.97	12.03	PK
! 5	2415.800	118.35	74.00	44.35	106.18	12.17	PK
6	2483.500	57.51	74.00	-16.49	45.00	12.51	PK
7	2500.000	55.40	74.00	-18.60	42.80	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch 1,2.412G,BW20M	Humidity (%RH)	53.0

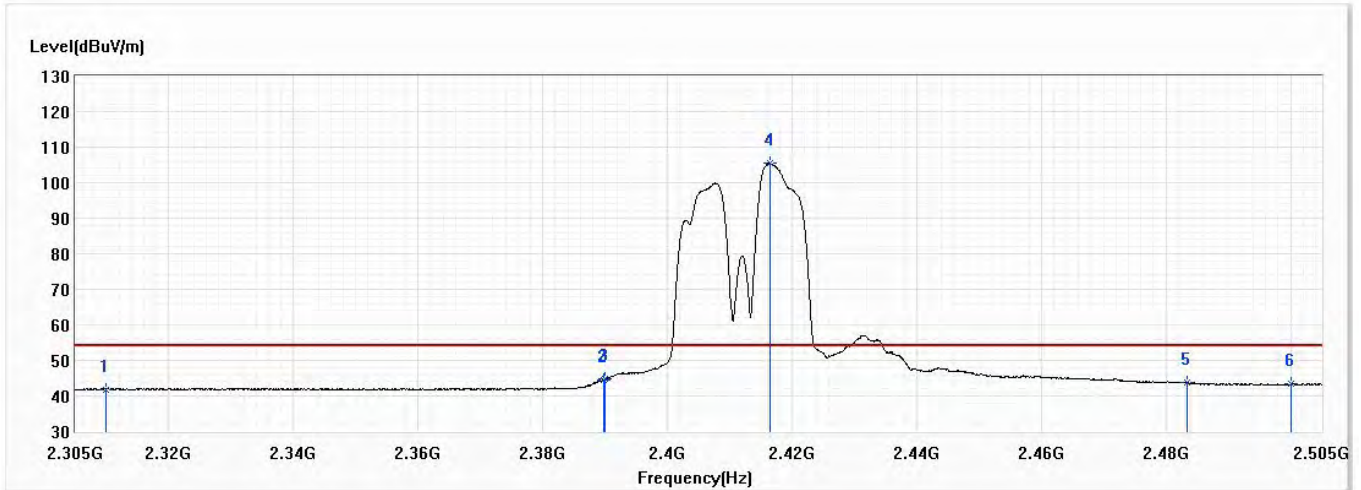


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.86	54.00	-12.14	30.24	11.62	AV
2	2389.800	44.52	54.00	-9.48	32.49	12.03	AV
3	2390.000	44.74	54.00	-9.26	32.71	12.03	AV
! 4	2416.500	105.42	54.00	51.42	93.25	12.17	AV
5	2483.500	43.70	54.00	-10.30	31.19	12.51	AV
6	2500.000	43.42	54.00	-10.58	30.82	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	53.0

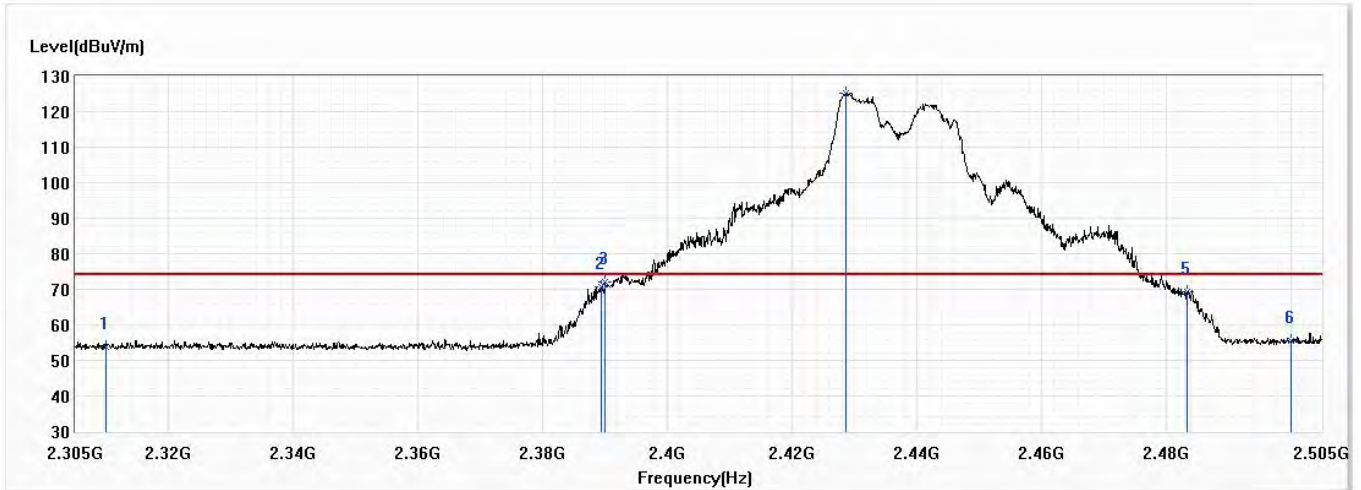


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.87	74.00	-20.13	42.25	11.62	PK
2	2389.300	70.84	74.00	-3.16	58.82	12.02	PK
3	2390.000	71.96	74.00	-2.04	59.93	12.03	PK
! 4	2428.700	125.12	74.00	51.12	112.88	12.24	PK
5	2483.500	69.48	74.00	-4.52	56.97	12.51	PK
6	2500.000	55.42	74.00	-18.58	42.82	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	53.0

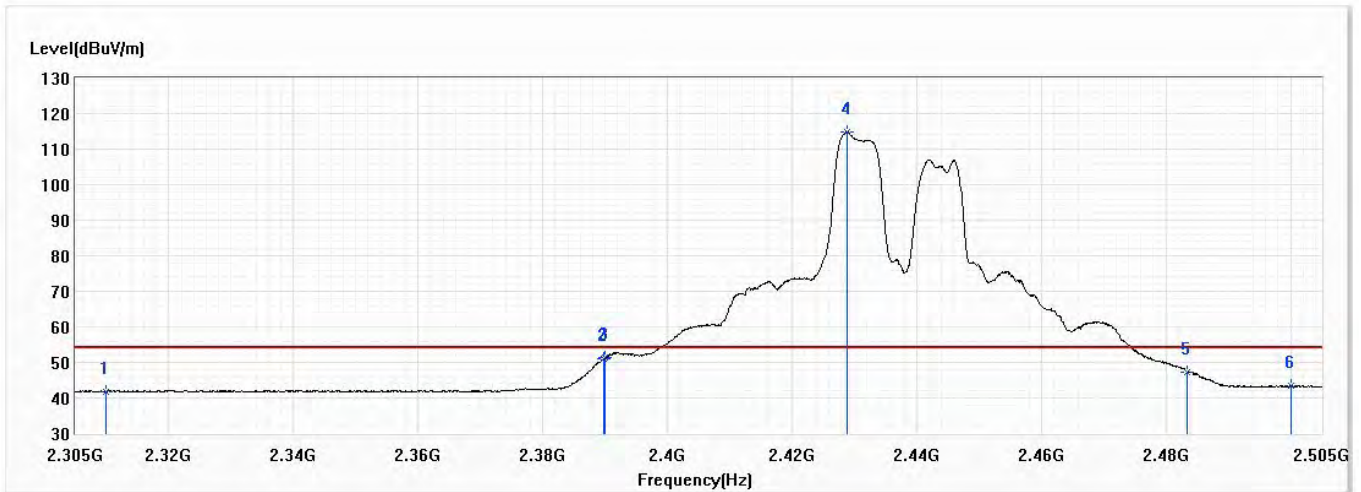


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.76	54.00	-12.24	30.14	11.62	AV
2	2389.800	50.99	54.00	-3.01	38.96	12.03	AV
3	2390.000	51.26	54.00	-2.74	39.23	12.03	AV
! 4	2428.900	114.76	54.00	60.76	102.52	12.24	AV
5	2483.500	47.37	54.00	-6.63	34.86	12.51	AV
6	2500.000	43.28	54.00	-10.72	30.68	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	53.0

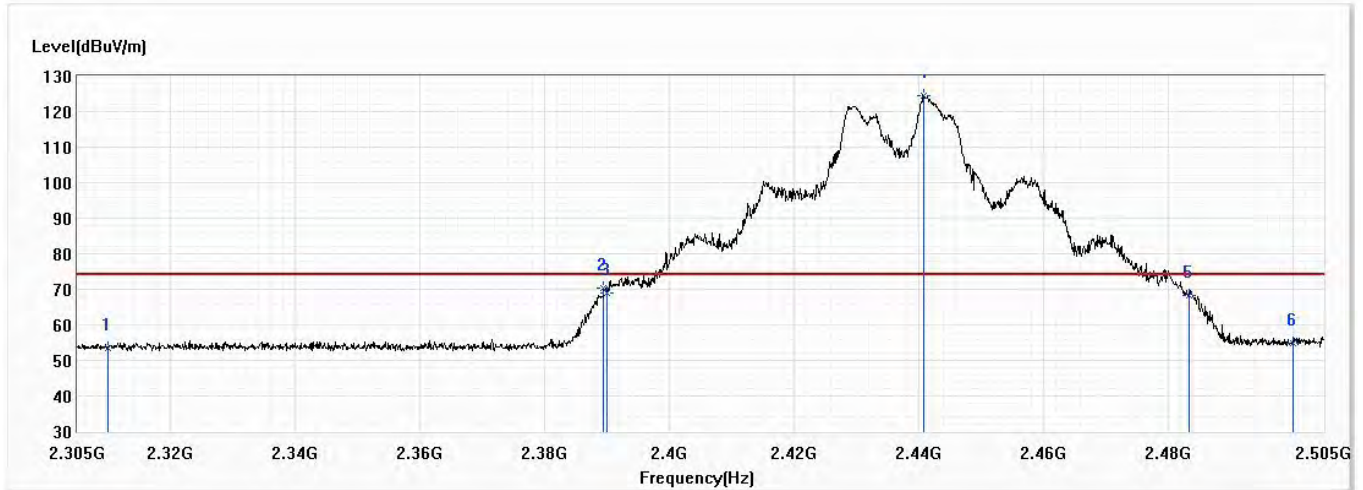


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.47	74.00	-20.53	41.85	11.62	PK
2	2389.400	70.41	74.00	-3.59	58.39	12.02	PK
3	2390.000	68.82	74.00	-5.18	56.79	12.03	PK
! 4	2440.800	124.64	74.00	50.64	112.34	12.30	PK
5	2483.500	68.32	74.00	-5.68	55.81	12.51	PK
6	2500.000	54.97	74.00	-19.03	42.37	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	53.0

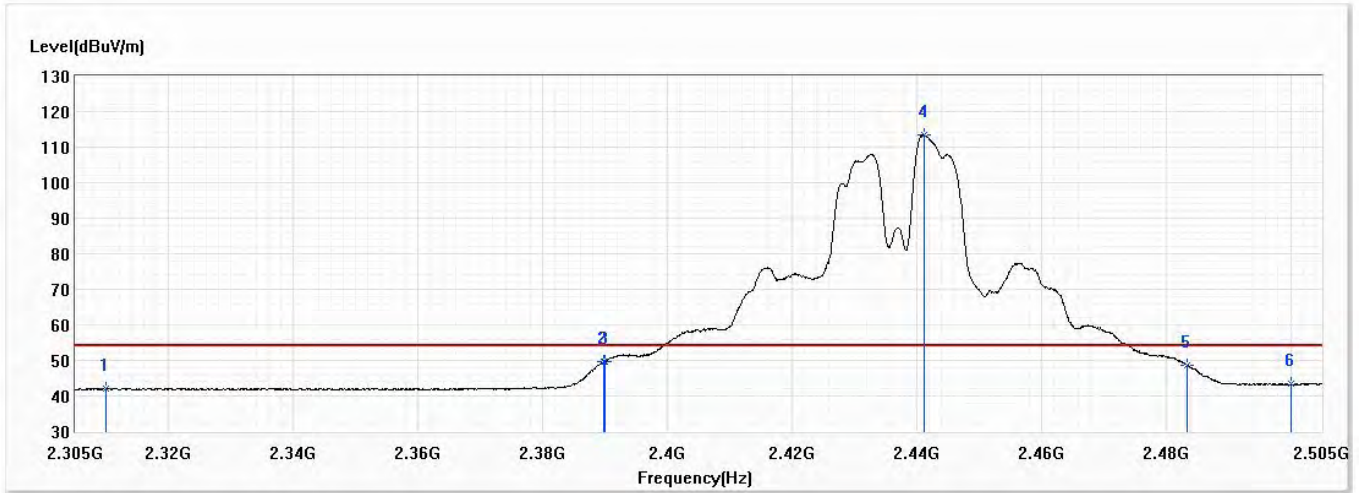


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.96	54.00	-12.04	30.34	11.62	AV
2	2389.700	49.70	54.00	-4.30	37.67	12.03	AV
3	2390.000	49.77	54.00	-4.23	37.74	12.03	AV
! 4	2441.200	113.42	54.00	59.42	101.12	12.30	AV
5	2483.500	48.64	54.00	-5.36	36.13	12.51	AV
6	2500.000	43.30	54.00	-10.70	30.70	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	53.0

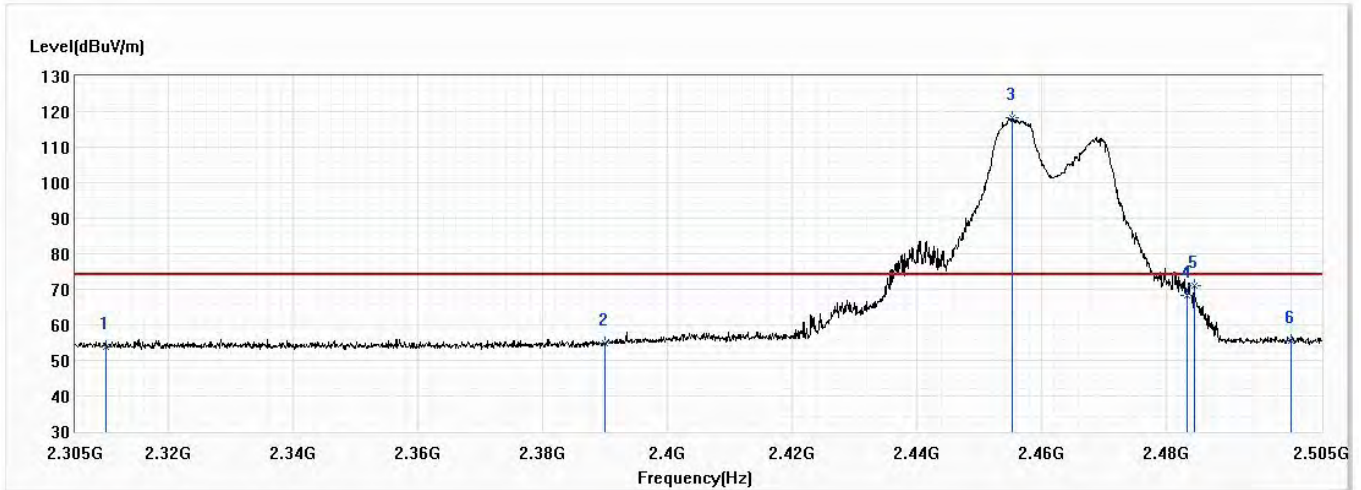


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.96	74.00	-20.04	42.34	11.62	PK
2	2390.000	54.95	74.00	-19.05	42.92	12.03	PK
! 3	2455.400	118.24	74.00	44.24	105.87	12.37	PK
4	2483.500	68.42	74.00	-5.58	55.91	12.51	PK
5	2484.500	71.19	74.00	-2.81	58.67	12.52	PK
6	2500.000	55.56	74.00	-18.44	42.96	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	53.0

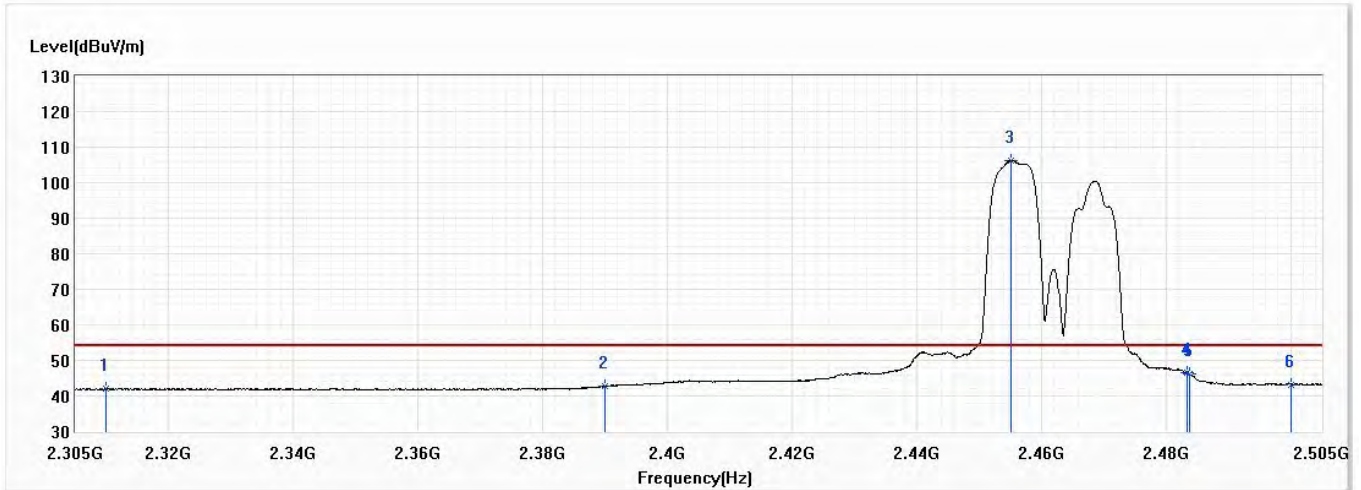


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.99	54.00	-12.01	30.37	11.62	AV
2	2390.000	42.85	54.00	-11.15	30.82	12.03	AV
! 3	2455.100	106.29	54.00	52.29	93.92	12.37	AV
4	2483.500	46.48	54.00	-7.52	33.97	12.51	AV
5	2483.900	46.04	54.00	-7.96	33.53	12.51	AV
6	2500.000	43.20	54.00	-10.80	30.60	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	53.0

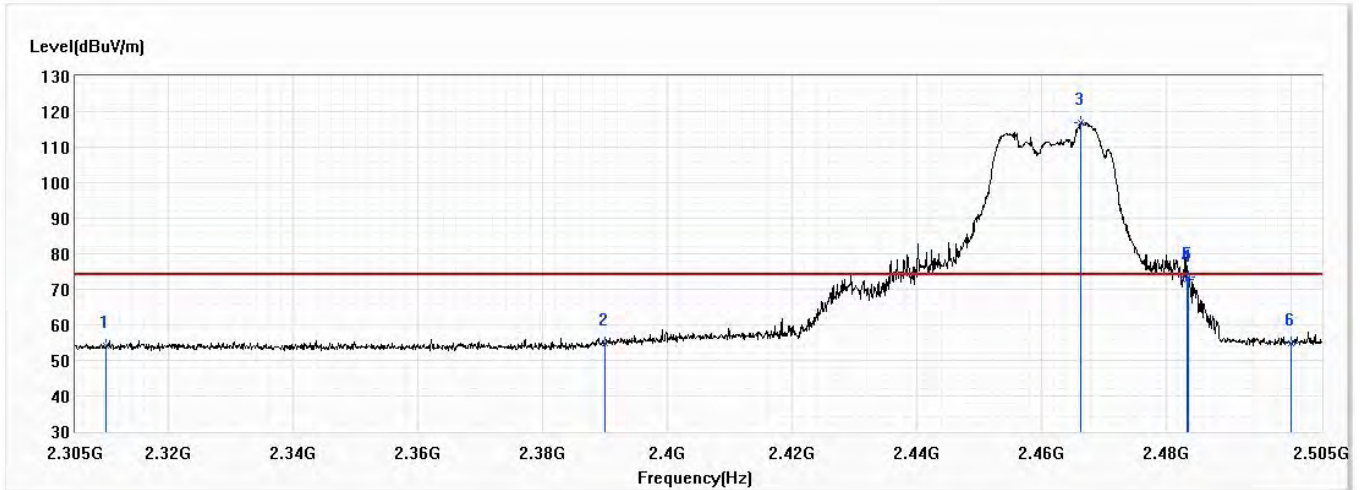


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	54.30	74.00	-19.70	42.68	11.62	PK
2	2390.000	54.70	74.00	-19.30	42.67	12.03	PK
! 3	2466.300	116.99	74.00	42.99	104.56	12.43	PK
4	2483.500	72.61	74.00	-1.39	60.10	12.51	PK
5	2483.600	73.56	74.00	-0.44	61.05	12.51	PK
6	2500.000	54.75	74.00	-19.25	42.15	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	53.0

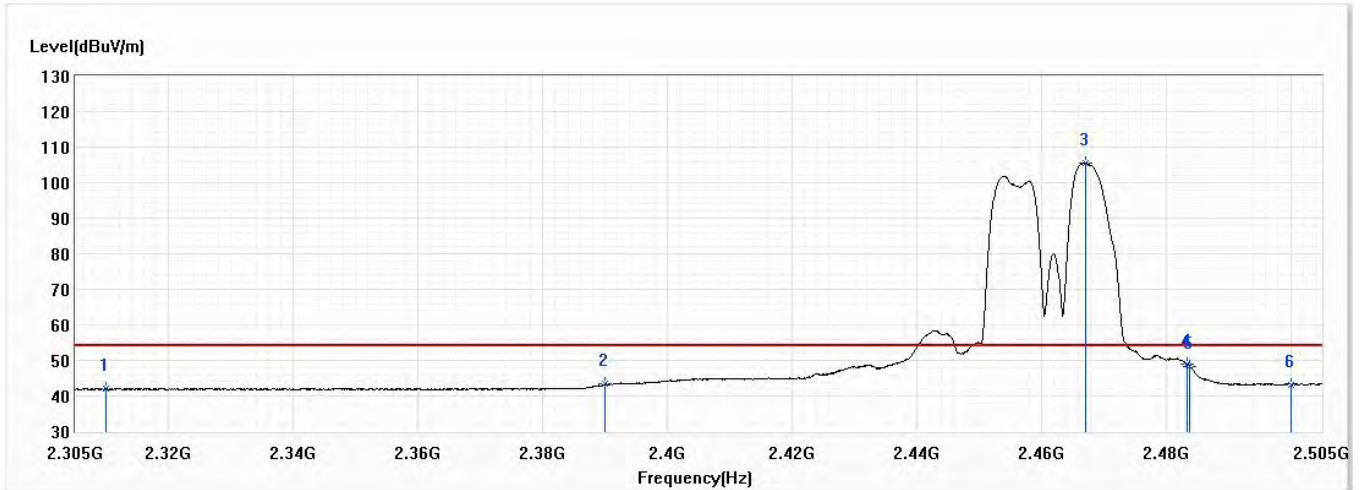


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.97	54.00	-12.03	30.35	11.62	AV
2	2390.000	43.32	54.00	-10.68	31.29	12.03	AV
! 3	2467.100	105.65	54.00	51.65	93.22	12.43	AV
4	2483.500	48.91	54.00	-5.09	36.40	12.51	AV
5	2483.900	48.38	54.00	-5.62	35.87	12.51	AV
6	2500.000	43.20	54.00	-10.80	30.60	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	53.0

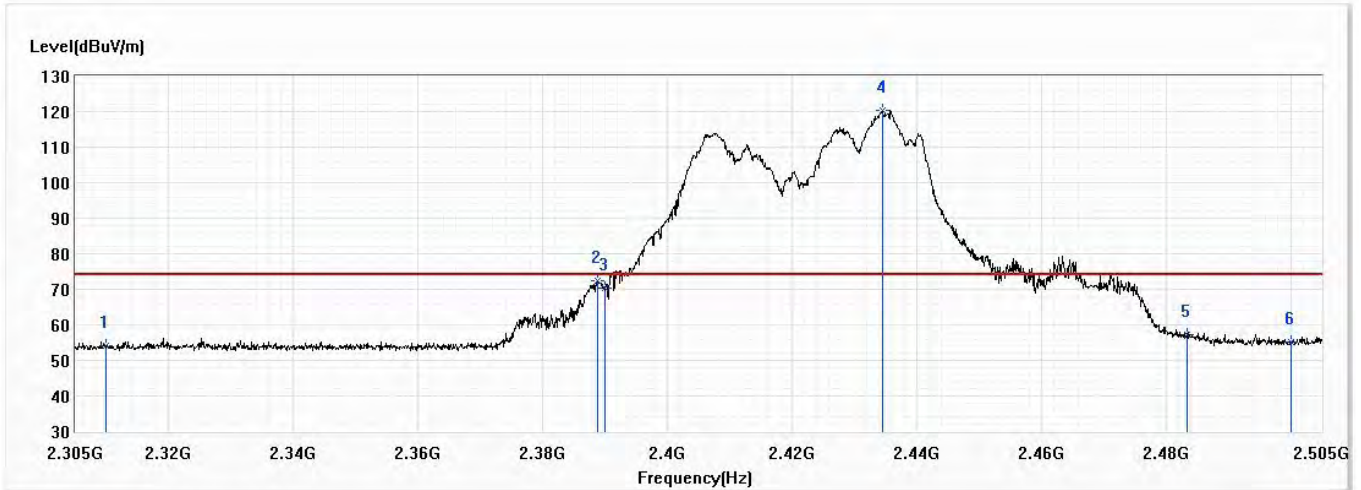


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	54.26	74.00	-19.74	42.64	11.62	PK
2	2388.800	72.28	74.00	-1.72	60.26	12.02	PK
3	2390.000	70.46	74.00	-3.54	58.43	12.03	PK
! 4	2434.500	120.33	74.00	46.33	108.07	12.26	PK
5	2483.500	57.18	74.00	-16.82	44.67	12.51	PK
6	2500.000	55.19	74.00	-18.81	42.59	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	53.0

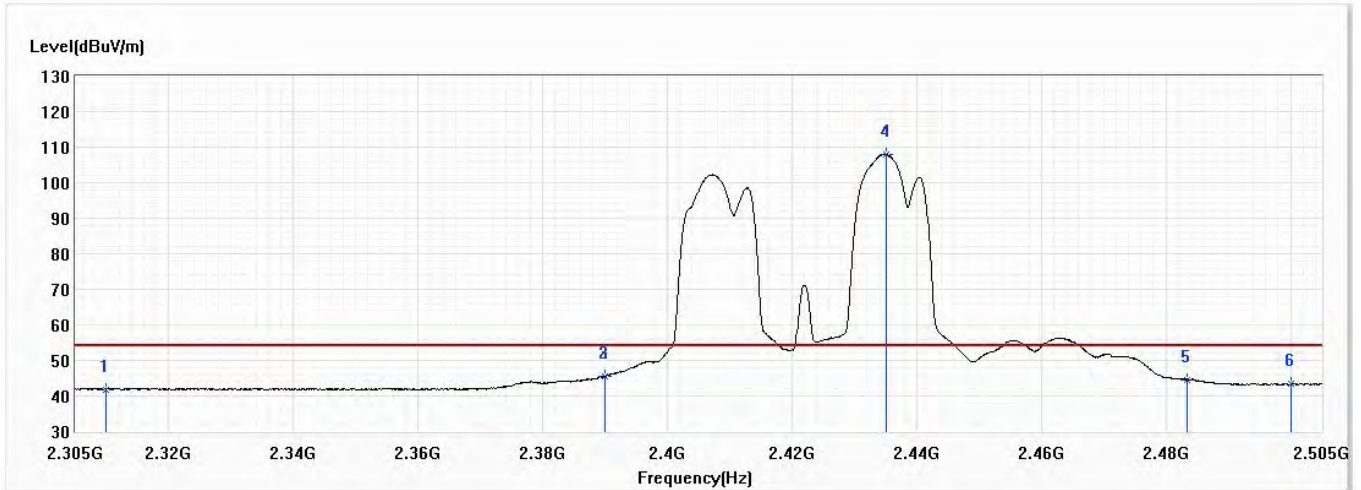


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.83	54.00	-12.17	30.21	11.62	AV
2	2389.900	45.51	54.00	-8.49	33.48	12.03	AV
3	2390.000	45.67	54.00	-8.33	33.64	12.03	AV
! 4	2435.100	107.91	54.00	53.91	95.65	12.26	AV
5	2483.500	44.54	54.00	-9.46	32.03	12.51	AV
6	2500.000	43.37	54.00	-10.63	30.77	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	53.0

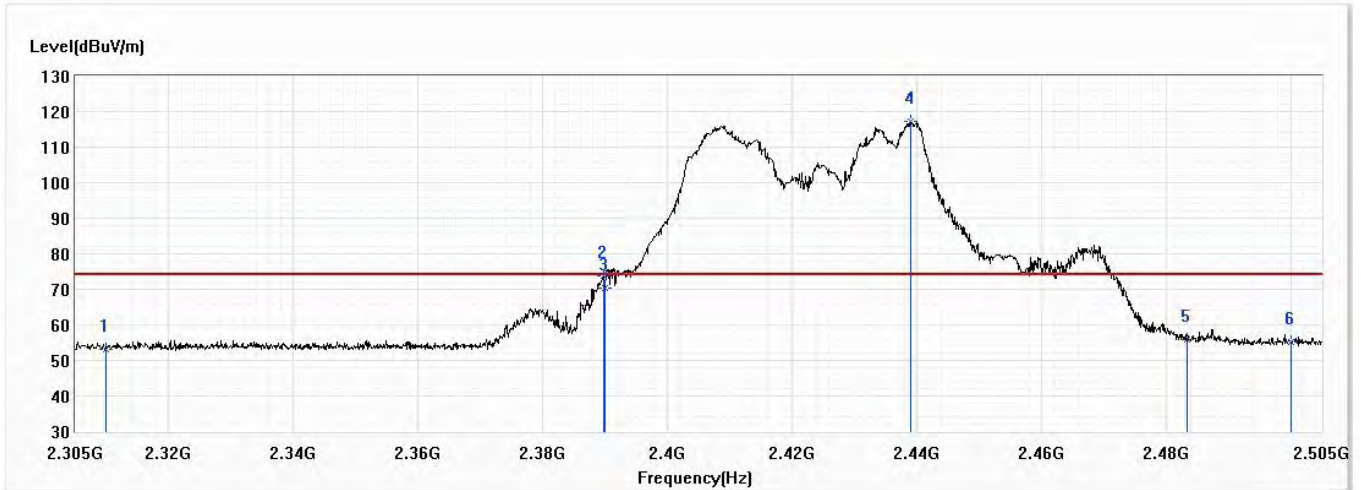


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.15	74.00	-20.85	41.53	11.62	PK
2	2389.700	73.68	74.00	-0.32	61.65	12.03	PK
3	2390.000	70.49	74.00	-3.51	58.46	12.03	PK
! 4	2439.000	117.35	74.00	43.35	105.07	12.28	PK
5	2483.500	55.78	74.00	-18.22	43.27	12.51	PK
6	2500.000	55.30	74.00	-18.70	42.70	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	53.0

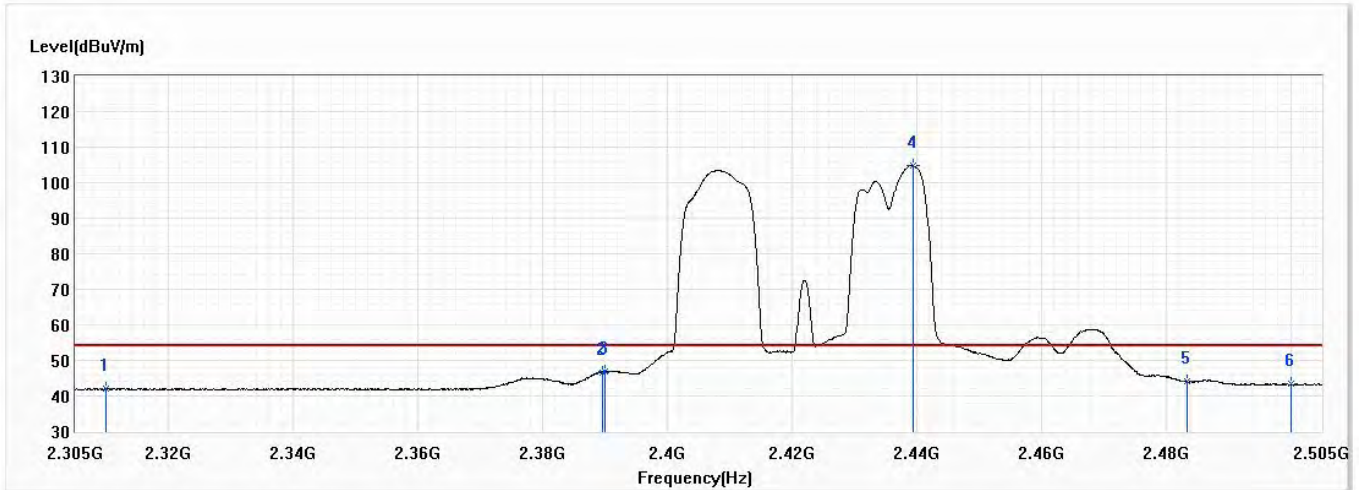


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.97	54.00	-12.03	30.35	11.62	AV
2	2389.500	46.68	54.00	-7.32	34.66	12.02	AV
3	2390.000	46.96	54.00	-7.04	34.93	12.03	AV
! 4	2439.400	104.86	54.00	50.86	92.58	12.28	AV
5	2483.500	43.99	54.00	-10.01	31.48	12.51	AV
6	2500.000	43.28	54.00	-10.72	30.68	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	53.0

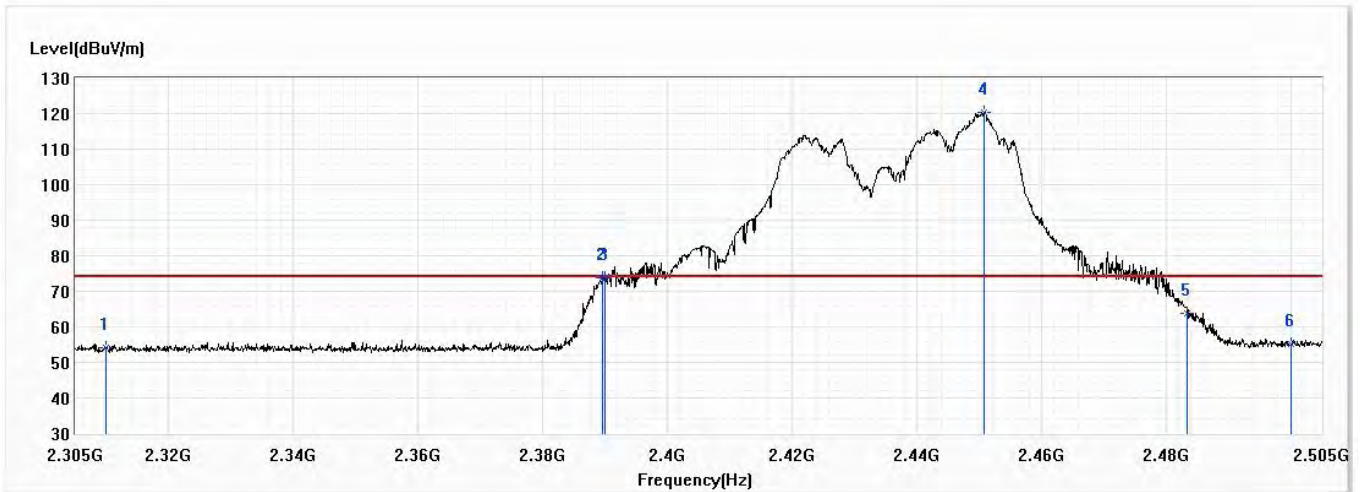


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	54.19	74.00	-19.81	42.57	11.62	PK
2	2389.500	73.78	74.00	-0.22	61.76	12.02	PK
3	2390.000	73.77	74.00	-0.23	61.74	12.03	PK
! 4	2450.800	120.49	74.00	46.49	108.15	12.34	PK
5	2483.500	63.72	74.00	-10.28	51.21	12.51	PK
6	2500.000	55.07	74.00	-18.93	42.47	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	53.0

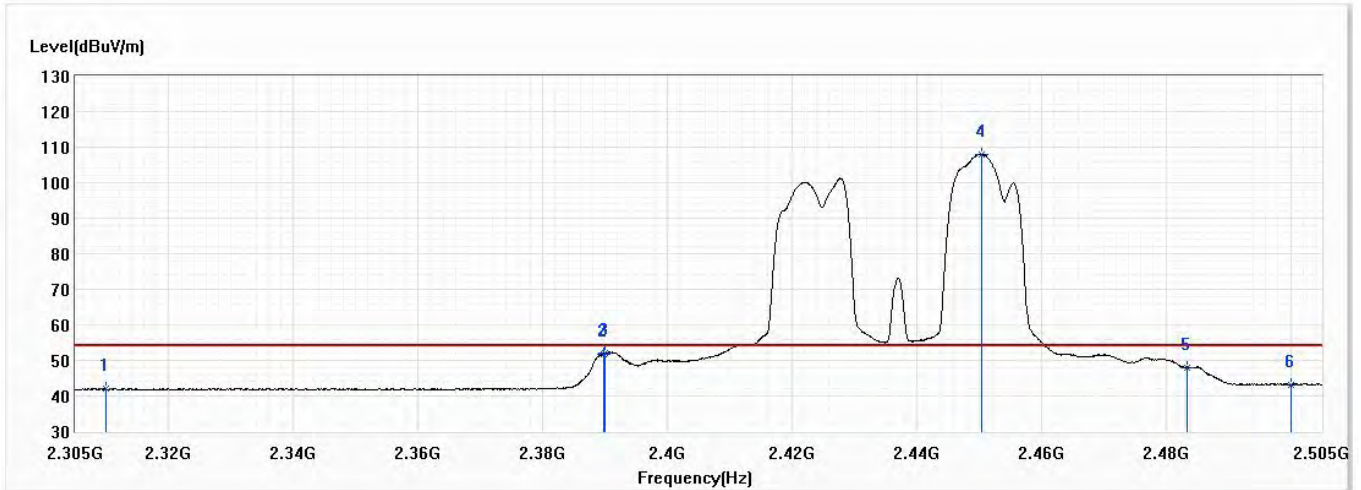


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.92	54.00	-12.08	30.30	11.62	AV
2	2389.800	51.87	54.00	-2.13	39.84	12.03	AV
3	2390.000	52.00	54.00	-2.00	39.97	12.03	AV
! 4	2450.500	108.01	54.00	54.01	95.67	12.34	AV
5	2483.500	47.93	54.00	-6.07	35.42	12.51	AV
6	2500.000	43.22	54.00	-10.78	30.62	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	53.0

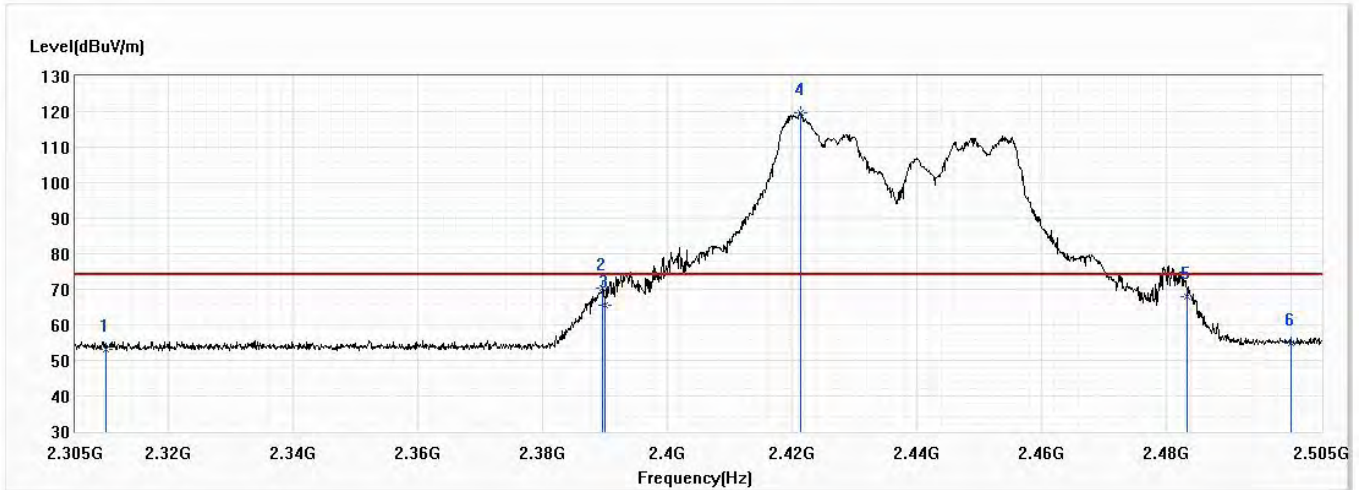


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.07	74.00	-20.93	41.45	11.62	PK
2	2389.600	70.31	74.00	-3.69	58.28	12.03	PK
3	2390.000	65.57	74.00	-8.43	53.54	12.03	PK
! 4	2421.300	119.52	74.00	45.52	107.33	12.19	PK
5	2483.500	67.93	74.00	-6.07	55.42	12.51	PK
6	2500.000	54.97	74.00	-19.03	42.37	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	53.0

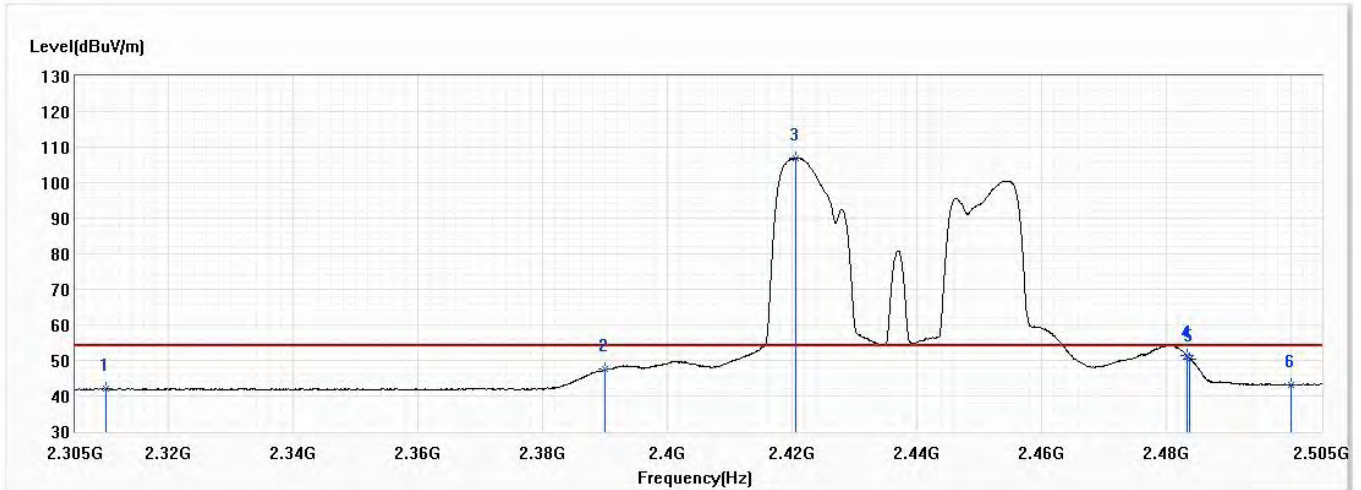


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.90	54.00	-12.10	30.28	11.62	AV
2	2390.000	47.42	54.00	-6.58	35.39	12.03	AV
! 3	2420.600	106.95	54.00	52.95	94.76	12.19	AV
4	2483.500	51.27	54.00	-2.73	38.76	12.51	AV
5	2483.900	50.43	54.00	-3.57	37.92	12.51	AV
6	2500.000	43.19	54.00	-10.81	30.59	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	53.0

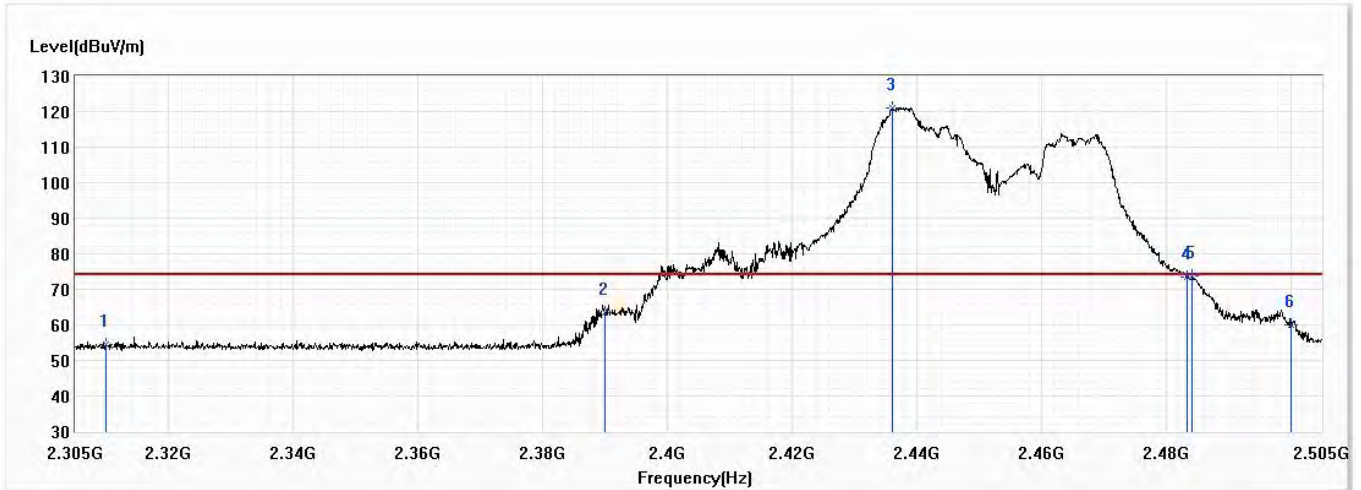


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	54.40	74.00	-19.60	42.78	11.62	PK
2	2390.000	63.54	74.00	-10.46	51.51	12.03	PK
! 3	2436.200	121.15	74.00	47.15	108.87	12.28	PK
4	2483.500	73.41	74.00	-0.59	60.90	12.51	PK
5	2484.200	73.69	74.00	-0.31	61.18	12.51	PK
6	2500.000	60.17	74.00	-13.83	47.57	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	53.0

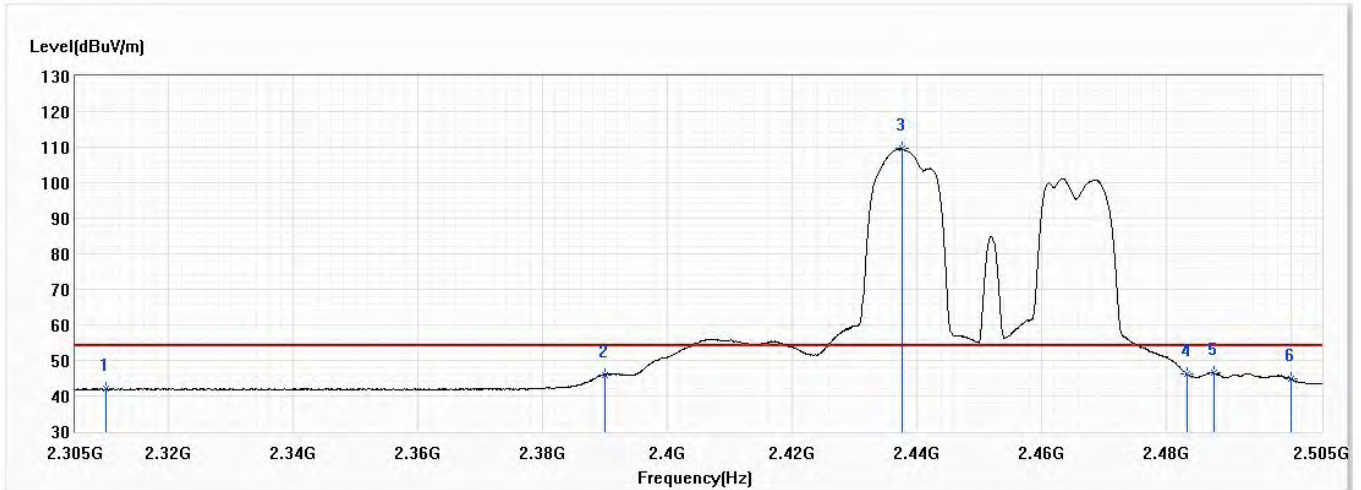


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.97	54.00	-12.03	30.35	11.62	AV
2	2390.000	45.87	54.00	-8.13	33.84	12.03	AV
! 3	2437.600	109.57	54.00	55.57	97.29	12.28	AV
4	2483.500	46.09	54.00	-7.91	33.58	12.51	AV
5	2487.700	46.41	54.00	-7.59	33.87	12.54	AV
6	2500.000	44.73	54.00	-9.27	32.13	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	53.0

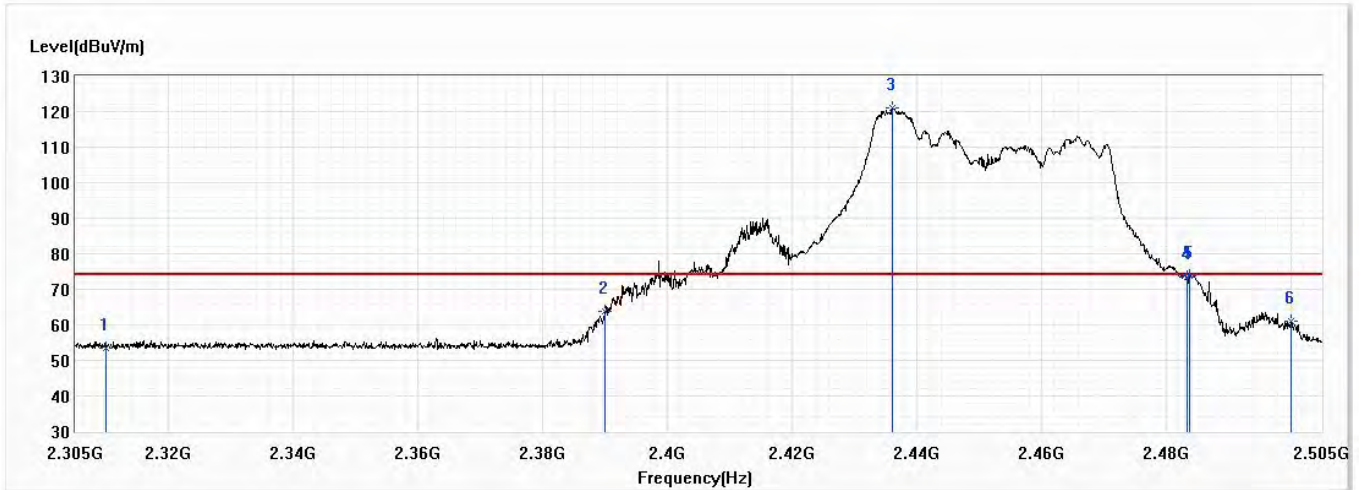


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.53	74.00	-20.47	41.91	11.62	PK
2	2390.000	63.67	74.00	-10.33	51.64	12.03	PK
! 3	2436.200	120.90	74.00	46.90	108.62	12.28	PK
4	2483.500	73.58	74.00	-0.42	61.07	12.51	PK
5	2483.800	73.72	74.00	-0.28	61.21	12.51	PK
6	2500.000	61.01	74.00	-12.99	48.41	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/4
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	53.0

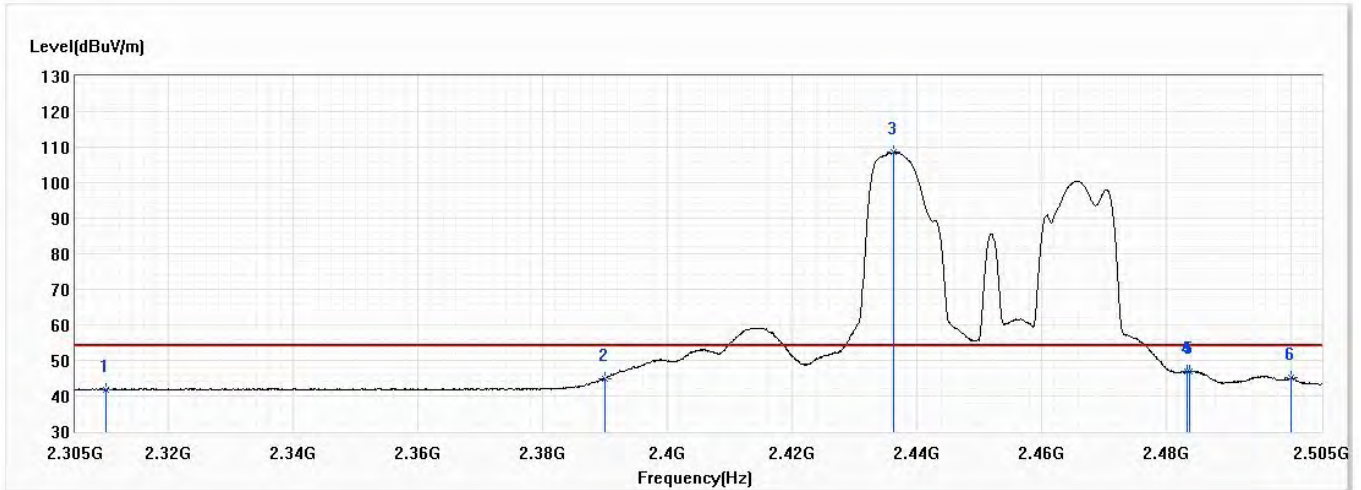


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	41.79	54.00	-12.21	30.17	11.62	AV
2	2390.000	44.96	54.00	-9.04	32.93	12.03	AV
! 3	2436.400	108.50	54.00	54.50	96.22	12.28	AV
4	2483.500	46.82	54.00	-7.18	34.31	12.51	AV
5	2483.800	47.01	54.00	-6.99	34.50	12.51	AV
6	2500.000	45.02	54.00	-8.98	32.42	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch 1,2.412G,BW20M	Humidity (%RH)	59.0

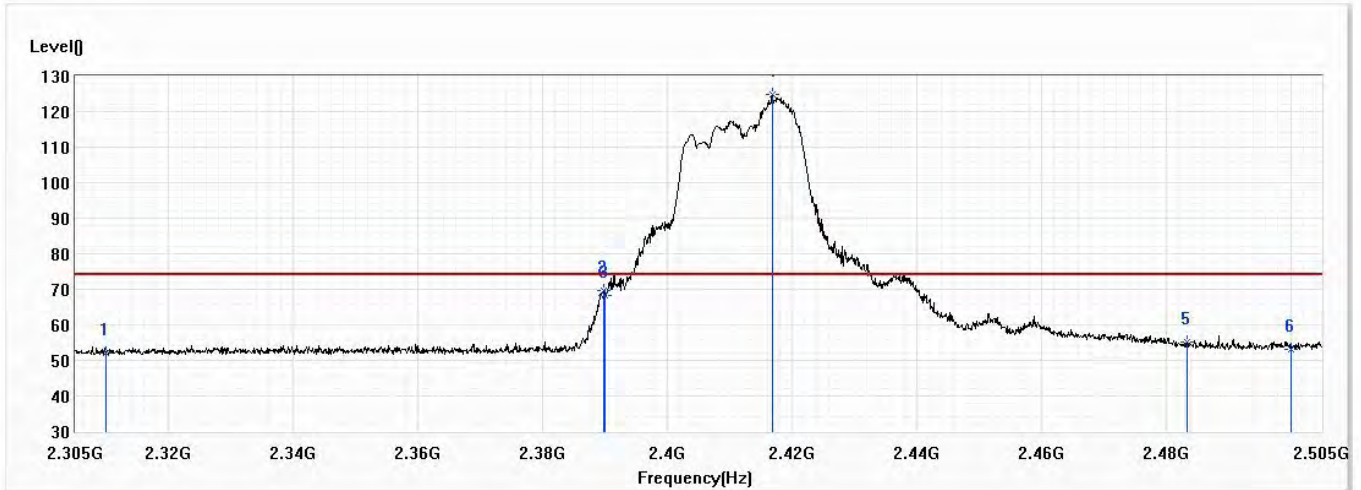


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	52.19	74.00	-21.81	40.57	11.62	PK
2	2389.800	69.78	74.00	-4.22	57.75	12.03	PK
3	2390.000	68.28	74.00	-5.72	56.25	12.03	PK
! 4	2416.800	124.77	74.00	50.77	112.60	12.17	PK
5	2483.500	55.24	74.00	-18.76	42.73	12.51	PK
6	2500.000	53.22	74.00	-20.78	40.62	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch 1,2.412G,BW20M	Humidity (%RH)	59.0

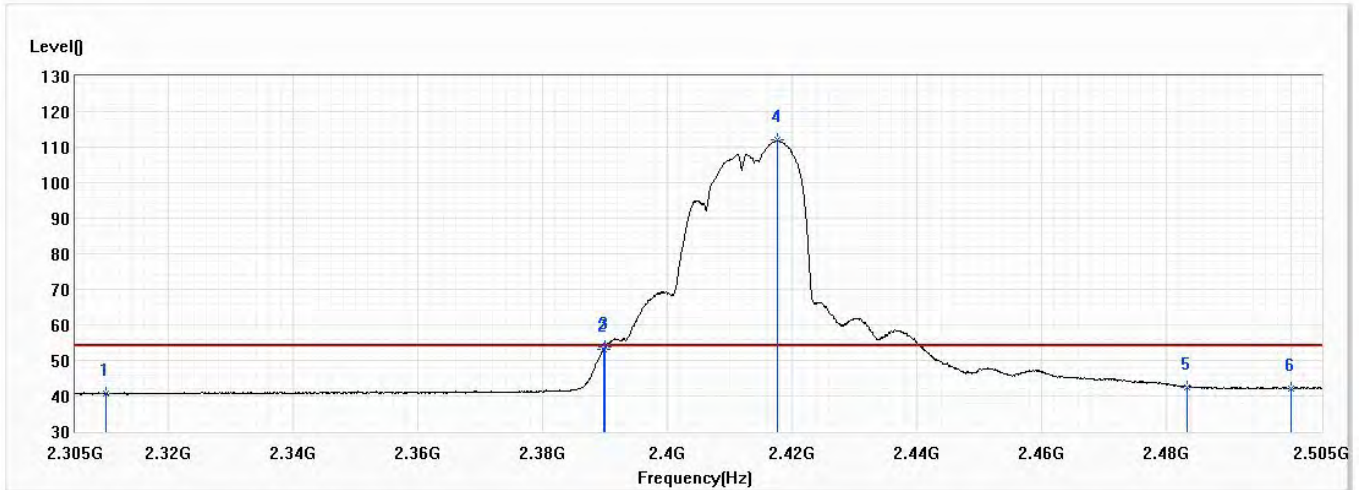


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.73	54.00	-13.27	29.11	11.62	AV
2	2389.800	53.10	54.00	-0.90	41.07	12.03	AV
3	2390.000	53.86	54.00	-0.14	41.83	12.03	AV
! 4	2417.600	111.92	54.00	57.92	99.75	12.17	AV
5	2483.500	42.49	54.00	-11.51	29.98	12.51	AV
6	2500.000	42.20	54.00	-11.80	29.60	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch 1,2.412G,BW20M	Humidity (%RH)	59.0

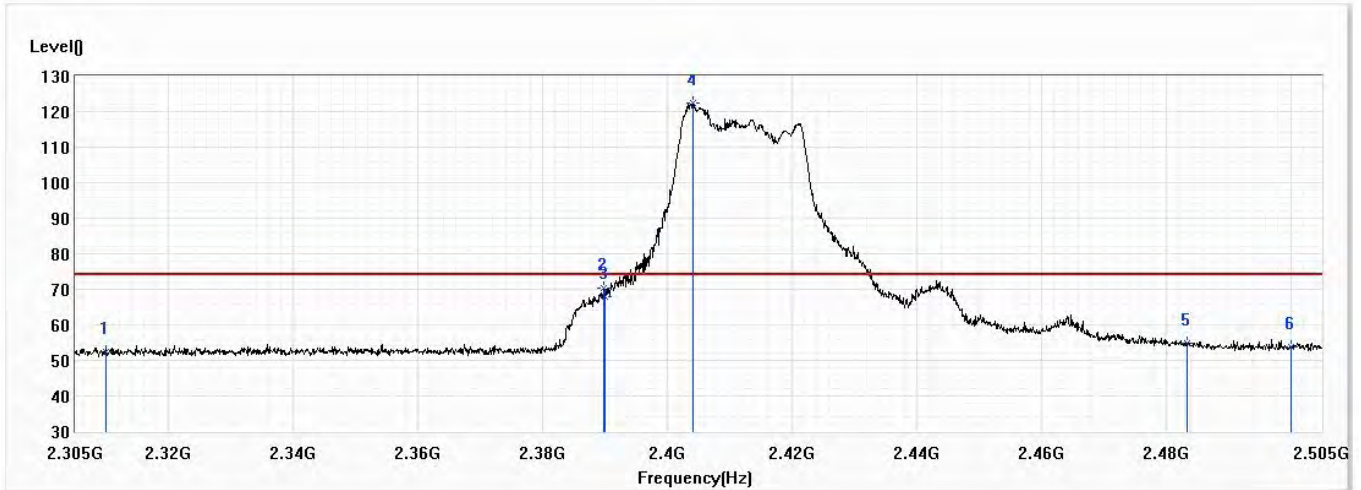


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	52.54	74.00	-21.46	40.92	11.62	PK
2	2389.800	70.22	74.00	-3.78	58.19	12.03	PK
3	2390.000	67.94	74.00	-6.06	55.91	12.03	PK
! 4	2404.200	122.39	74.00	48.39	110.28	12.11	PK
5	2483.500	54.71	74.00	-19.29	42.20	12.51	PK
6	2500.000	53.79	74.00	-20.21	41.19	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch 1,2.412G,BW20M	Humidity (%RH)	59.0

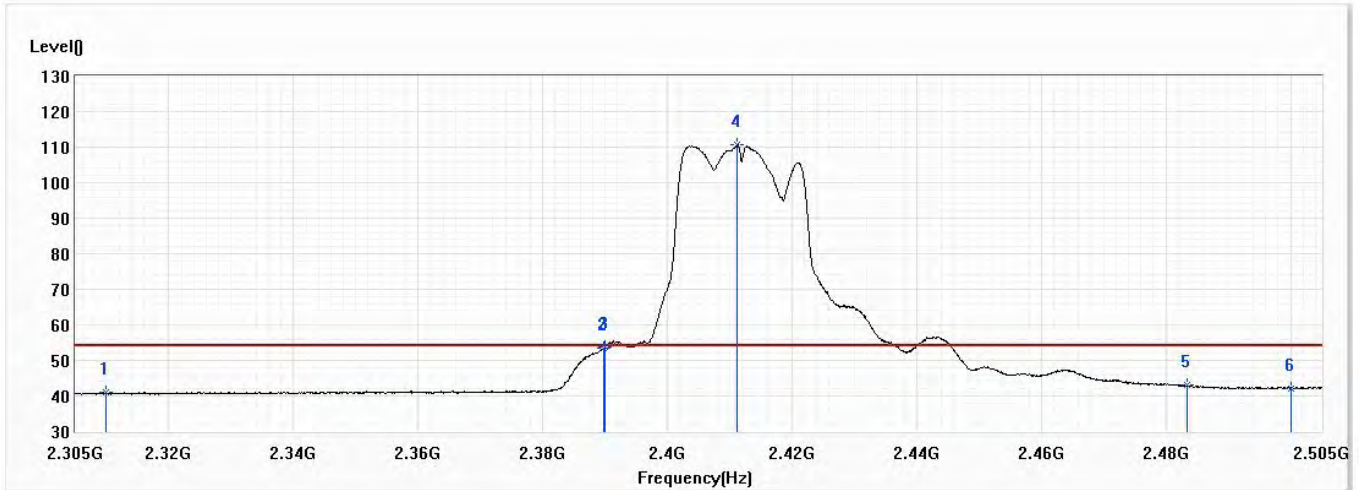


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.91	54.00	-13.09	29.29	11.62	AV
2	2389.700	53.33	54.00	-0.67	41.30	12.03	AV
3	2390.000	53.80	54.00	-0.20	41.77	12.03	AV
! 4	2411.200	110.54	54.00	56.54	98.39	12.15	AV
5	2483.500	43.04	54.00	-10.96	30.53	12.51	AV
6	2500.000	42.24	54.00	-11.76	29.64	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	59.0

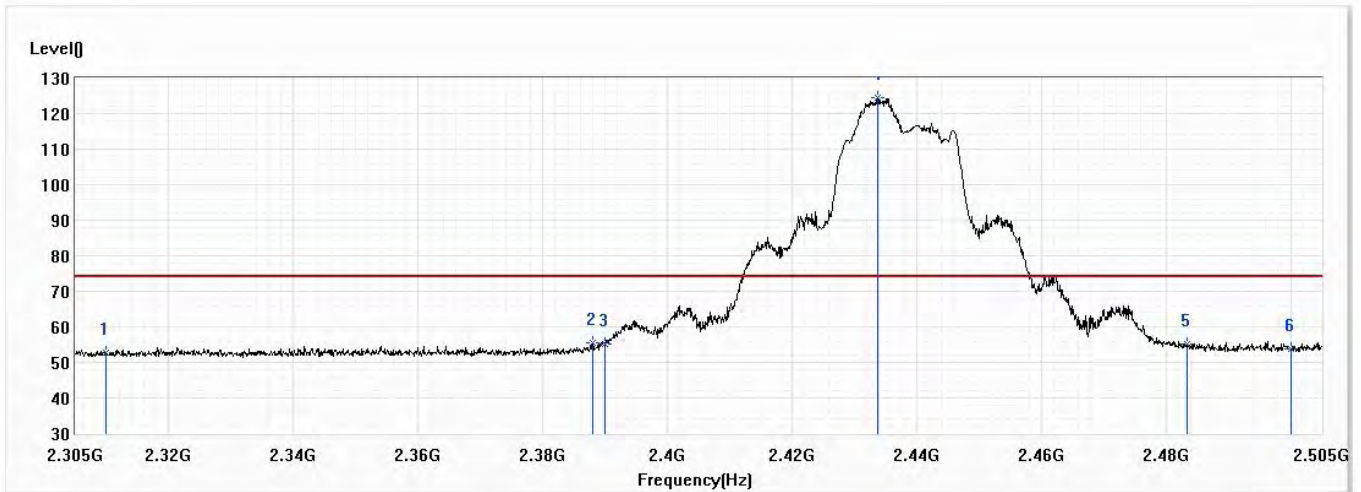


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	52.71	74.00	-21.29	41.09	11.62	PK
2	2388.100	55.41	74.00	-18.59	43.39	12.02	PK
3	2390.000	55.01	74.00	-18.99	42.98	12.03	PK
! 4	2433.700	124.35	74.00	50.35	112.10	12.25	PK
5	2483.500	55.08	74.00	-18.92	42.57	12.51	PK
6	2500.000	53.67	74.00	-20.33	41.07	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	59.0

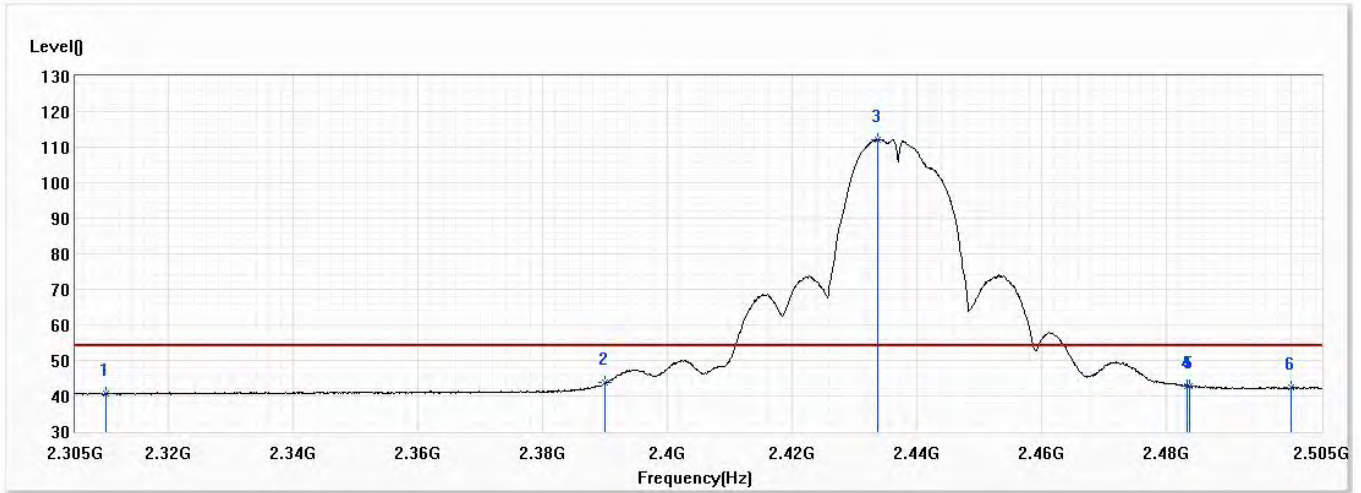


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.55	54.00	-13.45	28.93	11.62	AV
2	2390.000	43.65	54.00	-10.35	31.62	12.03	AV
! 3	2433.700	112.16	54.00	58.16	99.91	12.25	AV
4	2483.500	42.89	54.00	-11.11	30.38	12.51	AV
5	2483.800	42.71	54.00	-11.29	30.20	12.51	AV
6	2500.000	42.36	54.00	-11.64	29.76	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch 6,2.437G,BW20M	Humidity (%RH)	59.0

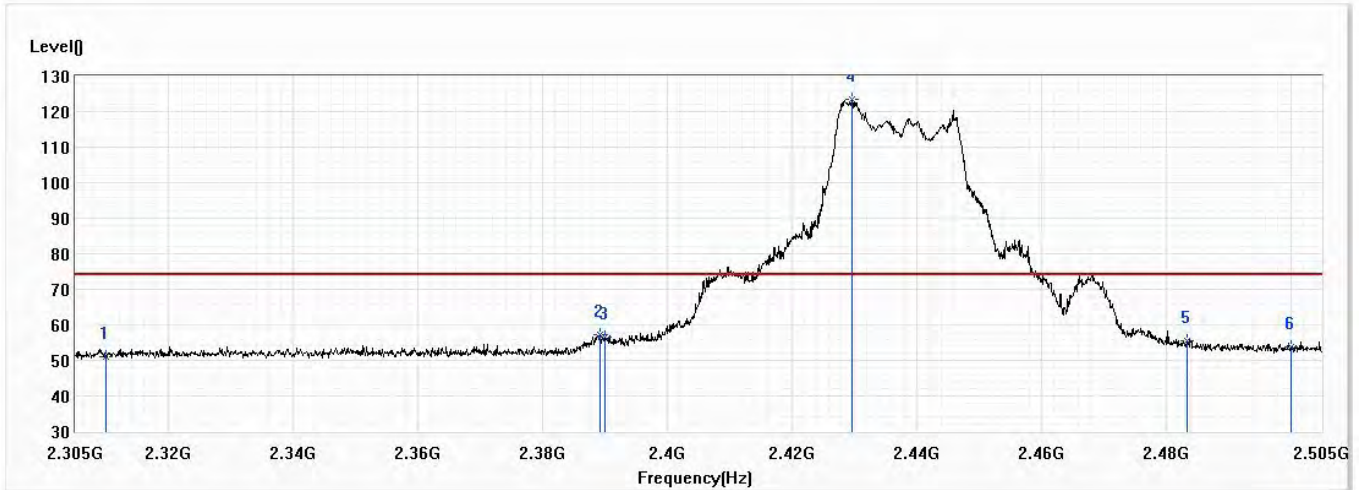


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	51.12	74.00	-22.88	39.50	11.62	PK
2	2389.200	57.35	74.00	-16.65	45.33	12.02	PK
3	2390.000	56.64	74.00	-17.36	44.61	12.03	PK
! 4	2429.700	123.34	74.00	49.34	111.10	12.24	PK
5	2483.500	55.35	74.00	-18.65	42.84	12.51	PK
6	2500.000	53.91	74.00	-20.09	41.31	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch6,2.437G,BW20M	Humidity (%RH)	59.0

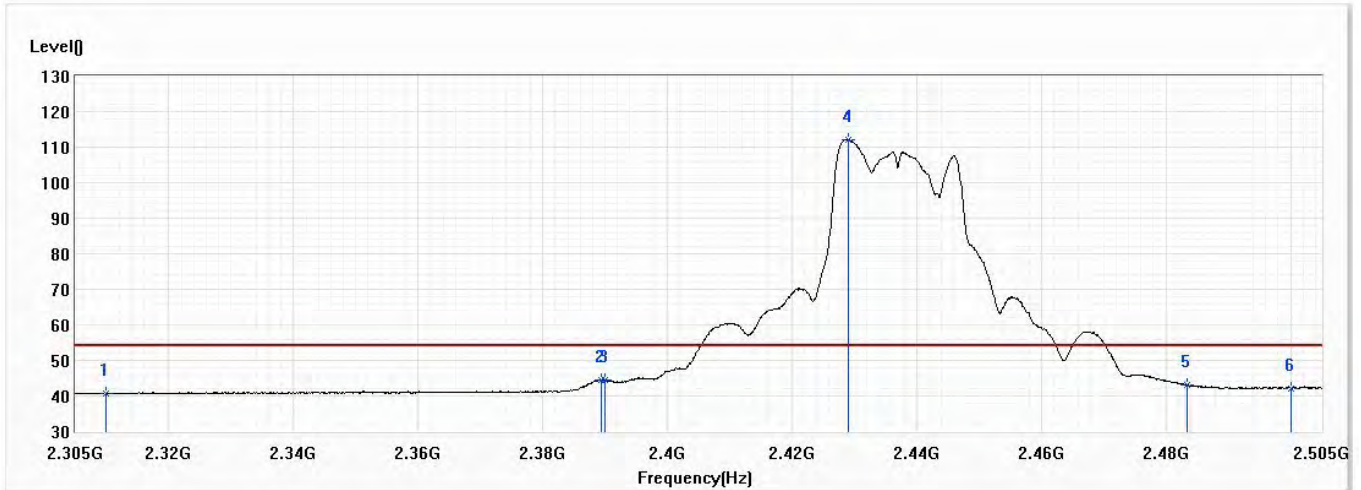


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.68	54.00	-13.32	29.06	11.62	AV
2	2389.400	44.56	54.00	-9.44	32.54	12.02	AV
3	2390.000	44.46	54.00	-9.54	32.43	12.03	AV
! 4	2429.000	112.17	54.00	58.17	99.93	12.24	AV
5	2483.500	43.08	54.00	-10.92	30.57	12.51	AV
6	2500.000	42.23	54.00	-11.77	29.63	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	59.0

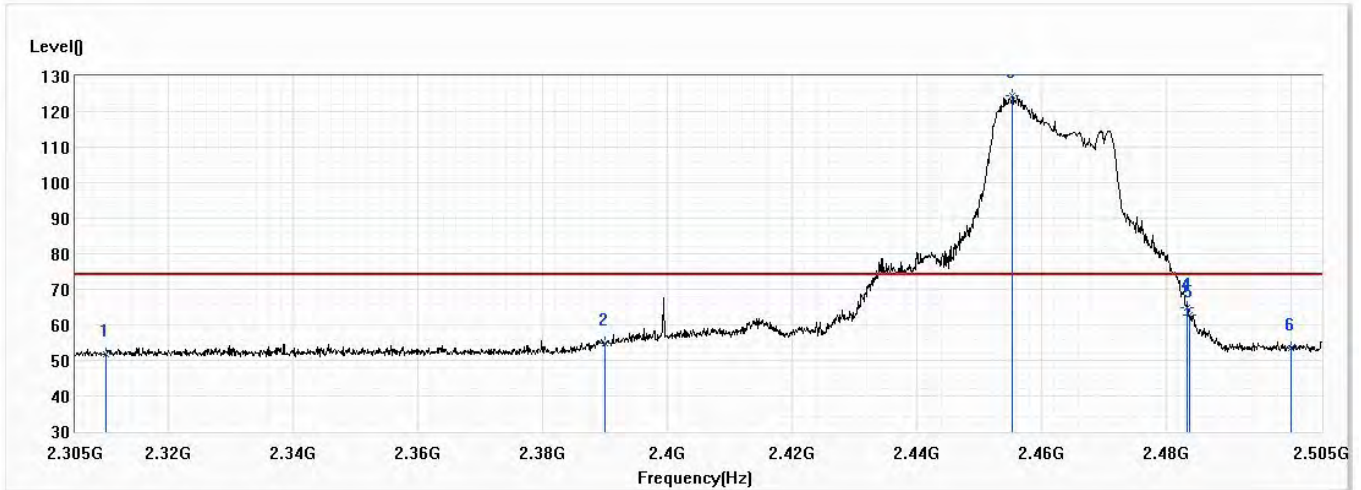


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	51.74	74.00	-22.26	40.12	11.62	PK
2	2390.000	55.00	74.00	-19.00	42.97	12.03	PK
! 3	2455.400	124.61	74.00	50.61	112.24	12.37	PK
4	2483.500	64.84	74.00	-9.16	52.33	12.51	PK
5	2483.900	62.73	74.00	-11.27	50.22	12.51	PK
6	2500.000	53.33	74.00	-20.67	40.73	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	59.0

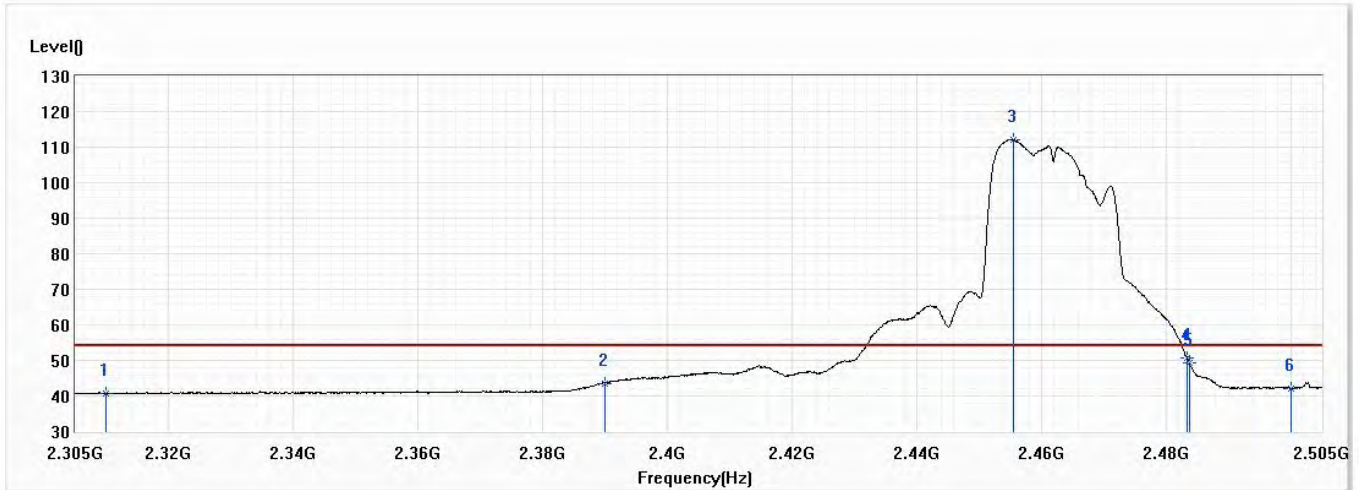


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.71	54.00	-13.29	29.09	11.62	AV
2	2390.000	43.59	54.00	-10.41	31.56	12.03	AV
! 3	2455.500	112.02	54.00	58.02	99.65	12.37	AV
4	2483.500	50.60	54.00	-3.40	38.09	12.51	AV
5	2483.800	49.35	54.00	-4.65	36.84	12.51	AV
6	2500.000	42.20	54.00	-11.80	29.60	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	59.0

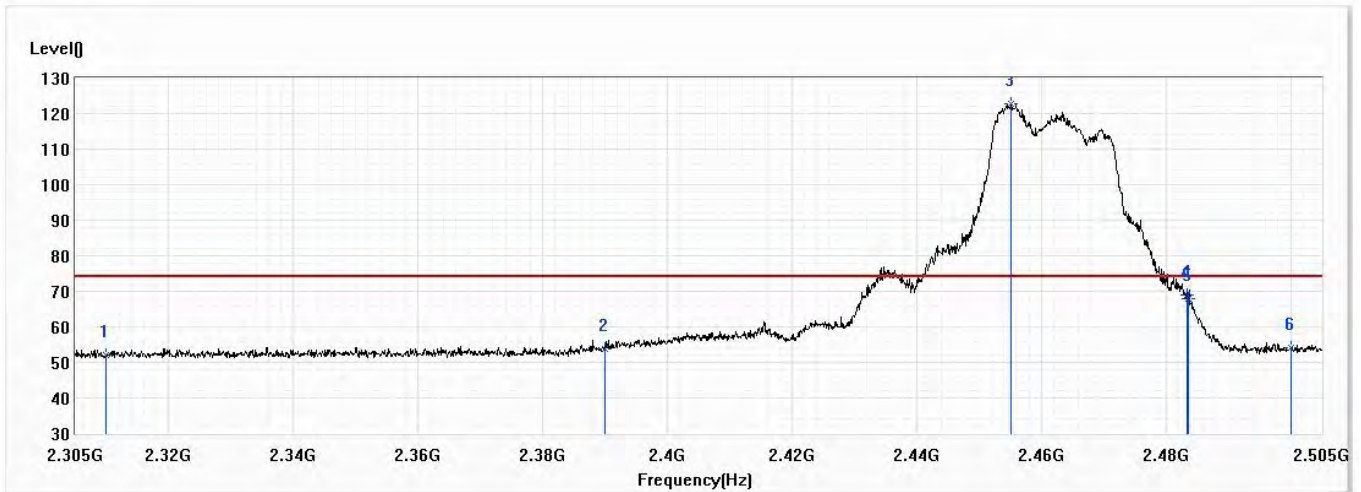


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	51.93	74.00	-22.07	40.31	11.62	PK
2	2390.000	53.67	74.00	-20.33	41.64	12.03	PK
! 3	2455.200	122.92	74.00	48.92	110.55	12.37	PK
4	2483.500	69.04	74.00	-4.96	56.53	12.51	PK
5	2483.700	67.76	74.00	-6.24	55.25	12.51	PK
6	2500.000	54.18	74.00	-19.82	41.58	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch11,2.462G,BW20M	Humidity (%RH)	59.0

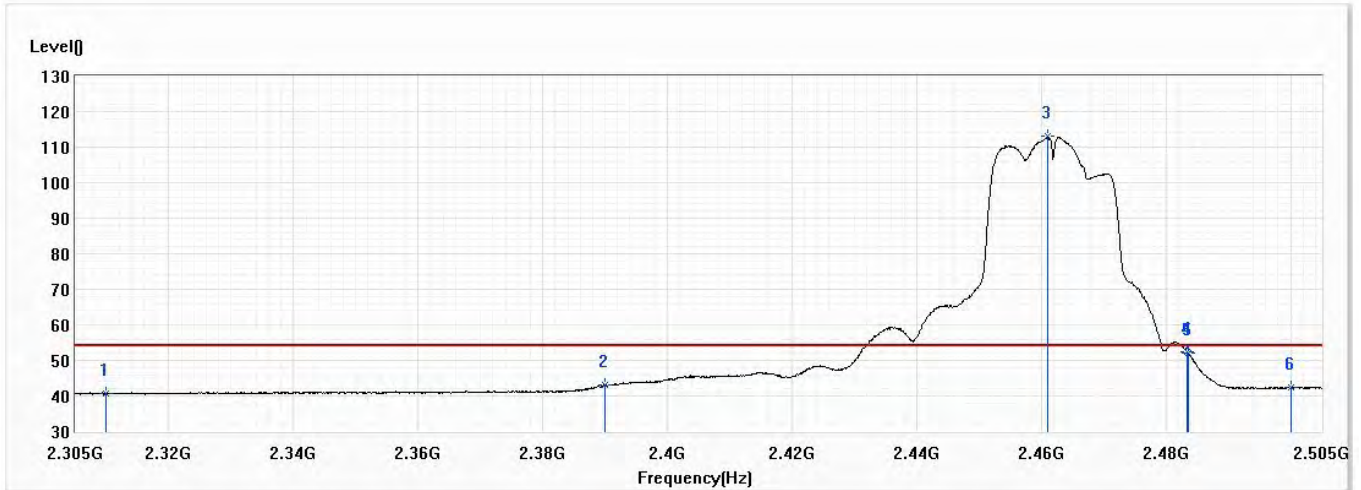


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.67	54.00	-13.33	29.05	11.62	AV
2	2390.000	43.01	54.00	-10.99	30.98	12.03	AV
! 3	2461.100	112.99	54.00	58.99	100.59	12.40	AV
4	2483.500	52.31	54.00	-1.69	39.80	12.51	AV
5	2483.600	52.00	54.00	-2.00	39.49	12.51	AV
6	2500.000	42.26	54.00	-11.74	29.66	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	59.0

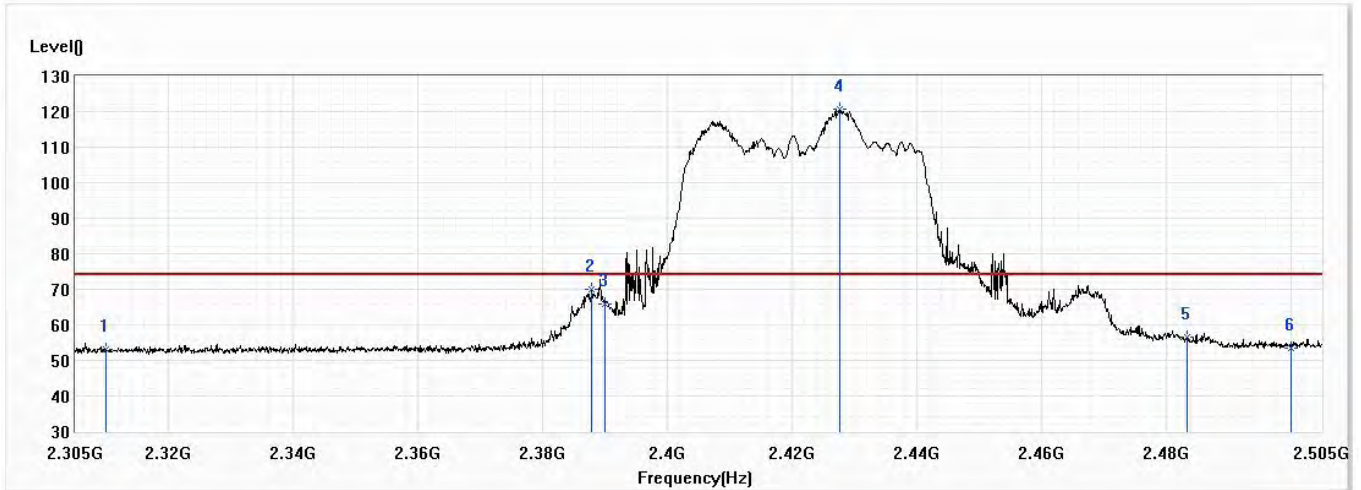


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.22	74.00	-20.78	41.60	11.62	PK
2	2387.900	70.04	74.00	-3.96	58.02	12.02	PK
3	2390.000	66.00	74.00	-8.00	53.97	12.03	PK
! 4	2427.600	120.63	74.00	46.63	108.40	12.23	PK
5	2483.500	56.60	74.00	-17.40	44.09	12.51	PK
6	2500.000	53.44	74.00	-20.56	40.84	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	59.0

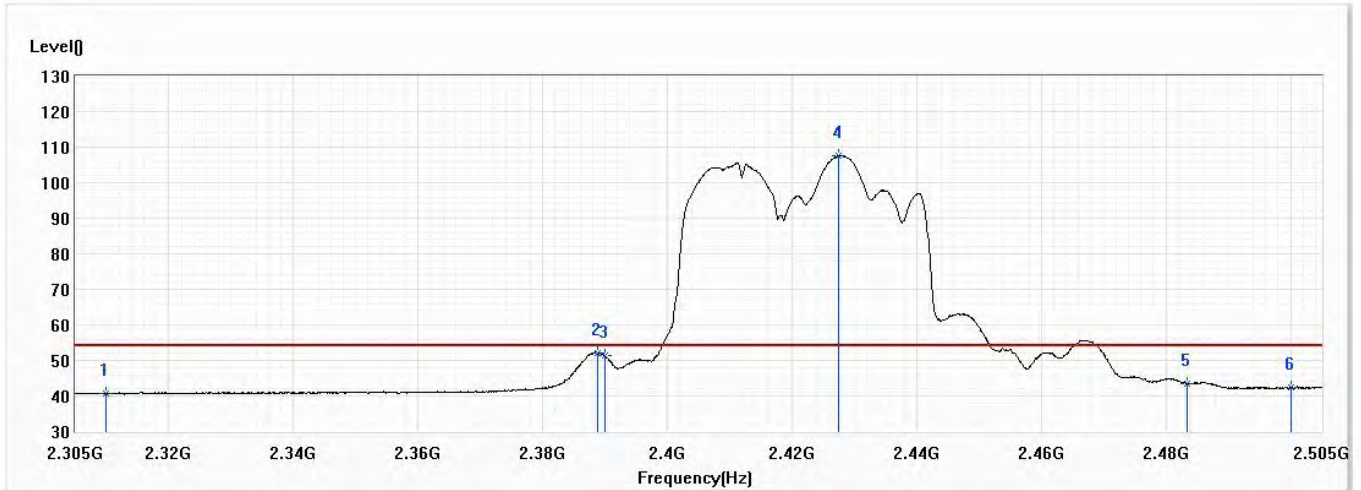


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.66	54.00	-13.34	29.04	11.62	AV
2	2388.900	52.14	54.00	-1.86	40.12	12.02	AV
3	2390.000	51.45	54.00	-2.55	39.42	12.03	AV
! 4	2427.500	107.61	54.00	53.61	95.38	12.23	AV
5	2483.500	43.41	54.00	-10.59	30.90	12.51	AV
6	2500.000	42.32	54.00	-11.68	29.72	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	59.0

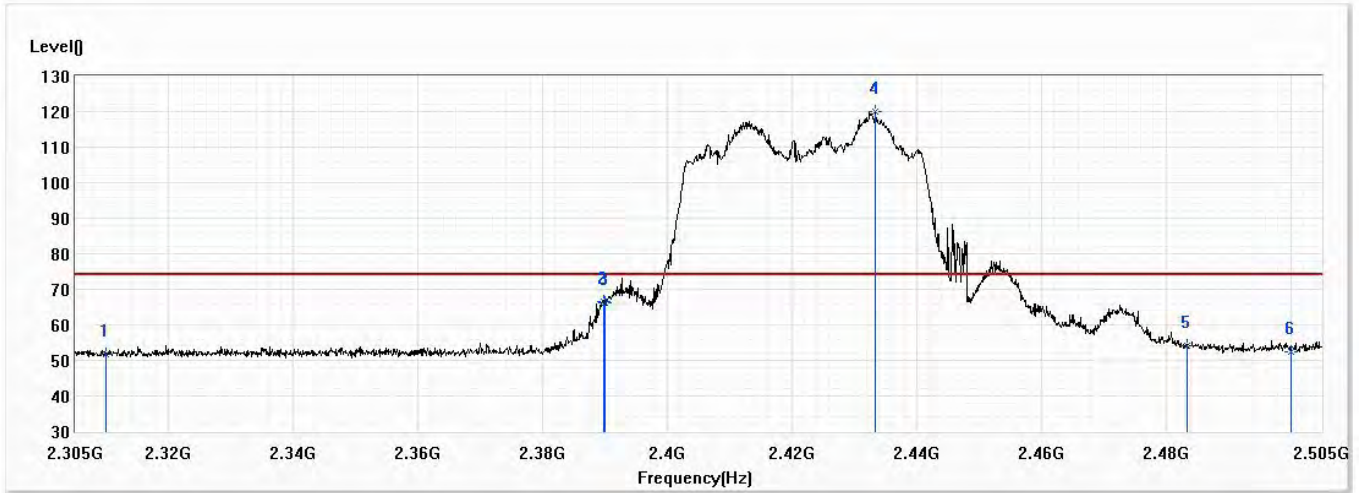


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	51.78	74.00	-22.22	40.16	11.62	PK
2	2389.800	66.63	74.00	-7.37	54.60	12.03	PK
3	2390.000	66.10	74.00	-7.90	54.07	12.03	PK
! 4	2433.400	119.98	74.00	45.98	107.73	12.25	PK
5	2483.500	54.16	74.00	-19.84	41.65	12.51	PK
6	2500.000	52.52	74.00	-21.48	39.92	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch3,2.422G,BW40M	Humidity (%RH)	59.0

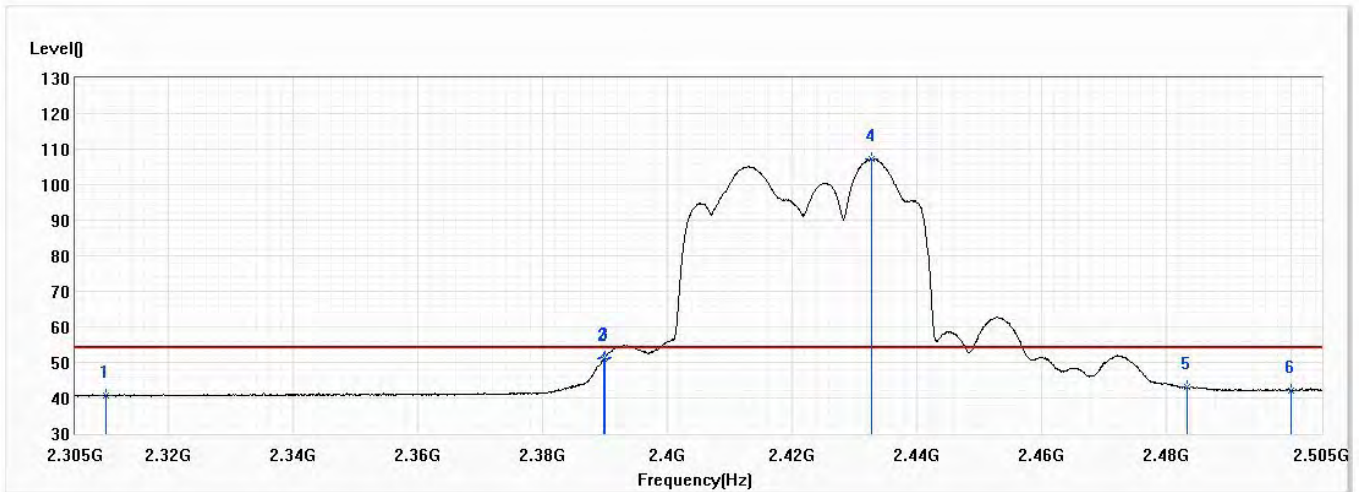


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.56	54.00	-13.44	28.94	11.62	AV
2	2389.800	50.95	54.00	-3.05	38.92	12.03	AV
3	2390.000	51.49	54.00	-2.51	39.46	12.03	AV
! 4	2432.700	107.24	54.00	53.24	94.99	12.25	AV
5	2483.500	42.94	54.00	-11.06	30.43	12.51	AV
6	2500.000	42.18	54.00	-11.82	29.58	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	59.0

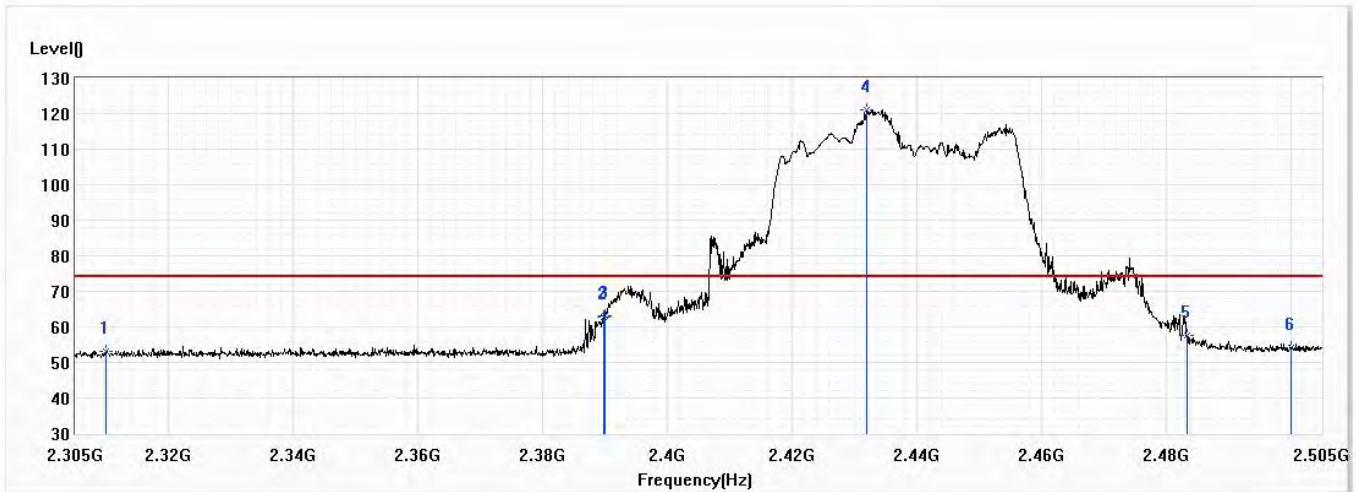


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.16	74.00	-20.84	41.54	11.62	PK
2	2389.700	62.63	74.00	-11.37	50.60	12.03	PK
3	2390.000	63.20	74.00	-10.80	51.17	12.03	PK
! 4	2431.900	121.13	74.00	47.13	108.88	12.25	PK
5	2483.500	57.52	74.00	-16.48	45.01	12.51	PK
6	2500.000	53.97	74.00	-20.03	41.37	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	59.0

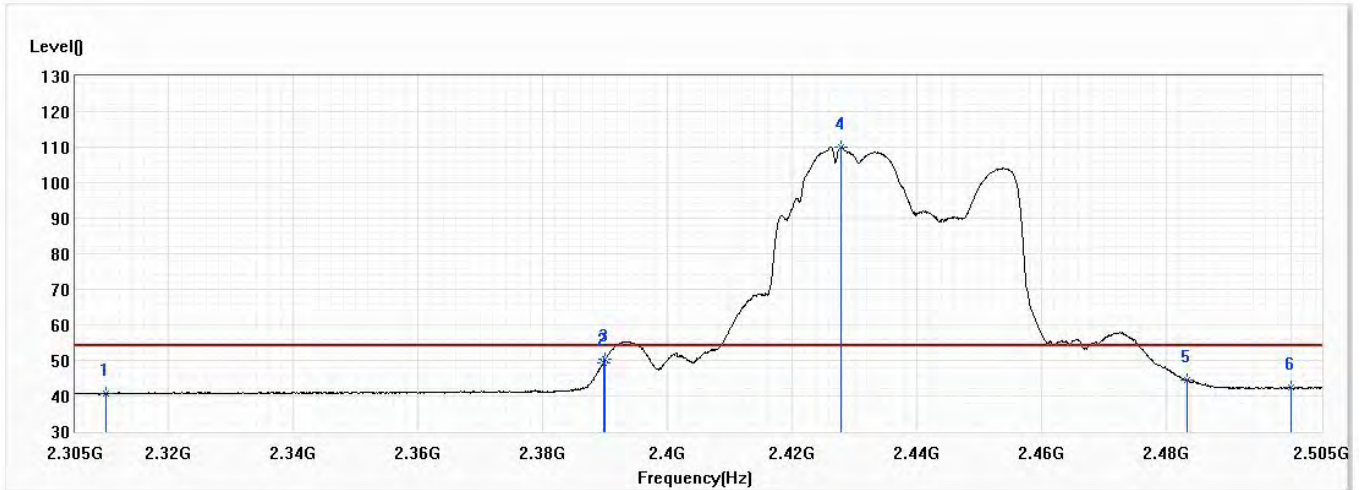


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.61	54.00	-13.39	28.99	11.62	AV
2	2389.700	49.43	54.00	-4.57	37.40	12.03	AV
3	2390.000	50.29	54.00	-3.71	38.26	12.03	AV
! 4	2427.900	110.14	54.00	56.14	97.91	12.23	AV
5	2483.500	44.45	54.00	-9.55	31.94	12.51	AV
6	2500.000	42.33	54.00	-11.67	29.73	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	59.0

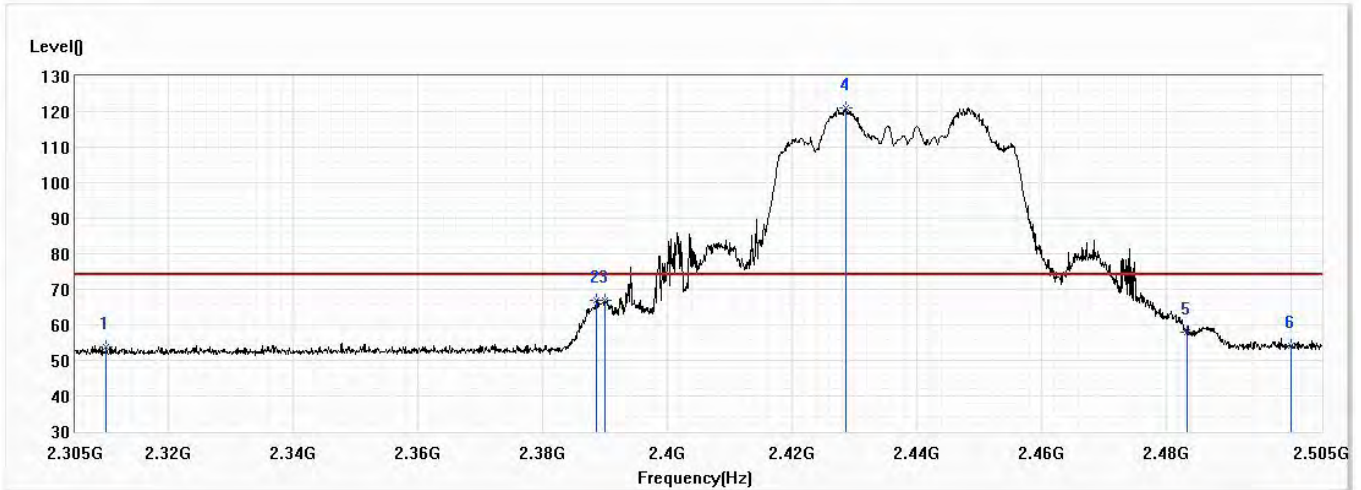


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.65	74.00	-20.35	42.03	11.62	PK
2	2388.700	67.05	74.00	-6.95	55.03	12.02	PK
3	2390.000	67.02	74.00	-6.98	54.99	12.03	PK
! 4	2428.700	121.07	74.00	47.07	108.83	12.24	PK
5	2483.500	57.95	74.00	-16.05	45.44	12.51	PK
6	2500.000	54.22	74.00	-19.78	41.62	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch6,2.437G,BW40M	Humidity (%RH)	59.0

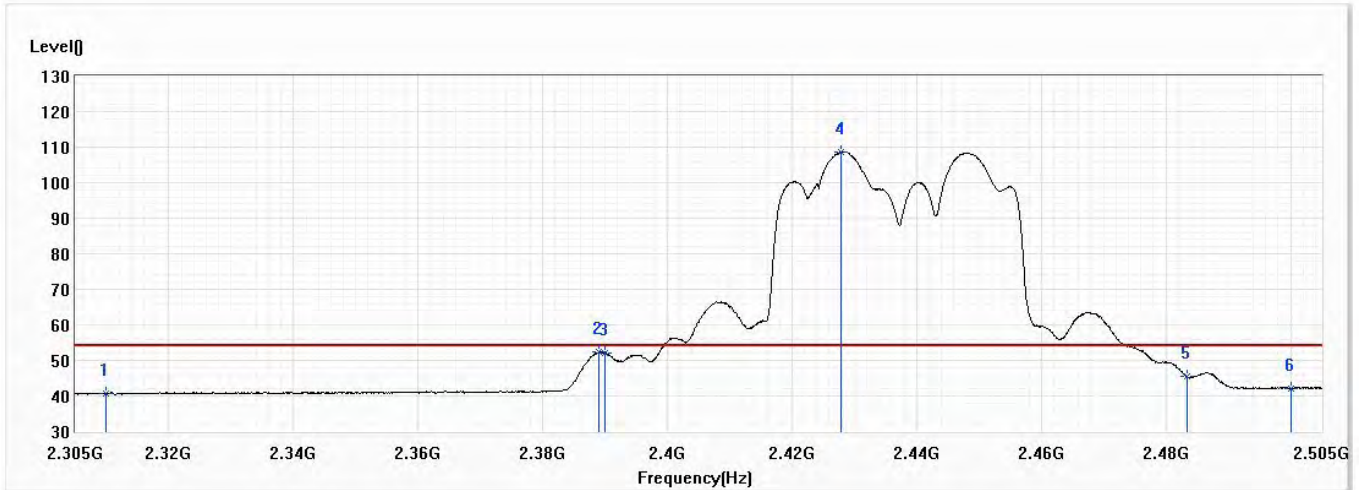

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.64	54.00	-13.36	29.02	11.62	AV
2	2389.000	52.42	54.00	-1.58	40.40	12.02	AV
3	2390.000	52.05	54.00	-1.95	40.02	12.03	AV
! 4	2427.800	108.65	54.00	54.65	96.42	12.23	AV
5	2483.500	45.45	54.00	-8.55	32.94	12.51	AV
6	2500.000	42.16	54.00	-11.84	29.56	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	59.0




No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	52.87	74.00	-21.13	41.25	11.62	PK
2	2390.000	57.02	74.00	-16.98	44.99	12.03	PK
! 3	2445.000	120.90	74.00	46.90	108.58	12.32	PK
4	2483.500	65.99	74.00	-8.01	53.48	12.51	PK
5	2488.100	66.45	74.00	-7.55	53.91	12.54	PK
6	2500.000	55.57	74.00	-18.43	42.97	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	23.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	59.0

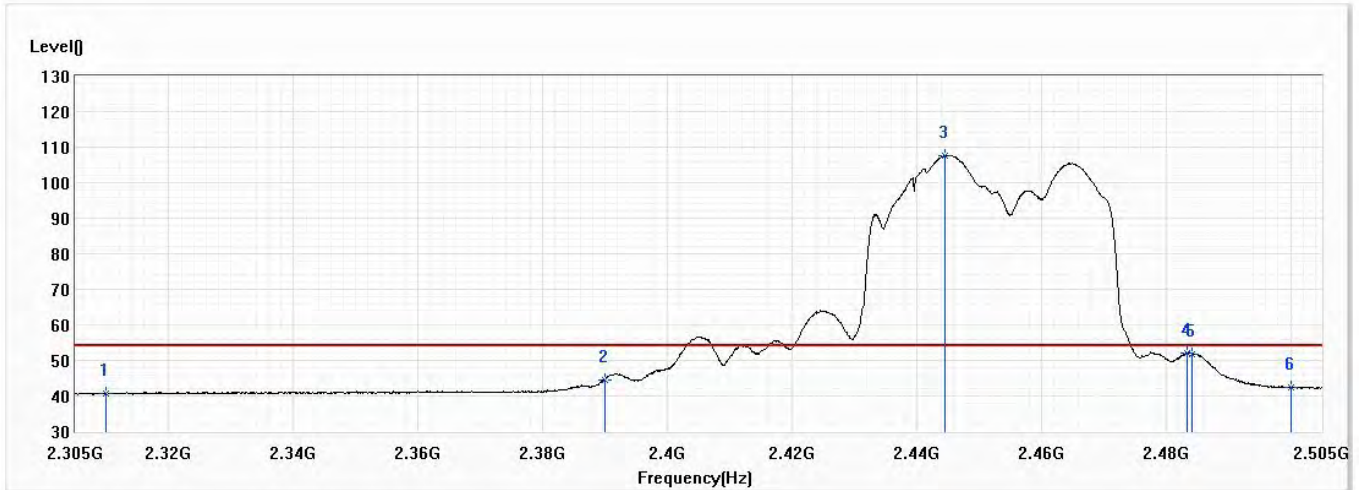


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.68	54.00	-13.32	29.06	11.62	AV
2	2390.000	44.61	54.00	-9.39	32.58	12.03	AV
! 3	2444.600	107.74	54.00	53.74	95.42	12.32	AV
4	2483.500	51.93	54.00	-2.07	39.42	12.51	AV
5	2484.200	51.88	54.00	-2.12	39.37	12.51	AV
6	2500.000	42.28	54.00	-11.72	29.68	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	59.0

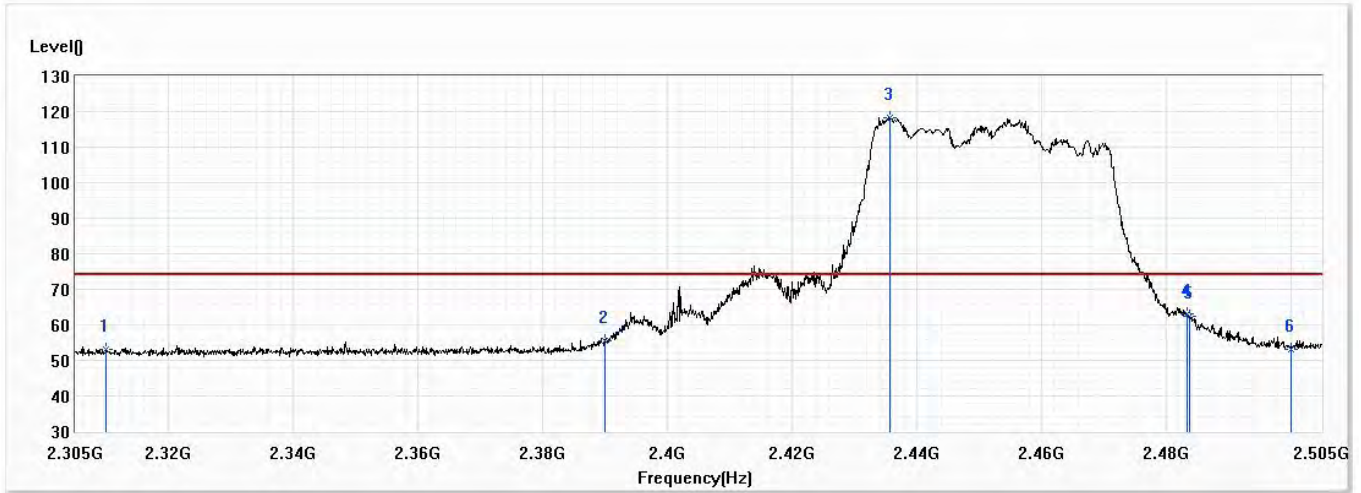


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	53.14	74.00	-20.86	41.52	11.62	PK
2	2390.000	55.45	74.00	-18.55	43.42	12.03	PK
! 3	2435.800	118.33	74.00	44.33	106.05	12.28	PK
4	2483.500	62.97	74.00	-11.03	50.46	12.51	PK
5	2483.800	62.30	74.00	-11.70	49.79	12.51	PK
6	2500.000	52.99	74.00	-21.01	40.39	12.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/10
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	23.0
Test Condition	802.11ax,Ch9,2.452G,BW40M	Humidity (%RH)	59.0

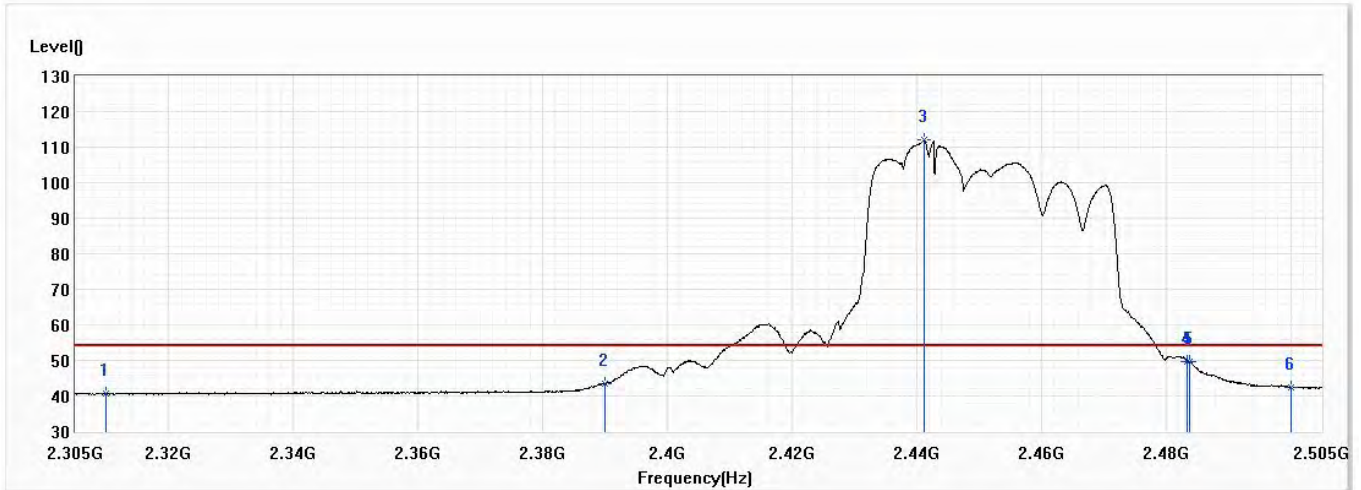


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	2310.000	40.71	54.00	-13.29	29.09	11.62	AV
2	2390.000	43.61	54.00	-10.39	31.58	12.03	AV
! 3	2441.200	111.92	54.00	57.92	99.62	12.30	AV
4	2483.500	49.81	54.00	-4.19	37.30	12.51	AV
5	2483.800	49.53	54.00	-4.47	37.02	12.51	AV
6	2500.000	42.30	54.00	-11.70	29.70	12.60	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

7. DTS Bandwidth

7.1. Test Setup

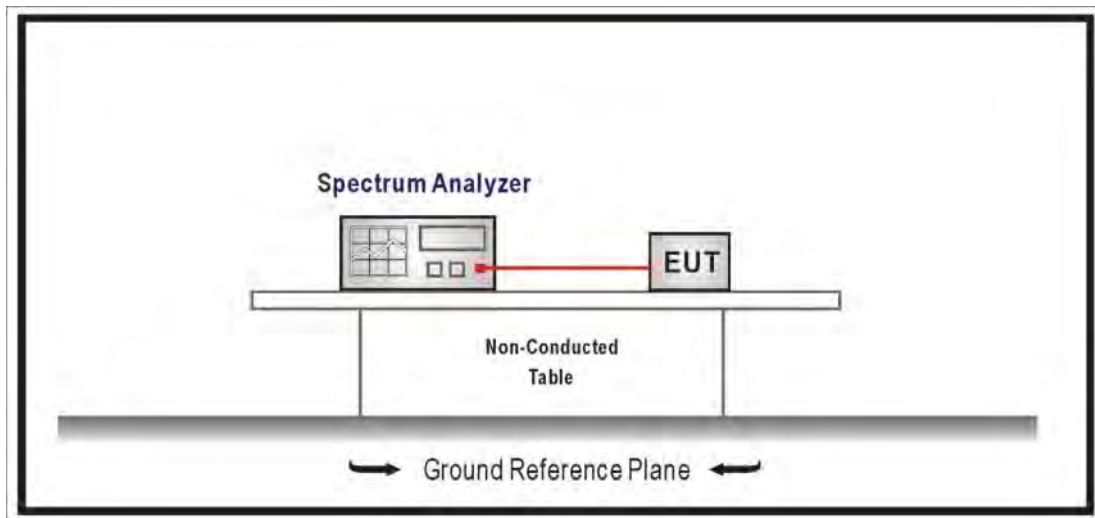

7.2. Test Procedures

The EUT was setup according to ANSI C63.10: 2013; tested procedure section 8.1 of KDB 558074 D01 v05r02 for compliance to FCC 47CFR 15.247 requirements. Set RBW = 100KHz, Set the $VBW \geq 3 \times RBW$, Sweep Time=Auto, Set Peak Detector.

7.3. Limits

The 6 dB bandwidth must be greater than 500 kHz.

7.4. Test Specification


According to FCC Part 15 Subpart C Paragraph 15.247: 2019

7.5. Test Result


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Transmit CDD Mode		
Date of Test	2020/11/05	Test Site	SR12-H
Test Temperature	24.0°C	Test Humidity	60.0%

802.11b (ANT 0)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	8.058	≥0.5	Pass
6	2437	8.045	≥0.5	Pass
11	2462	7.555	≥0.5	Pass


Channel 1 (2412MHz)

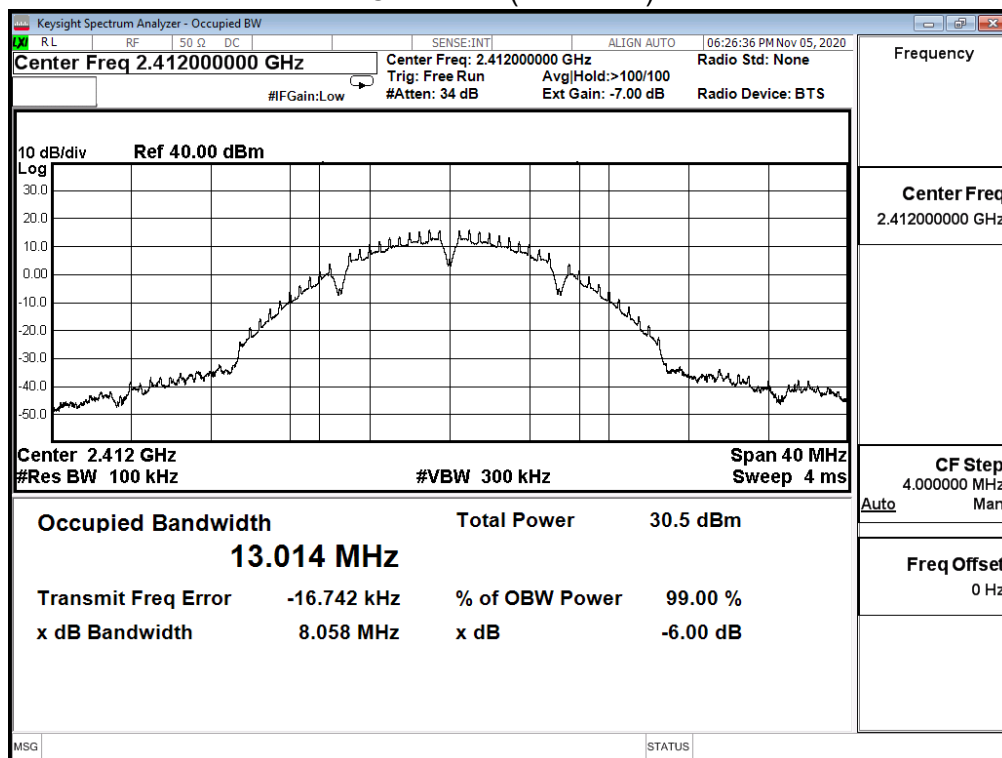

Channel 6 (2437MHz)

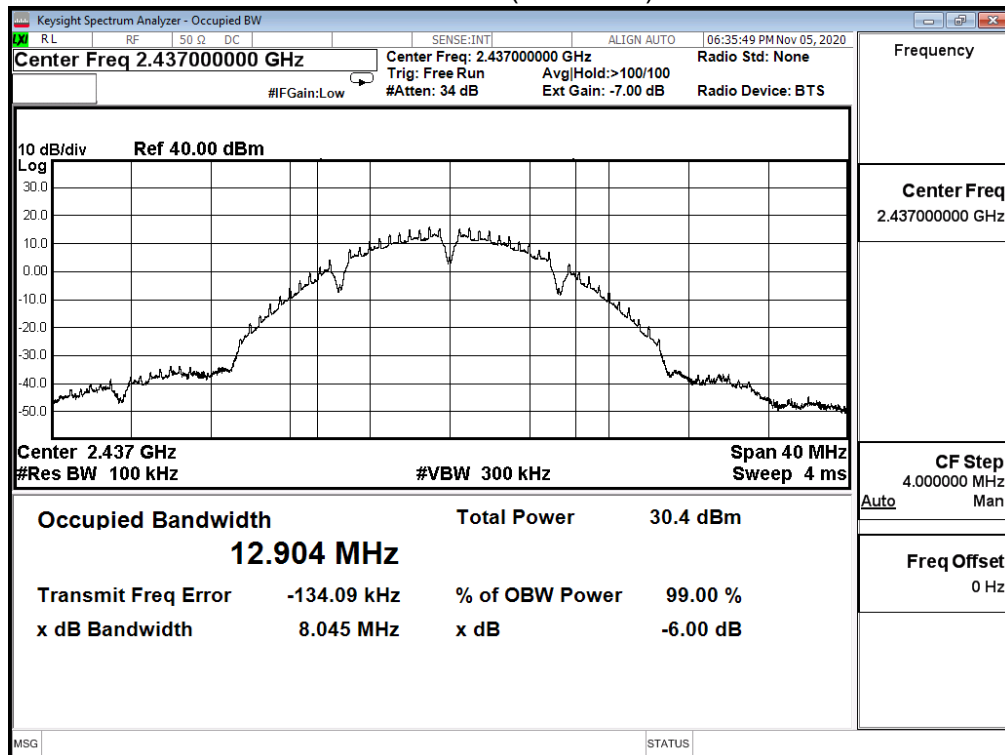


Channel 11 (2462MHz)

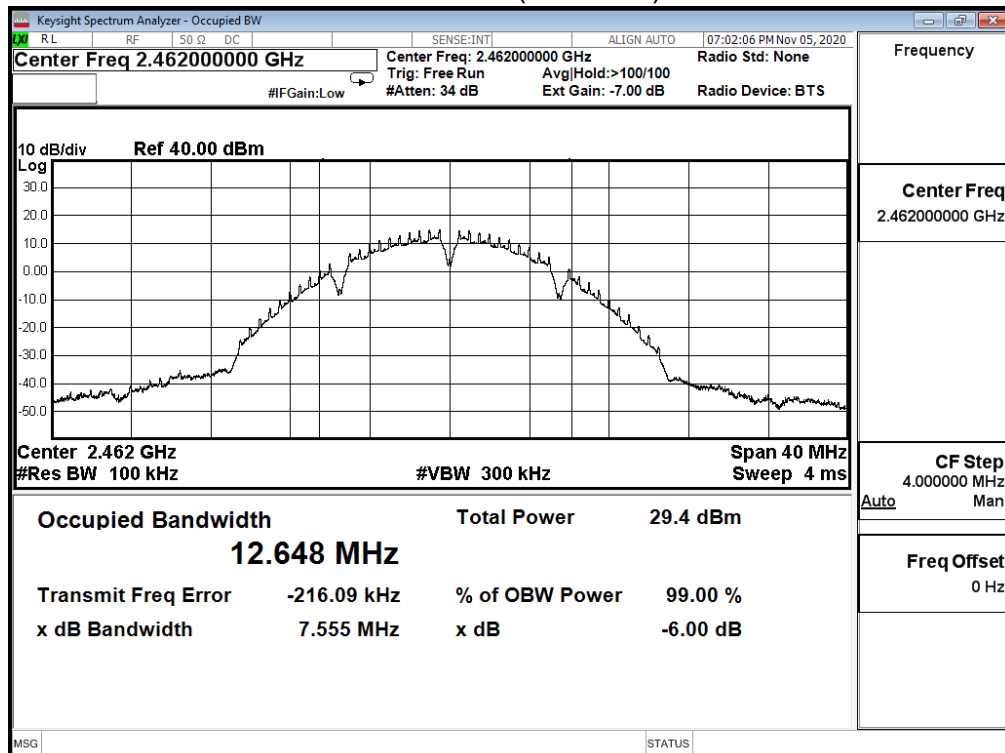


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Transmit CDD Mode		
Date of Test	2020/11/05	Test Site	SR12-H
Test Temperature	24.0°C	Test Humidity	60.0%

802.11b (ANT 1)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	8.053	≥0.5	Pass
6	2437	8.042	≥0.5	Pass
11	2462	7.549	≥0.5	Pass


Channel 1 (2412MHz)

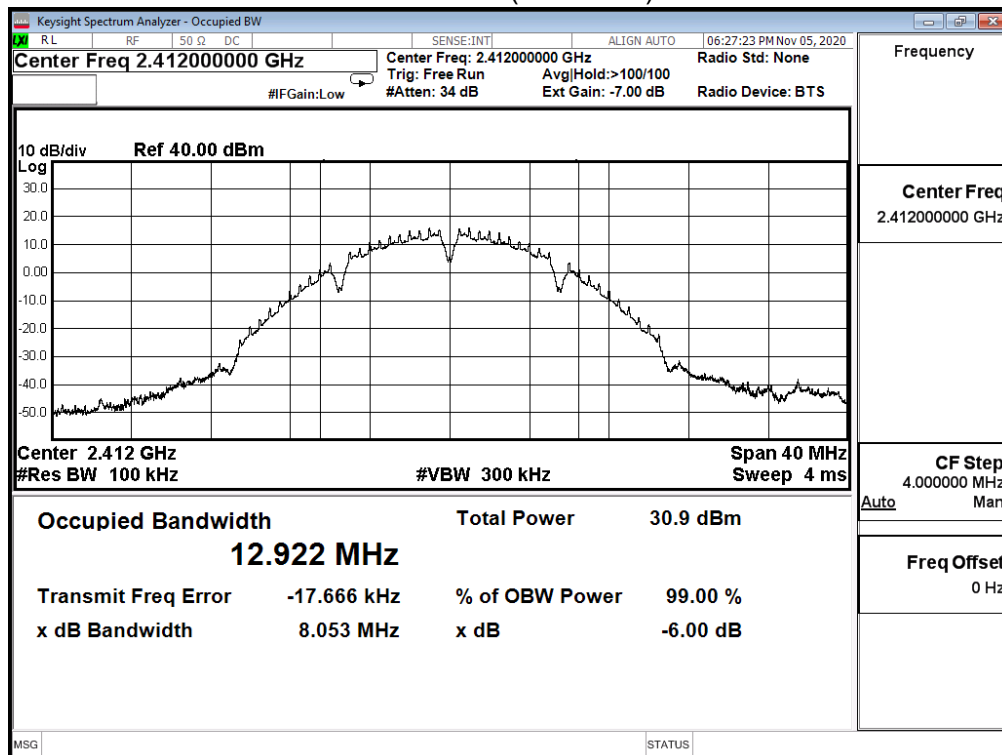

Channel 6 (2437MHz)

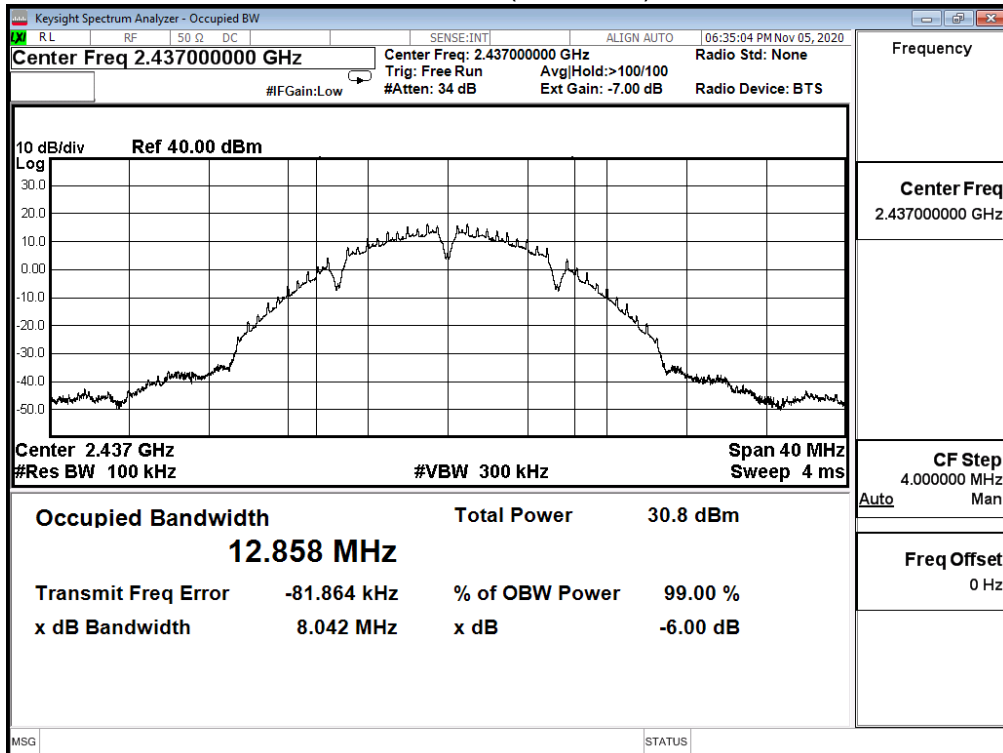


Channel 11 (2462MHz)

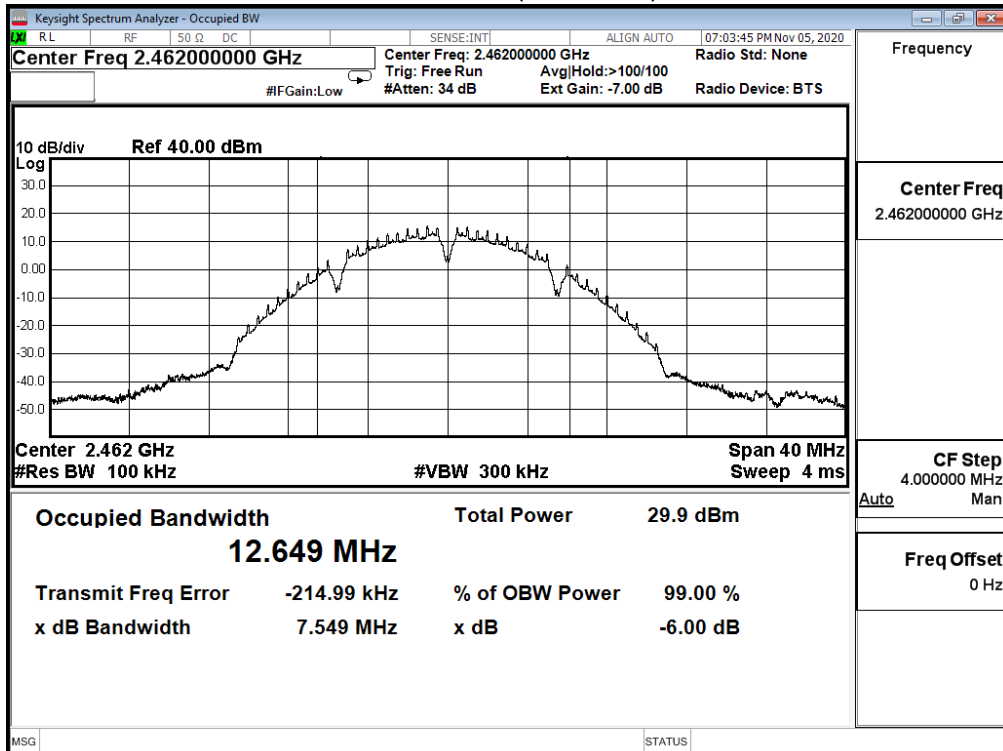


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Transmit CDD Mode		
Date of Test	2020/11/05	Test Site	SR12-H
Test Temperature	24.0°C	Test Humidity	60.0%

802.11b (ANT 2)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	8.047	≥0.5	Pass
6	2437	8.031	≥0.5	Pass
11	2462	7.074	≥0.5	Pass


Channel 1 (2412MHz)

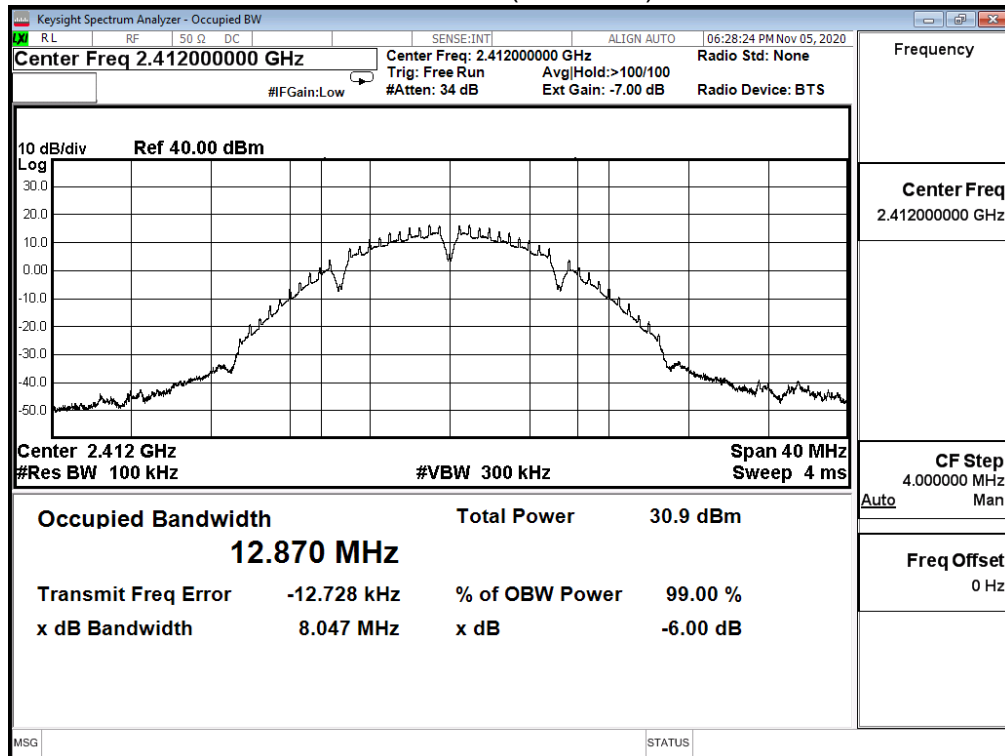

Channel 6 (2437MHz)

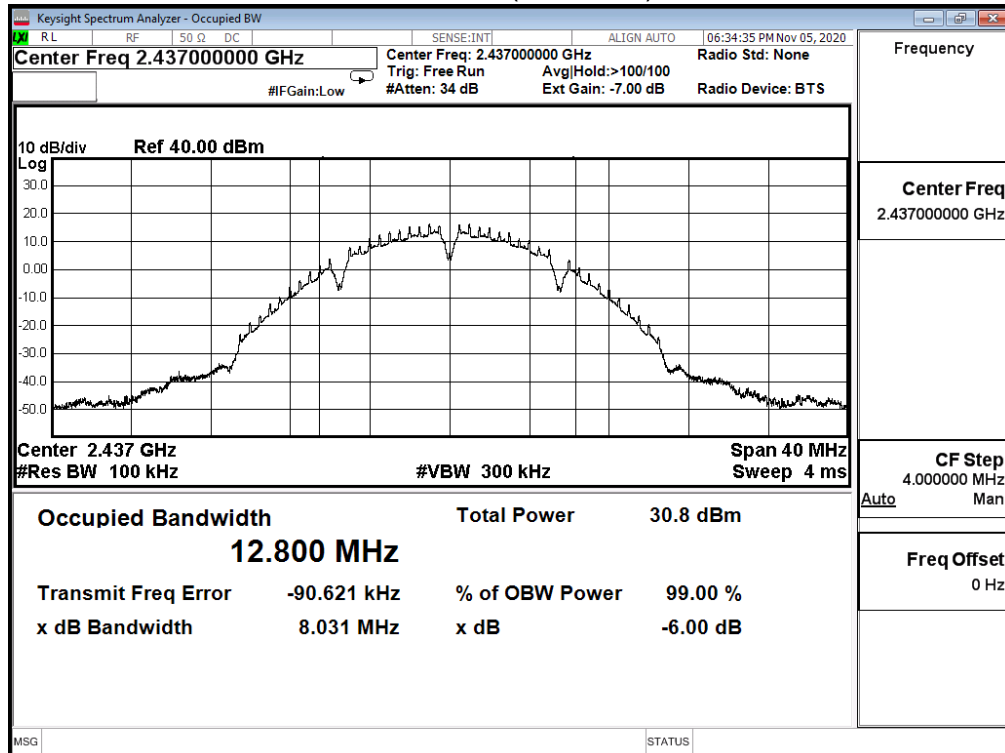


Channel 11 (2462MHz)

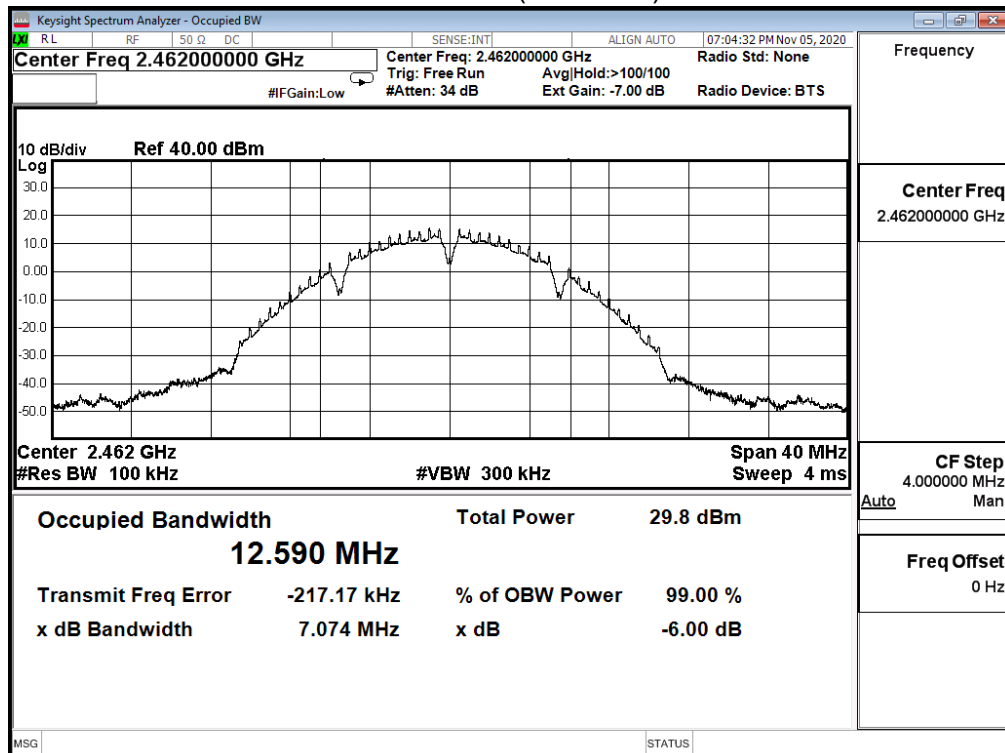


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Transmit CDD Mode		
Date of Test	2020/11/05	Test Site	SR12-H
Test Temperature	24.0°C	Test Humidity	60.0%

802.11b (ANT 3)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	7.562	≥0.5	Pass
6	2437	8.054	≥0.5	Pass
11	2462	7.561	≥0.5	Pass


Channel 1 (2412MHz)

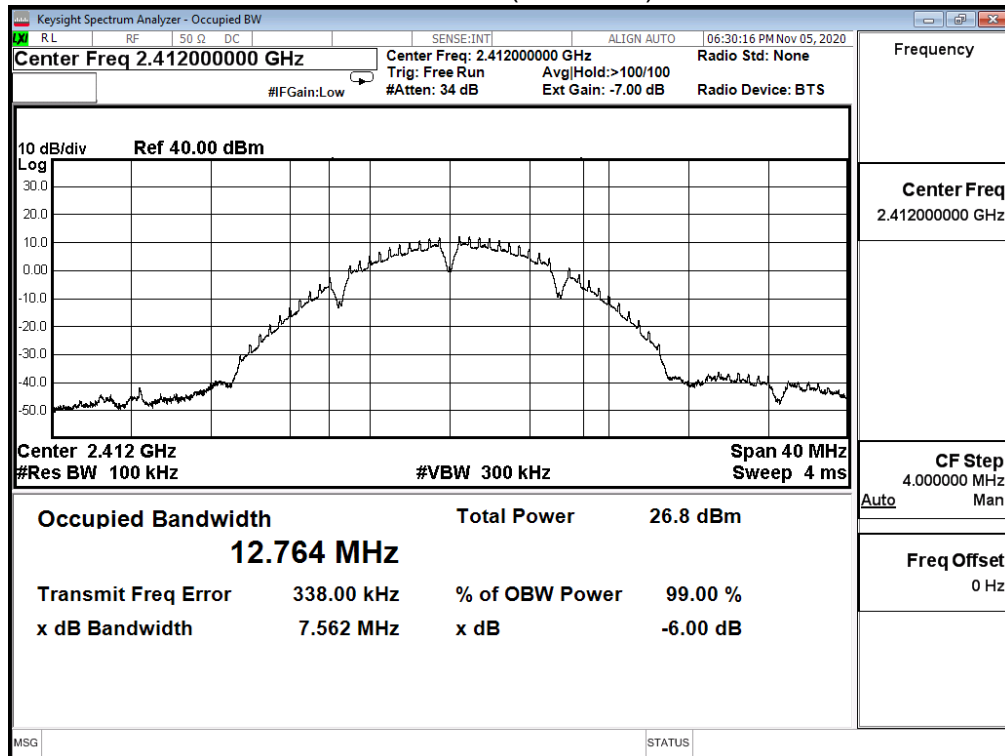

Channel 6 (2437MHz)

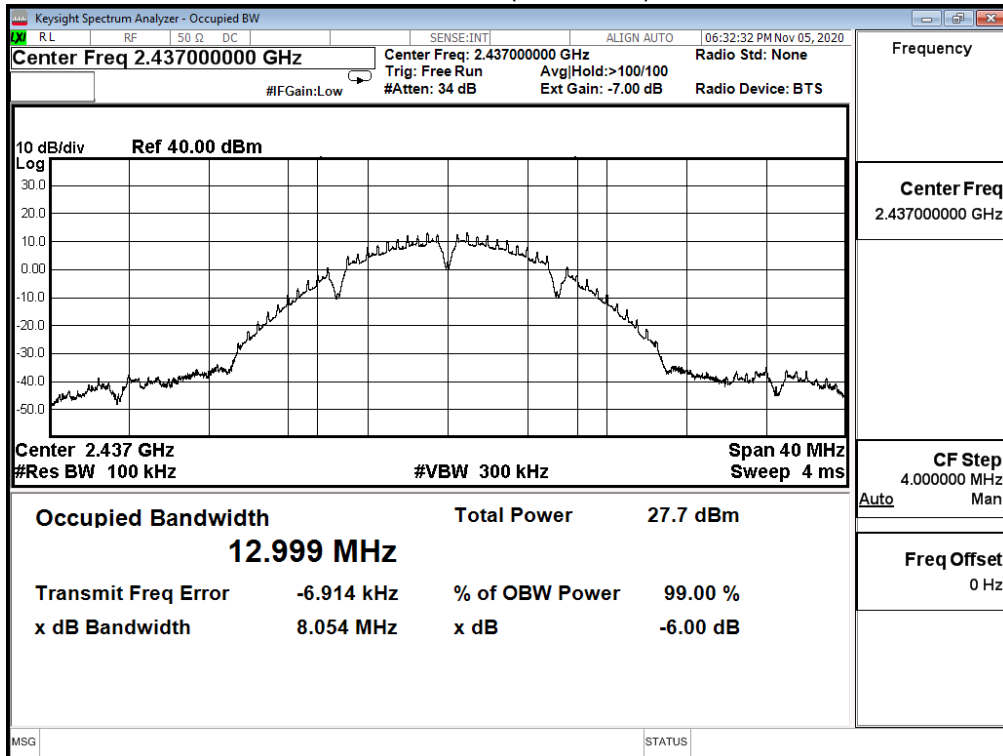


Channel 11 (2462MHz)

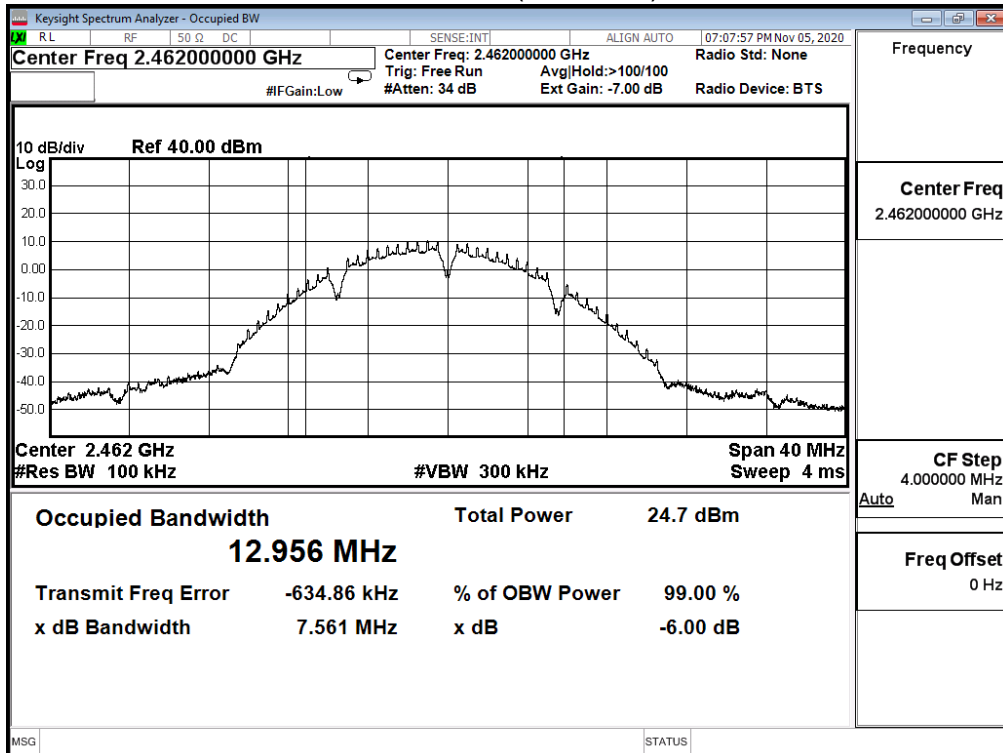


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Transmit CDD Mode		
Date of Test	2020/11/05	Test Site	SR12-H
Test Temperature	24.0°C	Test Humidity	60.0%

802.11g (ANT 0)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	16.330	≥0.5	Pass
6	2437	15.930	≥0.5	Pass
11	2462	15.720	≥0.5	Pass


Channel 1 (2412MHz)

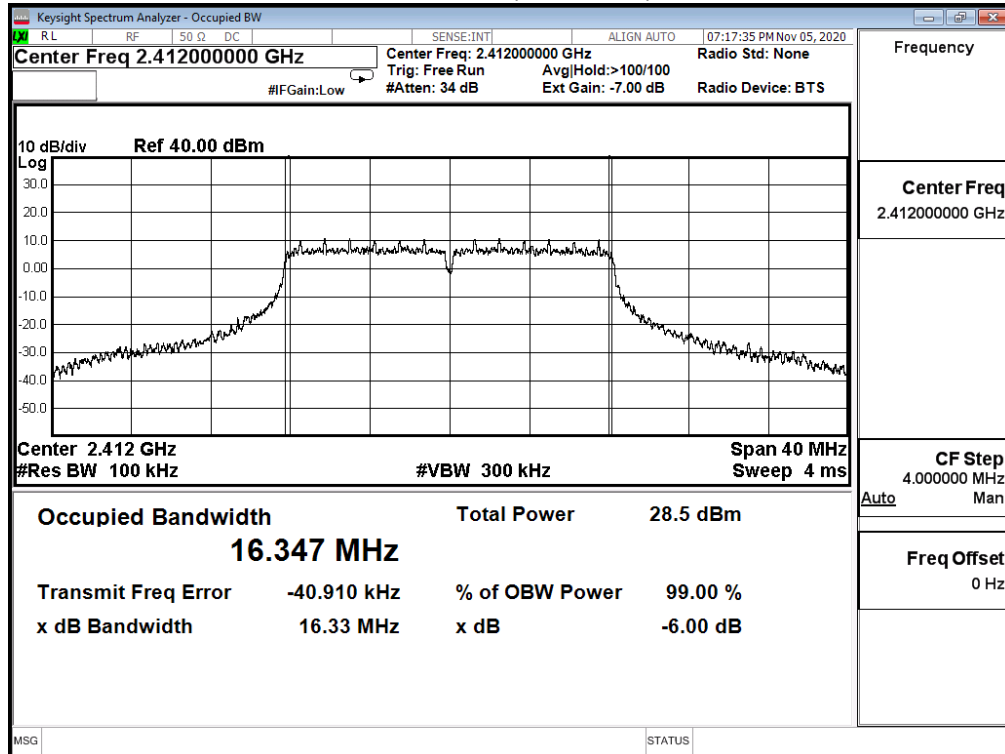

Channel 6 (2437MHz)

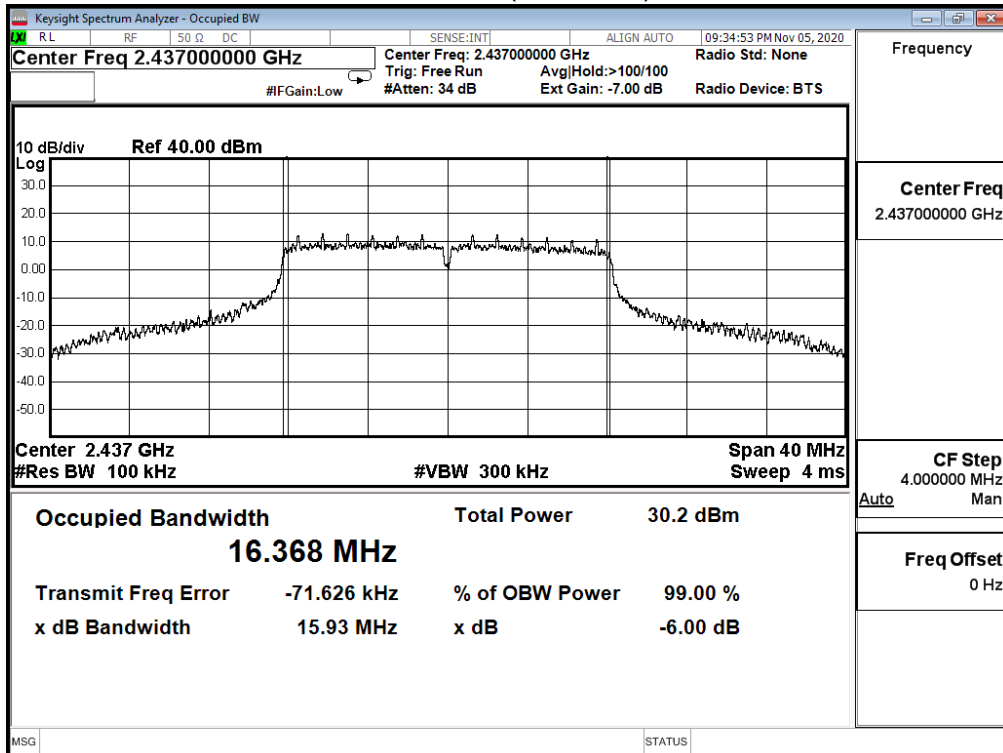


Channel 11 (2462MHz)

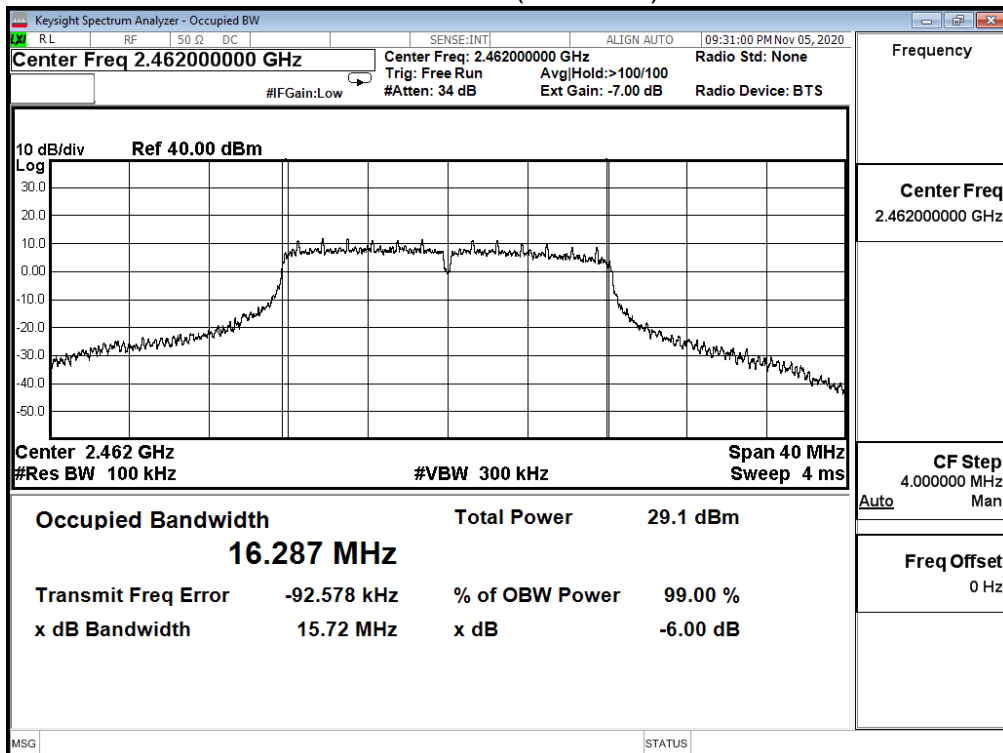


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Transmit CDD Mode		
Date of Test	2020/11/05	Test Site	SR12-H
Test Temperature	24.0°C	Test Humidity	60.0%

802.11g (ANT 1)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	16.290	≥ 0.5	Pass
6	2437	15.720	≥ 0.5	Pass
11	2462	15.710	≥ 0.5	Pass


Channel 1 (2412MHz)

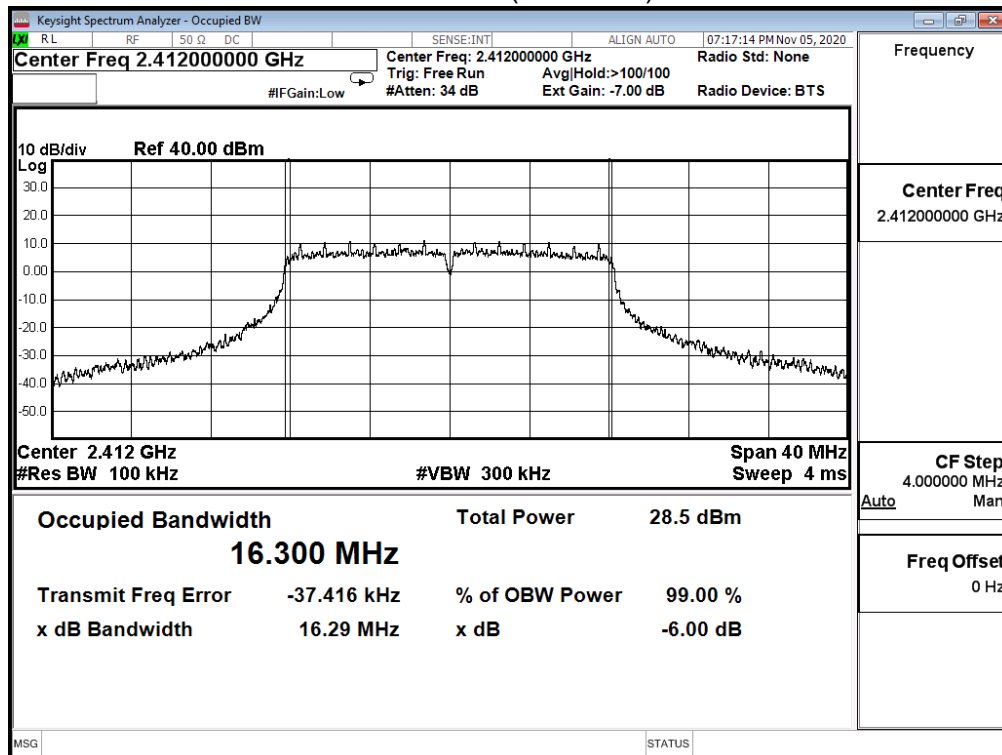

Channel 6 (2437MHz)

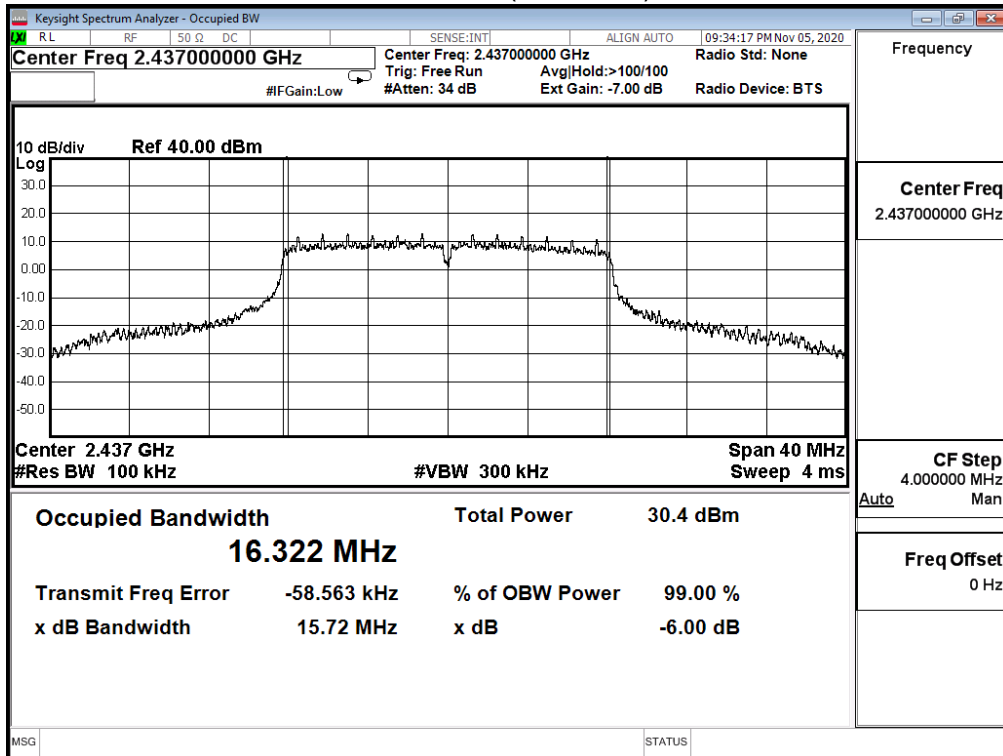


Channel 11 (2462MHz)

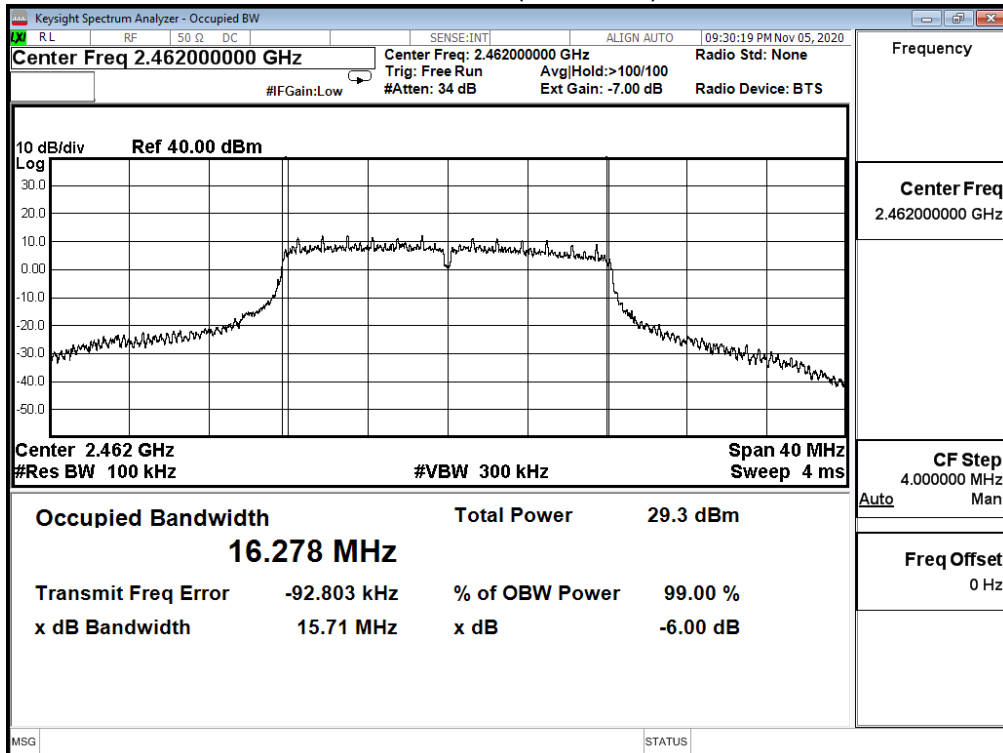


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Transmit CDD Mode		
Date of Test	2020/11/05	Test Site	SR12-H
Test Temperature	24.0°C	Test Humidity	60.0%

802.11g (ANT 2)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	16.290	≥0.5	Pass
6	2437	16.030	≥0.5	Pass
11	2462	15.720	≥0.5	Pass


Channel 1 (2412MHz)

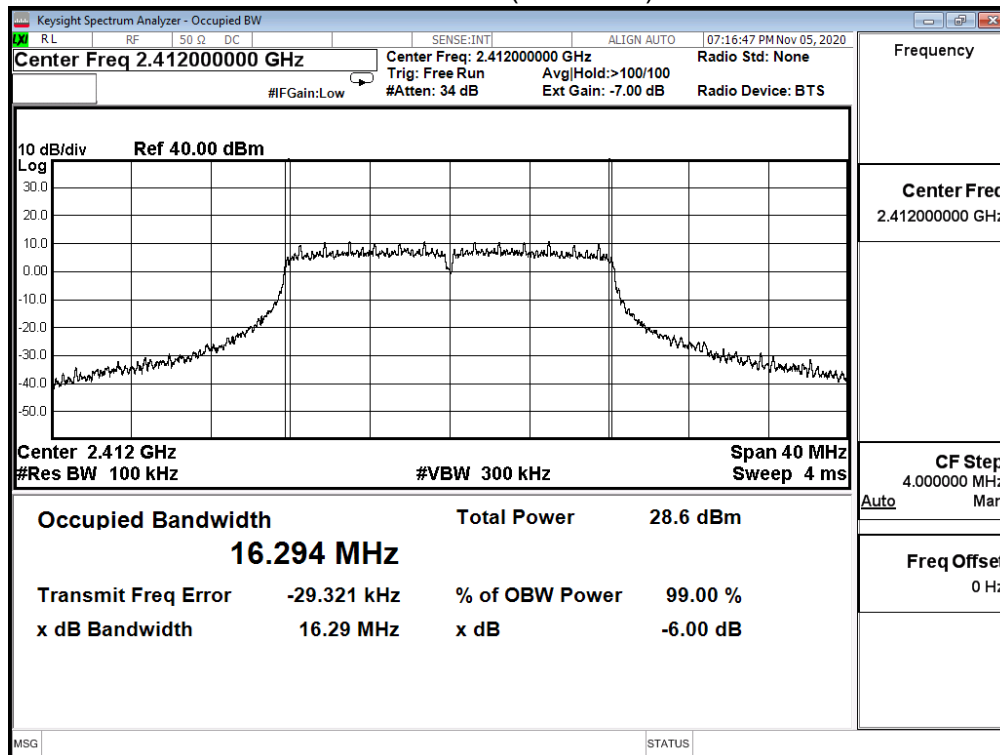

Channel 6 (2437MHz)

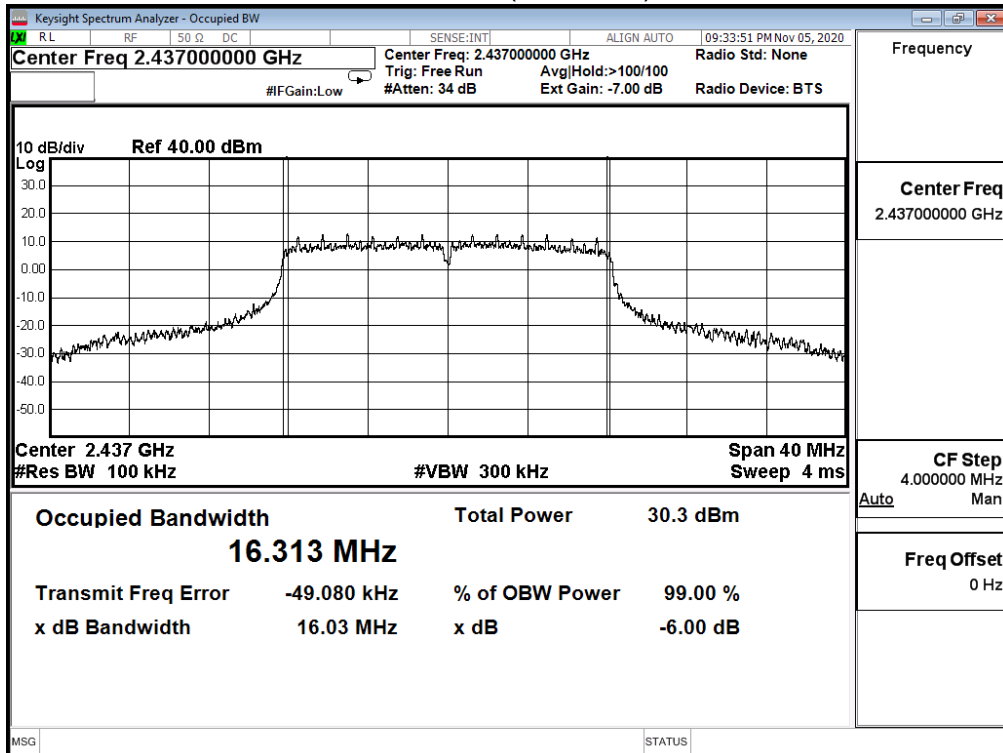


Channel 11 (2462MHz)

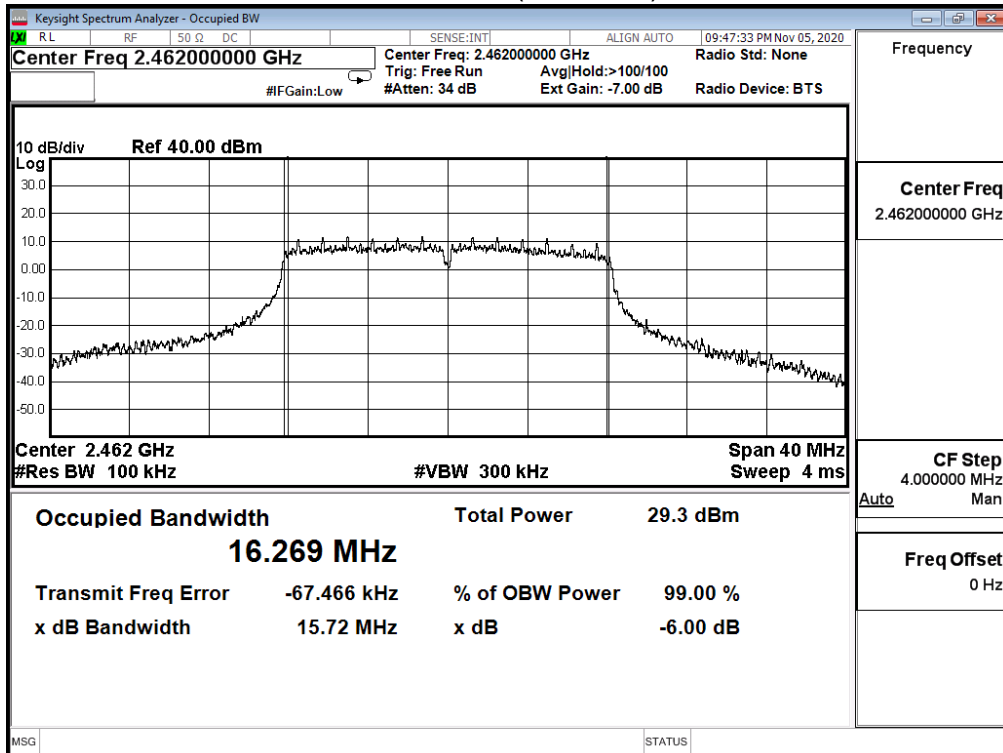


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 1: Transmit CDD Mode		
Date of Test	2020/11/05	Test Site	SR12-H
Test Temperature	24.0°C	Test Humidity	60.0%

802.11g (ANT 3)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	15.680	≥0.5	Pass
6	2437	16.320	≥0.5	Pass
11	2462	15.680	≥0.5	Pass


Channel 1 (2412MHz)

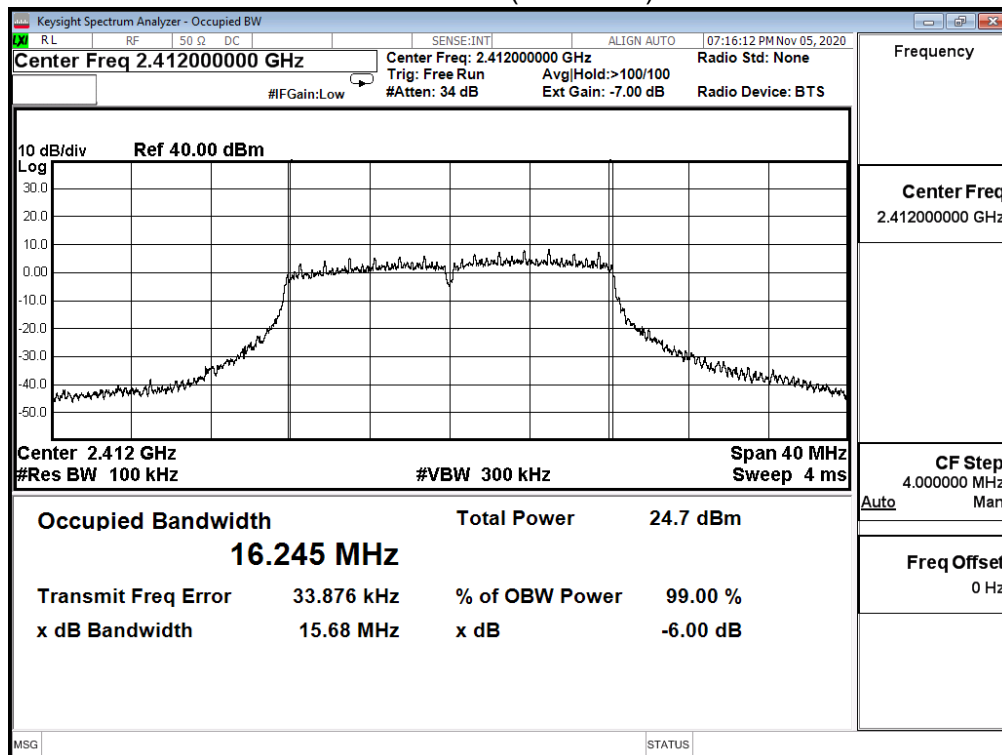

Channel 6 (2437MHz)

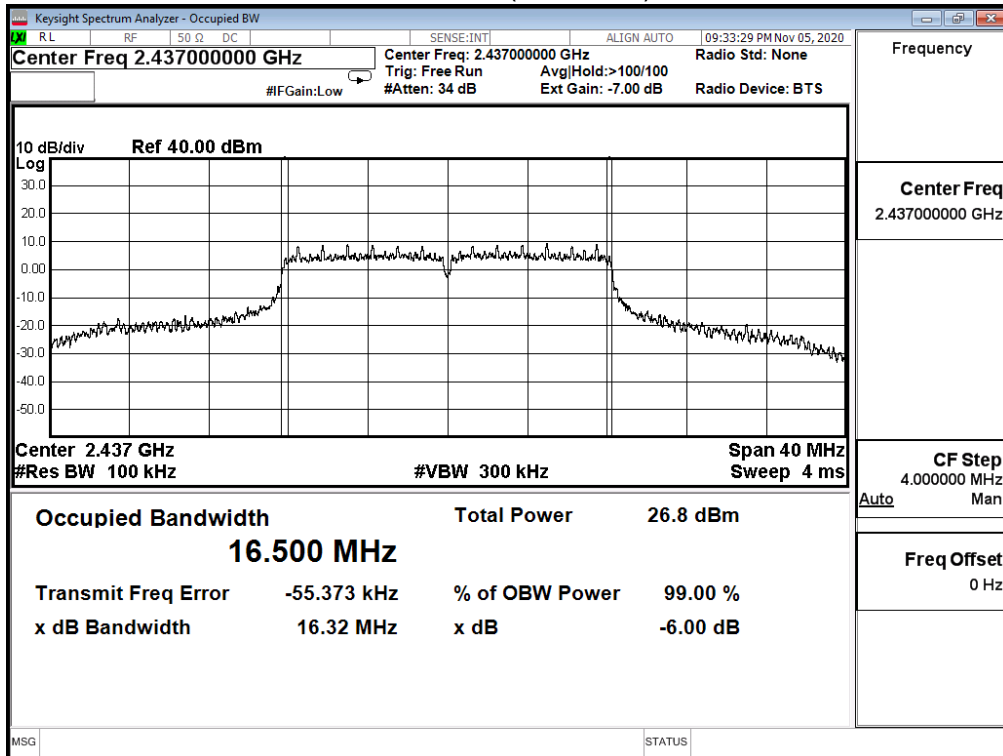


Channel 11 (2462MHz)

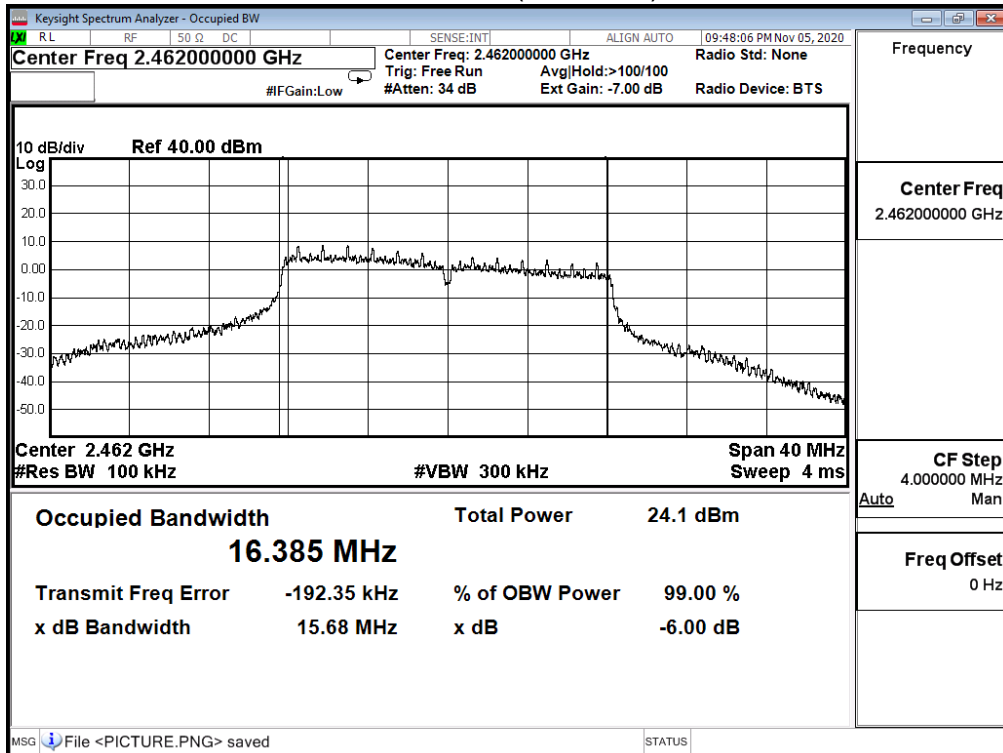


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Transmit RU Mode_Full		
Date of Test	2020/11/09	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	61.0%

IEEE 802.11ax(20M)(ANT 0)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	18.940	≥0.5	Pass
6	2437	18.890	≥0.5	Pass
11	2462	18.880	≥0.5	Pass


Channel 1 (2412MHz)

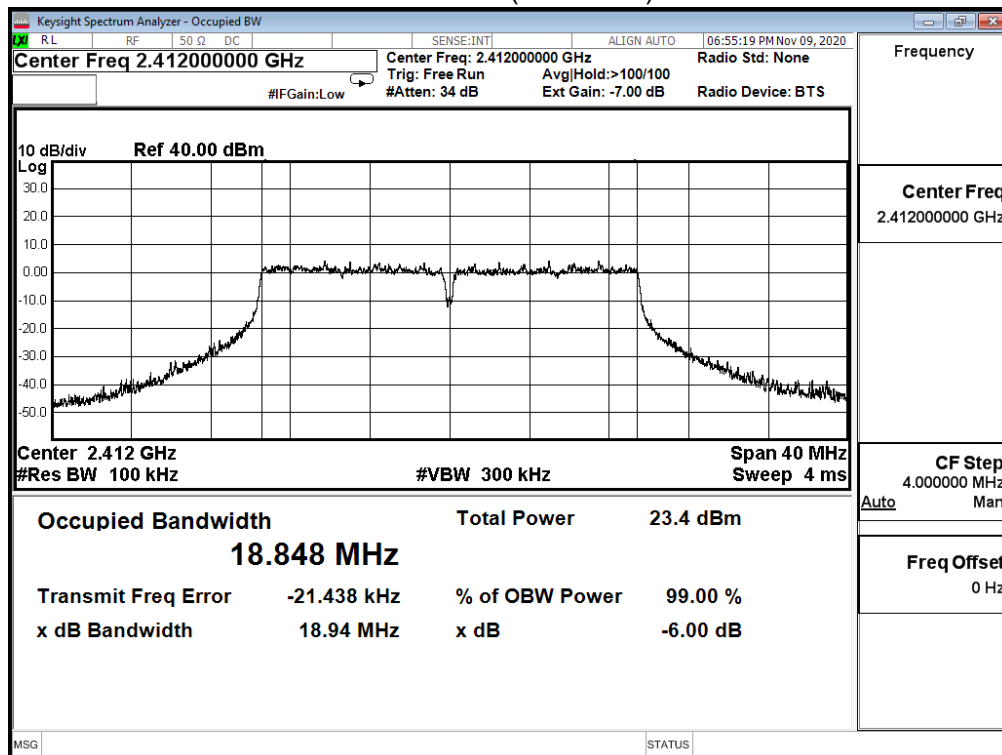

Channel 6 (2437MHz)

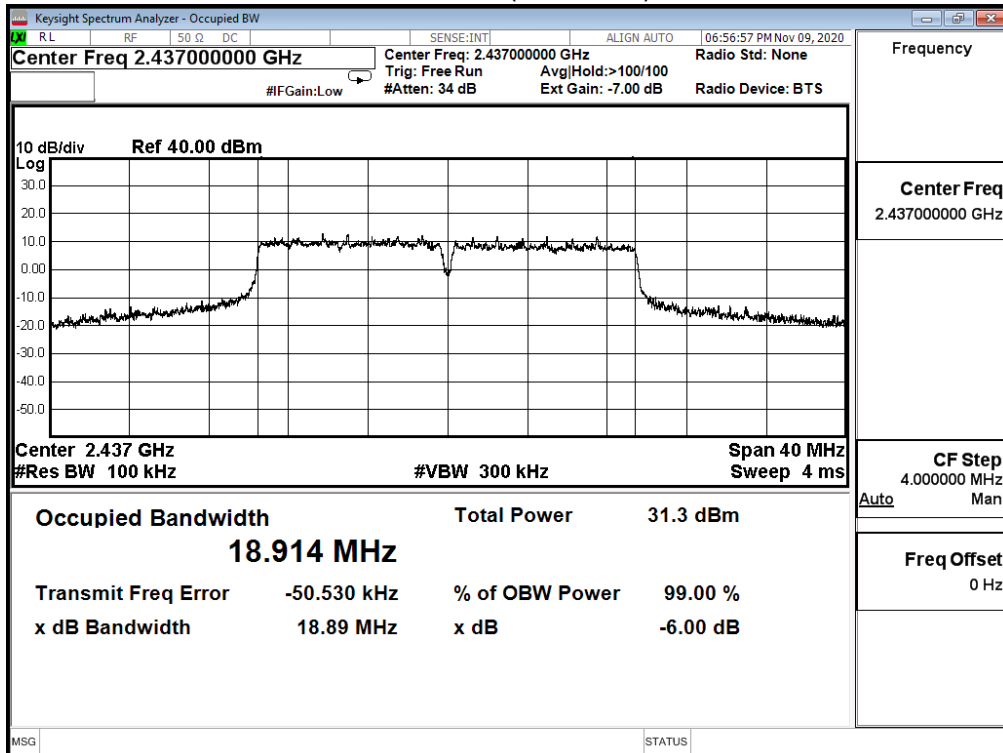


Channel 11 (2462MHz)

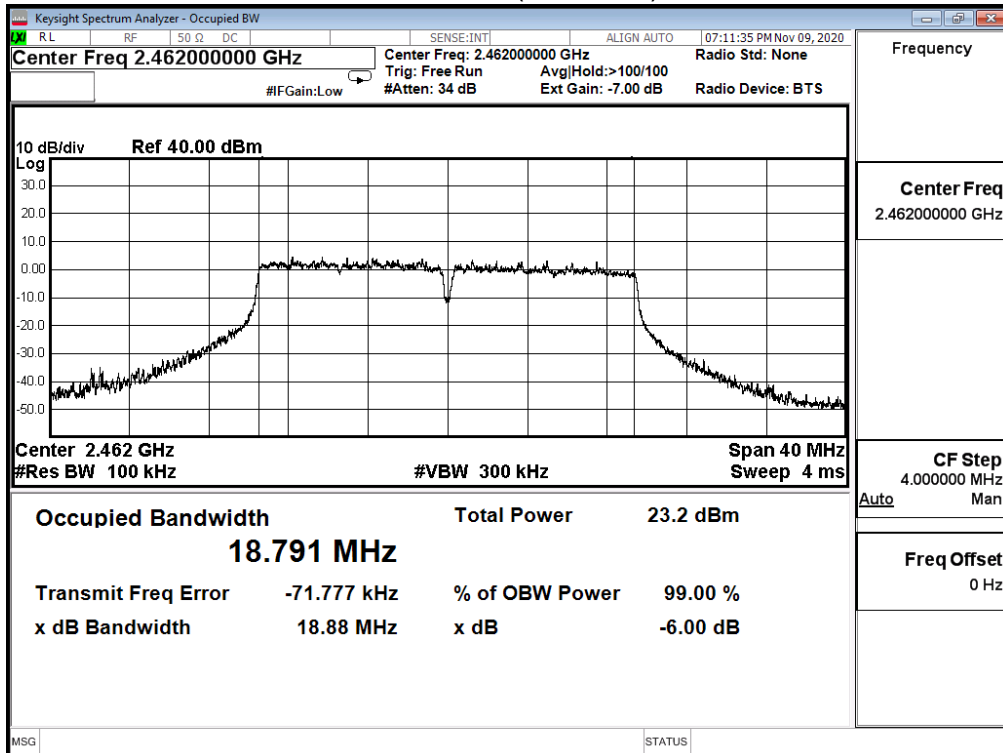


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Transmit RU Mode_Full		
Date of Test	2020/11/09	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	61.0%

IEEE 802.11ax(20M)(ANT 1)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	18.940	≥0.5	Pass
6	2437	18.890	≥0.5	Pass
11	2462	18.870	≥0.5	Pass


Channel 1 (2412MHz)

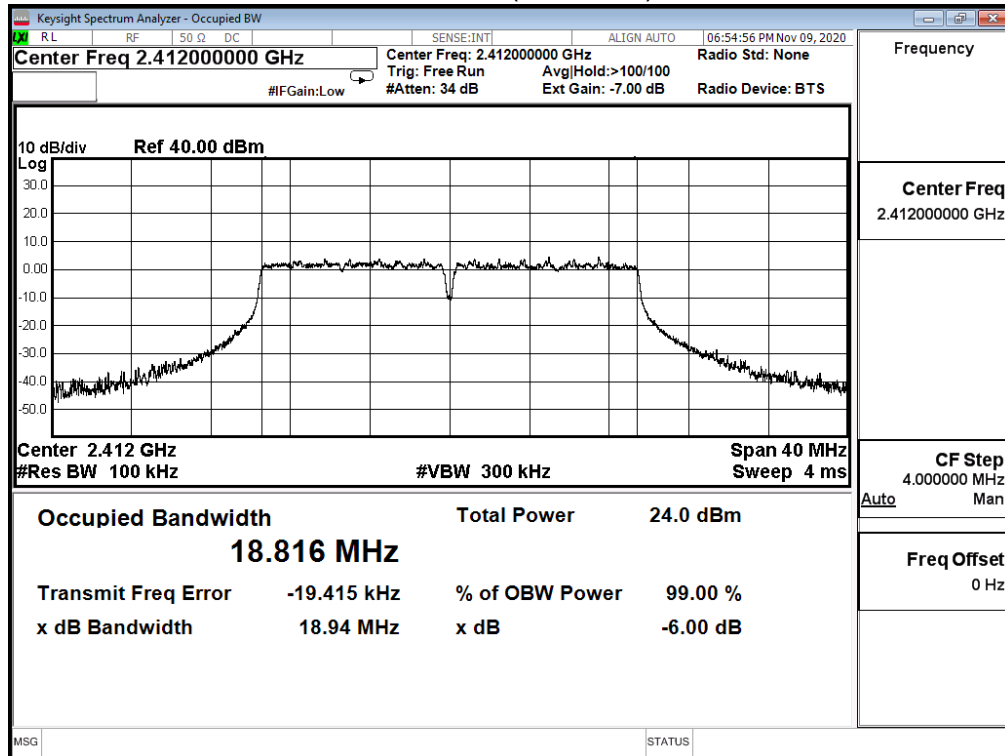

Channel 6 (2437MHz)

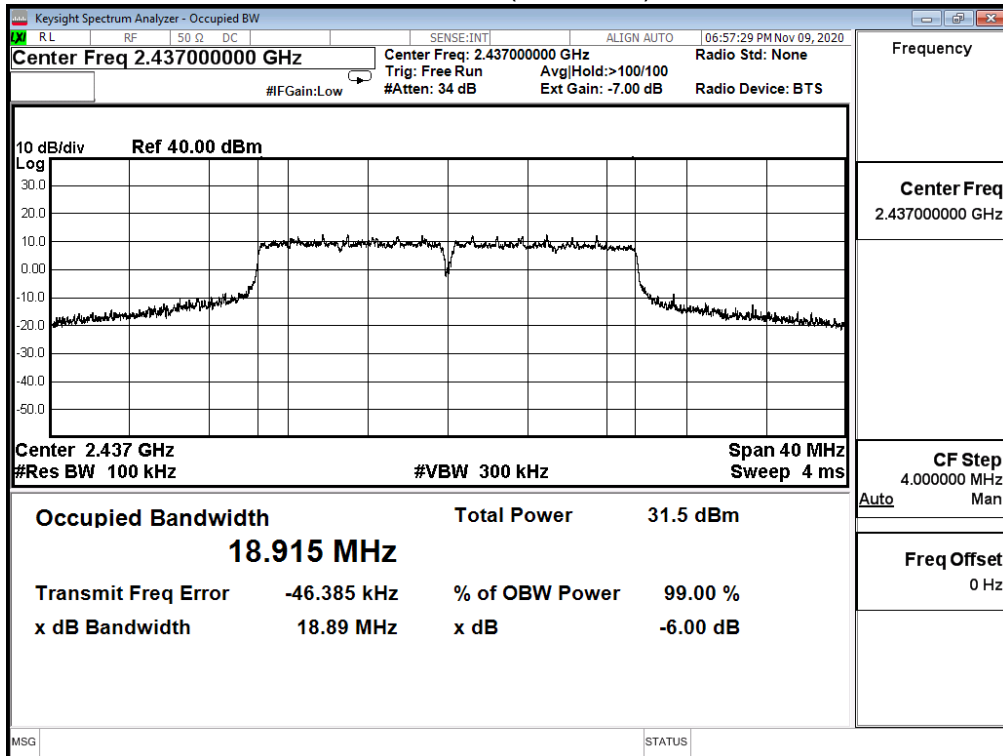


Channel 11 (2462MHz)

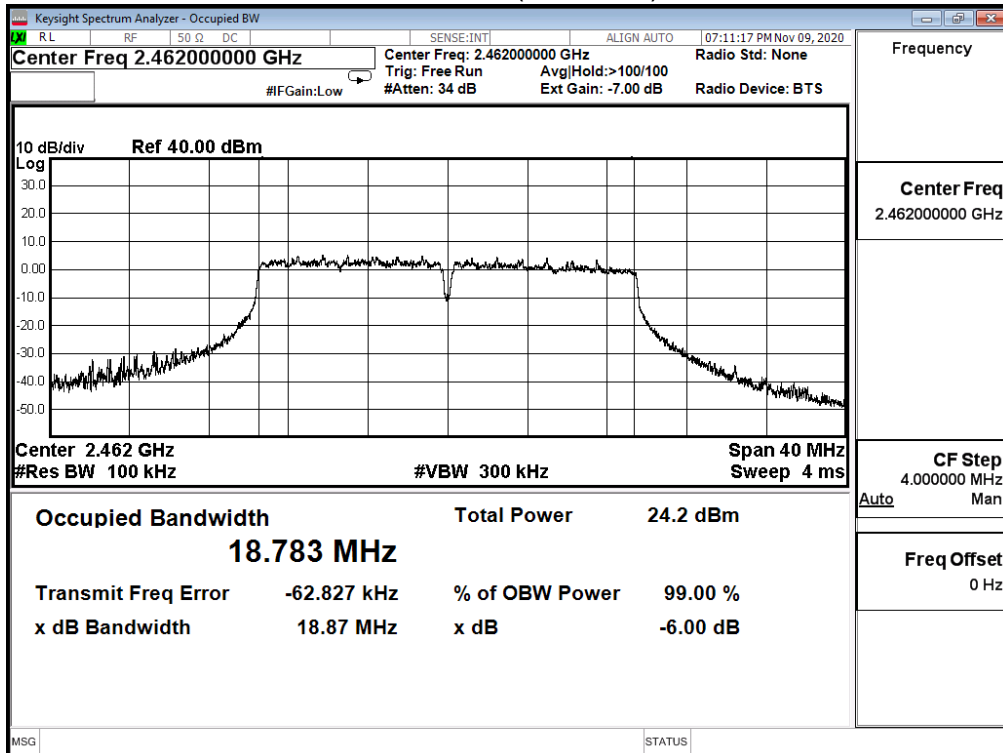


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Transmit RU Mode_Full		
Date of Test	2020/11/09	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	61.0%

IEEE 802.11ax(20M)(ANT 2)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	18.940	≥0.5	Pass
6	2437	18.870	≥0.5	Pass
11	2462	18.760	≥0.5	Pass


Channel 1 (2412MHz)

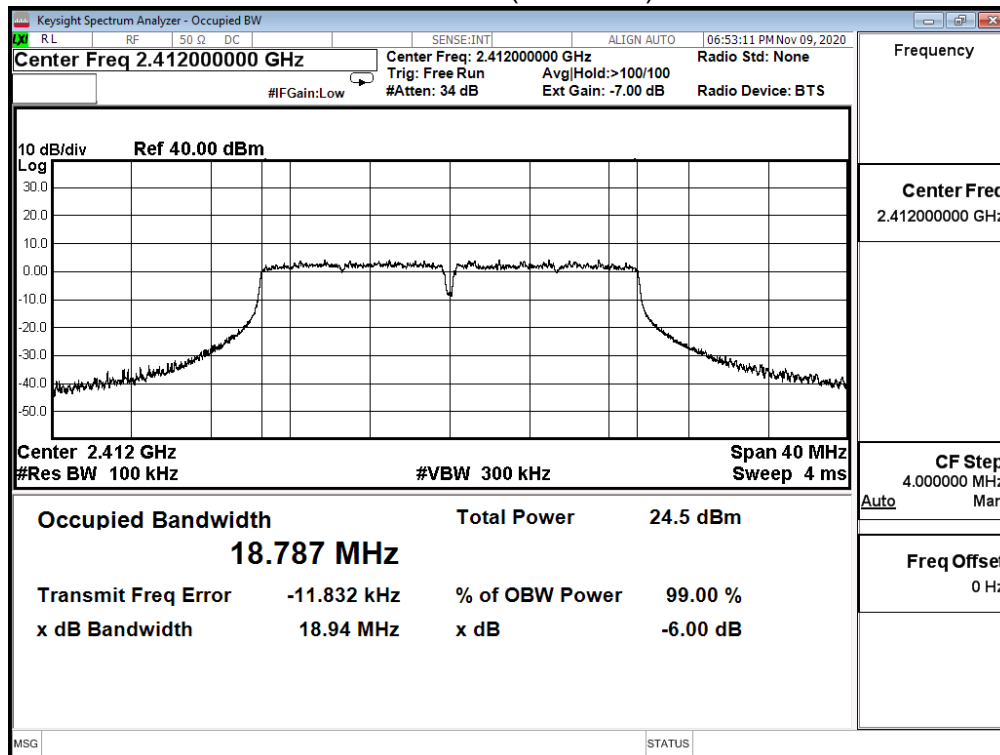

Channel 6 (2437MHz)

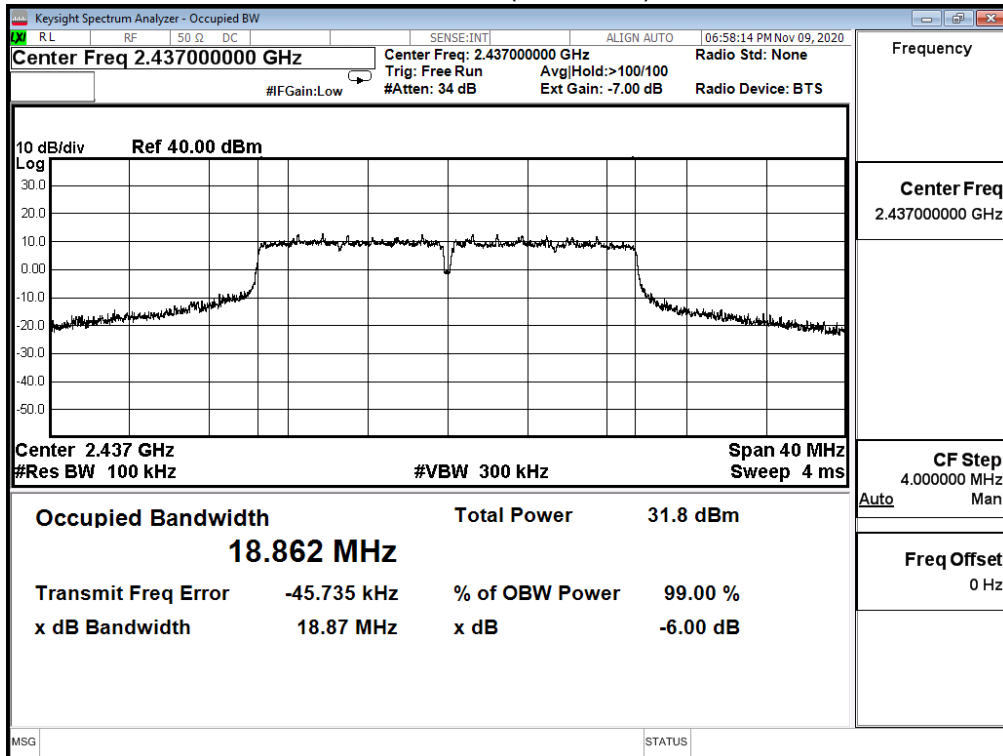


Channel 11 (2462MHz)

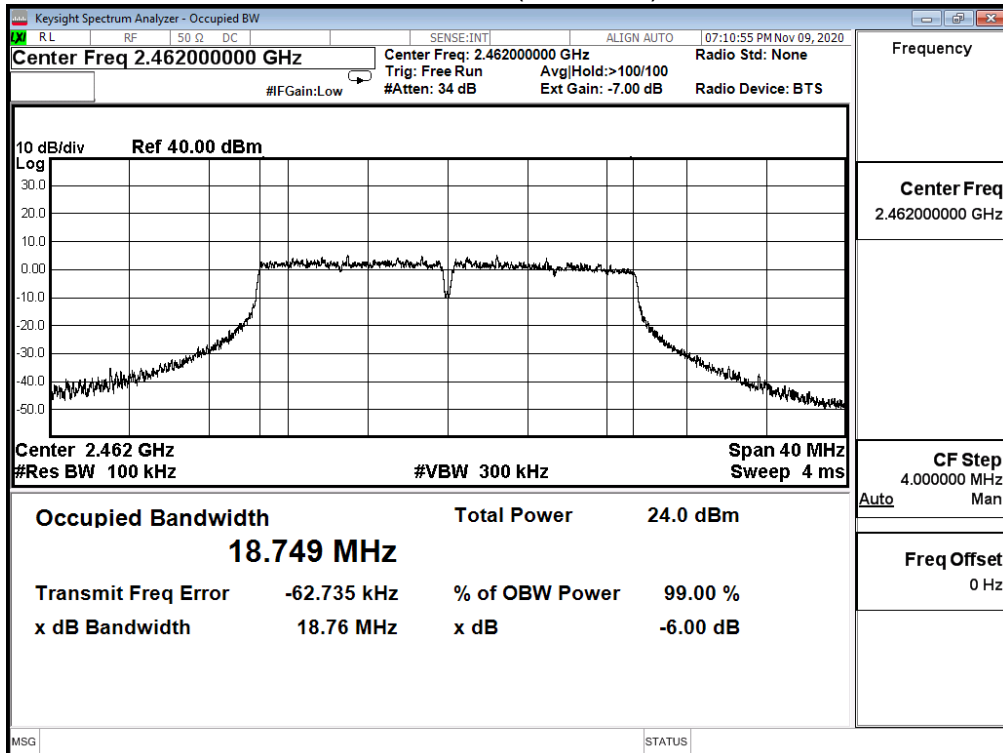


Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Transmit RU Mode_Full		
Date of Test	2020/11/09	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	61.0%

IEEE 802.11ax(20M)(ANT 3)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
1	2412	18.970	≥0.5	Pass
6	2437	18.900	≥0.5	Pass
11	2462	18.760	≥0.5	Pass


Channel 1 (2412MHz)

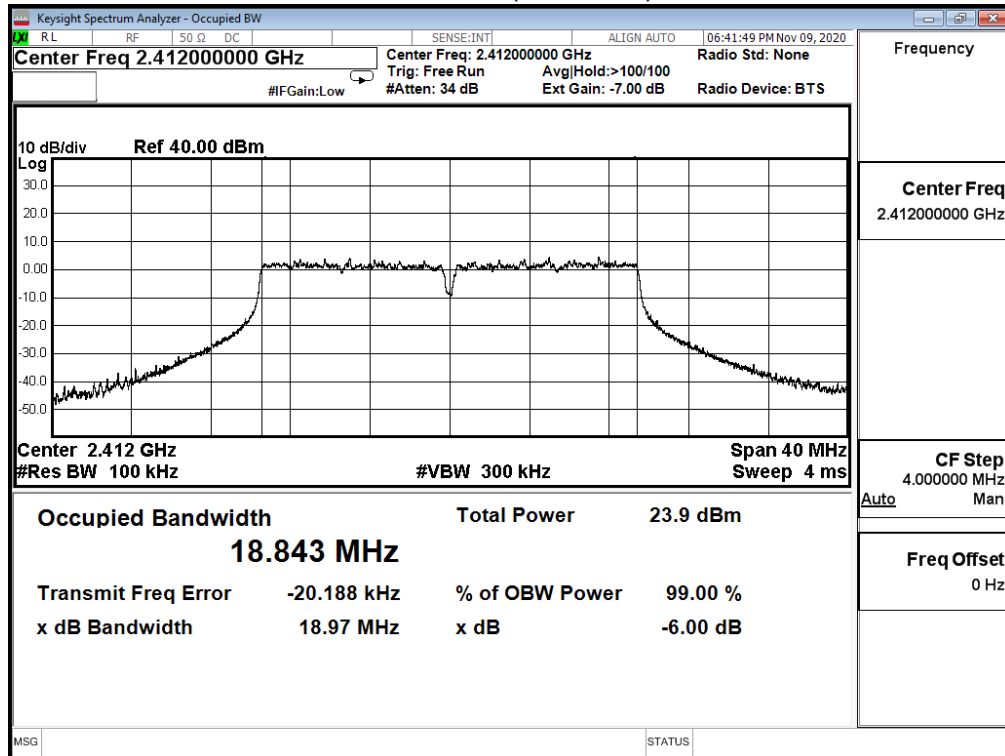

Channel 6 (2437MHz)

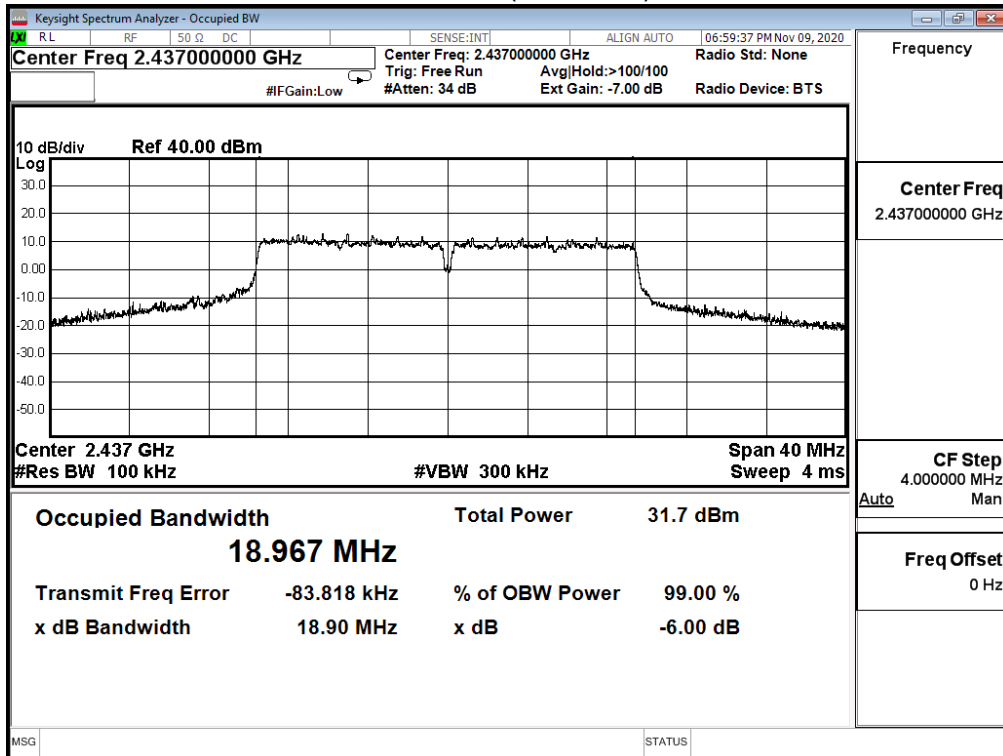

Channel 11 (2462MHz)

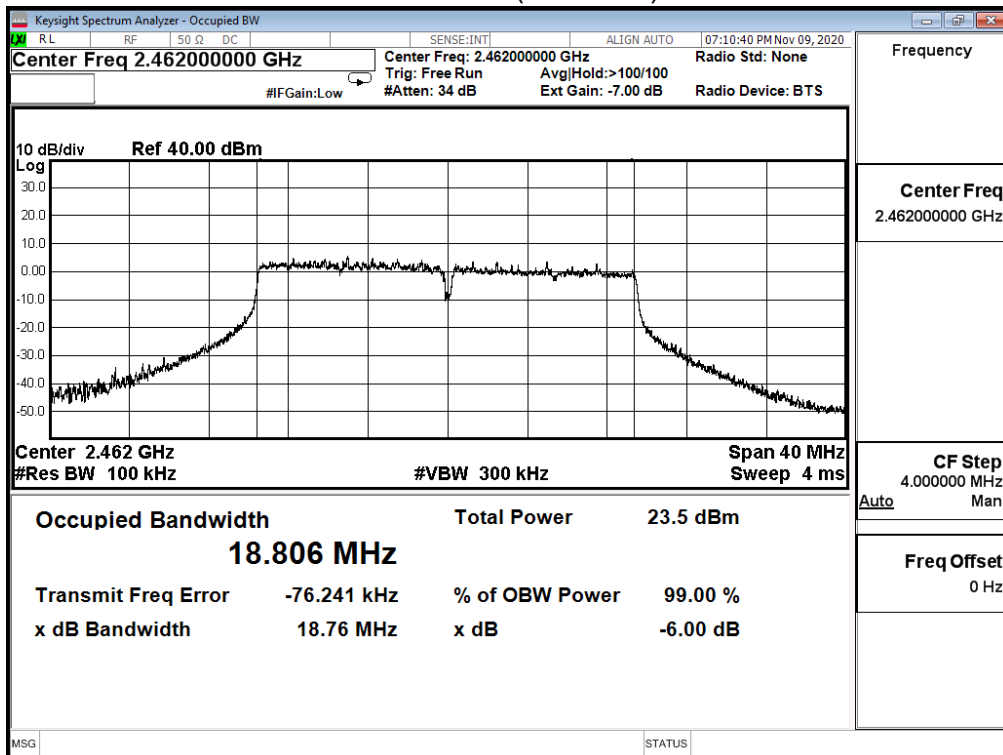

Product	Consumer Home Router		
Test Item	DTS Bandwidth		
Test Mode	Mode 2: Transmit RU Mode_Full		
Date of Test	2020/11/09	Test Site	SR12-H
Test Temperature	23.0°C	Test Humidity	61.0%

IEEE 802.11ax(40M)(ANT 0)				
Channel No.	Frequency (MHz)	Measure Level (MHz)	Limit (MHz)	Result
3	2422	37.990	≥0.5	Pass
6	2437	37.940	≥0.5	Pass
9	2452	37.630	≥0.5	Pass

Channel 3 (2422MHz)

