


Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch135,6.625G,BW80M	Humidity (%RH)	58.0

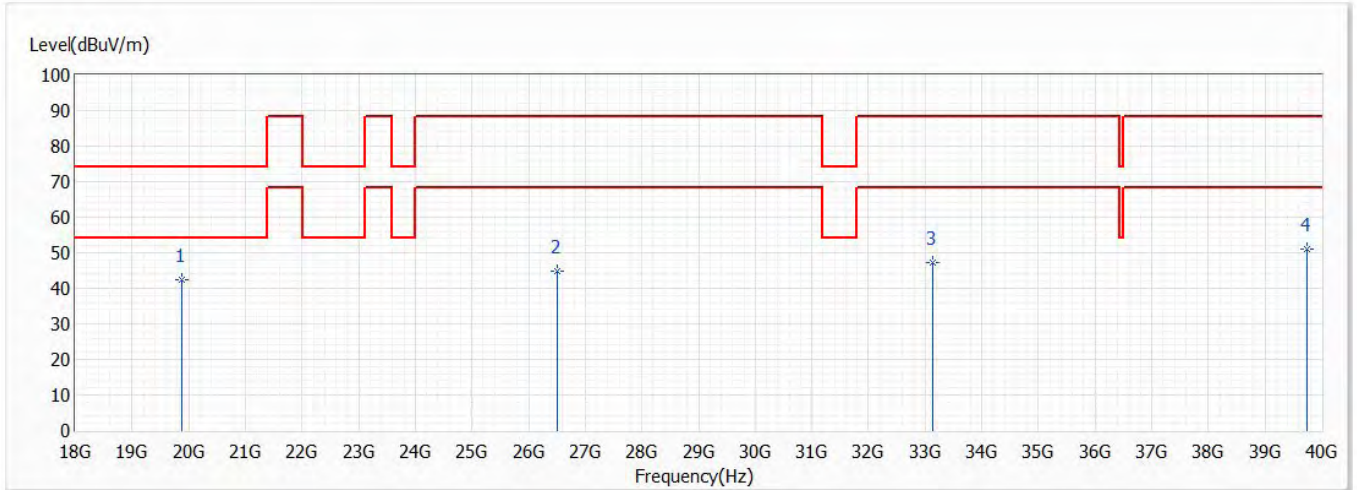


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	19875.000	42.38	74.00	-31.62	48.70	-6.32	PK
2	26500.000	44.70	88.20	-43.50	47.89	-3.19	PK
3	33125.000	47.17	88.20	-41.03	47.04	0.13	PK
4	39750.000	51.09	88.20	-37.11	45.40	5.69	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch151,6.705G,BW80M	Humidity (%RH)	58.0

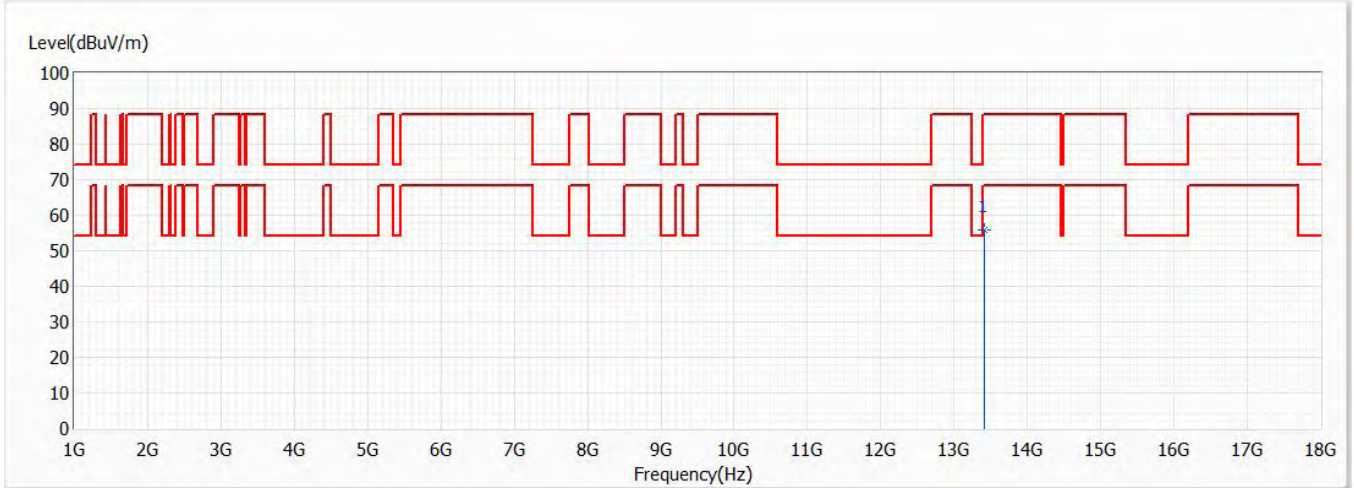


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13410.000	56.03	88.20	-32.17	41.61	14.42	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch151,6.705G,BW80M	Humidity (%RH)	58.0

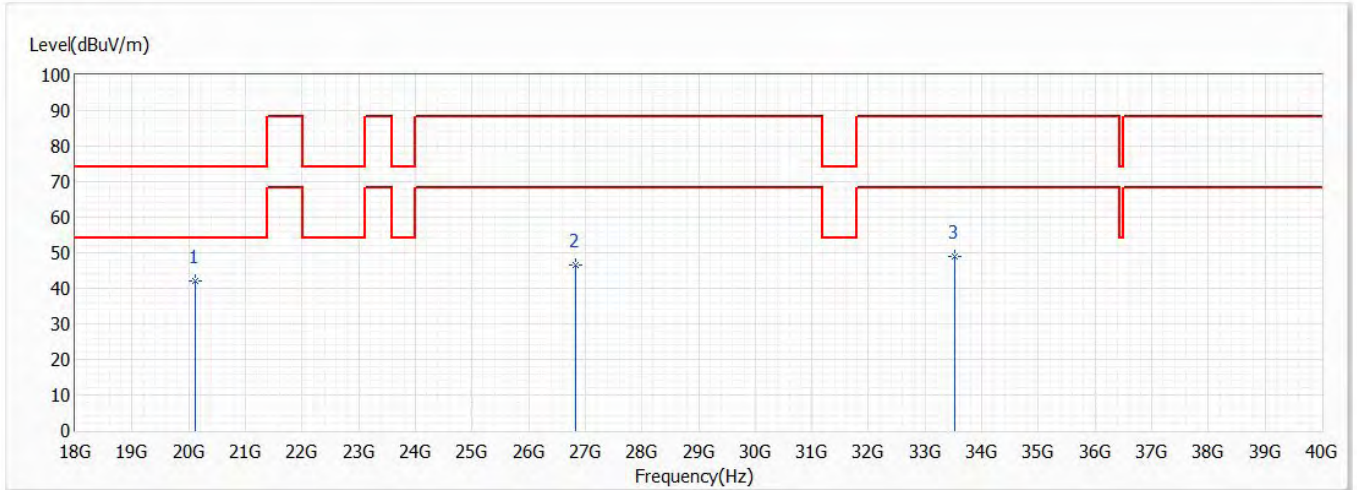


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20115.000	42.23	74.00	-31.77	48.94	-6.71	PK
2	26820.000	46.65	88.20	-41.55	48.58	-1.93	PK
3	33525.000	48.98	88.20	-39.22	48.74	0.24	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch151,6.705G,BW80M	Humidity (%RH)	58.0

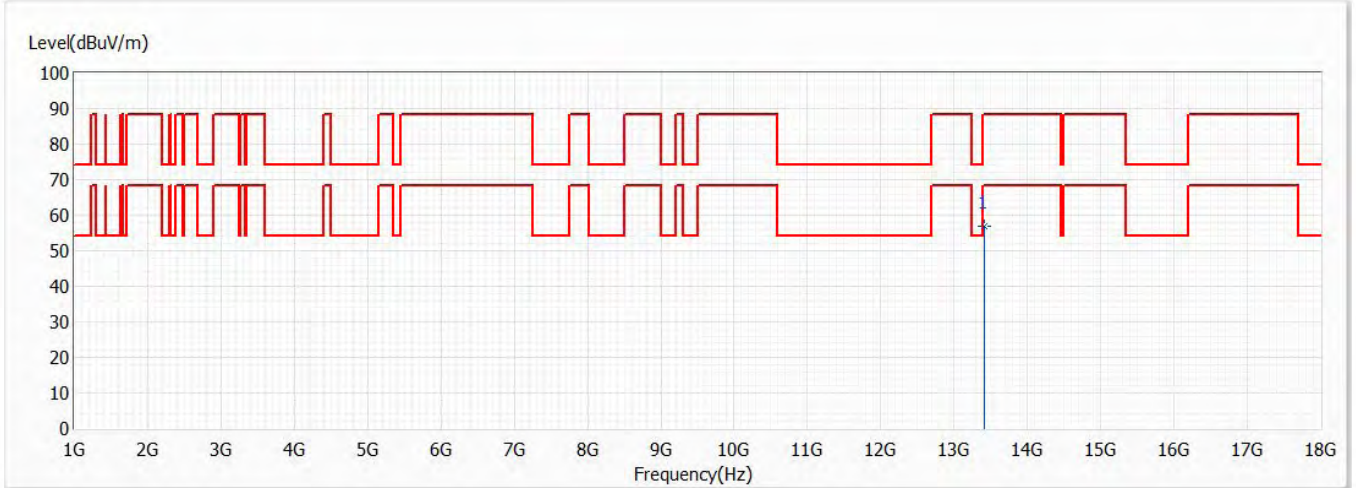


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13410.000	56.76	88.20	-31.44	42.34	14.42	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch151,6.705G,BW80M	Humidity (%RH)	58.0

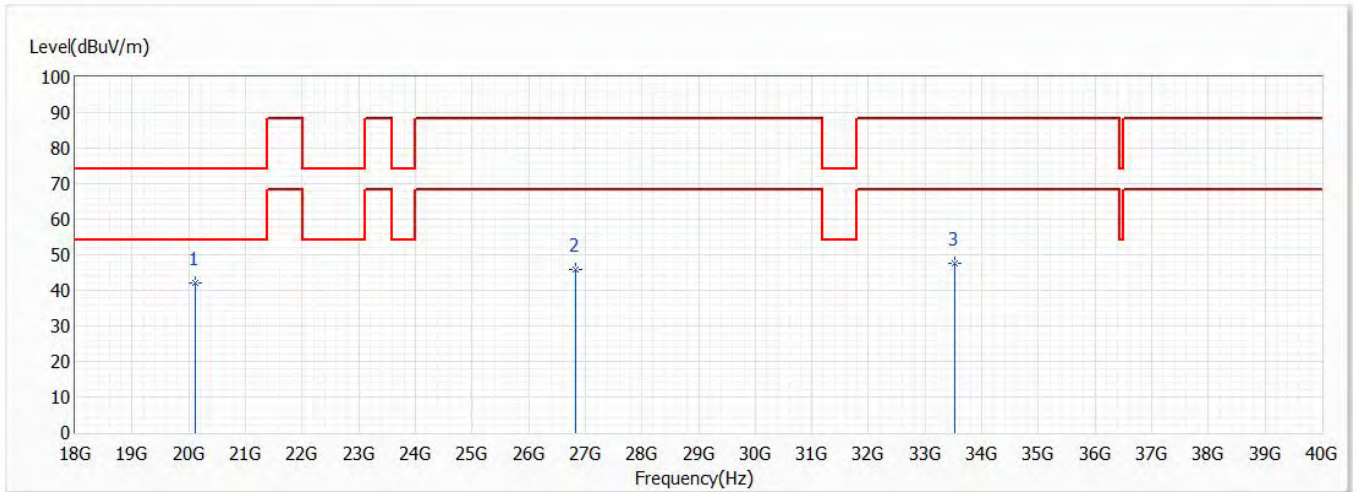


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20115.000	42.24	74.00	-31.76	48.95	-6.71	PK
2	26820.000	45.94	88.20	-42.26	47.87	-1.93	PK
3	33525.000	47.72	88.20	-40.48	47.48	0.24	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch167,6.785G,BW80M	Humidity (%RH)	58.0

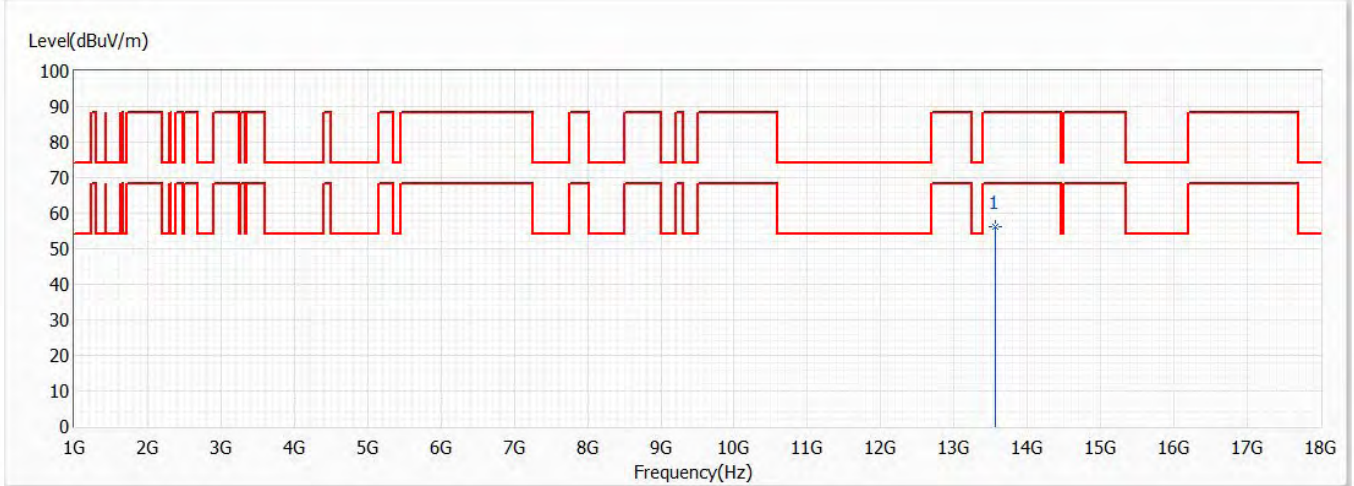


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13570.000	56.22	88.20	-31.98	41.36	14.86	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch167,6.785G,BW80M	Humidity (%RH)	58.0

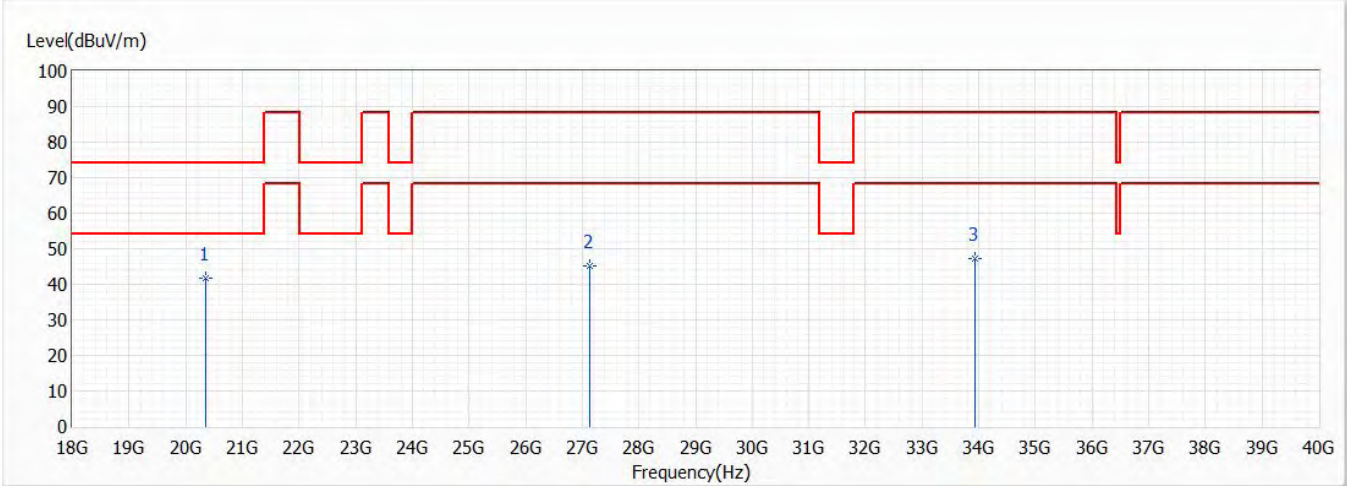


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20355.000	41.70	74.00	-32.30	49.36	-7.66	PK
2	27140.000	45.21	88.20	-42.99	46.73	-1.52	PK
3	33925.000	47.21	88.20	-40.99	46.78	0.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch167,6.785G,BW80M	Humidity (%RH)	58.0

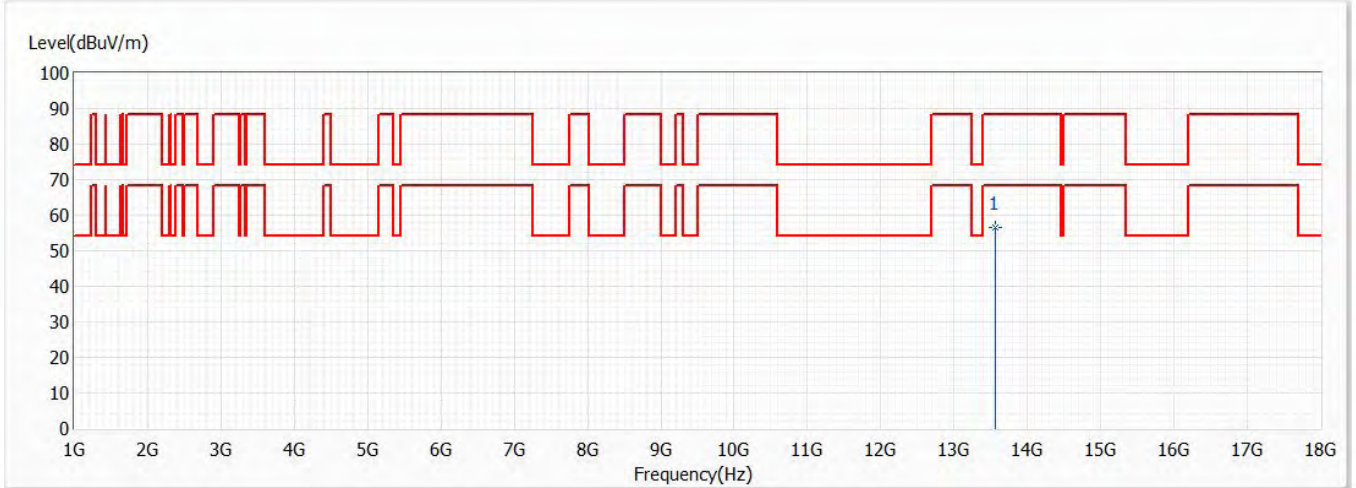


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13570.000	56.47	88.20	-31.73	41.61	14.86	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch167,6.785G,BW80M	Humidity (%RH)	58.0

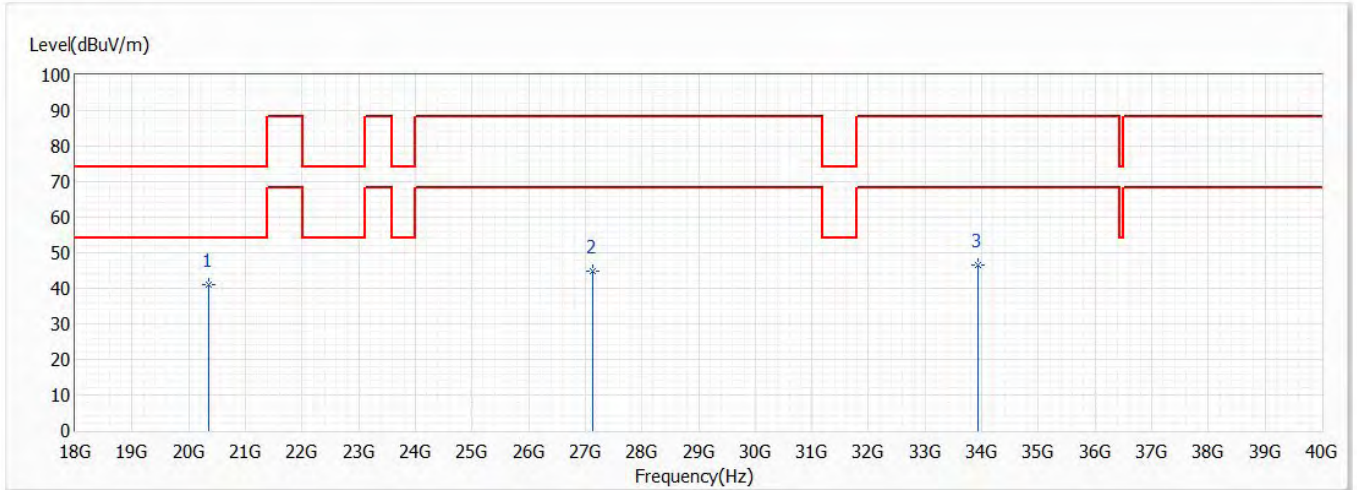


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20355.000	41.01	74.00	-32.99	48.67	-7.66	PK
2	27140.000	44.88	88.20	-43.32	46.40	-1.52	PK
3	33925.000	46.52	88.20	-41.68	46.09	0.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/25
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch183,6.865G,BW80M	Humidity (%RH)	58.0

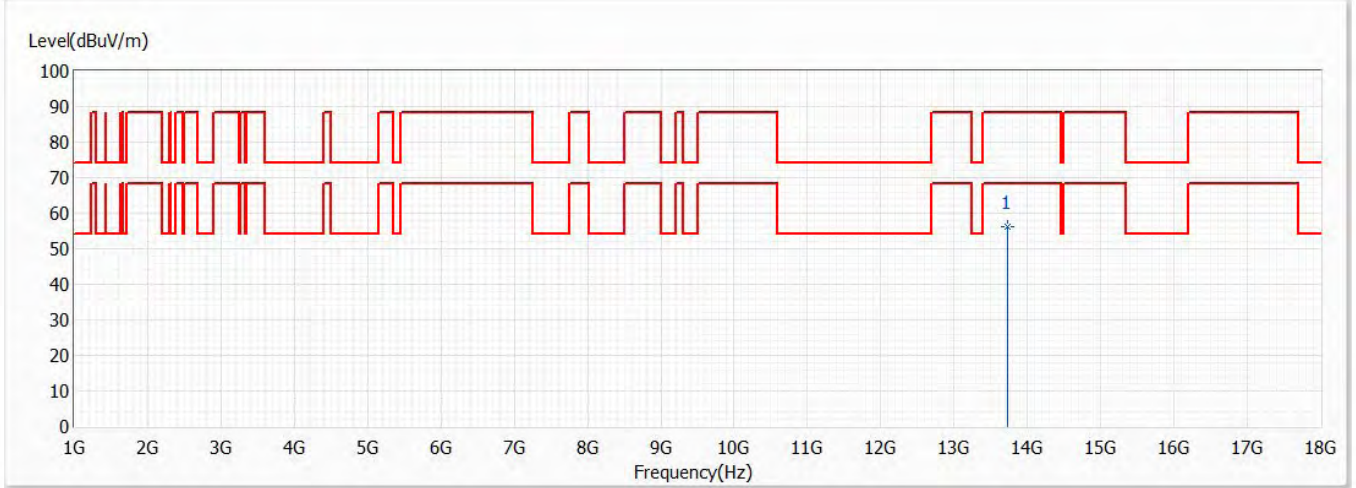


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13730.000	56.35	88.20	-31.85	41.42	14.93	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch183,6.865G,BW80M	Humidity (%RH)	58.0

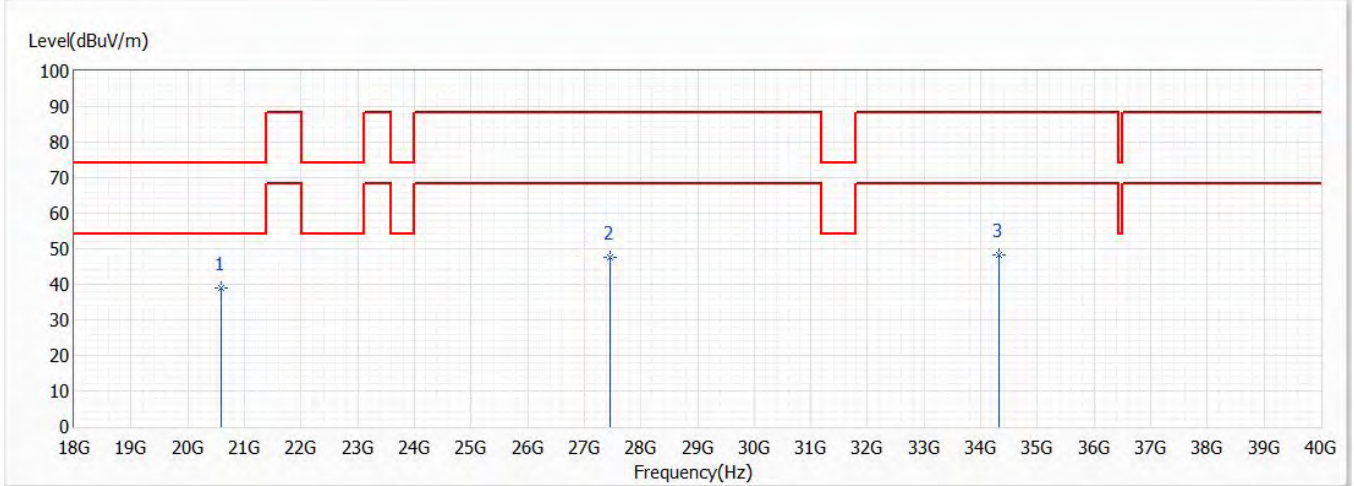


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20595.000	38.90	74.00	-35.10	46.96	-8.06	PK
2	27460.000	47.49	88.20	-40.71	48.11	-0.62	PK
3	34325.000	48.22	88.20	-39.98	47.44	0.78	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/25
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch183,6.865G,BW80M	Humidity (%RH)	58.0

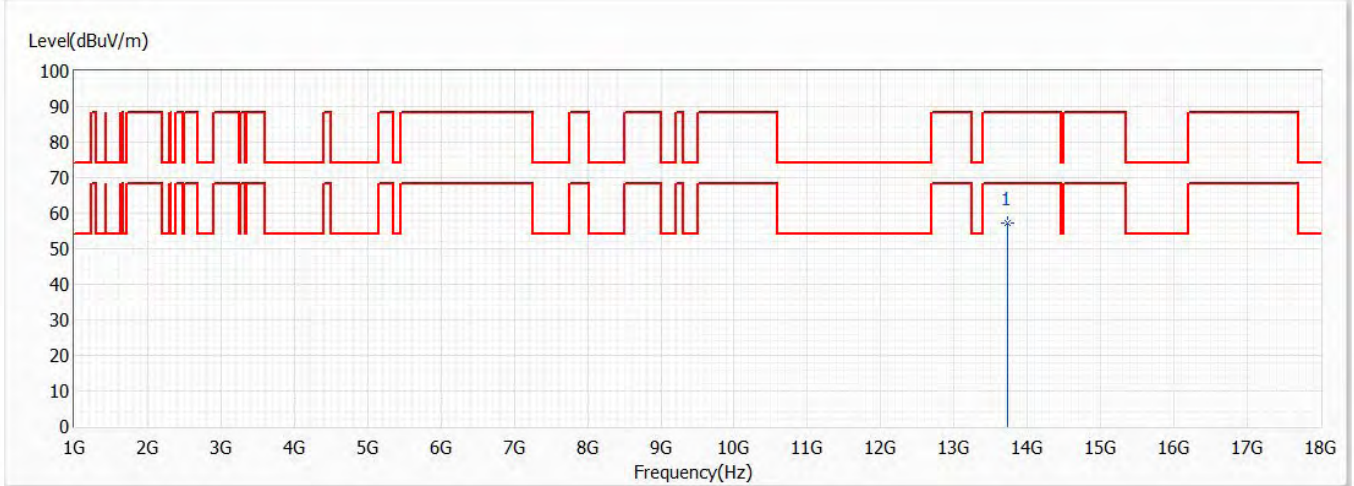


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13730.000	57.30	88.20	-30.90	42.37	14.93	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch183,6.865G,BW80M	Humidity (%RH)	58.0

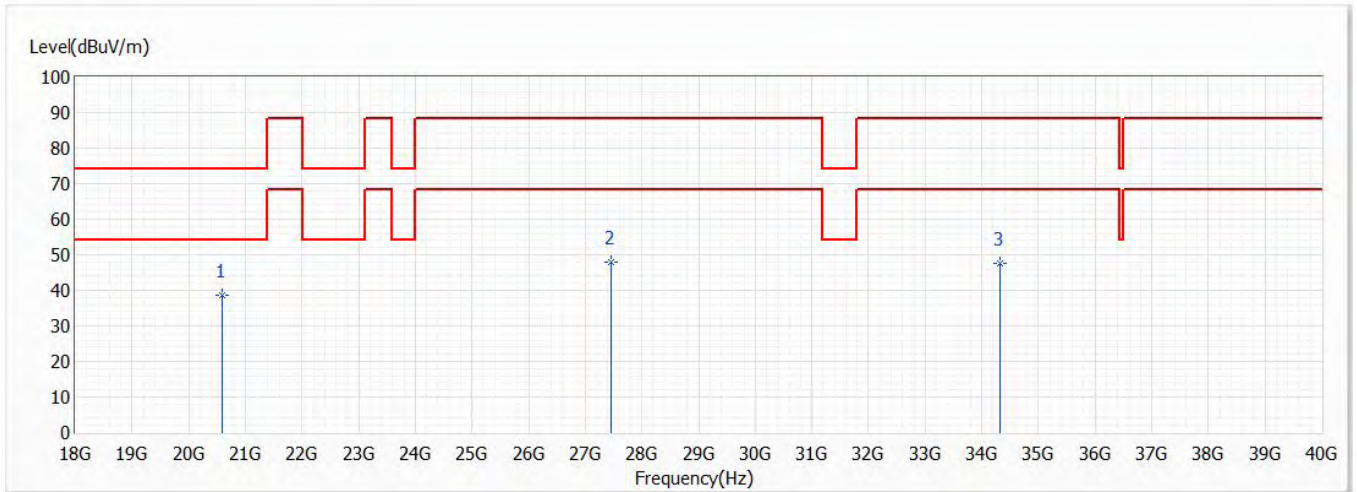


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20595.000	38.62	74.00	-35.38	46.68	-8.06	PK
2	27460.000	48.10	88.20	-40.10	48.72	-0.62	PK
3	34325.000	47.61	88.20	-40.59	46.83	0.78	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch143,6.665G,BW160M	Humidity (%RH)	58.0

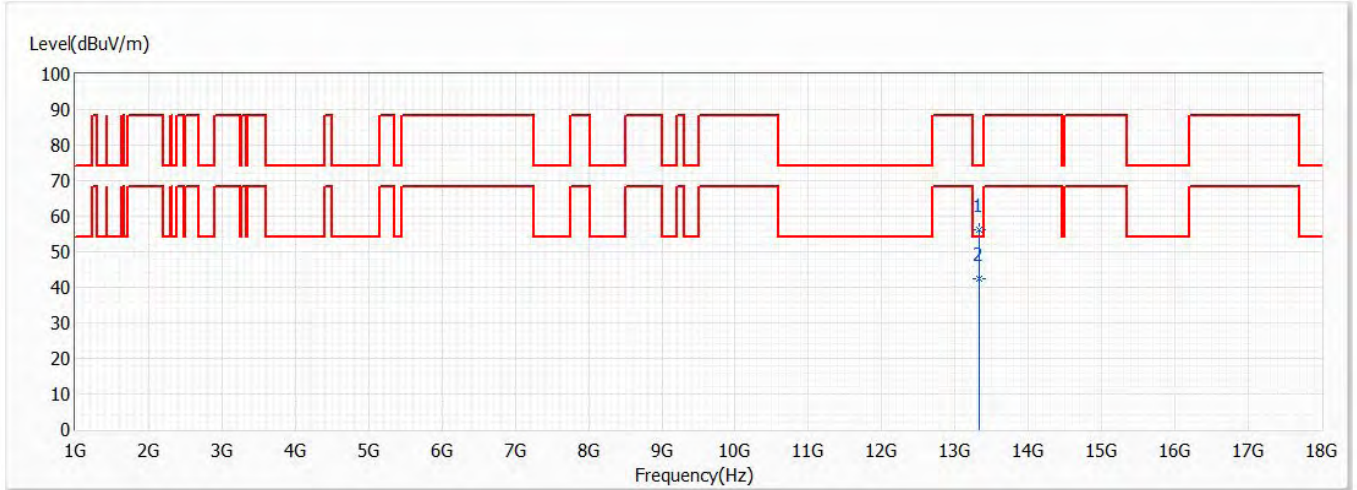


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	13330.000	56.09	74.00	-17.91	41.83	14.26	PK
* 2	13330.000	42.56	54.00	-11.44	28.30	14.26	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch143,6.665G,BW160M	Humidity (%RH)	58.0

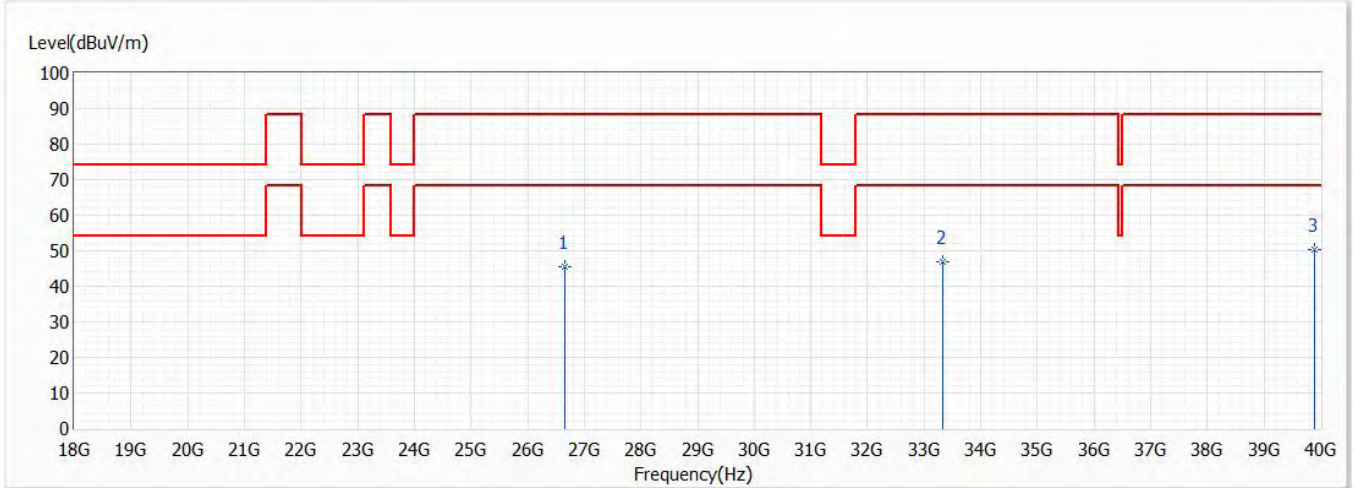


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	26660.000	45.49	88.20	-42.71	47.92	-2.43	PK
2	33325.000	47.02	88.20	-41.18	46.84	0.18	PK
* 3	39900.000	50.27	88.20	-37.93	44.19	6.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch143,6.665G,BW160M	Humidity (%RH)	58.0

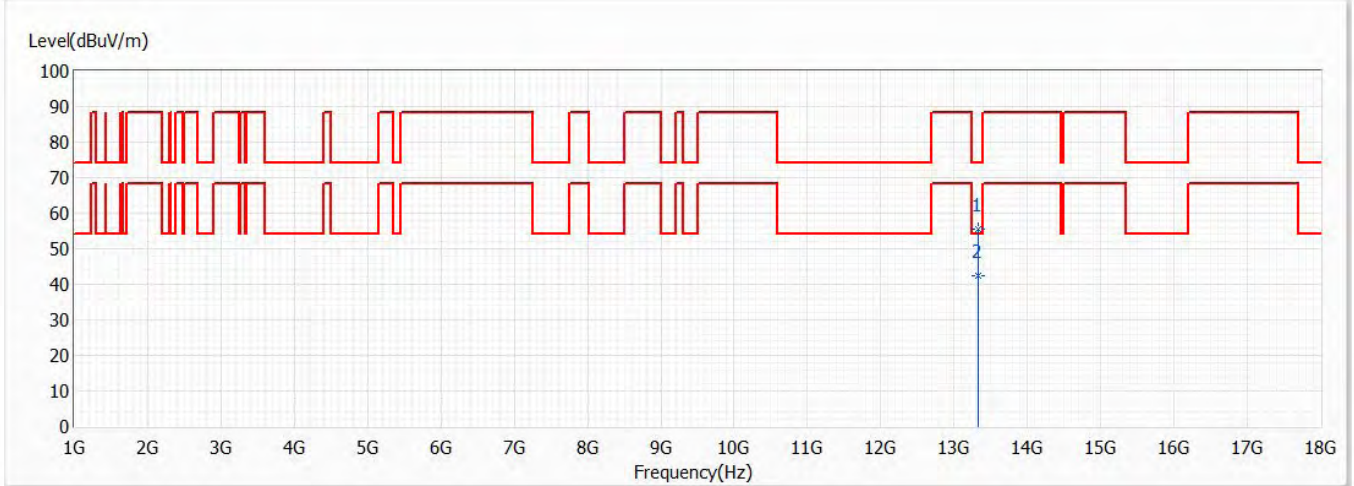


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	13330.000	55.51	74.00	-18.49	41.25	14.26	PK
* 2	13330.000	42.43	54.00	-11.57	28.17	14.26	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch143,6.665G,BW160M	Humidity (%RH)	58.0

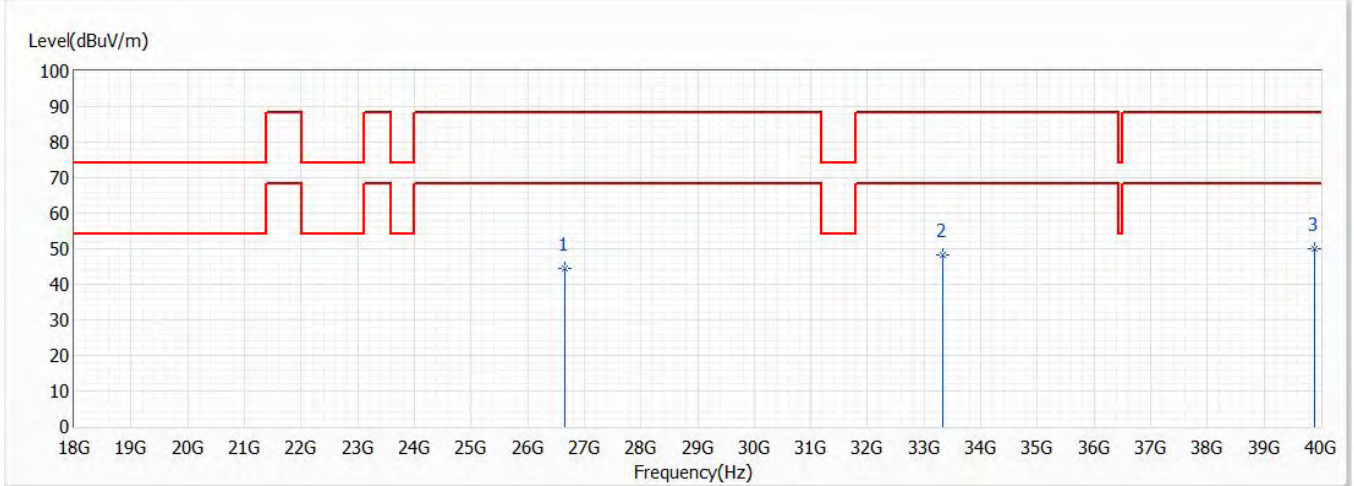


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	26660.000	44.61	88.20	-43.59	47.04	-2.43	PK
2	33325.000	48.24	88.20	-39.96	48.06	0.18	PK
* 3	39900.000	50.02	88.20	-38.18	43.94	6.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/25
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch175,6.825G,BW160M	Humidity (%RH)	58.0

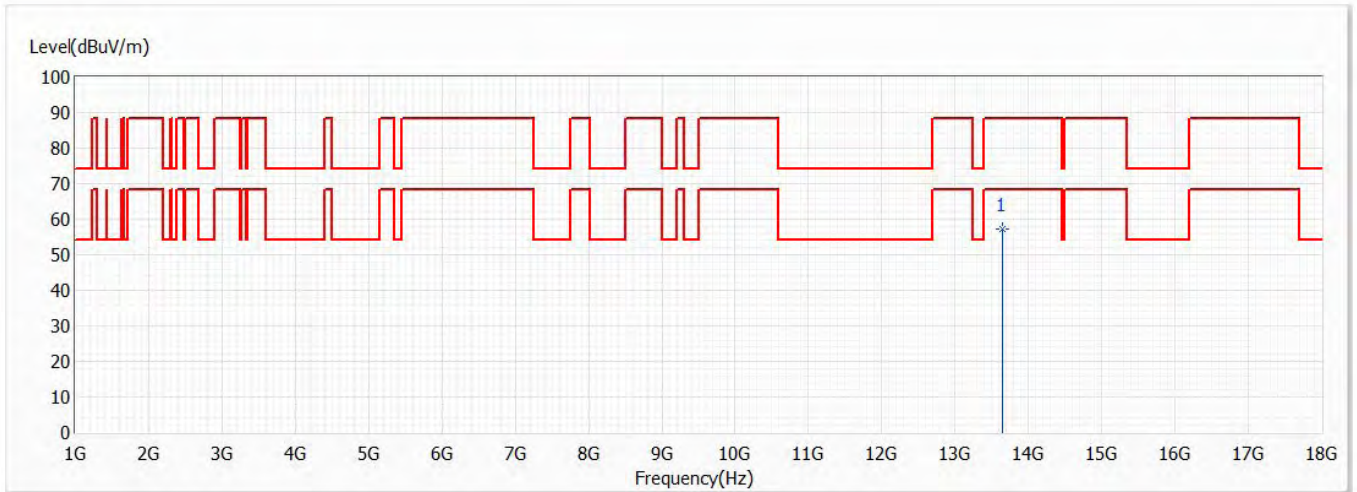


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13650.000	57.11	88.20	-31.09	42.20	14.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch175,6.825G,BW160M	Humidity (%RH)	58.0

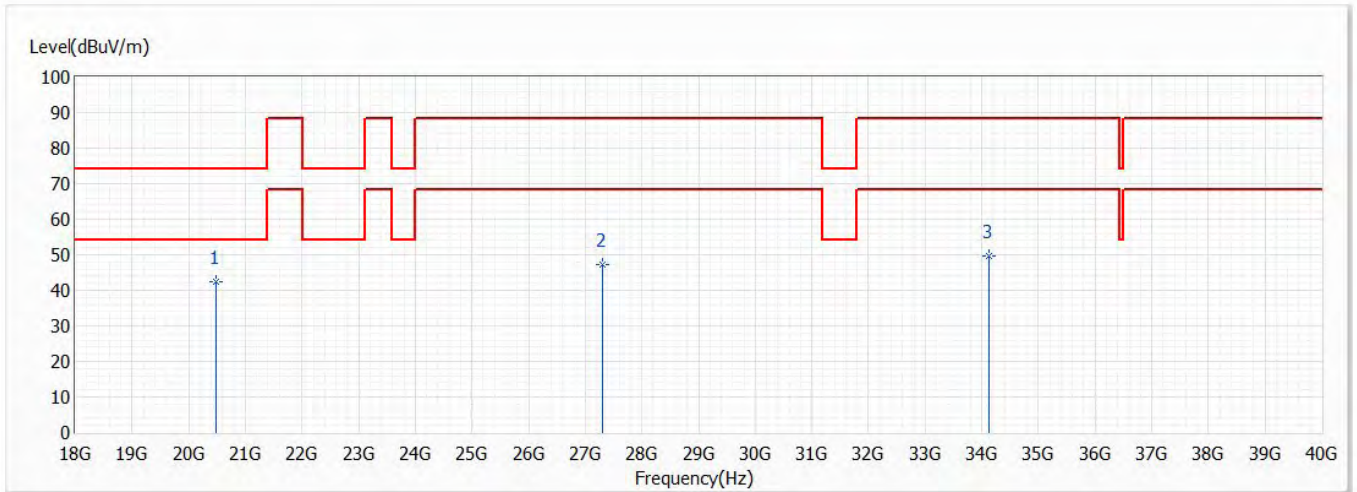


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20475.000	42.35	74.00	-31.65	50.43	-8.08	PK
2	27300.000	47.31	88.20	-40.89	48.45	-1.14	PK
3	34125.000	49.68	88.20	-38.52	49.09	0.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/5/25
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch175,6.825G,BW160M	Humidity (%RH)	58.0

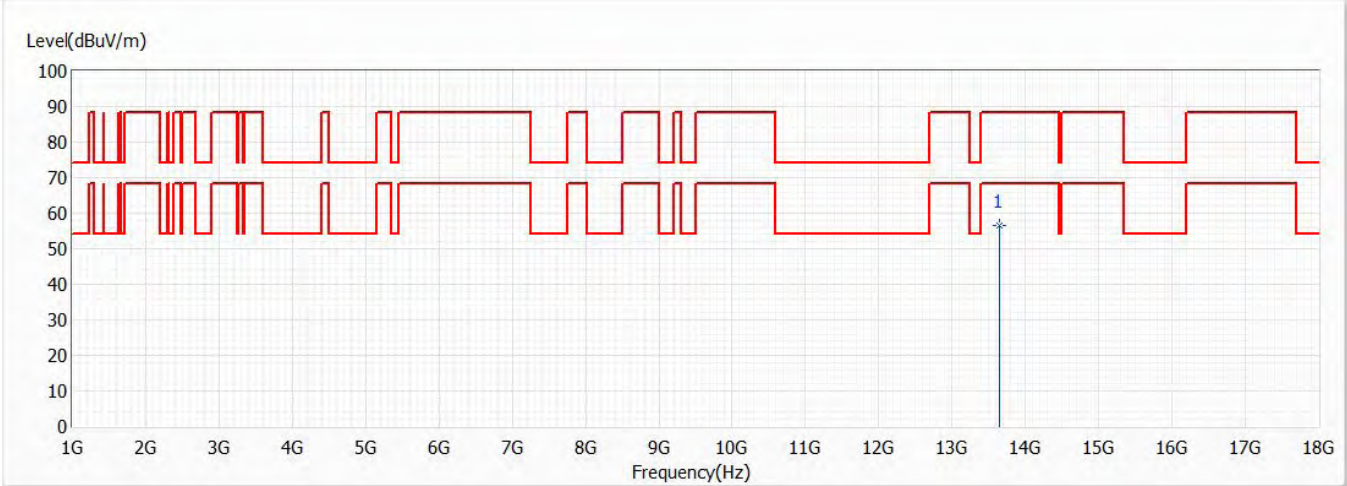


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13650.000	56.52	88.20	-31.68	41.61	14.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch175,6.825G,BW160M	Humidity (%RH)	58.0

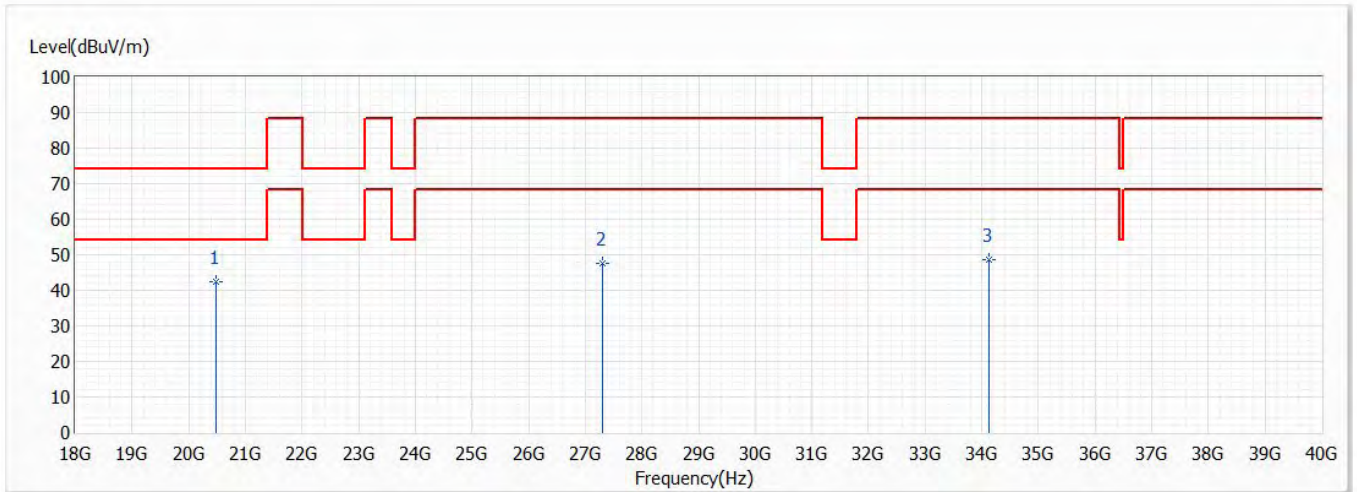


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20475.000	42.46	74.00	-31.54	50.54	-8.08	PK
2	27300.000	47.63	88.20	-40.57	48.77	-1.14	PK
3	34125.000	48.77	88.20	-39.43	48.18	0.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

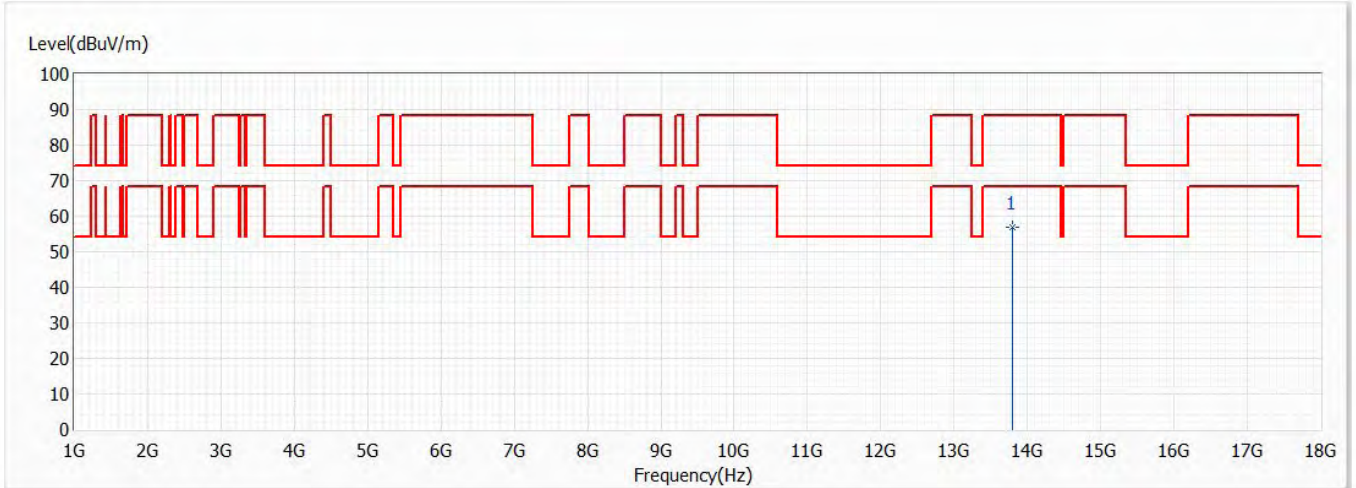


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13790.000	56.95	88.20	-31.25	42.19	14.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

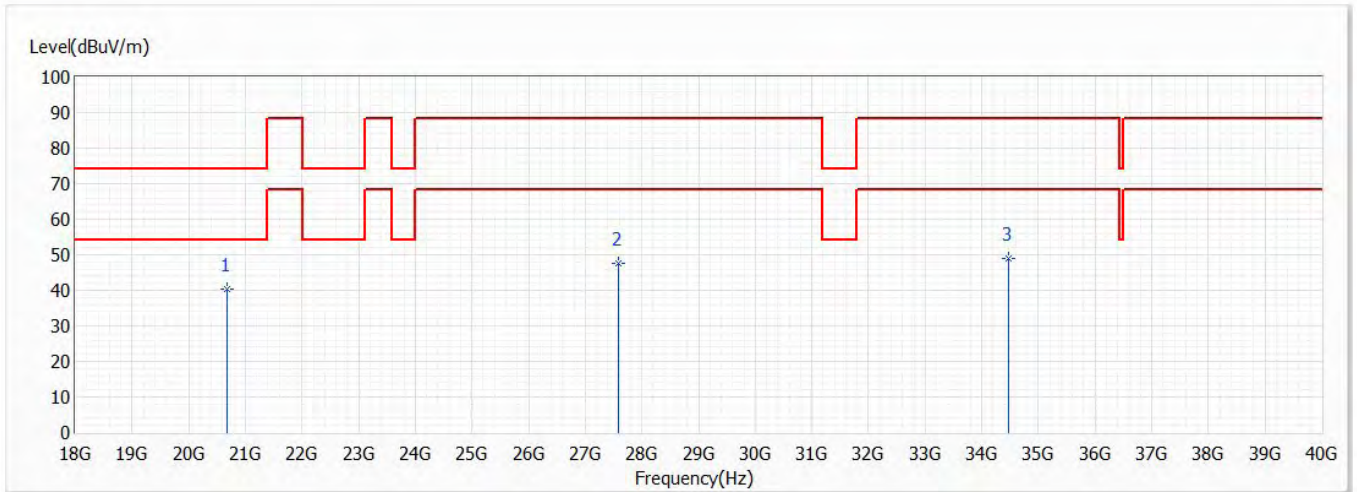


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20685.000	40.44	74.00	-33.56	48.42	-7.98	PK
2	27580.000	47.51	88.20	-40.69	48.08	-0.57	PK
3	34475.000	48.91	88.20	-39.29	48.04	0.87	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

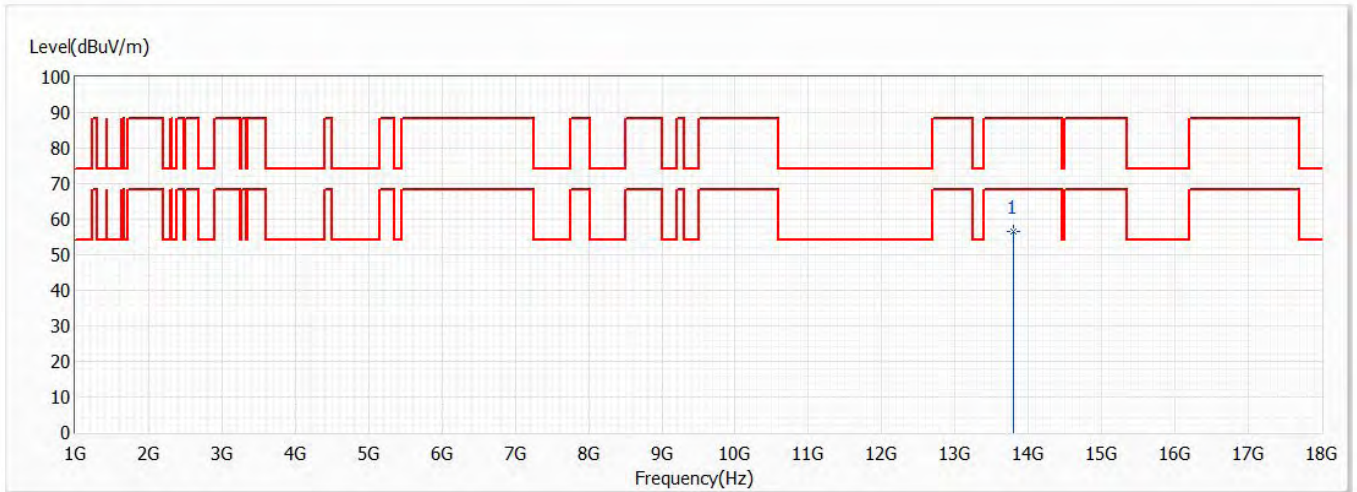


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13790.000	56.48	88.20	-31.72	41.72	14.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

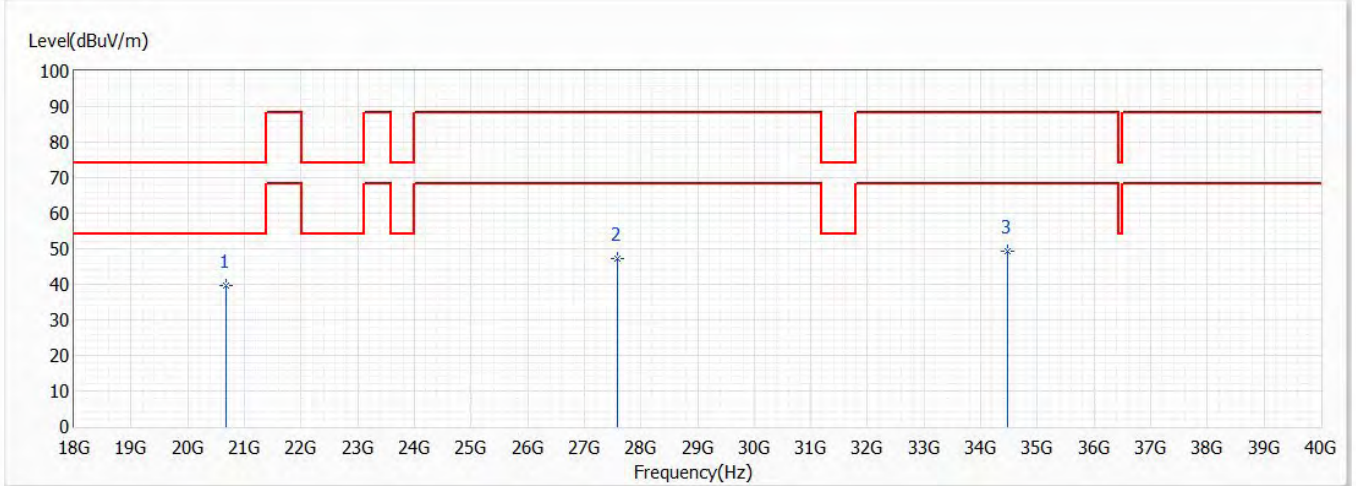


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20685.000	39.58	74.00	-34.42	47.56	-7.98	PK
2	27580.000	47.11	88.20	-41.09	47.68	-0.57	PK
3	34475.000	49.37	88.20	-38.83	48.50	0.87	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

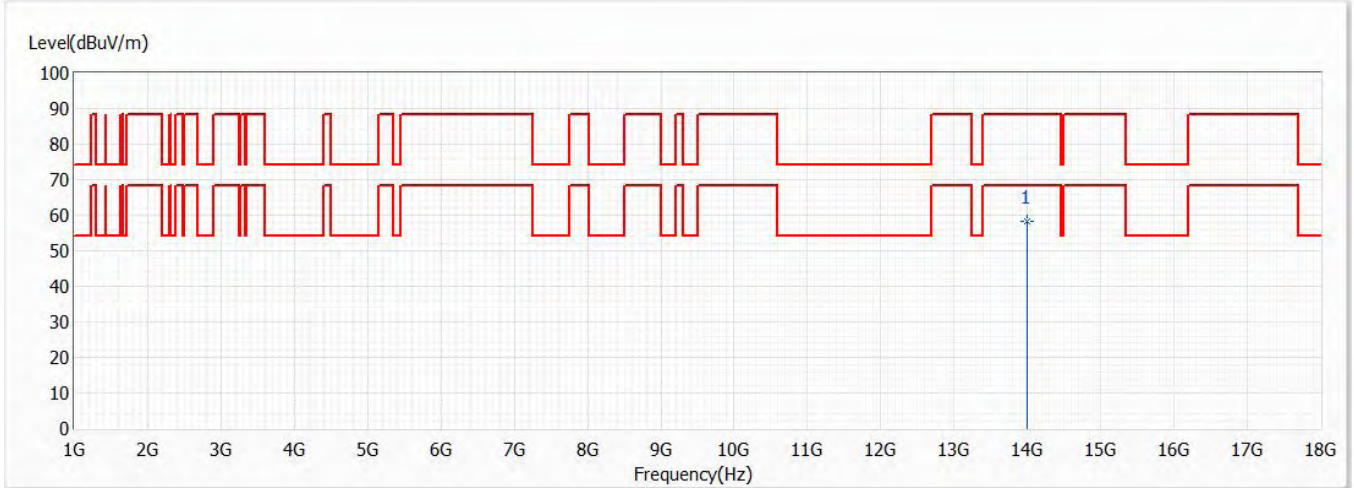


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13990.000	58.37	88.20	-29.83	42.81	15.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

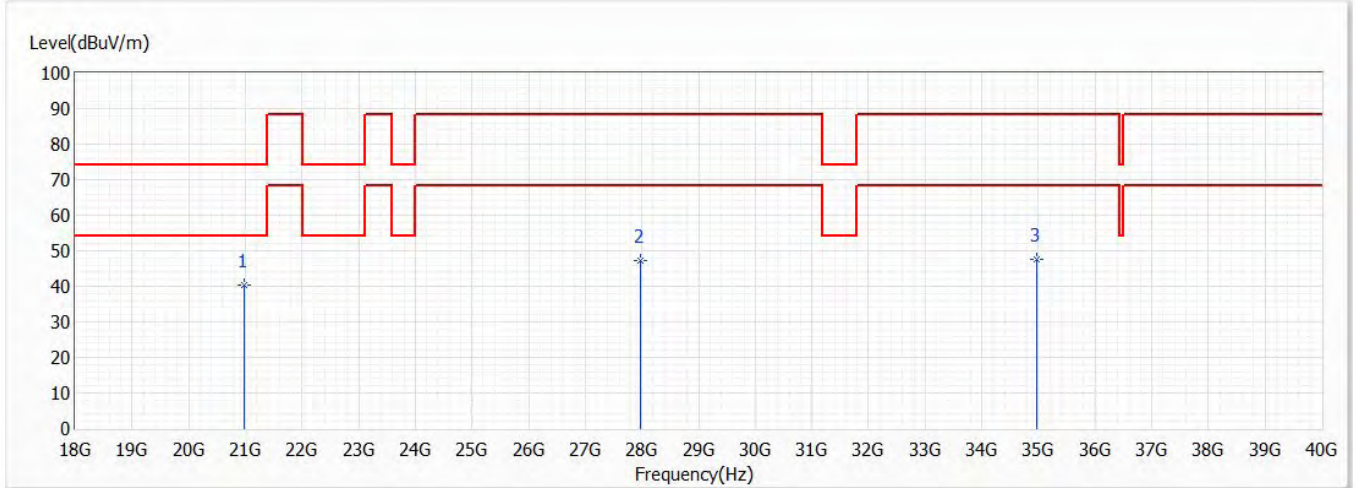


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20985.000	40.43	74.00	-33.57	48.21	-7.78	PK
2	27980.000	47.28	88.20	-40.92	48.30	-1.02	PK
3	34975.000	47.70	88.20	-40.50	47.64	0.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

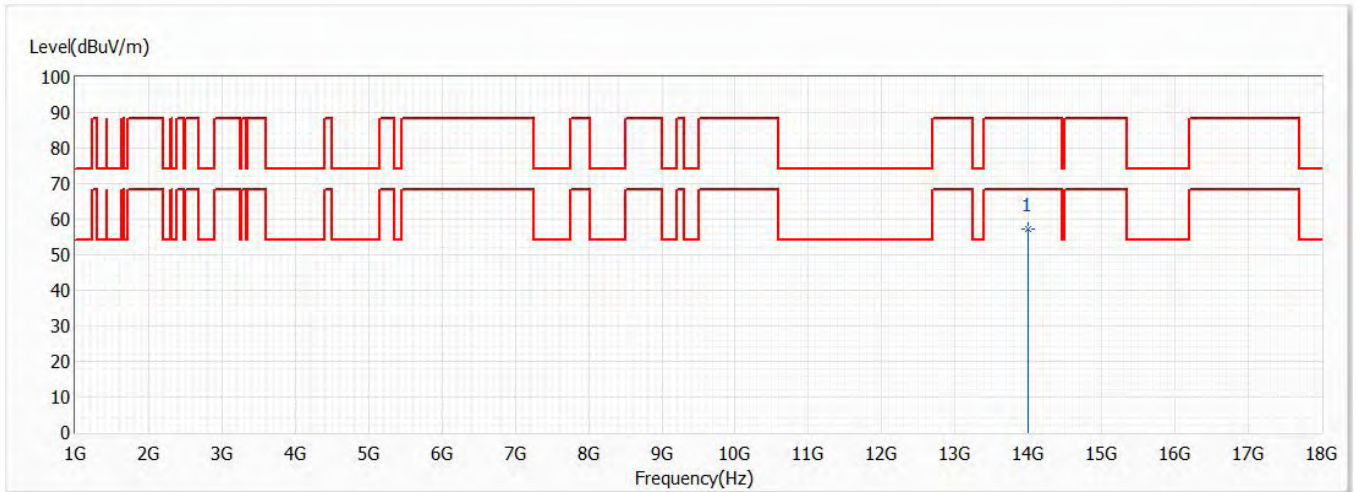


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13990.000	57.12	88.20	-31.08	41.56	15.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

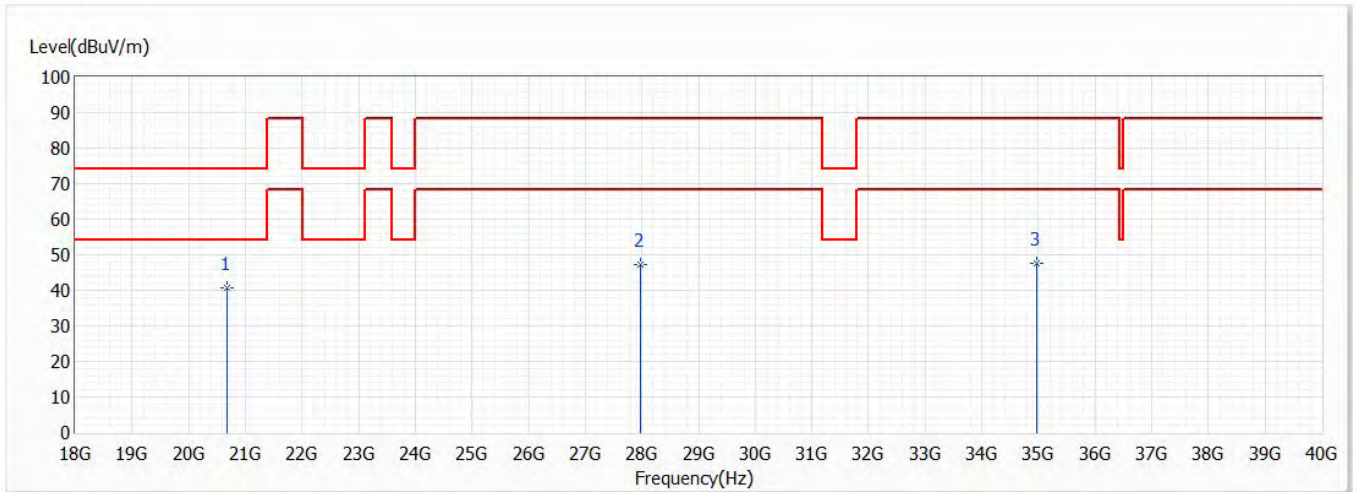


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20685.000	40.71	74.00	-33.29	48.69	-7.98	PK
2	27980.000	47.31	88.20	-40.89	48.33	-1.02	PK
3	34975.000	47.44	88.20	-40.76	47.38	0.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

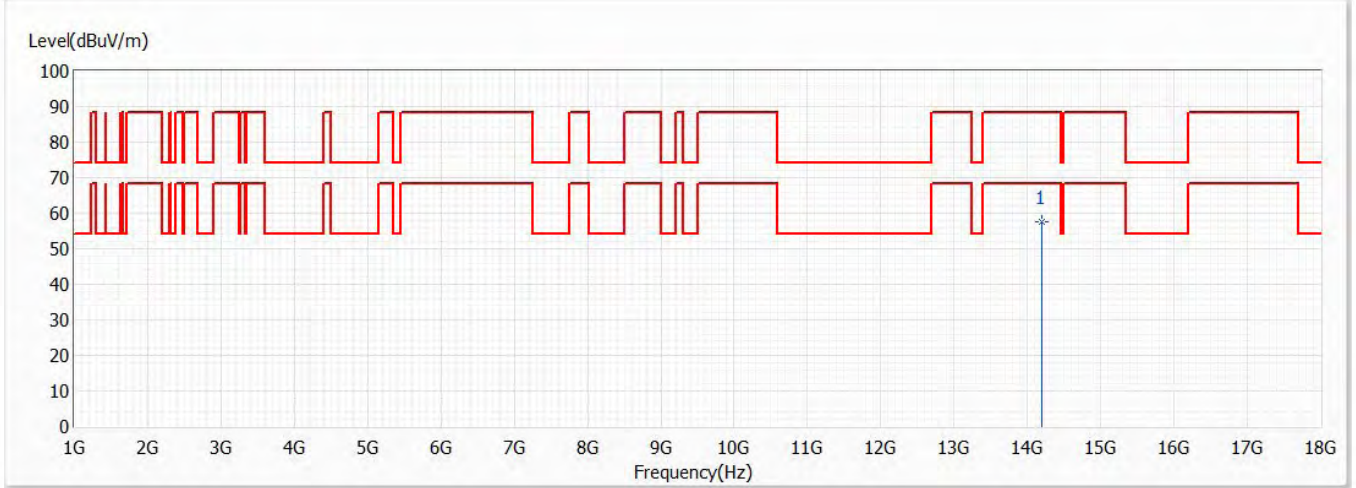


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14190.000	57.58	88.20	-30.62	41.63	15.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

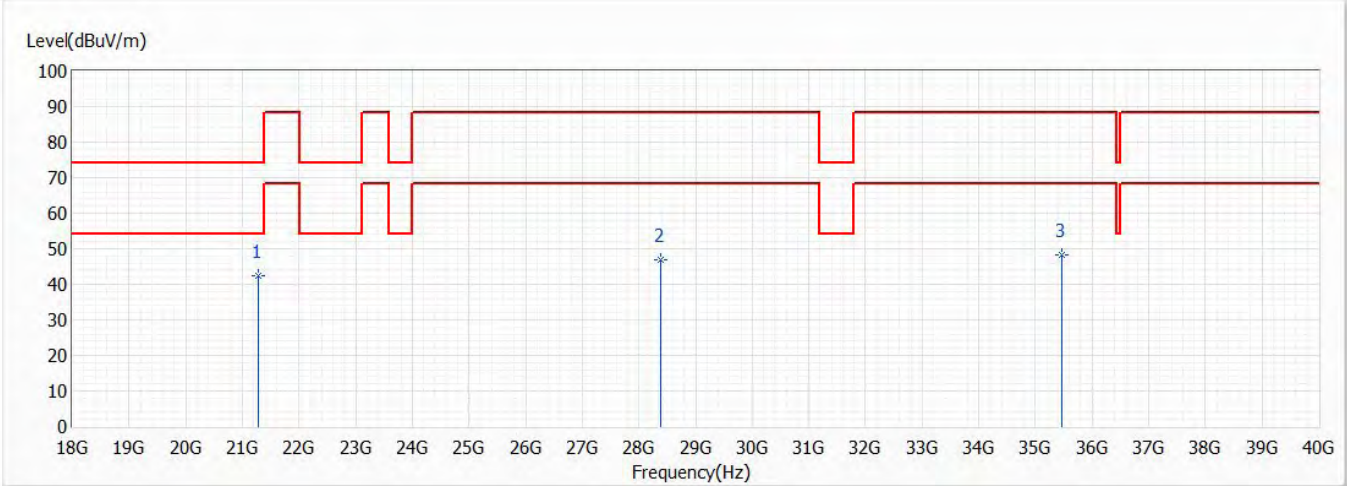


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21285.000	42.25	74.00	-31.75	49.79	-7.54	PK
2	28380.000	46.96	88.20	-41.24	47.59	-0.63	PK
3	35475.000	48.42	88.20	-39.78	49.25	-0.83	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

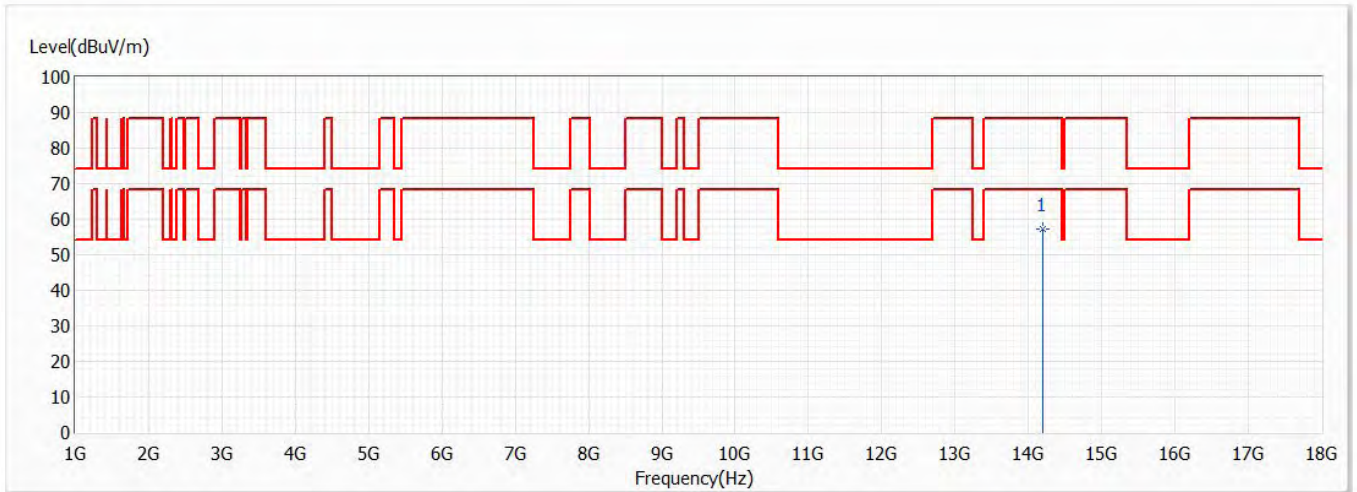


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14190.000	57.08	88.20	-31.12	41.13	15.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

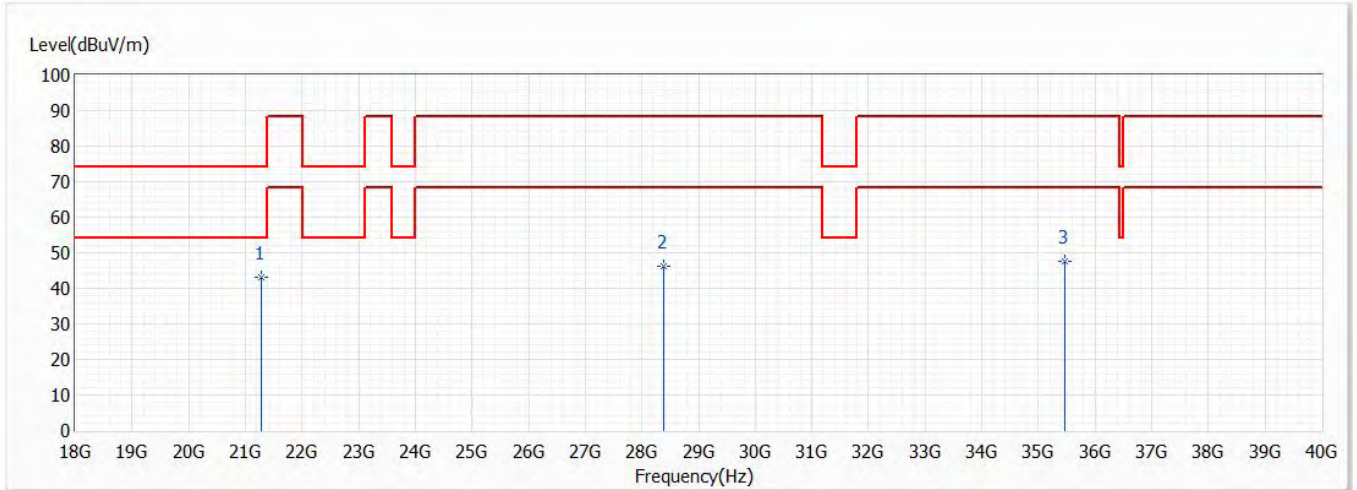


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21285.000	43.13	74.00	-30.87	50.67	-7.54	PK
2	28380.000	46.36	88.20	-41.84	46.99	-0.63	PK
3	35475.000	47.42	88.20	-40.78	48.25	-0.83	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

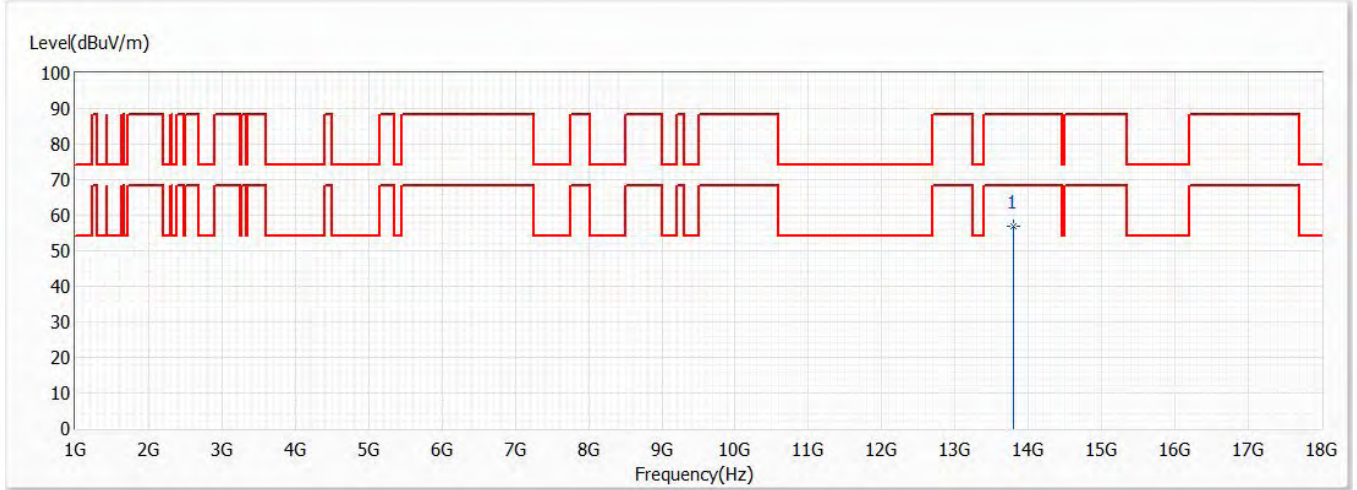


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13790.000	57.05	88.20	-31.15	42.29	14.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

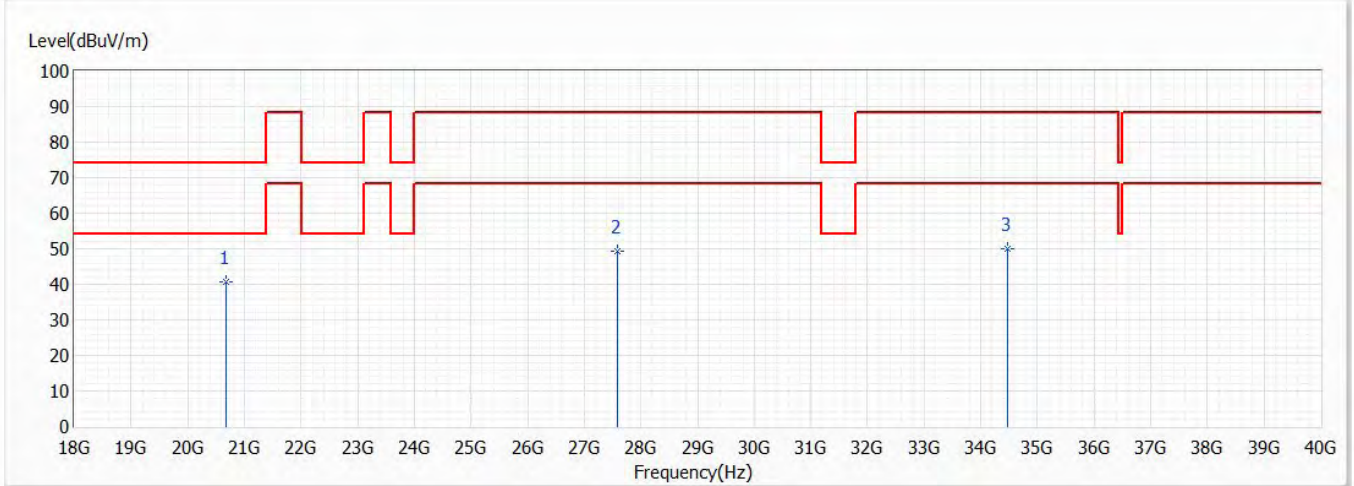


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20685.000	40.83	74.00	-33.17	48.81	-7.98	PK
2	27580.000	49.45	88.20	-38.75	50.02	-0.57	PK
3	34475.000	49.88	88.20	-38.32	49.01	0.87	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

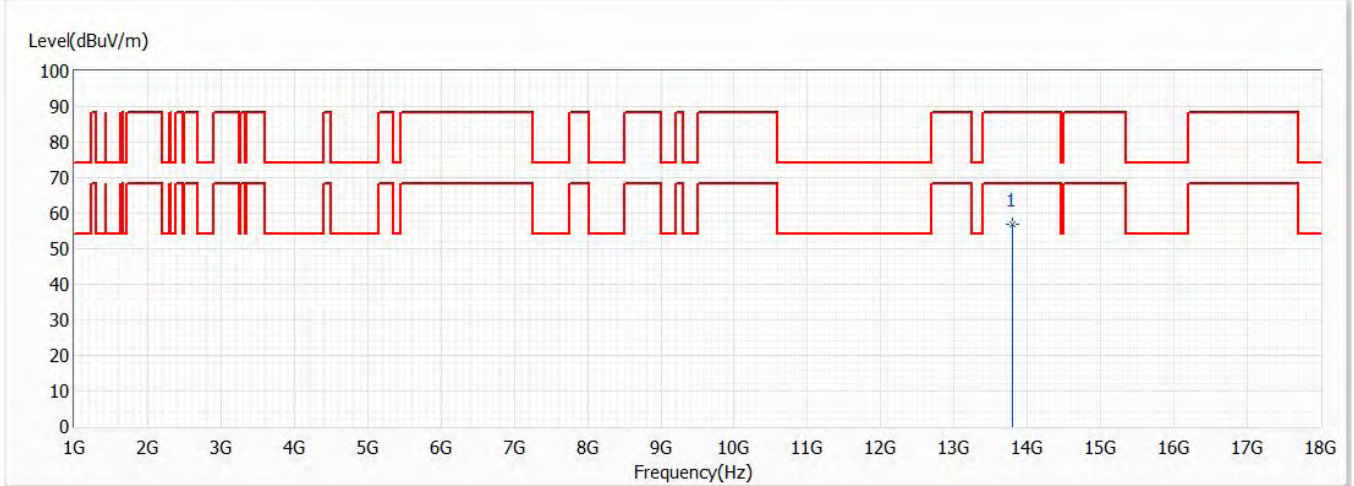


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13790.000	56.99	88.20	-31.21	42.23	14.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

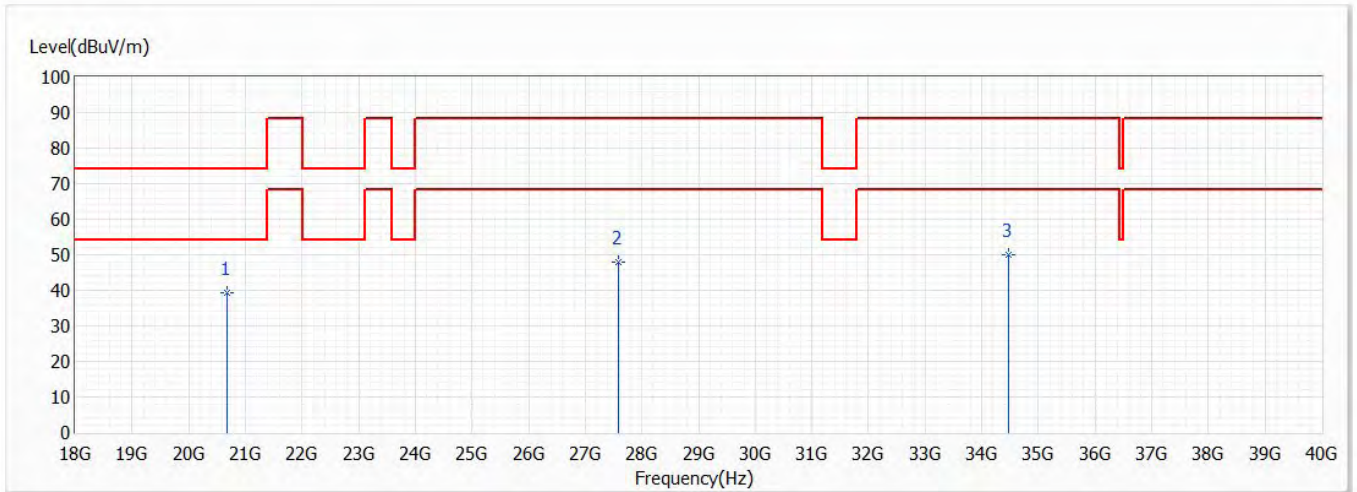


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20685.000	39.43	74.00	-34.57	47.41	-7.98	PK
2	27580.000	47.97	88.20	-40.23	48.54	-0.57	PK
3	34475.000	49.93	88.20	-38.27	49.06	0.87	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

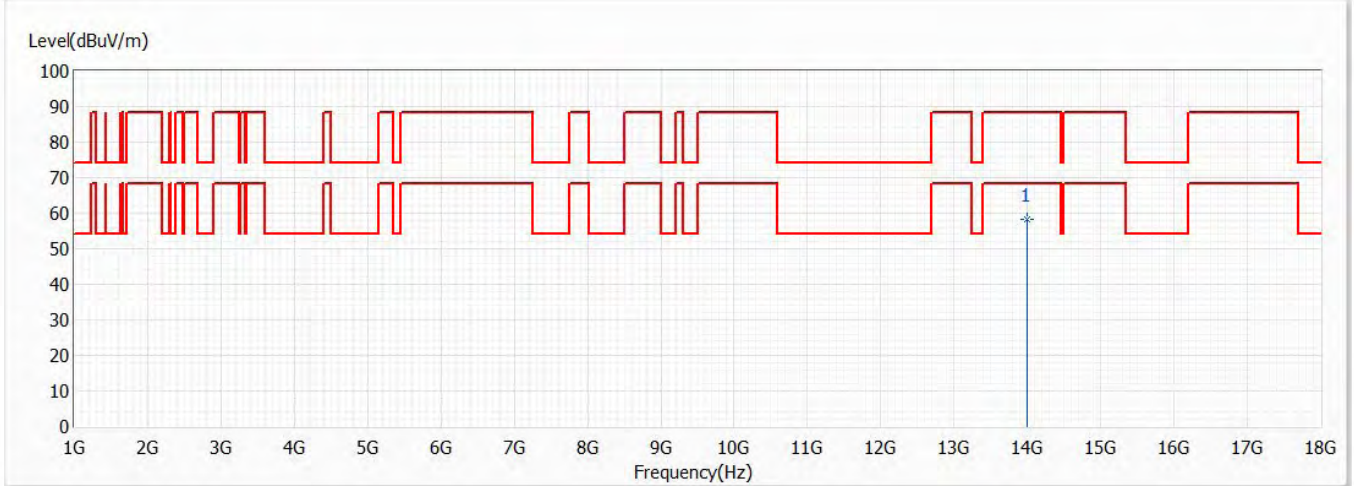


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13990.000	58.18	88.20	-30.02	42.62	15.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

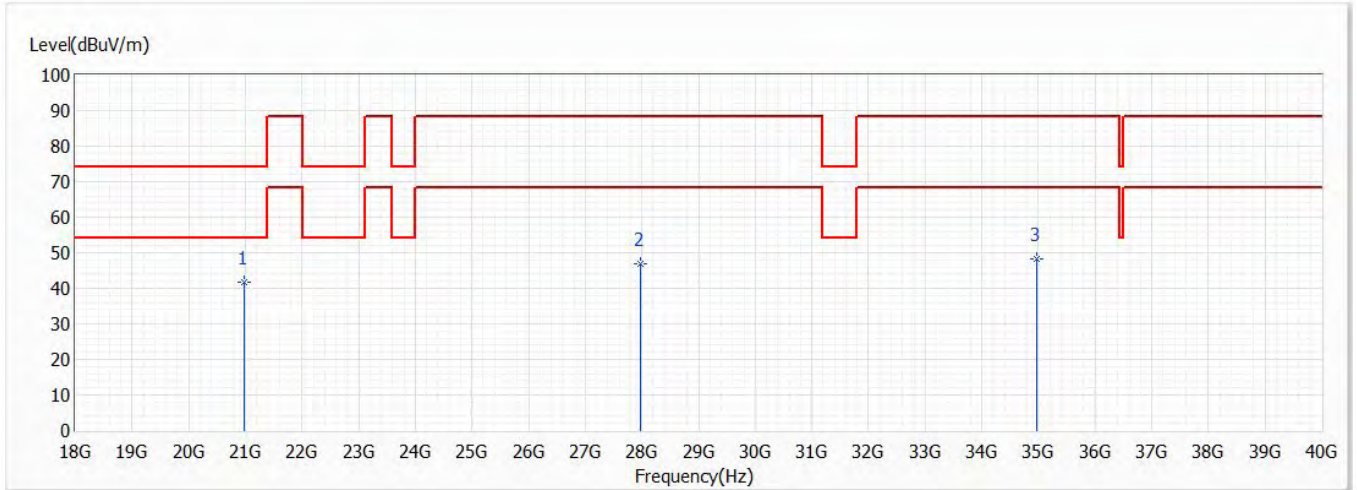


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20985.000	41.88	74.00	-32.12	49.66	-7.78	PK
2	27980.000	46.78	88.20	-41.42	47.80	-1.02	PK
3	34975.000	48.38	88.20	-39.82	48.32	0.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

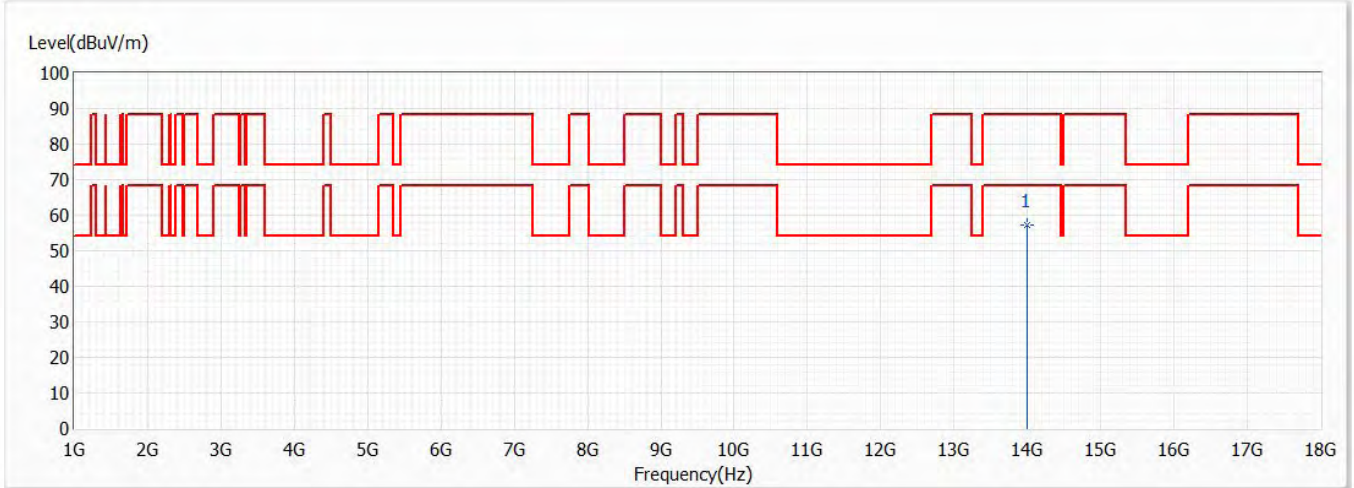


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13990.000	57.31	88.20	-30.89	41.75	15.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

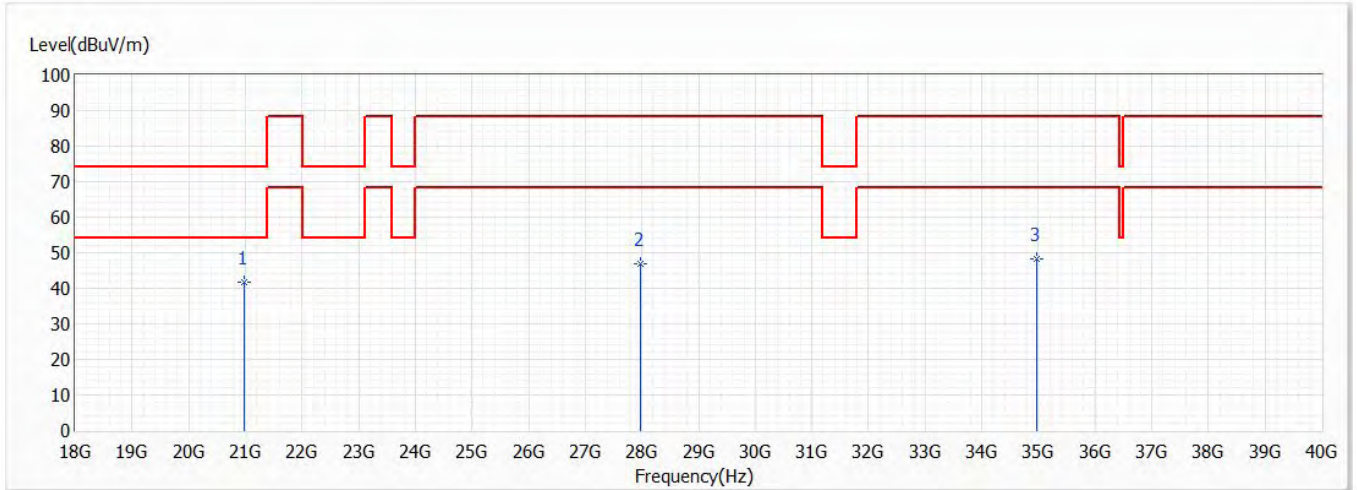


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20985.000	41.61	74.00	-32.39	49.39	-7.78	PK
2	27980.000	46.85	88.20	-41.35	47.87	-1.02	PK
3	34975.000	48.21	88.20	-39.99	48.15	0.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

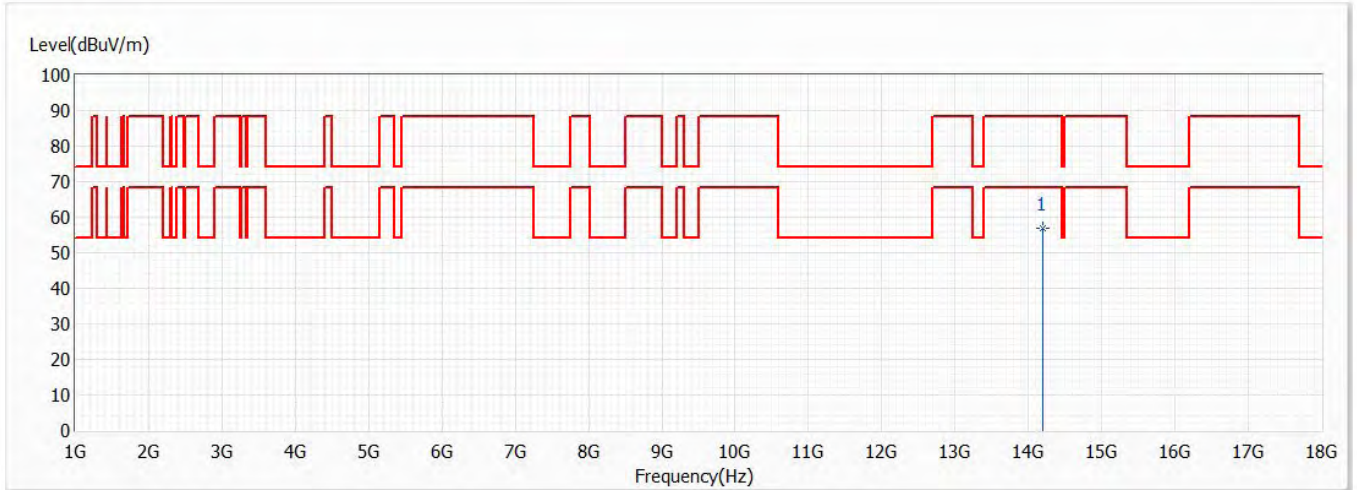


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14190.000	56.90	88.20	-31.30	40.95	15.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

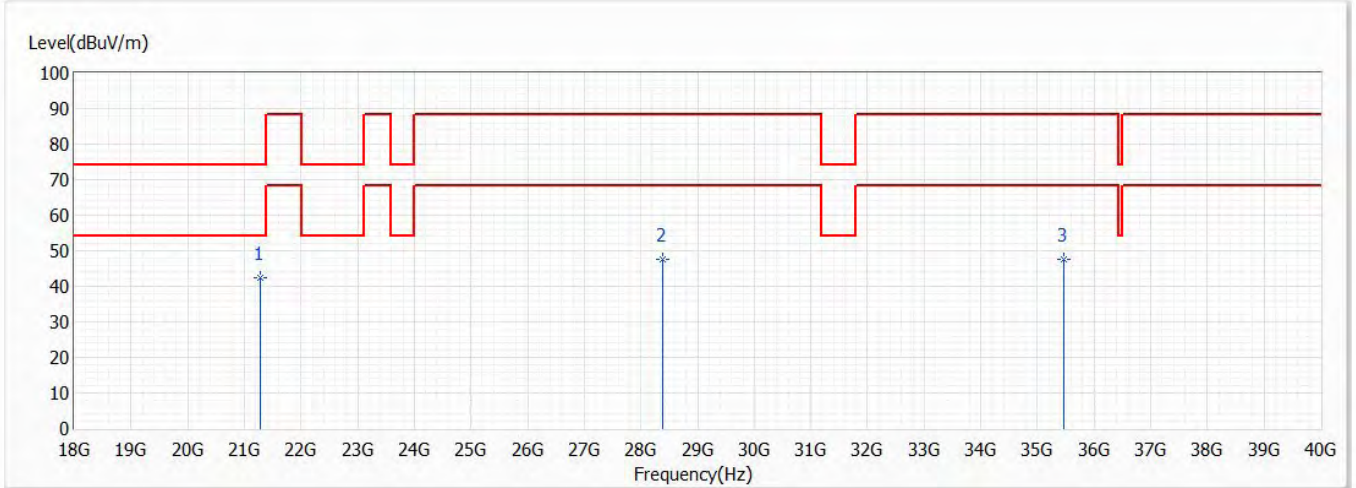


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21285.000	42.54	74.00	-31.46	50.08	-7.54	PK
2	28380.000	47.61	88.20	-40.59	48.24	-0.63	PK
3	35475.000	47.74	88.20	-40.46	48.57	-0.83	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

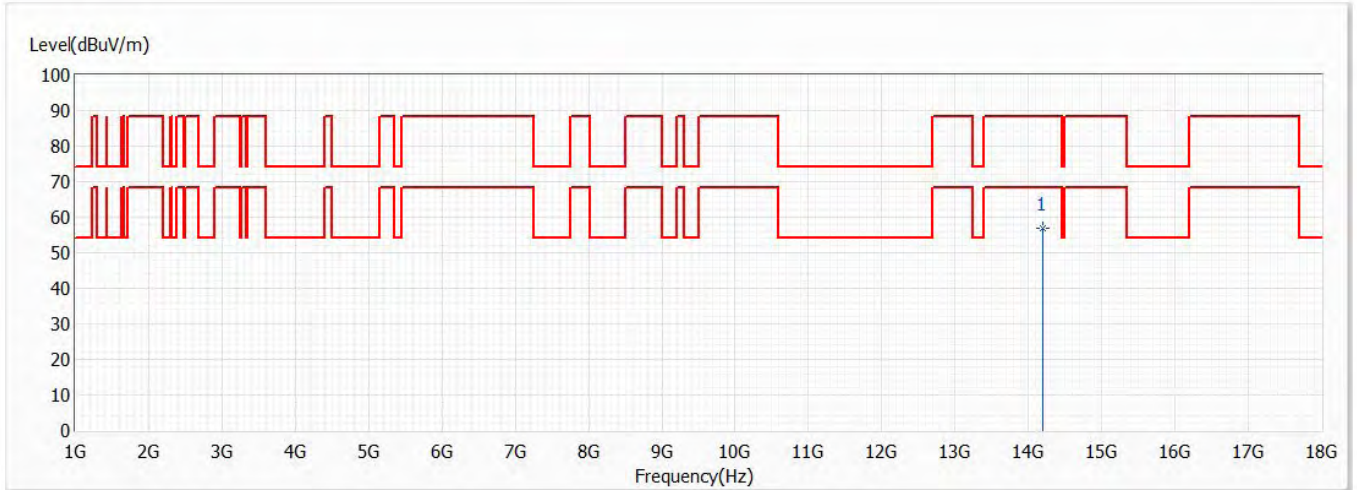


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14190.000	56.89	88.20	-31.31	40.94	15.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

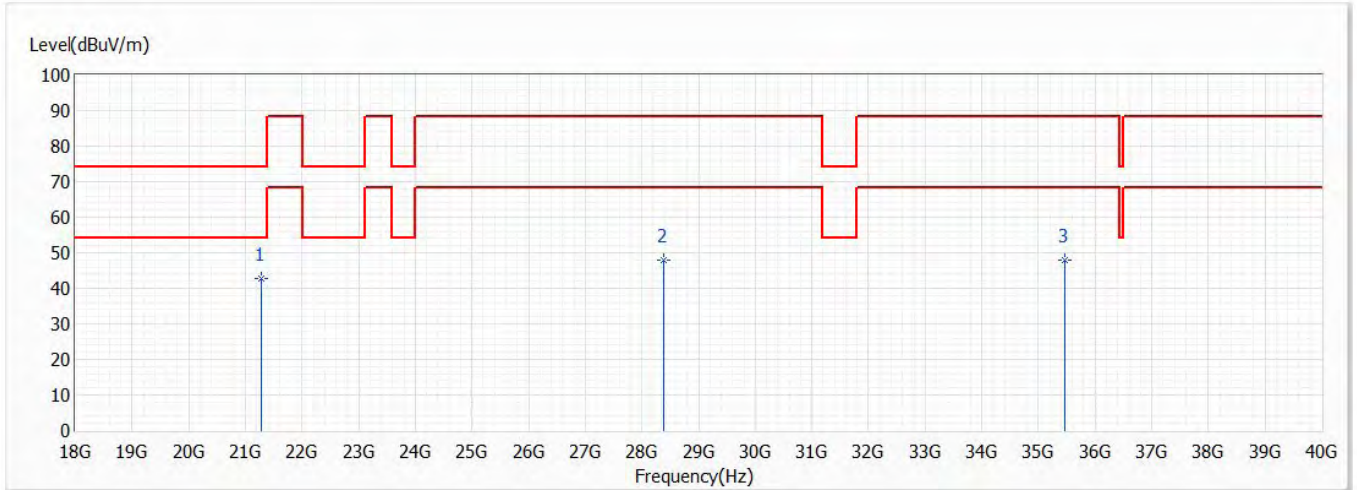


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21285.000	42.71	74.00	-31.29	50.25	-7.54	PK
2	28380.000	47.90	88.20	-40.30	48.53	-0.63	PK
3	35475.000	47.84	88.20	-40.36	48.67	-0.83	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0

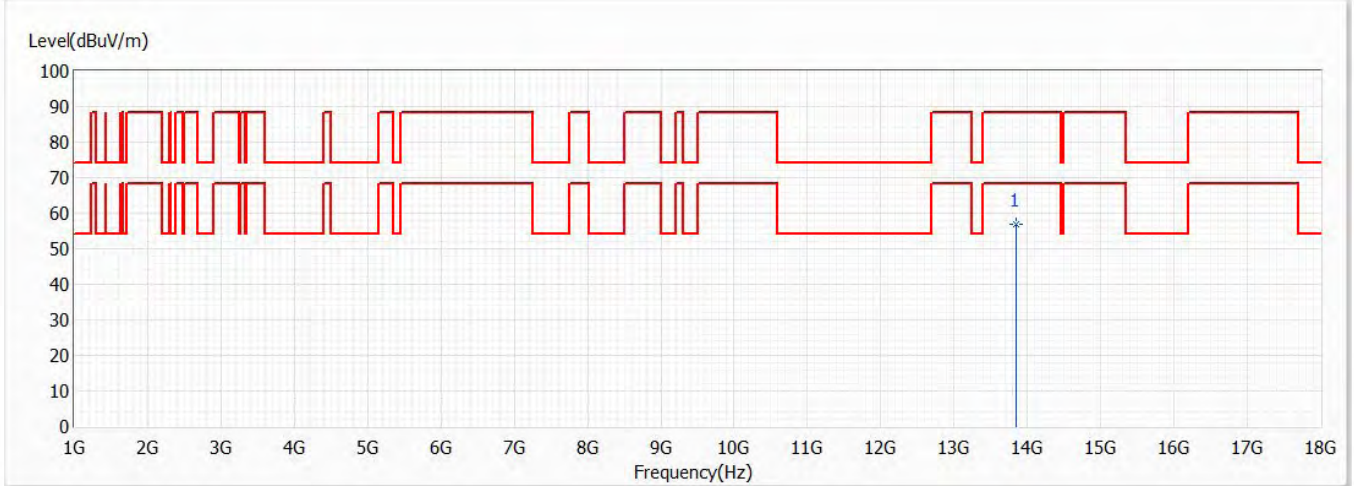


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13850.000	57.01	88.20	-31.19	42.01	15.00	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0

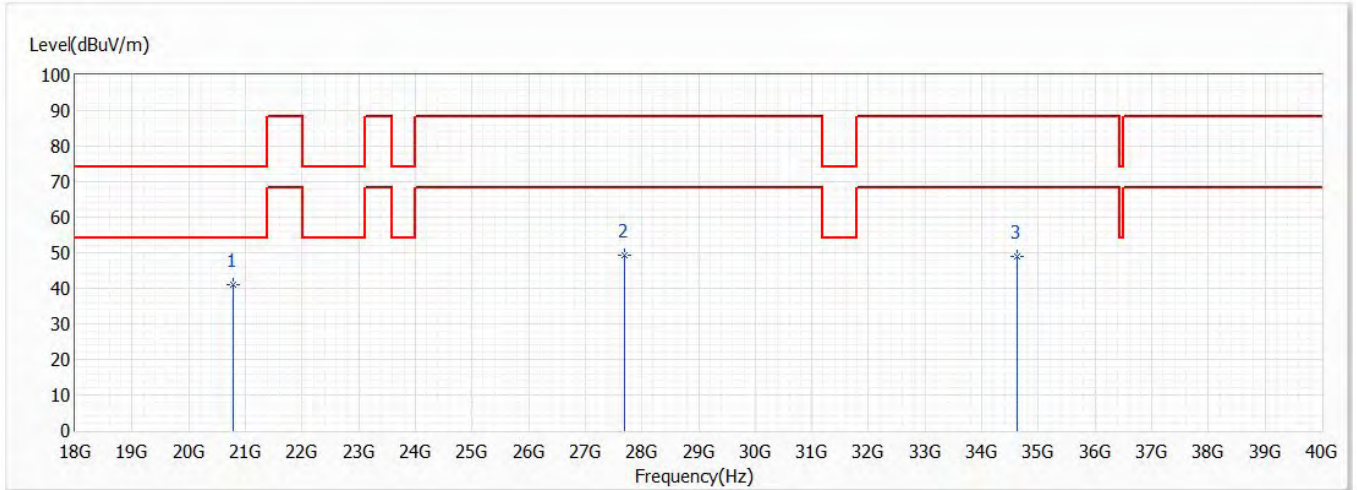


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20775.000	41.01	74.00	-32.99	48.91	-7.90	PK
2	27700.000	49.37	88.20	-38.83	50.08	-0.71	PK
3	34625.000	49.12	88.20	-39.08	48.31	0.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0

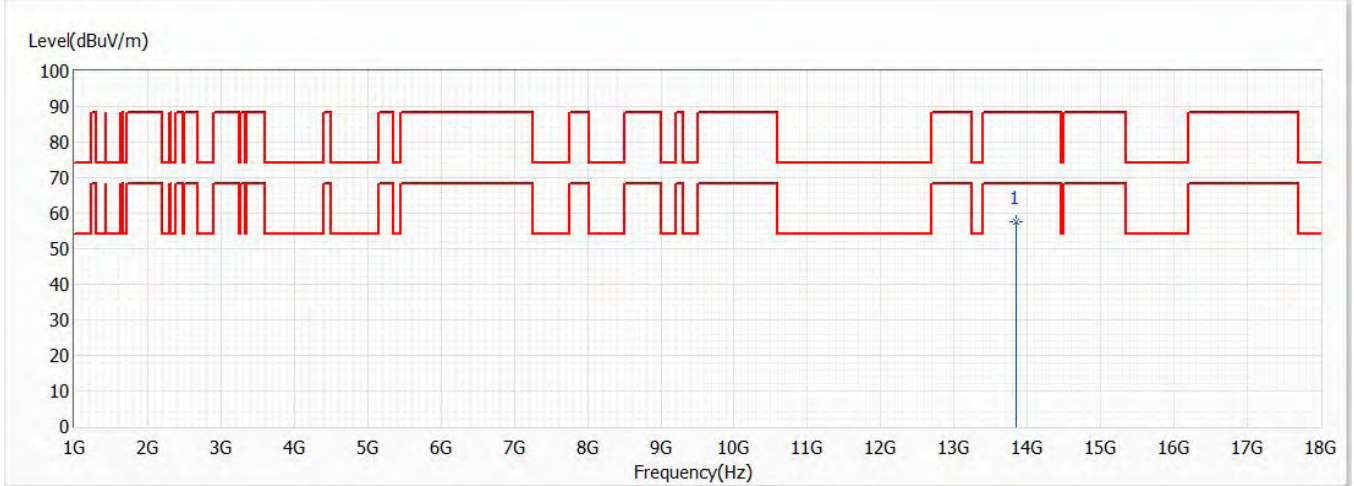


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13850.000	57.60	88.20	-30.60	42.60	15.00	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0

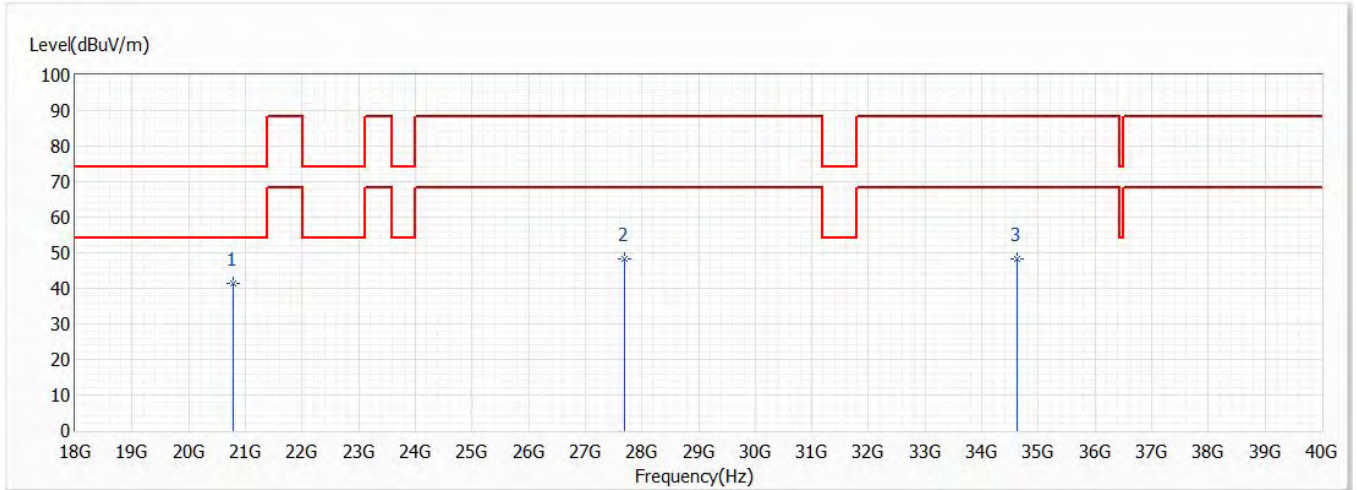


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20775.000	41.34	74.00	-32.66	49.24	-7.90	PK
2	27700.000	48.32	88.20	-39.88	49.03	-0.71	PK
3	34625.000	48.26	88.20	-39.94	47.45	0.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

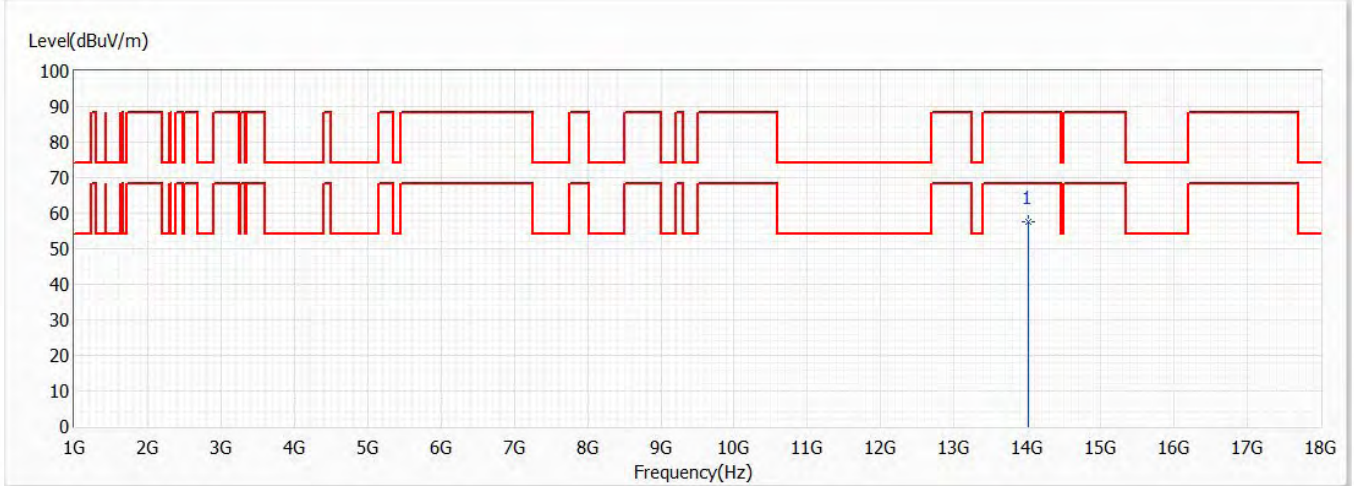


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14010.000	57.57	88.20	-30.63	41.95	15.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

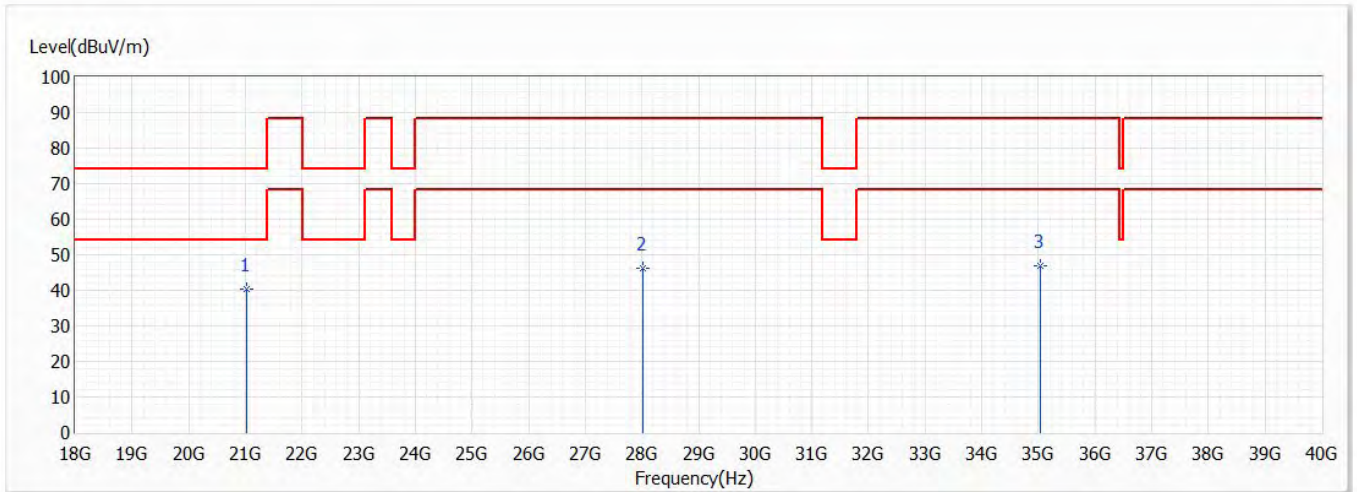


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21015.000	40.48	74.00	-33.52	48.24	-7.76	PK
2	28020.000	46.29	88.20	-41.91	47.32	-1.03	PK
3	35025.000	46.75	88.20	-41.45	46.81	-0.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

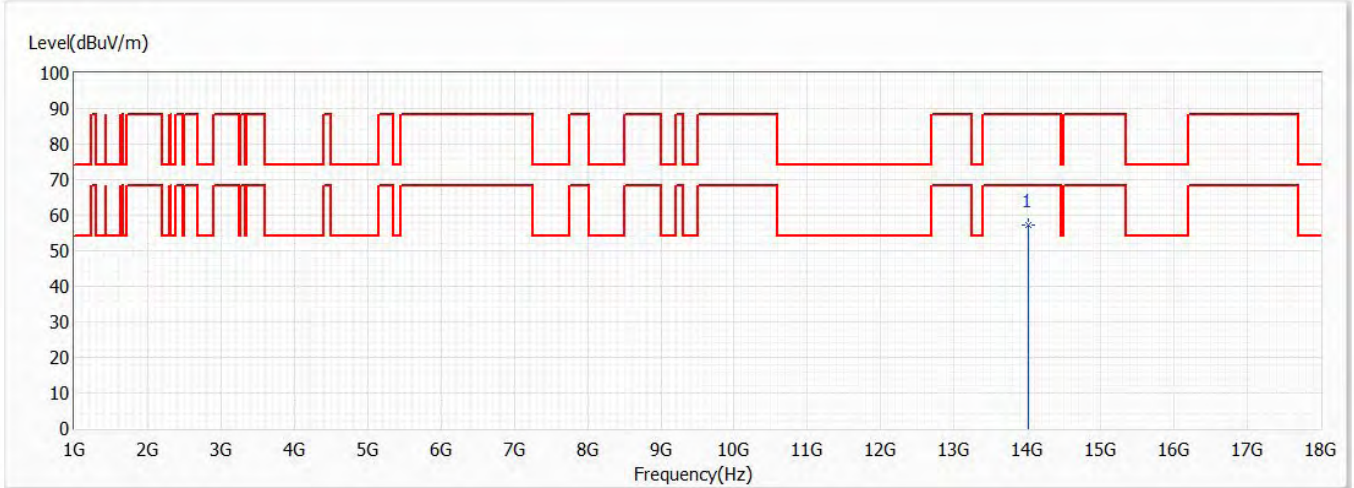


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14010.000	57.25	88.20	-30.95	41.63	15.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

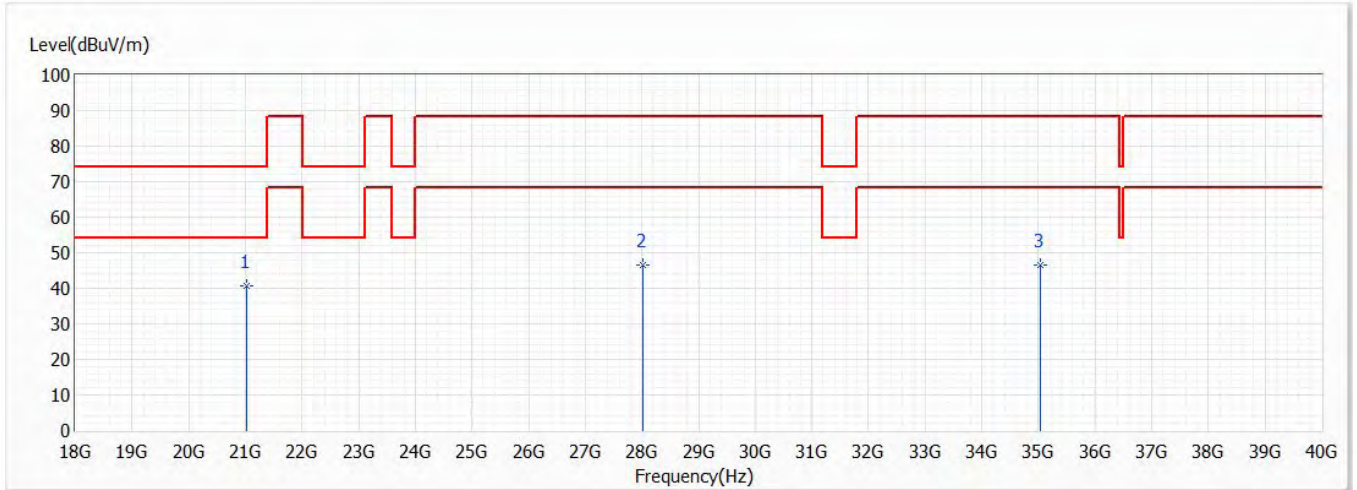


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21015.000	40.70	74.00	-33.30	48.46	-7.76	PK
2	28020.000	46.71	88.20	-41.49	47.74	-1.03	PK
3	35025.000	46.50	88.20	-41.70	46.56	-0.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

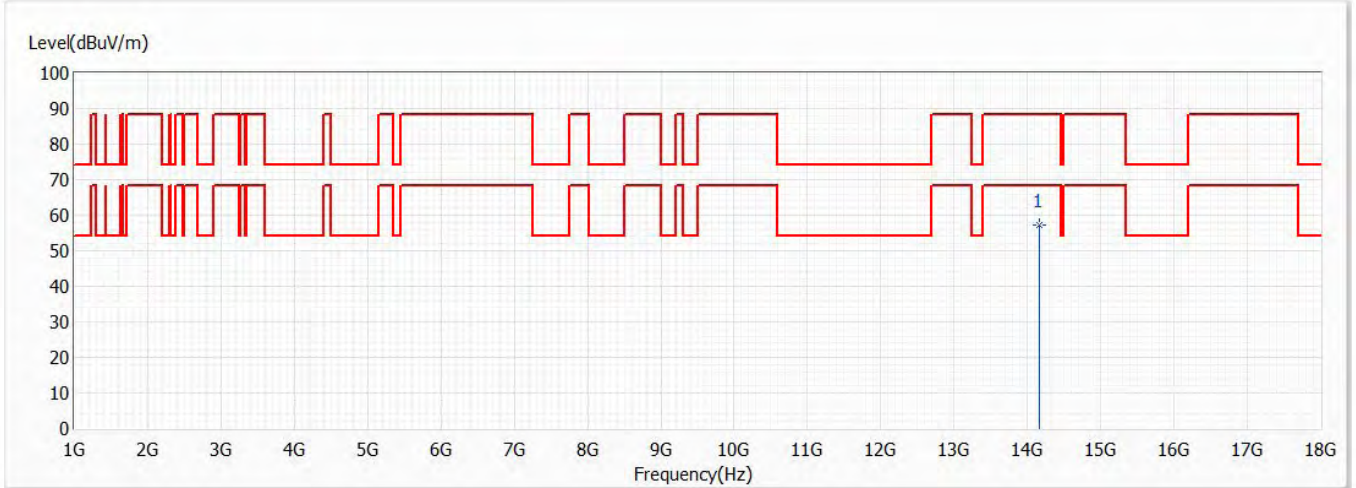


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14170.000	57.26	88.20	-30.94	41.33	15.93	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

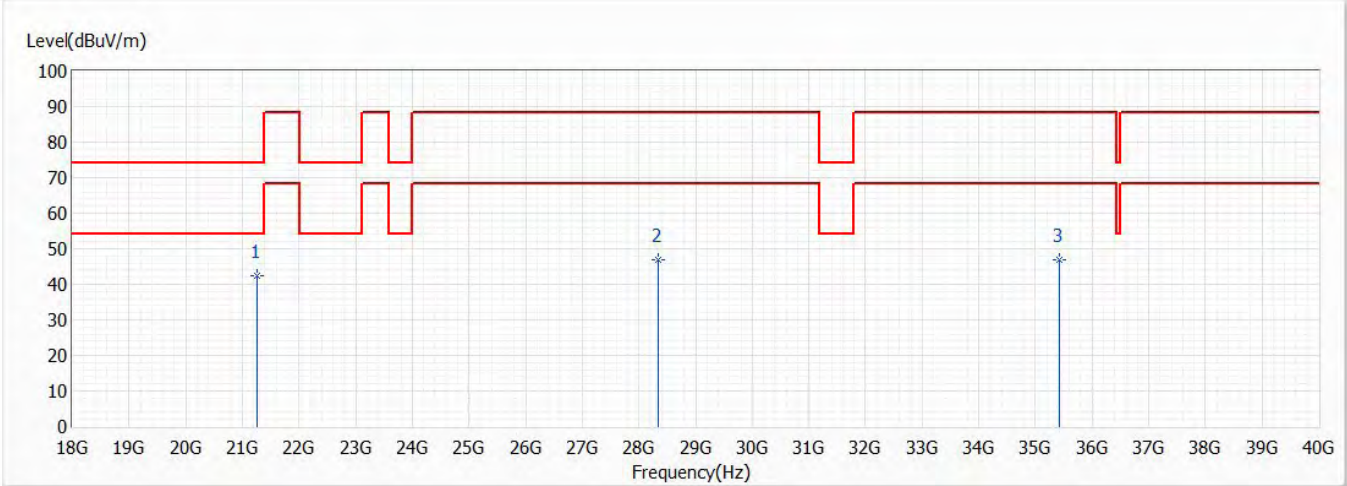


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21255.000	42.37	74.00	-31.63	49.95	-7.58	PK
2	28340.000	47.05	88.20	-41.15	47.73	-0.68	PK
3	35425.000	47.03	88.20	-41.17	47.77	-0.74	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

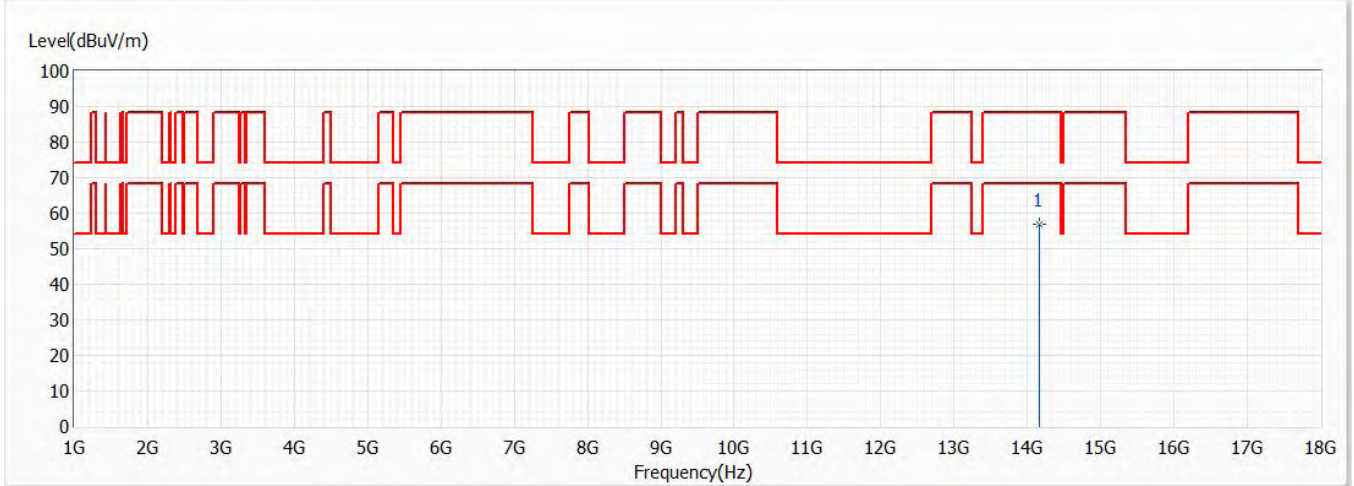


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14170.000	56.92	88.20	-31.28	40.99	15.93	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

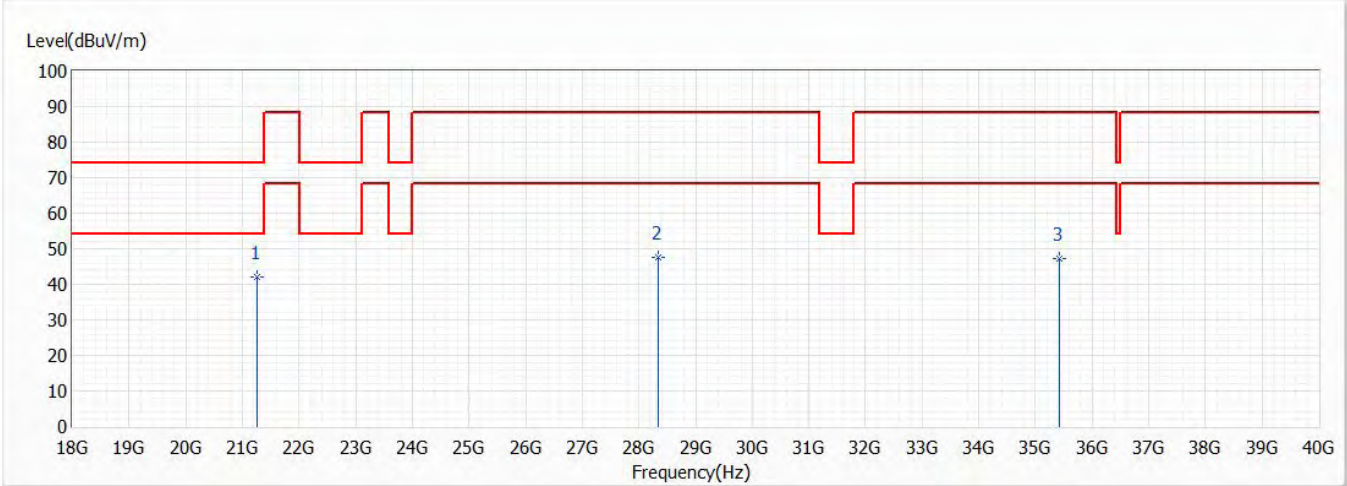


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21255.000	42.12	74.00	-31.88	49.70	-7.58	PK
2	28340.000	47.49	88.20	-40.71	48.17	-0.68	PK
3	35425.000	47.33	88.20	-40.87	48.07	-0.74	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

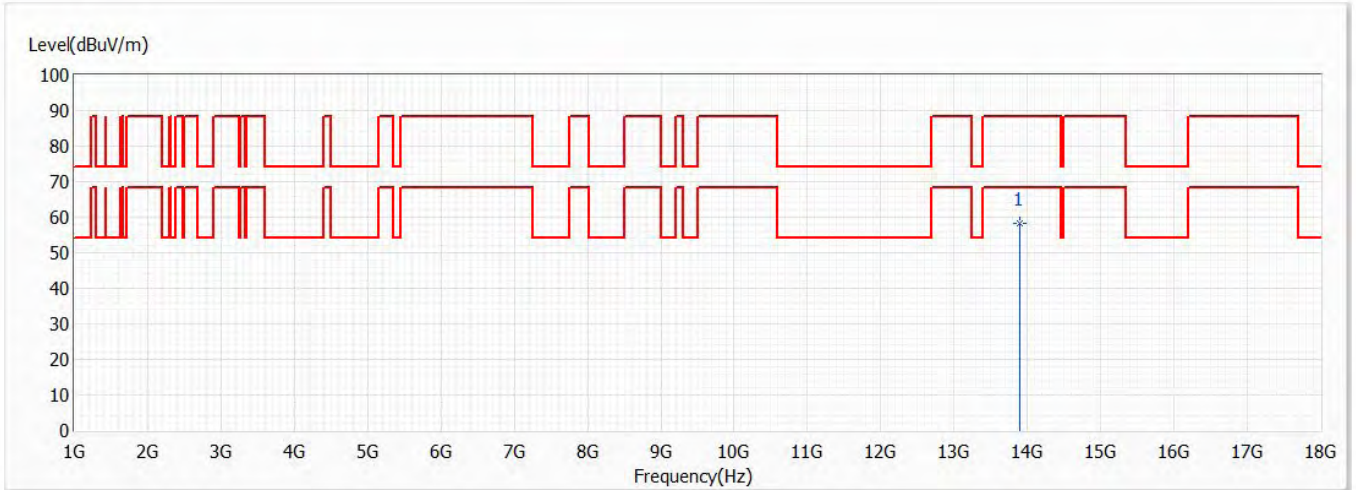


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13890.000	58.40	88.20	-29.80	43.19	15.21	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

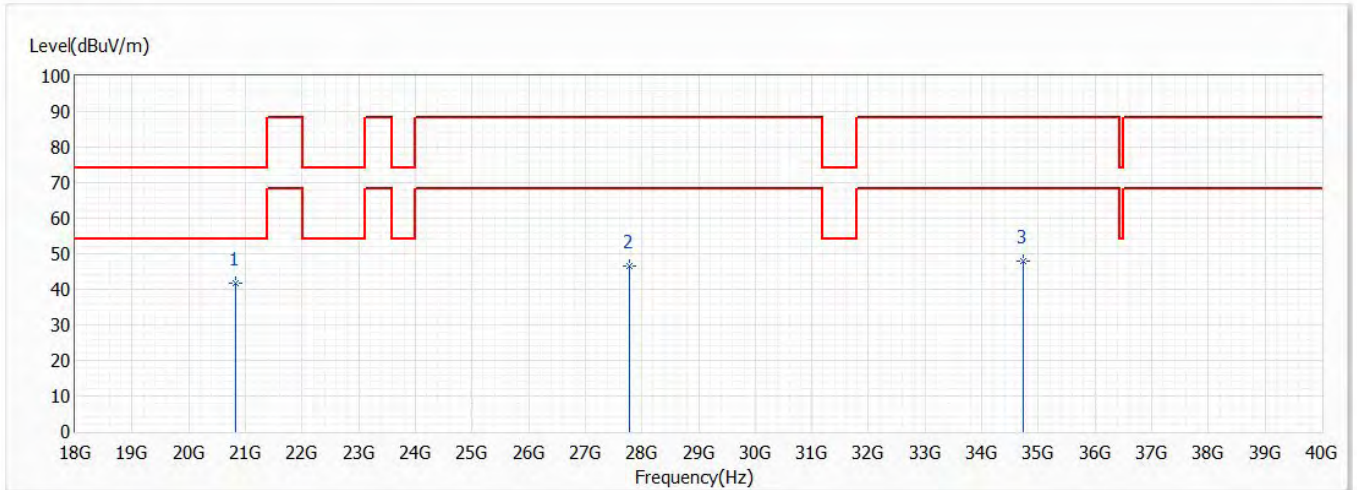


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20835.000	41.64	74.00	-32.36	49.51	-7.87	PK
2	27780.000	46.65	88.20	-41.55	47.44	-0.79	PK
3	34725.000	48.04	88.20	-40.16	47.29	0.75	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

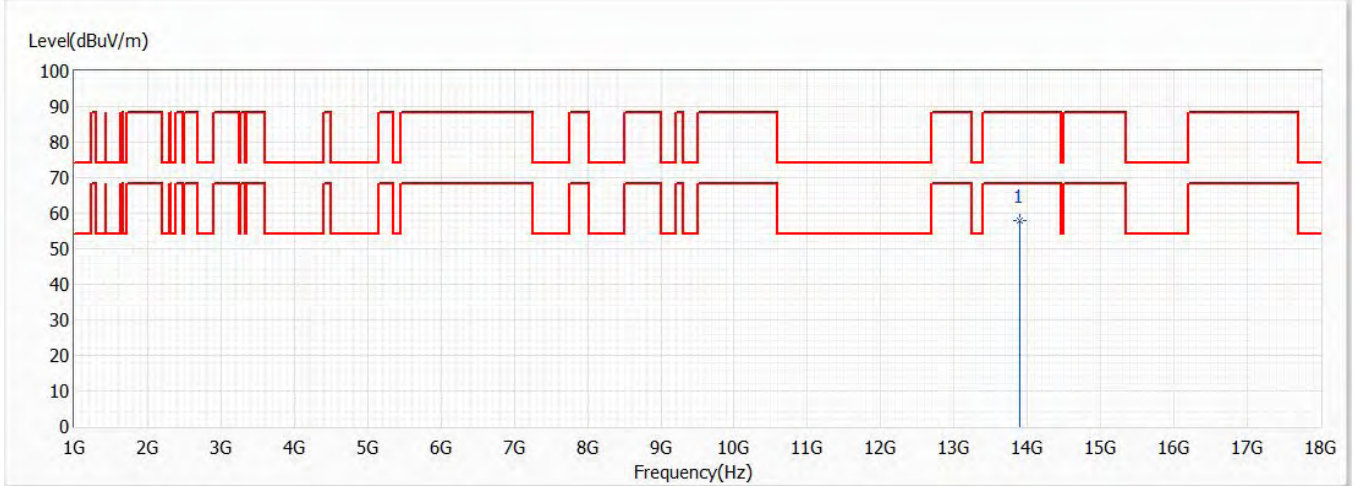


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13890.000	57.86	88.20	-30.34	42.65	15.21	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

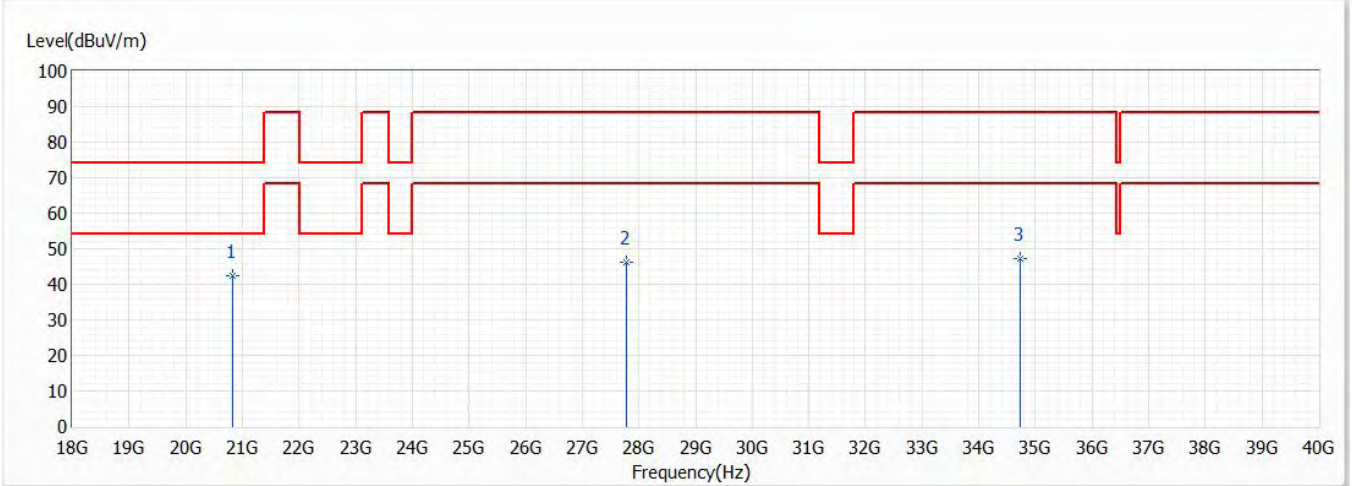


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20835.000	42.47	74.00	-31.53	50.34	-7.87	PK
2	27780.000	46.04	88.20	-42.16	46.83	-0.79	PK
3	34725.000	47.28	88.20	-40.92	46.53	0.75	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

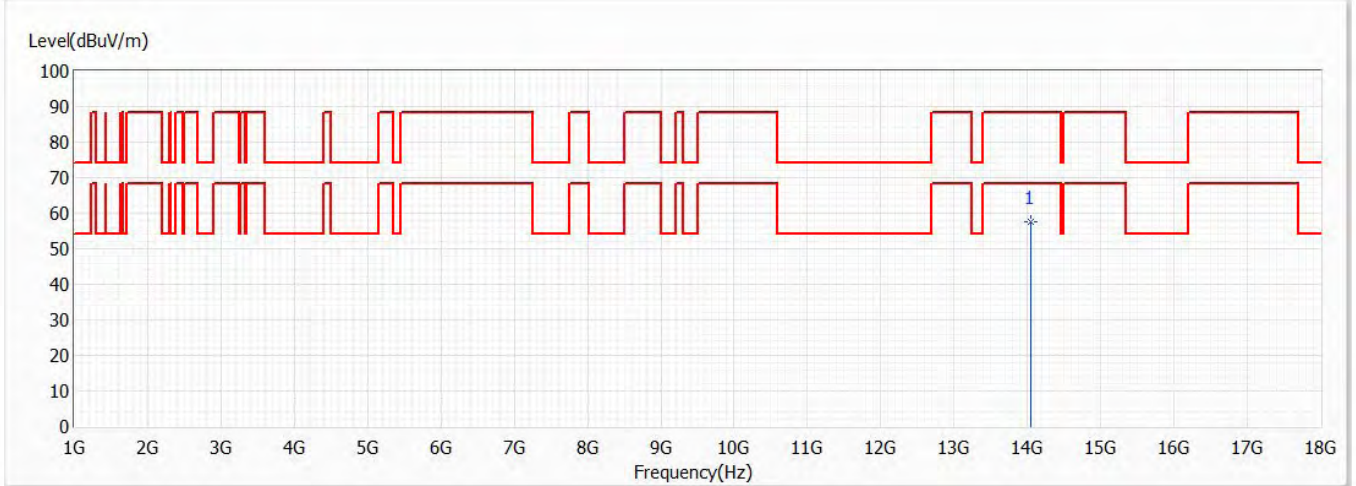


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14050.000	57.50	88.20	-30.70	41.76	15.74	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

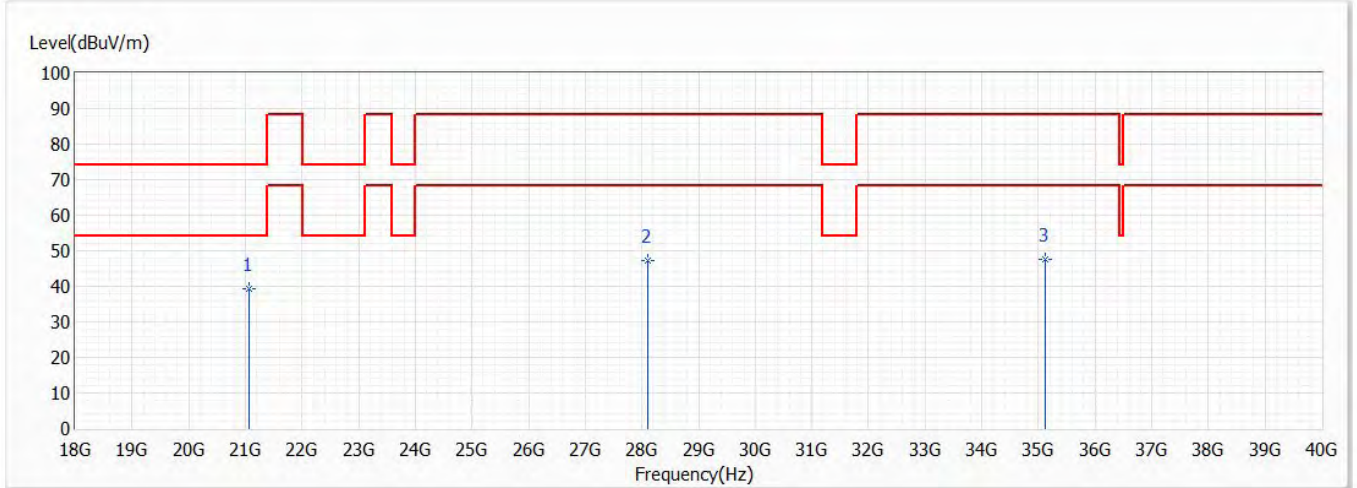


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21075.000	39.24	74.00	-34.76	46.95	-7.71	PK
2	28100.000	47.26	88.20	-40.94	48.22	-0.96	PK
3	35125.000	47.46	88.20	-40.74	47.69	-0.23	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

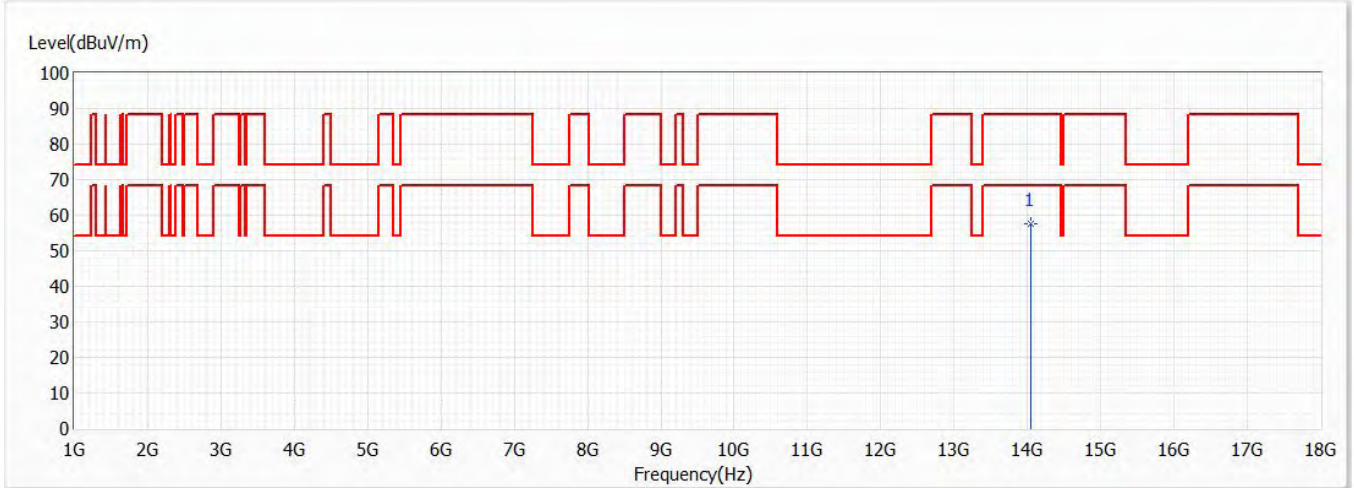


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	14050.000	57.58	88.20	-30.62	41.84	15.74	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

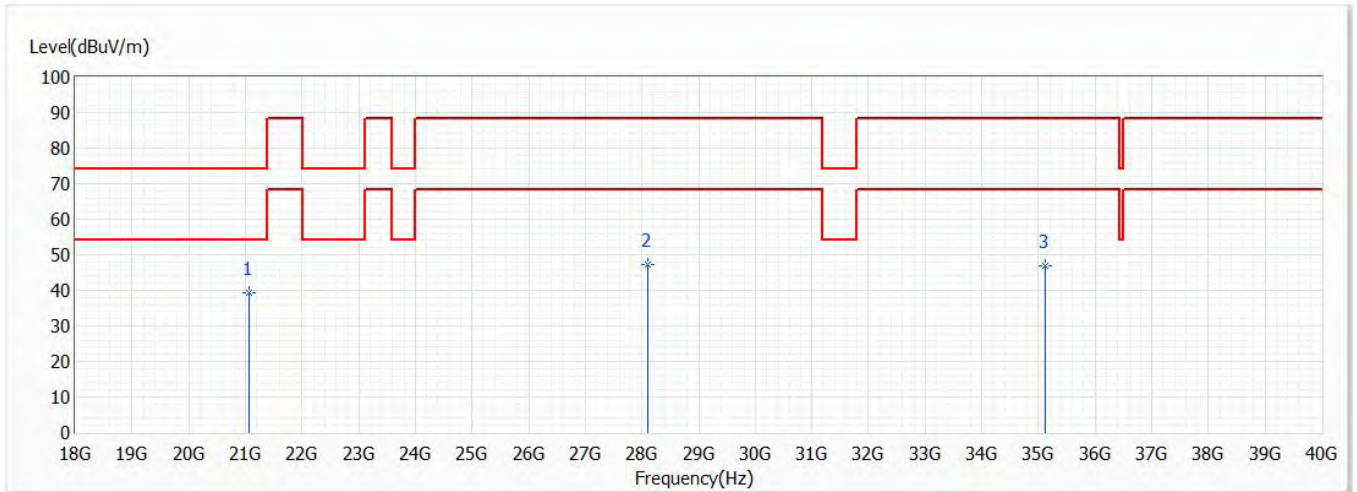


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	21075.000	39.37	74.00	-34.63	47.08	-7.71	PK
2	28100.000	47.38	88.20	-40.82	48.34	-0.96	PK
3	35125.000	46.83	88.20	-41.37	47.06	-0.23	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

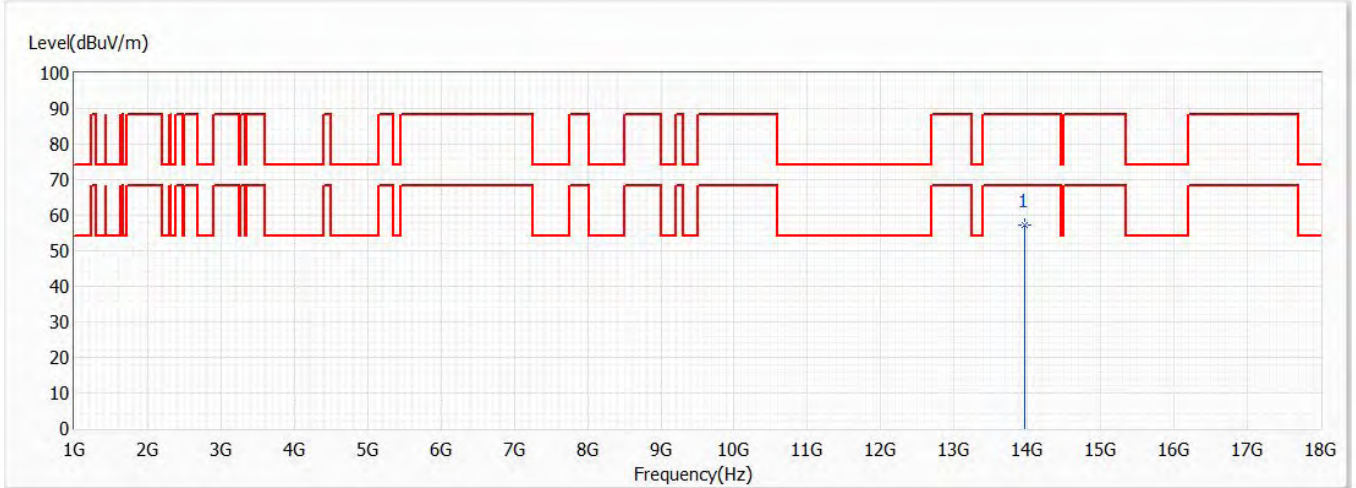


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13970.000	57.35	88.20	-30.85	41.85	15.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

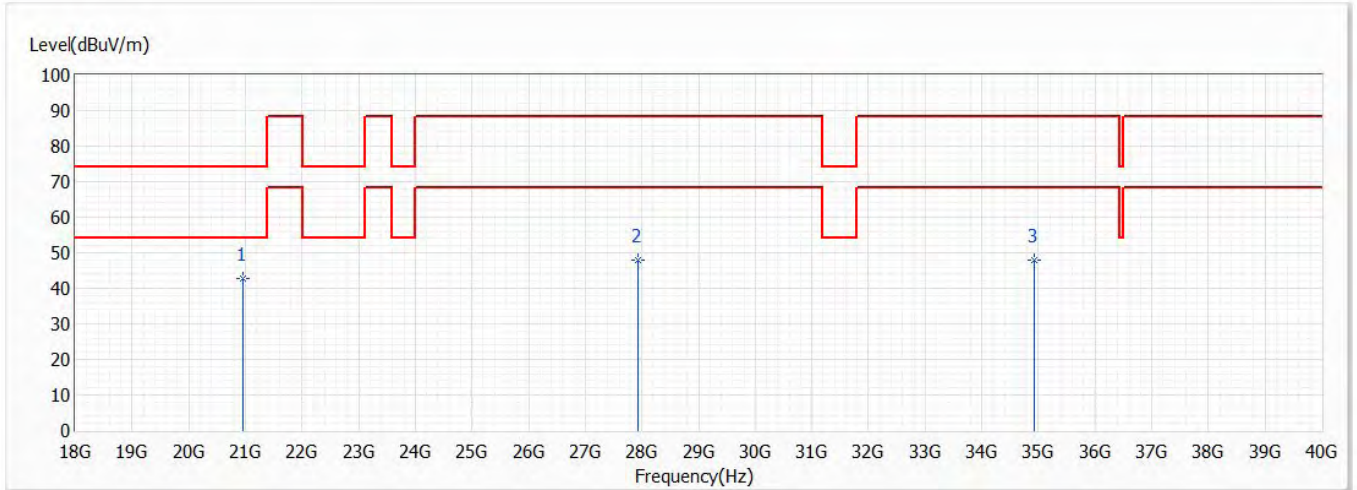


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20955.000	42.72	74.00	-31.28	50.52	-7.80	PK
2	27940.000	48.04	88.20	-40.16	49.01	-0.97	PK
3	34925.000	47.91	88.20	-40.29	47.71	0.20	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/15
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

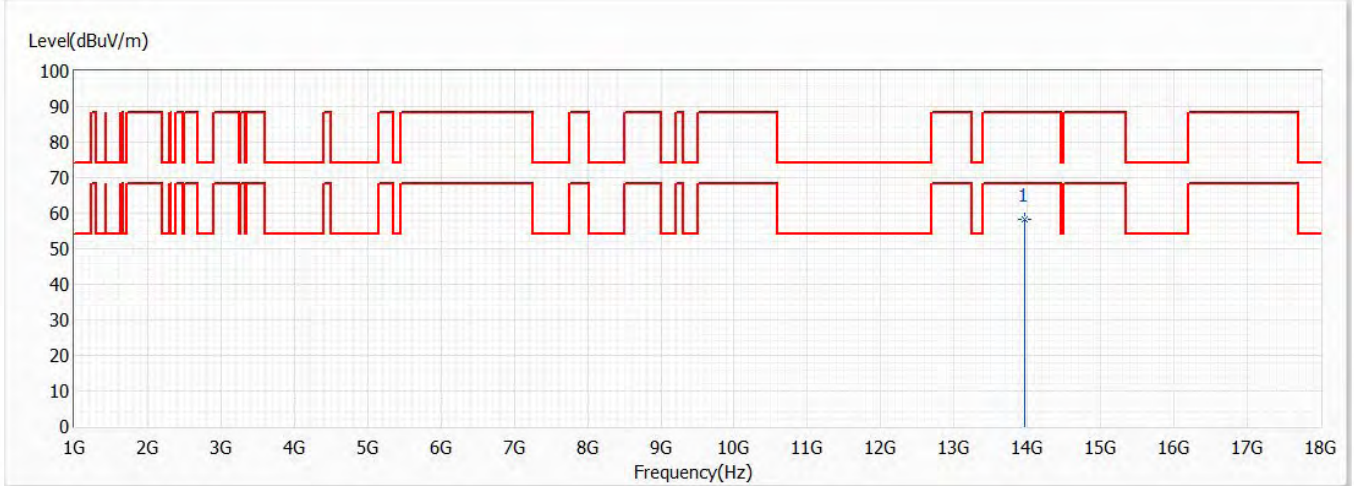


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	13970.000	58.33	88.20	-29.87	42.83	15.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/23
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

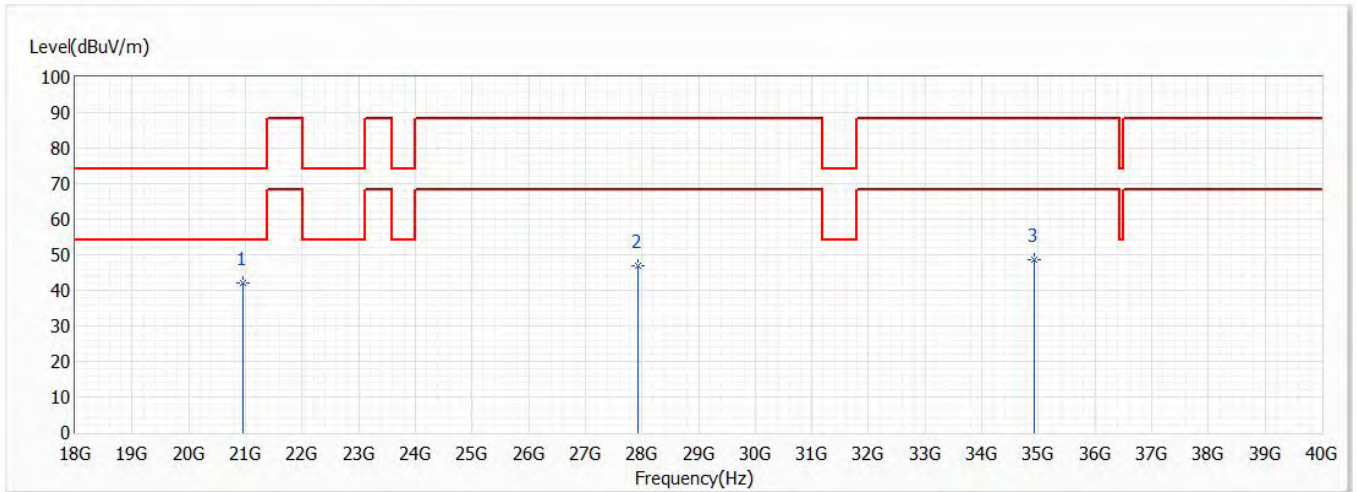

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
* 1	20955.000	42.01	74.00	-31.99	49.81	-7.80	PK
2	27940.000	47.03	88.20	-41.17	48.00	-0.97	PK
3	34925.000	48.46	88.20	-39.74	48.26	0.20	PK


Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. “ * ”, means this data is the worst value.
3. Emission Level = Reading Level + Correct Factor.
4. The average measurement was not performed when the peak measured data under the limit of average detection.

8. Band Edge

8.1. Test Setup

RF Radiated Measurement:

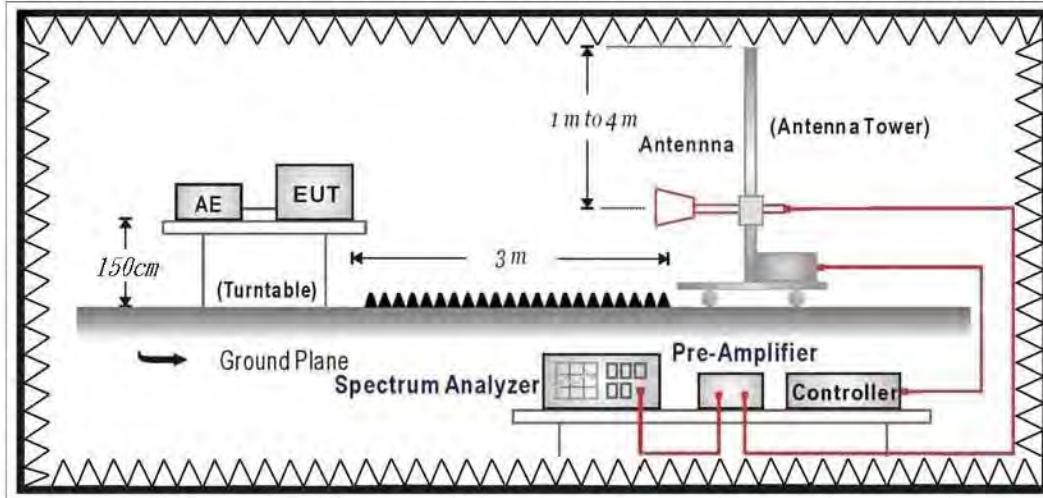

8.2. Limits

General Radiated Emission Limits

The provisions of Section 15.205 of this part apply to intentional radiators operating under this section. Radiated emissions which fall in the restricted bands, as defined in Section 15.205, must also comply with the radiated emission limits specified in Section 15.209:

FCC CFR Title 47 Part 15 Subpart C Paragraph 15.209 Limits		
Frequency MHz	$\mu\text{V}/\text{m} @3\text{m}$	$\text{dBuV}/\text{m}@3\text{m}$
30 - 88	100	40
88 - 216	150	43.5
216 - 960	200	46
Above 960	500	54

Remark:

1. RF Voltage (dBuV) = $20 \log$ RF Voltage (μV)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

Unwanted Emission out of the restricted bands Limits

FCC CFR Title 47 Part 15 Subpart E Paragraph 15.407(b) Limits		
Frequency (MHz)	EIRP Limit (dBm/MHz)	Equivalent Field Strength (dBuV/m@3m)
5925 MHz > F 7125 MHz	Peak: -7	88.2
	Average: -27	68.2

Remark:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \text{ uV/m, where P is the eirp (Watts).}$$

8.3. Test Procedure

The EUT and its simulators are placed on a turn table which is 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 meters.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.


Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

The bandwidth below 1GHz setting on the field strength meter is 120 KHz, above 1GHz are 1 MHz.

8.4. Test Result of Band Edge

Non-beamforming mode

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/22
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch33,6.115G,BW20M	Humidity (%RH)	58.0

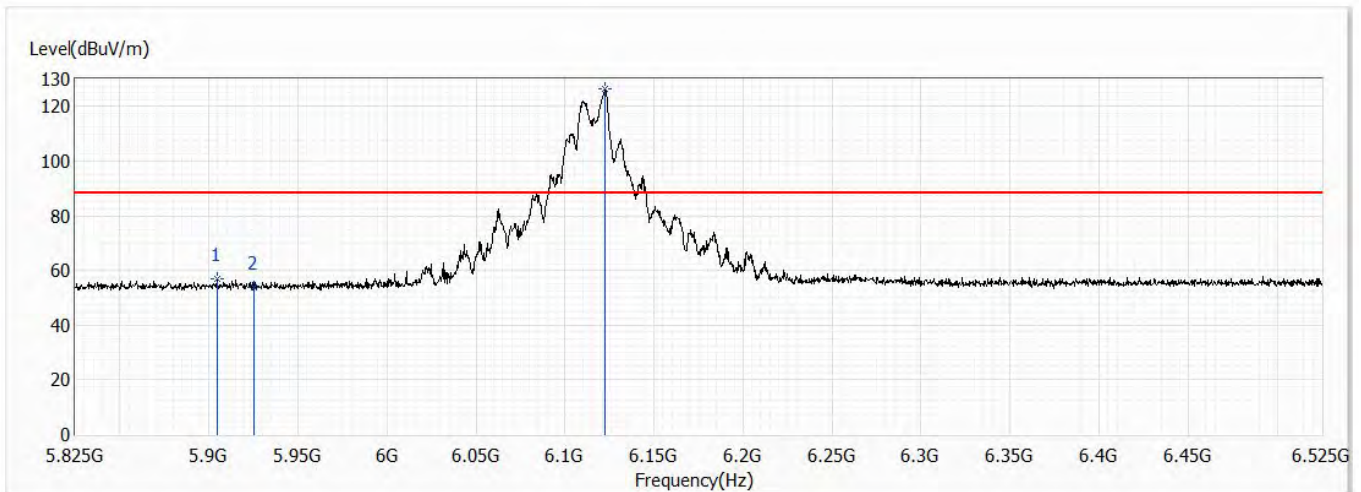


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5904.450	57.03	88.20	-31.17	32.71	24.32	PK
2	5925.000	53.82	88.20	-34.38	29.45	24.37	PK
!3	6122.500	126.61	88.20	38.41	101.59	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/22
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch33,6.115G,BW20M	Humidity (%RH)	58.0

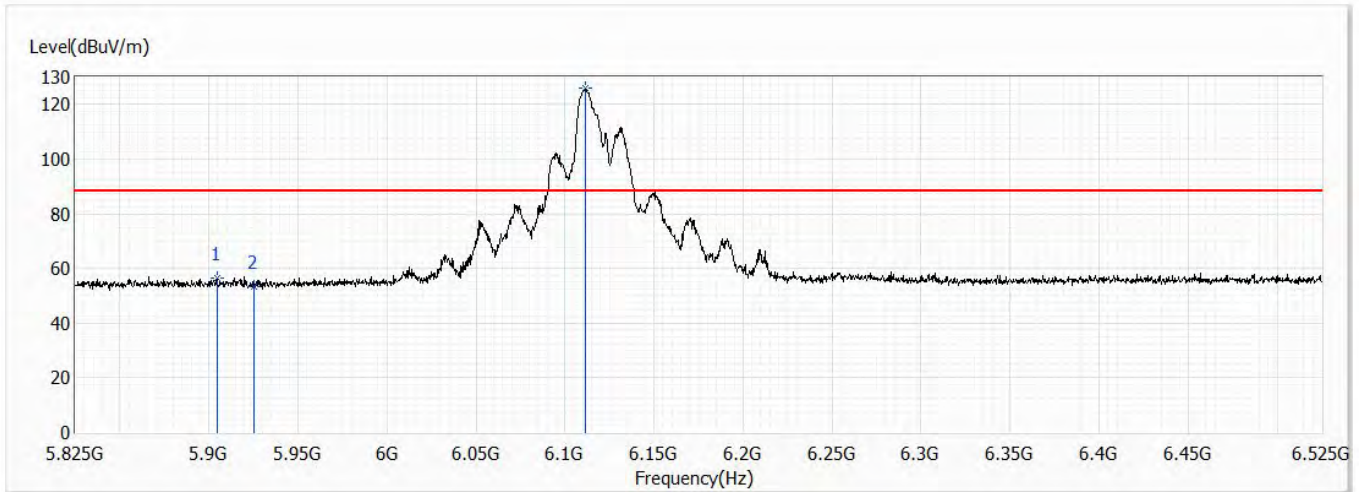


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5904.450	56.31	88.20	-31.89	31.99	24.32	PK
2	5925.000	53.46	88.20	-34.74	29.09	24.37	PK
!3	6111.650	126.11	88.20	37.91	101.13	24.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/22
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch61,6.255G,BW20M	Humidity (%RH)	58.0

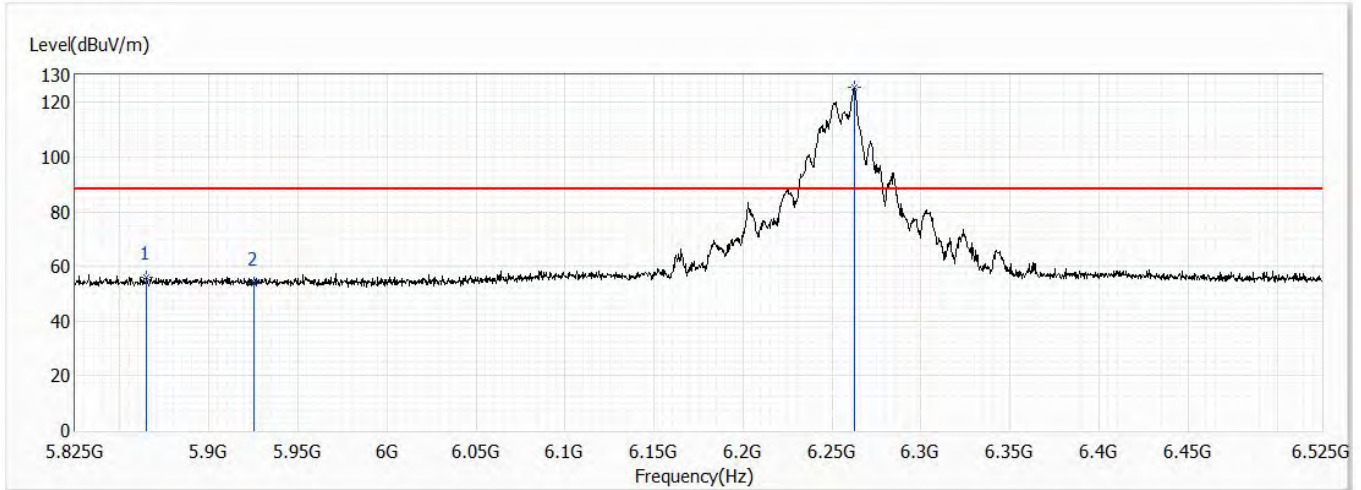


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5864.900	56.19	88.20	-32.01	32.00	24.19	PK
2	5925.000	53.75	88.20	-34.45	29.38	24.37	PK
!3	6262.500	125.44	88.20	37.24	99.94	25.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/22
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch61,6.255G,BW20M	Humidity (%RH)	58.0

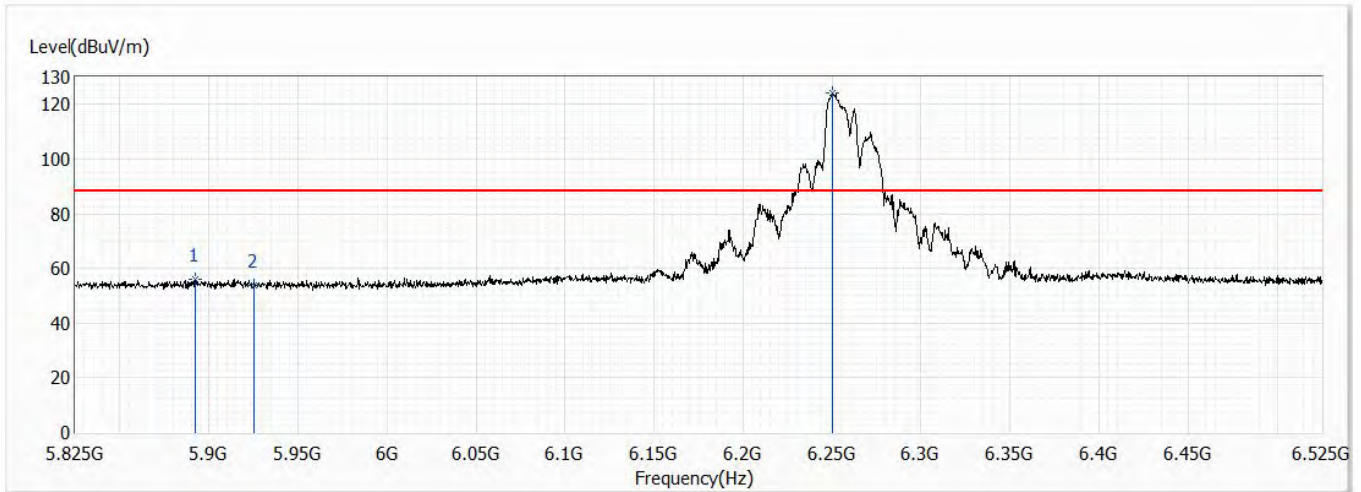


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5892.550	55.86	88.20	-32.34	31.59	24.27	PK
2	5925.000	53.87	88.20	-34.33	29.50	24.37	PK
!3	6249.900	124.29	88.20	36.09	98.83	25.46	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/22
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch93,6.415G,BW20M	Humidity (%RH)	58.0

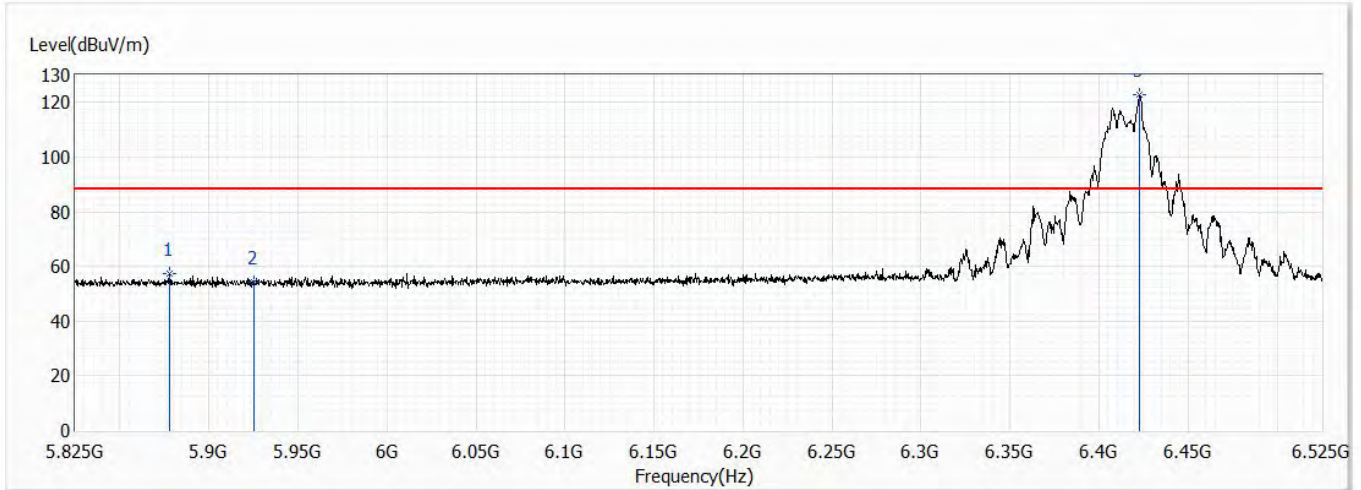


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5877.850	57.37	88.20	-30.83	33.14	24.23	PK
2	5925.000	54.42	88.20	-33.78	30.05	24.37	PK
!3	6422.800	122.69	88.20	34.49	96.74	25.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/22
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch93,6.415G,BW20M	Humidity (%RH)	58.0

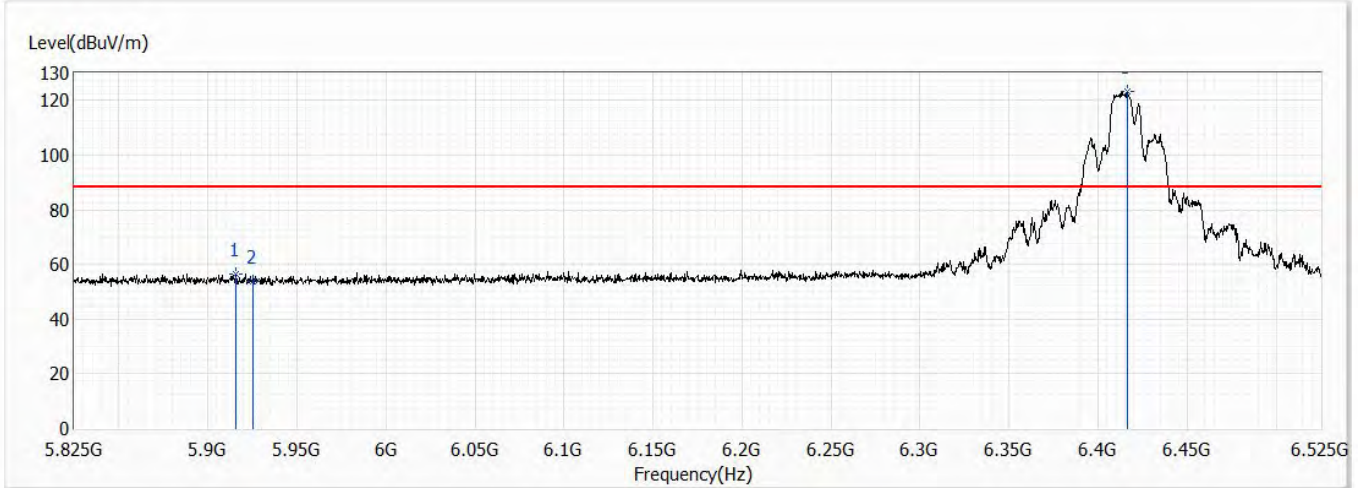


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5916.000	56.46	88.20	-31.74	32.12	24.34	PK
2	5925.000	53.90	88.20	-34.30	29.53	24.37	PK
!3	6416.150	123.24	88.20	35.04	97.30	25.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch33,6.115G,BW20M	Humidity (%RH)	58.0

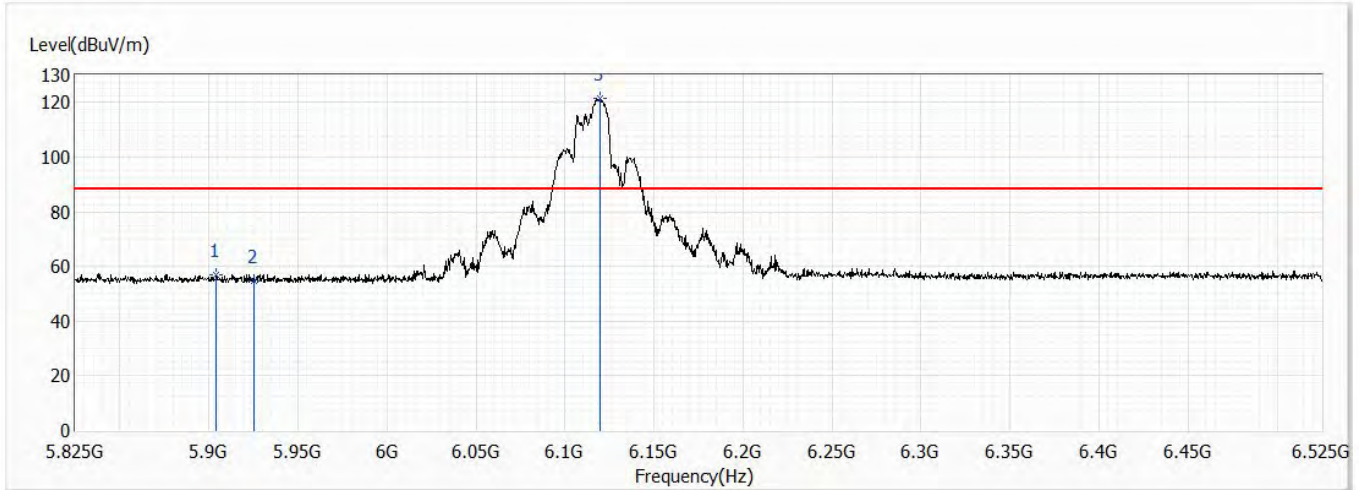


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5904.100	56.73	88.20	-31.47	32.41	24.32	PK
2	5925.000	54.85	88.20	-33.35	30.48	24.37	PK
!3	6119.700	121.29	88.20	33.09	96.27	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch33,6.115G,BW20M	Humidity (%RH)	58.0

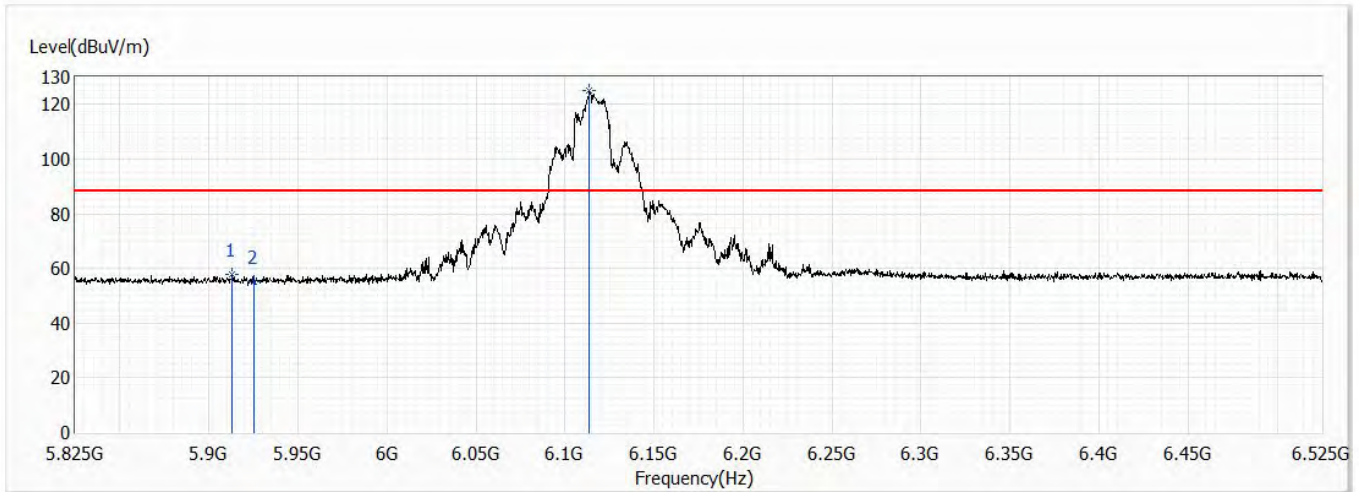


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5913.200	58.03	88.20	-30.17	33.69	24.34	PK
2	5925.000	55.33	88.20	-32.87	30.96	24.37	PK
!3	6113.750	125.22	88.20	37.02	100.23	24.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch61,6.255G,BW20M	Humidity (%RH)	58.0

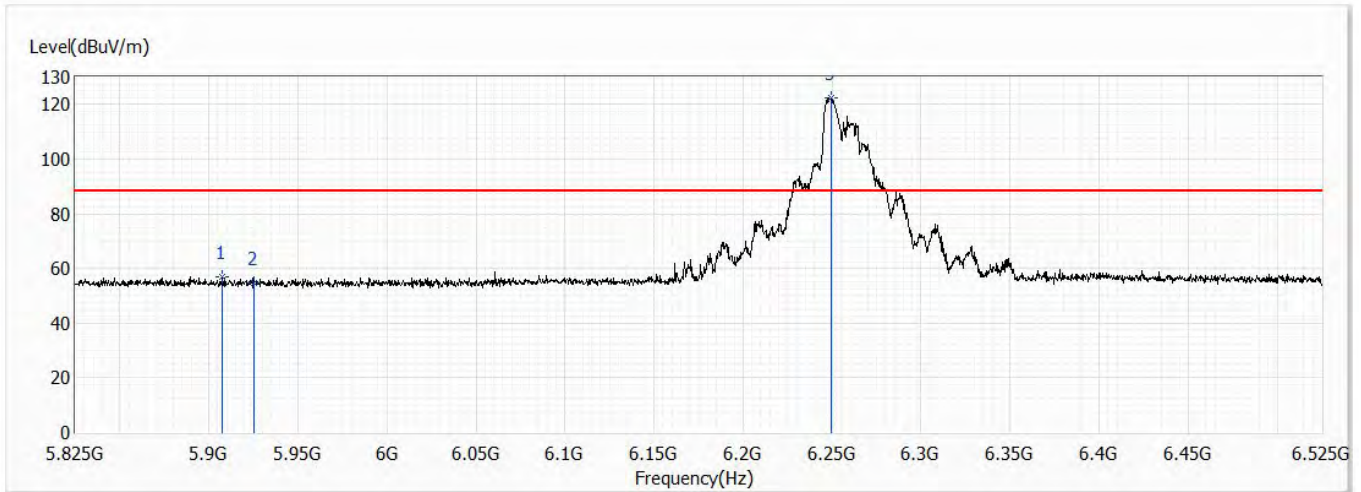


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5907.600	56.91	88.20	-31.29	32.59	24.32	PK
2	5925.000	54.82	88.20	-33.38	30.45	24.37	PK
!3	6249.200	122.34	88.20	34.14	96.88	25.46	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch61,6.255G,BW20M	Humidity (%RH)	58.0

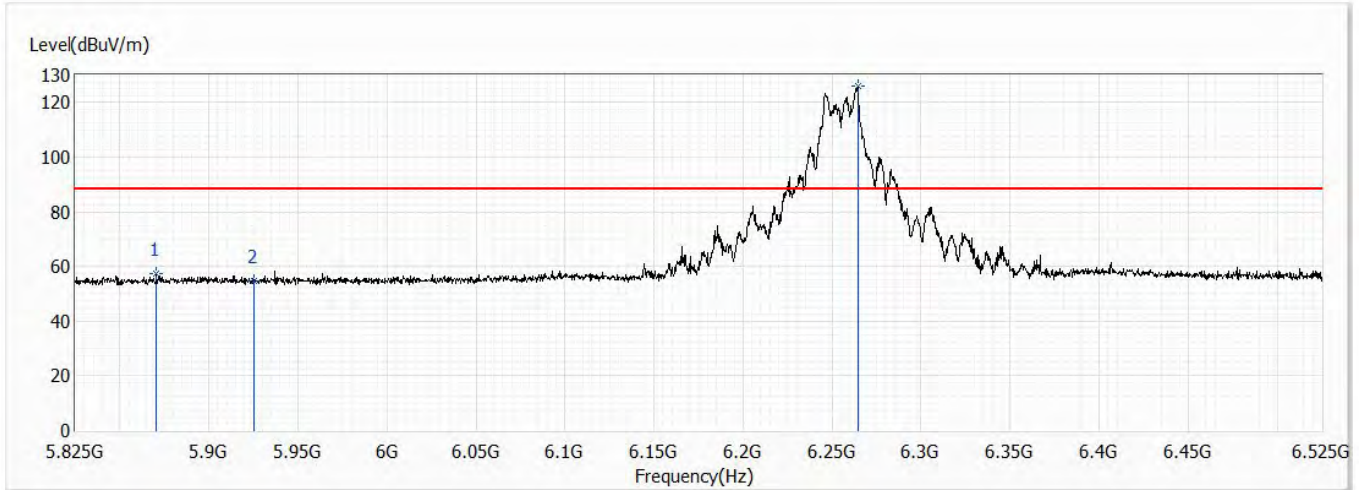


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5870.500	57.50	88.20	-30.70	33.29	24.21	PK
2	5925.000	54.68	88.20	-33.52	30.31	24.37	PK
!3	6264.600	125.76	88.20	37.56	100.25	25.51	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch93,6.415G,BW20M	Humidity (%RH)	58.0

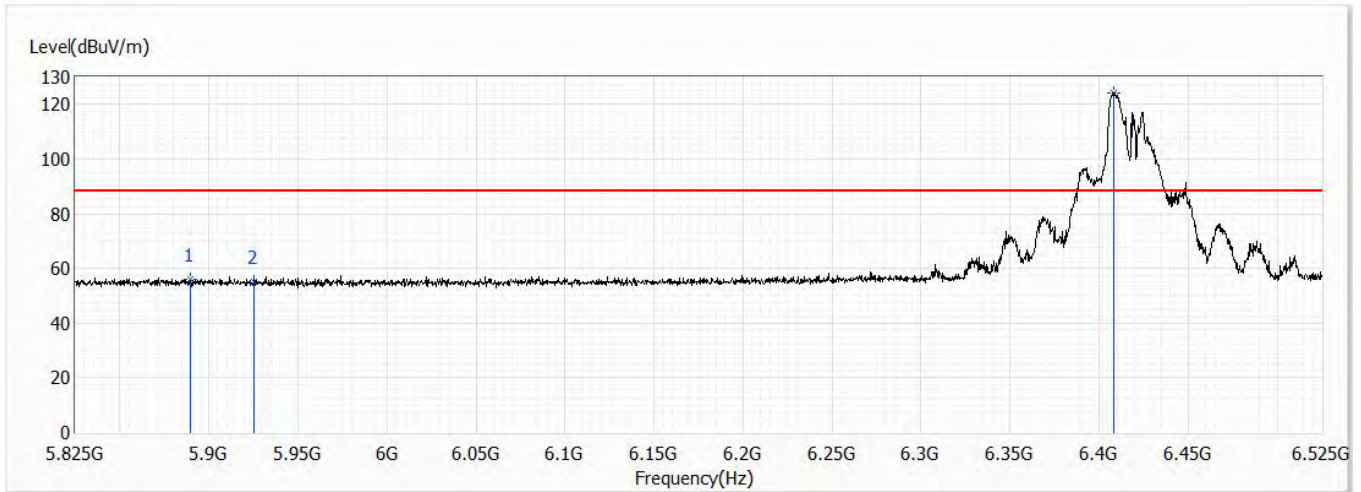


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5889.400	56.13	88.20	-32.07	31.86	24.27	PK
2	5925.000	54.93	88.20	-33.27	30.56	24.37	PK
!3	6408.450	124.16	88.20	35.96	98.25	25.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch93,6.415G,BW20M	Humidity (%RH)	58.0

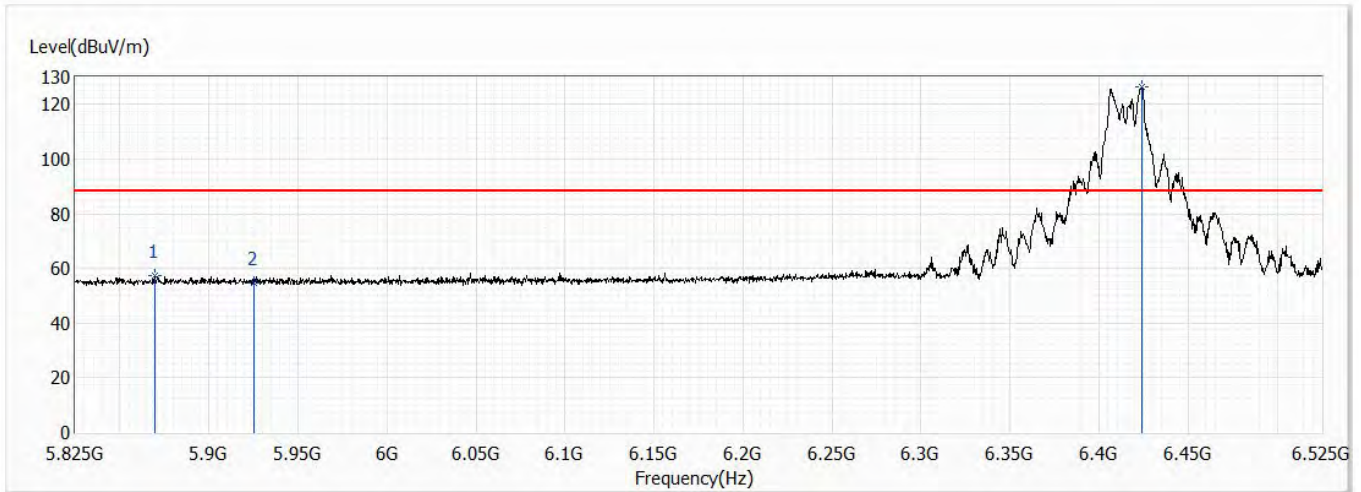


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5869.800	57.37	88.20	-30.83	33.16	24.21	PK
2	5925.000	54.55	88.20	-33.65	30.18	24.37	PK
!3	6424.200	126.63	88.20	38.43	100.68	25.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch35,6.125G,BW40M	Humidity (%RH)	58.0

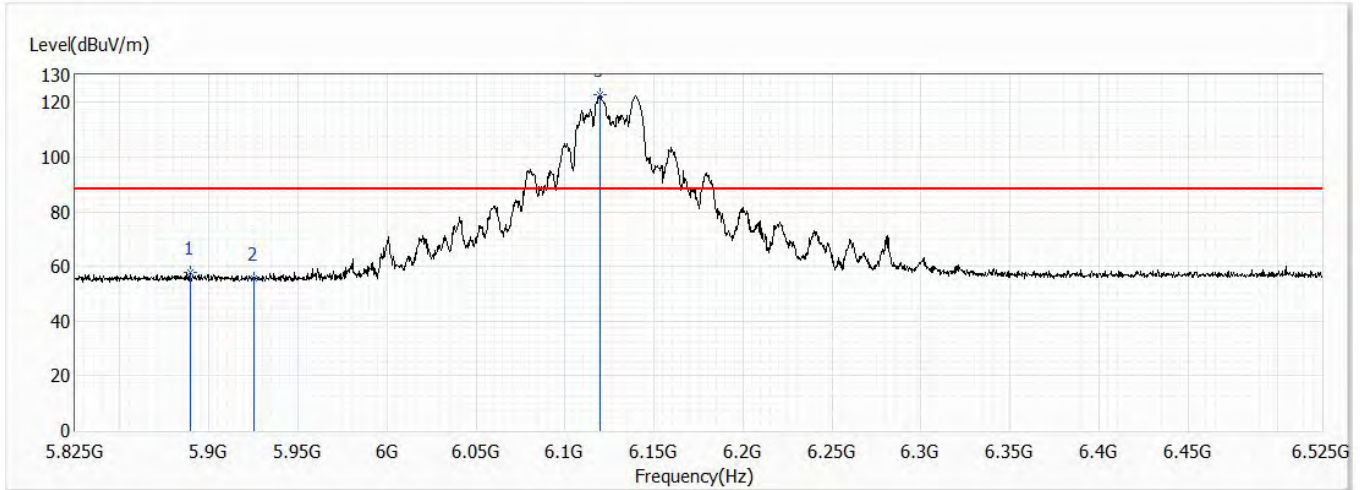


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5889.400	57.94	88.20	-30.26	33.67	24.27	PK
2	5925.000	55.75	88.20	-32.45	31.38	24.37	PK
!3	6119.700	123.03	88.20	34.83	98.01	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch35,6.125G,BW40M	Humidity (%RH)	58.0

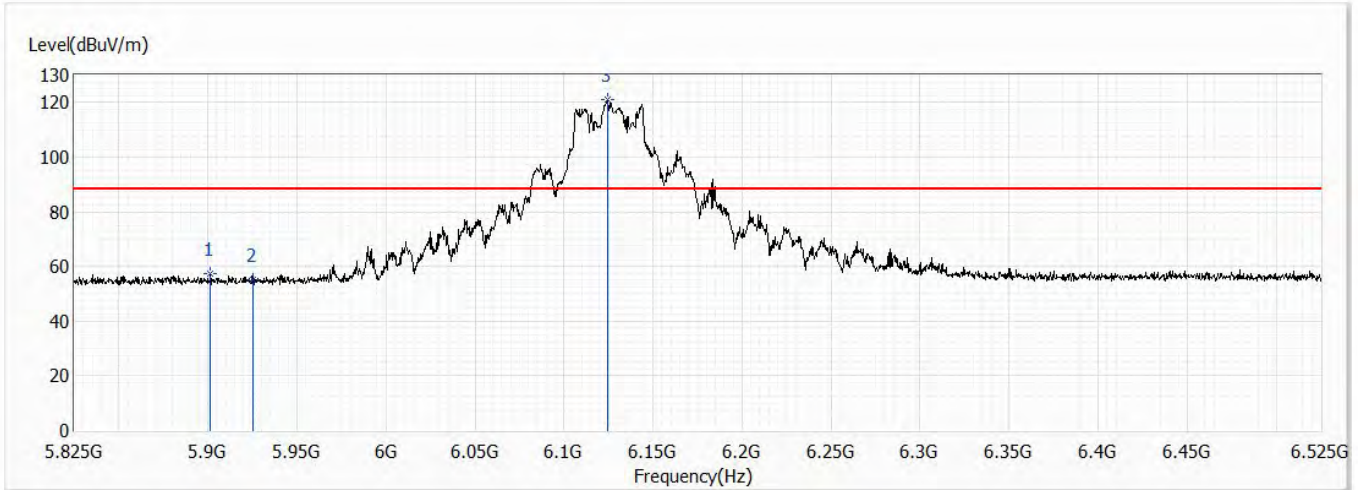


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5901.300	57.21	88.20	-30.99	32.91	24.30	PK
2	5925.000	54.95	88.20	-33.25	30.58	24.37	PK
!3	6124.250	120.98	88.20	32.78	95.96	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch59,6.245G,BW40M	Humidity (%RH)	58.0

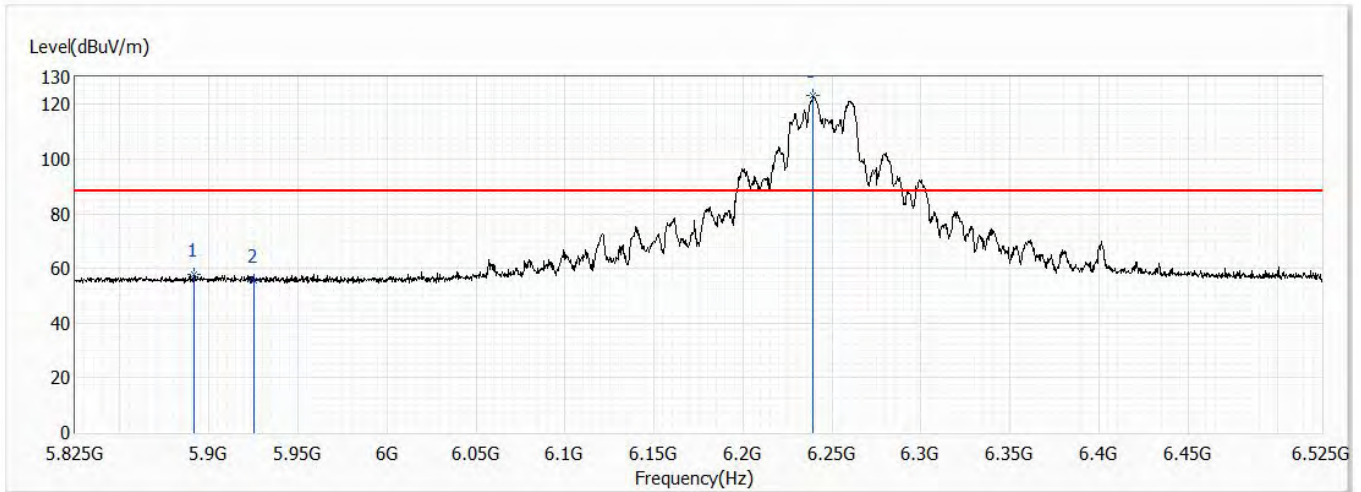


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5891.500	57.99	88.20	-30.21	33.72	24.27	PK
2	5925.000	55.67	88.20	-32.53	31.30	24.37	PK
!3	6239.400	123.49	88.20	35.29	98.06	25.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch59,6.245G,BW40M	Humidity (%RH)	58.0

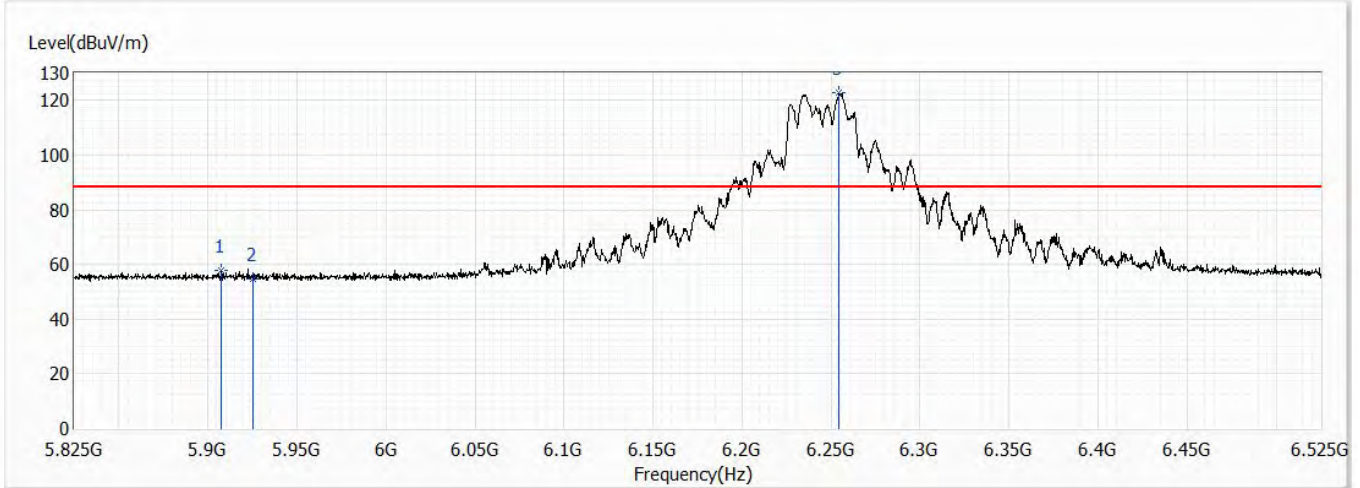


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5907.600	57.81	88.20	-30.39	33.49	24.32	PK
2	5925.000	54.91	88.20	-33.29	30.54	24.37	PK
!3	6254.450	122.91	88.20	34.71	97.44	25.47	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch91,6.405G,BW40M	Humidity (%RH)	58.0

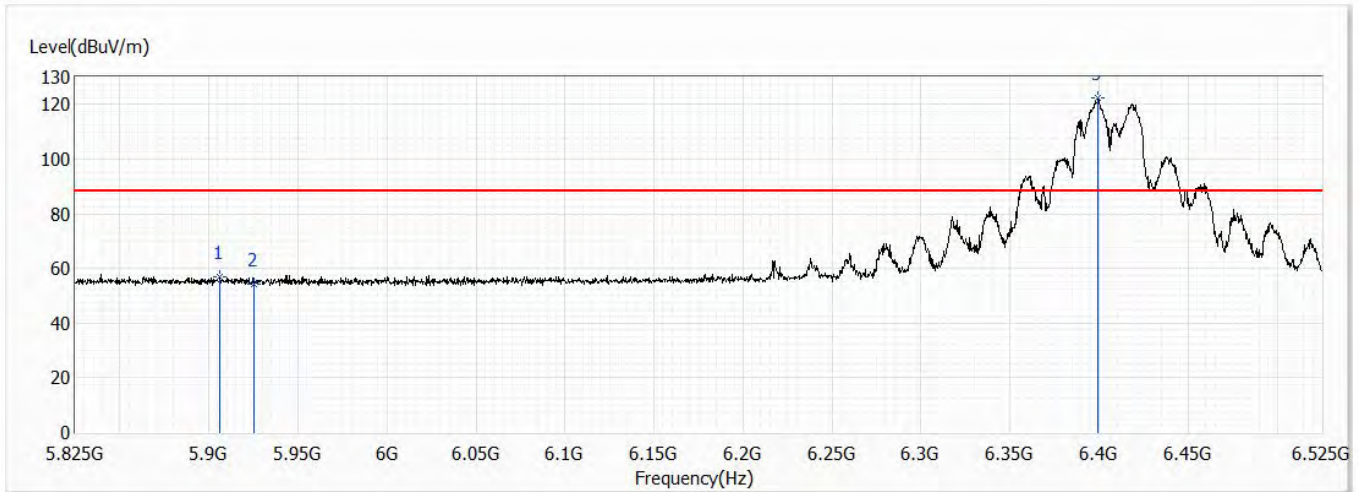


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5906.200	56.82	88.20	-31.38	32.50	24.32	PK
2	5925.000	54.25	88.20	-33.95	29.88	24.37	PK
!3	6399.350	122.16	88.20	33.96	96.27	25.89	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch91,6.405G,BW40M	Humidity (%RH)	58.0

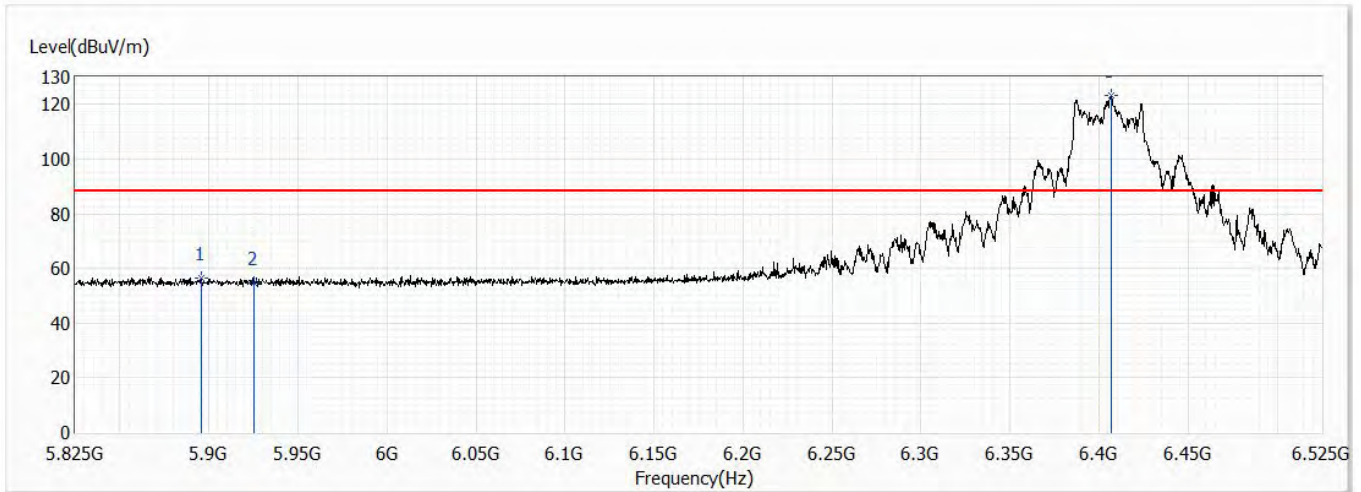


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5895.700	56.55	88.20	-31.65	32.28	24.27	PK
2	5925.000	54.91	88.20	-33.29	30.54	24.37	PK
!3	6406.700	123.44	88.20	35.24	97.54	25.90	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch39,6.145G,BW80M	Humidity (%RH)	58.0

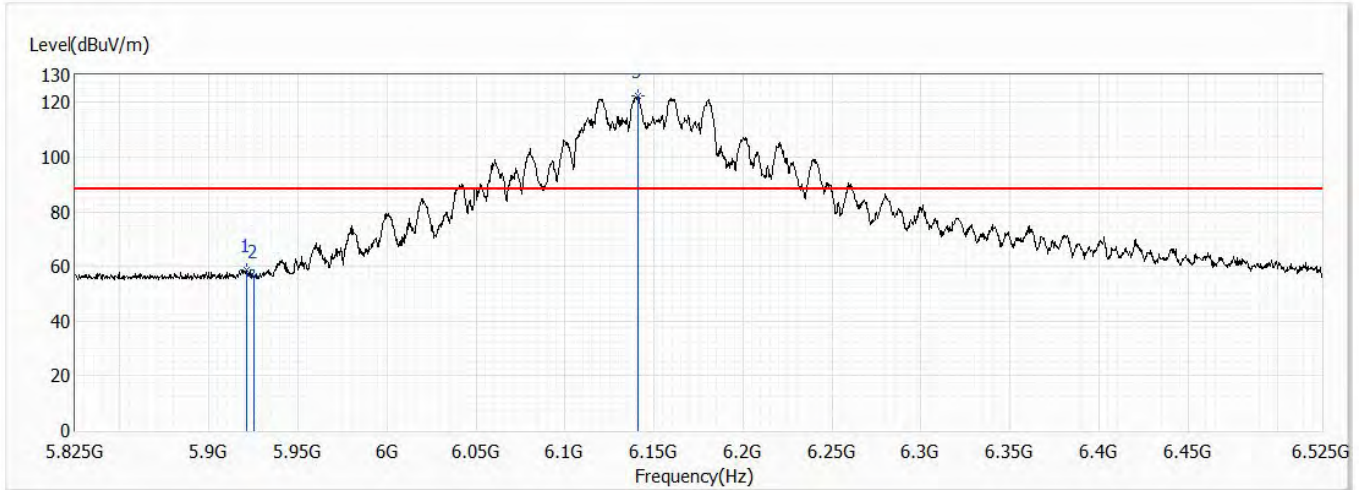


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5920.900	58.76	88.20	-29.44	34.40	24.36	PK
2	5925.000	56.56	88.20	-31.64	32.19	24.37	PK
!3	6141.050	122.41	88.20	34.21	97.33	25.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch39,6.145G,BW80M	Humidity (%RH)	58.0

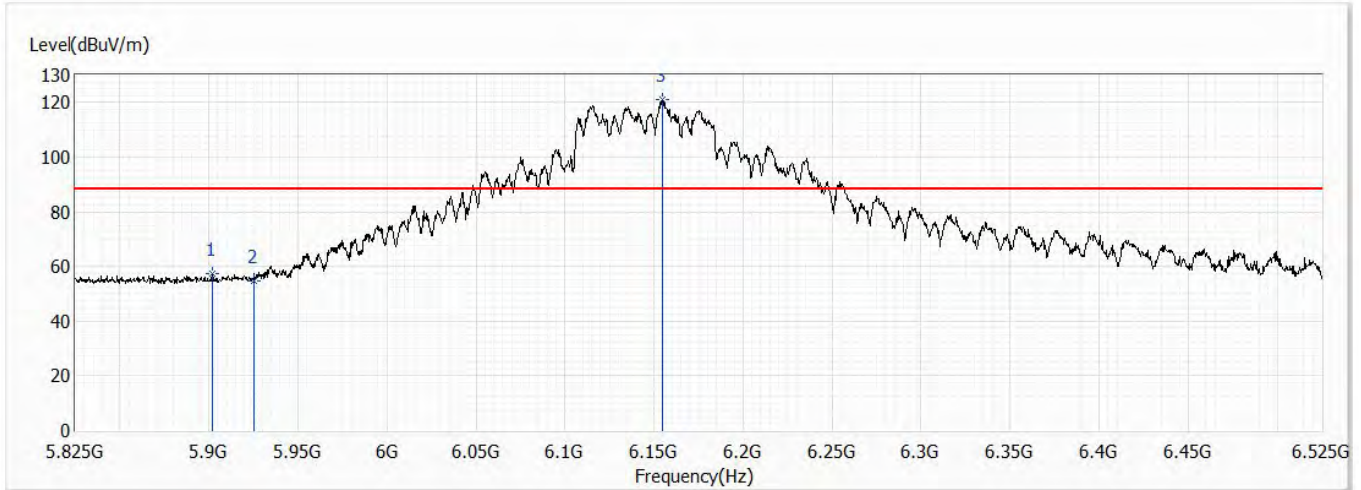


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5902.000	57.20	88.20	-31.00	32.90	24.30	PK
2	5925.000	54.61	88.20	-33.59	30.24	24.37	PK
!3	6155.050	120.88	88.20	32.68	95.75	25.13	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch55,6.225G,BW80M	Humidity (%RH)	58.0

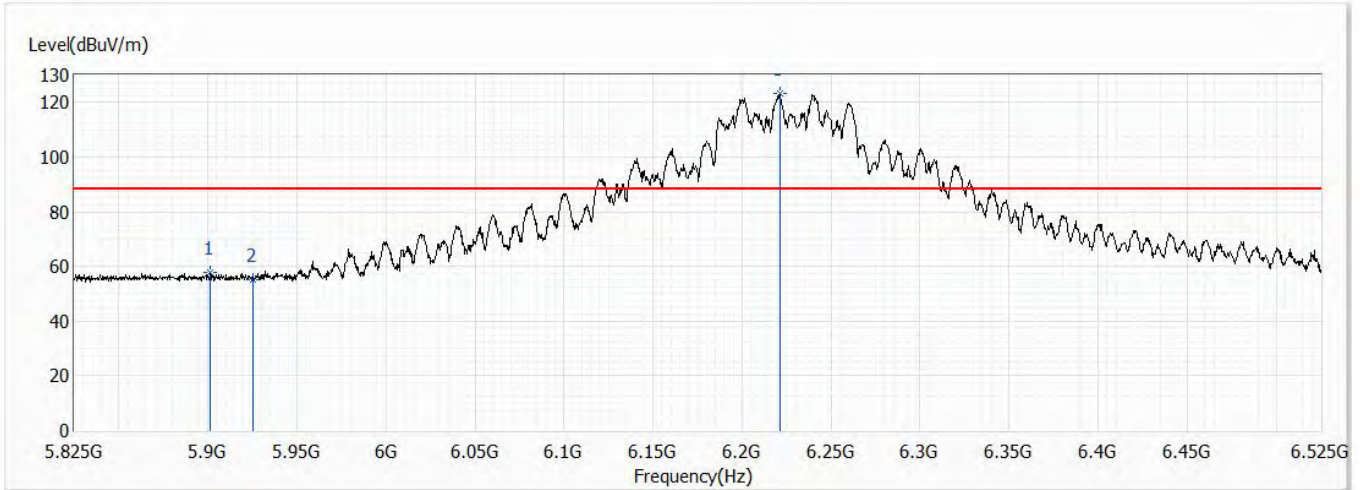


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5901.300	57.66	88.20	-30.54	33.36	24.30	PK
2	5925.000	55.08	88.20	-33.12	30.71	24.37	PK
!3	6221.200	123.08	88.20	34.88	97.72	25.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch55,6.225G,BW80M	Humidity (%RH)	58.0

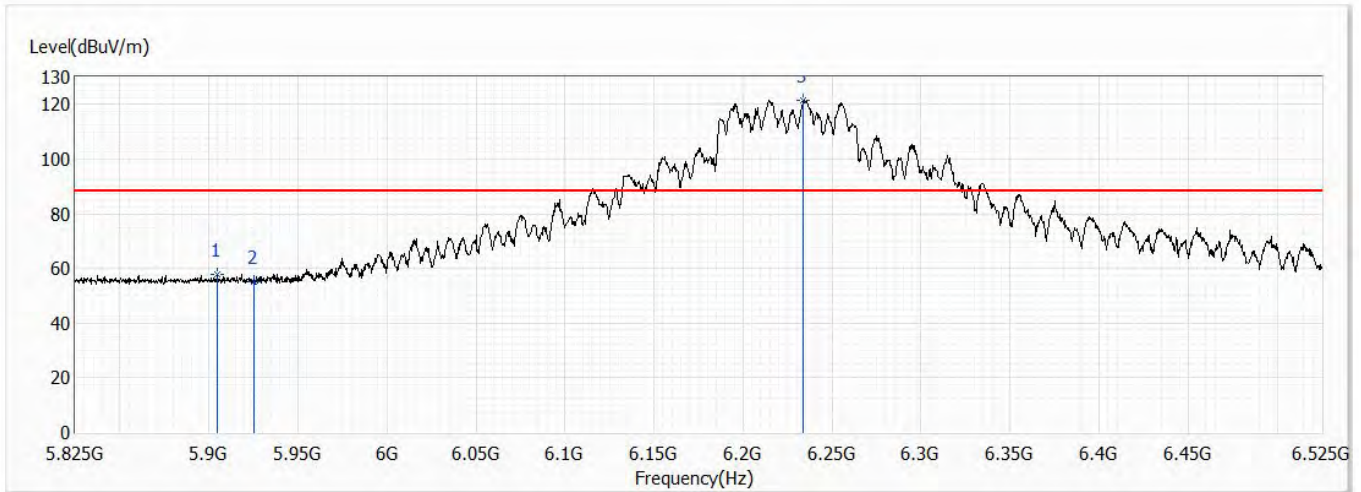


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5904.800	57.64	88.20	-30.56	33.32	24.32	PK
2	5925.000	55.03	88.20	-33.17	30.66	24.37	PK
!3	6233.450	121.48	88.20	33.28	96.08	25.40	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch87,6.385G,BW80M	Humidity (%RH)	58.0

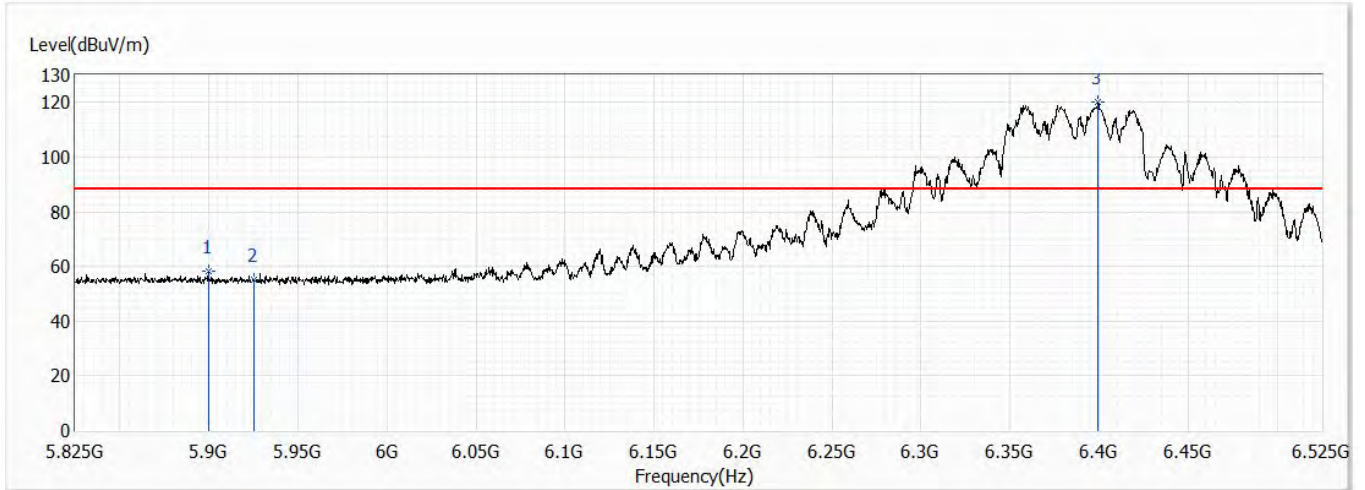


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5899.550	58.28	88.20	-29.92	33.98	24.30	PK
2	5925.000	55.00	88.20	-33.20	30.63	24.37	PK
!3	6399.350	120.31	88.20	32.11	94.42	25.89	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch87,6.385G,BW80M	Humidity (%RH)	58.0

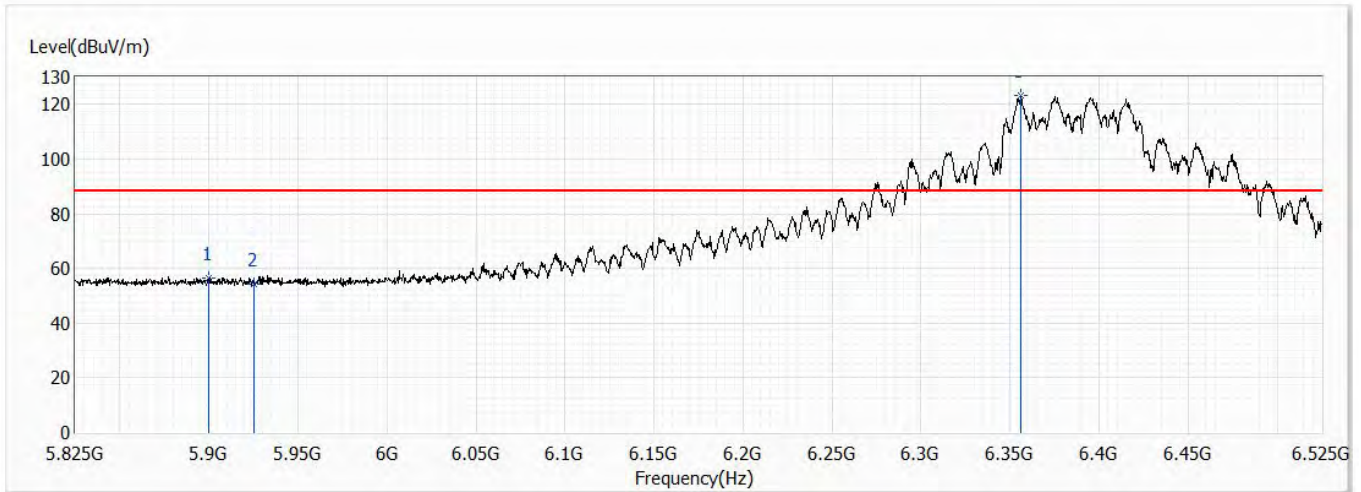


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5899.900	56.69	88.20	-31.51	32.39	24.30	PK
2	5925.000	54.46	88.20	-33.74	30.09	24.37	PK
!3	6355.950	123.34	88.20	35.14	97.58	25.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch47,6.185G,BW160M	Humidity (%RH)	58.0

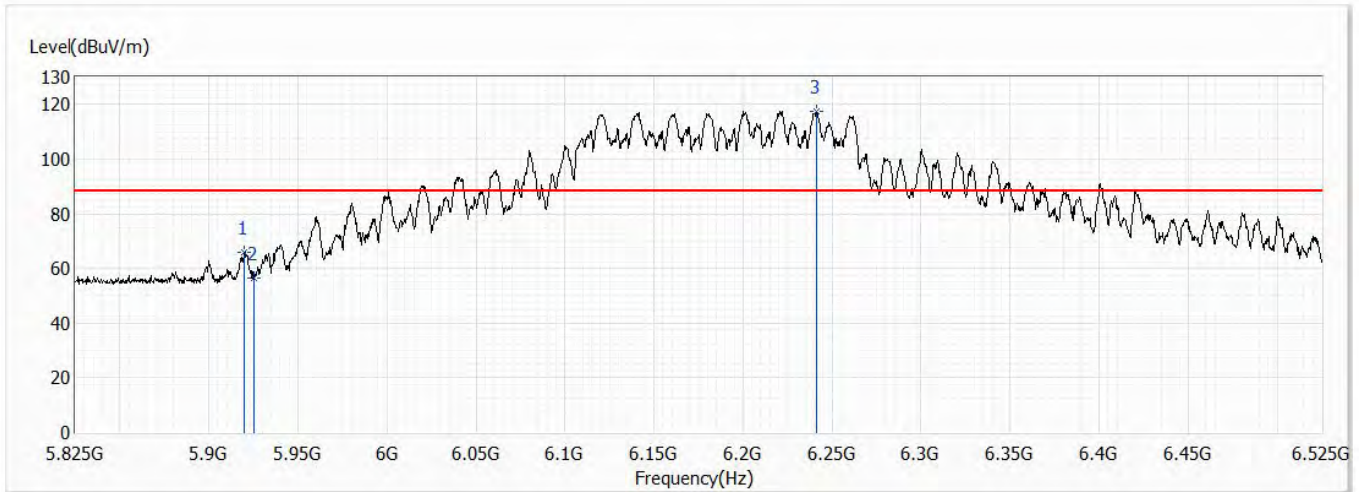


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5919.850	65.79	88.20	-22.41	41.43	24.36	PK
2	5925.000	56.26	88.20	-31.94	31.89	24.37	PK
!3	6241.500	117.44	88.20	29.24	92.01	25.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch47,6.185G,BW160M	Humidity (%RH)	58.0

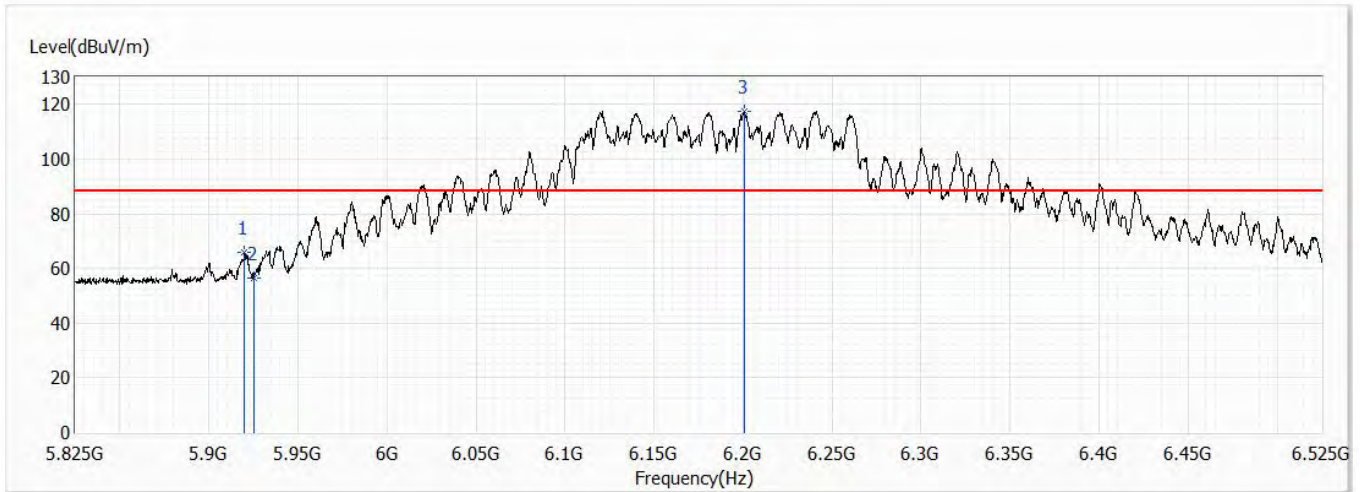


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5919.850	65.88	88.20	-22.32	41.52	24.36	PK
2	5925.000	56.65	88.20	-31.55	32.28	24.37	PK
!3	6200.550	117.42	88.20	29.22	92.13	25.29	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch79,6.345G,BW160M	Humidity (%RH)	58.0

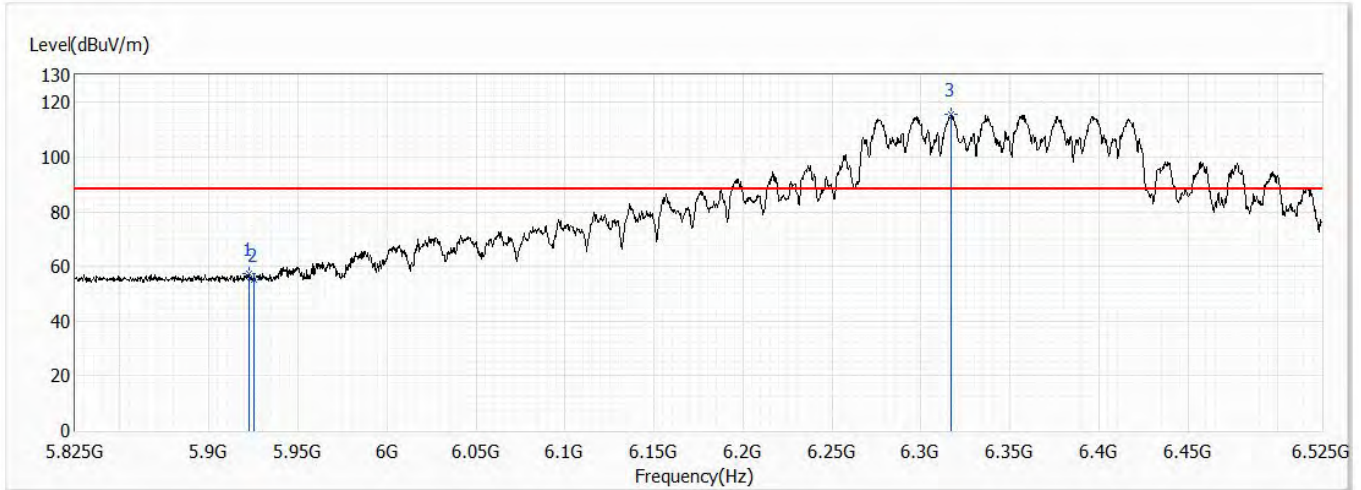


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5922.300	57.36	88.20	-30.84	33.00	24.36	PK
2	5925.000	55.12	88.20	-33.08	30.75	24.37	PK
!3	6317.100	115.44	88.20	27.24	89.79	25.65	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch79,6.345G,BW160M	Humidity (%RH)	58.0

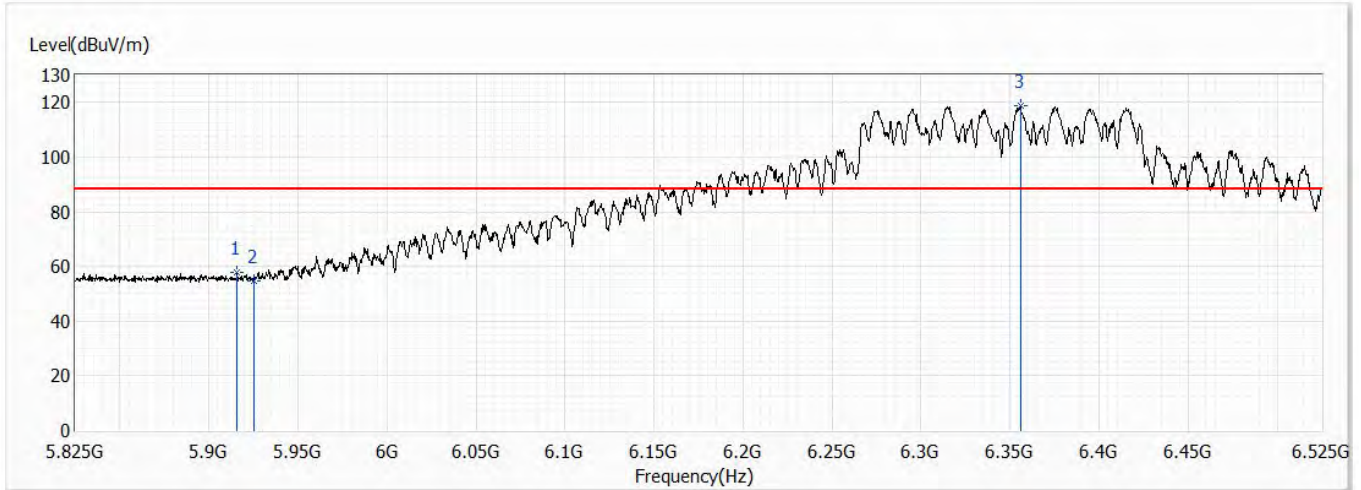


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5916.000	57.86	88.20	-30.34	33.52	24.34	PK
2	5925.000	54.82	88.20	-33.38	30.45	24.37	PK
!3	6355.950	118.66	88.20	30.46	92.90	25.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

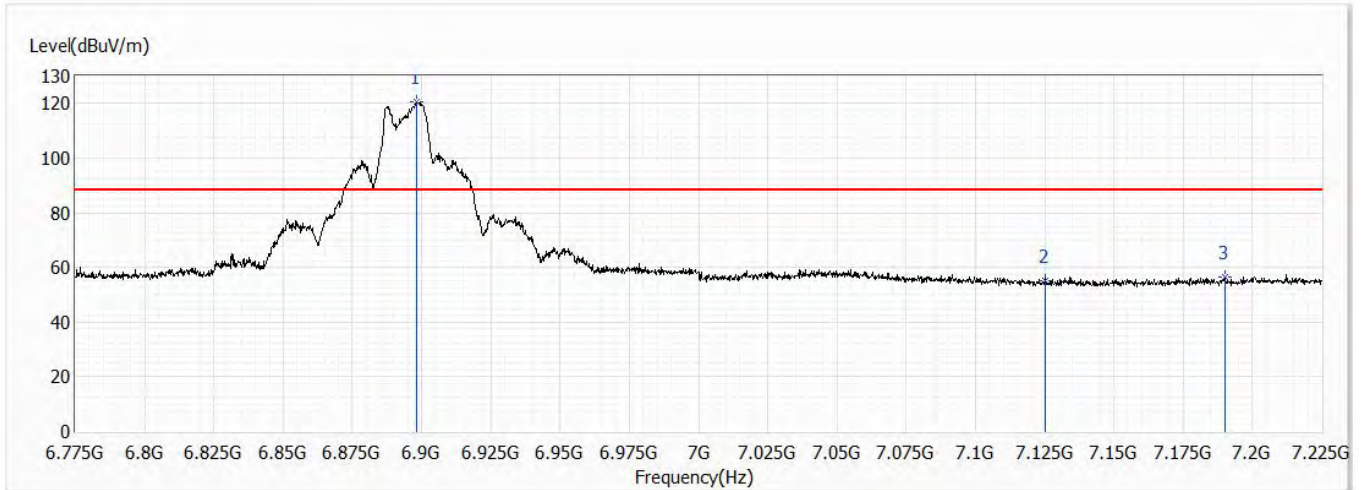


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6898.075	120.78	88.20	32.58	92.76	28.02	PK
2	7125.000	55.03	88.20	-33.17	26.10	28.93	PK
3	7189.900	56.49	88.20	-31.71	27.34	29.15	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

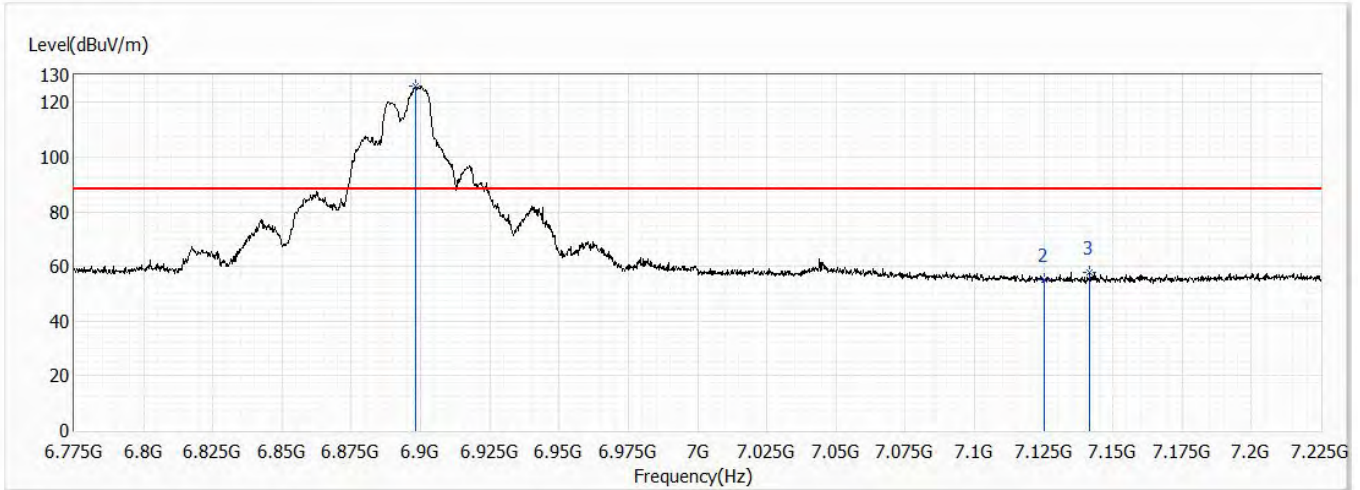


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6898.075	125.82	88.20	37.62	97.80	28.02	PK
2	7125.000	55.29	88.20	-32.91	26.36	28.93	PK
3	7141.750	57.72	88.20	-30.48	28.73	28.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

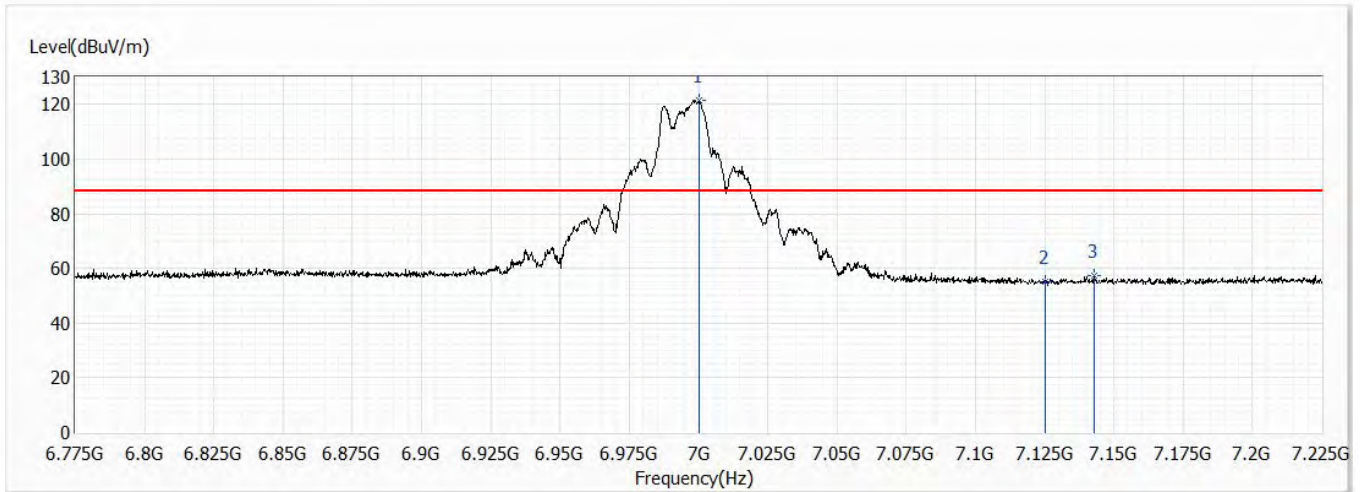


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7000.000	121.53	88.20	33.33	93.04	28.49	PK
2	7125.000	55.13	88.20	-33.07	26.20	28.93	PK
3	7142.875	57.33	88.20	-30.87	28.34	28.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

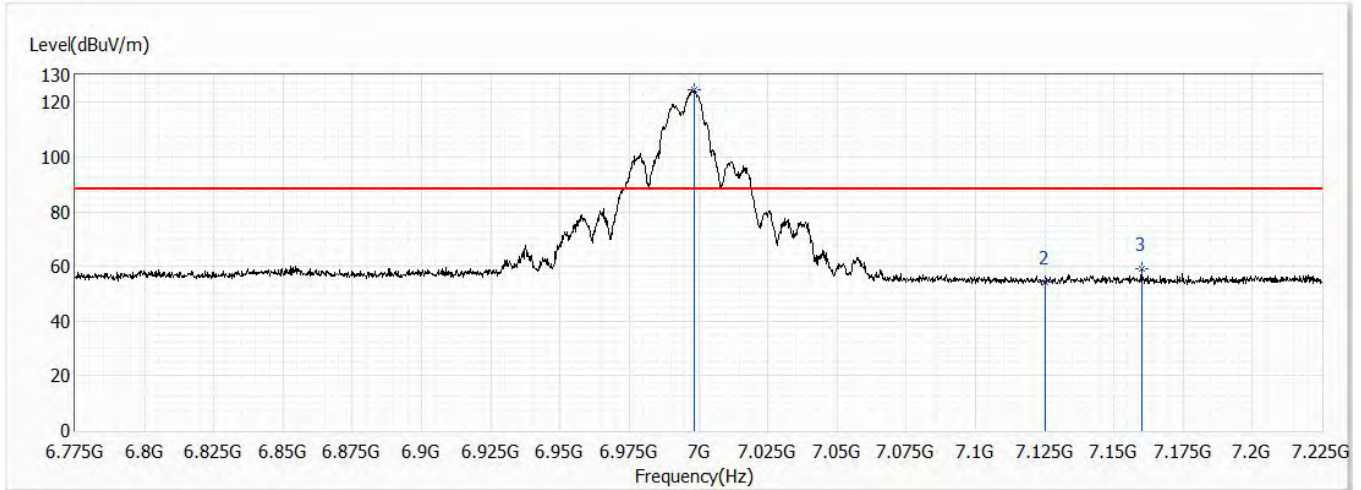


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6998.425	124.51	88.20	36.31	96.03	28.48	PK
2	7125.000	54.30	88.20	-33.90	25.37	28.93	PK
3	7159.975	58.96	88.20	-29.24	29.90	29.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11a,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

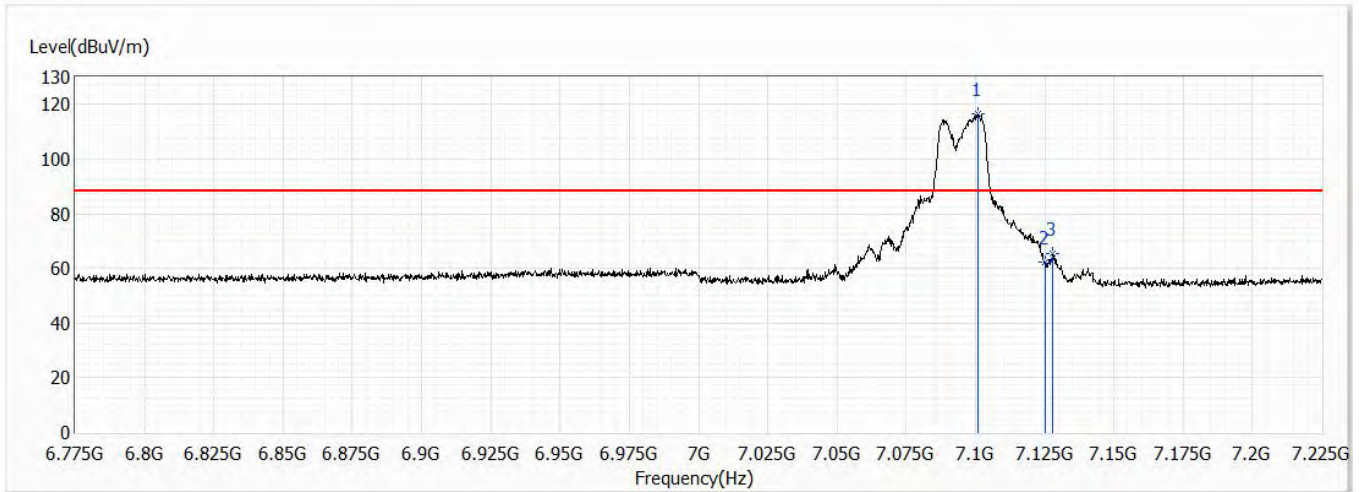


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7100.800	116.39	88.20	28.19	87.55	28.84	PK
2	7125.000	62.41	88.20	-25.79	33.48	28.93	PK
3	7128.025	65.62	88.20	-22.58	36.68	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11a,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

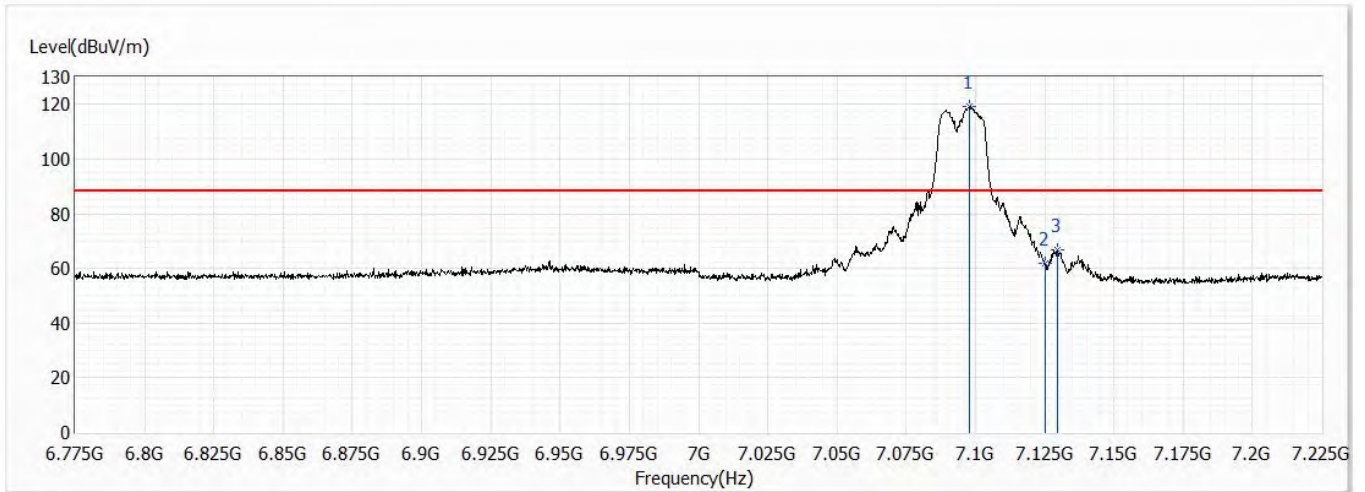


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7097.650	119.37	88.20	31.17	90.53	28.84	PK
2	7125.000	61.67	88.20	-26.53	32.74	28.93	PK
3	7129.825	66.80	88.20	-21.40	37.86	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

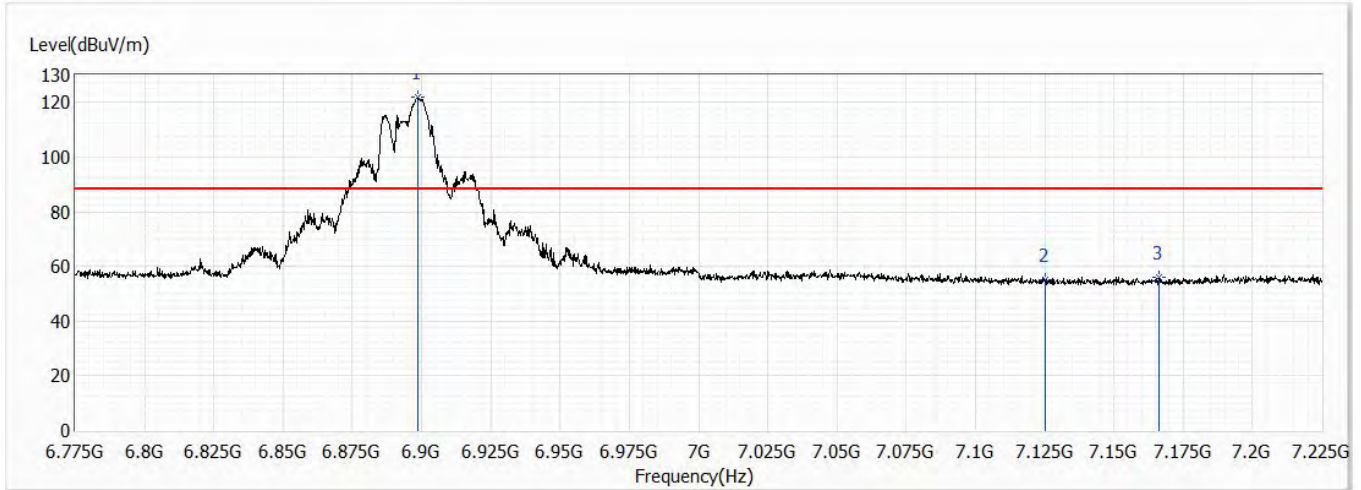


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6898.750	121.96	88.20	33.76	93.93	28.03	PK
2	7125.000	54.93	88.20	-33.27	26.00	28.93	PK
3	7166.050	55.84	88.20	-32.36	26.77	29.07	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

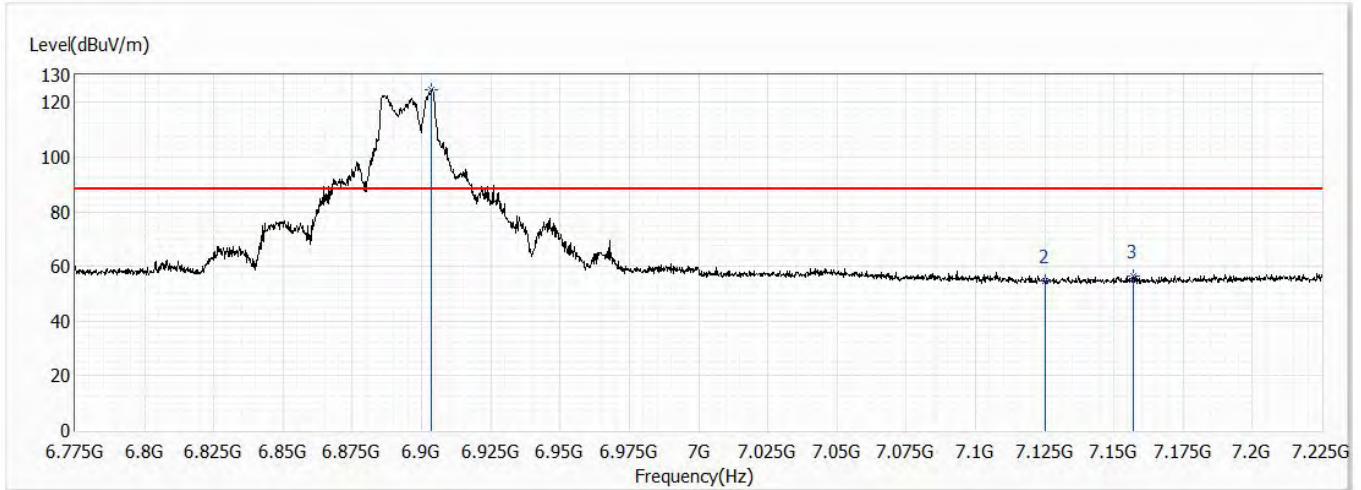


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6903.700	124.73	88.20	36.53	96.69	28.04	PK
2	7125.000	54.66	88.20	-33.54	25.73	28.93	PK
3	7156.825	56.42	88.20	-31.78	27.38	29.04	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

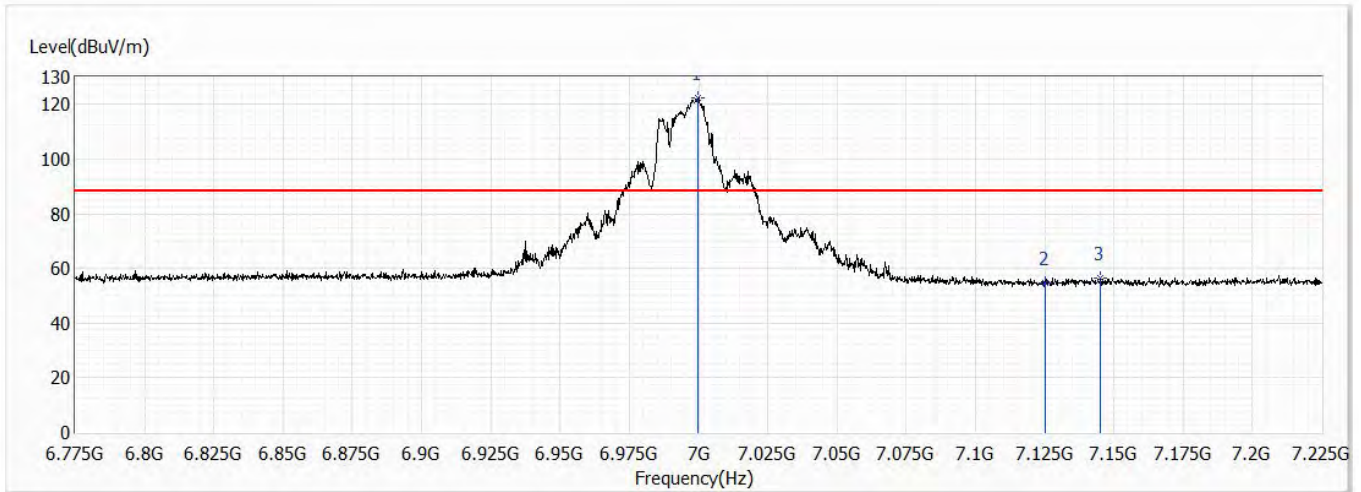


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6999.775	122.40	88.20	34.20	93.91	28.49	PK
2	7125.000	54.58	88.20	-33.62	25.65	28.93	PK
3	7145.125	56.44	88.20	-31.76	27.44	29.00	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

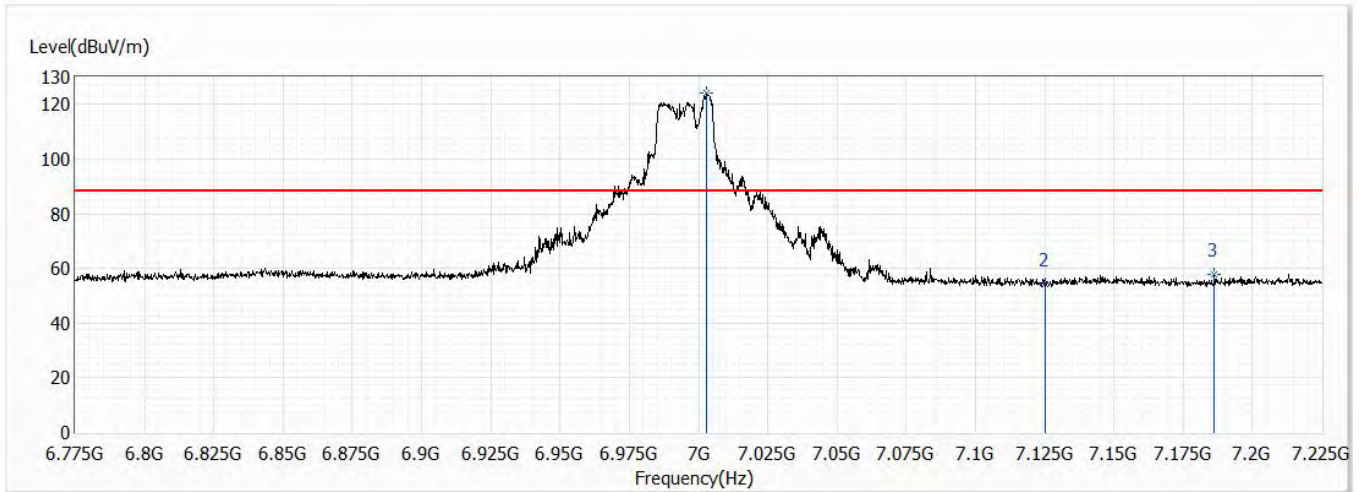


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7002.925	123.96	88.20	35.76	95.46	28.50	PK
2	7125.000	54.25	88.20	-33.95	25.32	28.93	PK
3	7186.300	57.61	88.20	-30.59	28.46	29.15	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,7.095G,BW20M	Humidity (%RH)	58.0

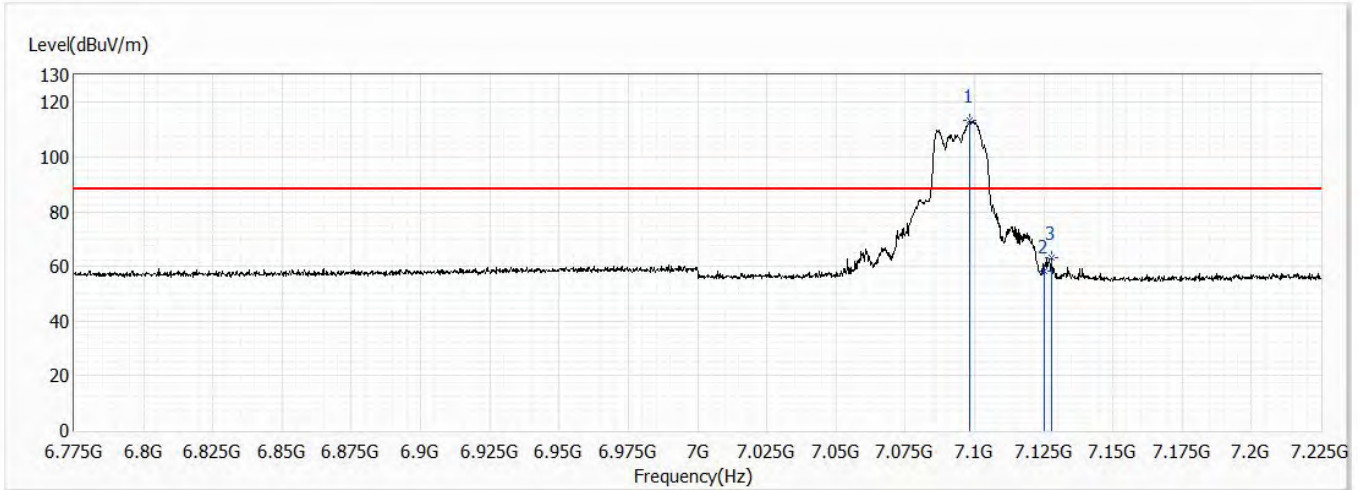


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7098.325	113.50	88.20	25.30	84.66	28.84	PK
2	7125.000	58.25	88.20	-29.95	29.32	28.93	PK
3	7127.800	63.33	88.20	-24.87	34.39	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,7.095G,BW20M	Humidity (%RH)	58.0

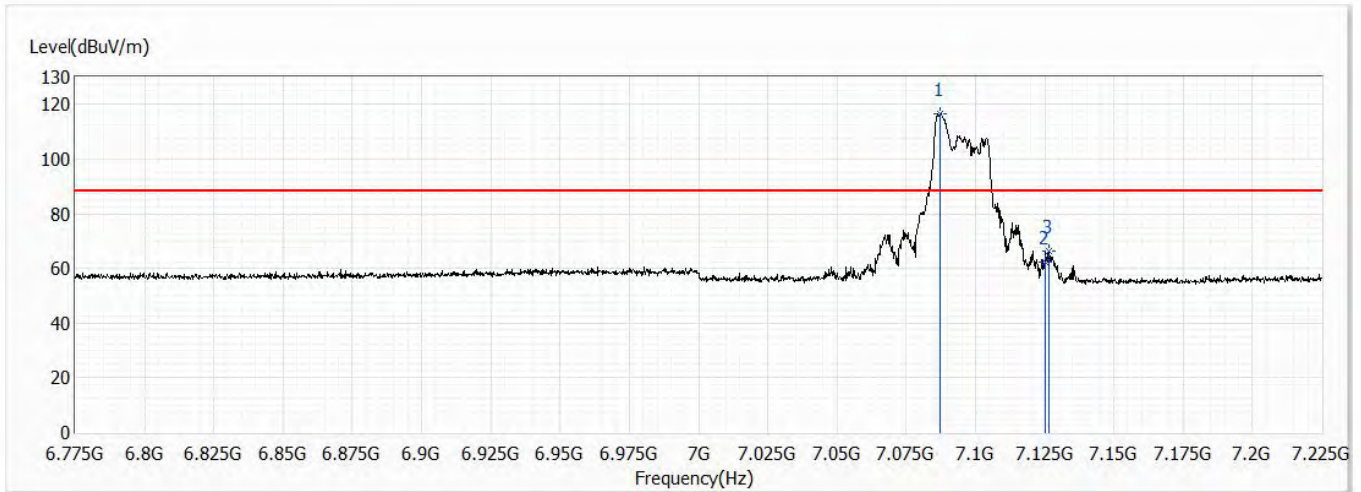


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7087.075	116.63	88.20	28.43	87.83	28.80	PK
2	7125.000	62.25	88.20	-25.95	33.32	28.93	PK
3	7126.675	66.45	88.20	-21.75	37.51	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0

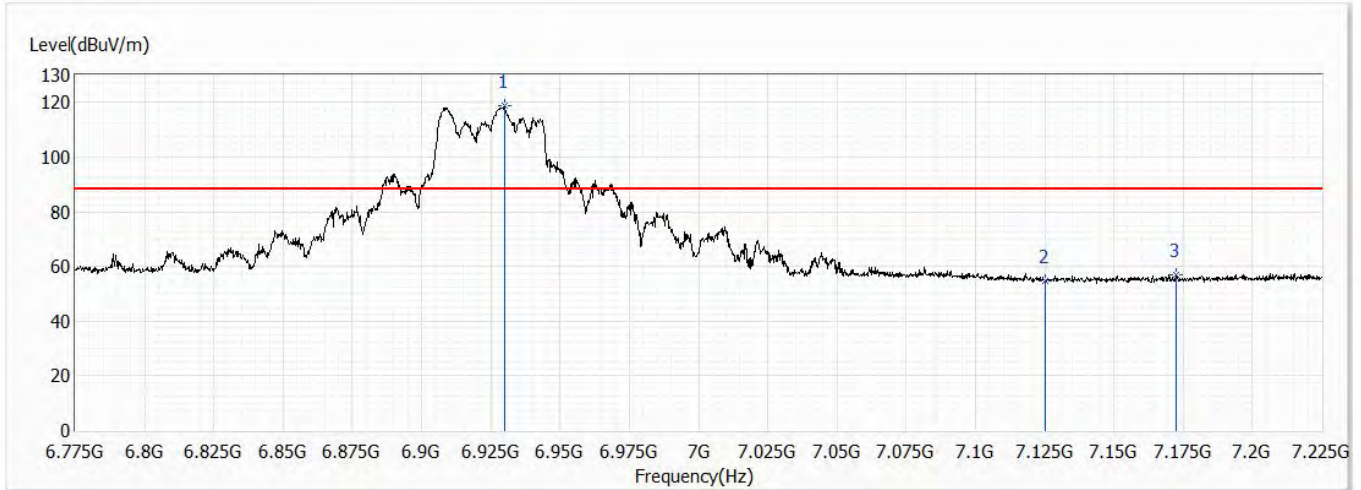


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6929.800	118.59	88.20	30.39	90.43	28.16	PK
2	7125.000	54.80	88.20	-33.40	25.87	28.93	PK
3	7172.575	57.09	88.20	-31.11	27.99	29.10	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0

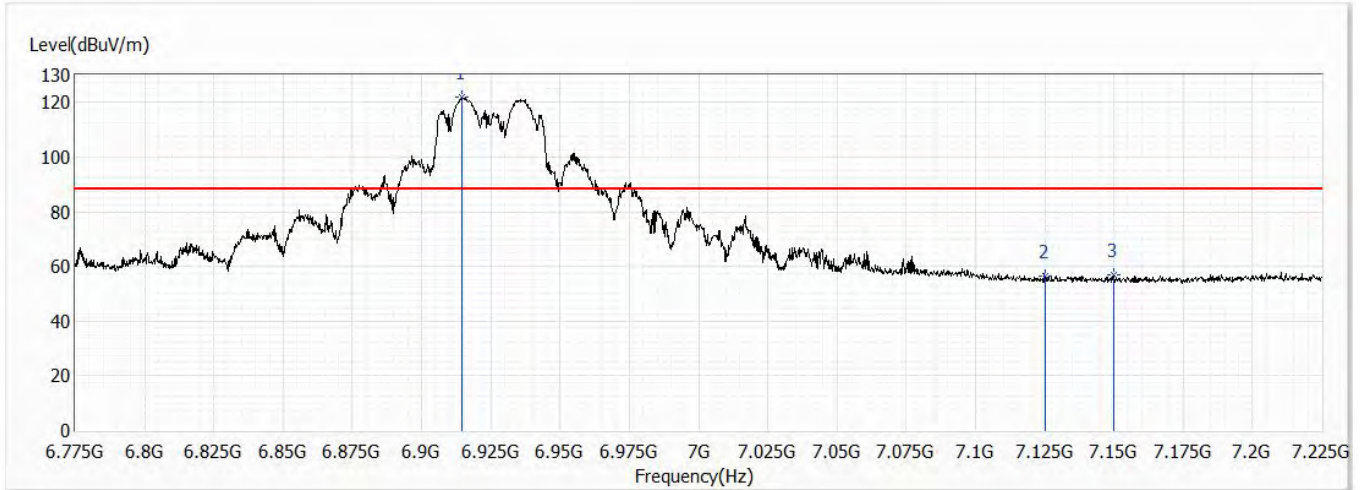


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6914.500	121.92	88.20	33.72	93.81	28.11	PK
2	7125.000	56.55	88.20	-31.65	27.62	28.93	PK
3	7149.850	57.09	88.20	-31.11	28.07	29.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

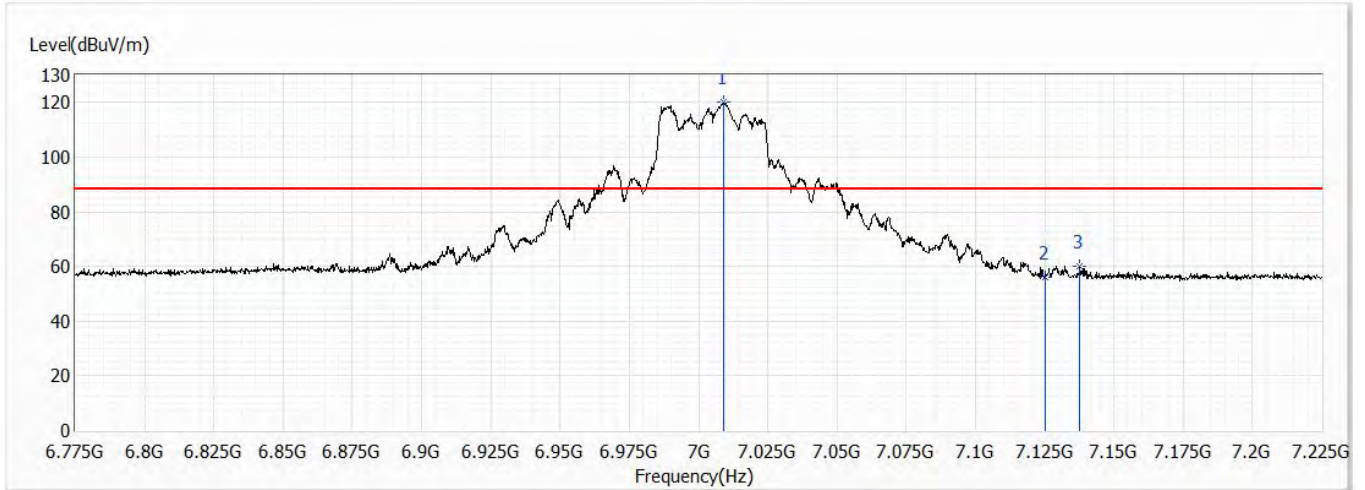


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7009.225	120.03	88.20	31.83	91.50	28.53	PK
2	7125.000	56.24	88.20	-31.96	27.31	28.93	PK
3	7137.700	60.26	88.20	-27.94	31.28	28.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

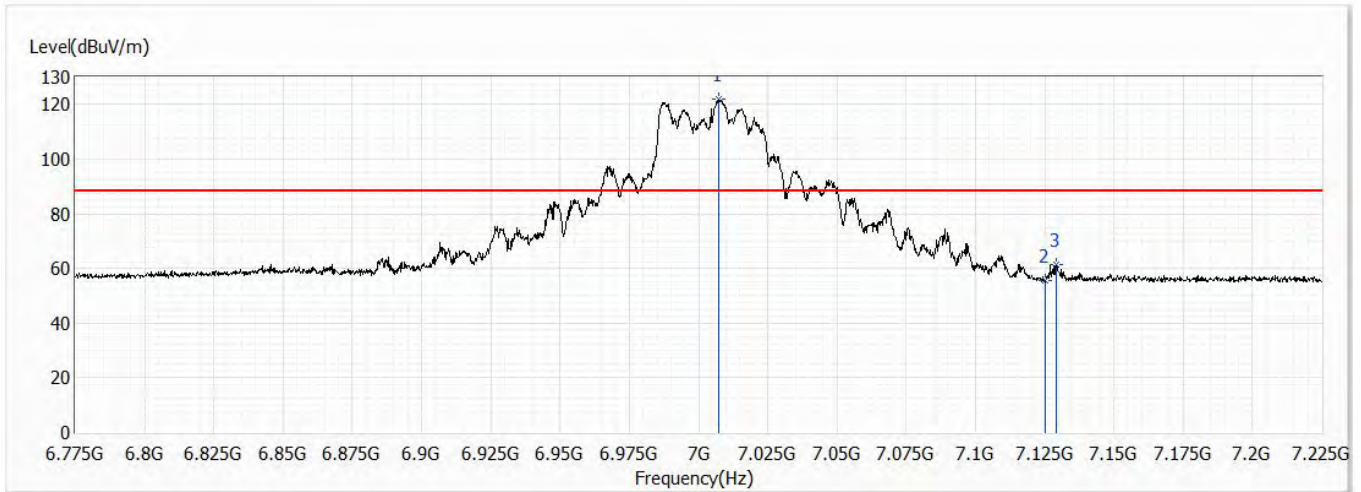


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7007.200	121.96	88.20	33.76	93.44	28.52	PK
2	7125.000	55.40	88.20	-32.80	26.47	28.93	PK
3	7129.375	61.29	88.20	-26.91	32.35	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

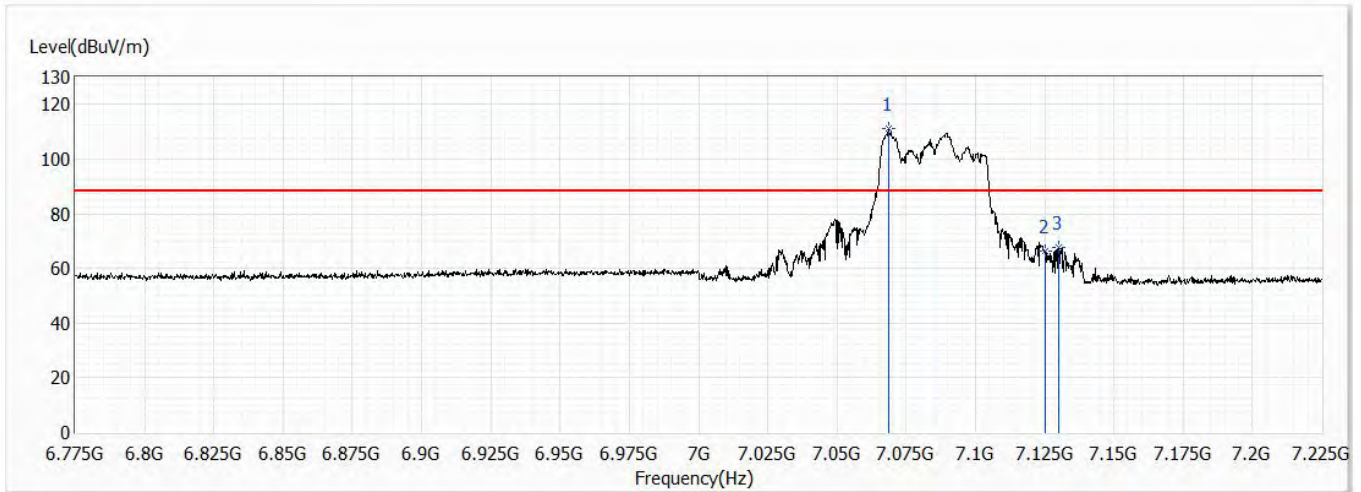


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7068.625	111.15	88.20	22.95	82.43	28.72	PK
2	7125.000	66.19	88.20	-22.01	37.26	28.93	PK
3	7130.050	67.64	88.20	-20.56	38.70	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

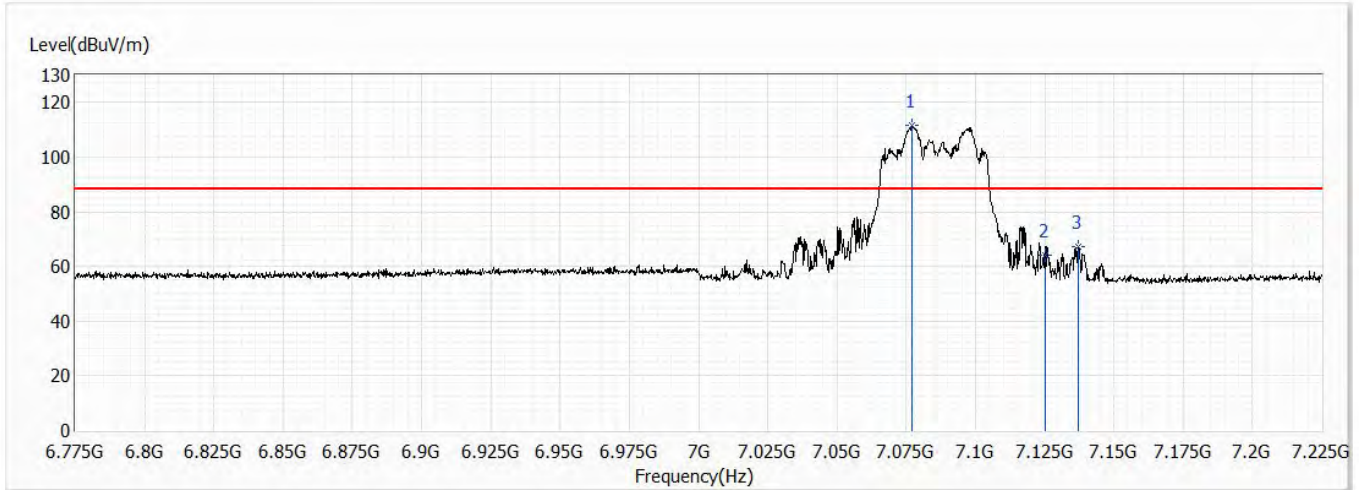


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7077.175	111.63	88.20	23.43	82.87	28.76	PK
2	7125.000	63.92	88.20	-24.28	34.99	28.93	PK
3	7137.025	67.17	88.20	-21.03	38.19	28.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

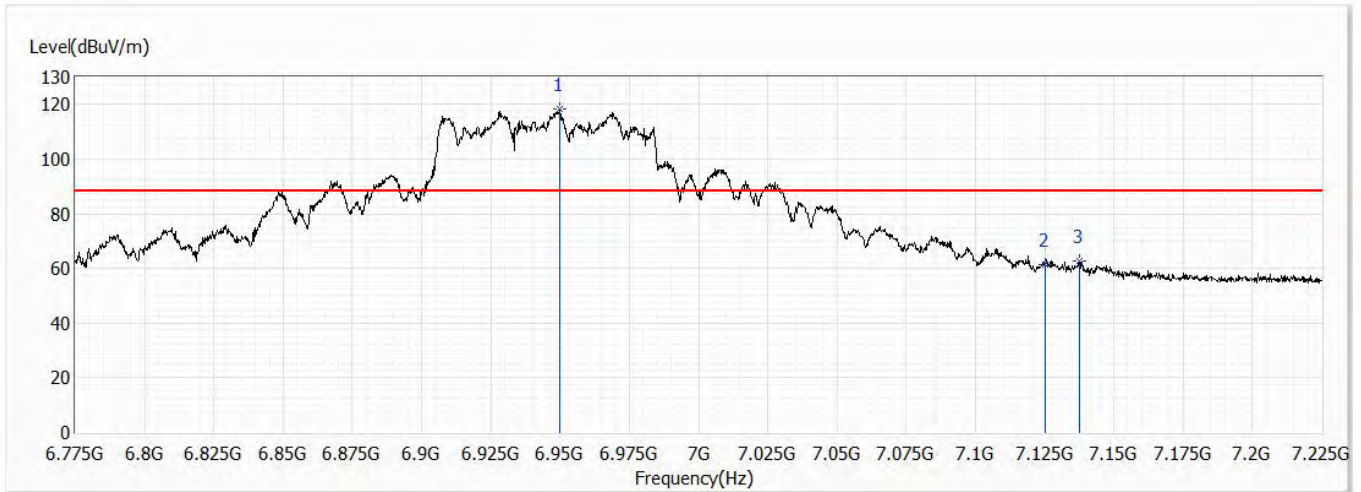


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6950.050	118.14	88.20	29.94	89.88	28.26	PK
2	7125.000	61.41	88.20	-26.79	32.48	28.93	PK
3	7137.700	62.68	88.20	-25.52	33.70	28.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

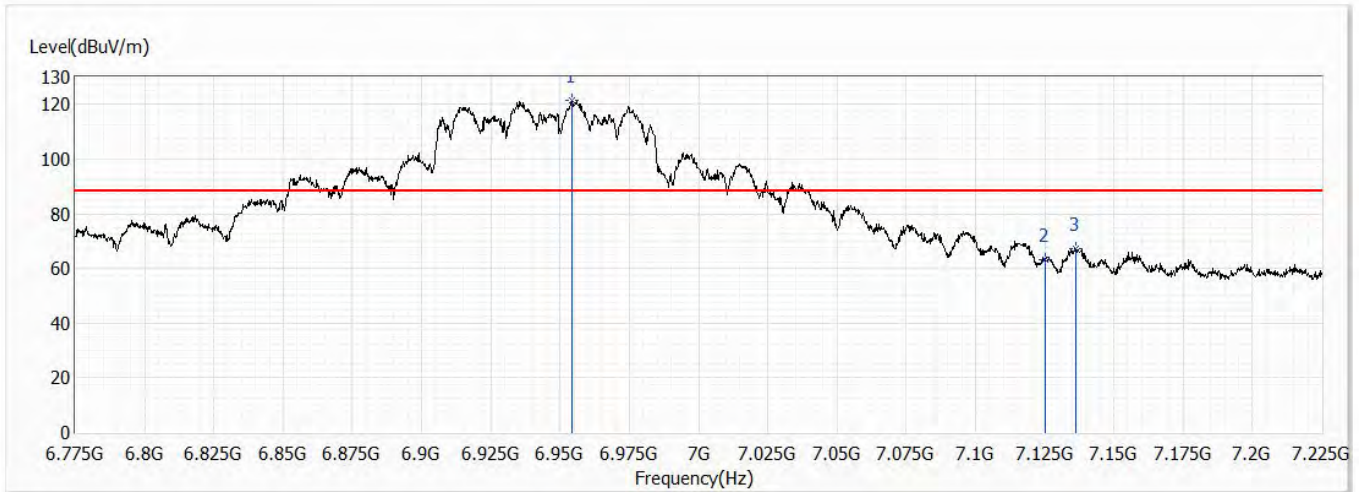


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6954.325	121.60	88.20	33.40	93.32	28.28	PK
2	7125.000	63.32	88.20	-24.88	34.39	28.93	PK
3	7136.350	67.05	88.20	-21.15	38.07	28.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

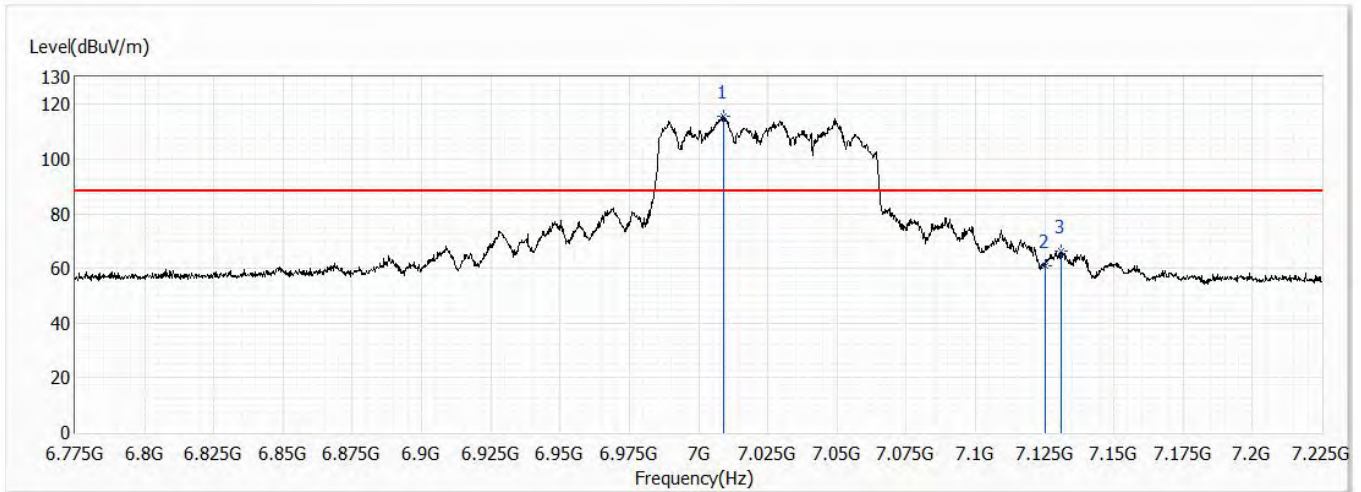


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7009.225	115.47	88.20	27.27	86.94	28.53	PK
2	7125.000	61.18	88.20	-27.02	32.25	28.93	PK
3	7130.950	66.31	88.20	-21.89	37.36	28.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/18
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

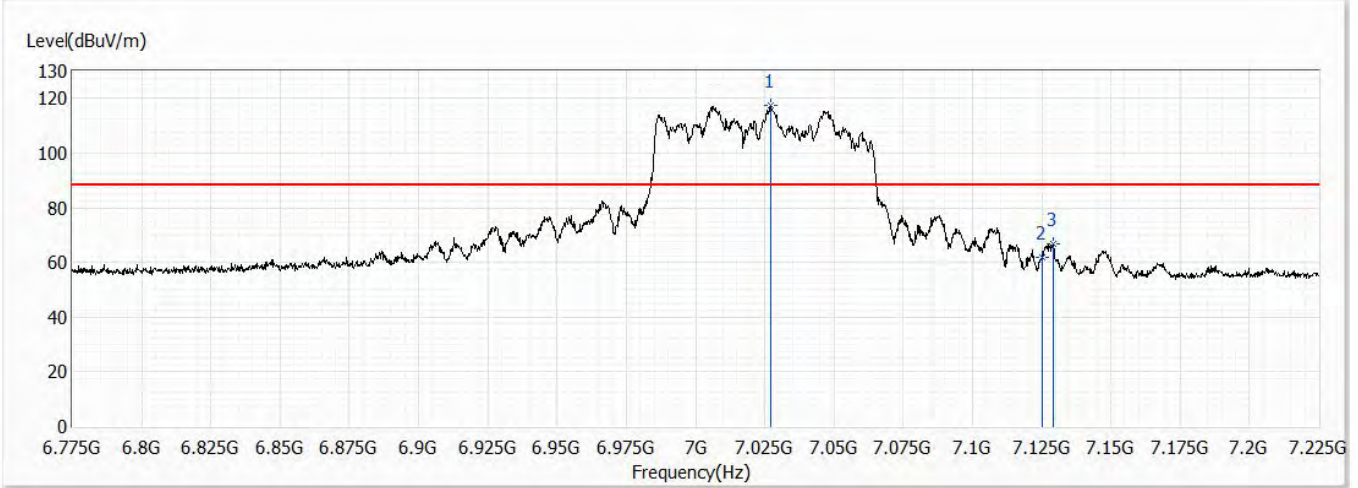


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7027.000	117.50	88.20	29.30	88.92	28.58	PK
2	7125.000	61.68	88.20	-26.52	32.75	28.93	PK
3	7129.375	66.58	88.20	-21.62	37.64	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/4/28
Test Mode	Mode 1	Engineer	Rueyyan Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

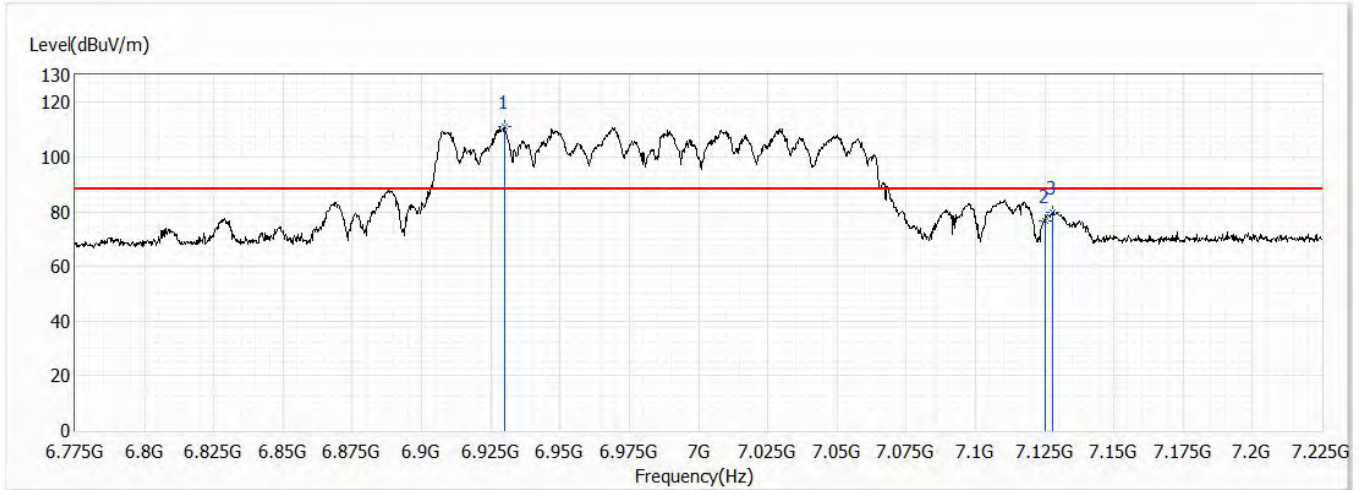


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6929.800	111.07	88.20	22.87	82.91	28.16	PK
2	7125.000	76.68	88.20	-11.52	47.75	28.93	PK
3	7128.025	79.77	88.20	-8.43	50.83	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/4/28
Test Mode	Mode 1	Engineer	Rueyyan Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

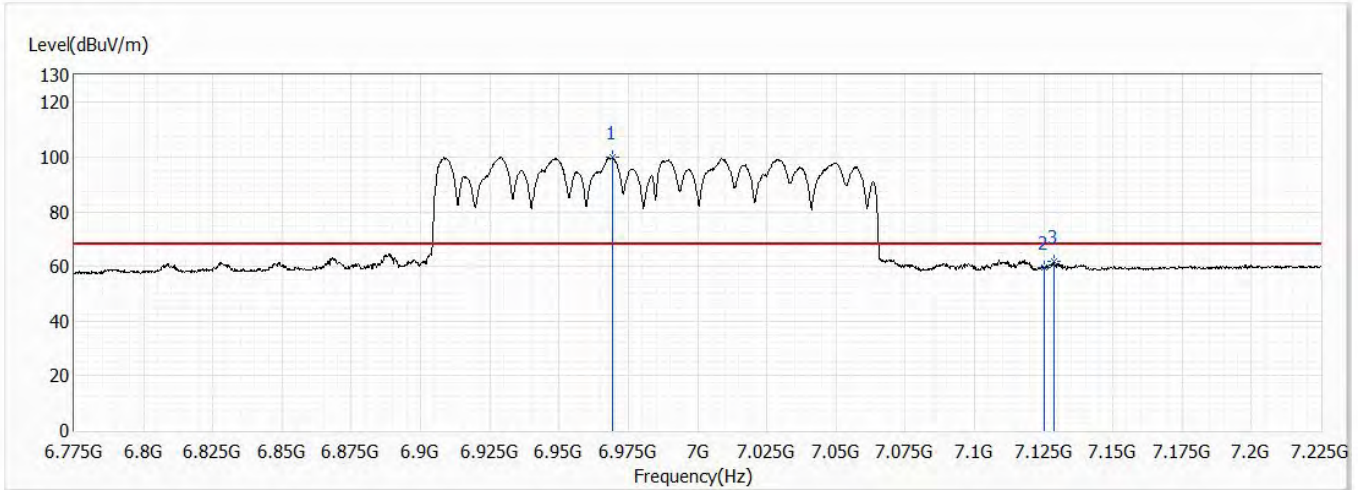


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6969.175	99.96	68.20	31.76	71.61	28.35	AV
2	7125.000	59.60	68.20	-8.60	30.67	28.93	AV
3	7128.700	61.82	68.20	-6.38	32.88	28.94	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

=

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/4/28
Test Mode	Mode 1	Engineer	Rueyyan Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

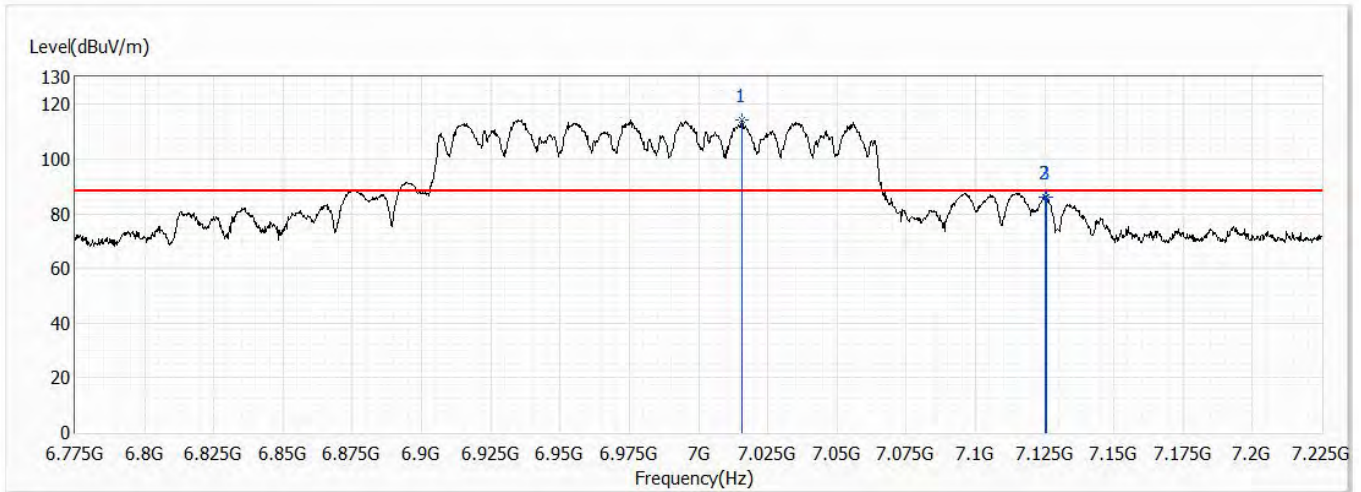


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7015.525	114.36	88.20	26.16	85.82	28.54	PK
2	7125.000	85.91	88.20	-2.29	56.98	28.93	PK
3	7125.550	85.95	88.20	-2.25	57.01	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/4/28
Test Mode	Mode 1	Engineer	Rueyyan Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

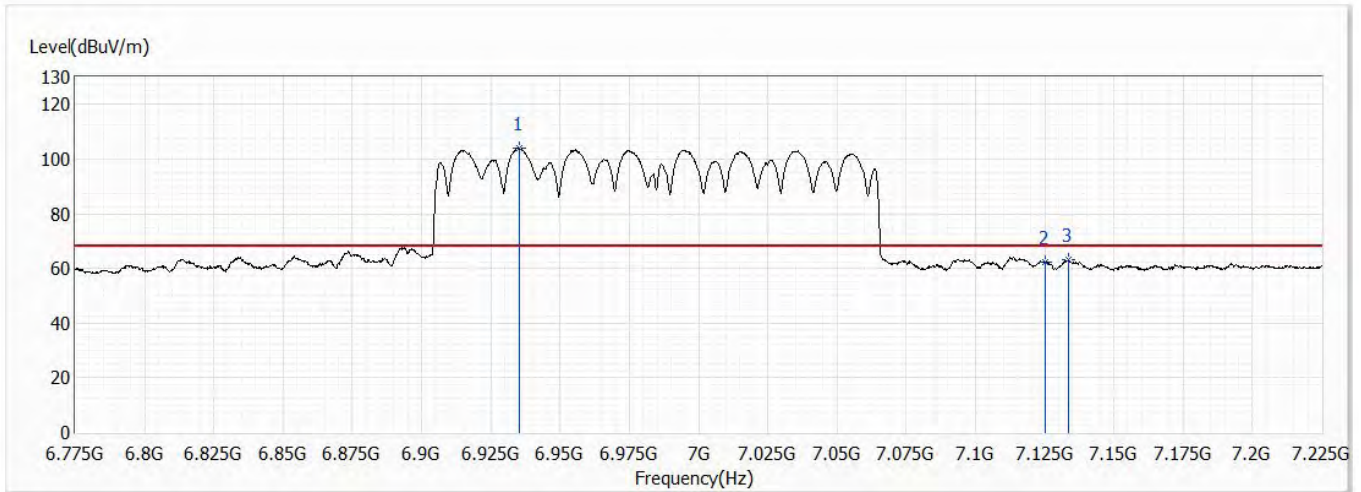


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6935.200	103.93	68.20	35.73	75.75	28.18	AV
2	7125.000	62.25	68.20	-5.95	33.32	28.93	AV
3	7133.425	63.16	68.20	-5.04	34.20	28.96	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Non-beamforming mode for RU-Edge

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch33,6.115G,BW20M	Humidity (%RH)	58.0

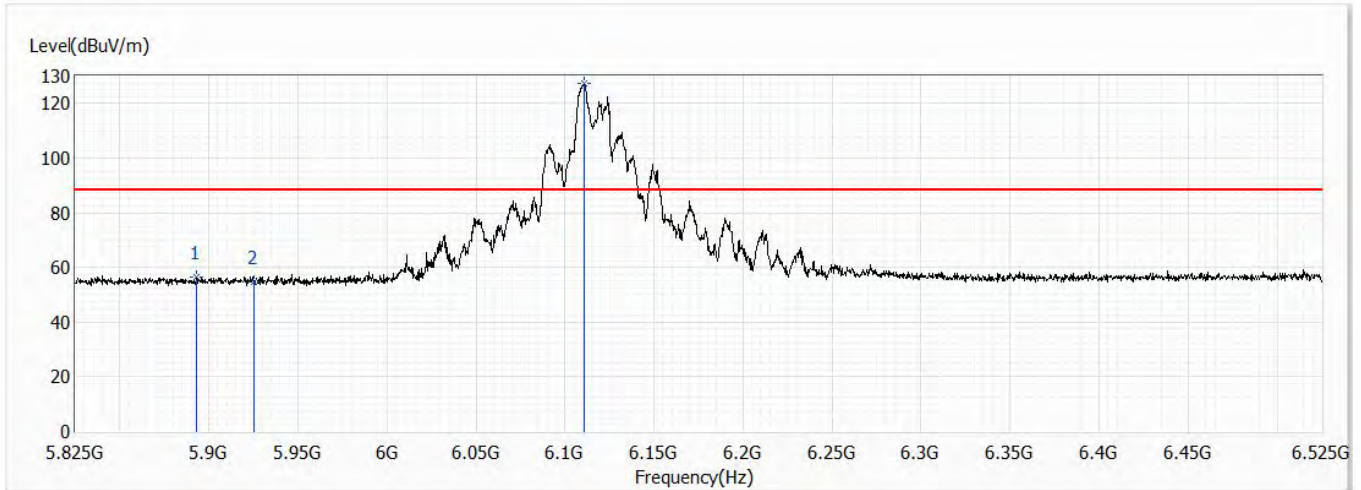


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5893.250	56.60	88.20	-31.60	32.33	24.27	PK
2	5925.000	54.74	88.20	-33.46	30.37	24.37	PK
!3	6110.950	127.31	88.20	39.11	102.33	24.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch33,6.115G,BW20M	Humidity (%RH)	58.0

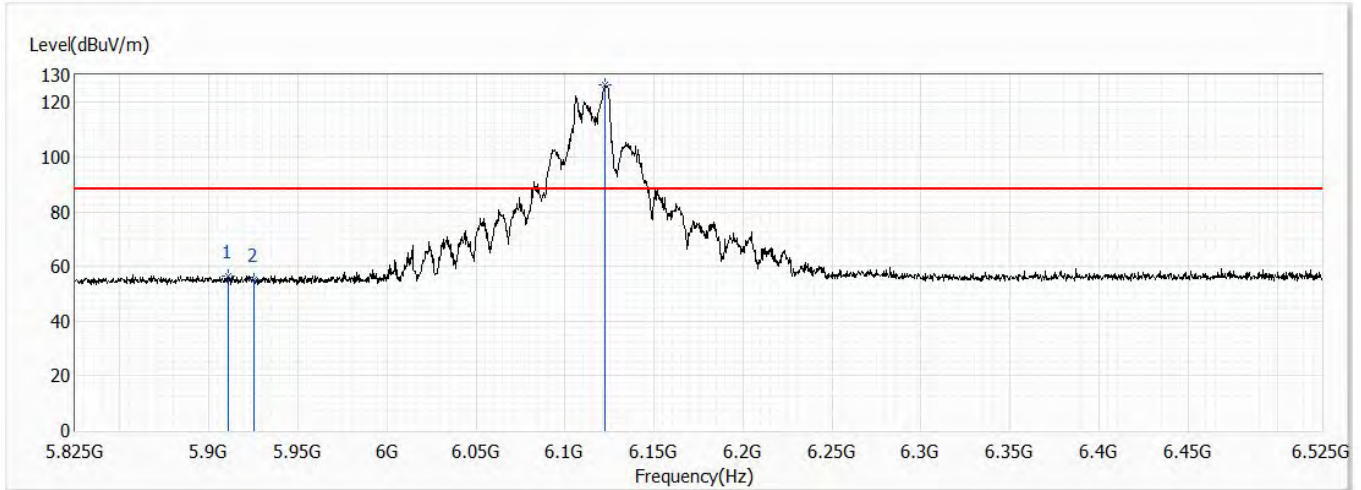


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5910.750	56.70	88.20	-31.50	32.36	24.34	PK
2	5925.000	54.96	88.20	-33.24	30.59	24.37	PK
!3	6122.500	126.20	88.20	38.00	101.18	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch61,6.255G,BW20M	Humidity (%RH)	58.0

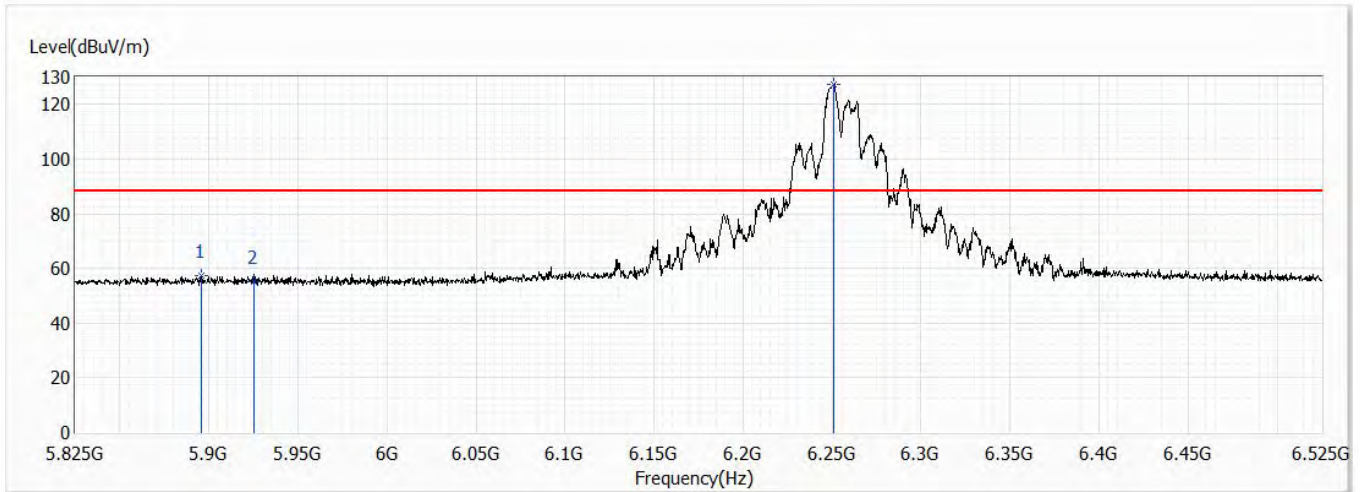


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5895.700	57.47	88.20	-30.73	33.20	24.27	PK
2	5925.000	54.96	88.20	-33.24	30.59	24.37	PK
!3	6250.600	127.45	88.20	39.25	101.99	25.46	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch61,6.255G,BW20M	Humidity (%RH)	58.0

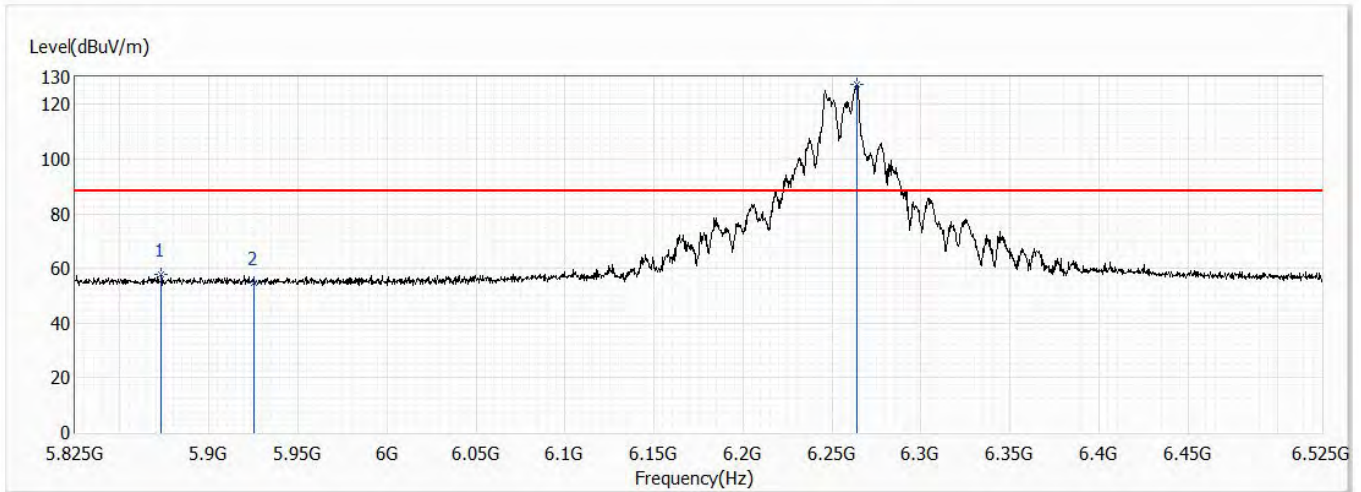


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5873.300	57.67	88.20	-30.53	33.46	24.21	PK
2	5925.000	54.83	88.20	-33.37	30.46	24.37	PK
!3	6263.900	127.49	88.20	39.29	101.98	25.51	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch93,6.415G,BW20M	Humidity (%RH)	58.0

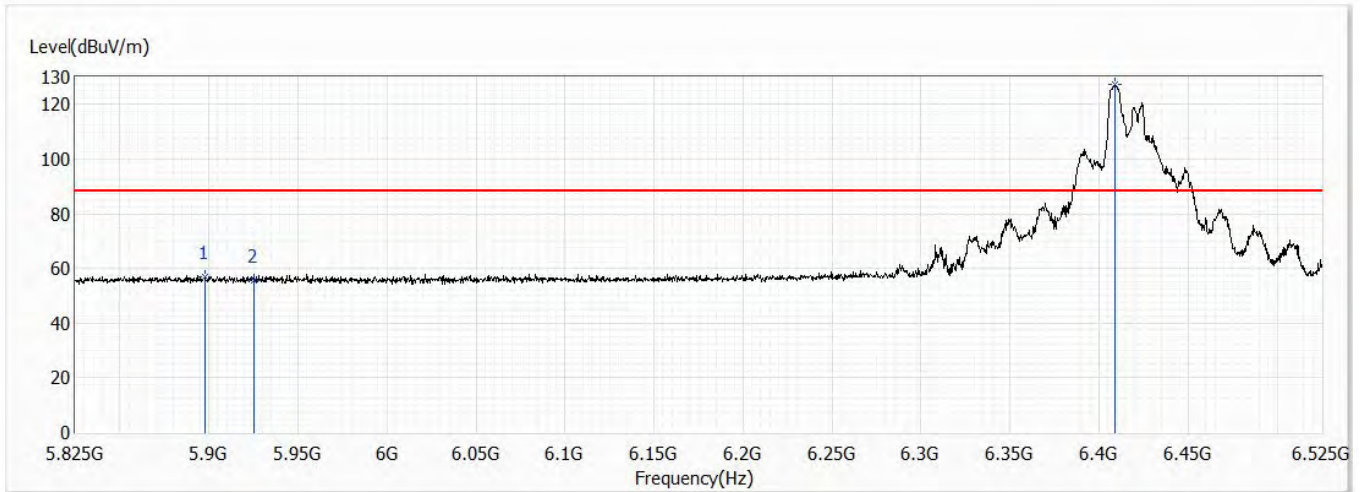


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5897.800	57.08	88.20	-31.12	32.78	24.30	PK
2	5925.000	55.65	88.20	-32.55	31.28	24.37	PK
!3	6408.800	127.29	88.20	39.09	101.38	25.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch93,6.415G,BW20M	Humidity (%RH)	58.0

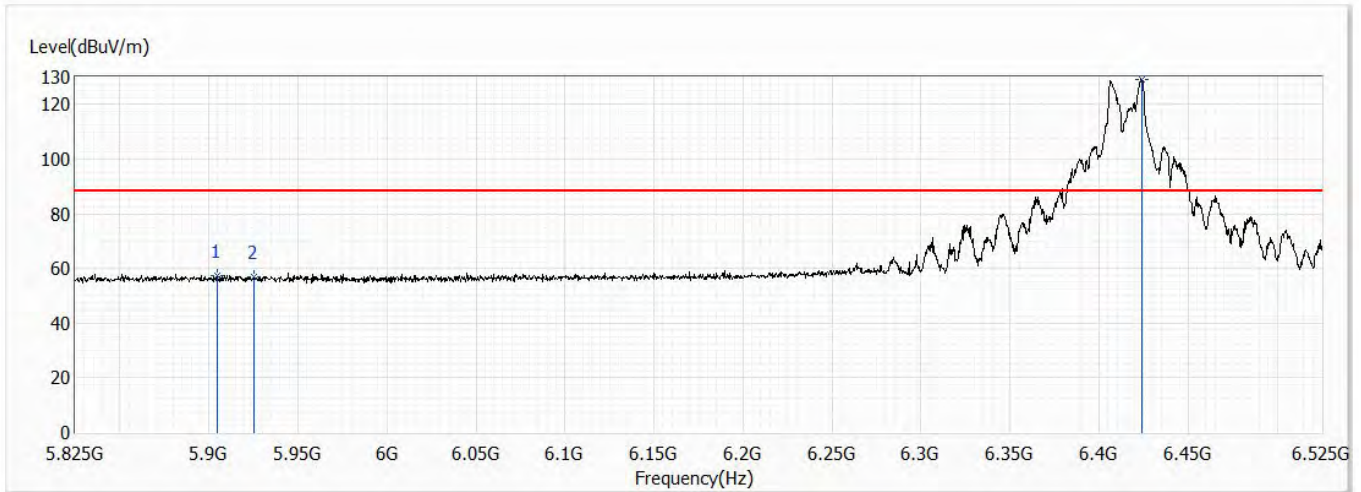


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5904.450	57.49	88.20	-30.71	33.17	24.32	PK
2	5925.000	56.94	88.20	-31.26	32.57	24.37	PK
!3	6424.200	129.15	88.20	40.95	103.20	25.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch35,6.125G,BW40M	Humidity (%RH)	58.0

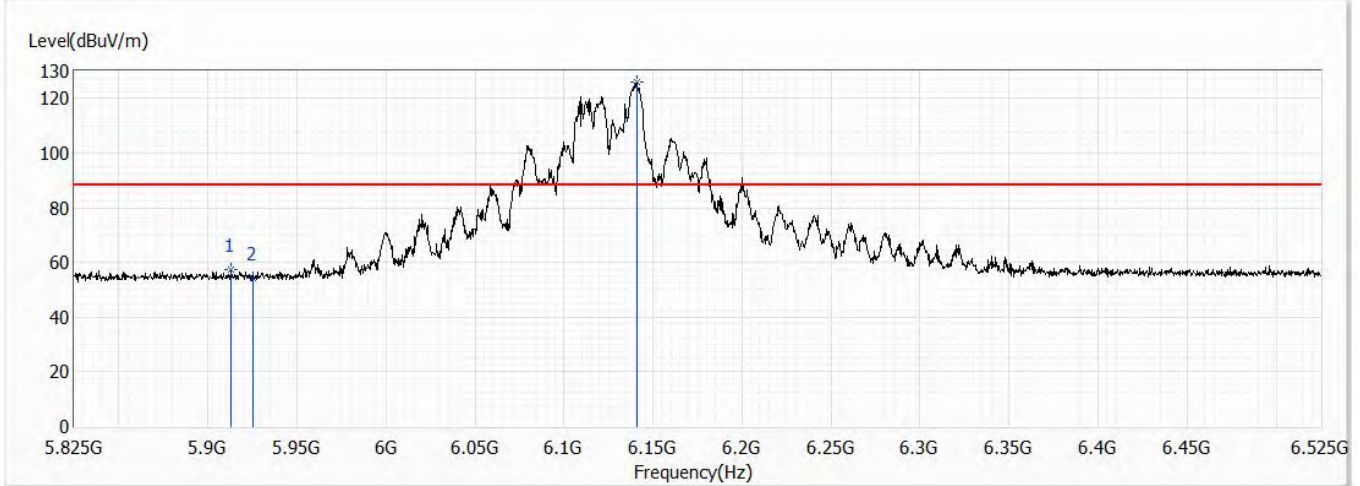


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5913.200	57.30	88.20	-30.90	32.96	24.34	PK
2	5925.000	54.04	88.20	-34.16	29.67	24.37	PK
!3	6140.700	125.90	88.20	37.70	100.82	25.08	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch35,6.125G,BW40M	Humidity (%RH)	58.0

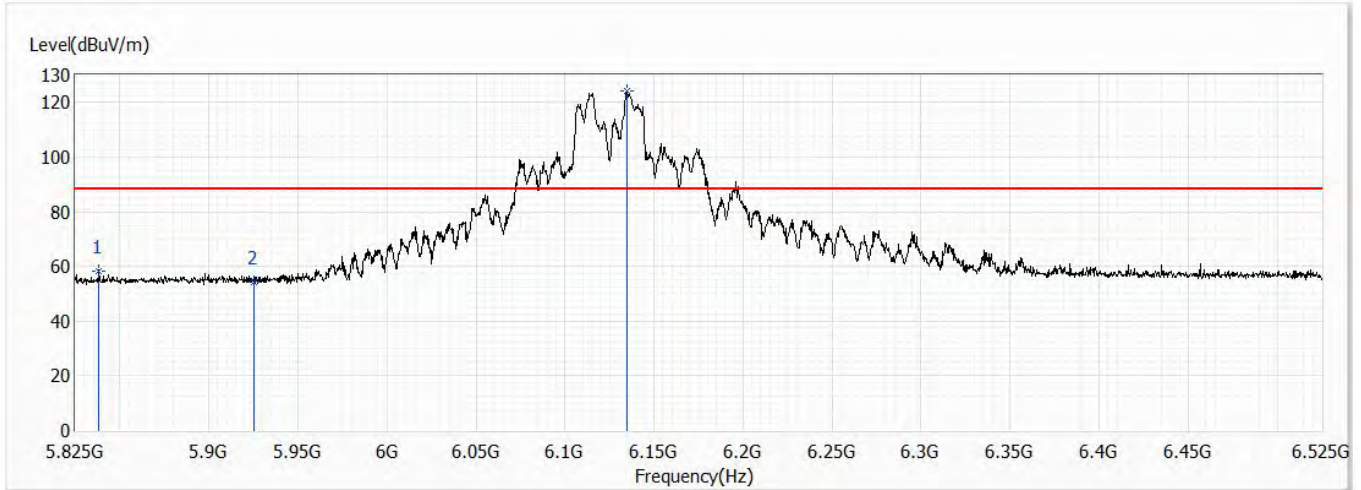


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5838.300	58.50	88.20	-29.70	34.40	24.10	PK
2	5925.000	54.35	88.20	-33.85	29.98	24.37	PK
!3	6134.750	123.99	88.20	35.79	98.93	25.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch59,6.245G,BW40M	Humidity (%RH)	58.0

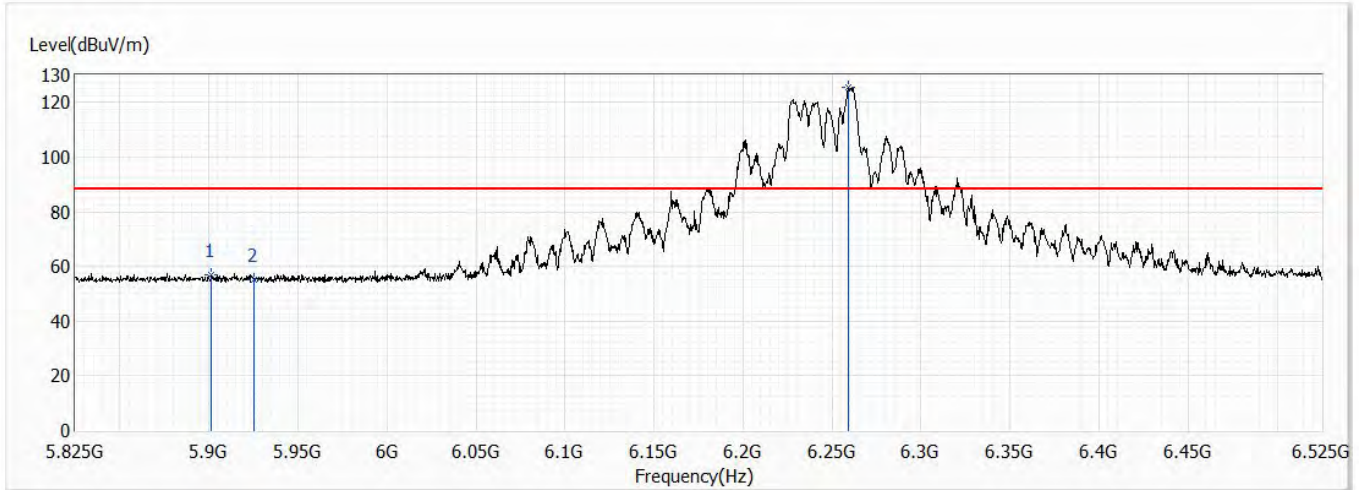


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5901.300	57.05	88.20	-31.15	32.75	24.30	PK
2	5925.000	55.20	88.20	-33.00	30.83	24.37	PK
!3	6259.350	125.58	88.20	37.38	100.09	25.49	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch59,6.245G,BW40M	Humidity (%RH)	58.0

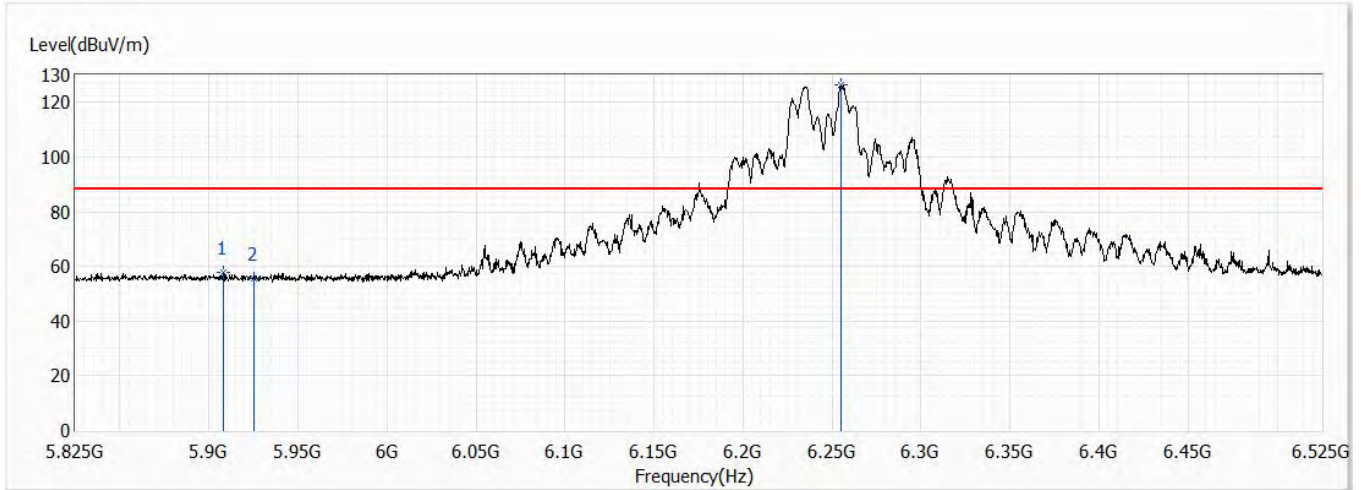


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5908.300	57.67	88.20	-30.53	33.35	24.32	PK
2	5925.000	55.64	88.20	-32.56	31.27	24.37	PK
!3	6254.800	126.52	88.20	38.32	101.05	25.47	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch91,6.405G,BW40M	Humidity (%RH)	58.0

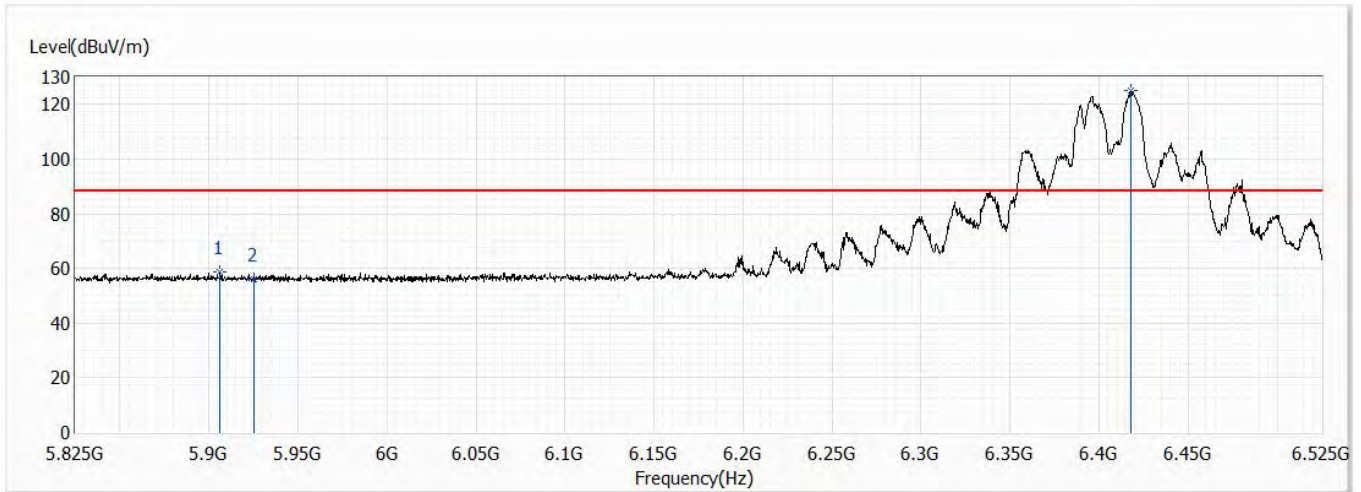


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5906.200	58.84	88.20	-29.36	34.52	24.32	PK
2	5925.000	55.91	88.20	-32.29	31.54	24.37	PK
!3	6417.900	124.91	88.20	36.71	98.97	25.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch91,6.405G,BW40M	Humidity (%RH)	58.0

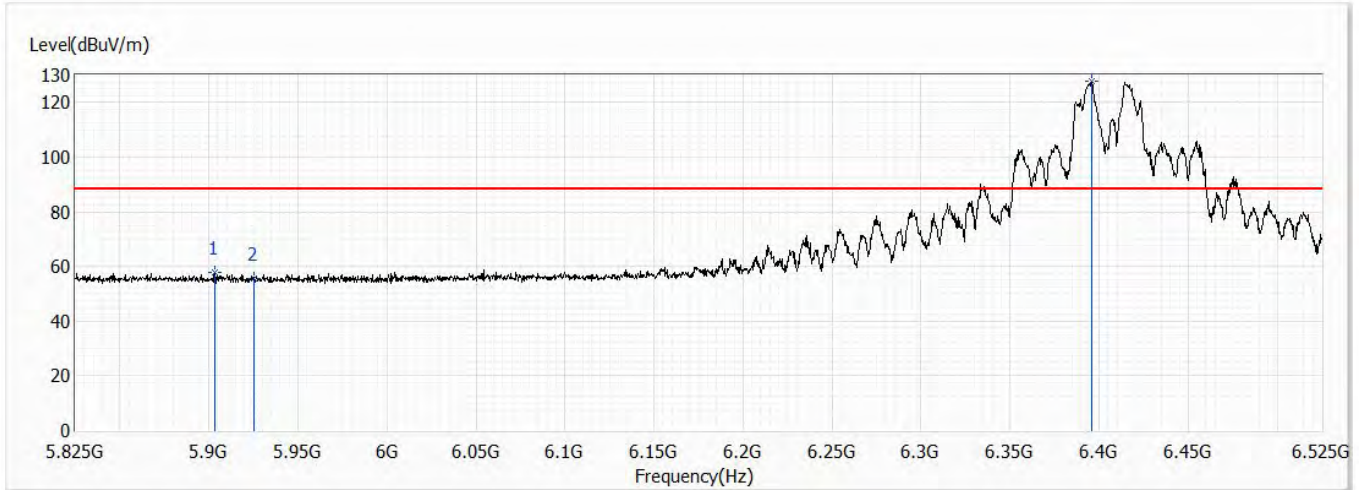


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5903.050	57.77	88.20	-30.43	33.47	24.30	PK
2	5925.000	55.47	88.20	-32.73	31.10	24.37	PK
!3	6395.850	127.69	88.20	39.49	101.82	25.87	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch39,6.145G,BW80M	Humidity (%RH)	58.0

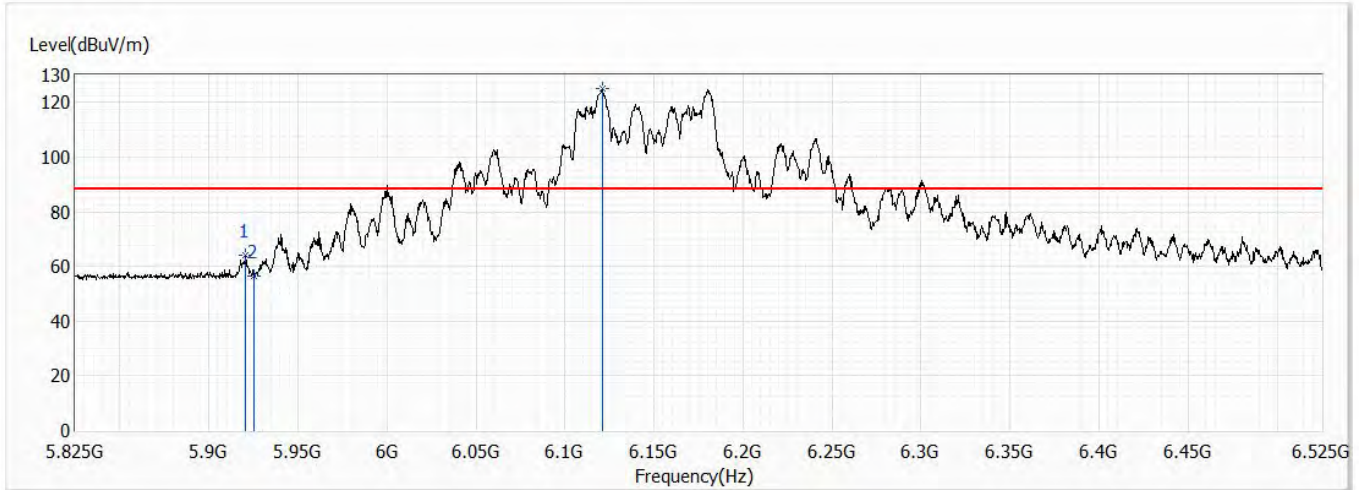


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5920.550	63.91	88.20	-24.29	39.55	24.36	PK
2	5925.000	56.60	88.20	-31.60	32.23	24.37	PK
!3	6120.750	124.92	88.20	36.72	99.90	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch39,6.145G,BW80M	Humidity (%RH)	58.0

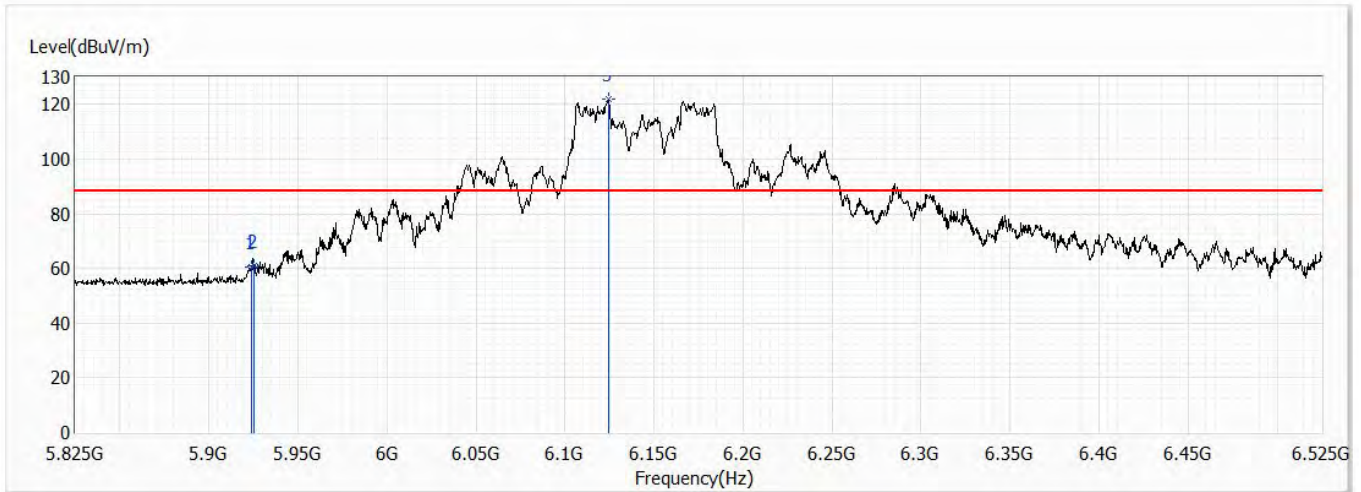


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5923.700	60.64	88.20	-27.56	36.28	24.36	PK
2	5925.000	60.80	88.20	-27.40	36.43	24.37	PK
!3	6124.250	122.00	88.20	33.80	96.98	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch55,6.225G,BW80M	Humidity (%RH)	58.0

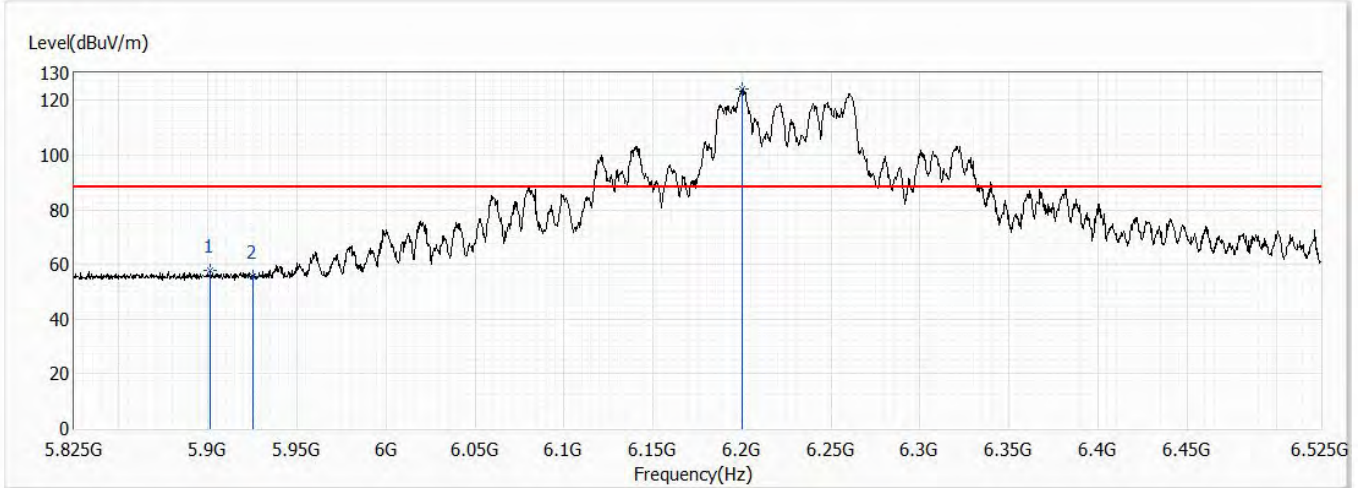


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5901.300	57.99	88.20	-30.21	33.69	24.30	PK
2	5925.000	55.63	88.20	-32.57	31.26	24.37	PK
!3	6199.850	124.34	88.20	36.14	99.05	25.29	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch55,6.225G,BW80M	Humidity (%RH)	58.0

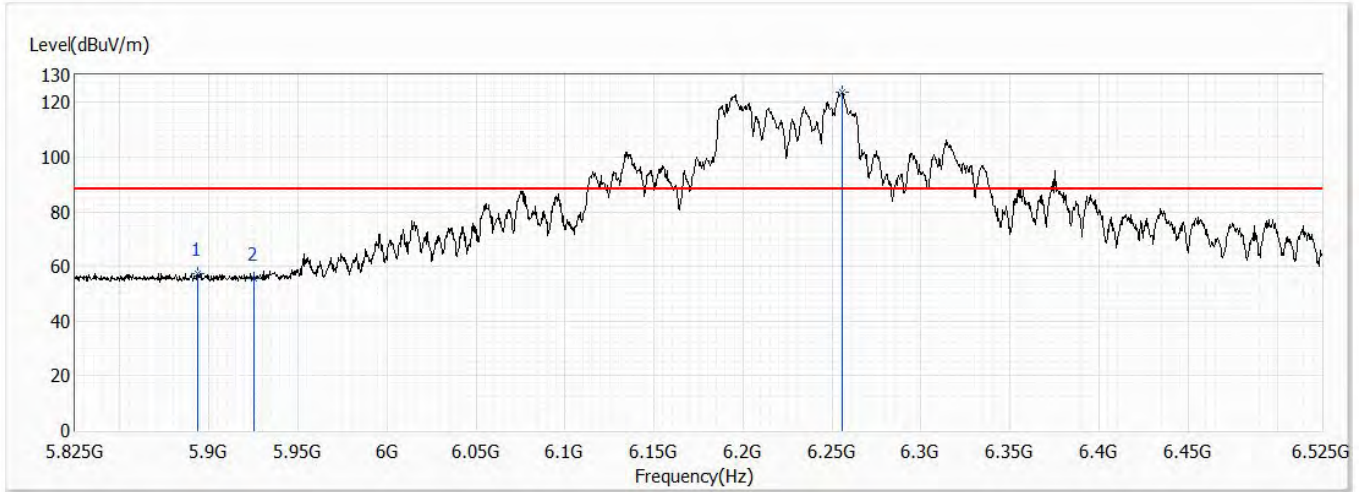


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5893.600	57.44	88.20	-30.76	33.17	24.27	PK
2	5925.000	55.63	88.20	-32.57	31.26	24.37	PK
!3	6255.850	123.54	88.20	35.34	98.07	25.47	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch87,6.385G,BW80M	Humidity (%RH)	58.0

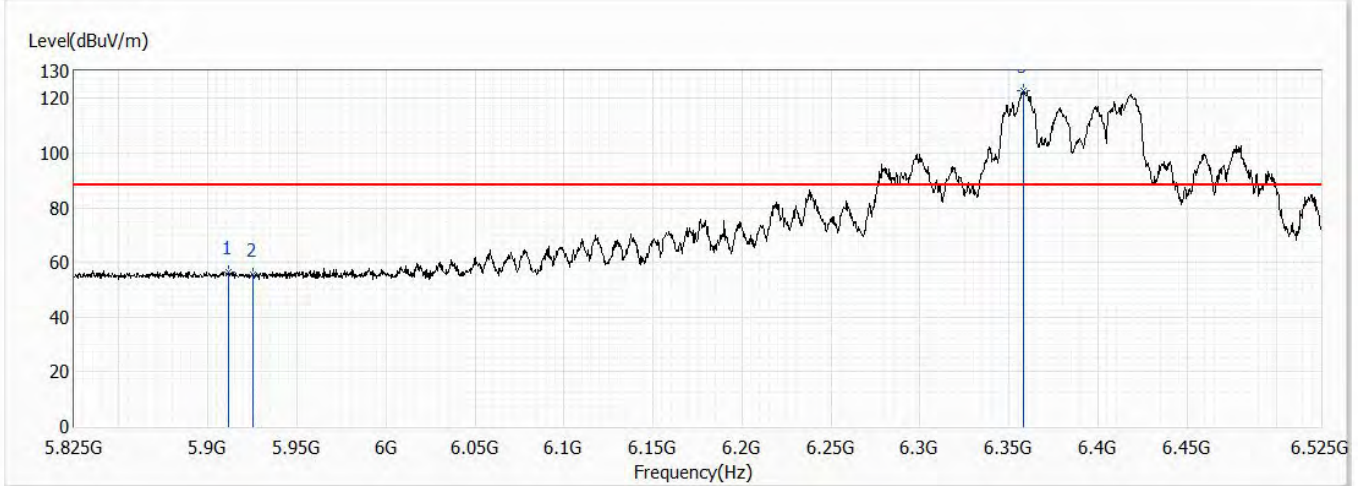


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5911.450	56.52	88.20	-31.68	32.18	24.34	PK
2	5925.000	55.46	88.20	-32.74	31.09	24.37	PK
!3	6358.050	122.87	88.20	34.67	97.11	25.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch87,6.385G,BW80M	Humidity (%RH)	58.0

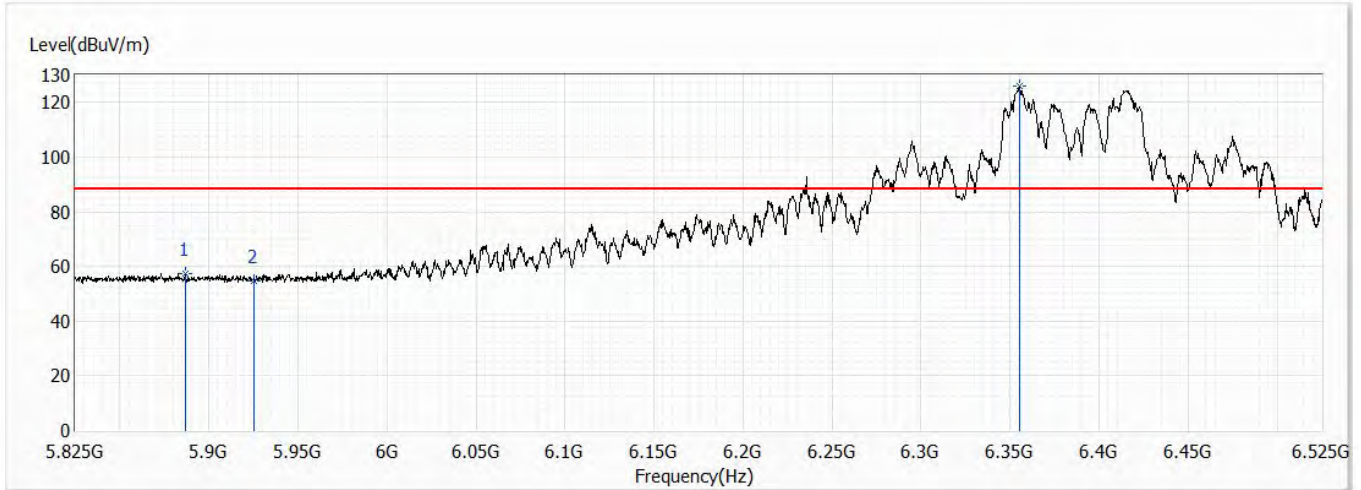


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5886.600	57.19	88.20	-31.01	32.94	24.25	PK
2	5925.000	54.69	88.20	-33.51	30.32	24.37	PK
!3	6355.250	125.82	88.20	37.62	100.06	25.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch47,6.185G,BW160M	Humidity (%RH)	58.0

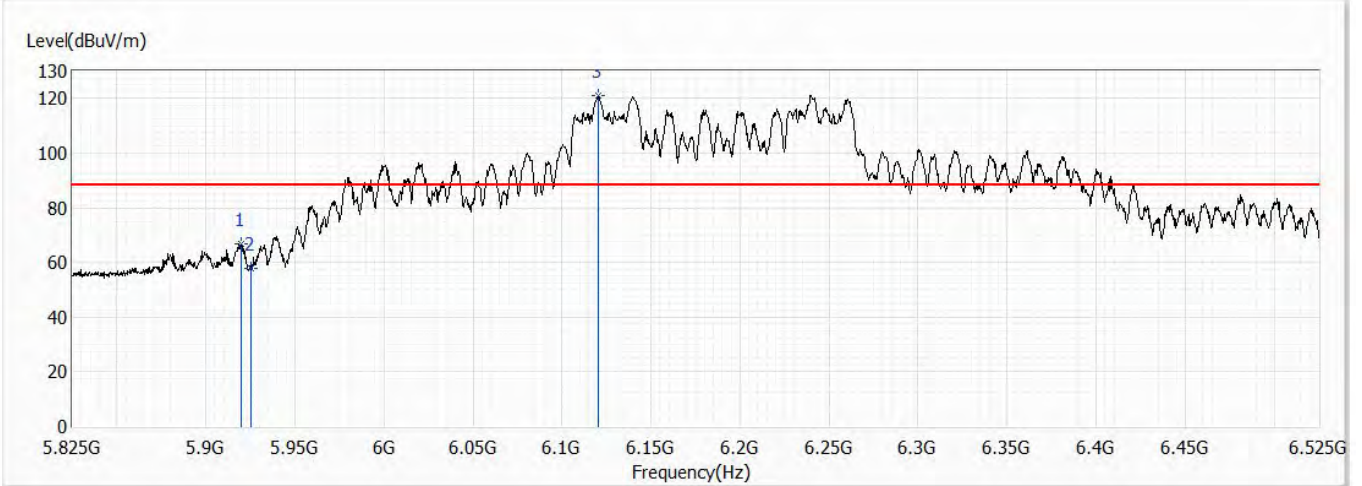


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5919.850	66.83	88.20	-21.37	42.47	24.36	PK
2	5925.000	57.66	88.20	-30.54	33.29	24.37	PK
!3	6120.050	120.96	88.20	32.76	95.94	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch47,6.185G,BW160M	Humidity (%RH)	58.0

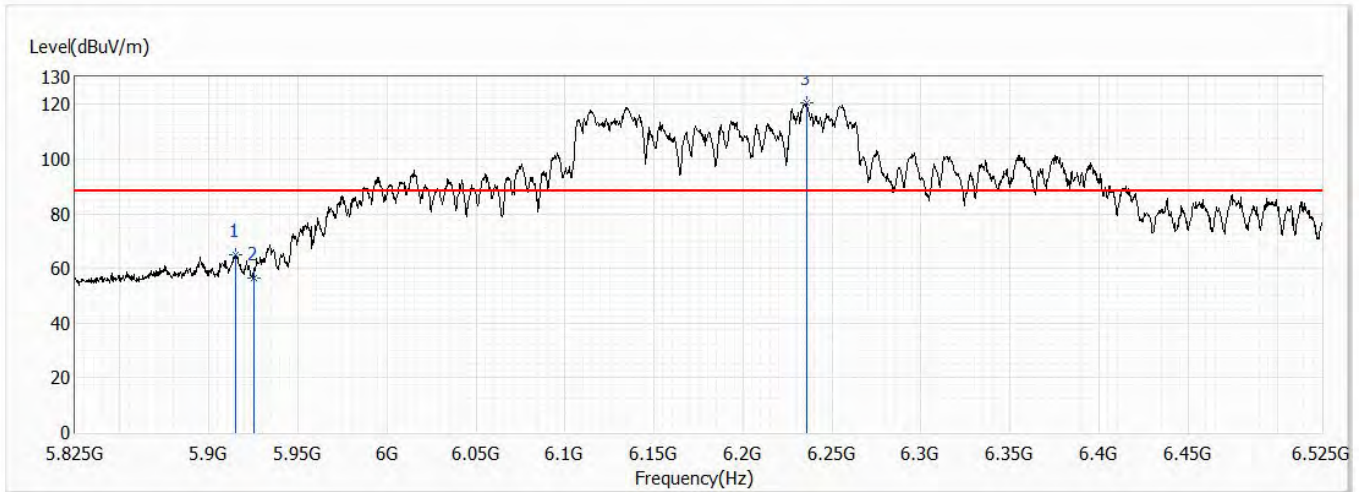


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5915.300	65.00	88.20	-23.20	40.66	24.34	PK
2	5925.000	56.53	88.20	-31.67	32.16	24.37	PK
!3	6235.550	120.61	88.20	32.41	95.21	25.40	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch79,6.345G,BW160M	Humidity (%RH)	58.0

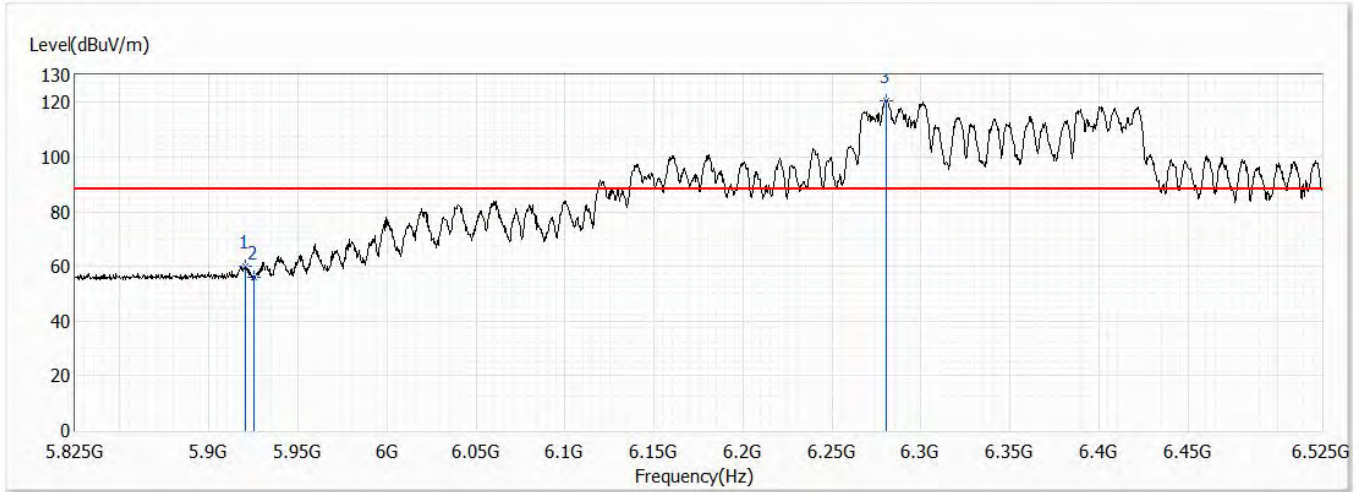


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5920.550	60.28	88.20	-27.92	35.92	24.36	PK
2	5925.000	56.01	88.20	-32.19	31.64	24.37	PK
!3	6280.350	120.78	88.20	32.58	95.24	25.54	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch79,6.345G,BW160M	Humidity (%RH)	58.0

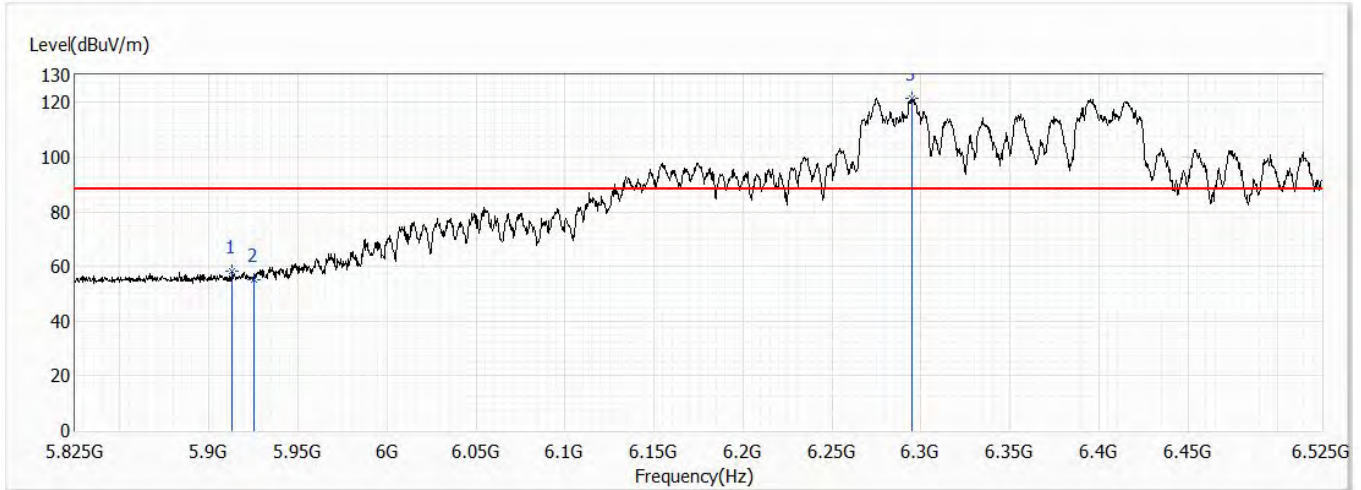


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5913.200	58.41	88.20	-29.79	34.07	24.34	PK
2	5925.000	55.01	88.20	-33.19	30.64	24.37	PK
!3	6295.050	121.66	88.20	33.46	96.07	25.59	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

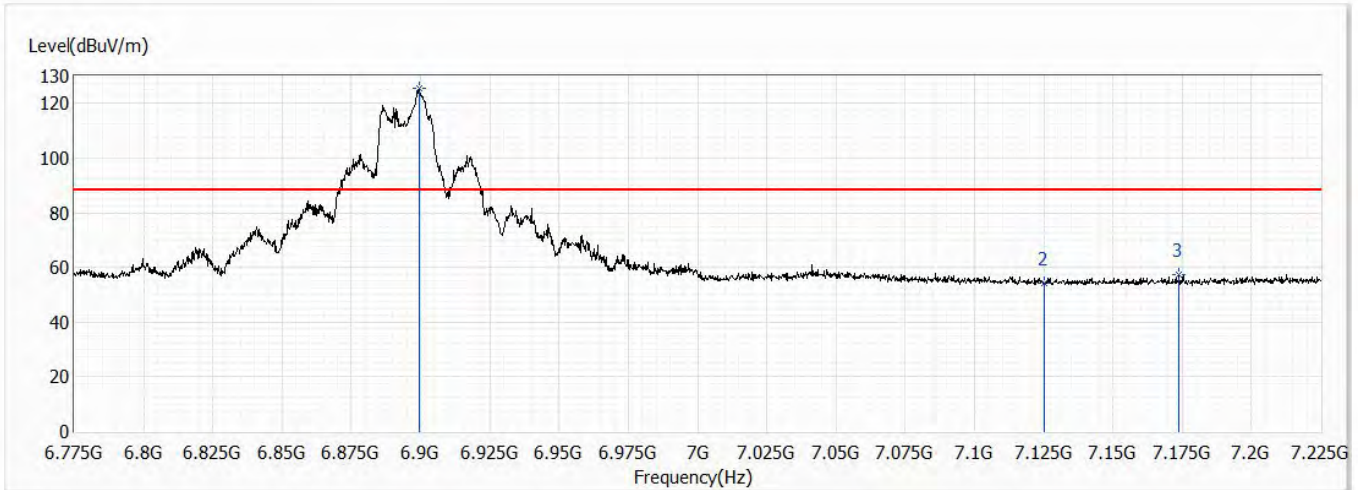


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6899.650	125.39	88.20	37.19	97.36	28.03	PK
2	7125.000	54.28	88.20	-33.92	25.35	28.93	PK
3	7173.925	57.22	88.20	-30.98	28.12	29.10	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW20M	Humidity (%RH)	58.0

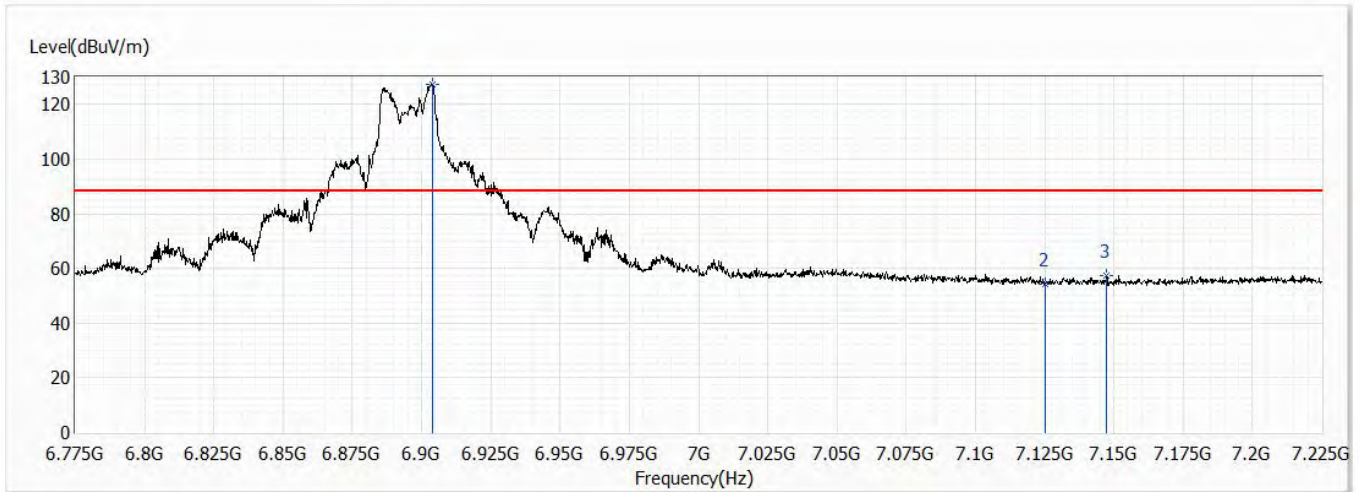


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6904.150	127.30	88.20	39.10	99.25	28.05	PK
2	7125.000	54.07	88.20	-34.13	25.14	28.93	PK
3	7147.375	57.25	88.20	-30.95	28.23	29.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

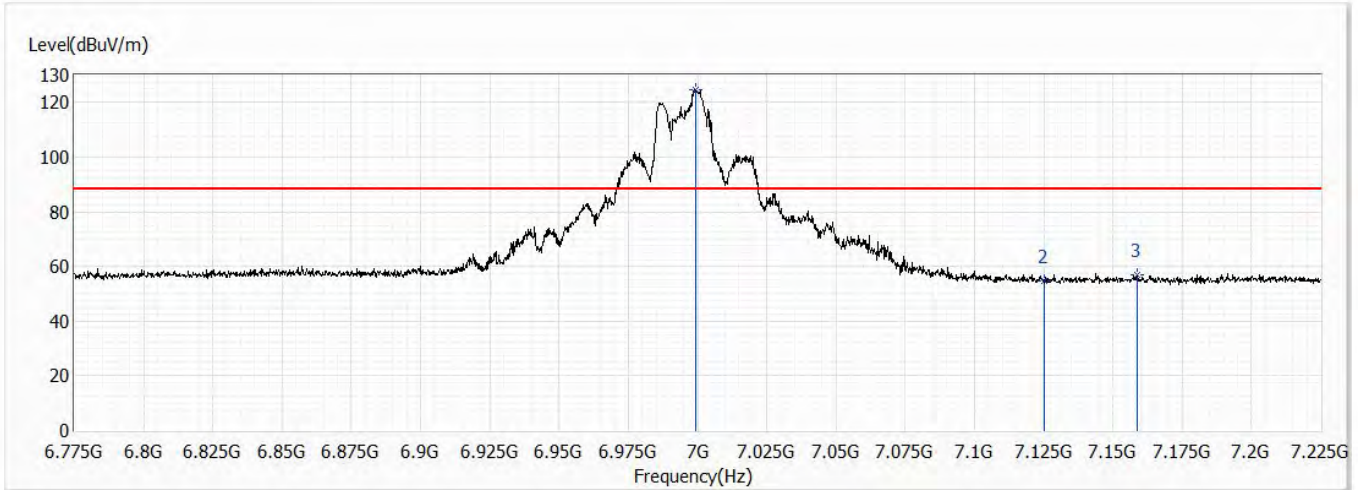


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6999.325	124.80	88.20	36.60	96.31	28.49	PK
2	7125.000	54.87	88.20	-33.33	25.94	28.93	PK
3	7158.850	56.88	88.20	-31.32	27.82	29.06	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW20M	Humidity (%RH)	58.0

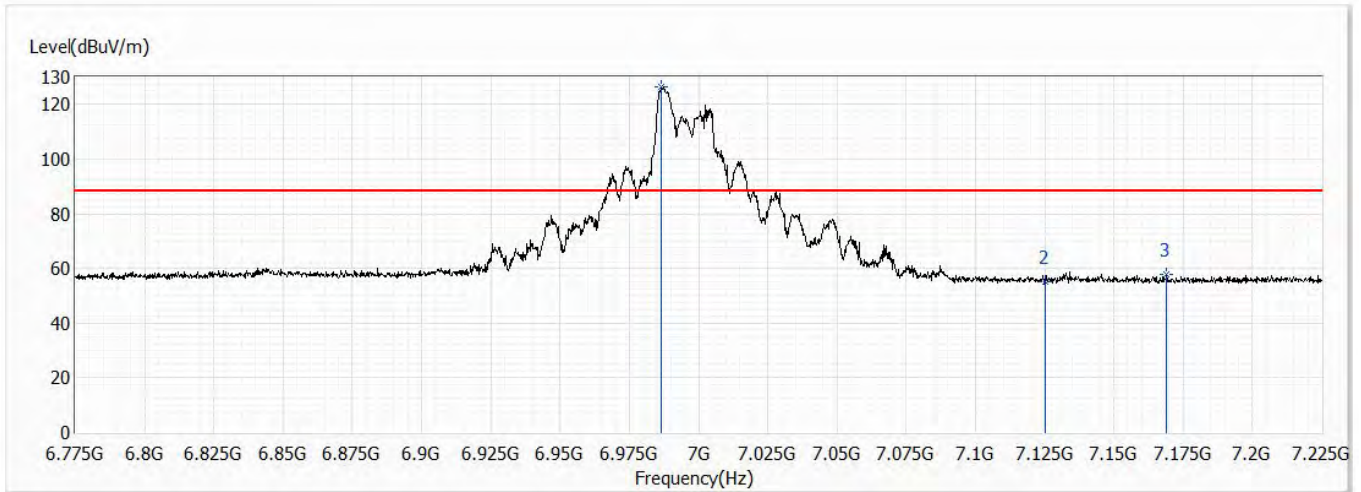

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6986.725	126.42	88.20	38.22	98.00	28.42	PK
2	7125.000	55.26	88.20	-32.94	26.33	28.93	PK
3	7168.975	57.72	88.20	-30.48	28.63	29.09	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.