


Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

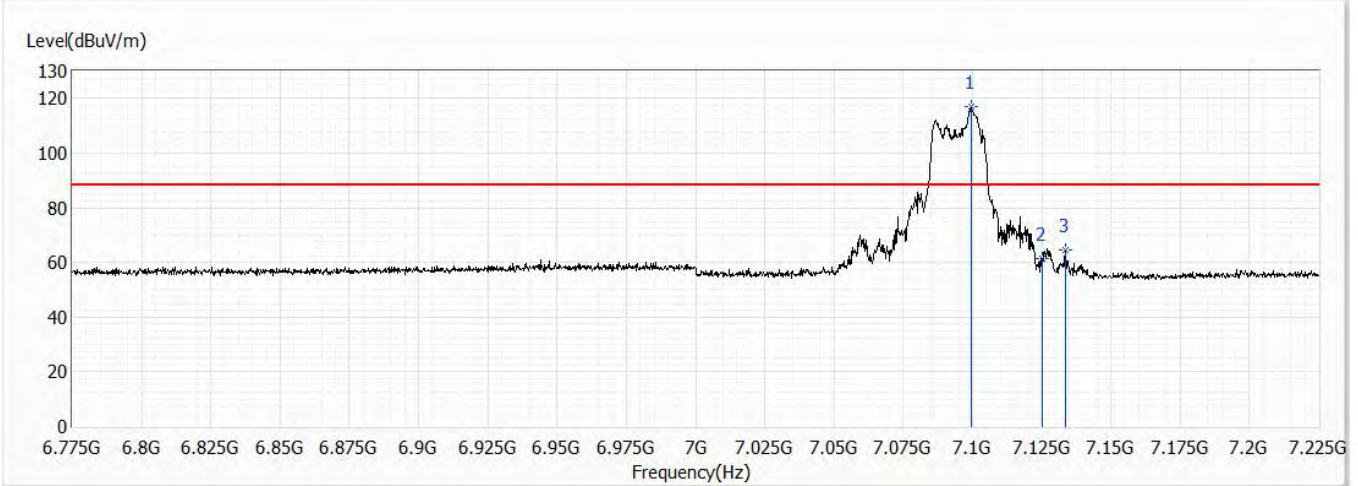


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7099.450	116.95	88.20	28.75	88.11	28.84	PK
2	7125.000	61.58	88.20	-26.62	32.65	28.93	PK
3	7133.425	64.75	88.20	-23.45	35.79	28.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

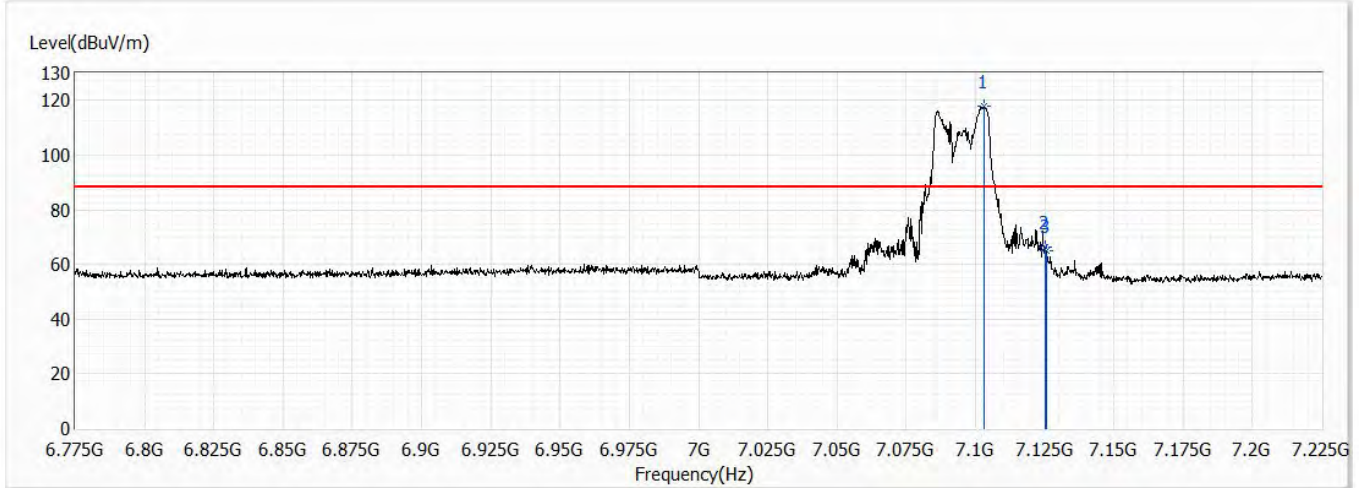


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7103.050	117.89	88.20	29.69	89.04	28.85	PK
2	7125.000	66.22	88.20	-21.98	37.29	28.93	PK
3	7125.550	64.90	88.20	-23.30	35.96	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0

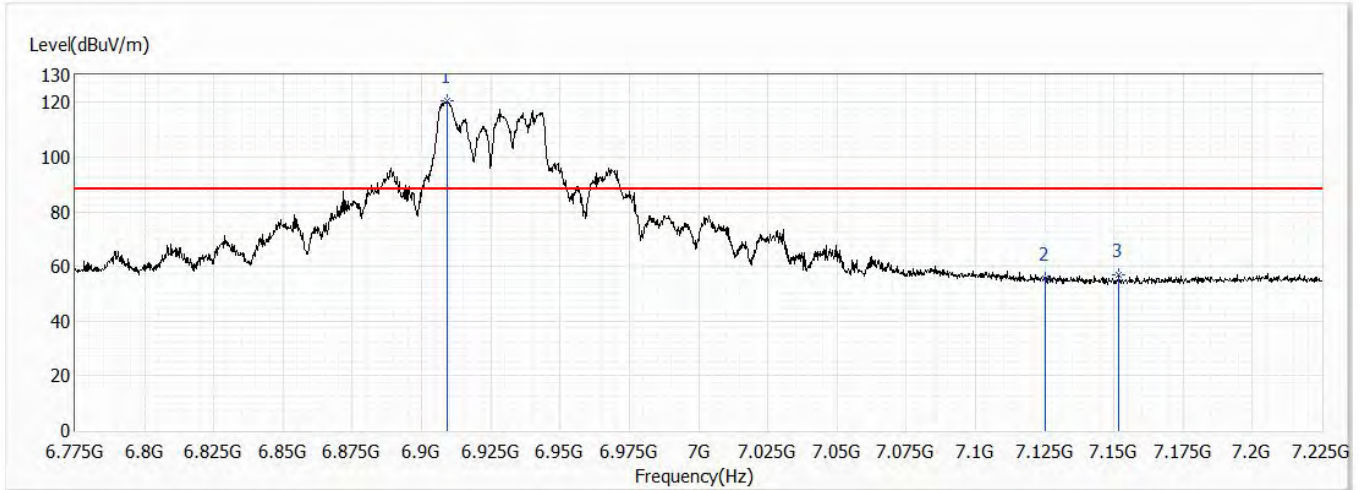

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6909.325	120.77	88.20	32.57	92.70	28.07	PK
2	7125.000	55.78	88.20	-32.42	26.85	28.93	PK
3	7151.875	56.80	88.20	-31.40	27.78	29.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0




No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6935.200	125.31	88.20	37.11	97.13	28.18	PK
2	7125.000	55.08	88.20	-33.12	26.15	28.93	PK
3	7148.050	58.44	88.20	-29.76	29.42	29.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

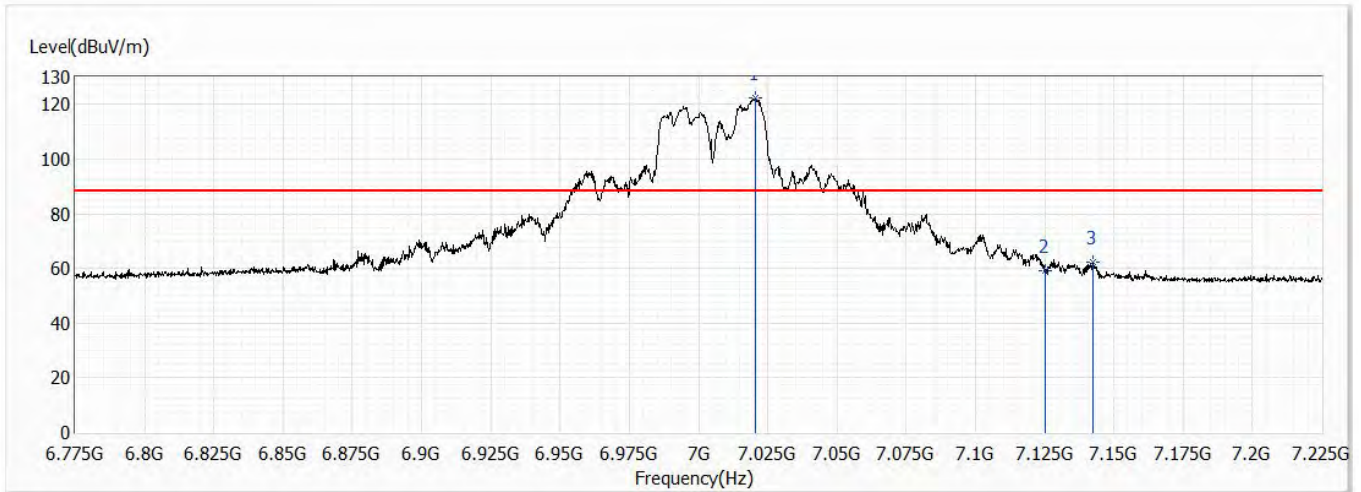


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7020.700	122.27	88.20	34.07	93.70	28.57	PK
2	7125.000	58.99	88.20	-29.21	30.06	28.93	PK
3	7142.200	62.21	88.20	-25.99	33.22	28.99	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

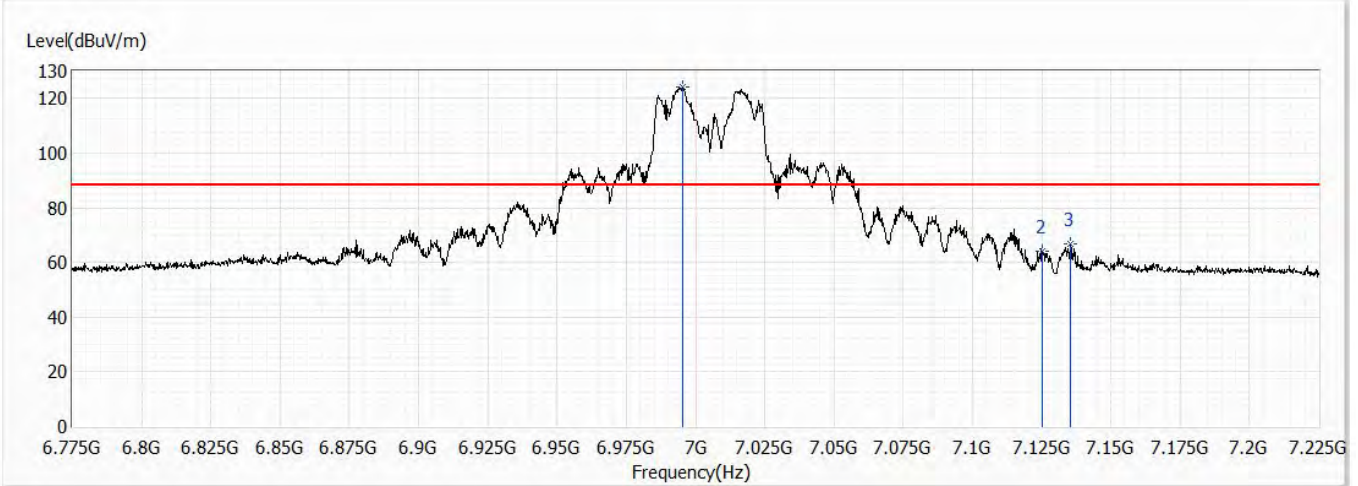


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6995.275	124.03	88.20	35.83	95.56	28.47	PK
2	7125.000	64.32	88.20	-23.88	35.39	28.93	PK
3	7135.450	66.68	88.20	-21.52	37.72	28.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

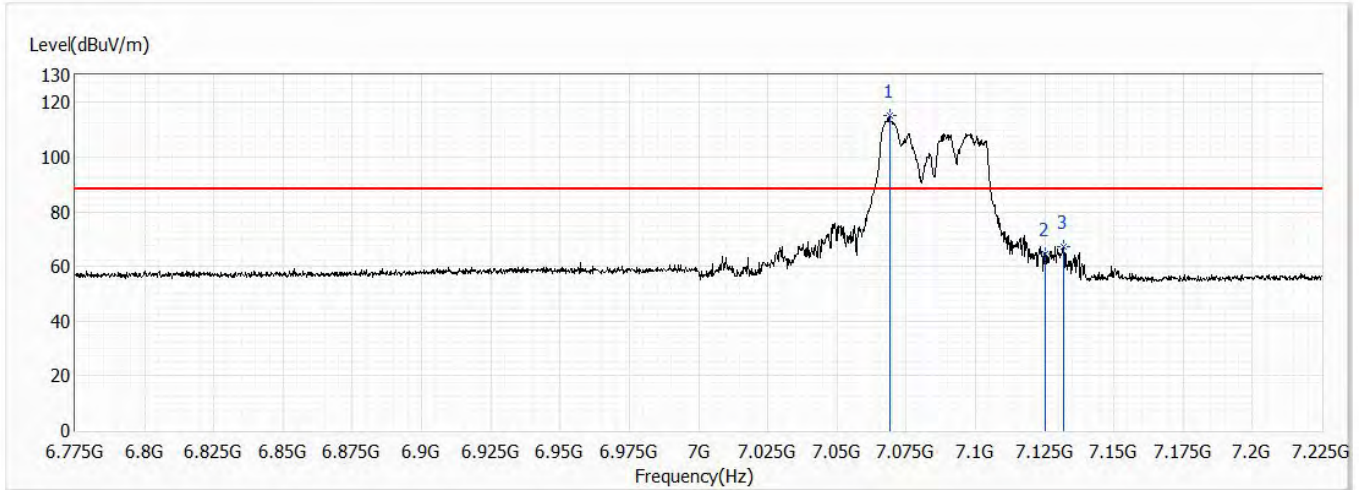


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7069.075	115.16	88.20	26.96	86.43	28.73	PK
2	7125.000	64.69	88.20	-23.51	35.76	28.93	PK
3	7131.625	67.12	88.20	-21.08	38.16	28.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

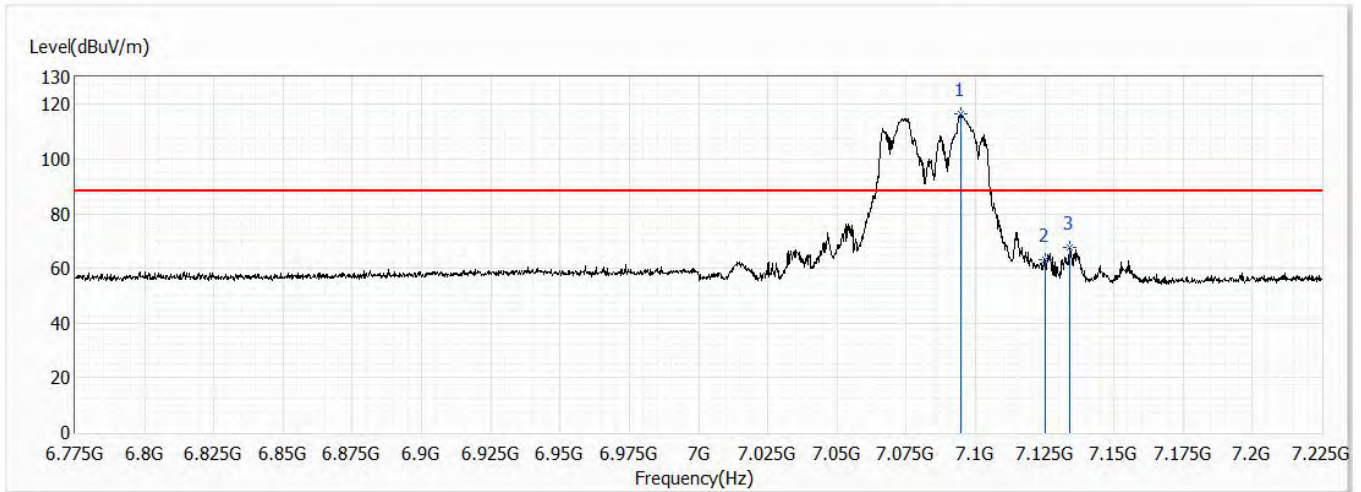


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7094.725	116.34	88.20	28.14	87.51	28.83	PK
2	7125.000	63.25	88.20	-24.95	34.32	28.93	PK
3	7133.875	67.47	88.20	-20.73	38.51	28.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

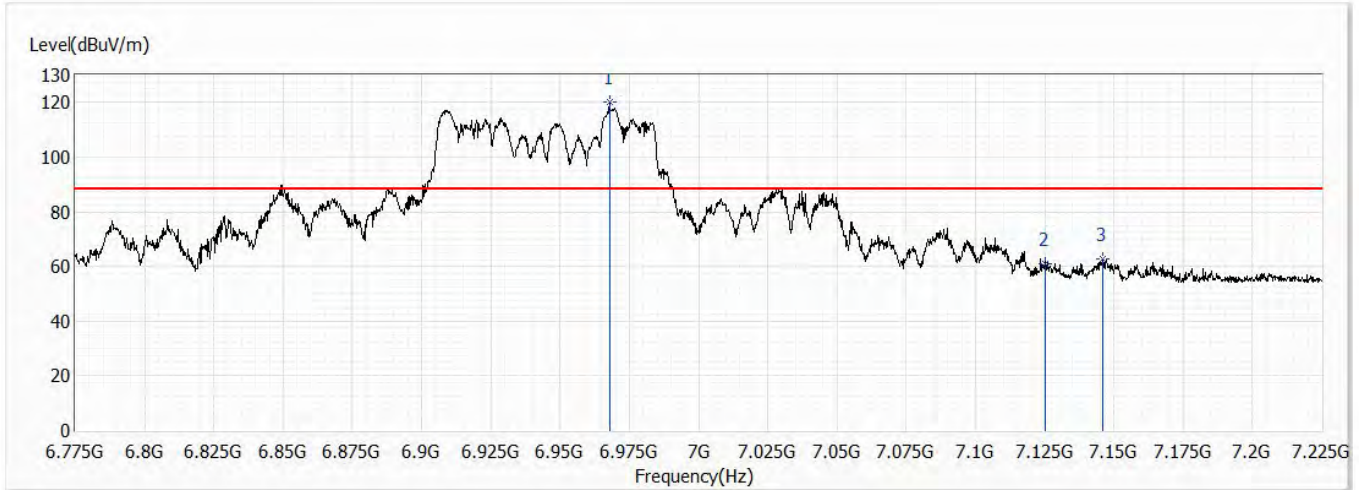


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6967.825	120.19	88.20	31.99	91.84	28.35	PK
2	7125.000	60.90	88.20	-27.30	31.97	28.93	PK
3	7146.025	62.63	88.20	-25.57	33.63	29.00	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

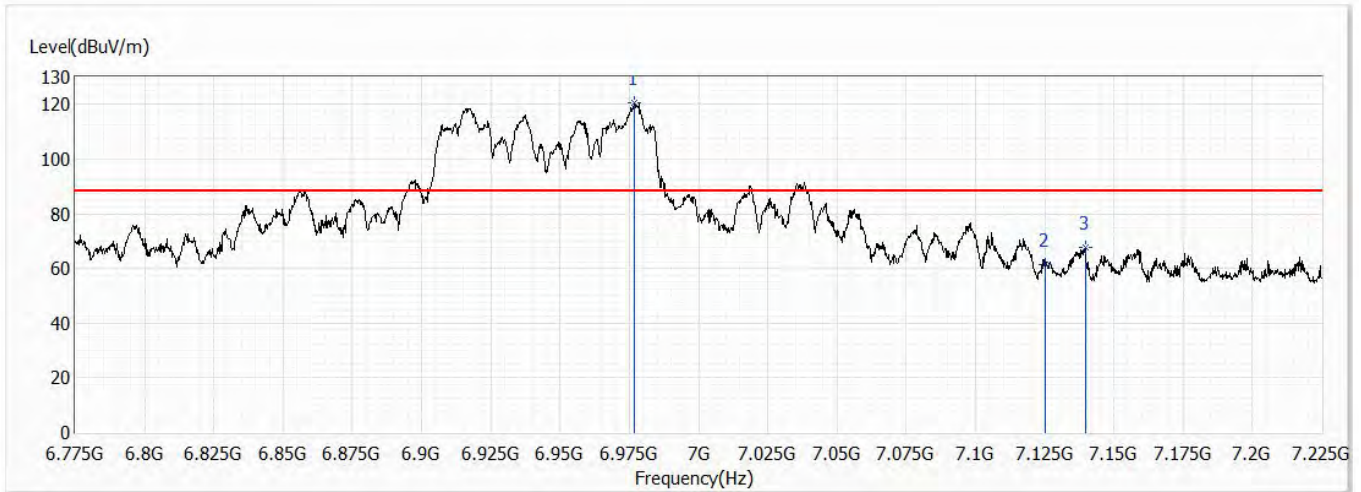


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6976.825	120.47	88.20	32.27	92.09	28.38	PK
2	7125.000	61.48	88.20	-26.72	32.55	28.93	PK
3	7139.725	67.67	88.20	-20.53	38.69	28.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

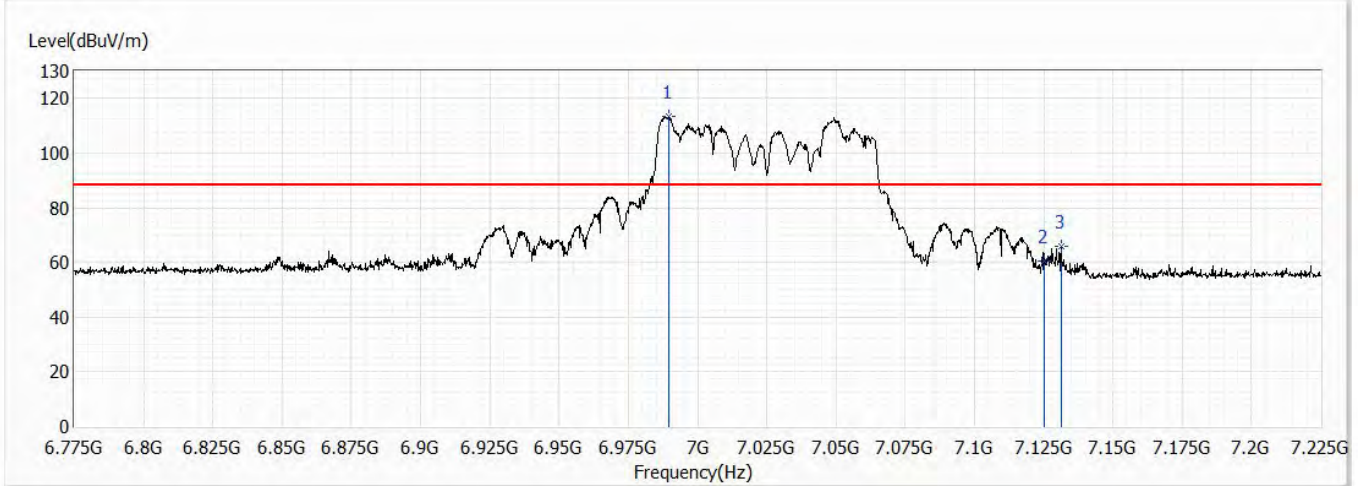


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6989.650	113.42	88.20	25.22	84.97	28.45	PK
2	7125.000	60.47	88.20	-27.73	31.54	28.93	PK
3	7131.175	65.79	88.20	-22.41	36.84	28.95	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/3/12
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

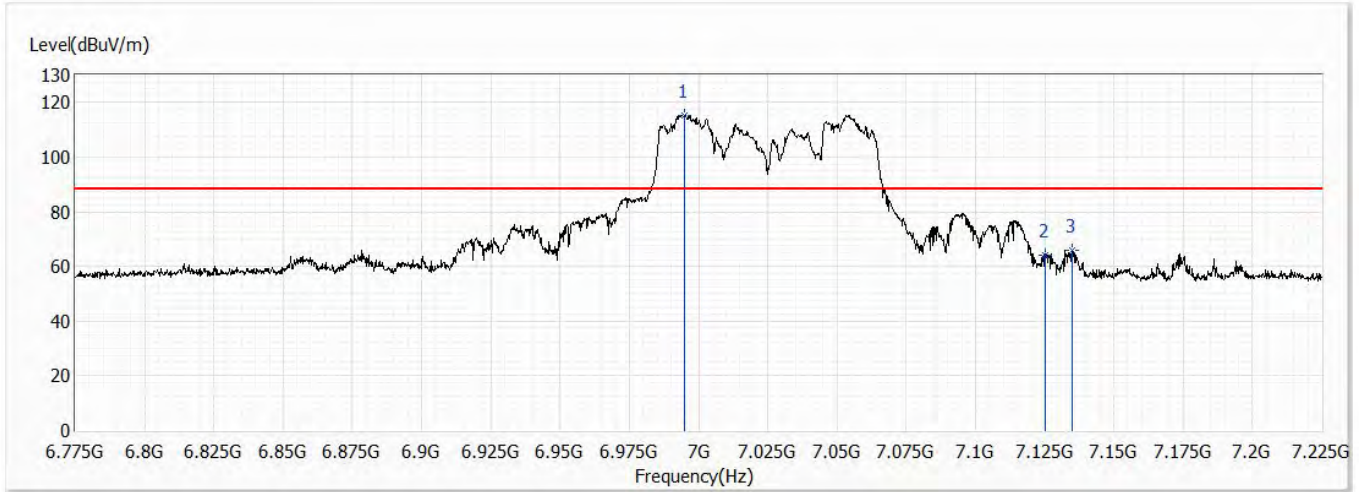


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6994.825	115.35	88.20	27.15	86.88	28.47	PK
2	7125.000	63.92	88.20	-24.28	34.99	28.93	PK
3	7134.775	65.87	88.20	-22.33	36.91	28.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/4/28
Test Mode	Mode 1	Engineer	Rueyyan Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

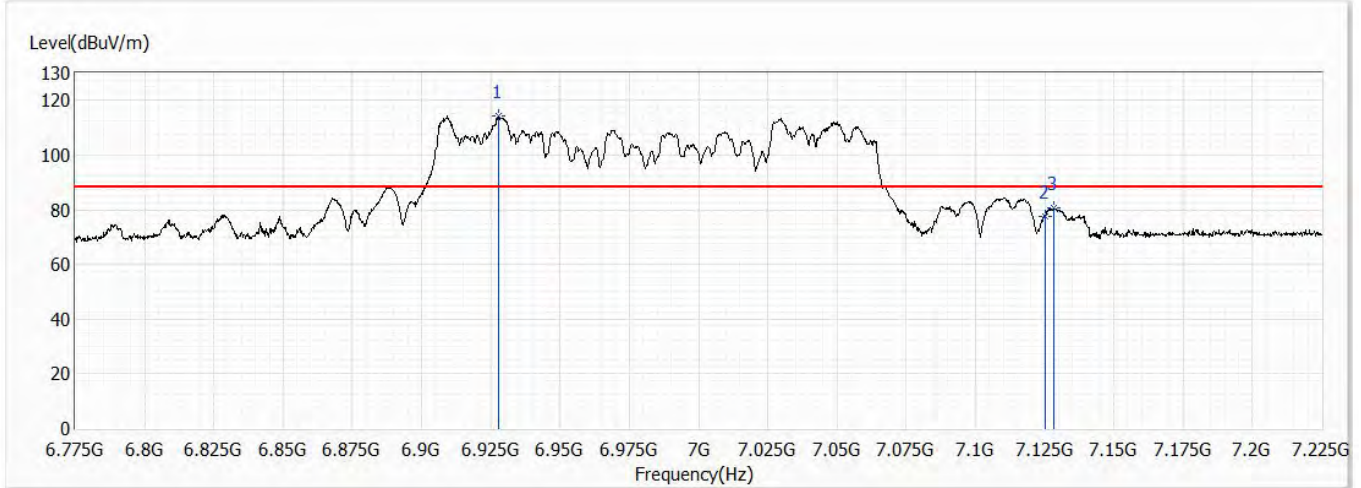


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6928.000	114.27	88.20	26.07	86.11	28.16	PK
2	7125.000	77.58	88.20	-10.62	48.65	28.93	PK
3	7128.250	80.47	88.20	-7.73	51.53	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/4/28
Test Mode	Mode 1	Engineer	Rueyyan Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

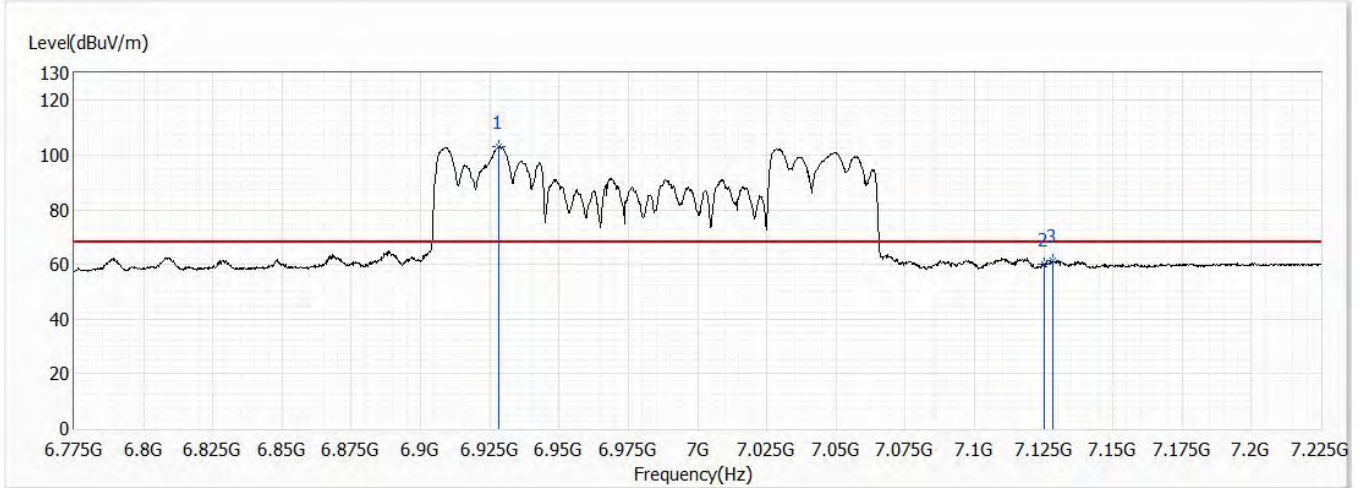


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6928.450	102.93	68.20	34.73	74.77	28.16	AV
2	7125.000	60.09	68.20	-8.11	31.16	28.93	AV
3	7128.250	61.28	68.20	-6.92	32.34	28.94	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/4/28
Test Mode	Mode 1	Engineer	Rueyyan Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

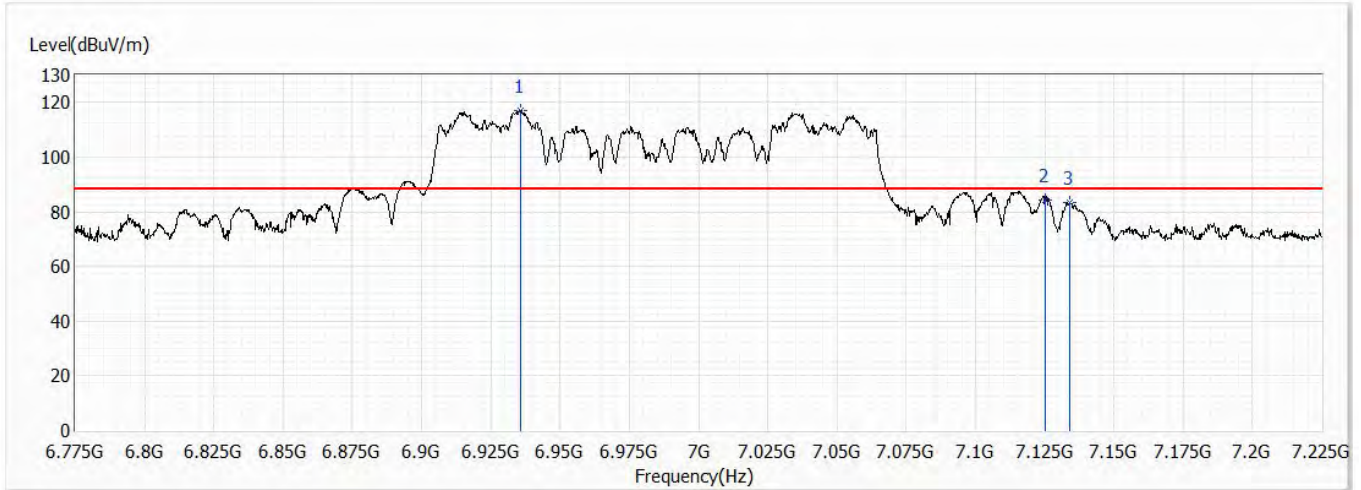


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6935.650	117.19	88.20	28.99	89.00	28.19	PK
2	7125.000	84.41	88.20	-3.79	55.48	28.93	PK
3	7134.100	83.34	88.20	-4.86	54.38	28.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/4/28
Test Mode	Mode 1	Engineer	Rueyyan Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch207,6.985G,BW160M	Humidity (%RH)	58.0

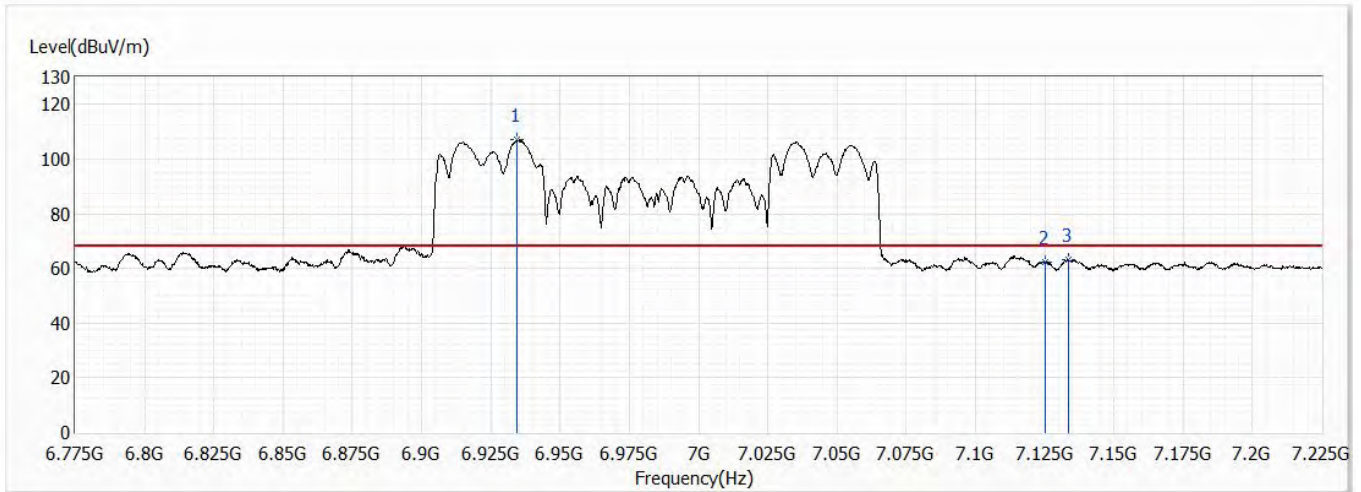


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6934.525	107.17	68.20	38.97	78.99	28.18	AV
2	7125.000	62.25	68.20	-5.95	33.32	28.93	AV
3	7133.425	63.11	68.20	-5.09	34.15	28.96	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Beamforming mode

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch33,6.115G,BW20M	Humidity (%RH)	58.0

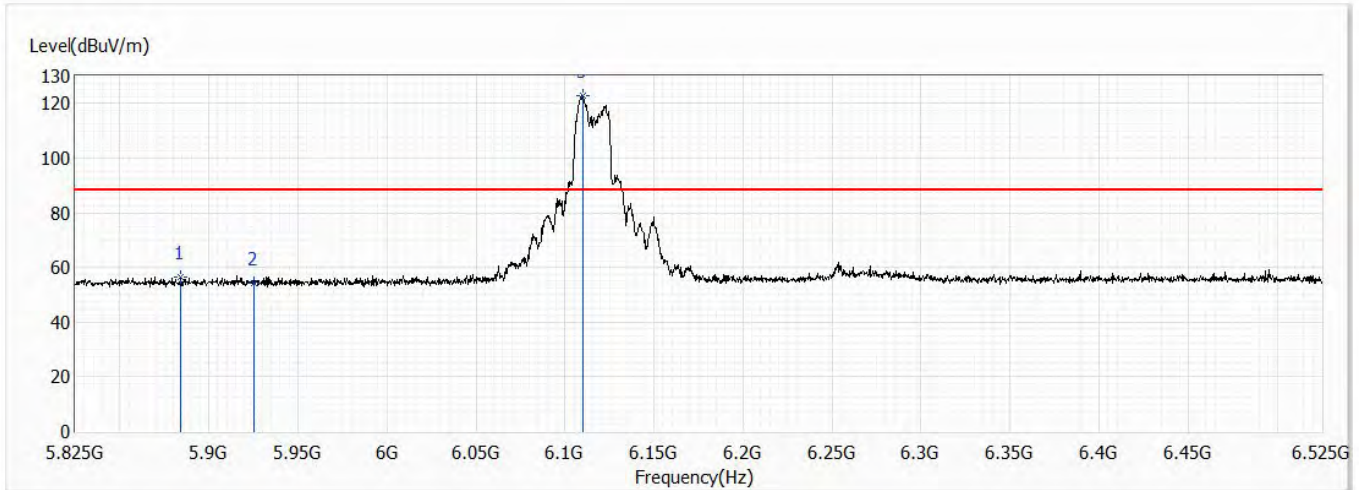


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5884.150	56.47	88.20	-31.73	32.22	24.25	PK
2	5925.000	54.26	88.20	-33.94	29.89	24.37	PK
!3	6110.250	122.65	88.20	34.45	97.67	24.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch33,6.115G,BW20M	Humidity (%RH)	58.0

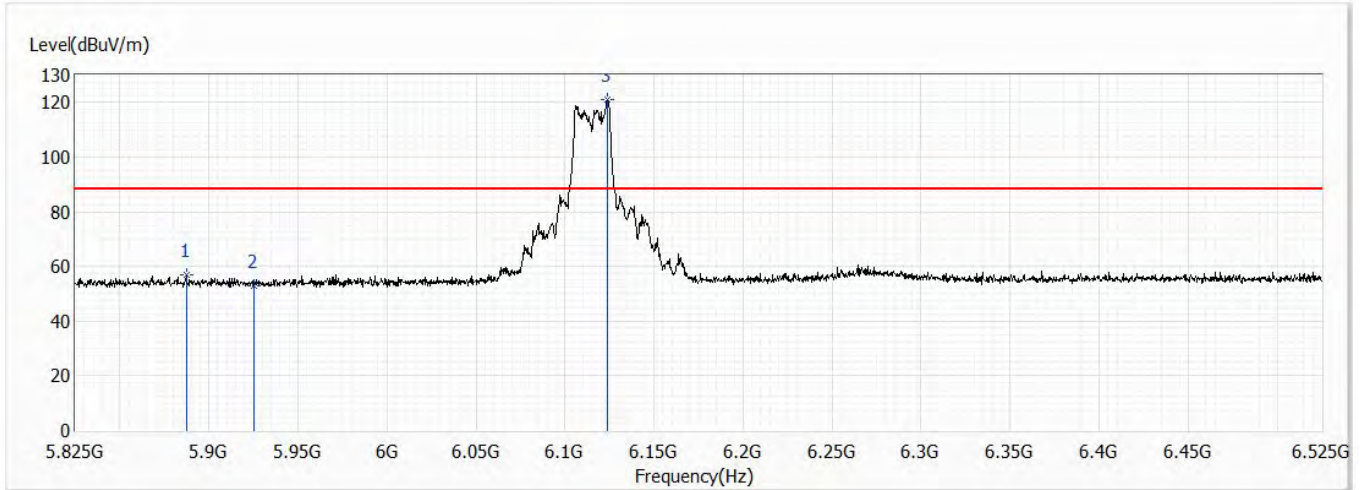


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5887.300	56.80	88.20	-31.40	32.55	24.25	PK
2	5925.000	52.97	88.20	-35.23	28.60	24.37	PK
!3	6123.900	120.99	88.20	32.79	95.97	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch61,6.255G,BW20M	Humidity (%RH)	58.0

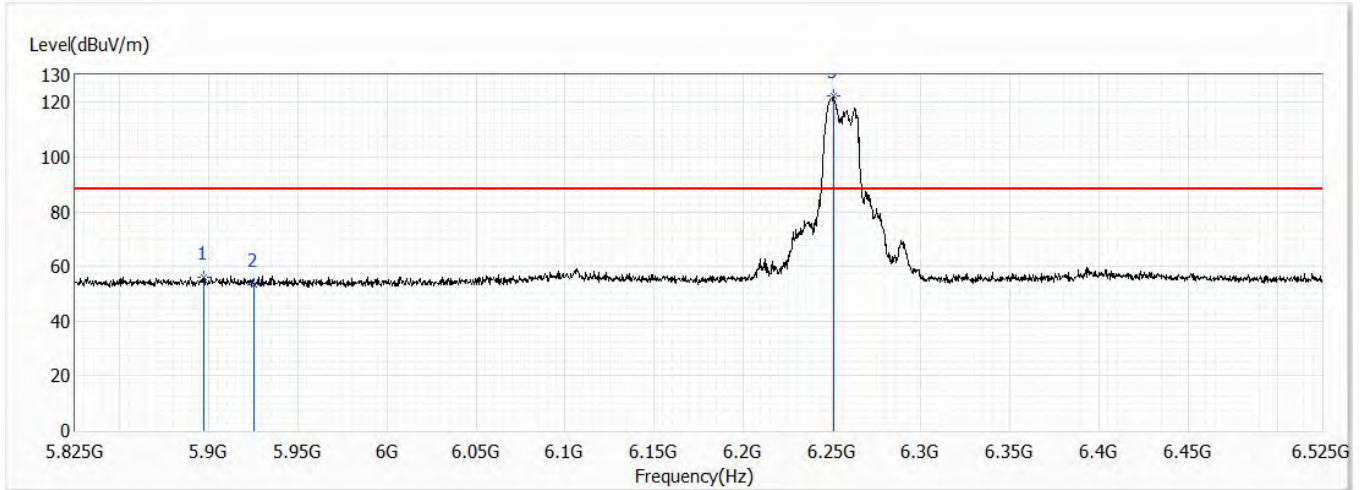


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5897.100	56.22	88.20	-31.98	31.92	24.30	PK
2	5925.000	53.48	88.20	-34.72	29.11	24.37	PK
!3	6250.600	122.58	88.20	34.38	97.12	25.46	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch61,6.255G,BW20M	Humidity (%RH)	58.0

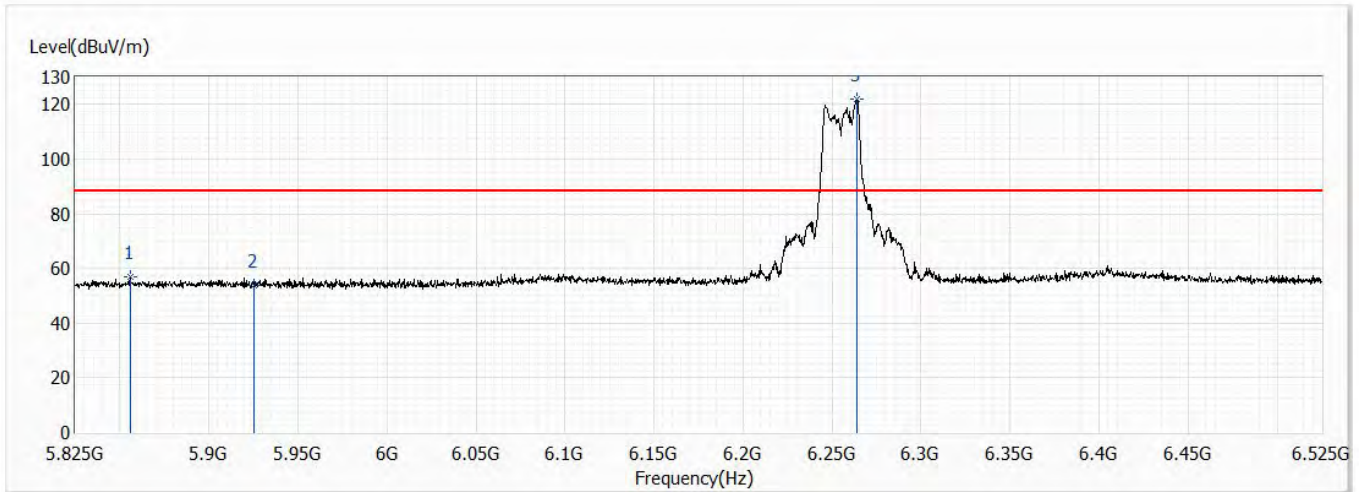


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5855.800	56.78	88.20	-31.42	32.61	24.17	PK
2	5925.000	53.97	88.20	-34.23	29.60	24.37	PK
!3	6264.250	121.82	88.20	33.62	96.31	25.51	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch93,6.415G,BW20M	Humidity (%RH)	58.0

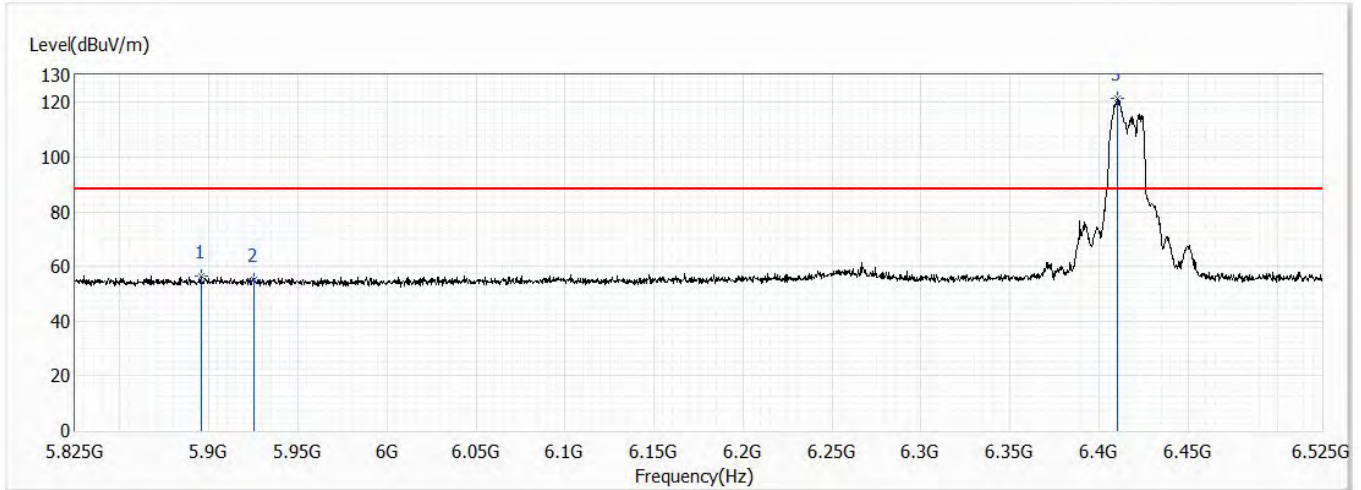


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5895.700	56.65	88.20	-31.55	32.38	24.27	PK
2	5925.000	55.03	88.20	-33.17	30.66	24.37	PK
!3	6410.200	121.28	88.20	33.08	95.37	25.91	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch93,6.415G,BW20M	Humidity (%RH)	58.0

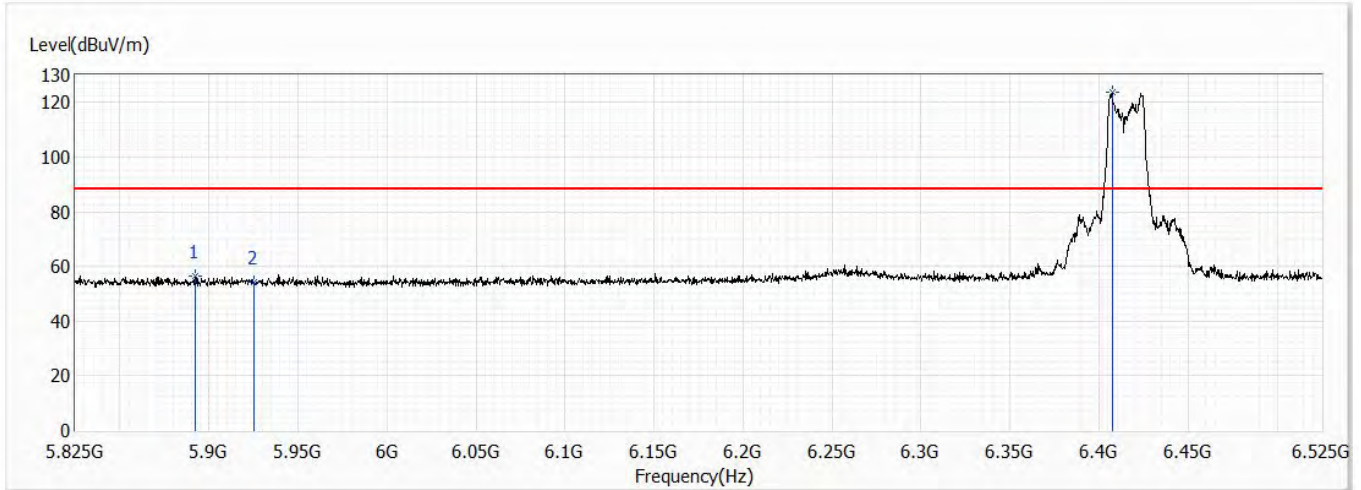


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5892.550	56.28	88.20	-31.92	32.01	24.27	PK
2	5925.000	54.19	88.20	-34.01	29.82	24.37	PK
!3	6407.400	123.53	88.20	35.33	97.63	25.90	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch35,6.125G,BW40M	Humidity (%RH)	58.0

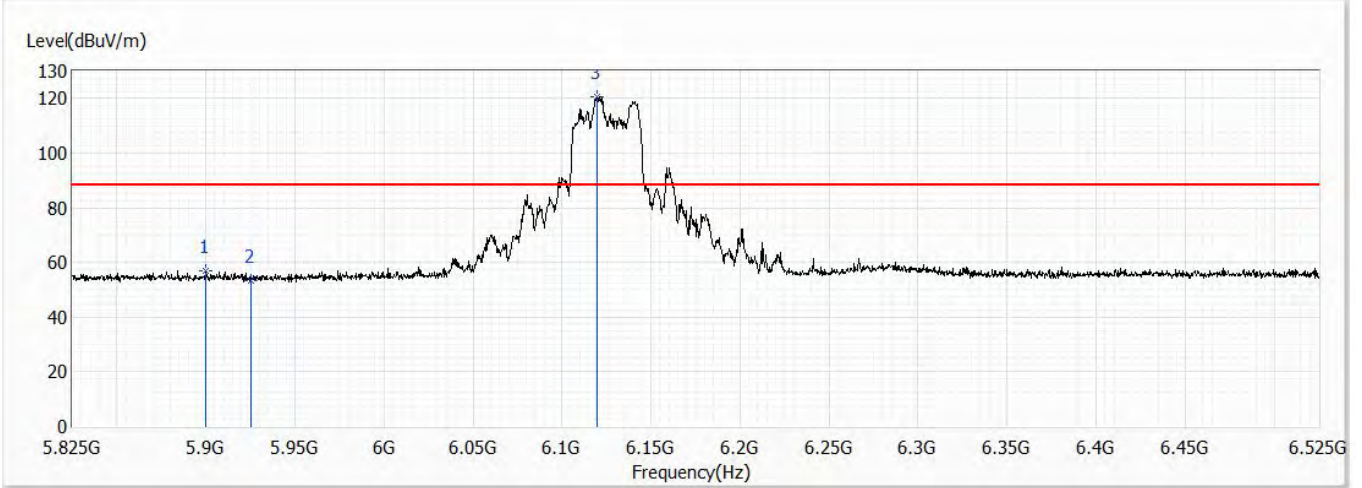


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5899.550	57.06	88.20	-31.14	32.76	24.30	PK
2	5925.000	53.41	88.20	-34.79	29.04	24.37	PK
!3	6119.700	120.49	88.20	32.29	95.47	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch35,6.125G,BW40M	Humidity (%RH)	58.0

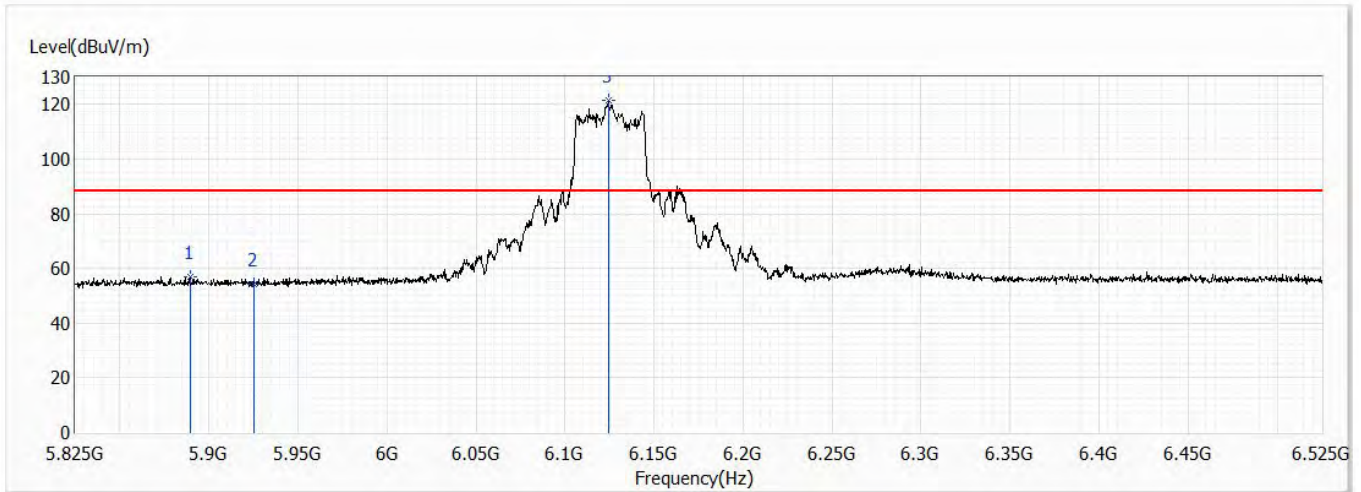


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5889.400	57.14	88.20	-31.06	32.87	24.27	PK
2	5925.000	54.35	88.20	-33.85	29.98	24.37	PK
!3	6124.250	121.64	88.20	33.44	96.62	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch59,6.245G,BW40M	Humidity (%RH)	58.0

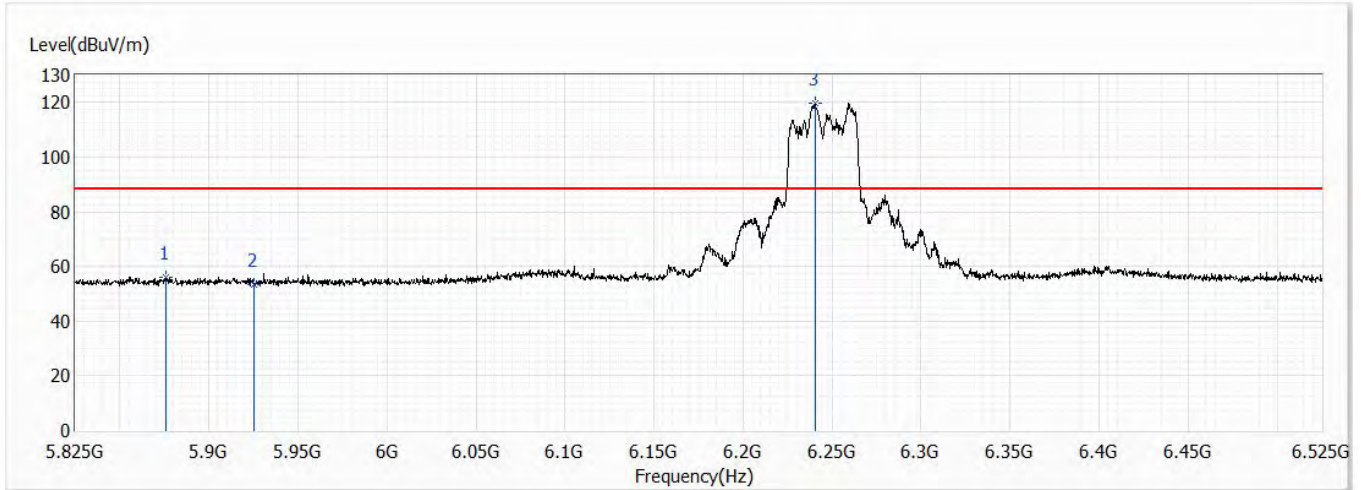


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5875.750	56.15	88.20	-32.05	31.92	24.23	PK
2	5925.000	53.50	88.20	-34.70	29.13	24.37	PK
!3	6240.450	119.67	88.20	31.47	94.24	25.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch59,6.245G,BW40M	Humidity (%RH)	58.0

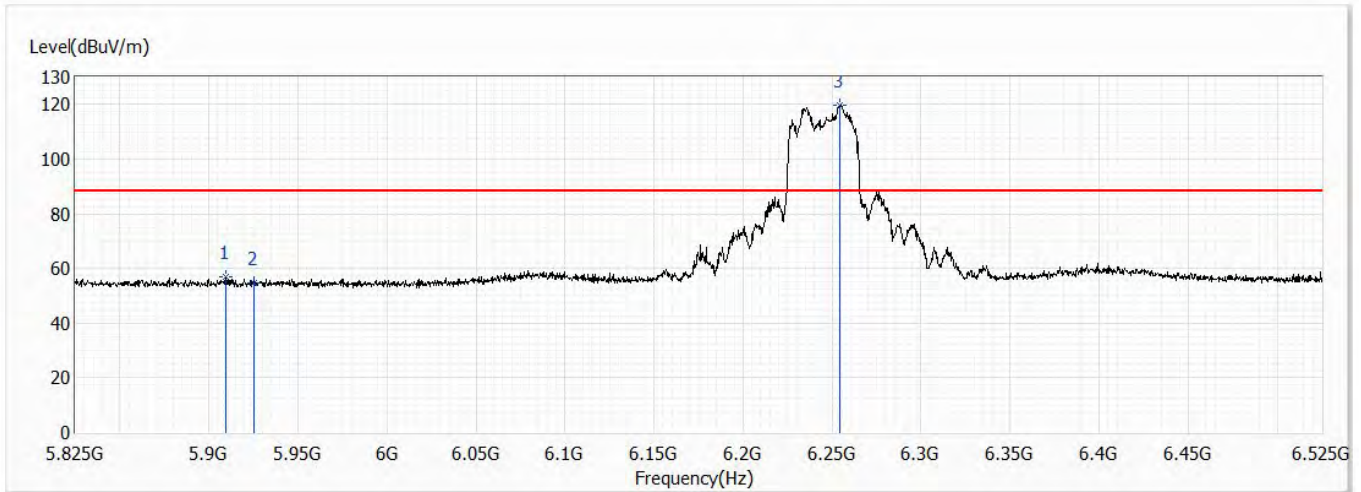


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5909.700	56.82	88.20	-31.38	32.50	24.32	PK
2	5925.000	54.80	88.20	-33.40	30.43	24.37	PK
!3	6254.450	119.77	88.20	31.57	94.30	25.47	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch91,6.405G,BW40M	Humidity (%RH)	58.0

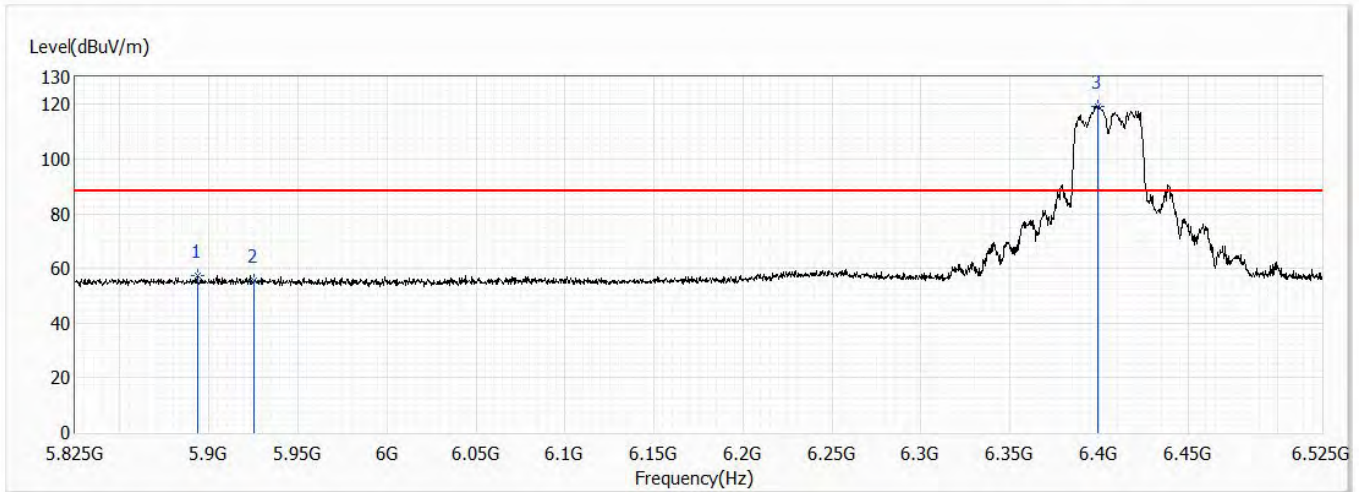


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5893.600	57.44	88.20	-30.76	33.17	24.27	PK
2	5925.000	55.41	88.20	-32.79	31.04	24.37	PK
!3	6399.350	119.45	88.20	31.25	93.56	25.89	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch91,6.405G,BW40M	Humidity (%RH)	58.0

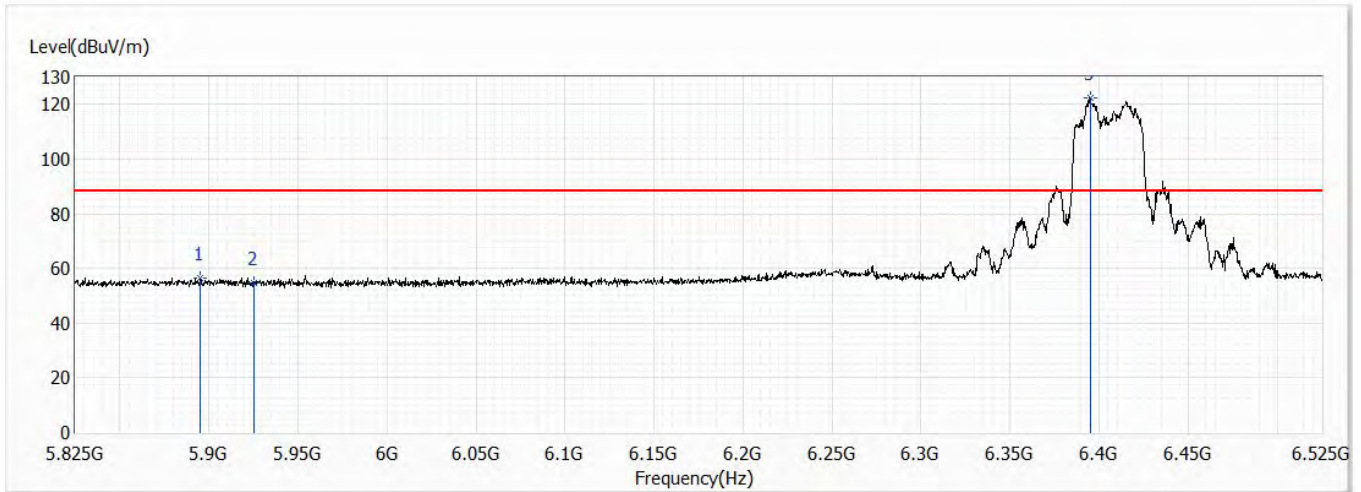


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5895.350	56.44	88.20	-31.76	32.17	24.27	PK
2	5925.000	54.61	88.20	-33.59	30.24	24.37	PK
!3	6395.150	122.34	88.20	34.14	96.47	25.87	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch39,6.145G,BW80M	Humidity (%RH)	58.0

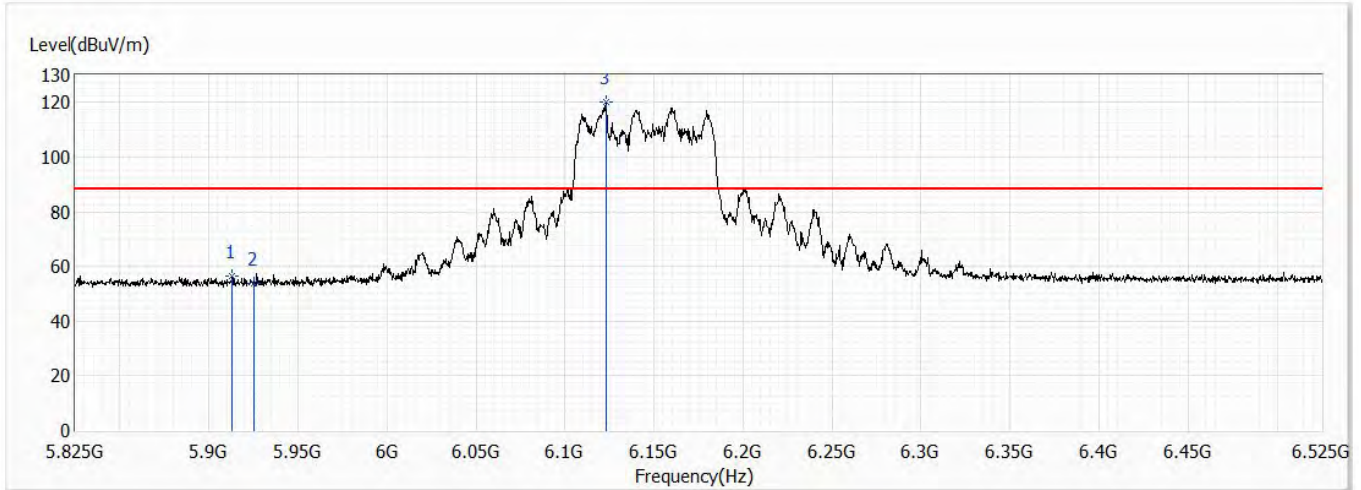


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5913.200	56.31	88.20	-31.89	31.97	24.34	PK
2	5925.000	53.67	88.20	-34.53	29.30	24.37	PK
!3	6122.850	120.05	88.20	31.85	95.03	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch39,6.145G,BW80M	Humidity (%RH)	58.0

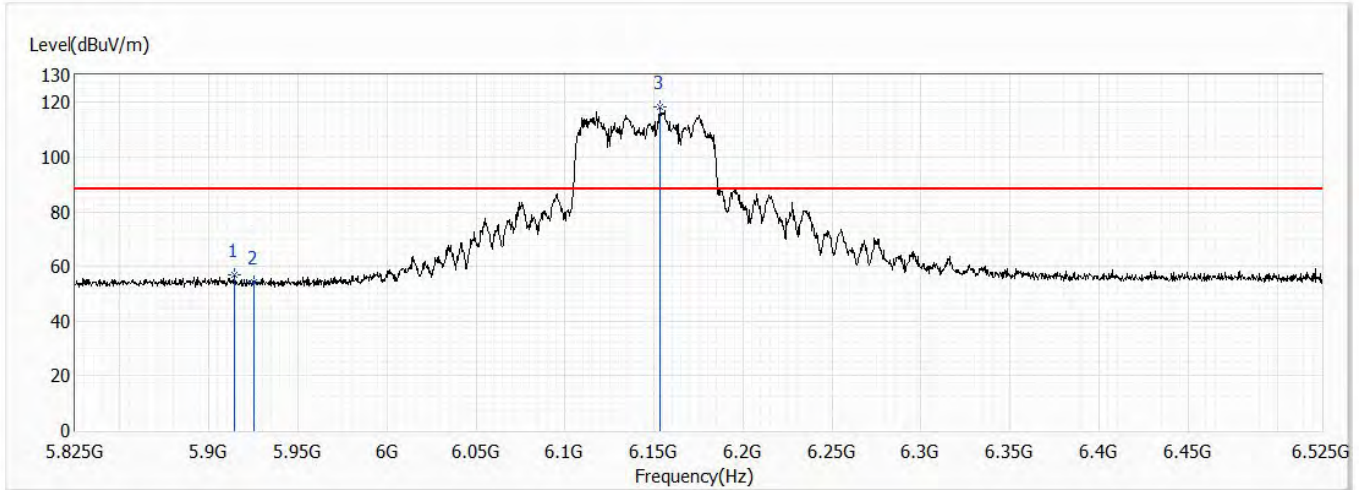


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5914.250	57.07	88.20	-31.13	32.73	24.34	PK
2	5925.000	54.28	88.20	-33.92	29.91	24.37	PK
!3	6153.300	118.20	88.20	30.00	93.07	25.13	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch55,6.225G,BW80M	Humidity (%RH)	58.0

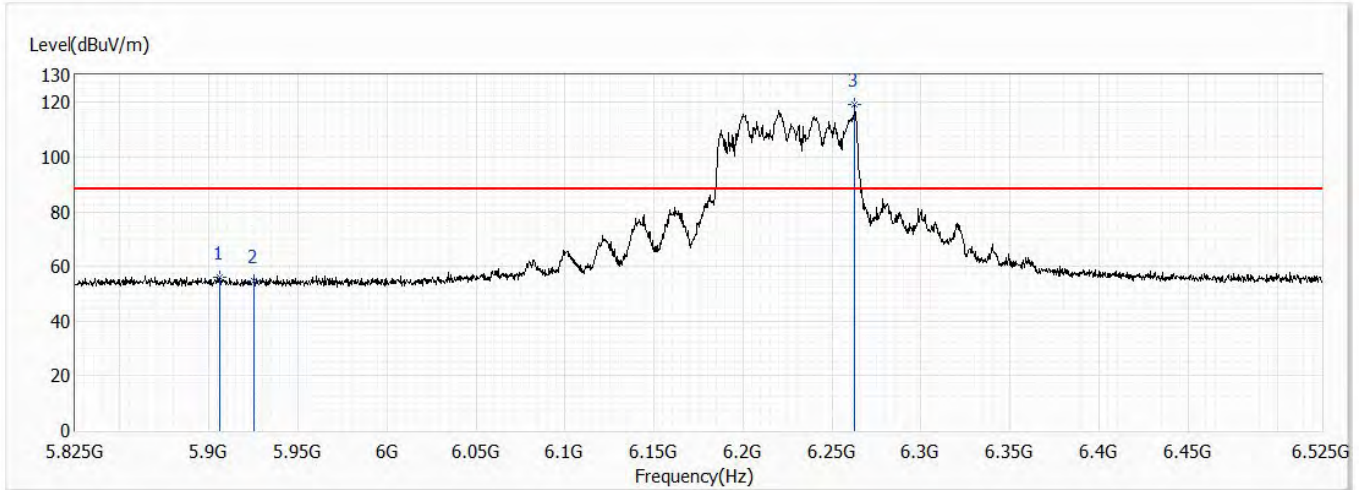


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5906.200	56.15	88.20	-32.05	31.83	24.32	PK
2	5925.000	54.54	88.20	-33.66	30.17	24.37	PK
!3	6262.850	119.25	88.20	31.05	93.75	25.50	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch55,6.225G,BW80M	Humidity (%RH)	58.0

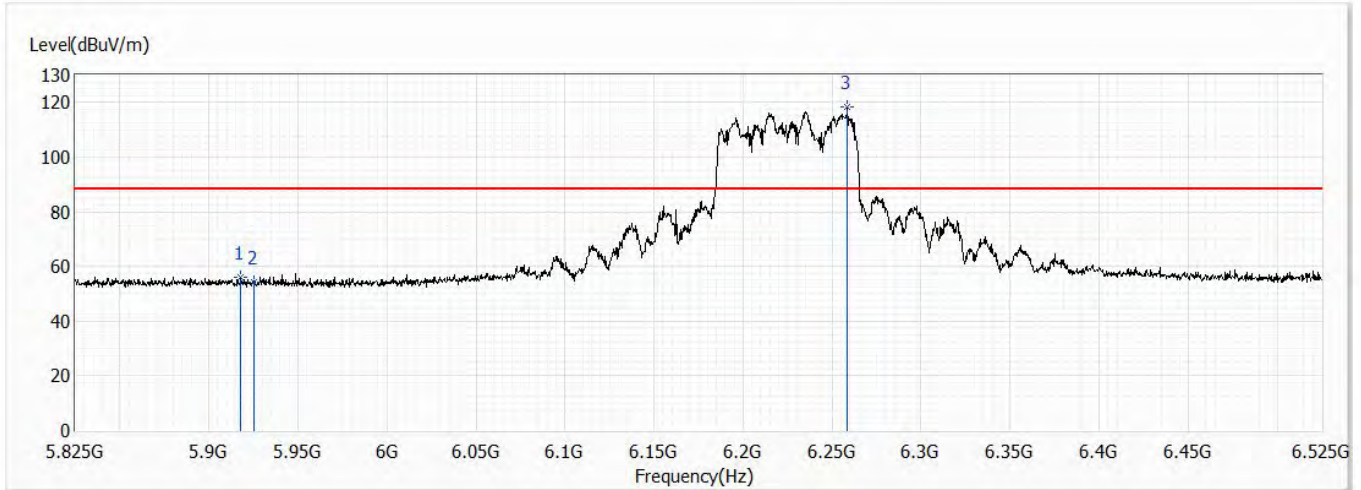


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5917.750	55.84	88.20	-32.36	31.50	24.34	PK
2	5925.000	54.25	88.20	-33.95	29.88	24.37	PK
!3	6258.650	118.19	88.20	29.99	92.70	25.49	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch87,6.385G,BW80M	Humidity (%RH)	58.0

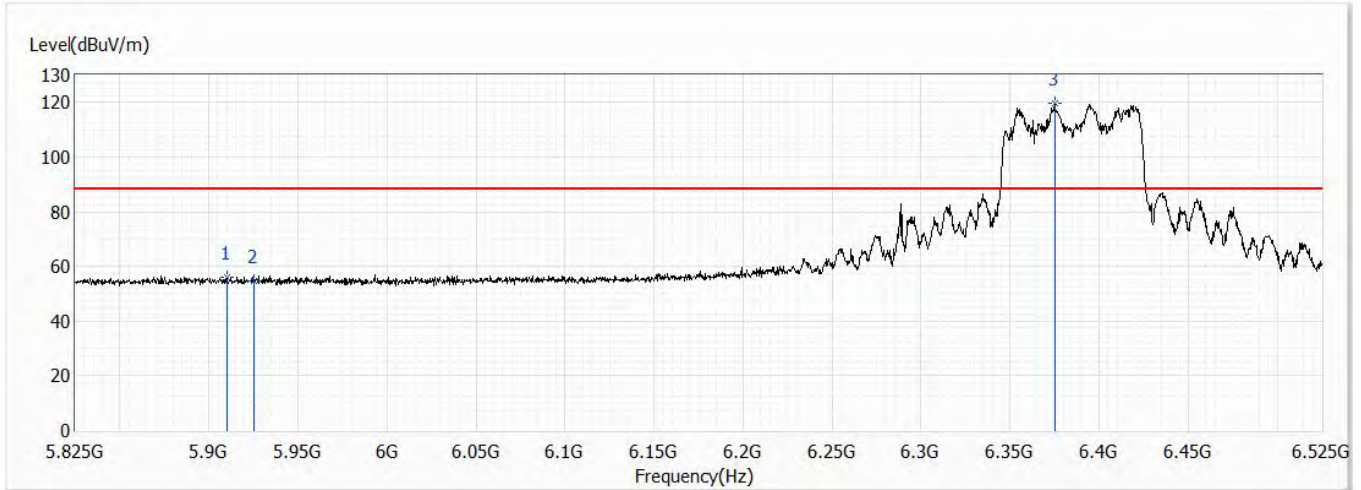


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5910.050	56.24	88.20	-31.96	31.92	24.32	PK
2	5925.000	54.76	88.20	-33.44	30.39	24.37	PK
!3	6375.200	119.80	88.20	31.60	93.98	25.82	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch87,6.385G,BW80M	Humidity (%RH)	58.0

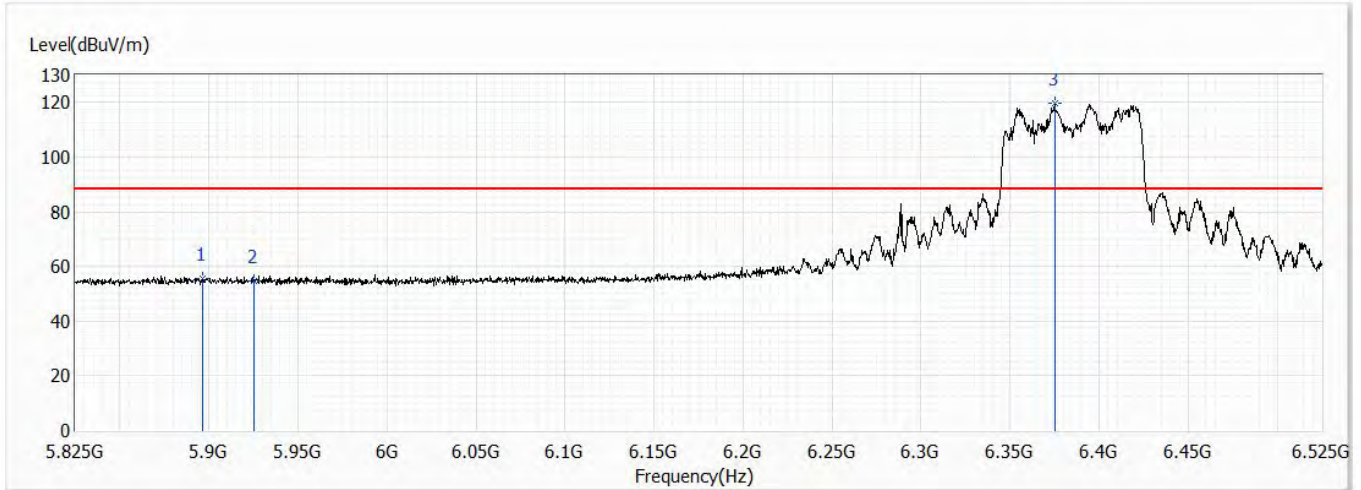


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5896.750	55.81	88.20	-32.39	31.51	24.30	PK
2	5925.000	54.76	88.20	-33.44	30.39	24.37	PK
!3	6375.200	119.80	88.20	31.60	93.98	25.82	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Test Mode	Mode 1		
Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch47,6.185G,BW160M	Humidity (%RH)	58.0

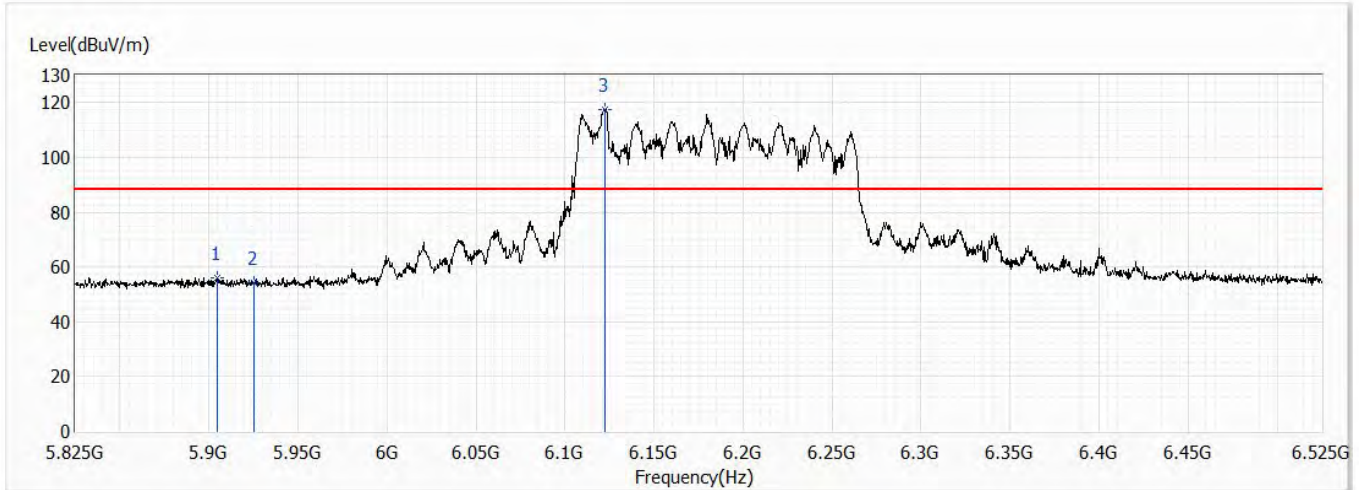


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5904.450	56.20	88.20	-32.00	31.88	24.32	PK
2	5925.000	54.26	88.20	-33.94	29.89	24.37	PK
!3	6122.500	117.62	88.20	29.42	92.60	25.02	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Test Mode	Mode 1		
Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch47,6.185G,BW160M	Humidity (%RH)	58.0

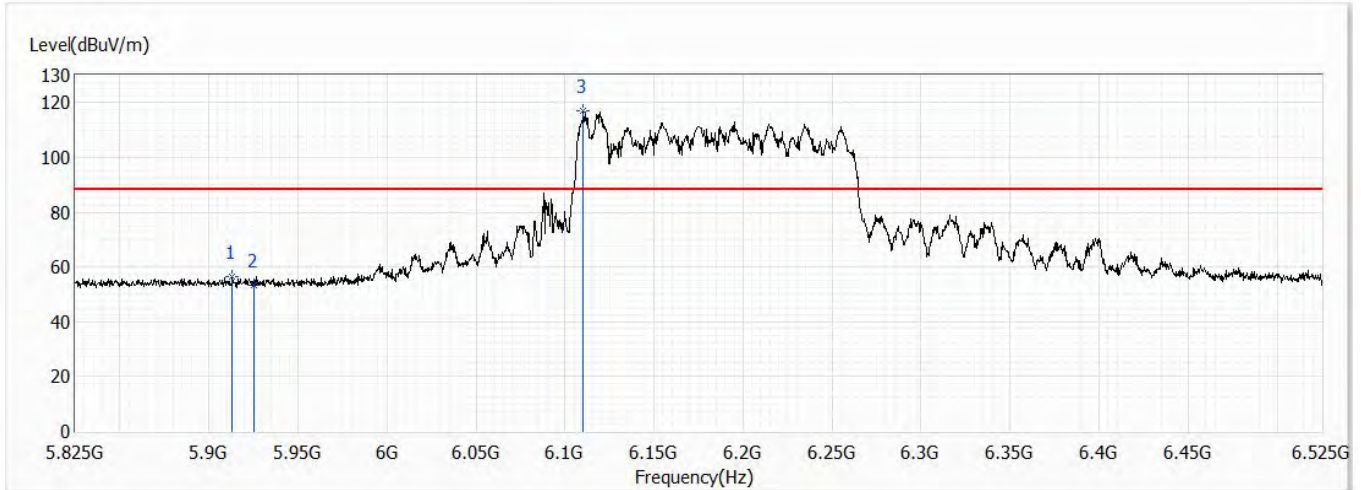


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5913.200	56.38	88.20	-31.82	32.04	24.34	PK
2	5925.000	53.52	88.20	-34.68	29.15	24.37	PK
!3	6110.250	116.85	88.20	28.65	91.87	24.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch79,6.345G,BW160M	Humidity (%RH)	58.0

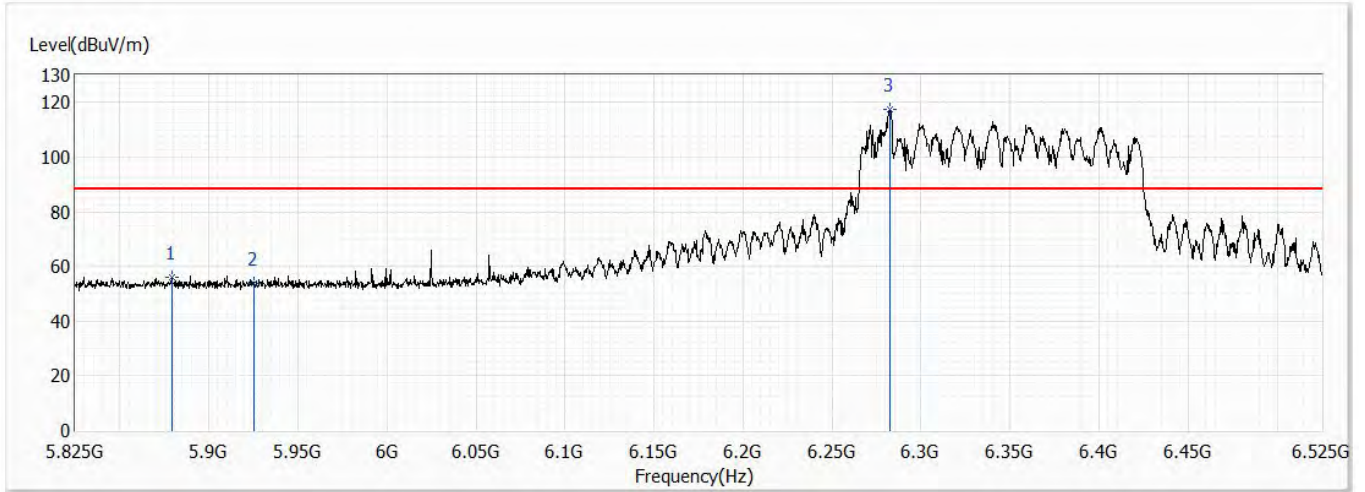


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5879.250	56.09	88.20	-32.11	31.86	24.23	PK
2	5925.000	53.98	88.20	-34.22	29.61	24.37	PK
!3	6282.450	117.54	88.20	29.34	91.99	25.55	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	BF,802.11ax,Ch79,6.345G,BW160M	Humidity (%RH)	58.0

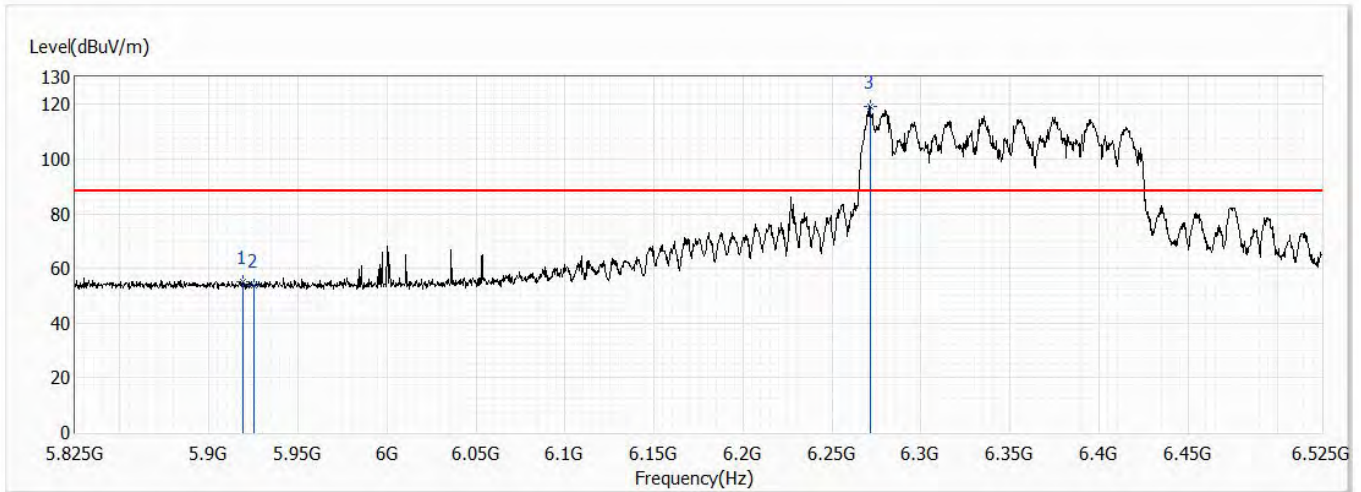


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5918.800	55.20	88.20	-33.00	30.84	24.36	PK
2	5925.000	53.57	88.20	-34.63	29.20	24.37	PK
!3	6271.250	119.20	88.20	31.00	93.68	25.52	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW160M	Humidity (%RH)	58.0

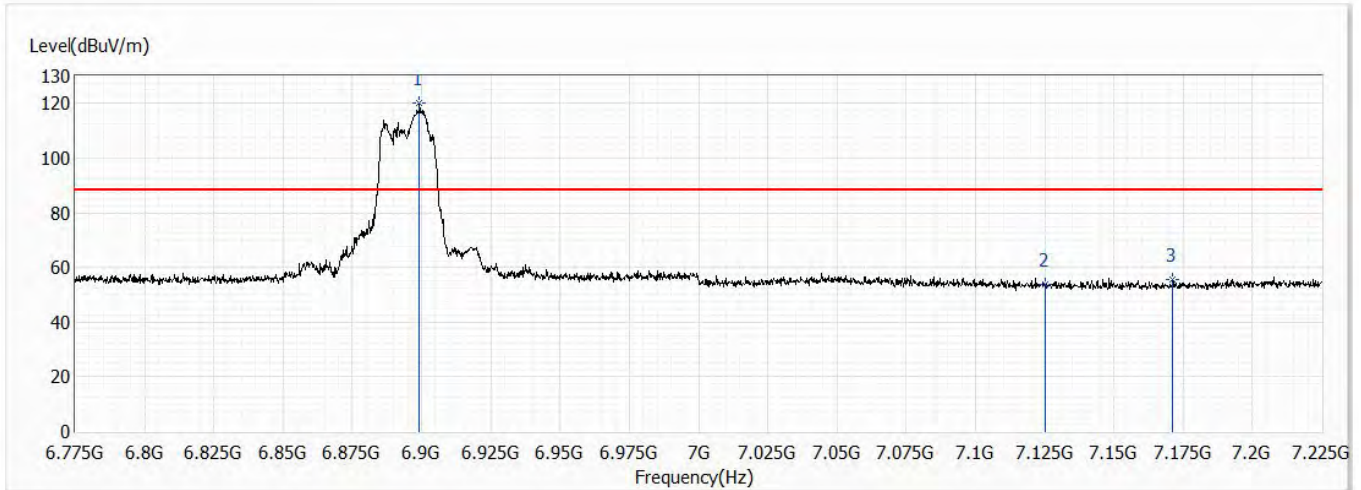


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6899.200	120.09	88.20	31.89	92.06	28.03	PK
2	7125.000	53.78	88.20	-34.42	24.85	28.93	PK
3	7171.225	55.60	88.20	-32.60	26.50	29.10	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch189,6.895G,BW160M	Humidity (%RH)	58.0

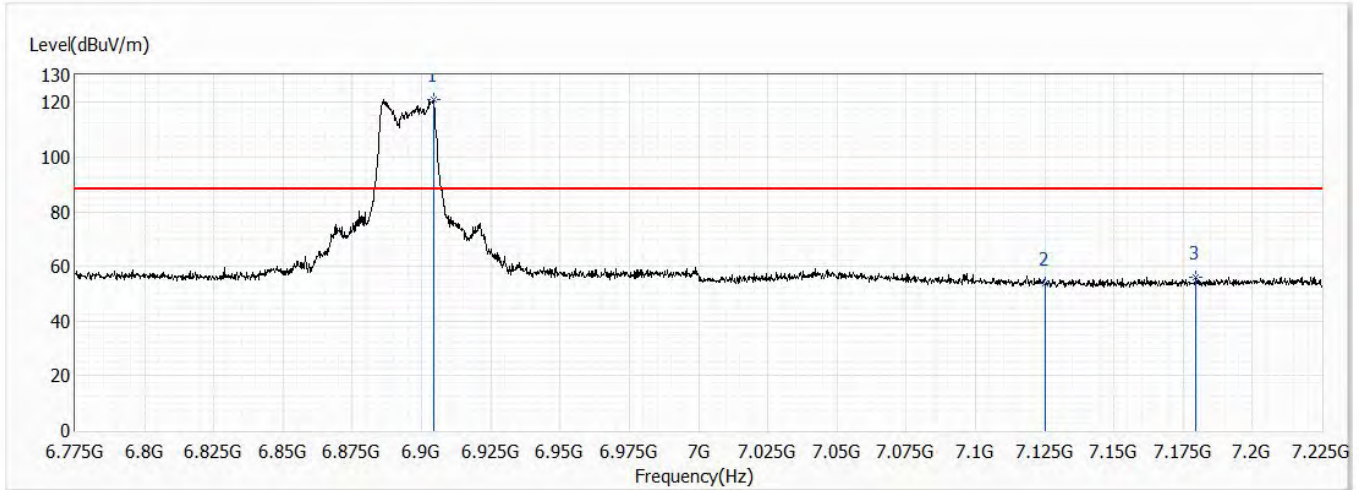


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6904.375	121.06	88.20	32.86	93.01	28.05	PK
2	7125.000	53.96	88.20	-34.24	25.03	28.93	PK
3	7179.550	56.10	88.20	-32.10	26.98	29.12	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW160M	Humidity (%RH)	58.0

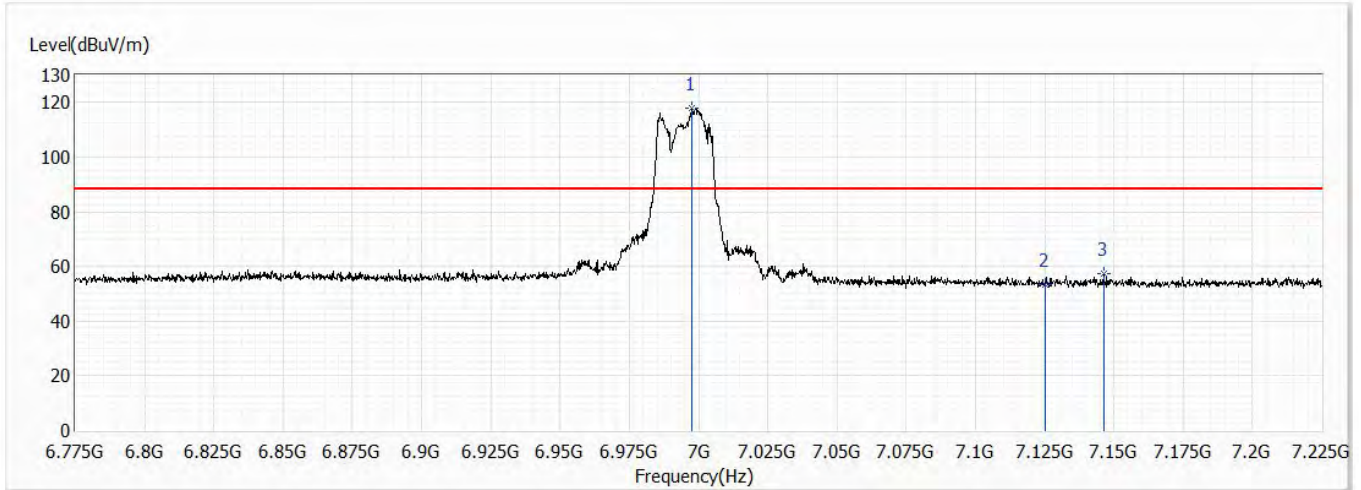


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6997.525	118.07	88.20	29.87	89.59	28.48	PK
2	7125.000	53.42	88.20	-34.78	24.49	28.93	PK
3	7146.250	57.38	88.20	-30.82	28.38	29.00	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch209,6.995G,BW160M	Humidity (%RH)	58.0

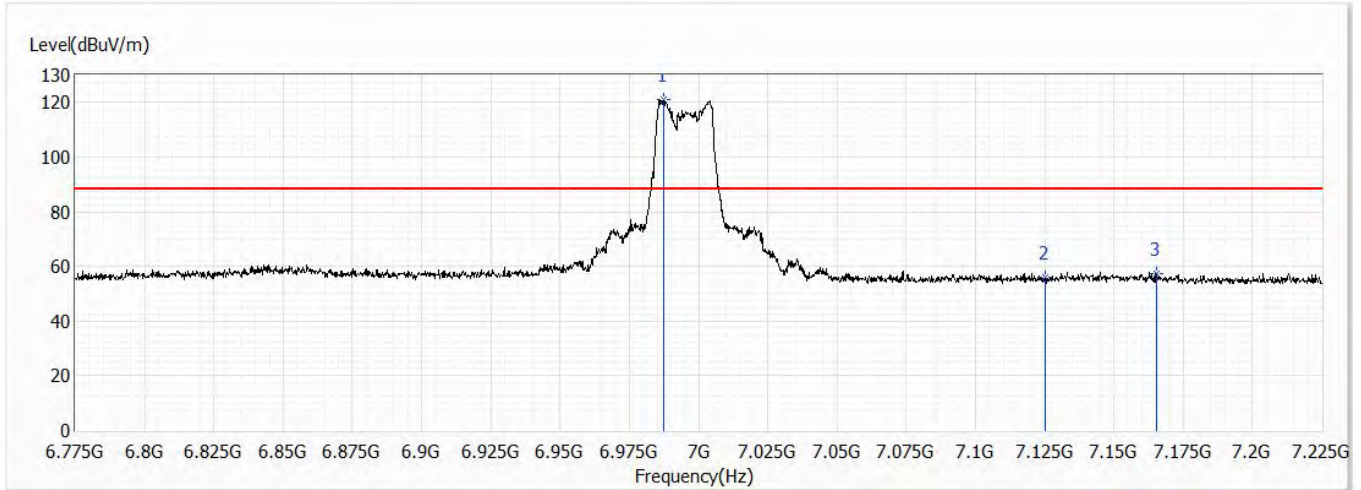


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6987.400	121.04	88.20	32.84	92.62	28.42	PK
2	7125.000	56.02	88.20	-32.18	27.09	28.93	PK
3	7165.600	57.57	88.20	-30.63	28.50	29.07	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	CDD,802.11ax,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

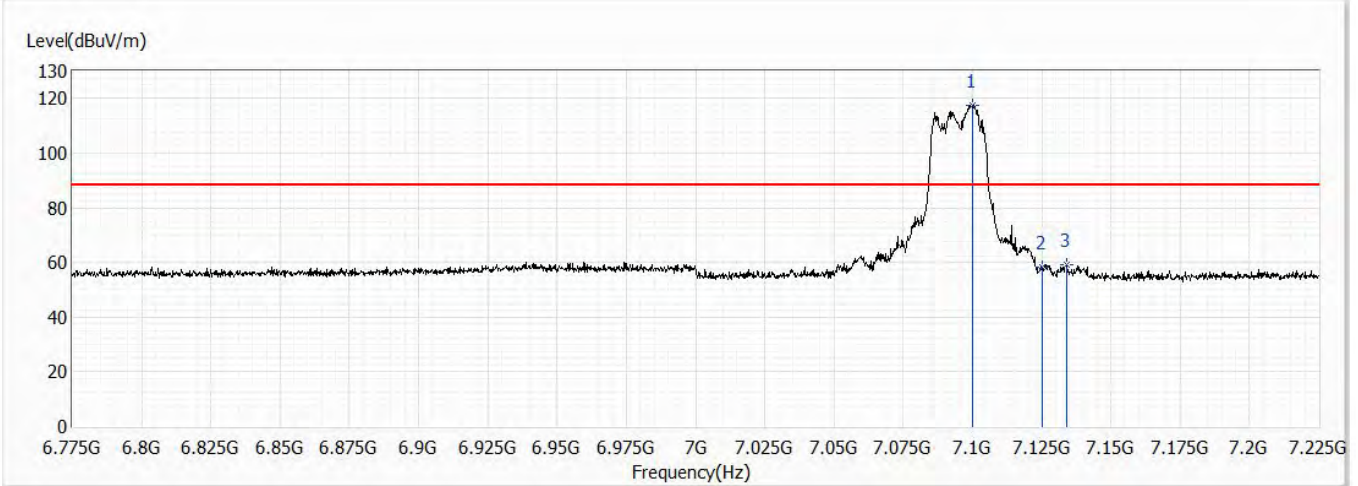


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7100.125	117.60	88.20	29.40	88.76	28.84	PK
2	7125.000	58.41	88.20	-29.79	29.48	28.93	PK
3	7133.875	59.20	88.20	-29.00	30.24	28.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/19
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	CDD,802.11ax,Ch229,7.095G,BW20M	Humidity (%RH)	58.0

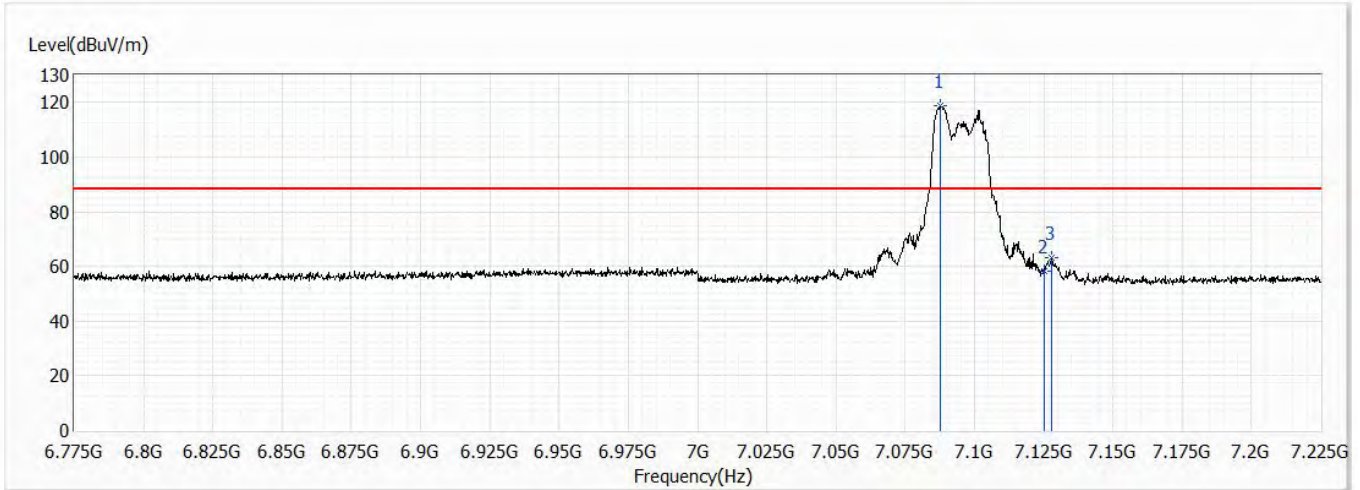


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7087.525	118.97	88.20	30.77	90.17	28.80	PK
2	7125.000	58.21	88.20	-29.99	29.28	28.93	PK
3	7128.025	63.30	88.20	-24.90	34.36	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0

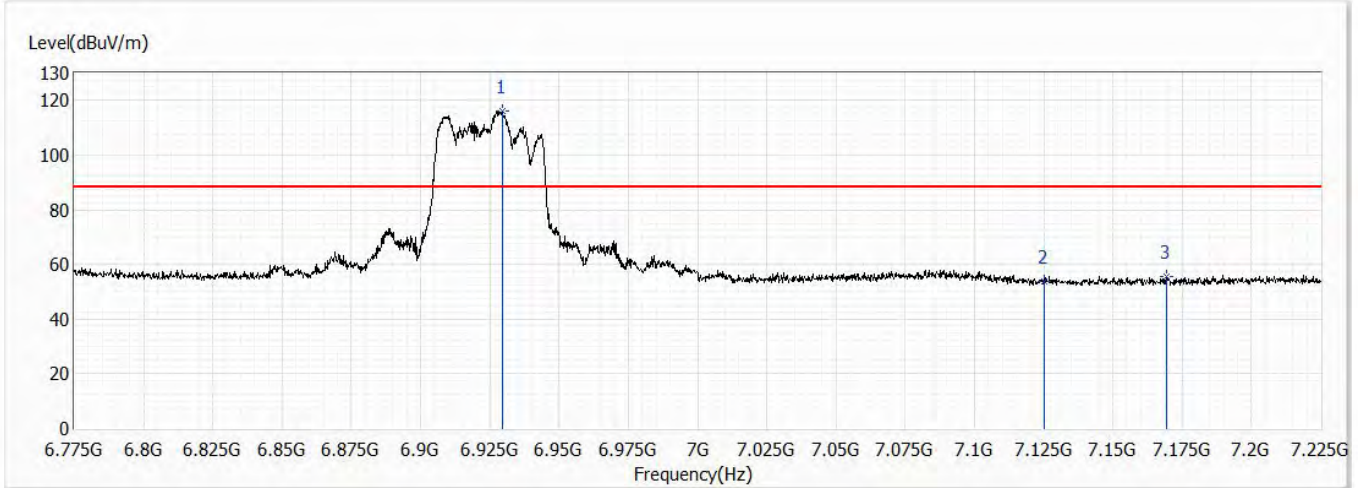


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6929.350	116.26	88.20	28.06	88.10	28.16	PK
2	7125.000	53.91	88.20	-34.29	24.98	28.93	PK
3	7169.425	55.44	88.20	-32.76	26.35	29.09	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch195,6.925G,BW40M	Humidity (%RH)	58.0

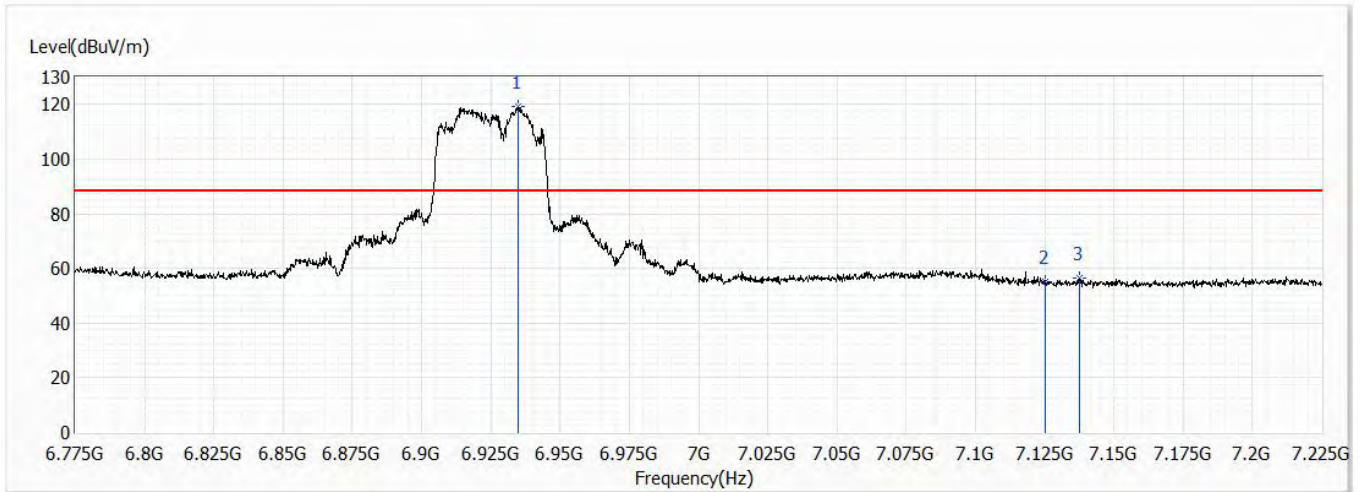


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6934.975	119.28	88.20	31.08	91.10	28.18	PK
2	7125.000	55.06	88.20	-33.14	26.13	28.93	PK
3	7137.475	56.28	88.20	-31.92	27.30	28.98	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

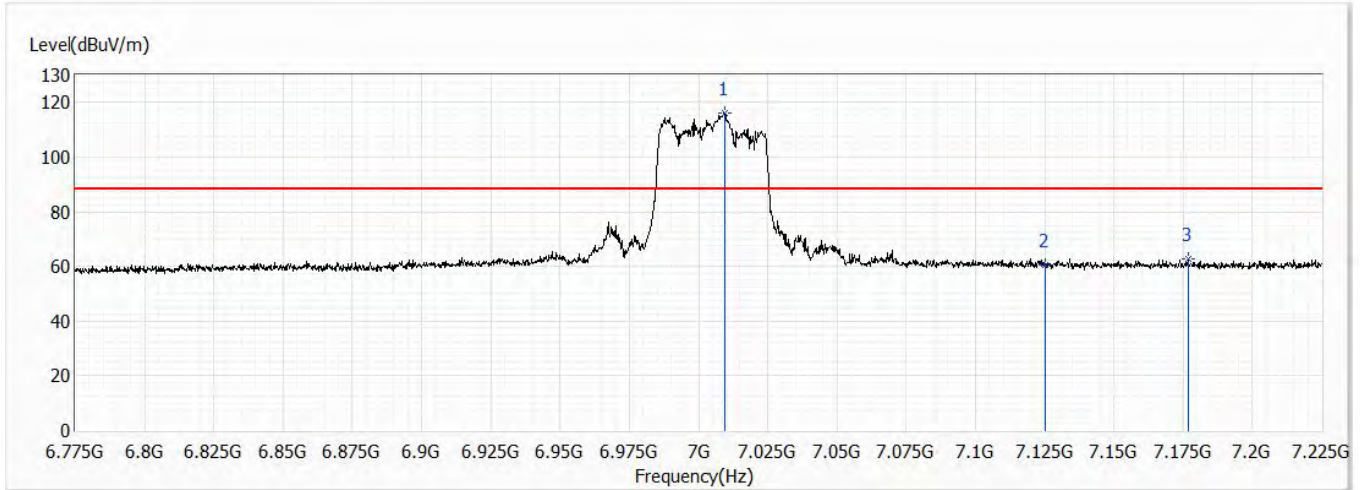


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7009.450	116.30	88.20	28.10	87.77	28.53	PK
2	7125.000	60.59	88.20	-27.61	31.66	28.93	PK
3	7176.850	62.58	88.20	-25.62	33.47	29.11	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch211,7.005G,BW40M	Humidity (%RH)	58.0

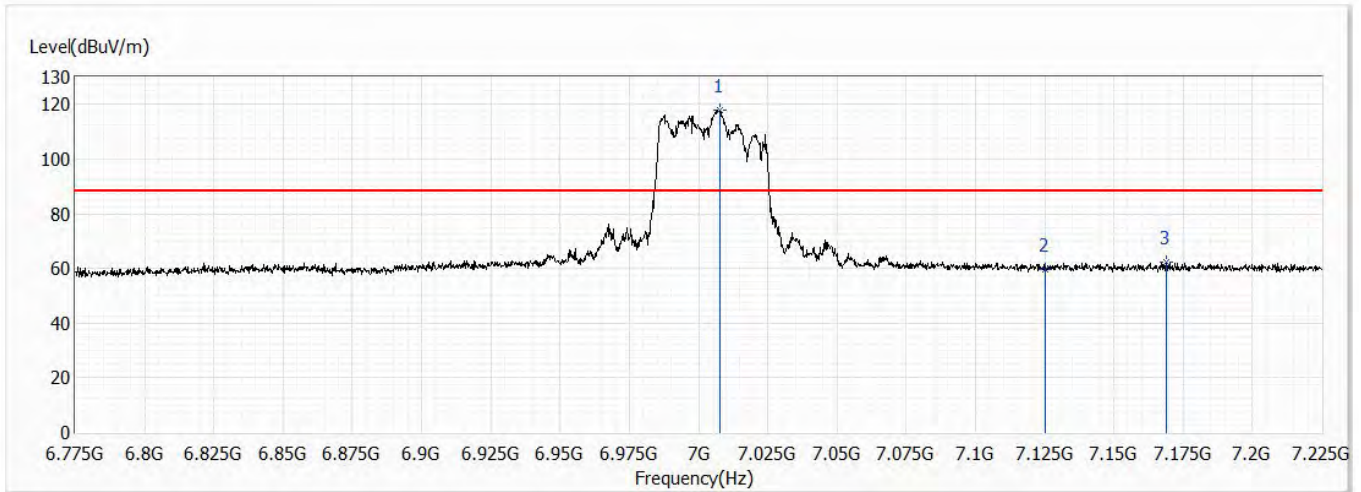


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7007.650	118.08	88.20	29.88	89.56	28.52	PK
2	7125.000	59.65	88.20	-28.55	30.72	28.93	PK
3	7168.975	62.14	88.20	-26.06	33.05	29.09	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

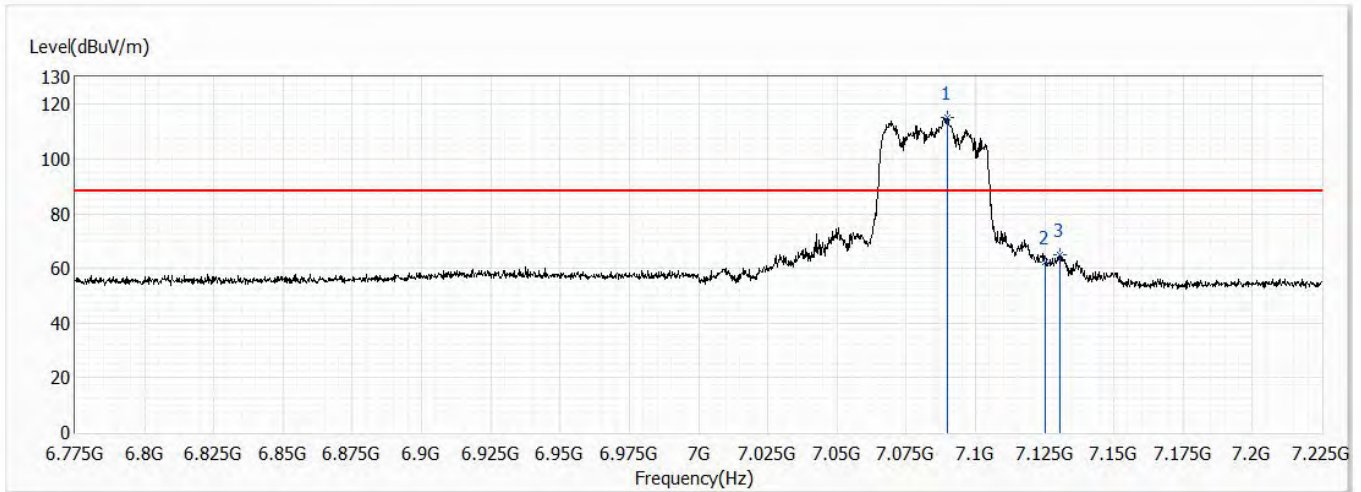


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7090.000	115.32	88.20	27.12	86.52	28.80	PK
2	7125.000	62.38	88.20	-25.82	33.45	28.93	PK
3	7130.275	64.80	88.20	-23.40	35.86	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch227,7.085G,BW40M	Humidity (%RH)	58.0

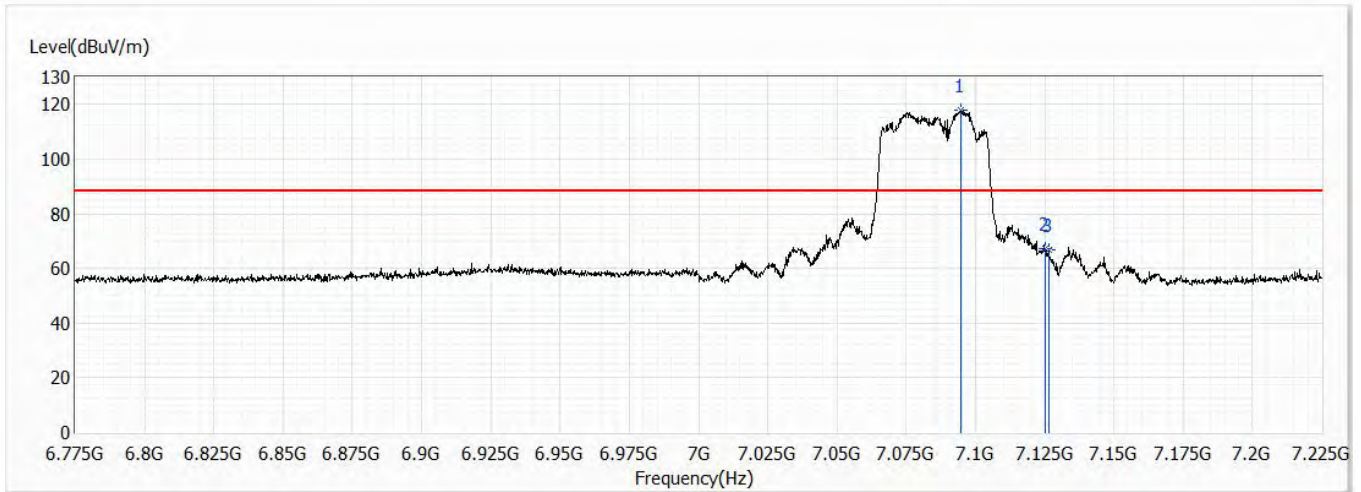


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	7094.725	117.95	88.20	29.75	89.12	28.83	PK
2	7125.000	67.45	88.20	-20.75	38.52	28.93	PK
3	7126.450	66.96	88.20	-21.24	38.02	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

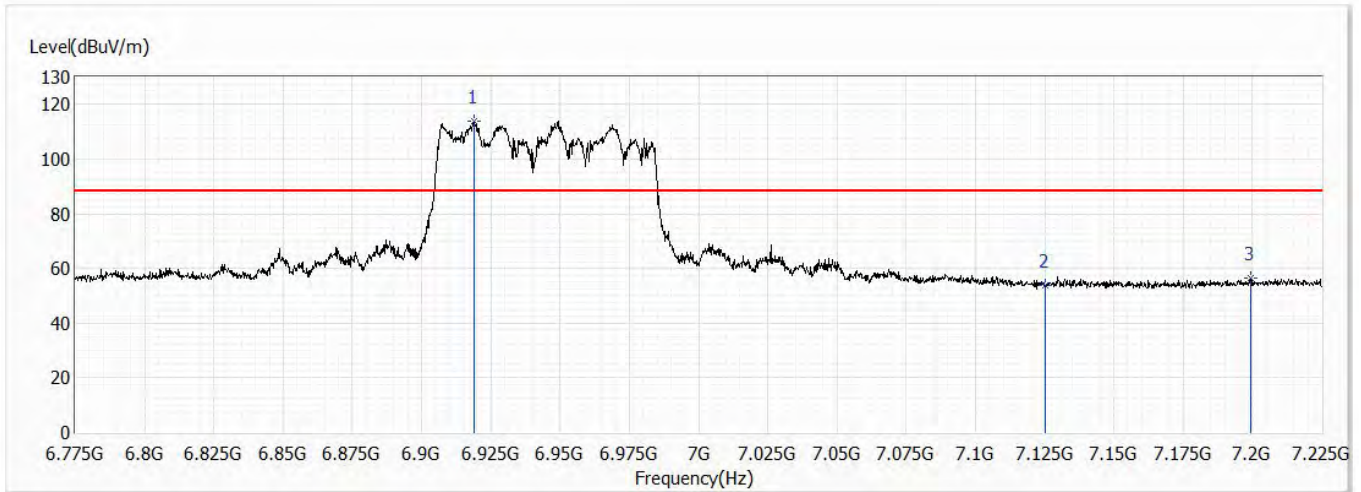


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6918.775	114.08	88.20	25.88	85.96	28.12	PK
2	7125.000	53.83	88.20	-34.37	24.90	28.93	PK
3	7199.575	56.44	88.20	-31.76	27.25	29.19	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch199,6.945G,BW80M	Humidity (%RH)	58.0

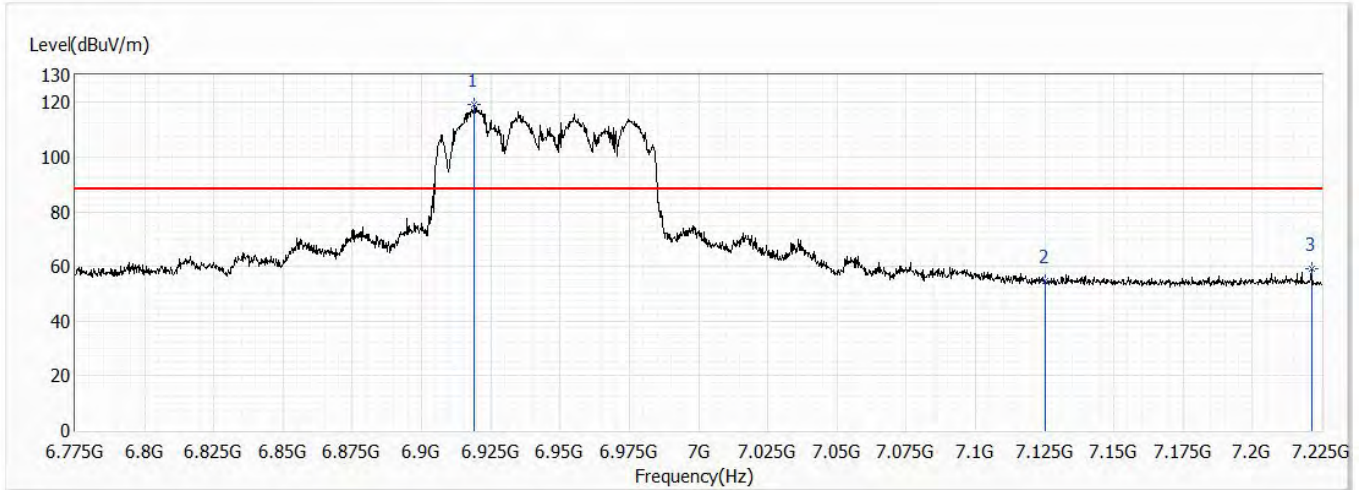


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6919.000	119.06	88.20	30.86	90.94	28.12	PK
2	7125.000	54.60	88.20	-33.60	25.67	28.93	PK
3	7221.400	59.35	88.20	-28.85	30.08	29.27	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

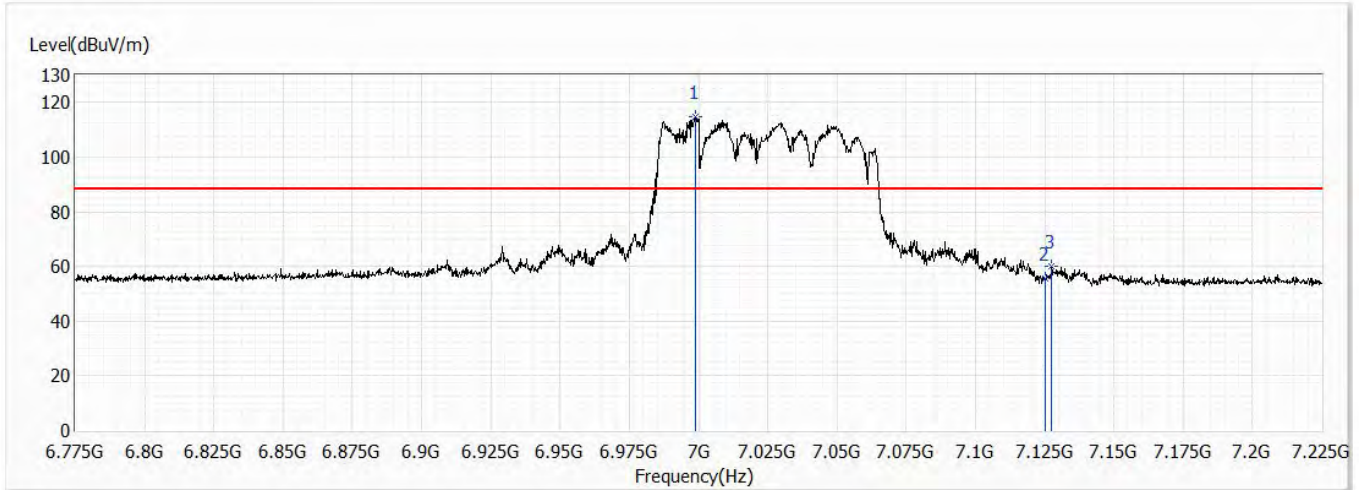


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6998.875	114.94	88.20	26.74	86.45	28.49	PK
2	7125.000	55.73	88.20	-32.47	26.80	28.93	PK
3	7127.575	59.96	88.20	-28.24	31.02	28.94	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11ax,Ch215,7.025G,BW80M	Humidity (%RH)	58.0

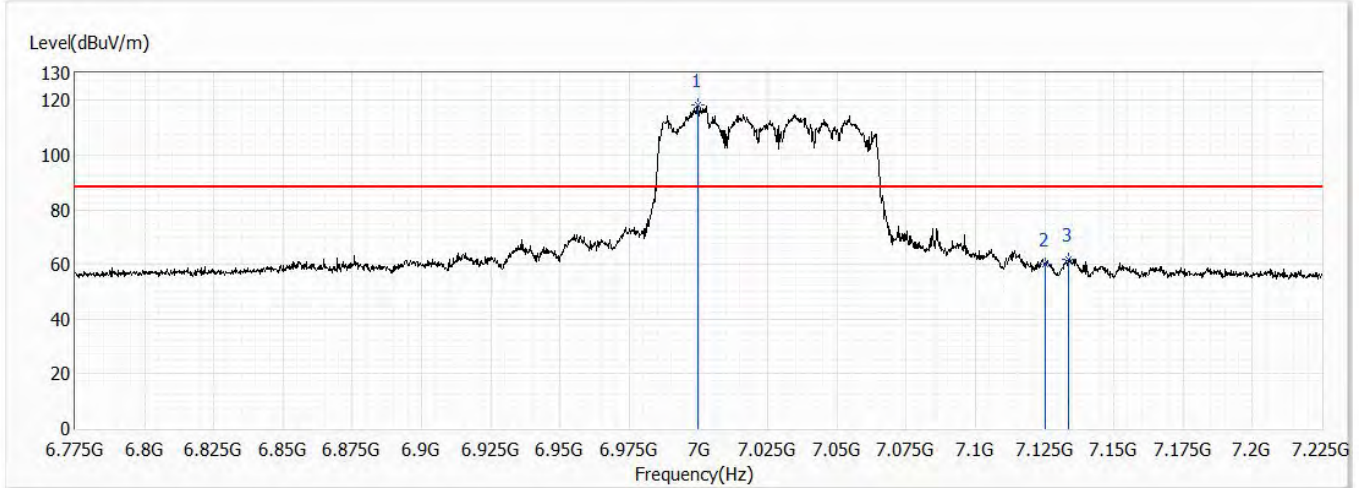


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6999.775	118.17	88.20	29.97	89.68	28.49	PK
2	7125.000	60.16	88.20	-28.04	31.23	28.93	PK
3	7133.650	61.67	88.20	-26.53	32.71	28.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	19.0
Test Condition	802.11axCh207,6.985G,BW160M	Humidity (%RH)	58.0

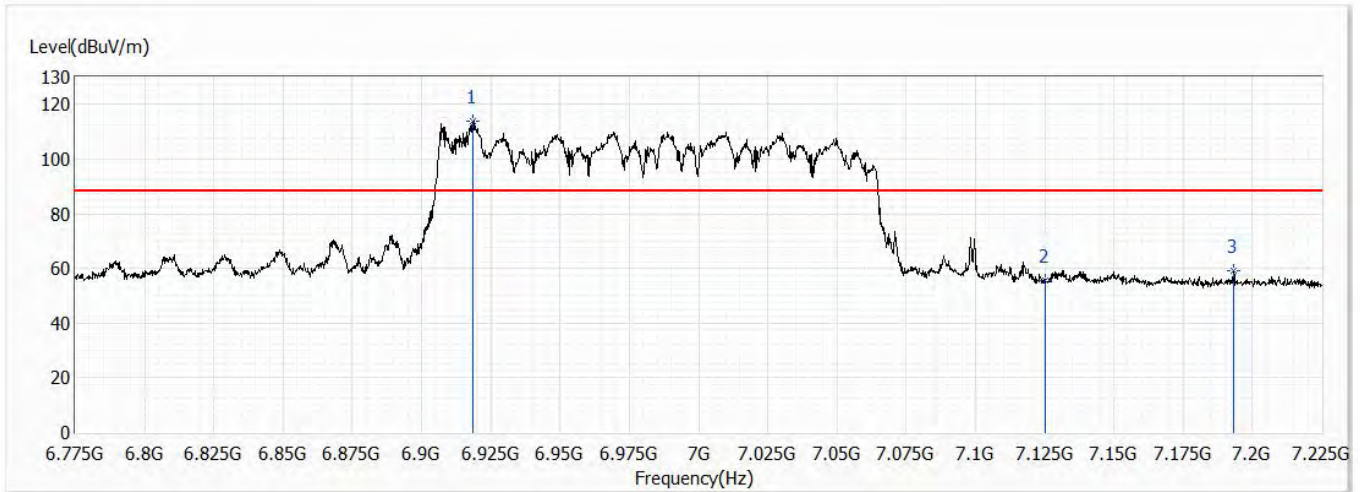


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6918.325	113.80	88.20	25.60	85.68	28.12	PK
2	7125.000	55.64	88.20	-32.56	26.71	28.93	PK
3	7193.050	59.39	88.20	-28.81	30.22	29.17	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2021/2/20
Test Mode	Mode 1	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	19.0
Test Condition	802.11axCh207,6.985G,BW160M	Humidity (%RH)	58.0

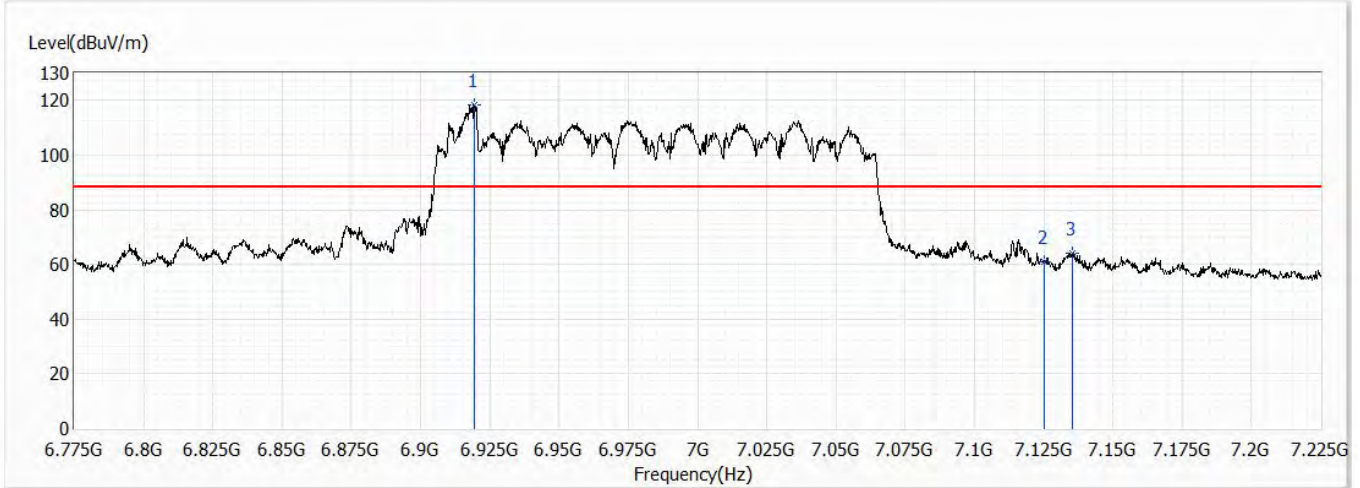


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
! 1	6919.225	118.18	88.20	29.98	90.06	28.12	PK
2	7125.000	61.09	88.20	-27.11	32.16	28.93	PK
3	7135.450	63.90	88.20	-24.30	34.94	28.96	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

9. In-Band Emission (Mask)

9.1. Test Setup

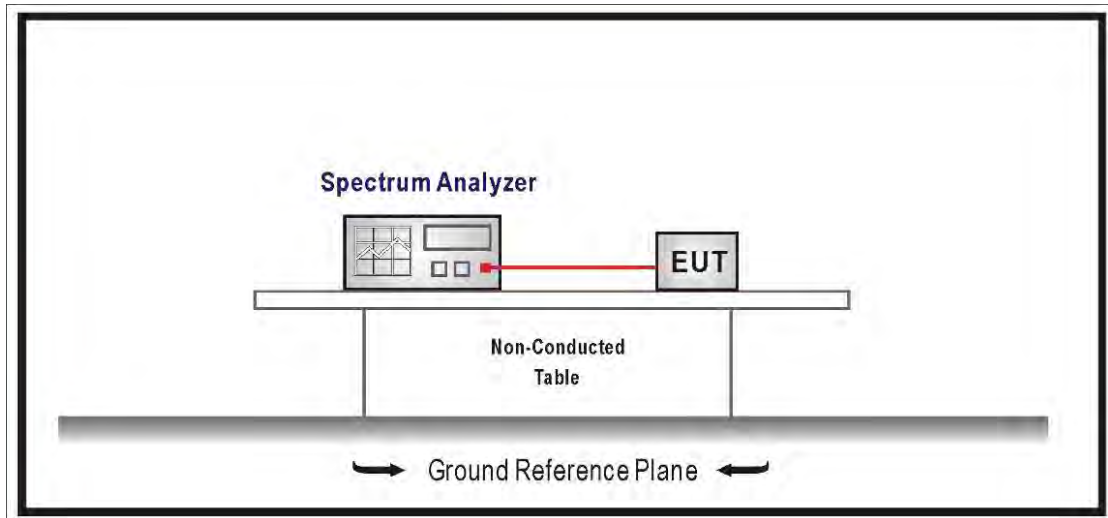

9.2. Limits

Test Items	Frequencies (MHz)	(X) dBc ^{*1}
Emission Mask	At 1MHz outside of channel edge	20
	At one channel bandwidth from the channel center ^{*2}	28
	At one- and one-half times the channel bandwidth away from channel center ^{*3}	40
	More than one- and one-half times the channel bandwidth	40

Remark:

1. The power spectral density must be suppressed by “x” dB.
2. At frequencies between one megahertz outside an unlicensed device’s channel edge and one channel bandwidth from the center of the channel, the limits must be linearly interpolated between 20dB and 28dB suppression.
3. At frequencies between one and one- and one-half times an unlicensed device’s channel bandwidth, the limits must be linearly interpolated between 28dB and 40dB suppression.

9.3. Test Procedure


1. Connect output of the antenna port to a spectrum analyzer and adjust appropriate attenuation.
2. Measure the 26 dB EBW using the test procedure 12.4.1 of ANSI C63.10-2013. (Determine the channel edge.)
3. Measure the power spectral density (for emissions mask reference) using the following procedure:
 - (1) Set the span to encompass the entire 26 dB EBW of the signal.
 - (2) Set RBW = same RBW used for 26 dB EBW measurement.
 - (3) Set VBW $\geq 3 \times$ RBW
 - (4) Number of points in sweep $\geq [2 \times \text{span} / \text{RBW}]$.
 - (5) Sweep time = auto.
 - (6) Detector = RMS (i.e., power averaging)
 - (7) Trace average at least 100 traces in power averaging (rms) mode.
 - (8) Use the peak search function on the instrument to find the peak of the spectrum.
4. Using the measuring equipment limit line function, develop the emissions mask based on the following requirements. The emissions power spectral density must be reduced below the peak power spectral density (in dB) as follows:
 - (1) Suppressed by 20 dB at 1 MHz outside of the channel edge. (The channel edge is defined as the 26-dB point on either side of the carrier center frequency.)
 - (2) Suppressed by 28 dB at one channel bandwidth from the channel center.
 - (3) Suppressed by 40 dB at one- and one-half times the channel bandwidth from the channel center.
5. Adjust the span to encompass the entire mask as necessary and clear trace.
6. Trace average at least 100 traces in power averaging (rms) mode.
7. Adjust the reference level as necessary so that the crest of the channel touches the top of the emission mask

9.4. Test Result of In-Band Emission (Mask)


Non-beamforming mode for RU-Full

Spectrum Plot


802.11a / Ant. 0 / 6115 MHz

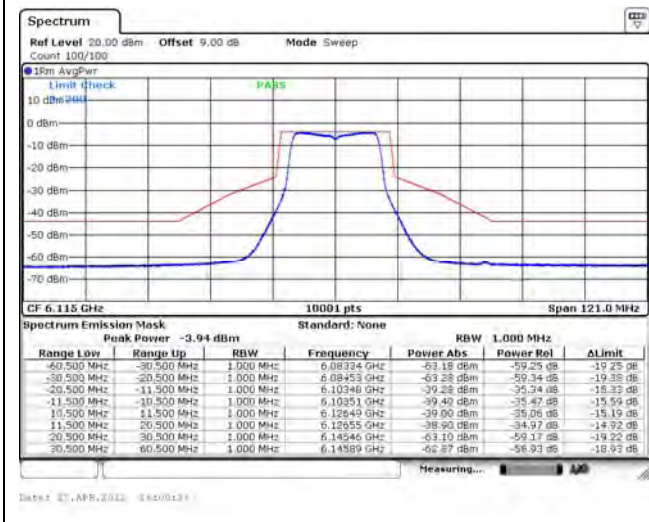


802.11a / Ant. 0 / 6255 MHz

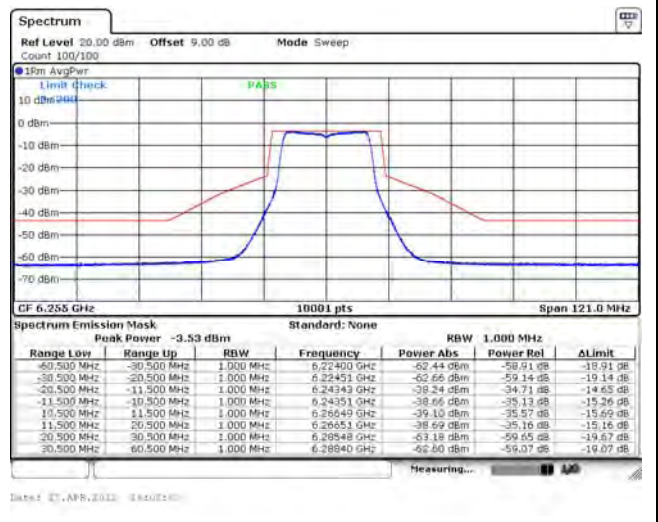


802.11a / Ant. 0 / 6415 MHz

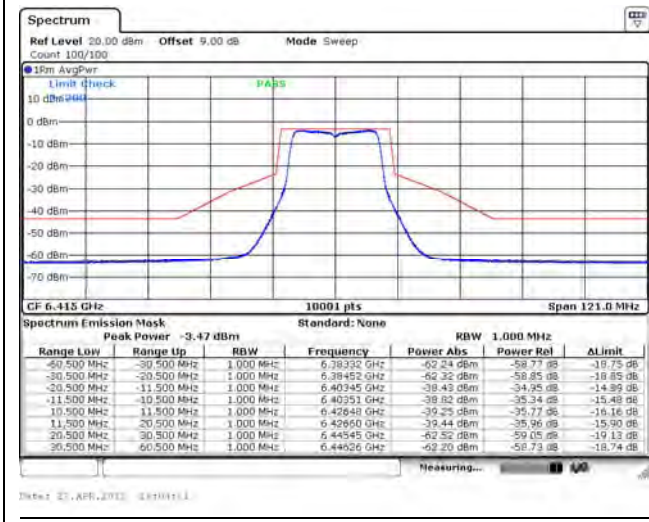


802.11a / Ant. 0 / 6435 MHz

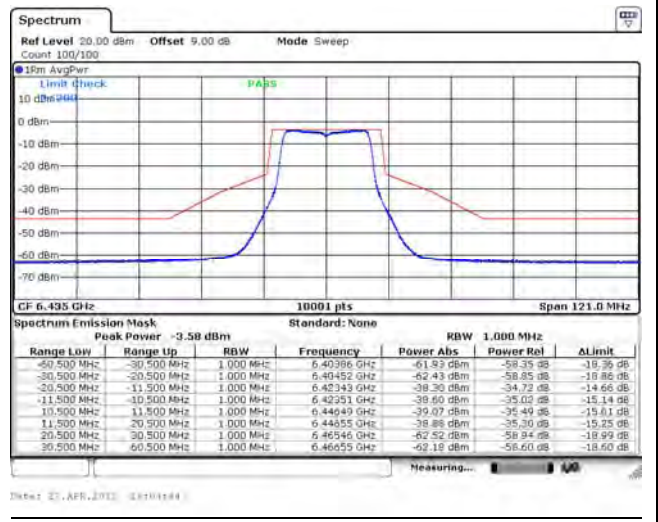

802.11a / Ant. 0 / 6475 MHz

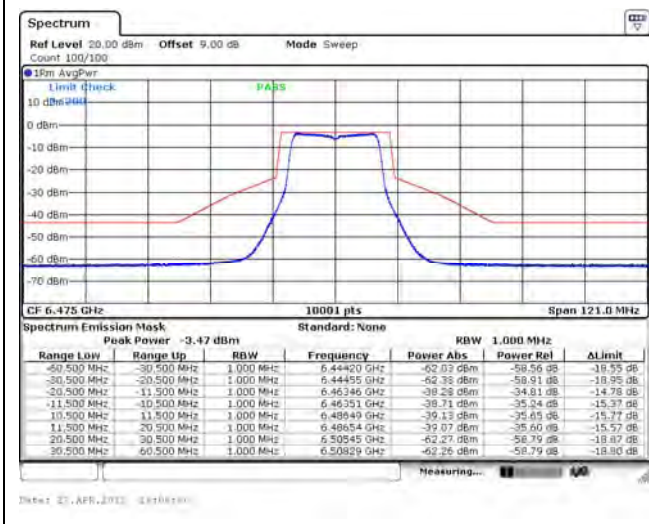


802.11a / Ant. 0 / 6515 MHz

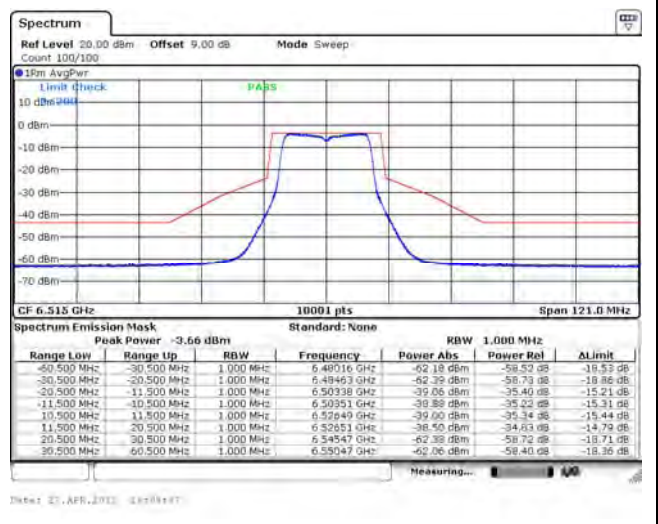


Spectrum Plot


802.11a / Ant. 0 / 6535 MHz

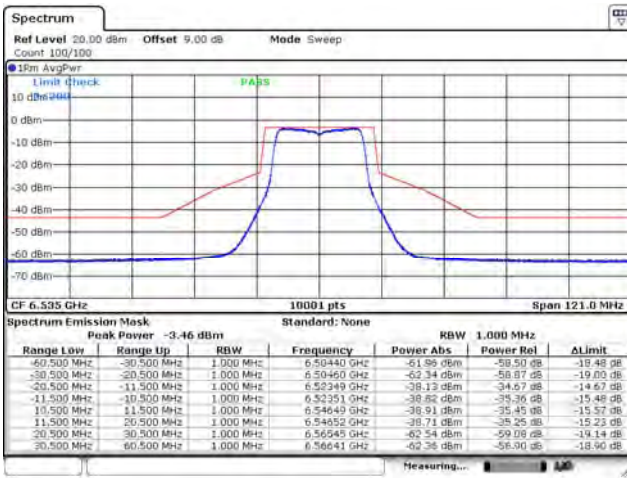


802.11a / Ant. 0 / 6695 MHz

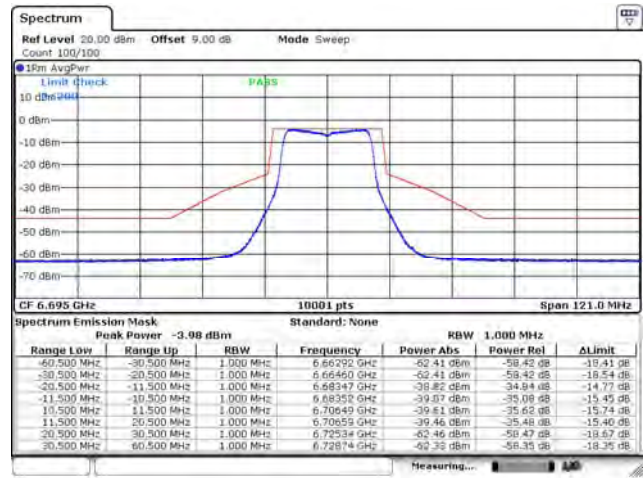


802.11a / Ant. 0 / 6855 MHz

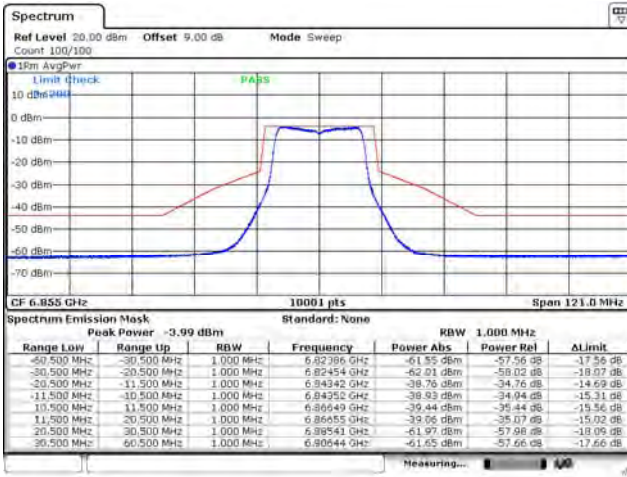


802.11a / Ant. 0 / 6875 MHz

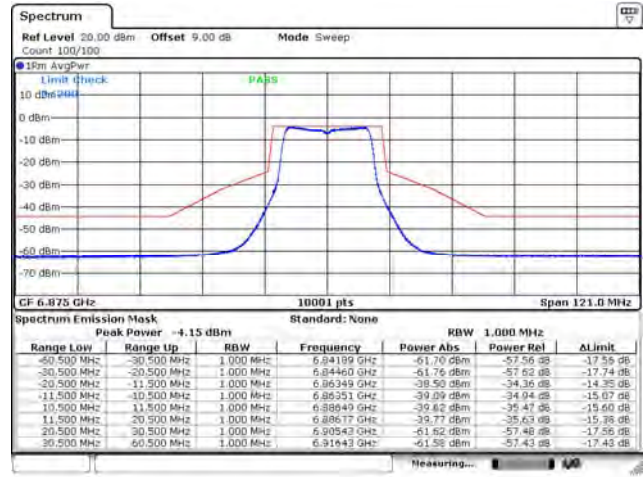


802.11a / Ant. 0 / 6895 MHz

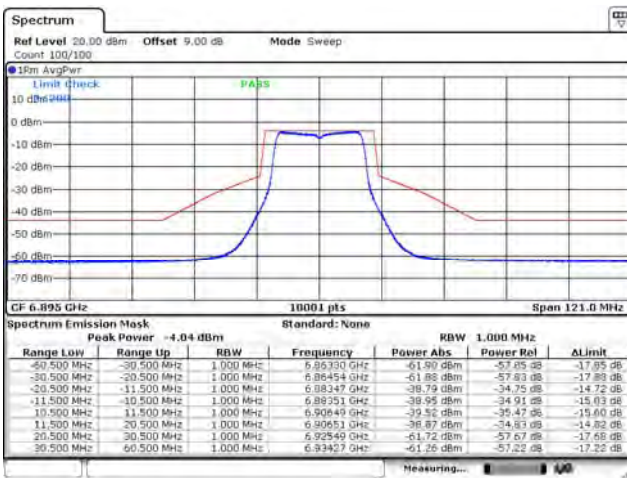


802.11a / Ant. 0 / 6995 MHz

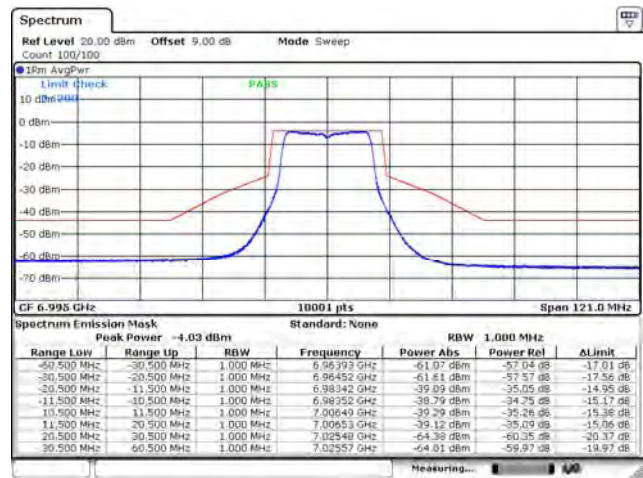

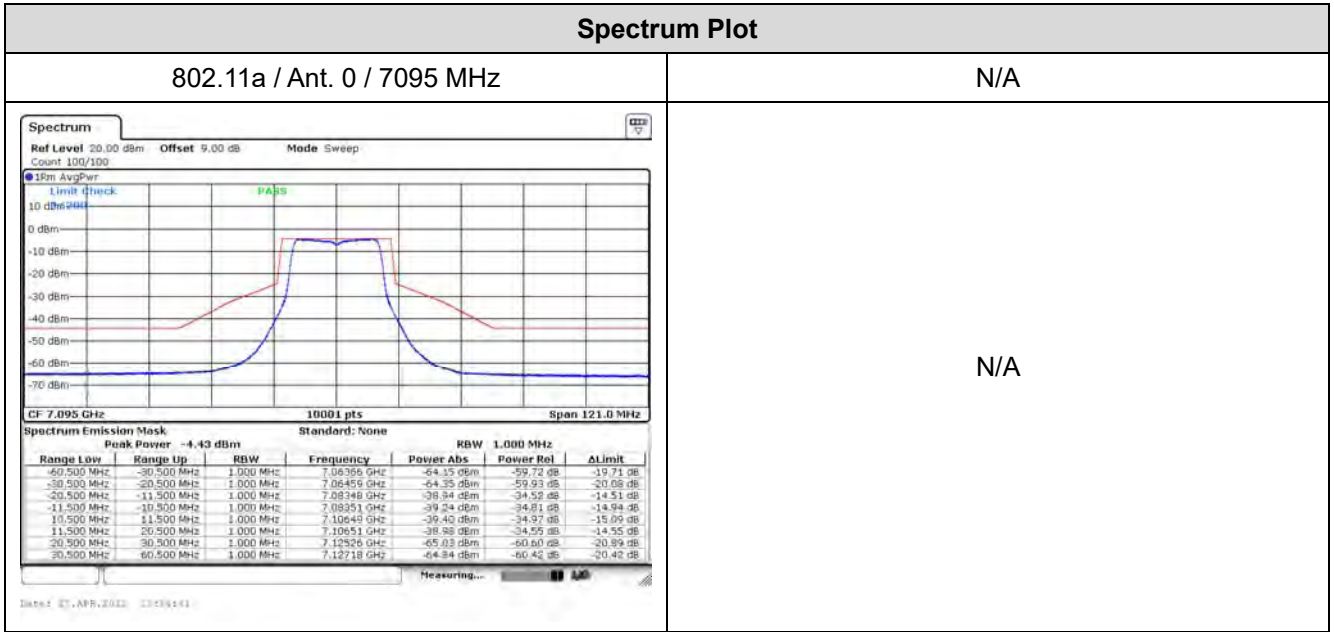


Spectrum Plot


802.11a / Ant. 1 / 6115 MHz

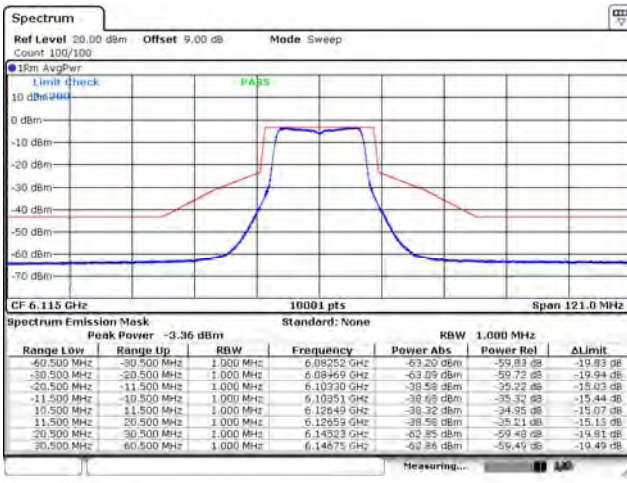


802.11a / Ant. 1 / 6255 MHz

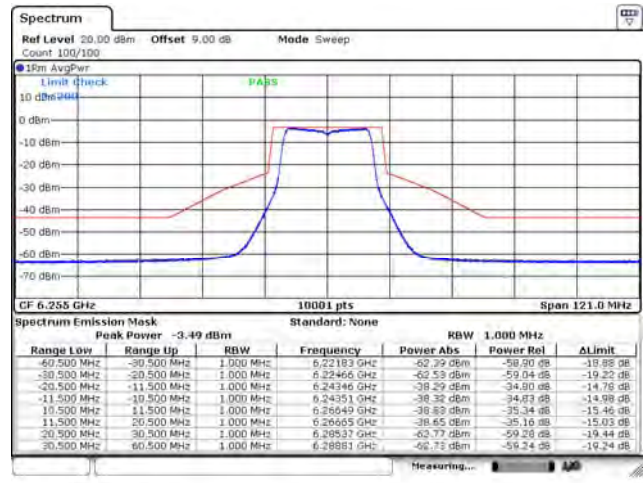


802.11a / Ant. 1 / 6415 MHz

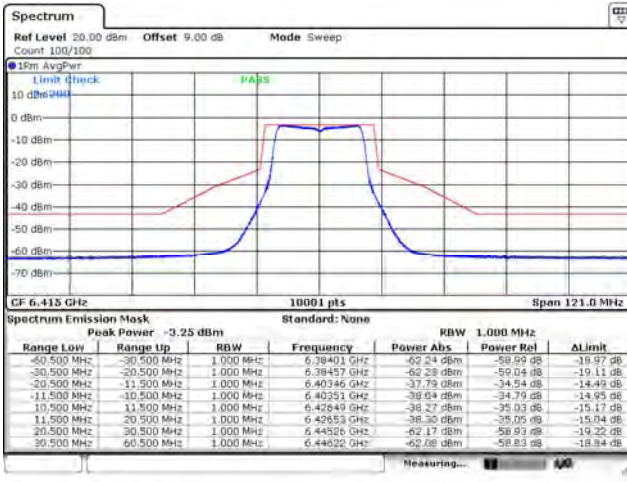


802.11a / Ant. 1 / 6435 MHz

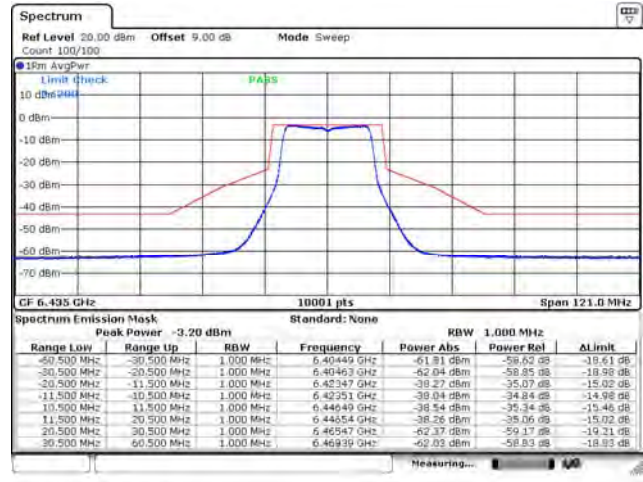

802.11a / Ant. 1 / 6475 MHz

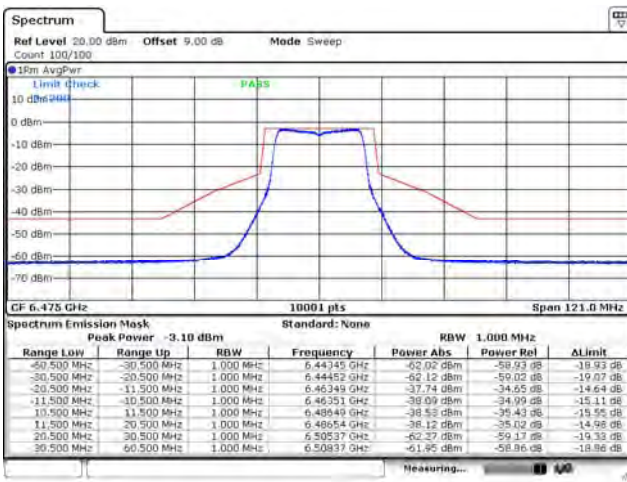


802.11a / Ant. 1 / 6515 MHz

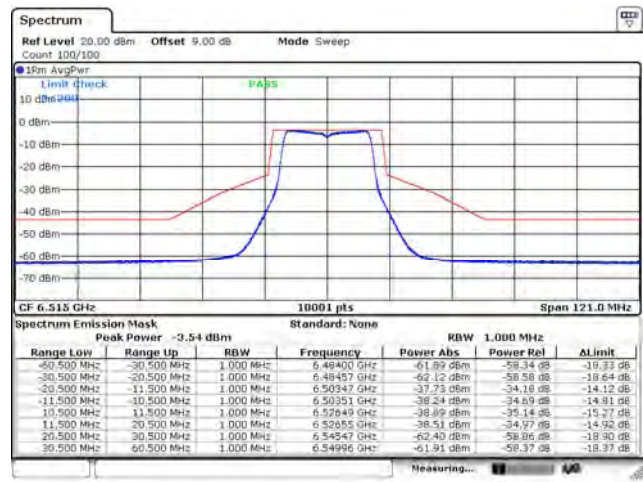


Spectrum Plot


802.11a / Ant. 1 / 6535 MHz

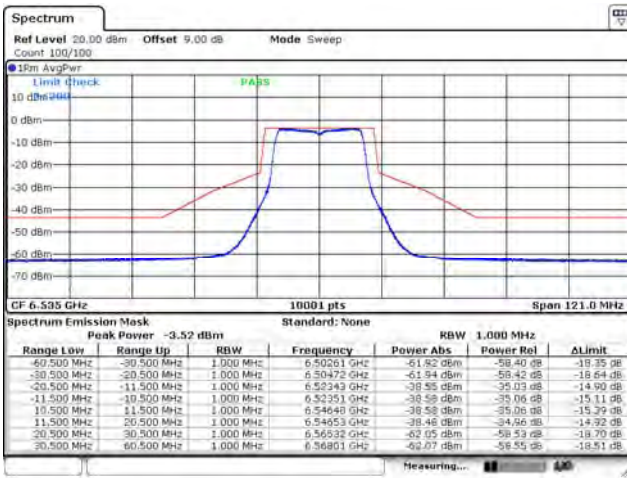


802.11a / Ant. 1 / 6695 MHz

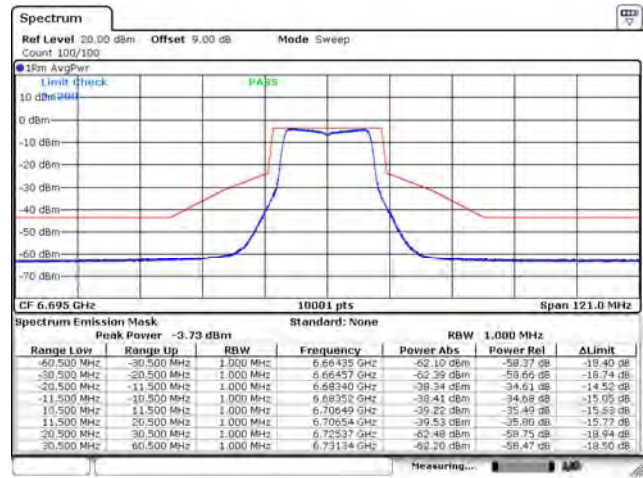


802.11a / Ant. 1 / 6855 MHz

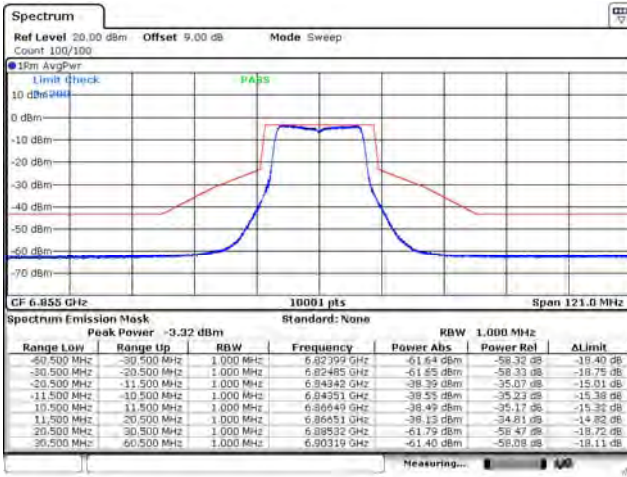


802.11a / Ant. 1 / 6875 MHz

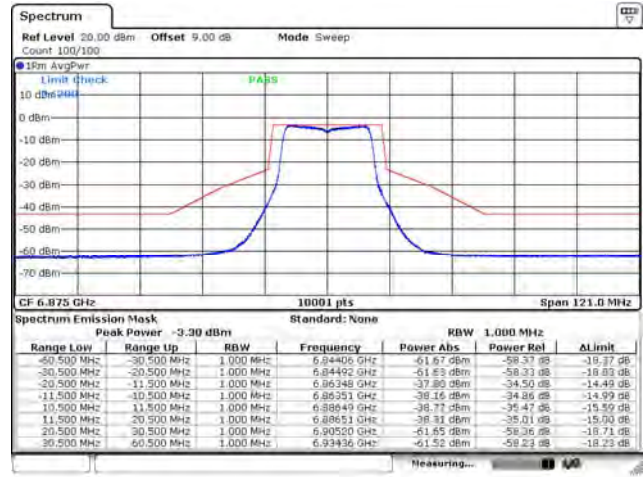


802.11a / Ant. 1 / 6895 MHz

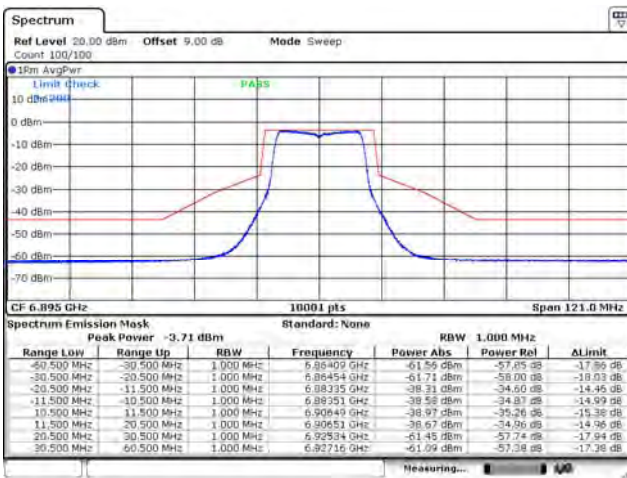


802.11a / Ant. 1 / 6995 MHz

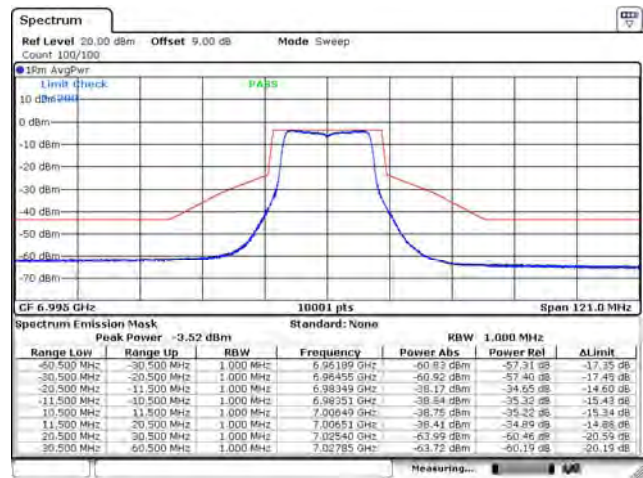

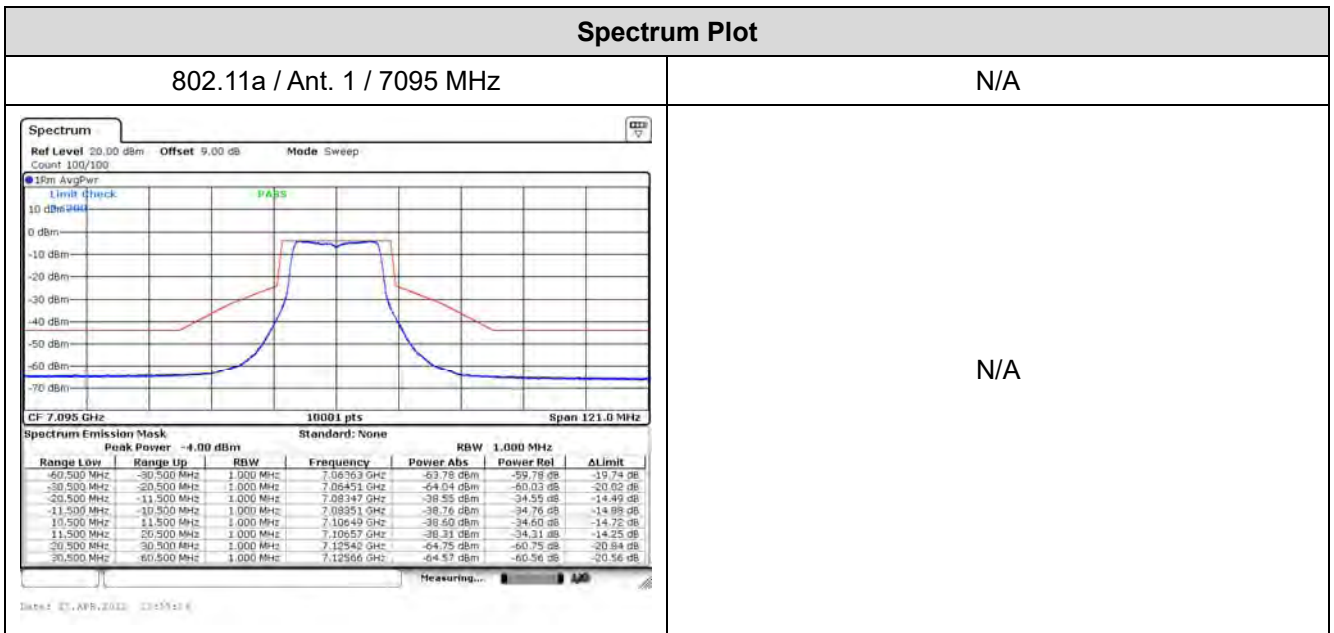


Spectrum Plot


802.11a / Ant. 2 / 6115 MHz

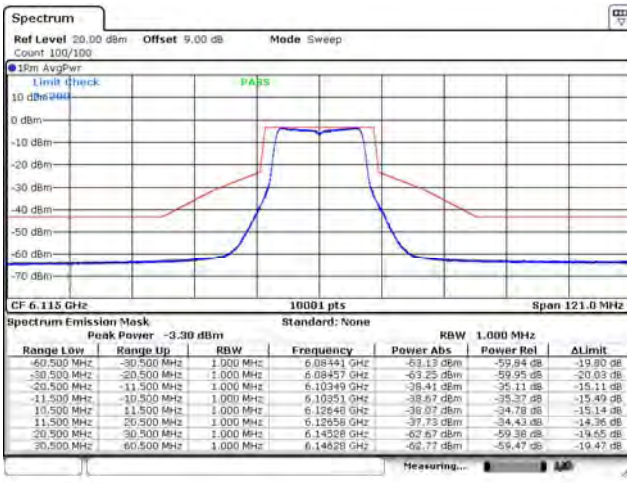


802.11a / Ant. 2 / 6255 MHz

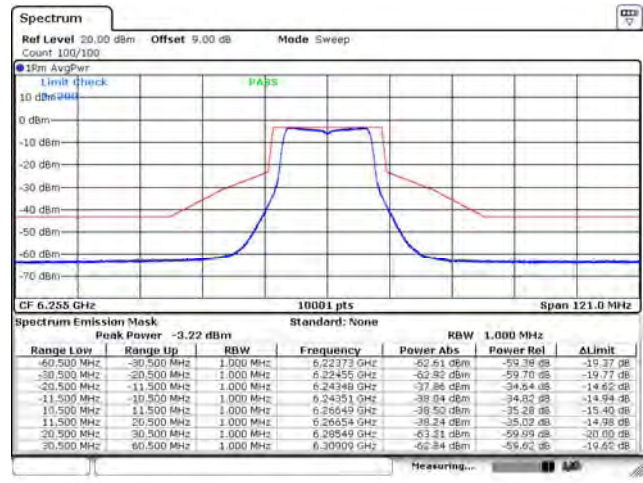


802.11a / Ant. 2 / 6415 MHz

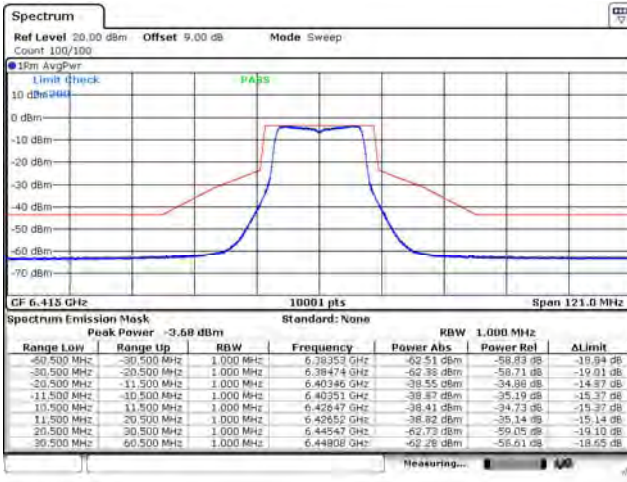


802.11a / Ant. 2 / 6435 MHz

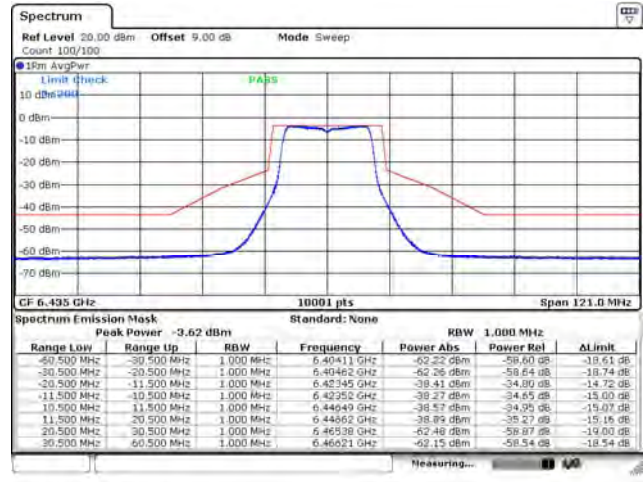

802.11a / Ant. 2 / 6475 MHz

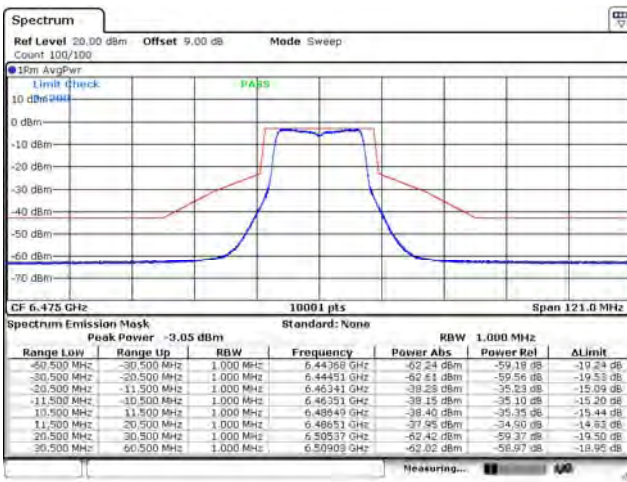


802.11a / Ant. 2 / 6515 MHz

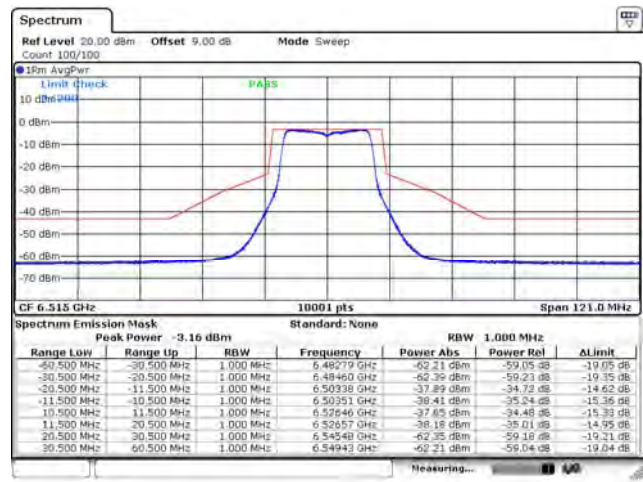


Spectrum Plot


802.11a / Ant. 2 / 6535 MHz

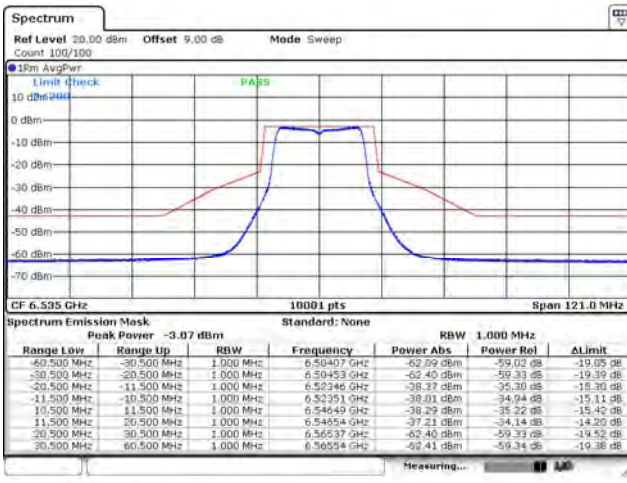


802.11a / Ant. 2 / 6695 MHz

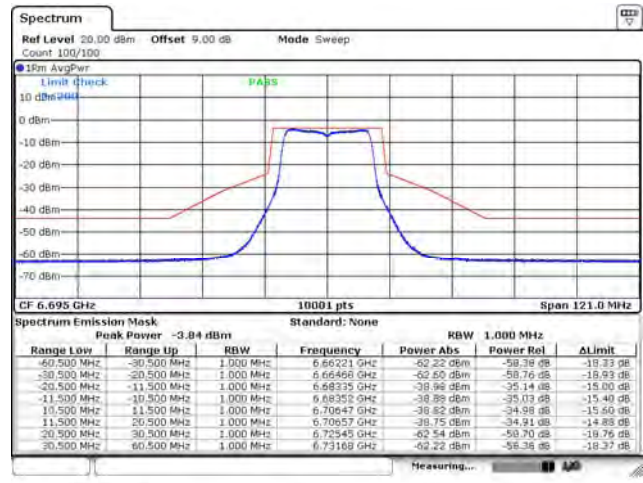


802.11a / Ant. 2 / 6855 MHz

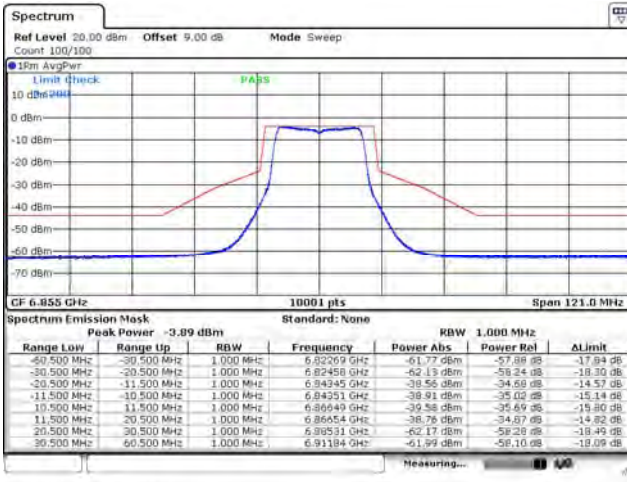


802.11a / Ant. 2 / 6875 MHz

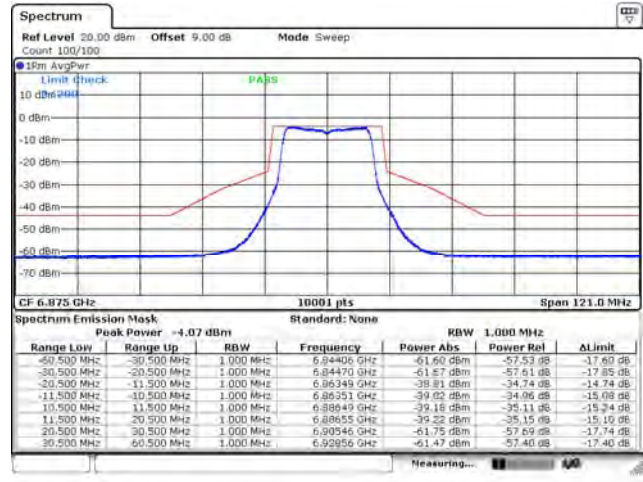


802.11a / Ant. 2 / 6895 MHz

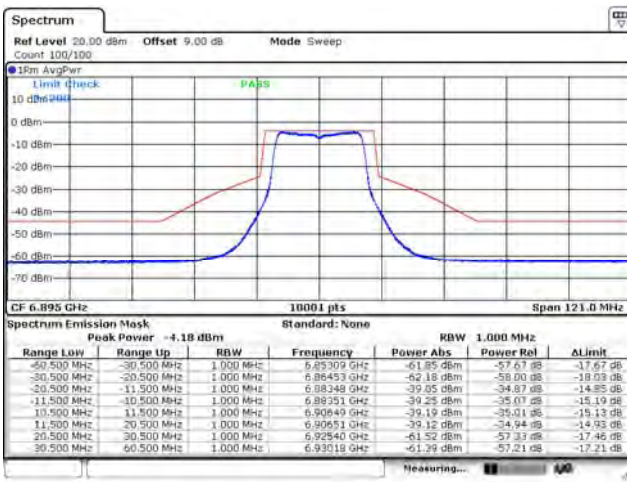


802.11a / Ant. 2 / 6995 MHz

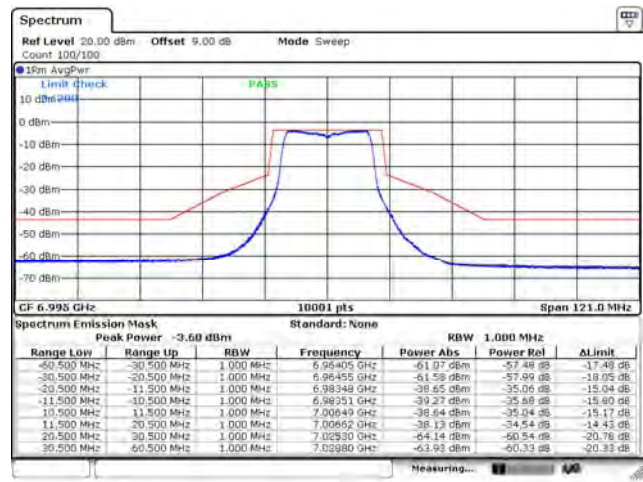

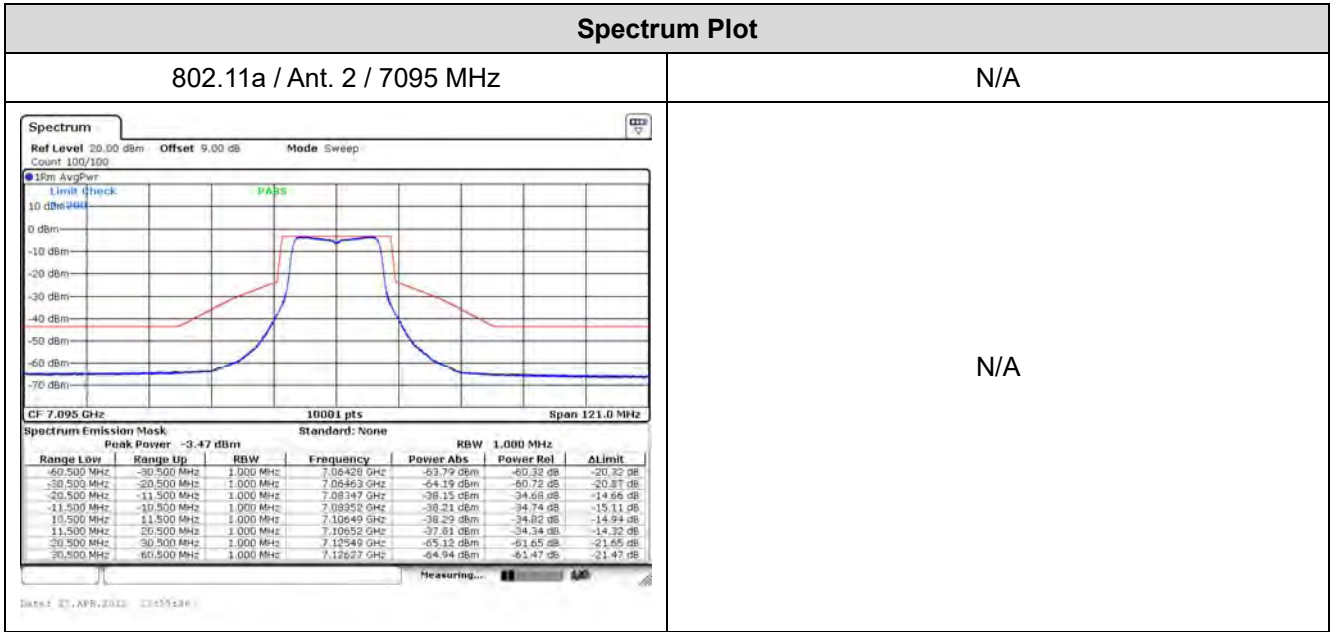


Spectrum Plot


802.11a / Ant. 3 / 6115 MHz

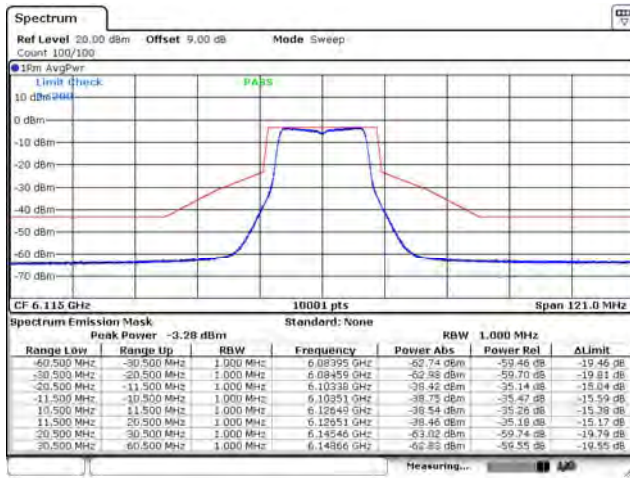


802.11a / Ant. 3 / 6255 MHz

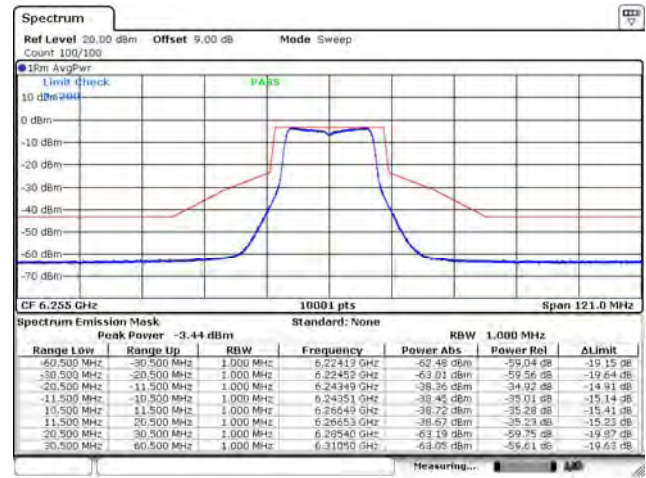


802.11a / Ant. 3 / 6415 MHz

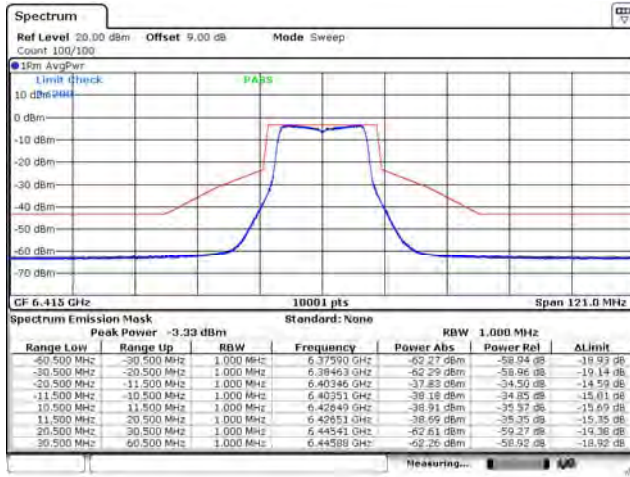


802.11a / Ant. 3 / 6435 MHz

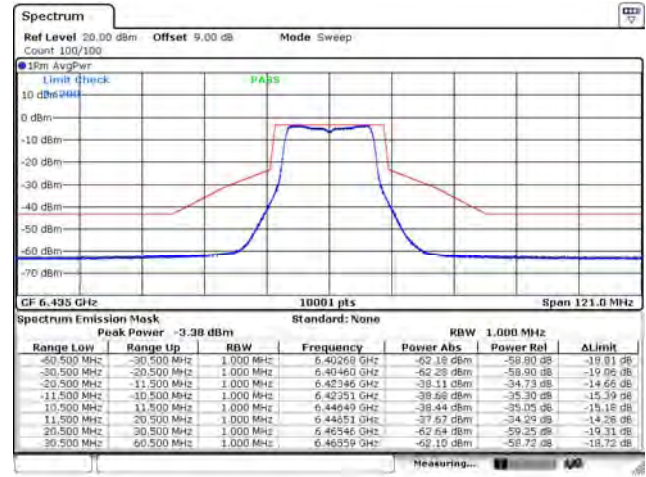

802.11a / Ant. 3 / 6475 MHz

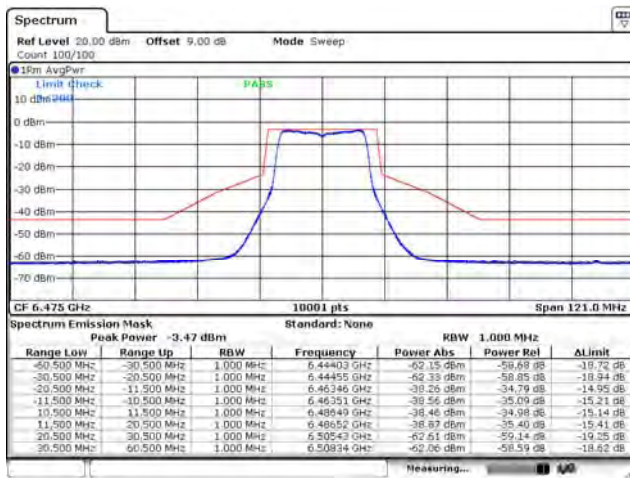


802.11a / Ant. 3 / 6515 MHz

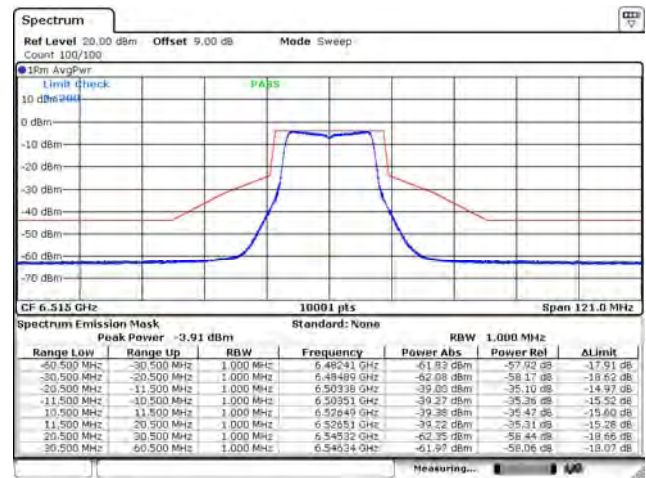


Spectrum Plot


802.11a / Ant. 3 / 6535 MHz

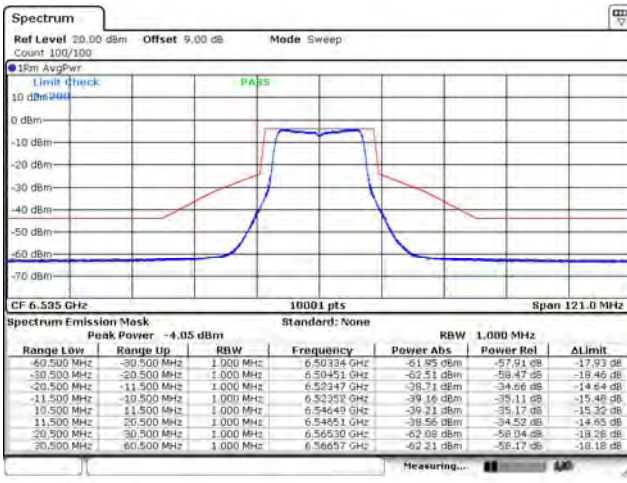


802.11a / Ant. 3 / 6695 MHz

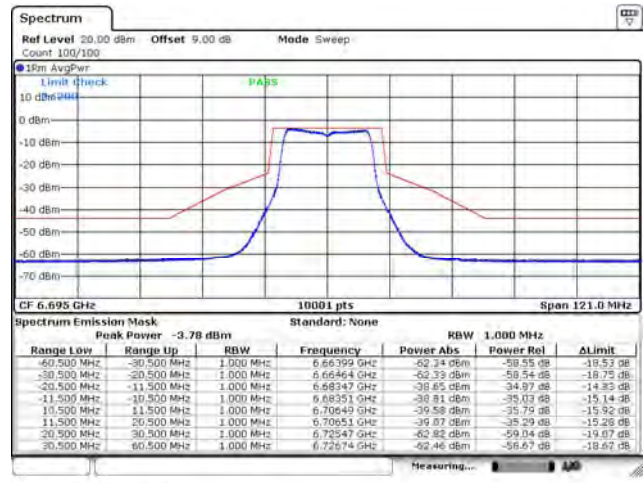


802.11a / Ant. 3 / 6855 MHz

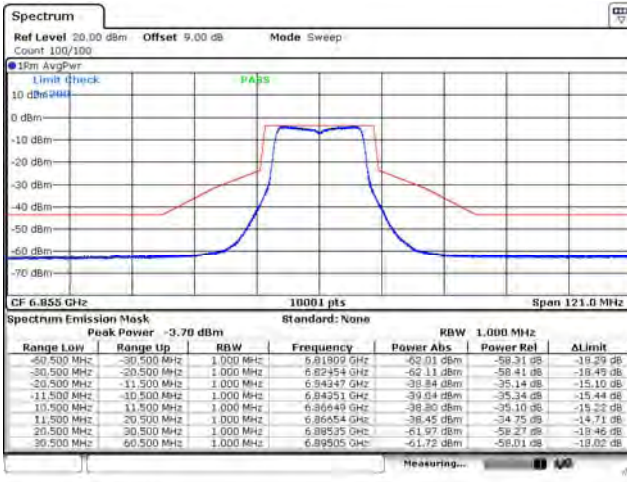


802.11a / Ant. 3 / 6875 MHz

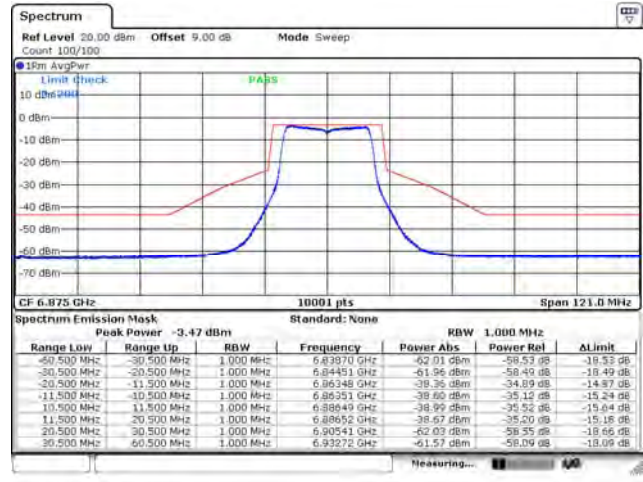


802.11a / Ant. 3 / 6895 MHz

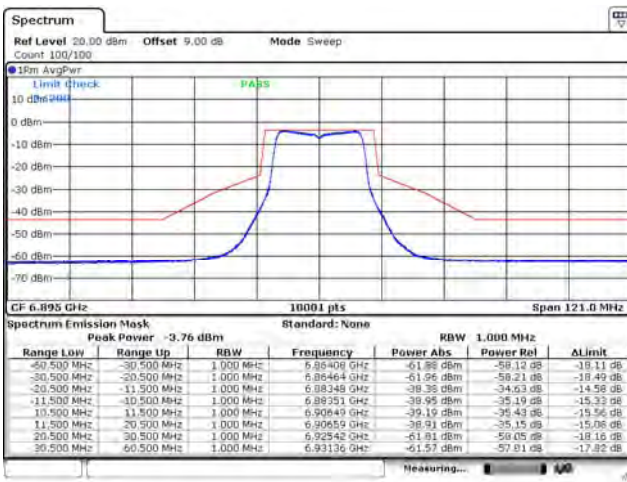


802.11a / Ant. 3 / 6995 MHz

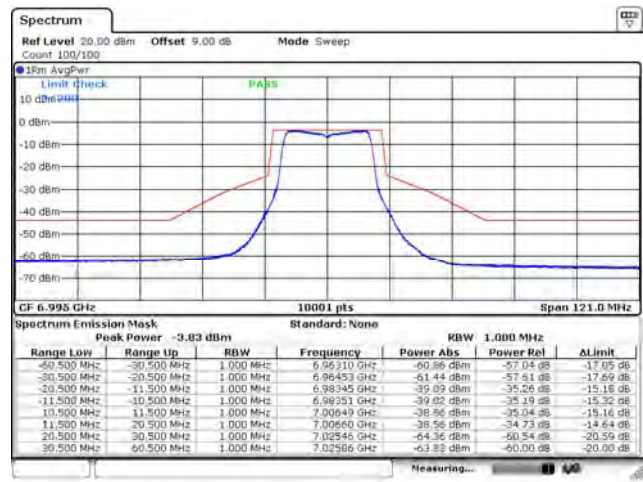

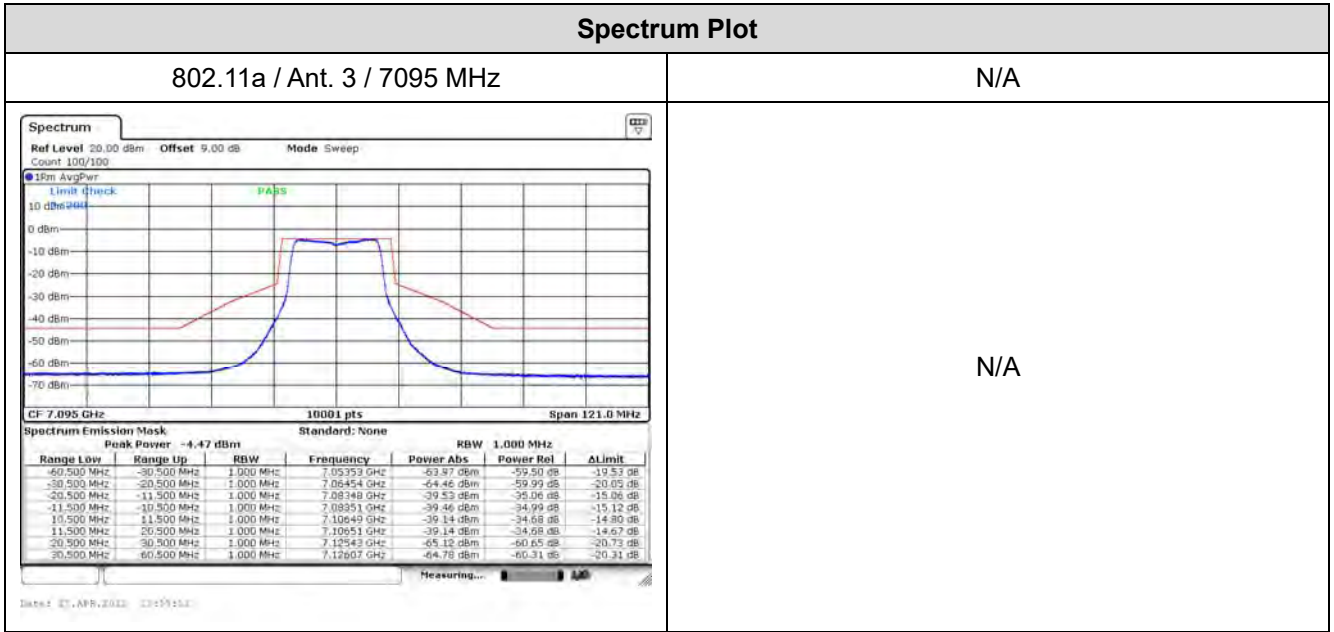


Spectrum Plot


802.11ax (20 MHz) / Ant. 0 / 6115 MHz

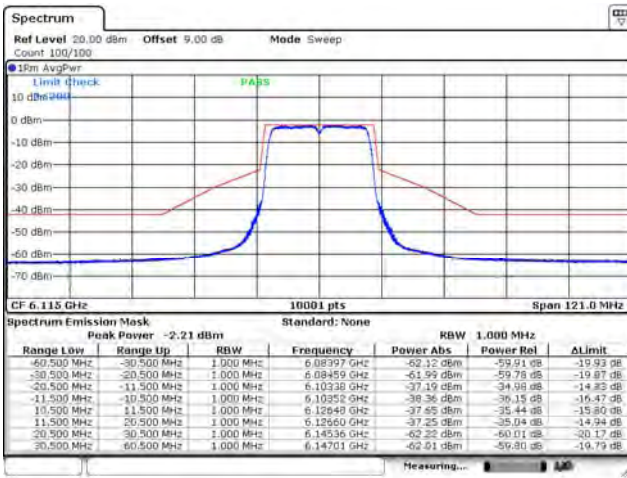


802.11ax (20 MHz) / Ant. 0 / 6255 MHz

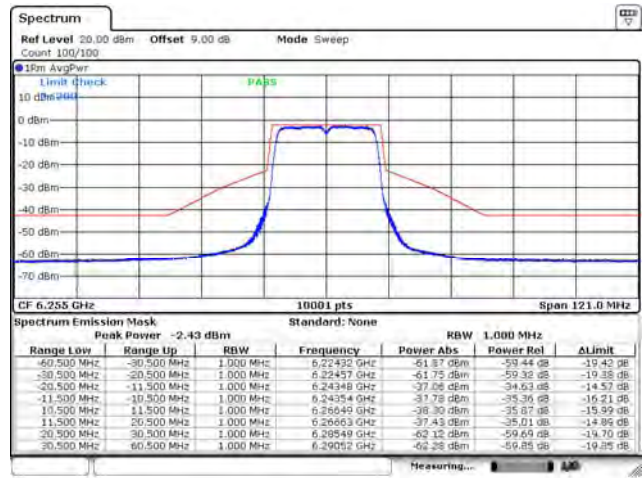


802.11ax (20 MHz) / Ant. 0 / 6415 MHz

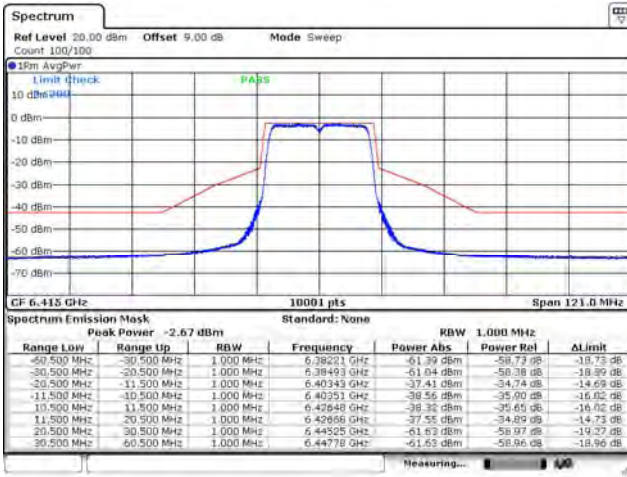


802.11ax (20 MHz) / Ant. 0 / 6435 MHz

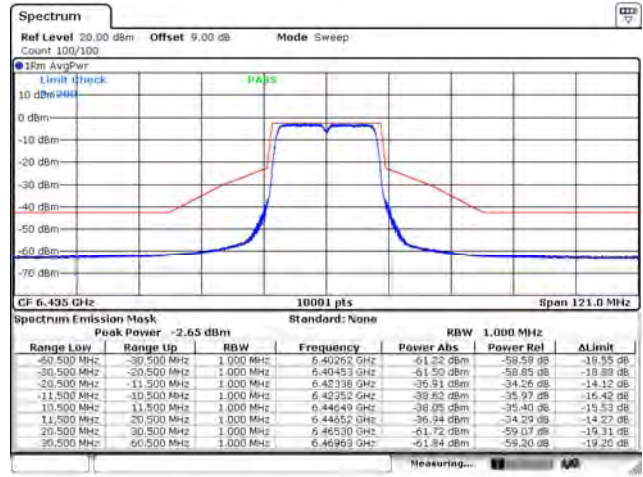

802.11ax (20 MHz) / Ant. 0 / 6475 MHz

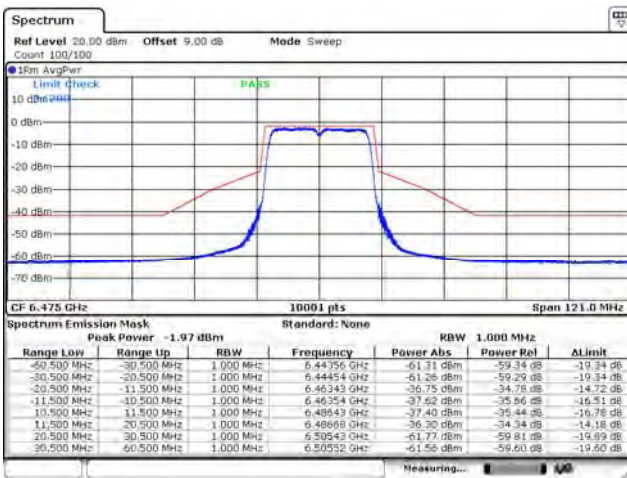


802.11ax (20 MHz) / Ant. 0 / 6515 MHz

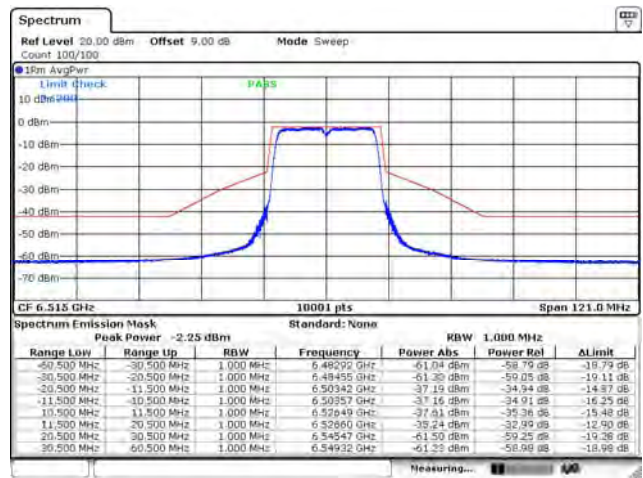


Spectrum Plot


802.11ax (20 MHz) / Ant. 0 / 6535 MHz

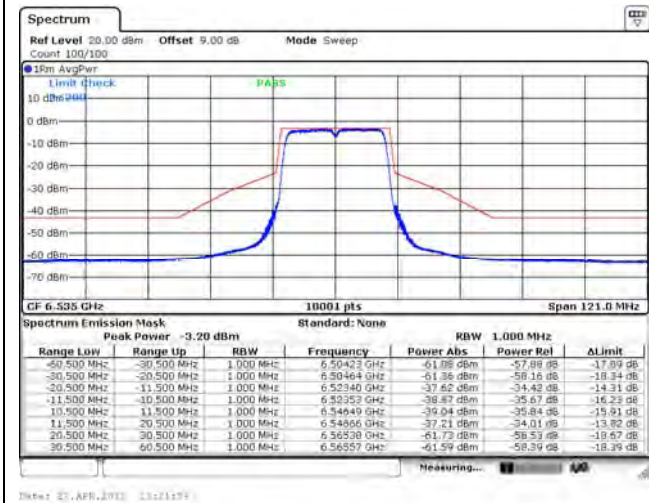


802.11ax (20 MHz) / Ant. 0 / 6695 MHz

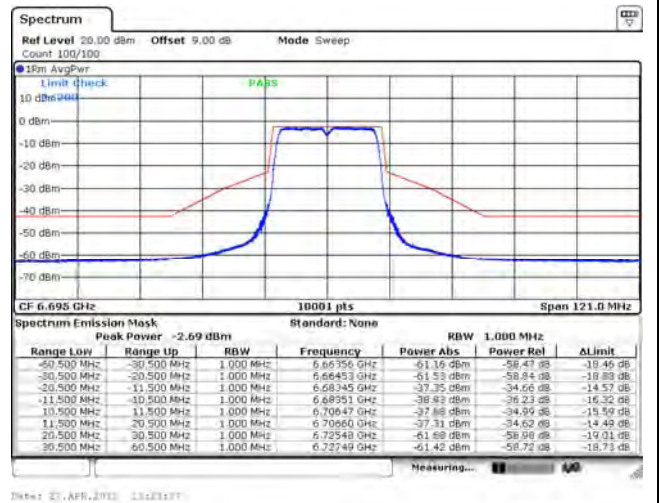


802.11ax (20 MHz) / Ant. 0 / 6855 MHz

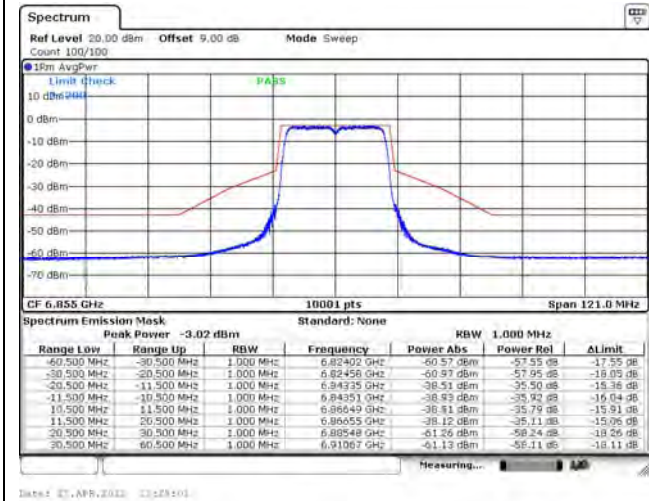


802.11ax (20 MHz) / Ant. 0 / 6875 MHz

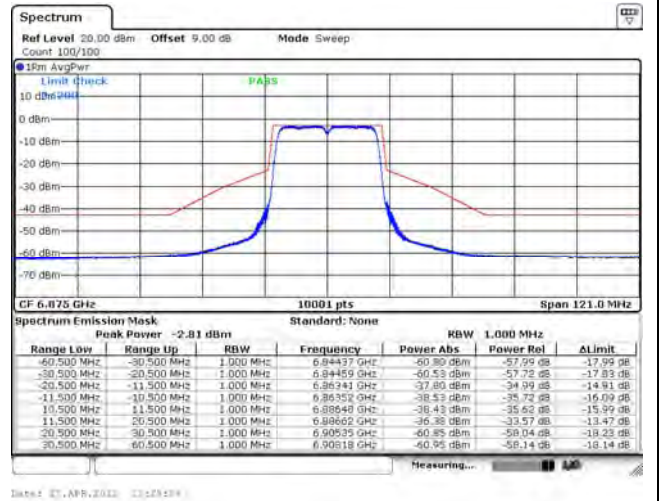


802.11ax (20 MHz) / Ant. 0 / 6895 MHz

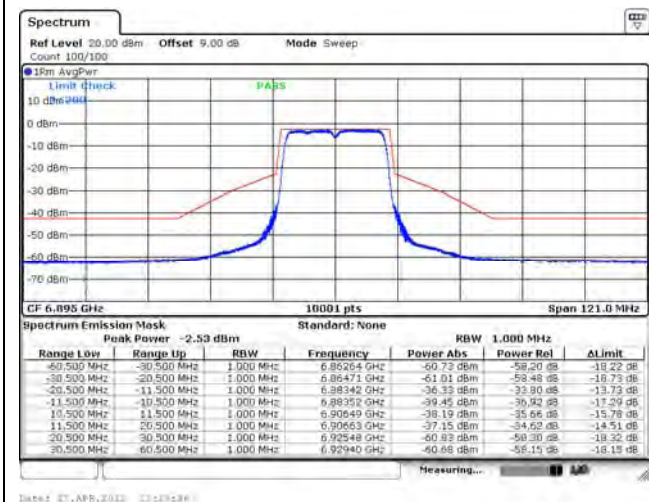


802.11ax (20 MHz) / Ant. 0 / 6995 MHz

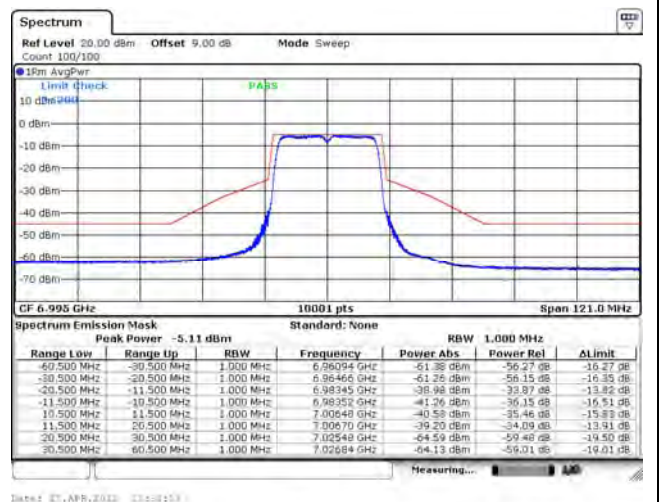

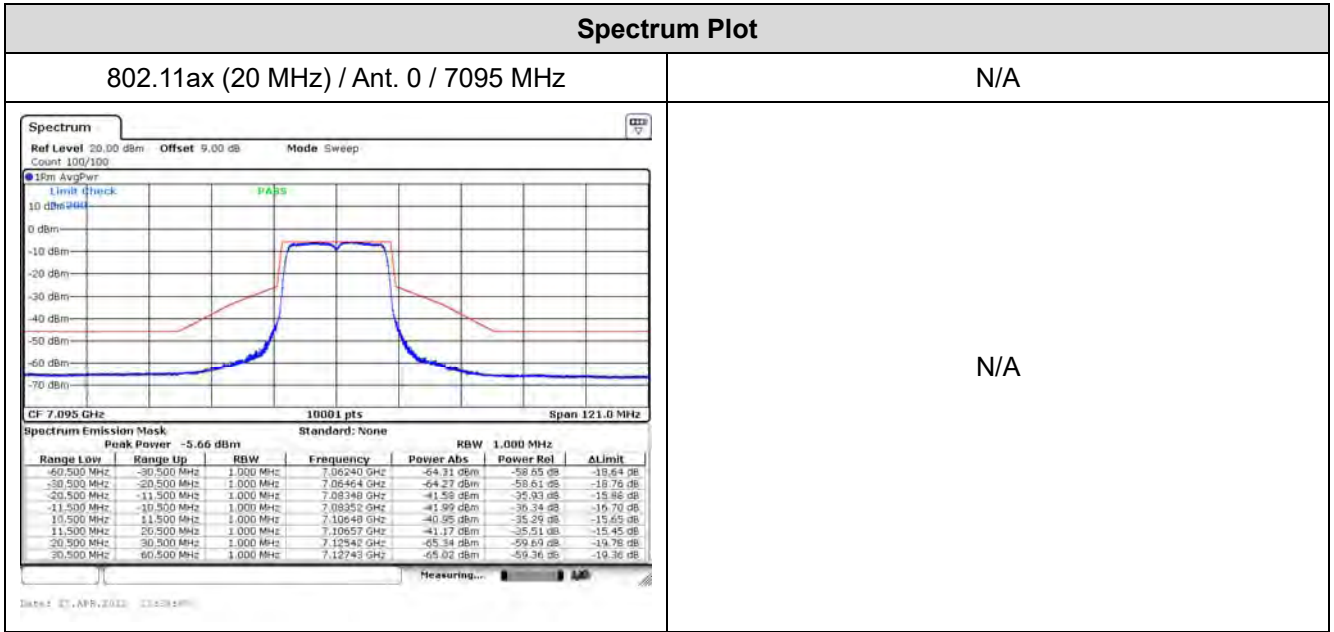


Spectrum Plot


802.11ax (20 MHz) / Ant. 1 / 6115 MHz

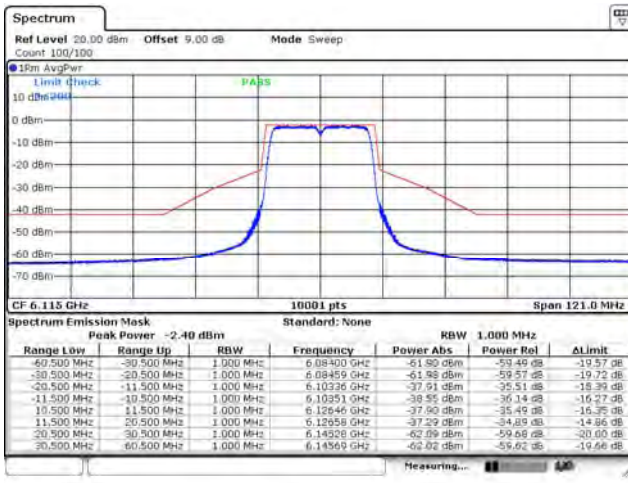


802.11ax (20 MHz) / Ant. 1 / 6255 MHz

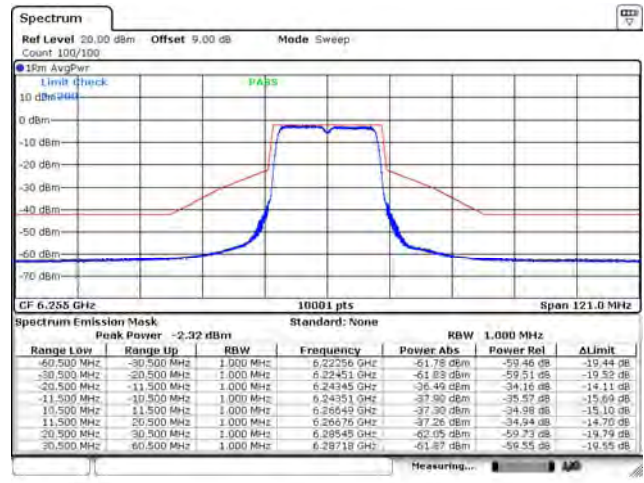


802.11ax (20 MHz) / Ant. 1 / 6415 MHz

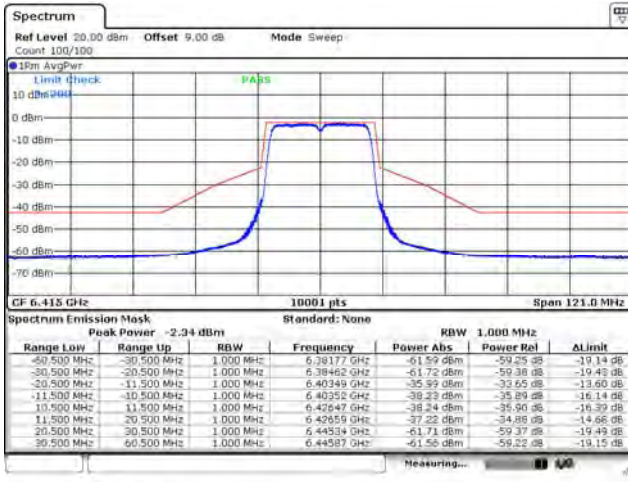


802.11ax (20 MHz) / Ant. 1 / 6435 MHz

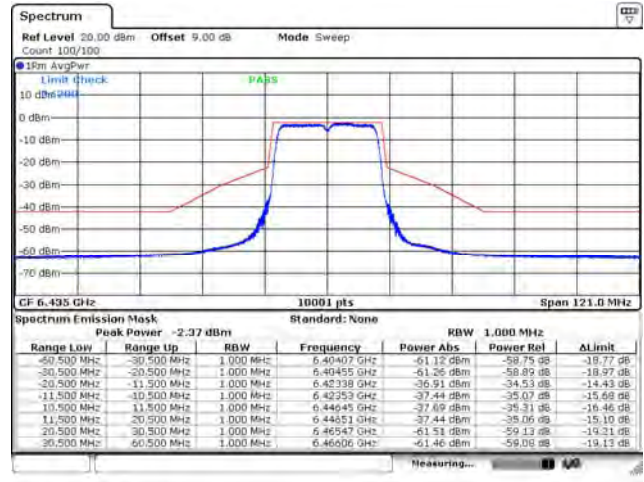

802.11ax (20 MHz) / Ant. 1 / 6475 MHz

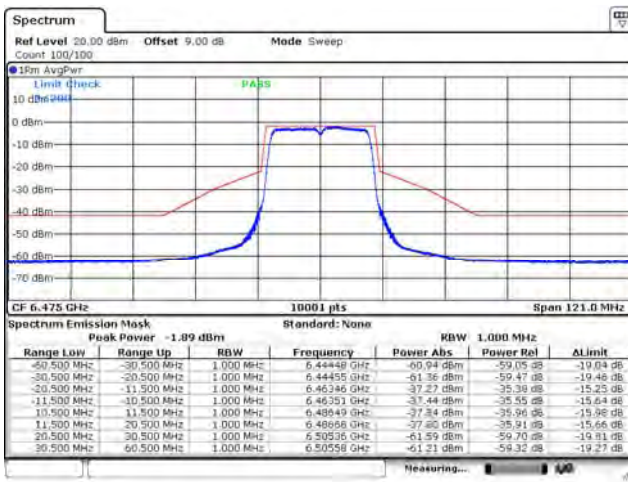


802.11ax (20 MHz) / Ant. 1 / 6515 MHz

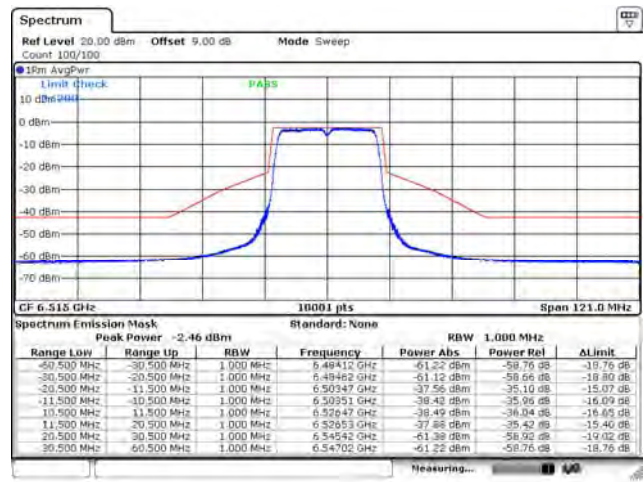


Spectrum Plot


802.11ax (20 MHz) / Ant. 1 / 6535 MHz

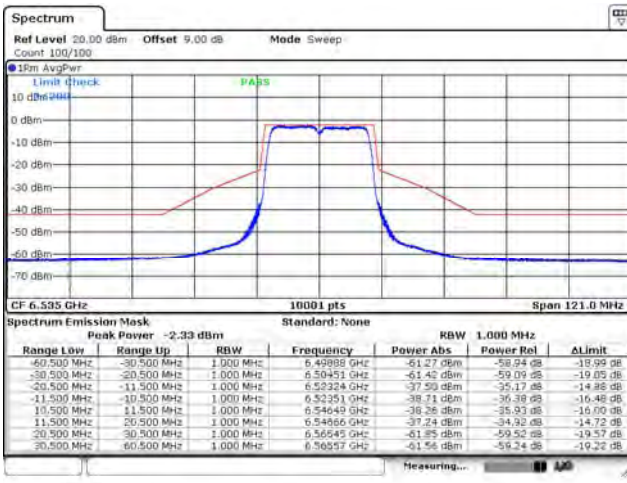


802.11ax (20 MHz) / Ant. 1 / 6695 MHz

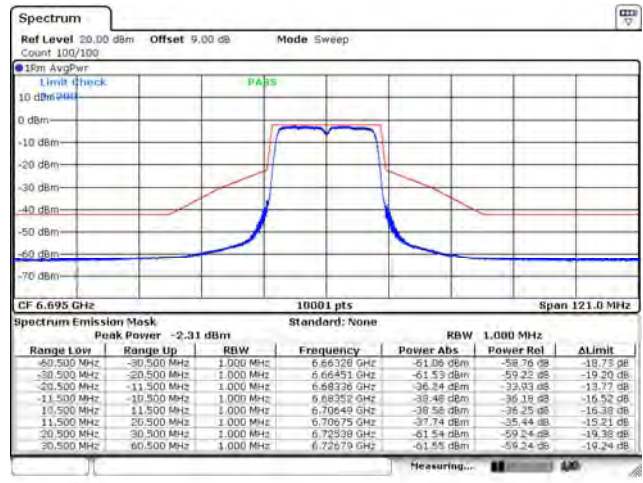


802.11ax (20 MHz) / Ant. 1 / 6855 MHz

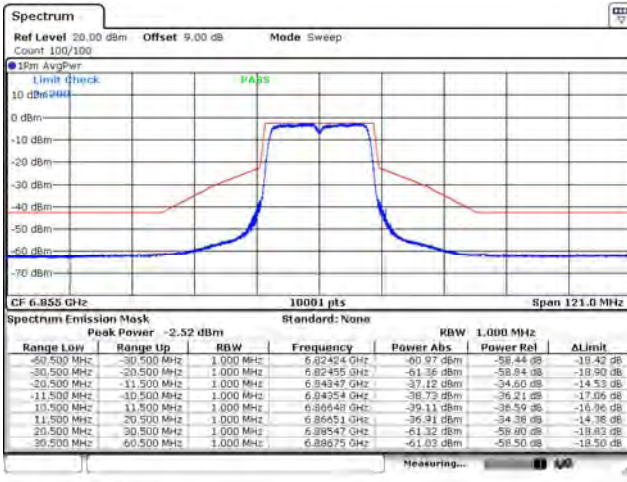


802.11ax (20 MHz) / Ant. 1 / 6875 MHz

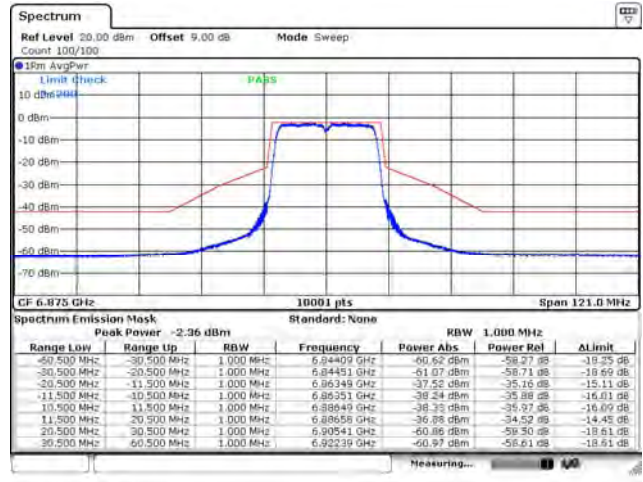


802.11ax (20 MHz) / Ant. 1 / 6895 MHz

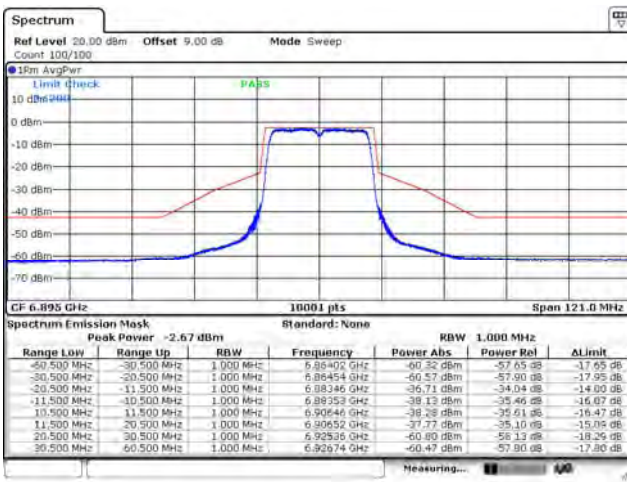


802.11ax (20 MHz) / Ant. 1 / 6995 MHz

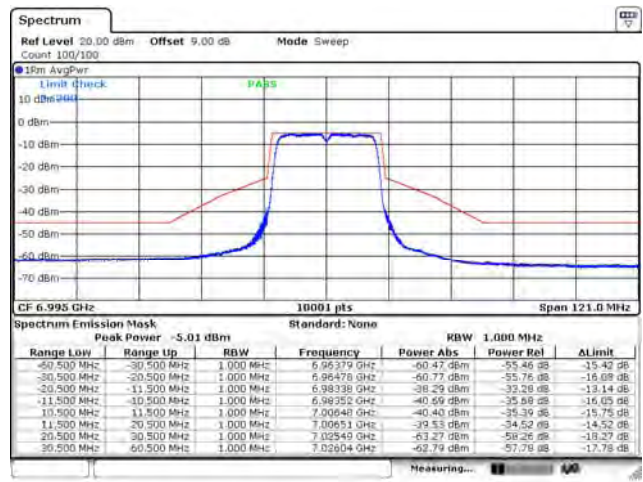

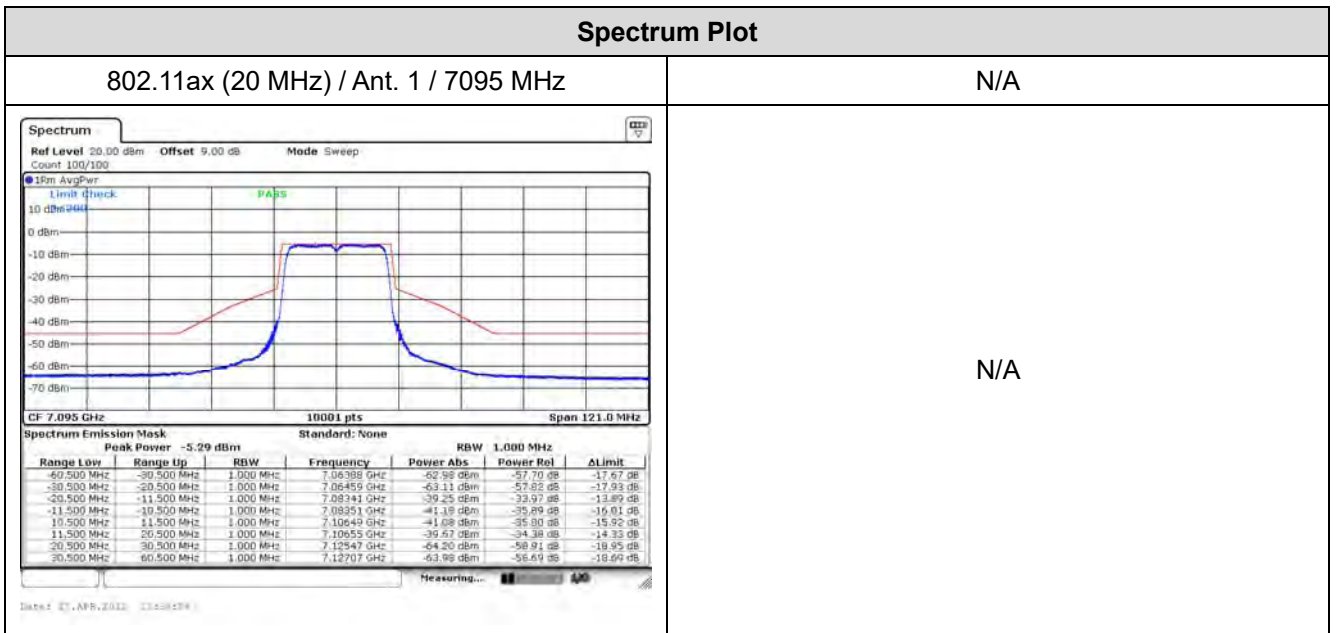


Spectrum Plot


802.11ax (20 MHz) / Ant. 2 / 6115 MHz

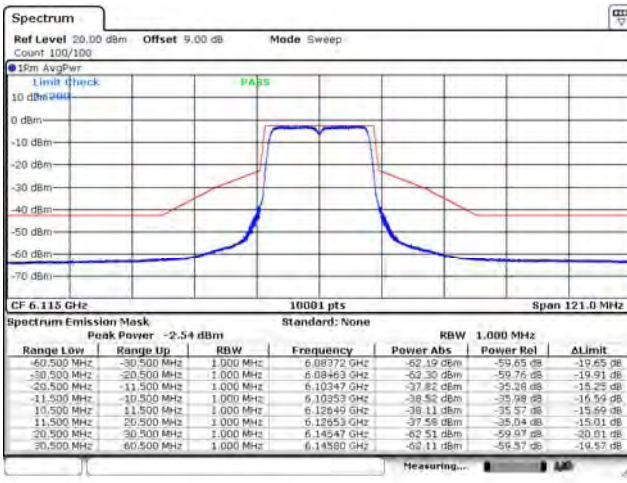


802.11ax (20 MHz) / Ant. 2 / 6255 MHz

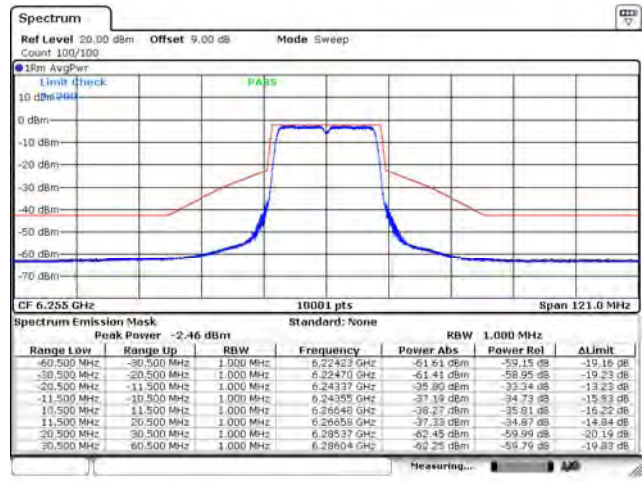


802.11ax (20 MHz) / Ant. 2 / 6415 MHz

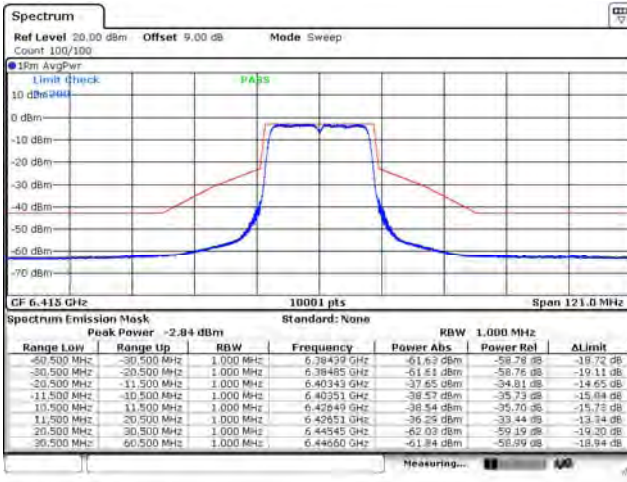


802.11ax (20 MHz) / Ant. 2 / 6435 MHz

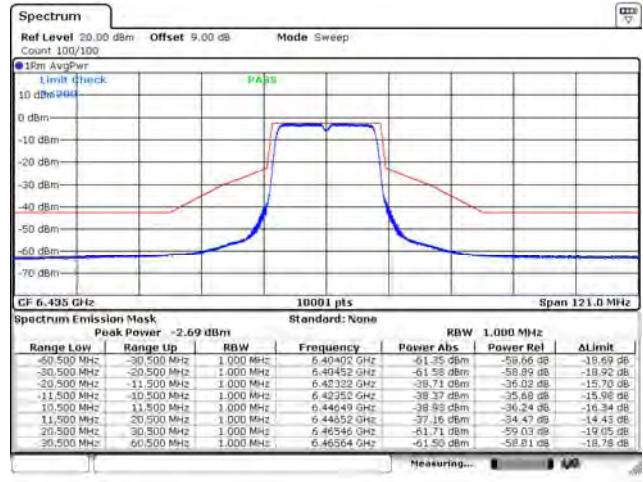

802.11ax (20 MHz) / Ant. 2 / 6475 MHz

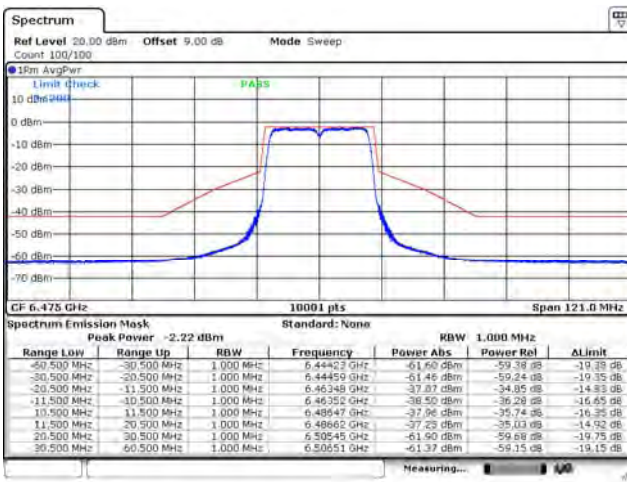


802.11ax (20 MHz) / Ant. 2 / 6515 MHz

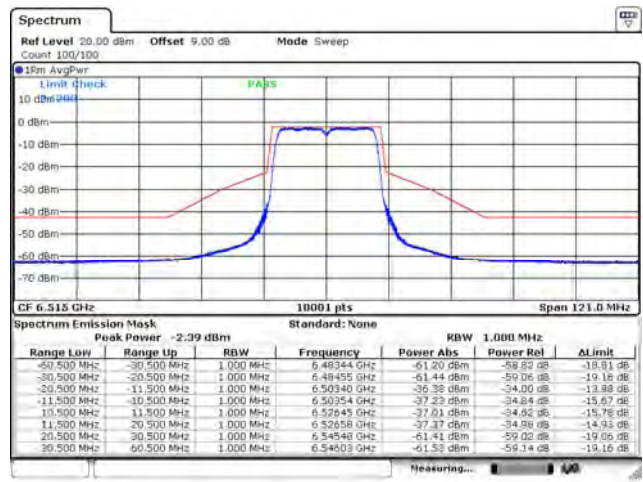


Spectrum Plot


802.11ax (20 MHz) / Ant. 2 / 6535 MHz

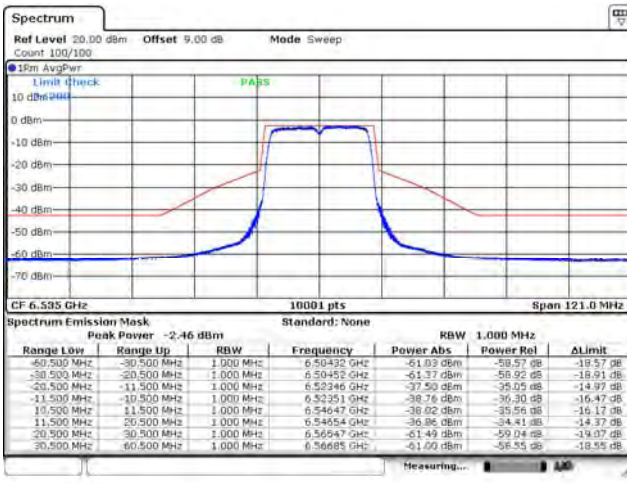


802.11ax (20 MHz) / Ant. 2 / 6695 MHz

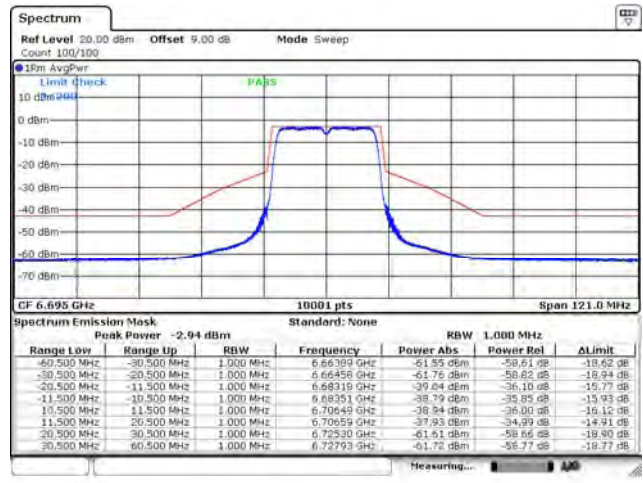


802.11ax (20 MHz) / Ant. 2 / 6855 MHz

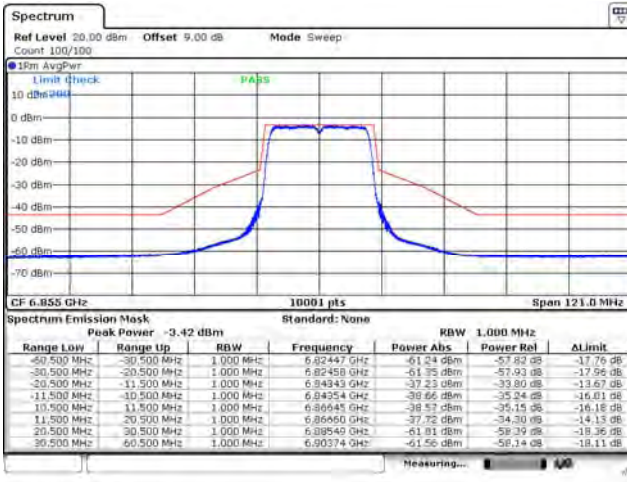


802.11ax (20 MHz) / Ant. 2 / 6875 MHz

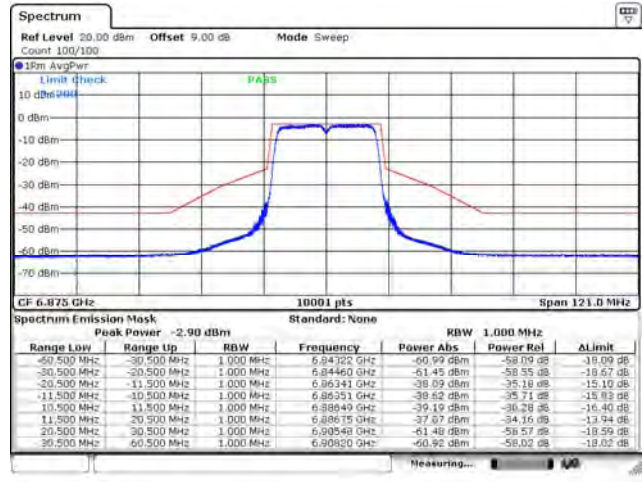


802.11ax (20 MHz) / Ant. 2 / 6895 MHz

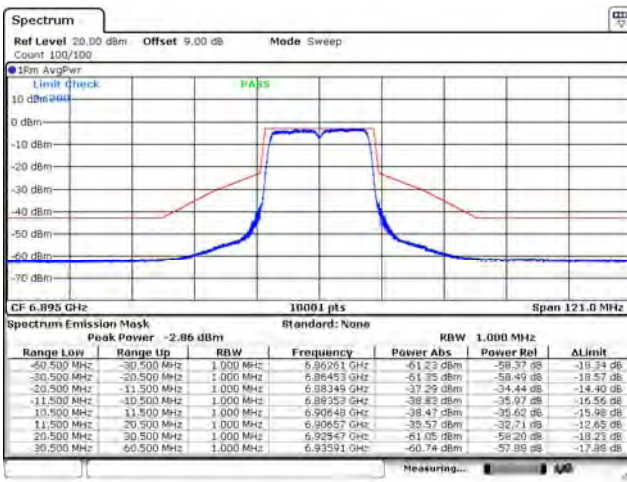


802.11ax (20 MHz) / Ant. 2 / 6995 MHz

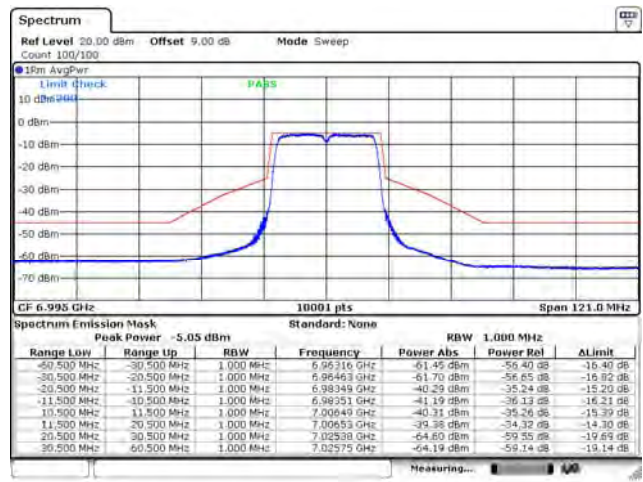

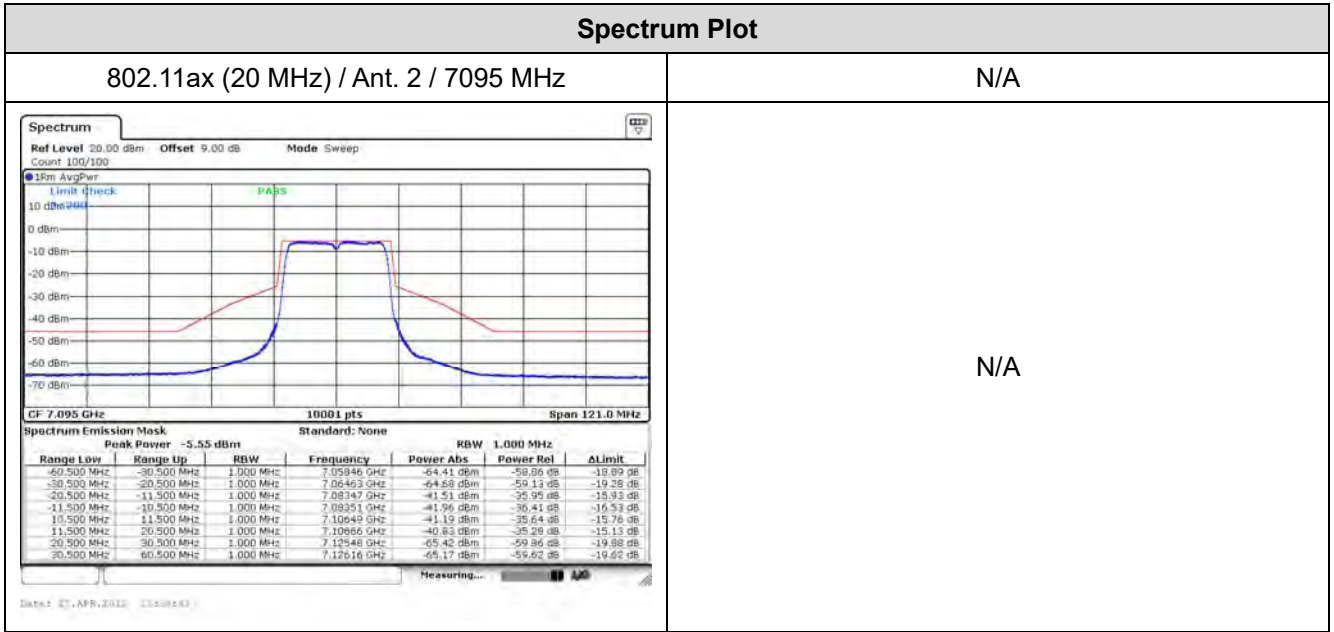


Spectrum Plot


802.11ax (20 MHz) / Ant. 3 / 6115 MHz

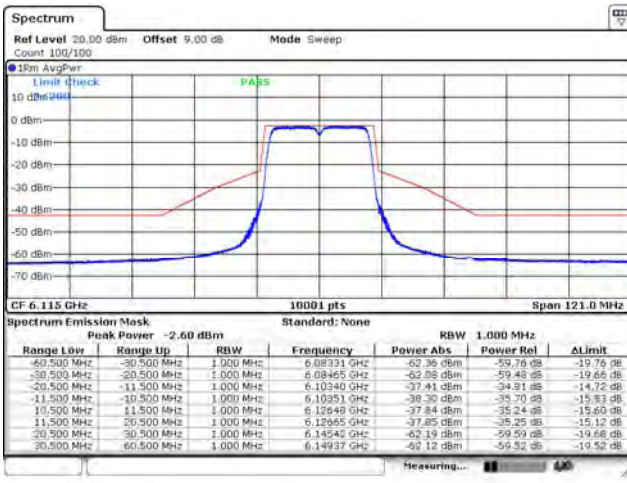


802.11ax (20 MHz) / Ant. 3 / 6255 MHz

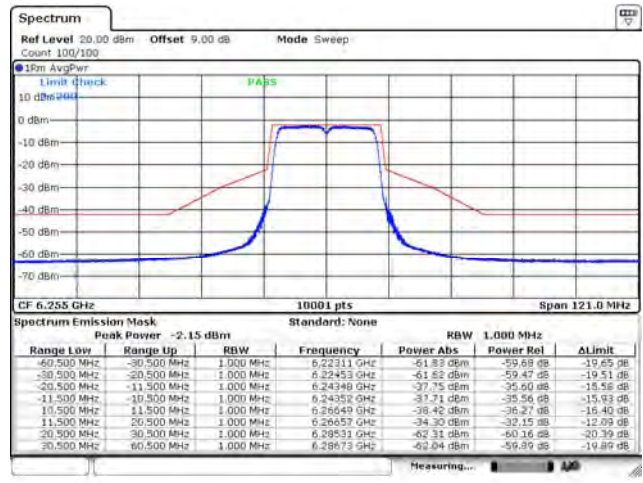


802.11ax (20 MHz) / Ant. 3 / 6415 MHz

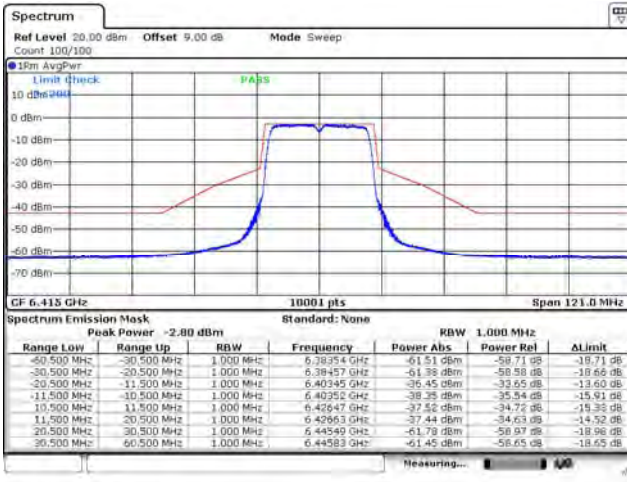


802.11ax (20 MHz) / Ant. 3 / 6435 MHz

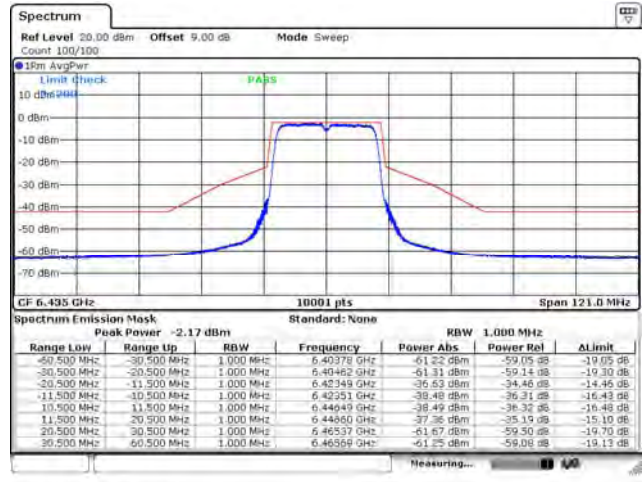

802.11ax (20 MHz) / Ant. 3 / 6475 MHz

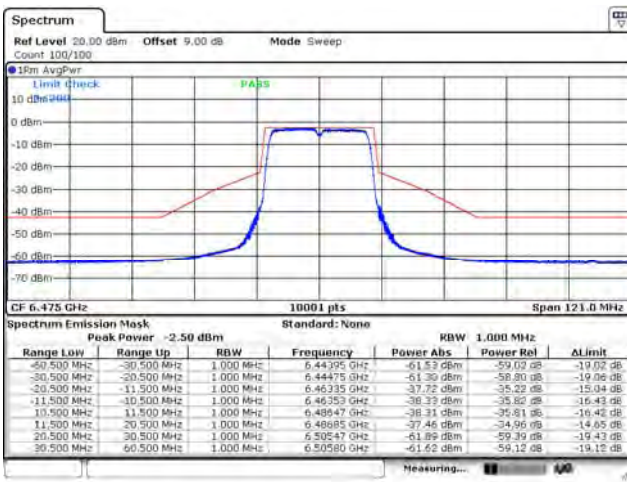


802.11ax (20 MHz) / Ant. 3 / 6515 MHz

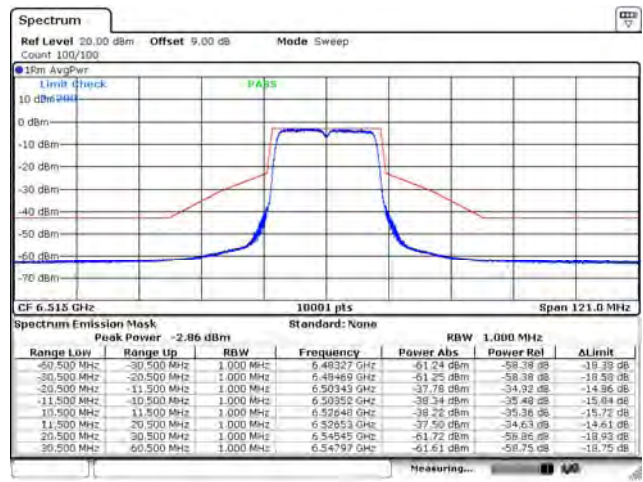


Spectrum Plot


802.11ax (20 MHz) / Ant. 3 / 6535 MHz

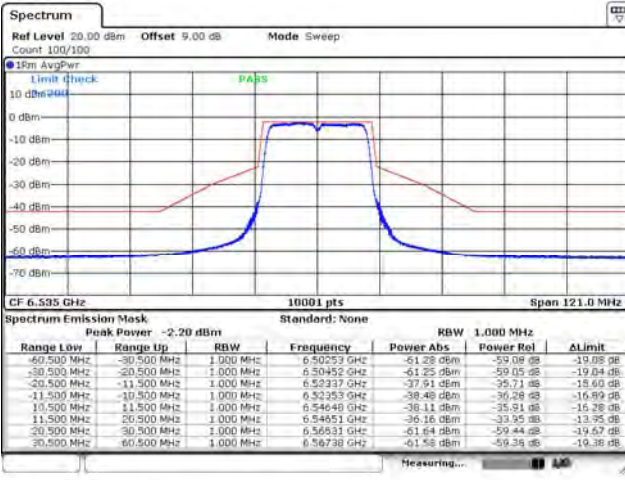


802.11ax (20 MHz) / Ant. 3 / 6695 MHz

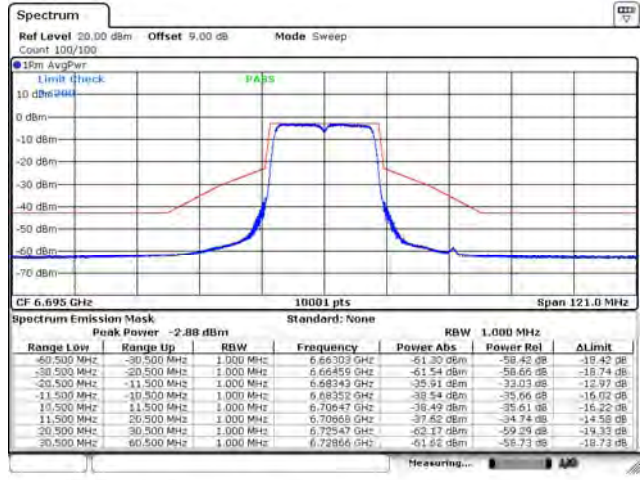


802.11ax (20 MHz) / Ant. 3 / 6855 MHz

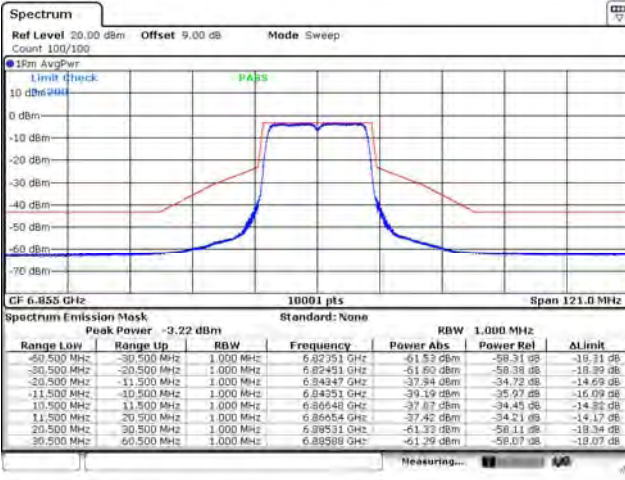


802.11ax (20 MHz) / Ant. 3 / 6875 MHz

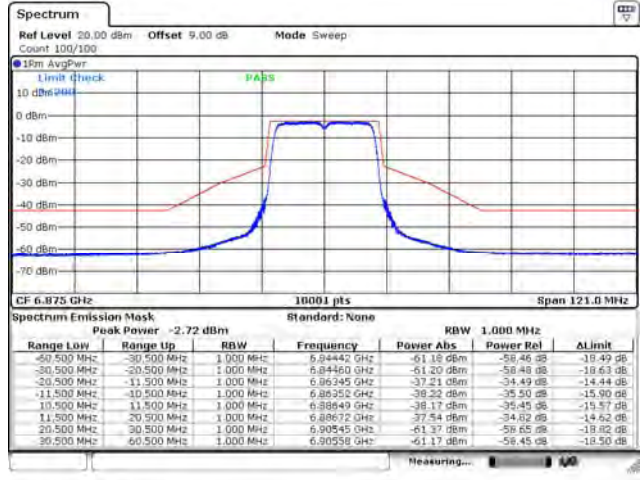


802.11ax (20 MHz) / Ant. 3 / 6895 MHz

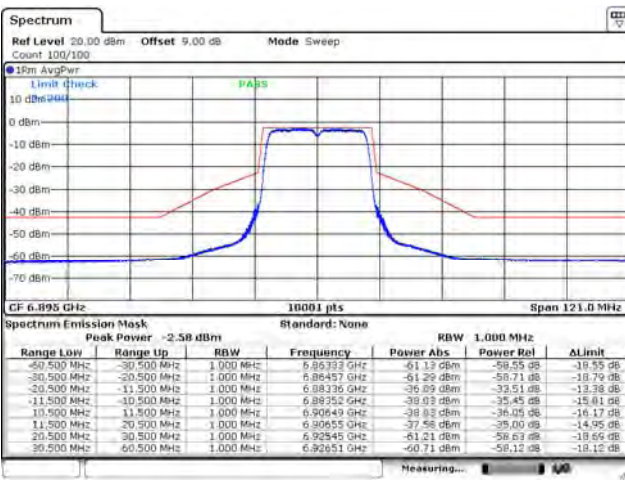


802.11ax (20 MHz) / Ant. 3 / 6995 MHz

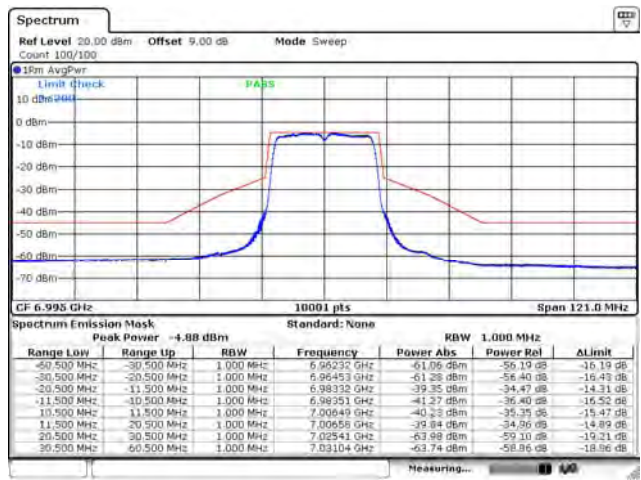

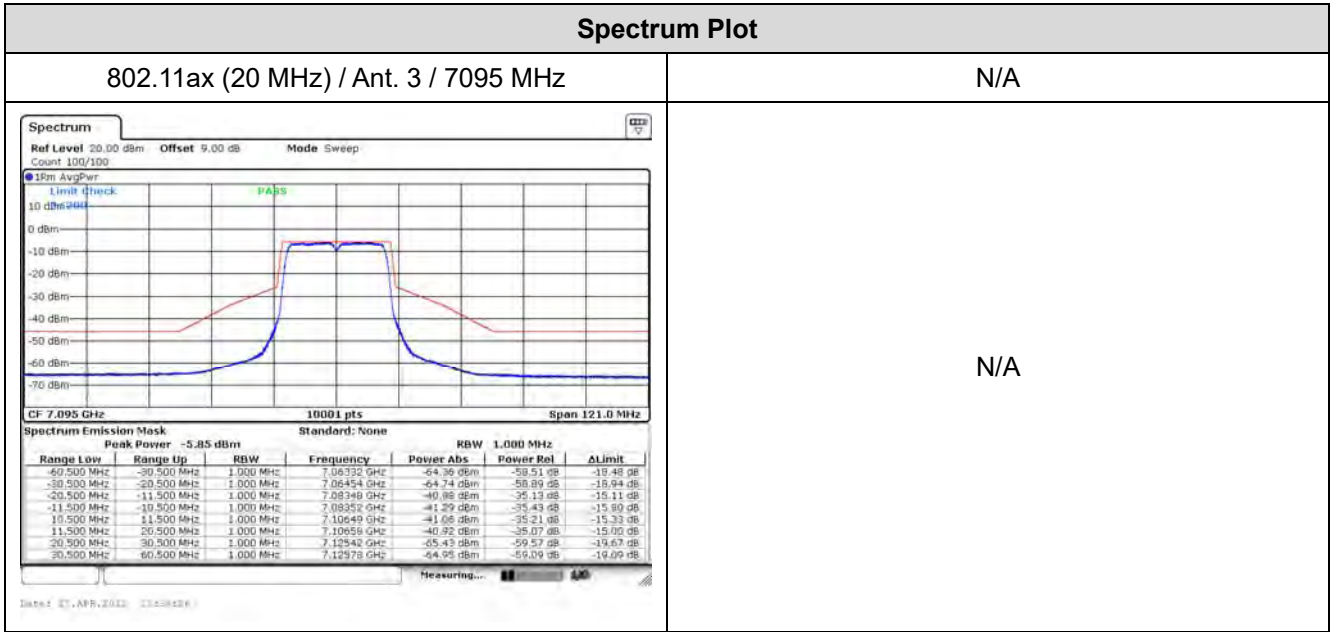


Spectrum Plot


802.11ax (40 MHz) / Ant. 0 / 6125 MHz

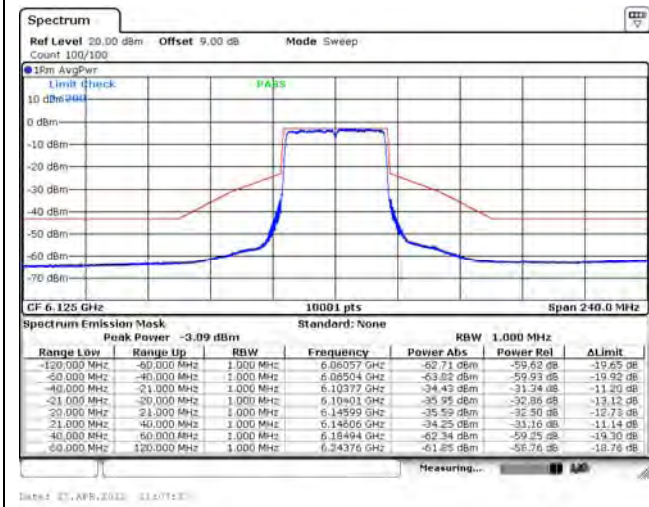


802.11ax (40 MHz) / Ant. 0 / 6245 MHz

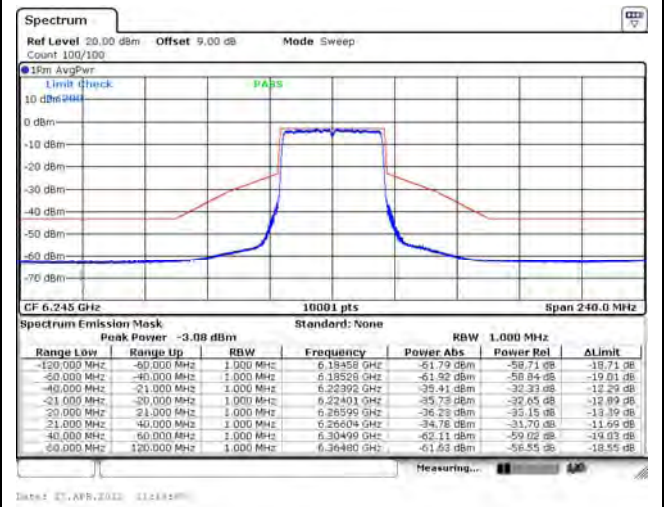


802.11ax (40 MHz) / Ant. 0 / 6405 MHz

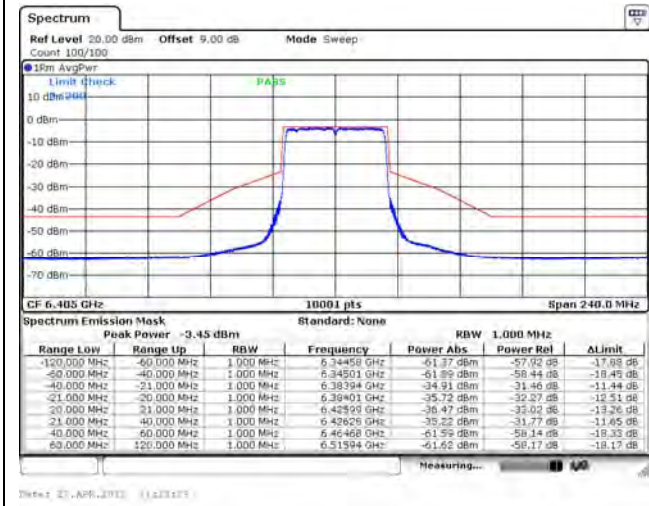


802.11ax (40 MHz) / Ant. 0 / 6445 MHz

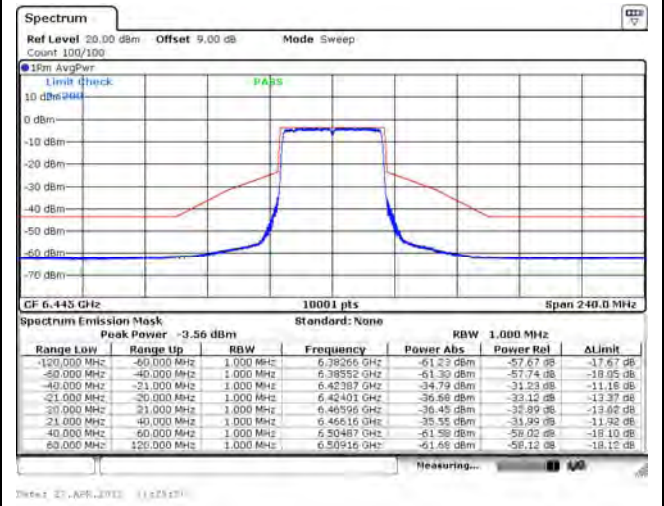

802.11ax (40 MHz) / Ant. 0 / 6485 MHz

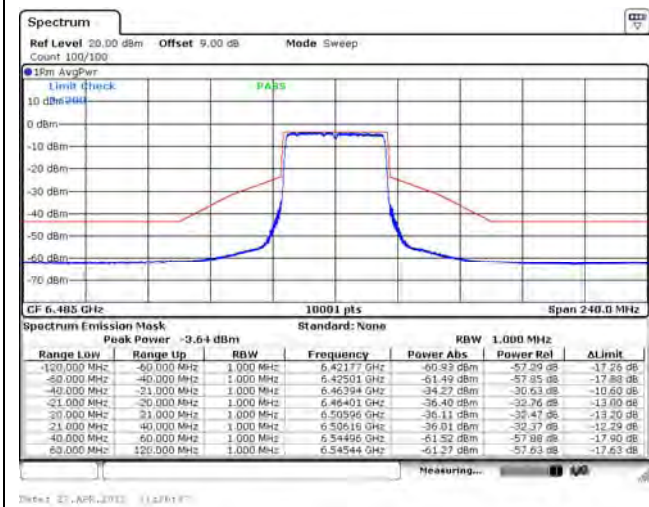


802.11ax (40 MHz) / Ant. 0 / 6525 MHz

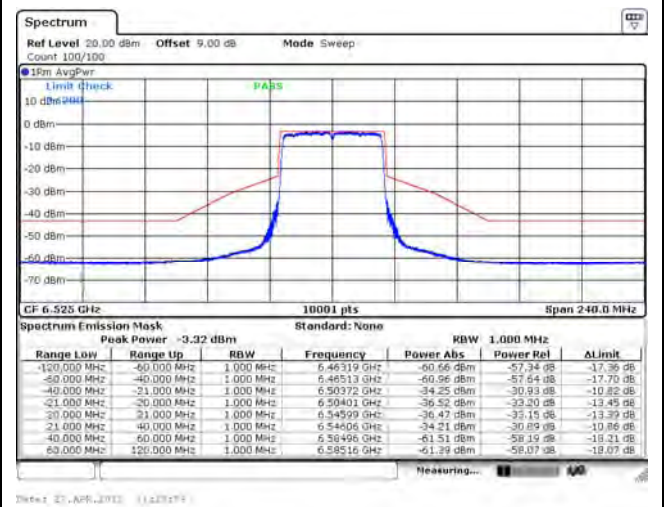


Spectrum Plot


802.11ax (40 MHz) / Ant. 0 / 6565 MHz

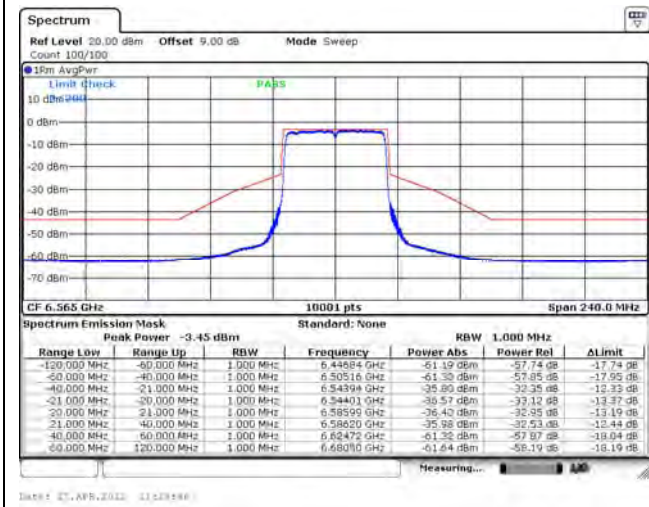


802.11ax (40 MHz) / Ant. 0 / 6725 MHz

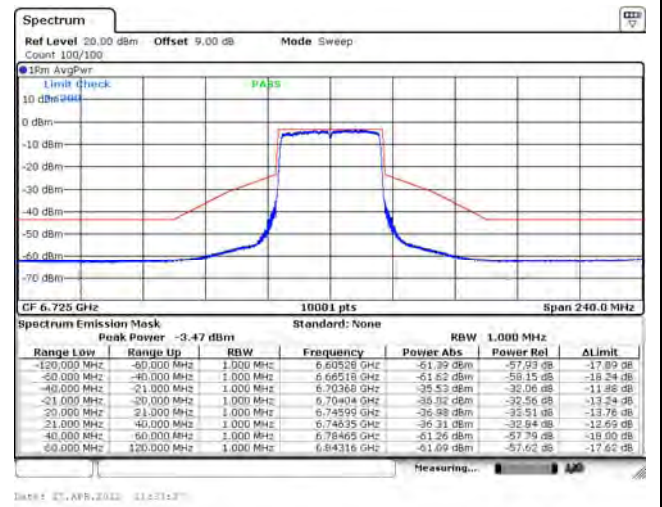


802.11ax (40 MHz) / Ant. 0 / 6845 MHz

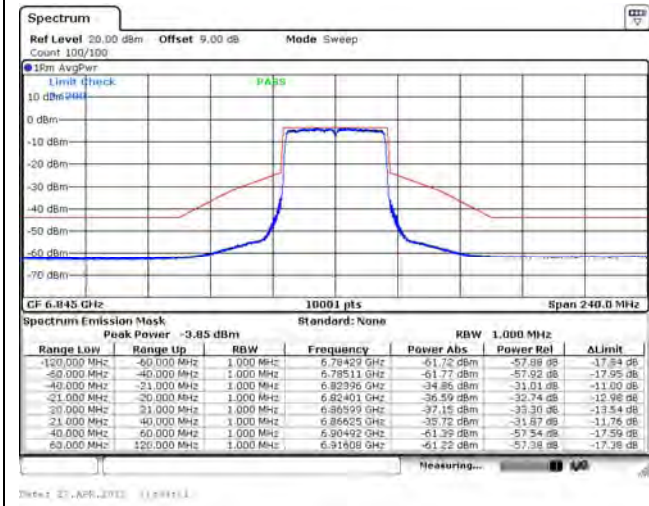


802.11ax (40 MHz) / Ant. 0 / 6885 MHz

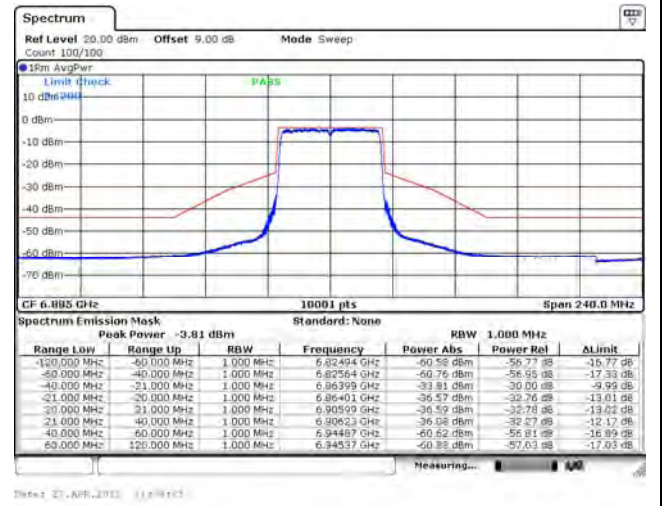


802.11ax (40 MHz) / Ant. 0 / 6925 MHz

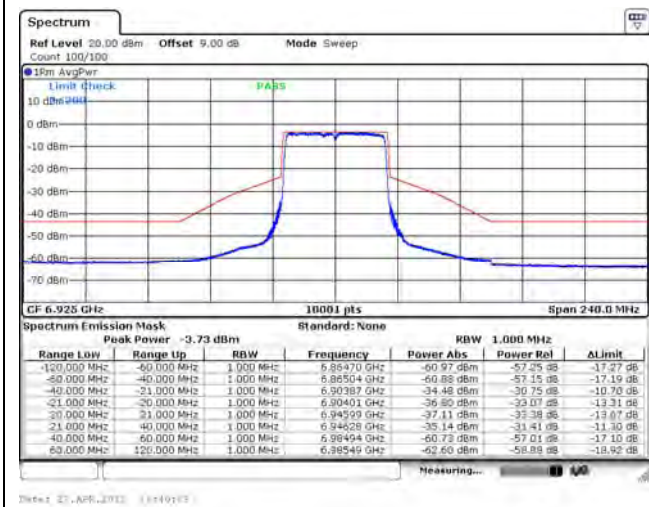


802.11ax (40 MHz) / Ant. 0 / 7005 MHz

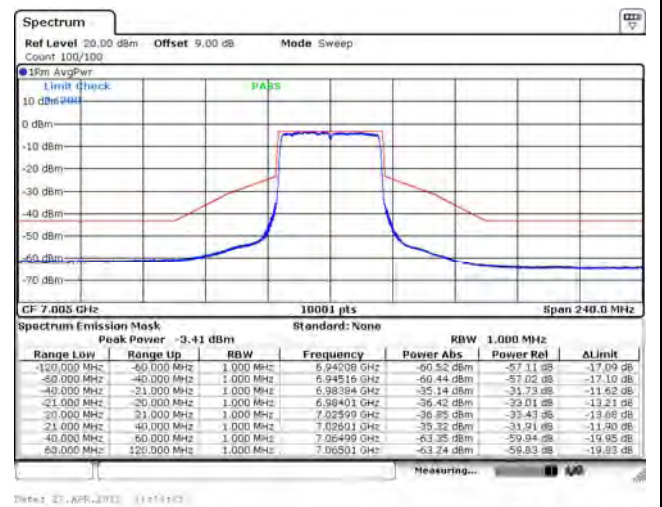

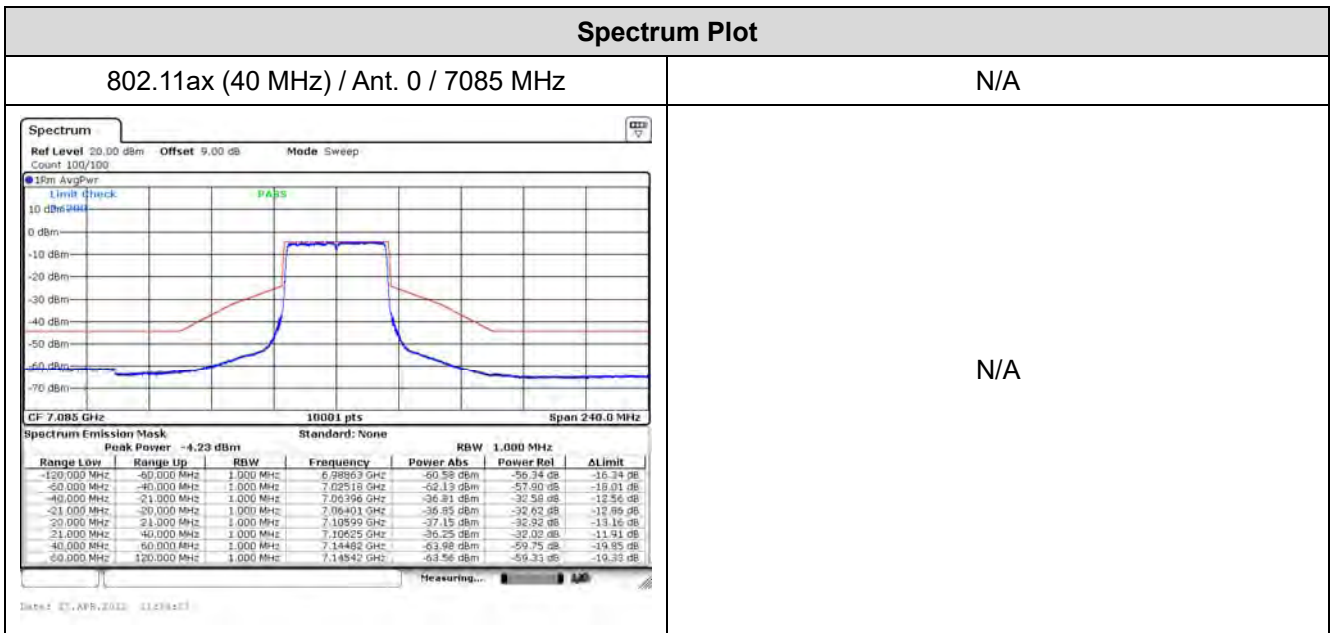


Spectrum Plot


802.11ax (40 MHz) / Ant. 1 / 6125 MHz

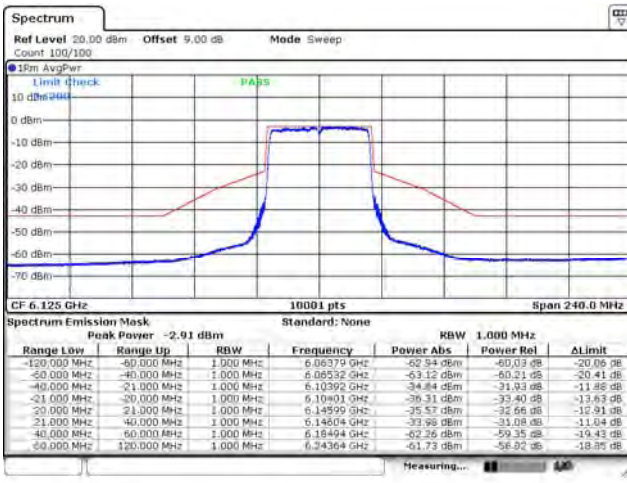


802.11ax (40 MHz) / Ant. 1 / 6245 MHz

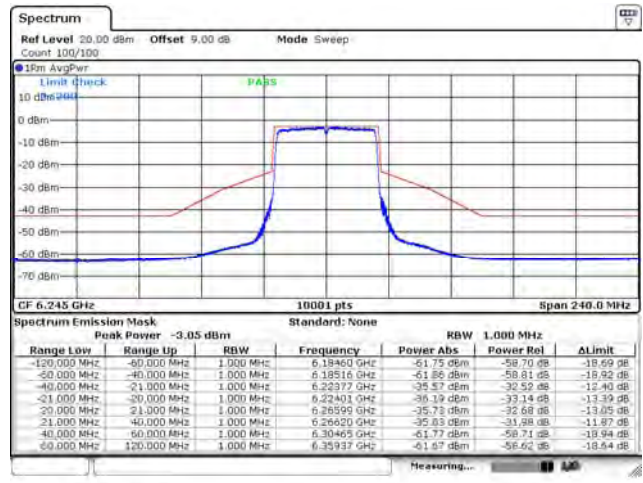


802.11ax (40 MHz) / Ant. 1 / 6405 MHz

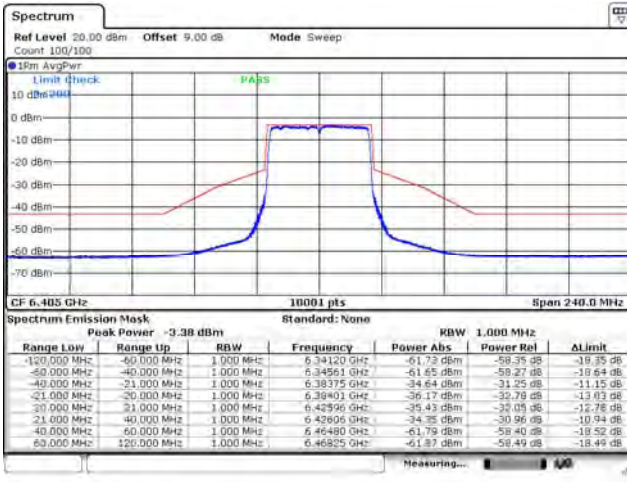


802.11ax (40 MHz) / Ant. 1 / 6445 MHz

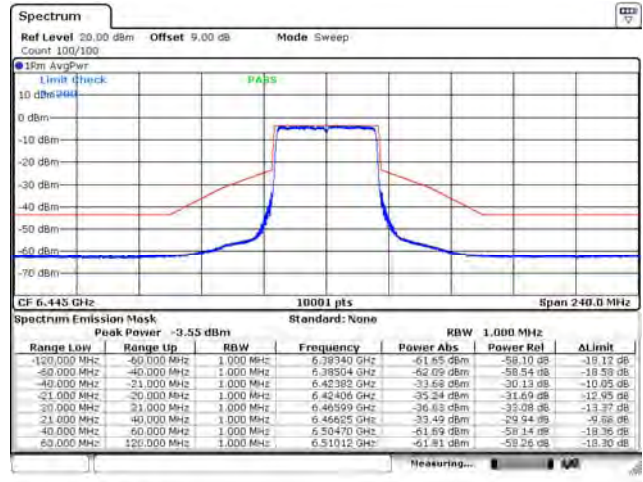

802.11ax (40 MHz) / Ant. 1 / 6485 MHz

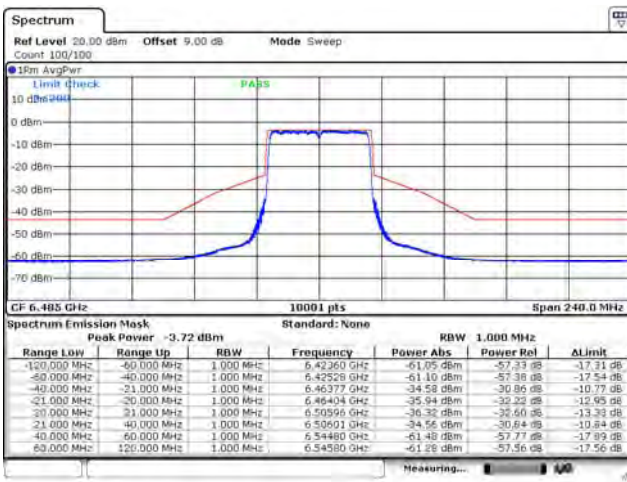


802.11ax (40 MHz) / Ant. 1 / 6525 MHz

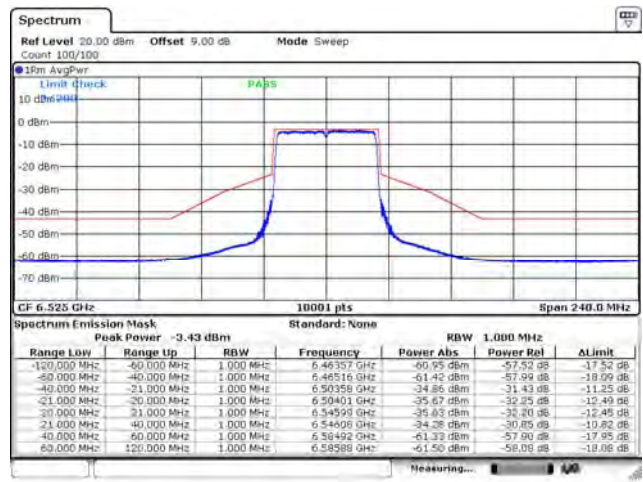


Spectrum Plot


802.11ax (40 MHz) / Ant. 1 / 6565 MHz

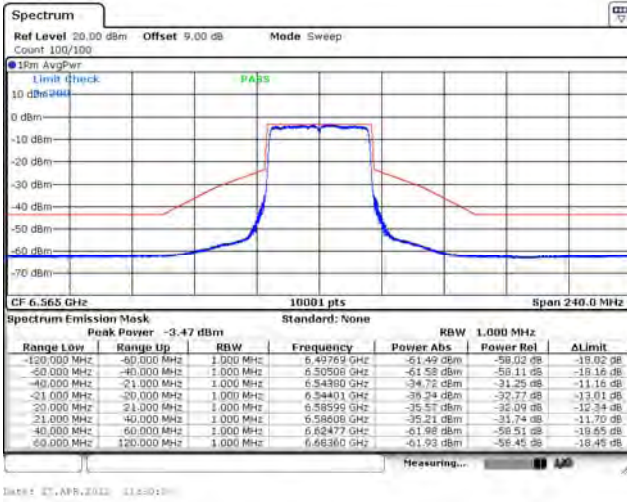


802.11ax (40 MHz) / Ant. 1 / 6725 MHz

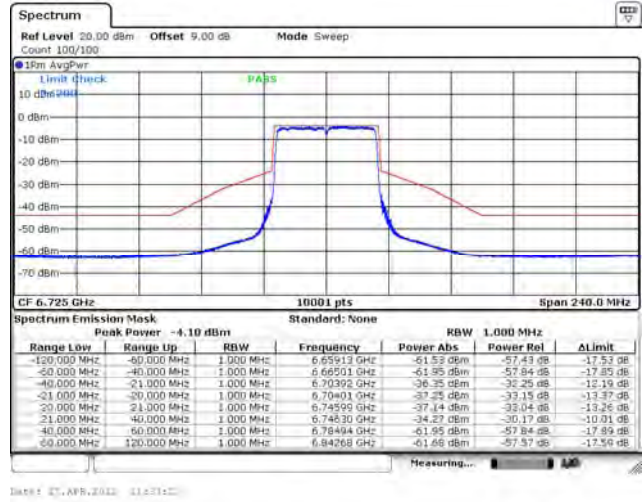


802.11ax (40 MHz) / Ant. 1 / 6845 MHz

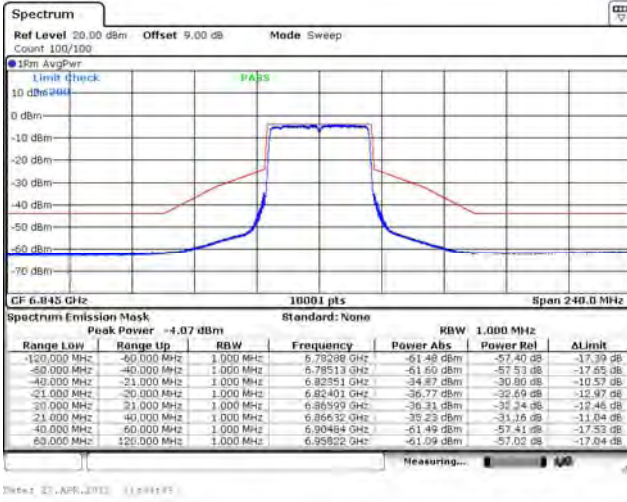


802.11ax (40 MHz) / Ant. 1 / 6885 MHz

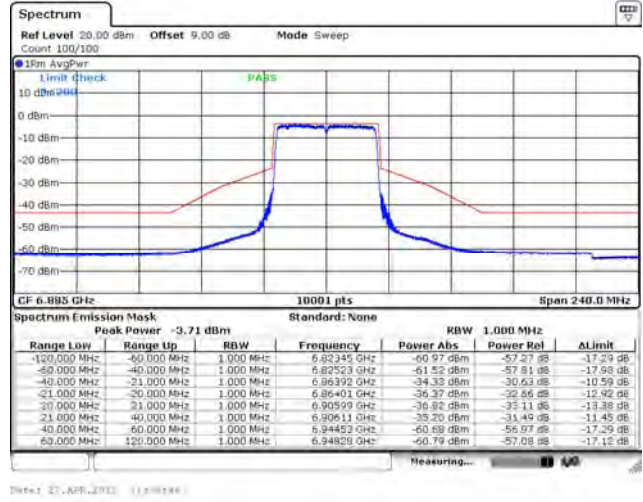


802.11ax (40 MHz) / Ant. 1 / 6925 MHz

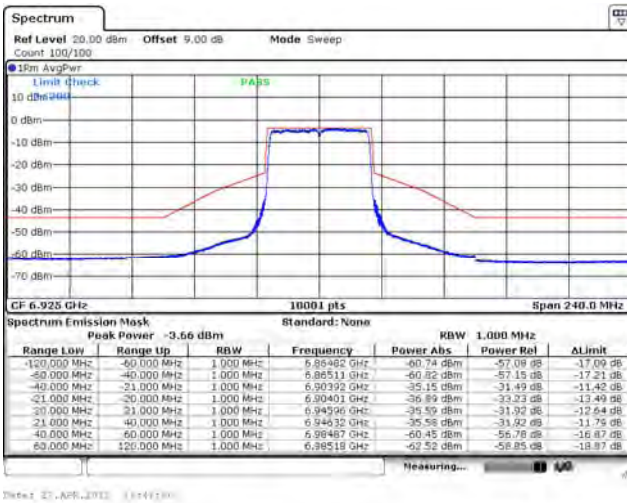


802.11ax (40 MHz) / Ant. 1 / 7005 MHz

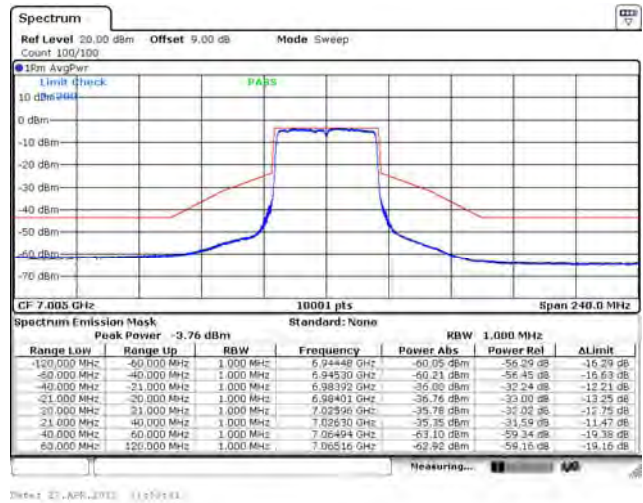

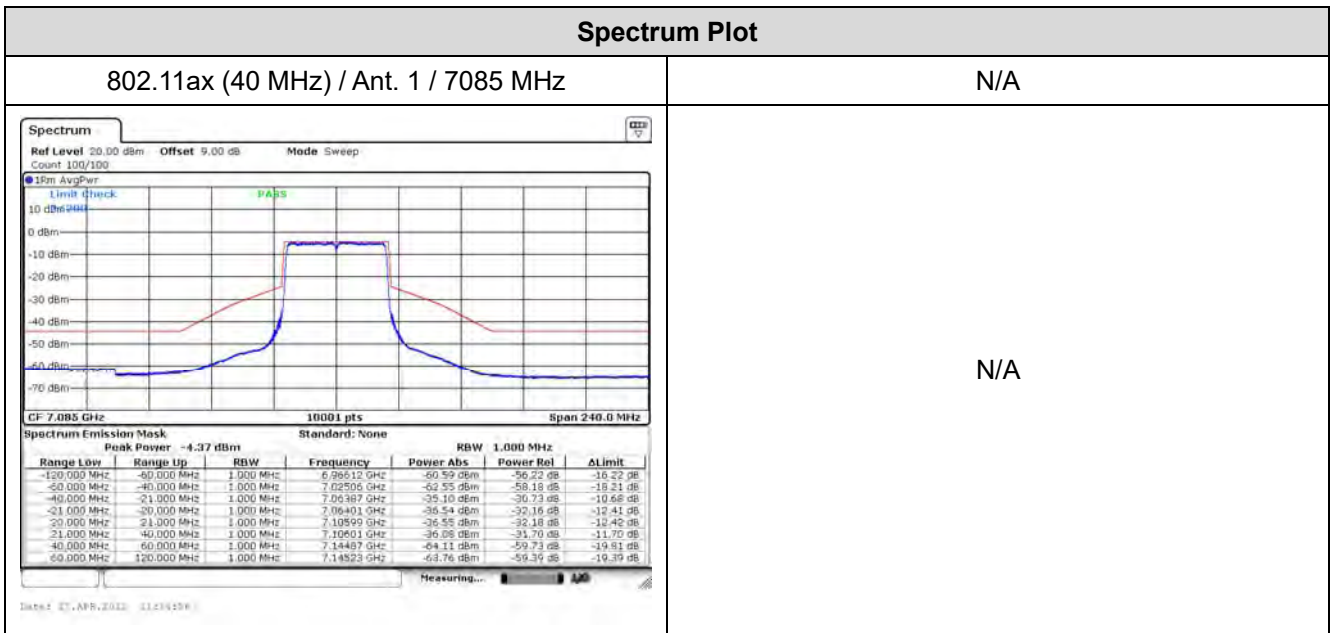


Spectrum Plot


802.11ax (40 MHz) / Ant. 2 / 6125 MHz

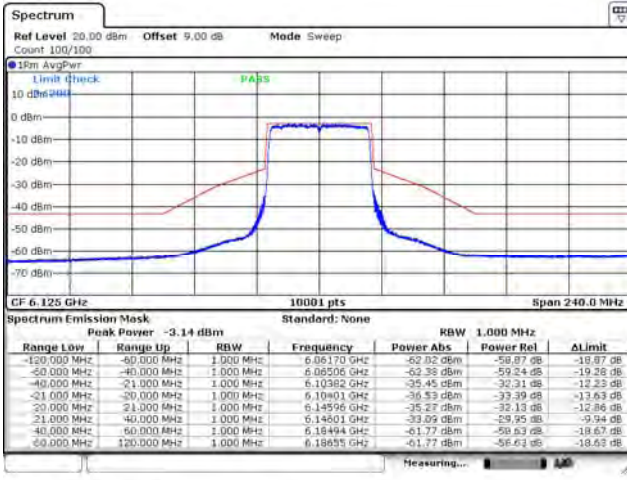


802.11ax (40 MHz) / Ant. 2 / 6245 MHz

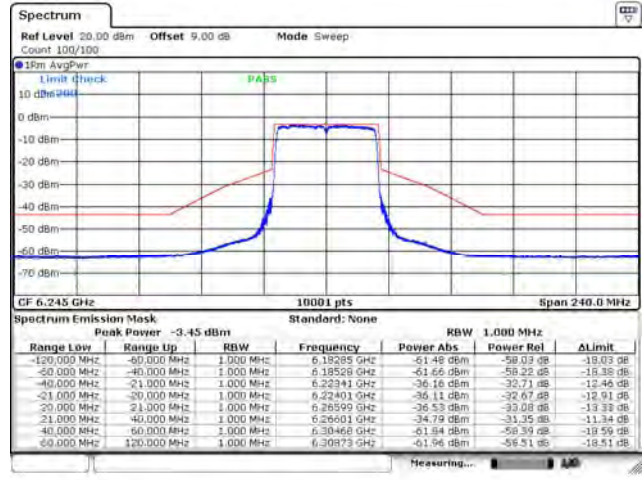


802.11ax (40 MHz) / Ant. 2 / 6405 MHz

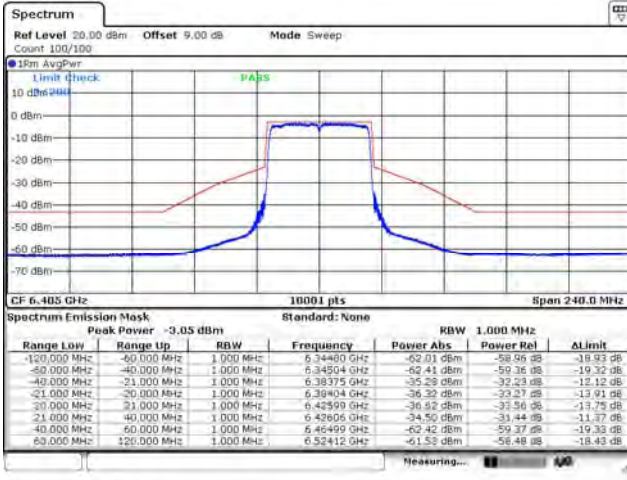


802.11ax (40 MHz) / Ant. 2 / 6445 MHz

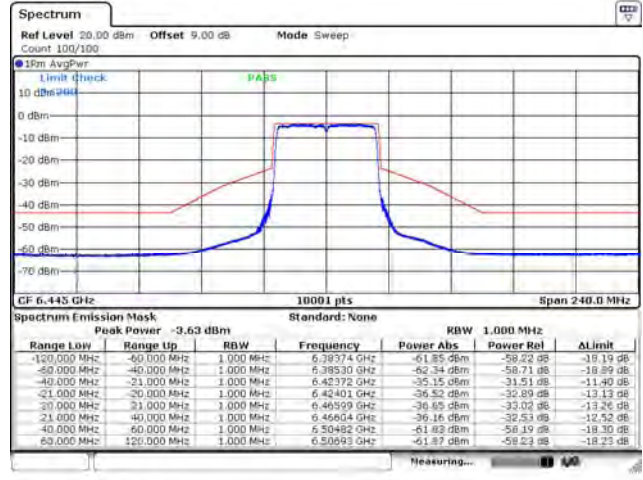

802.11ax (40 MHz) / Ant. 2 / 6485 MHz

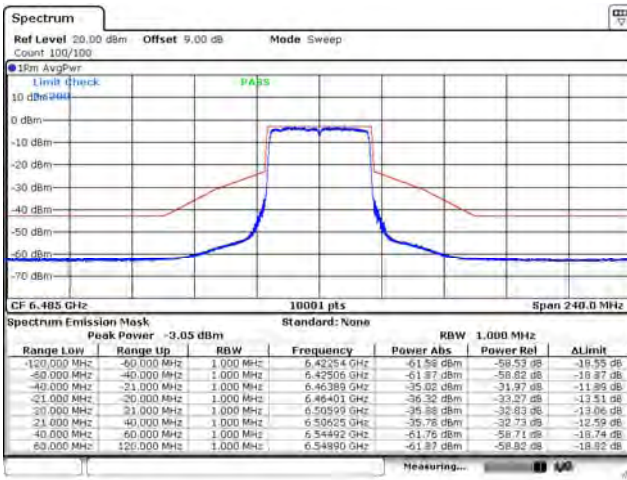


802.11ax (40 MHz) / Ant. 2 / 6525 MHz

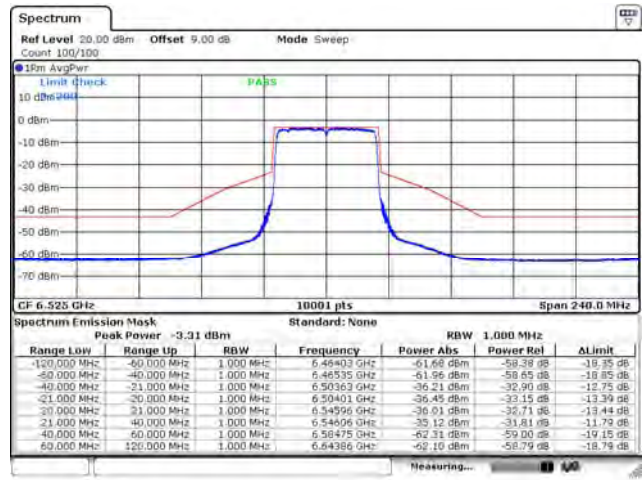


Spectrum Plot


802.11ax (40 MHz) / Ant. 2 / 6565 MHz

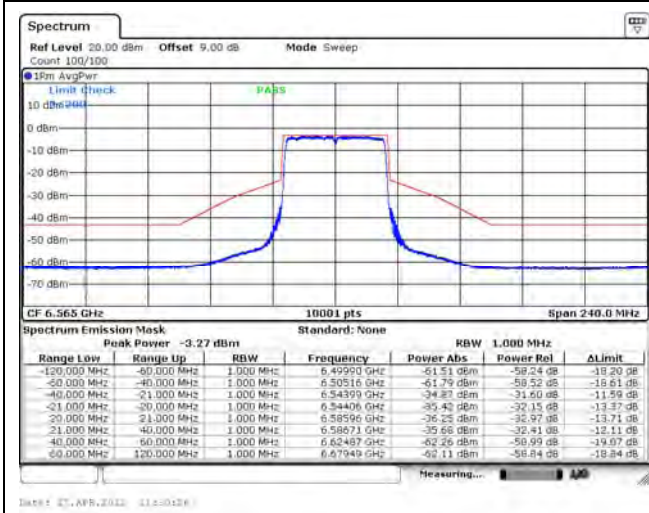


802.11ax (40 MHz) / Ant. 2 / 6725 MHz

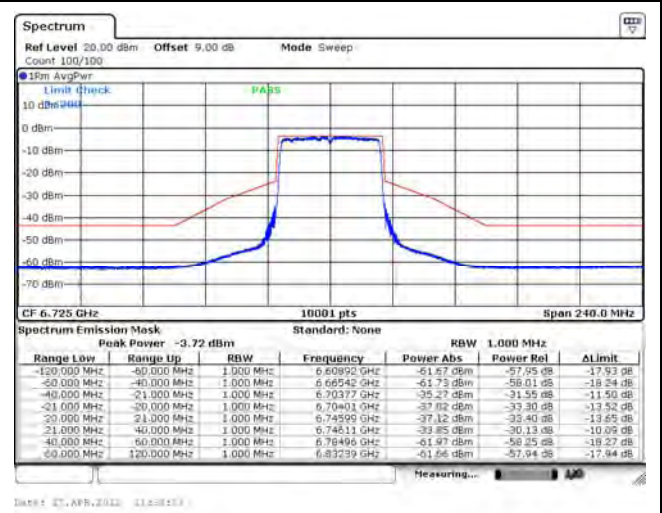


802.11ax (40 MHz) / Ant. 2 / 6845 MHz

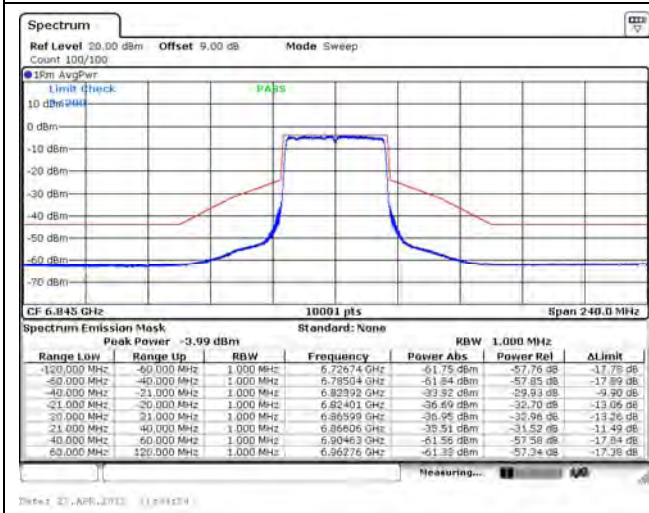


802.11ax (40 MHz) / Ant. 2 / 6885 MHz

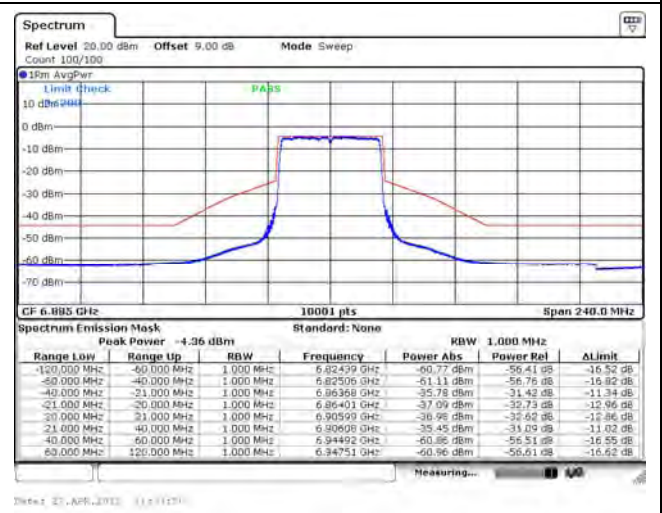


802.11ax (40 MHz) / Ant. 2 / 6925 MHz

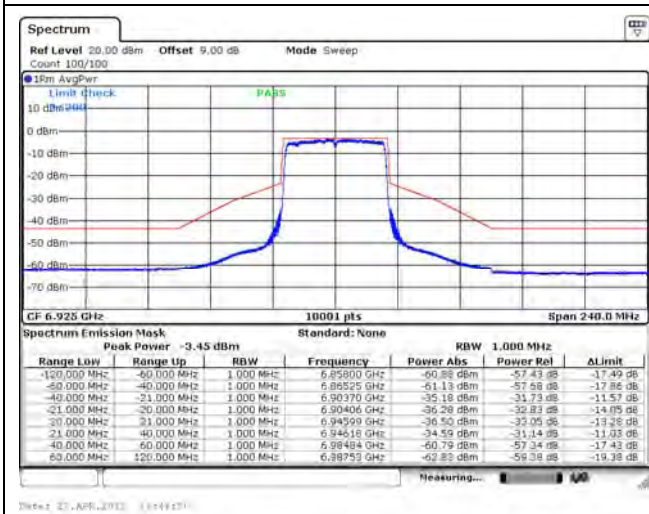


802.11ax (40 MHz) / Ant. 2 / 7005 MHz

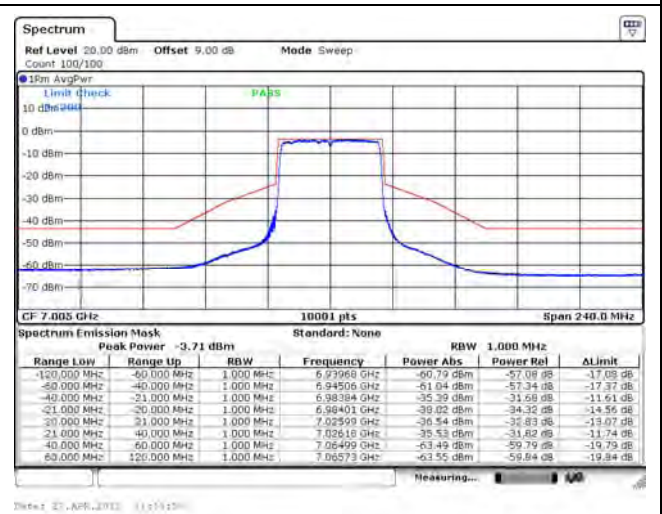

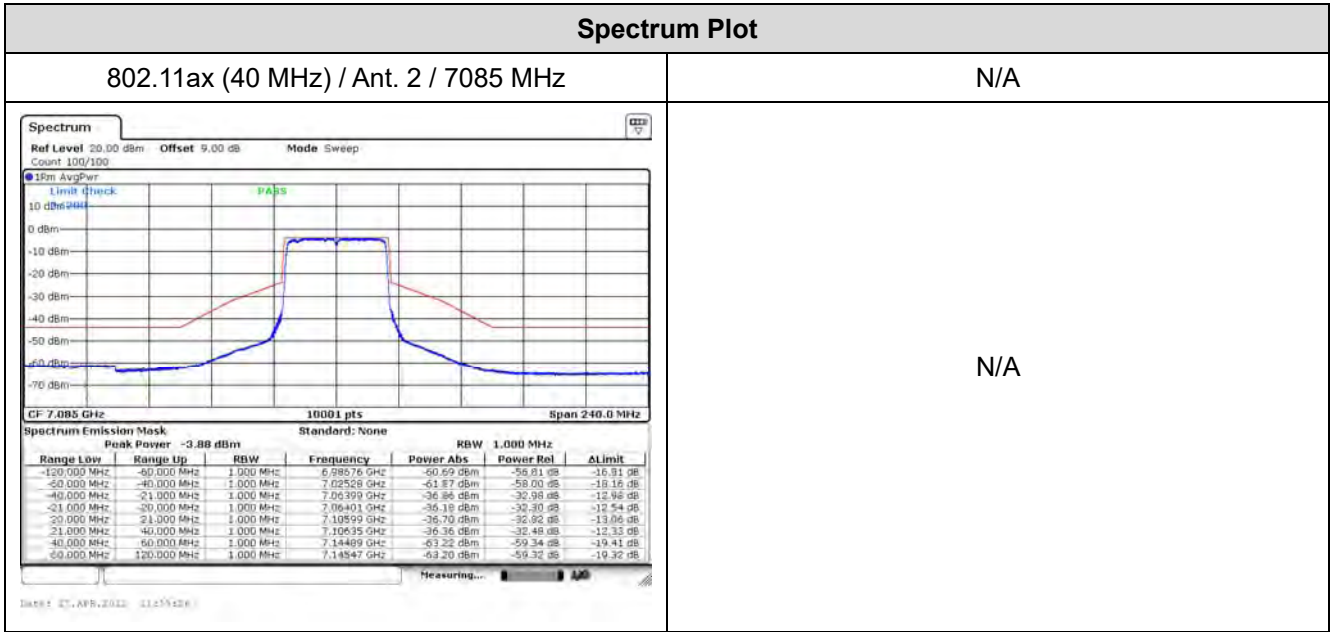


Spectrum Plot


802.11ax (40 MHz) / Ant. 3 / 6125 MHz

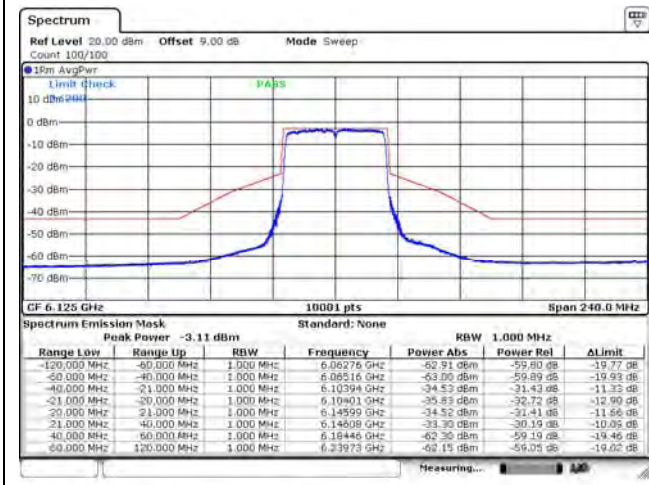


802.11ax (40 MHz) / Ant. 3 / 6245 MHz

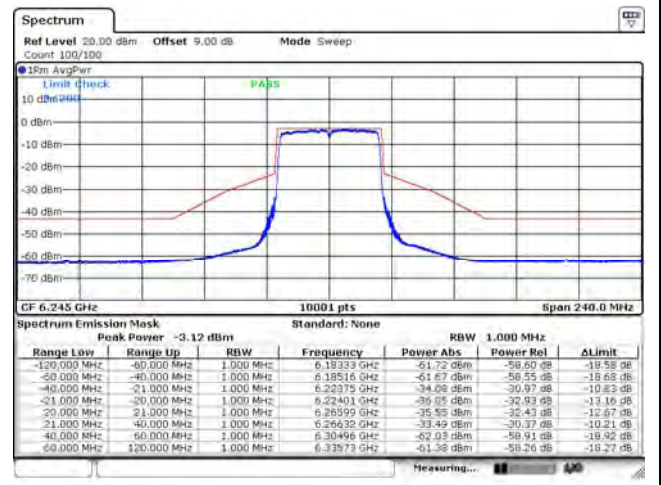


802.11ax (40 MHz) / Ant. 3 / 6405 MHz

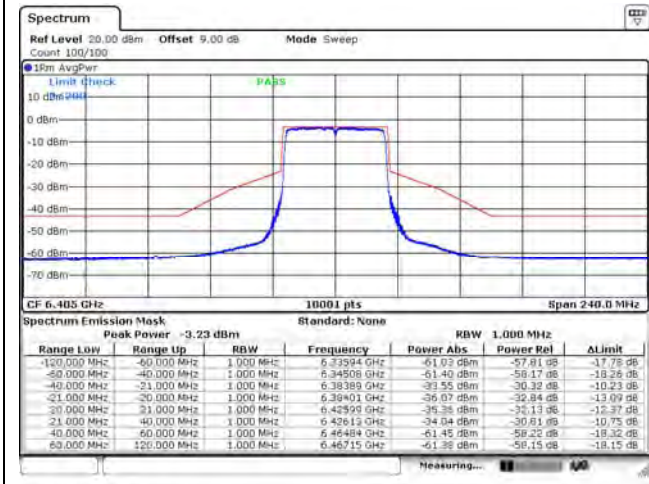


802.11ax (40 MHz) / Ant. 3 / 6445 MHz

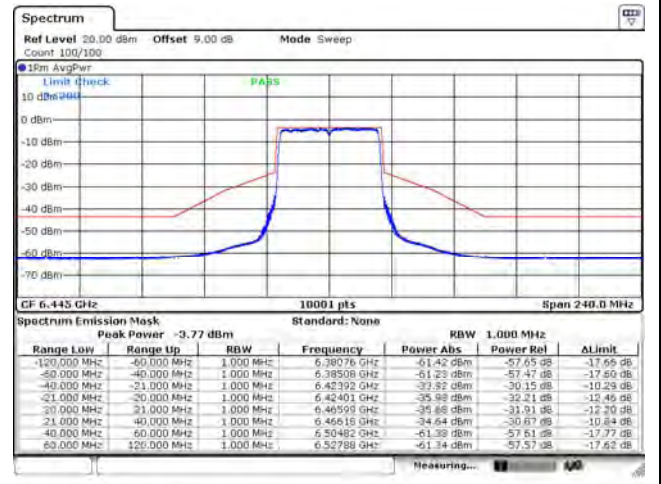

802.11ax (40 MHz) / Ant. 3 / 6485 MHz

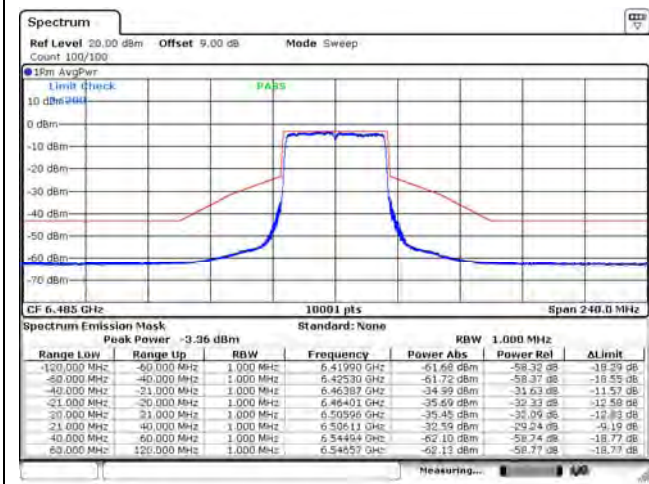


802.11ax (40 MHz) / Ant. 3 / 6525 MHz

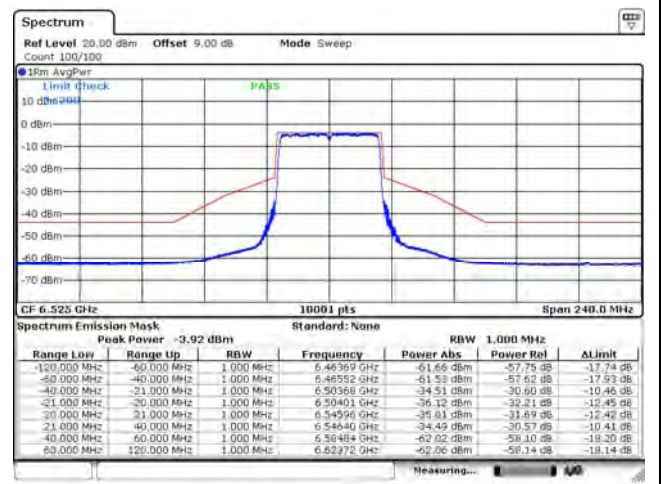


Spectrum Plot


802.11ax (40 MHz) / Ant. 3 / 6565 MHz

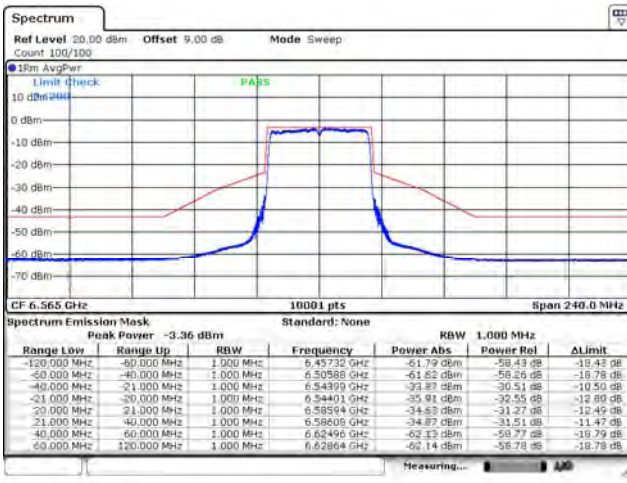


802.11ax (40 MHz) / Ant. 3 / 6725 MHz

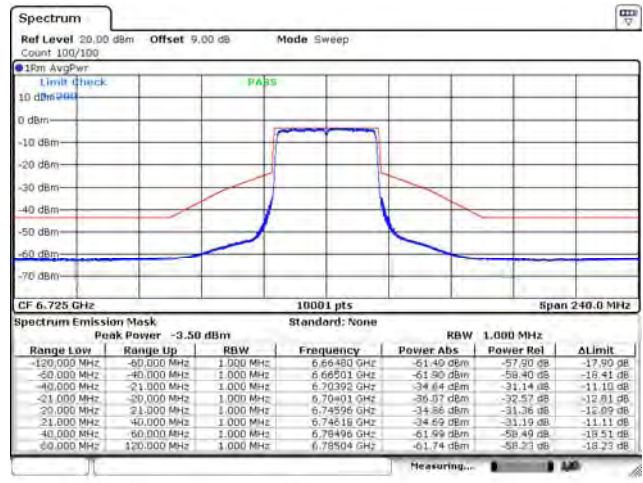


802.11ax (40 MHz) / Ant. 3 / 6845 MHz

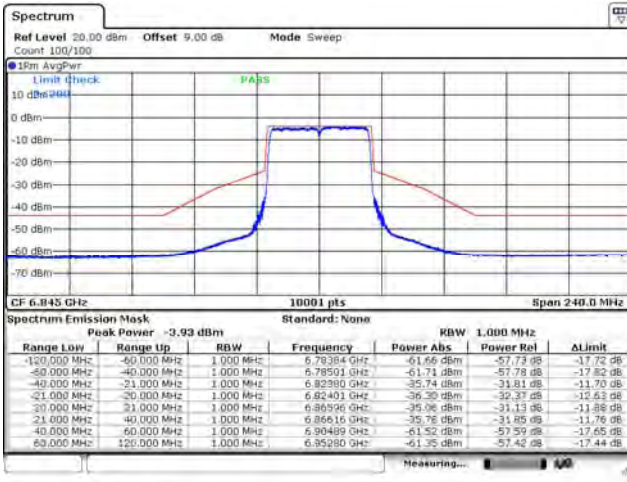


802.11ax (40 MHz) / Ant. 3 / 6885 MHz

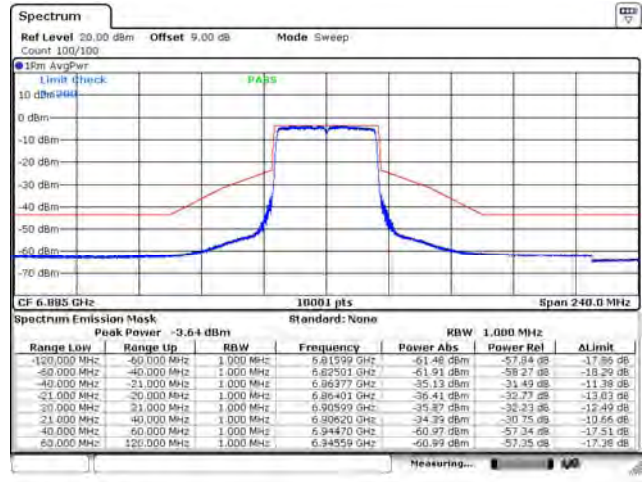


802.11ax (40 MHz) / Ant. 3 / 6925 MHz

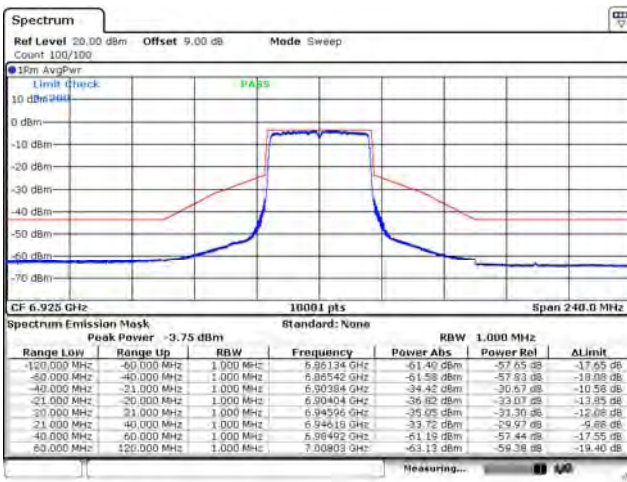


802.11ax (40 MHz) / Ant. 3 / 7005 MHz

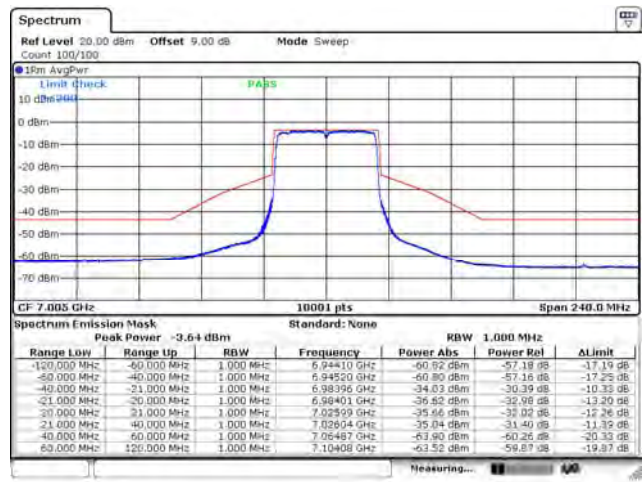

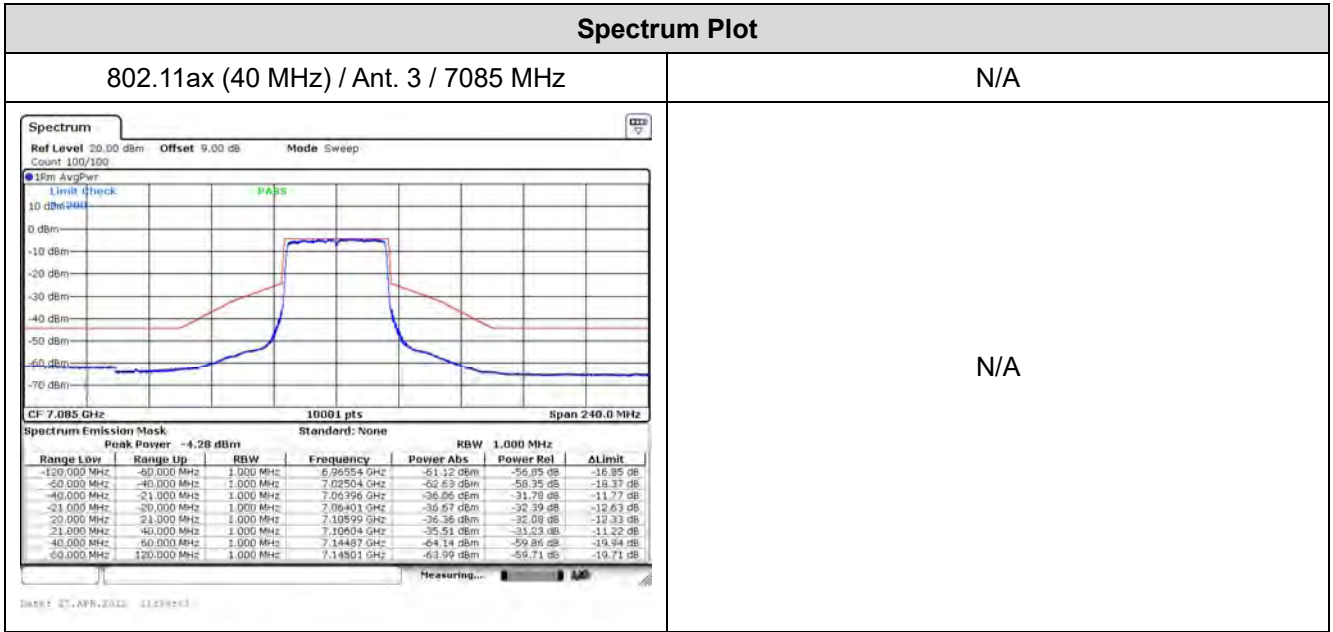


Spectrum Plot


802.11ax (80 MHz) / Ant. 0 / 6145 MHz

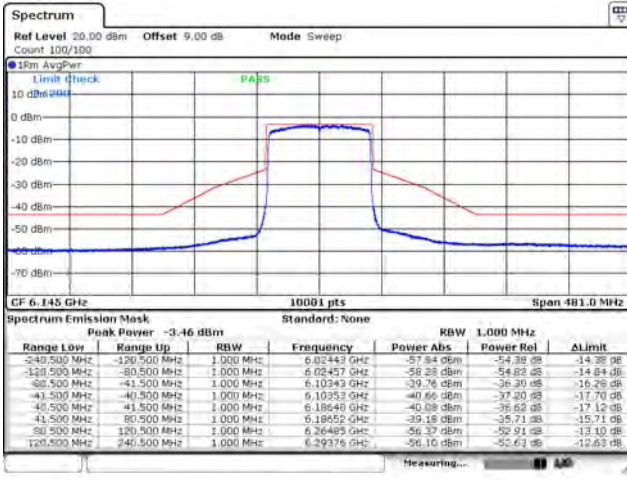


802.11ax (80 MHz) / Ant. 0 / 6225 MHz

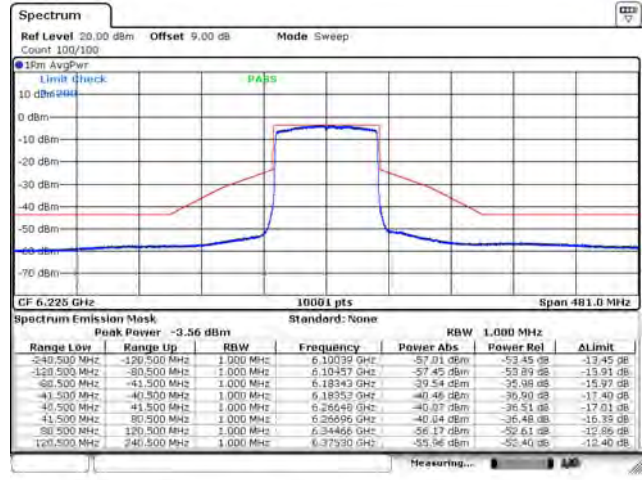


802.11ax (80 MHz) / Ant. 0 / 6385 MHz

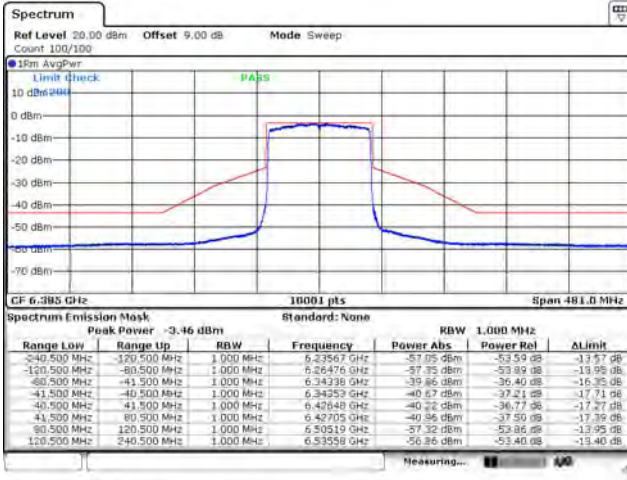


802.11ax (80 MHz) / Ant. 0 / 6465 MHz

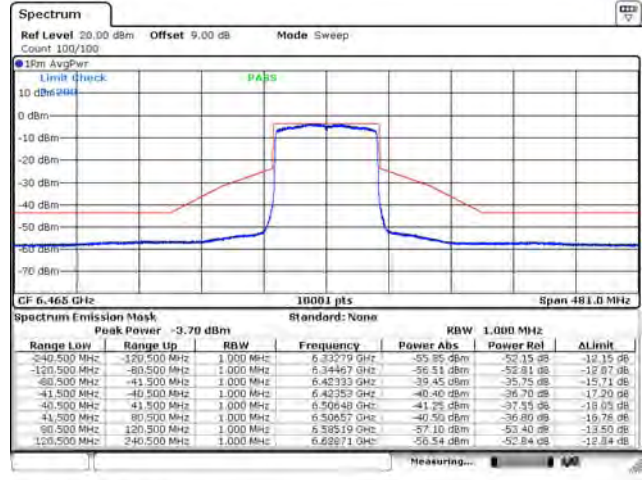

802.11ax (80 MHz) / Ant. 0 / 6545 MHz

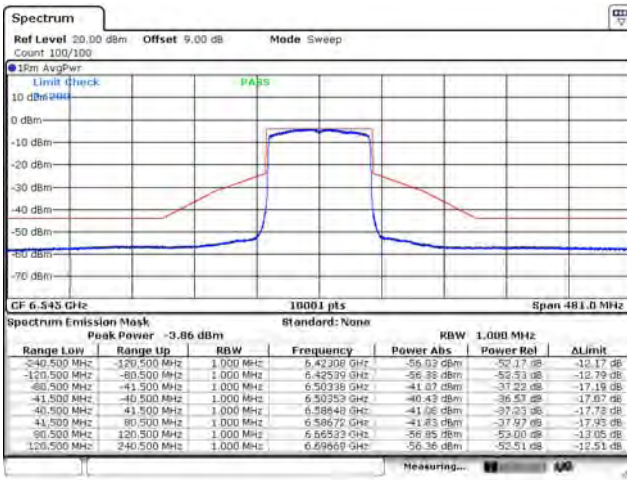


802.11ax (80 MHz) / Ant. 0 / 6625 MHz

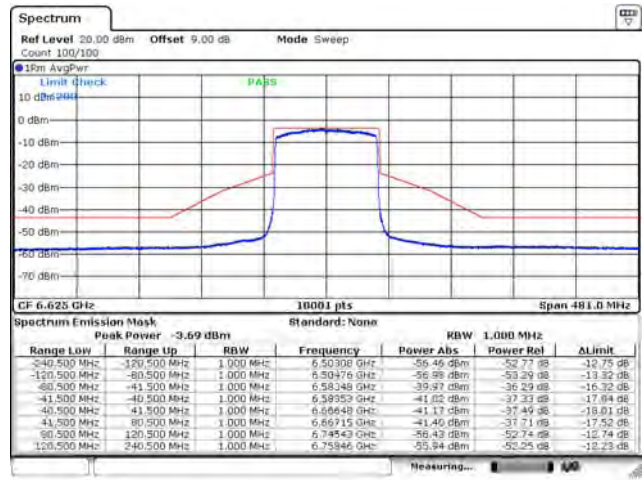


Spectrum Plot


802.11ax (80 MHz) / Ant. 0 / 6705 MHz

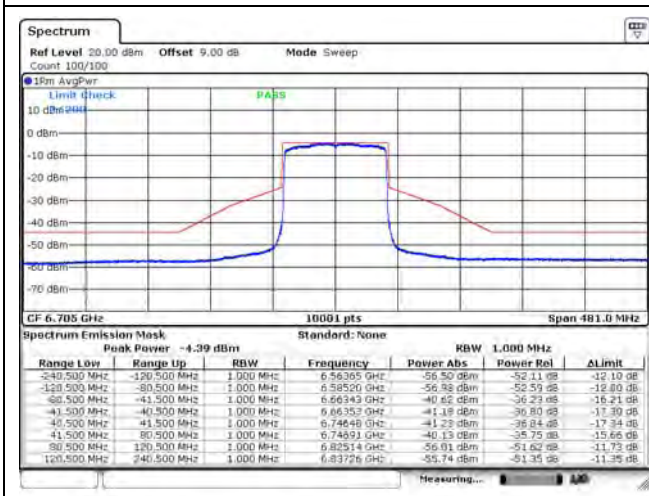


802.11ax (80 MHz) / Ant. 0 / 6785 MHz

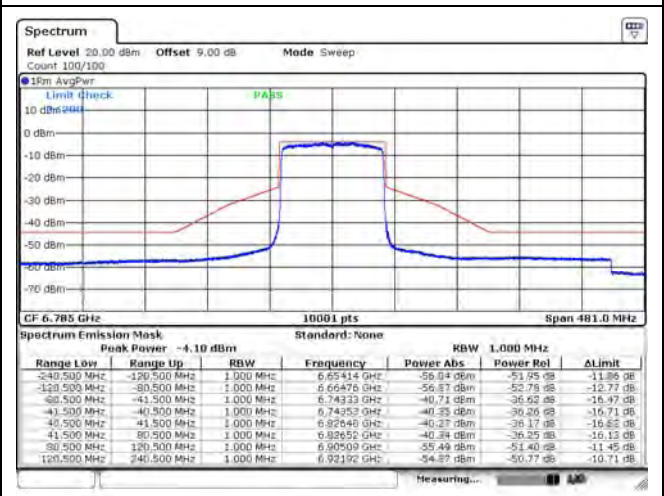


802.11ax (80 MHz) / Ant. 0 / 6865 MHz

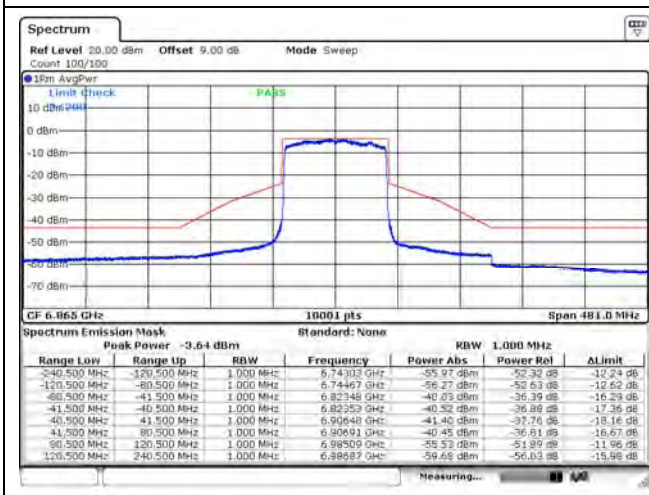

802.11ax (80 MHz) / Ant. 0 / 6945 MHz

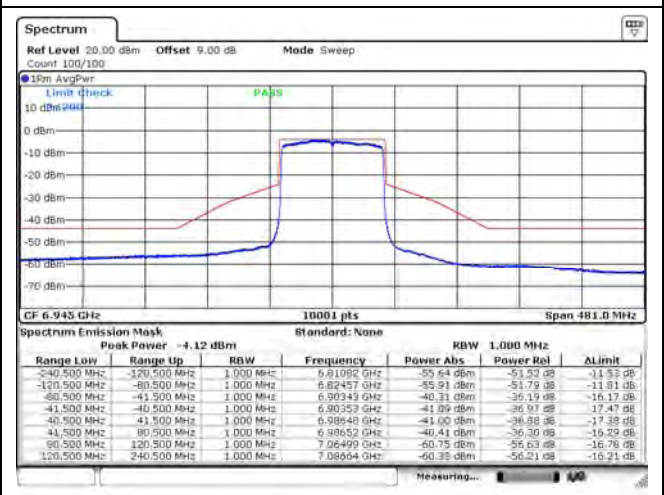

802.11ax (80 MHz) / Ant. 0 / 7025 MHz

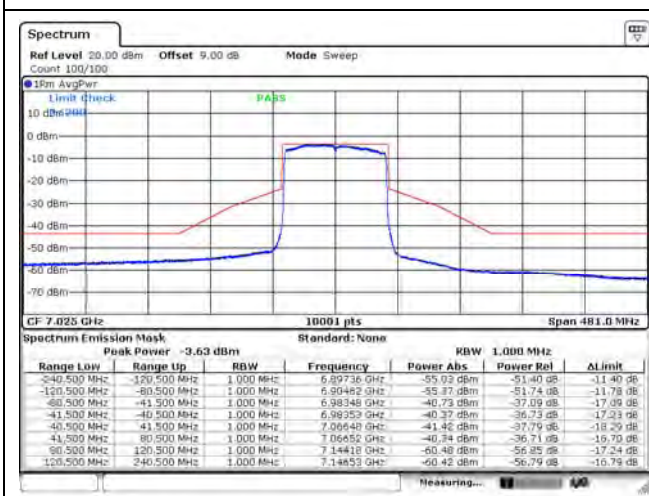


N/A


N/A

Spectrum Plot


802.11ax (80 MHz) / Ant. 1 / 6145 MHz

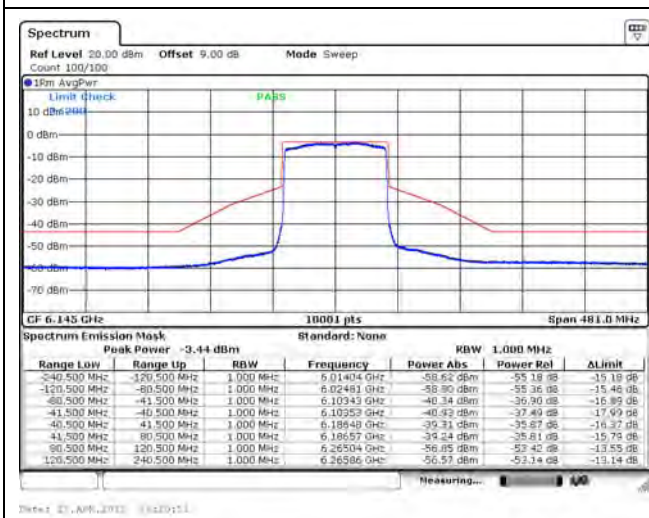


802.11ax (80 MHz) / Ant. 1 / 6225 MHz

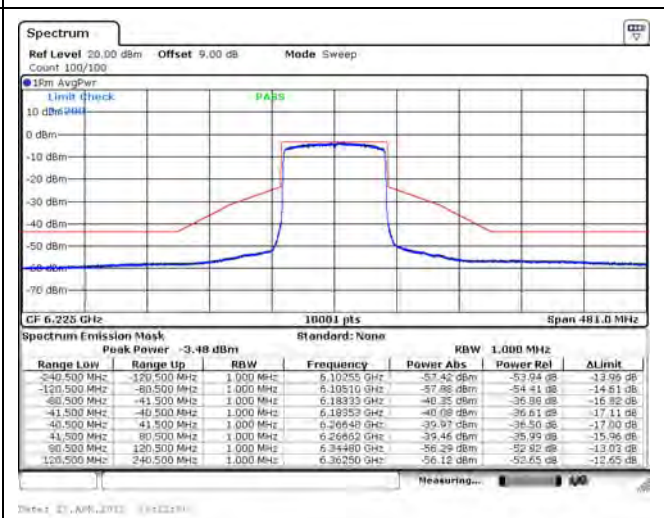


802.11ax (80 MHz) / Ant. 1 / 6385 MHz

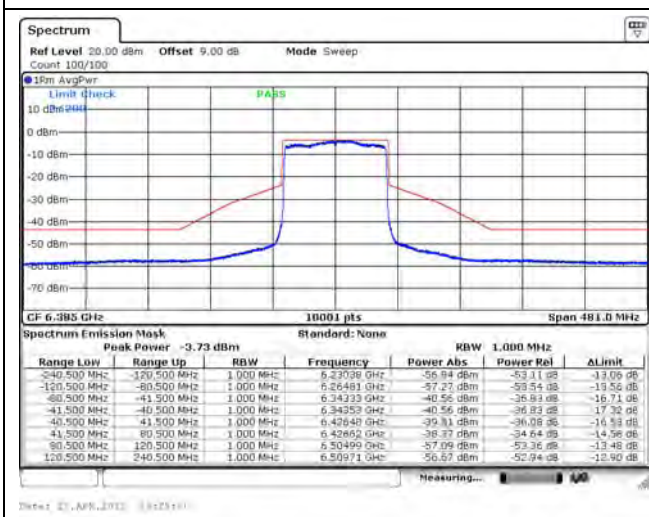


802.11ax (80 MHz) / Ant. 1 / 6465 MHz

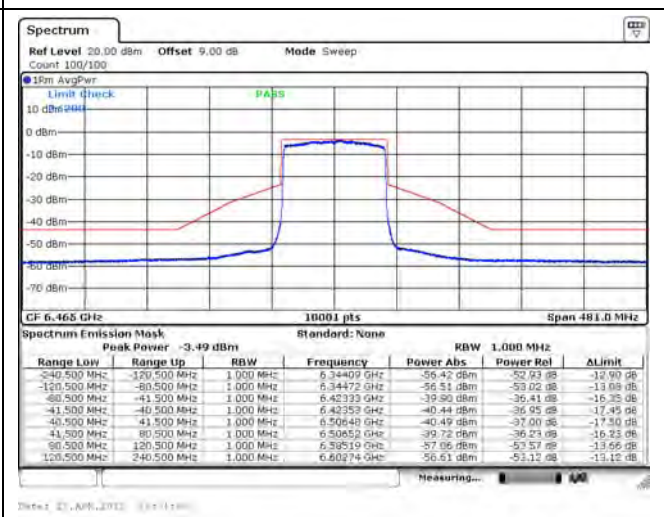

802.11ax (80 MHz) / Ant. 1 / 6545 MHz

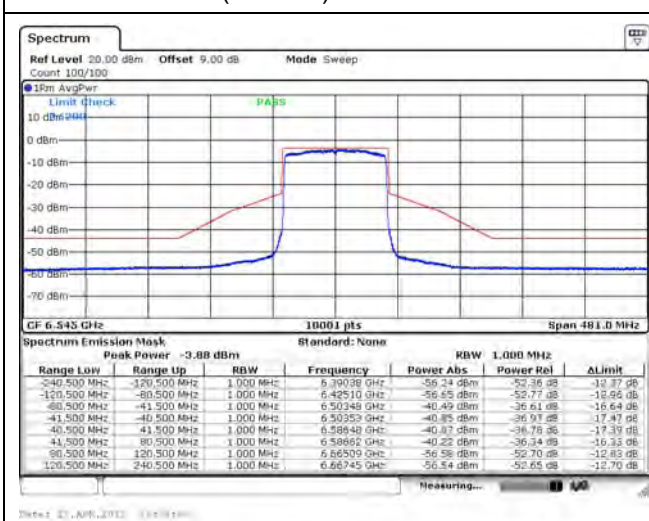


802.11ax (80 MHz) / Ant. 1 / 6625 MHz

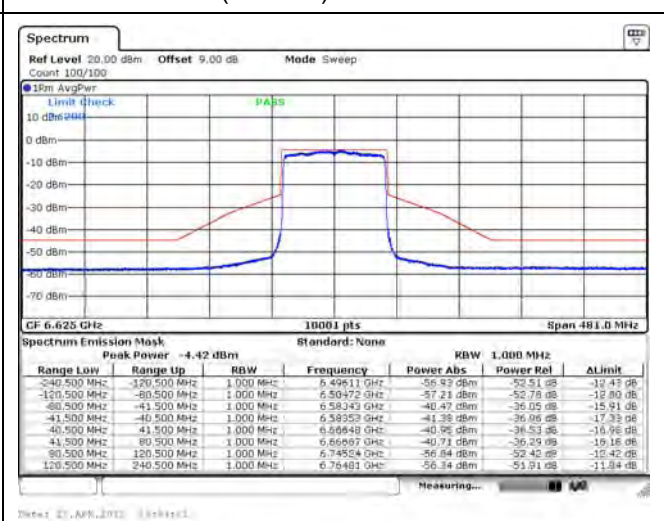


Spectrum Plot


802.11ax (80 MHz) / Ant. 1 / 6705 MHz

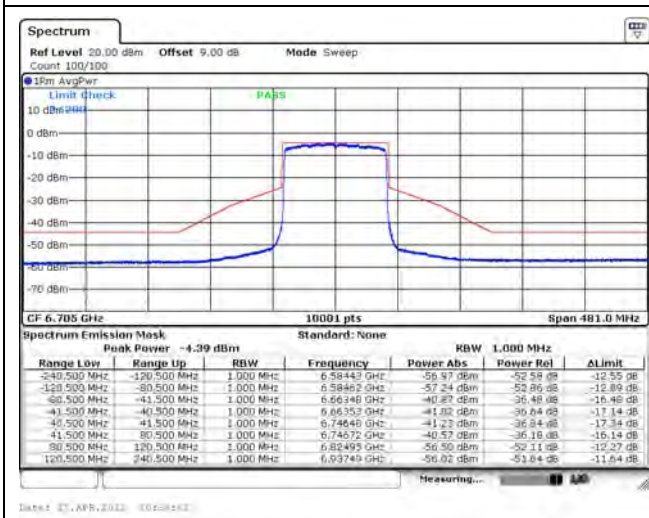


802.11ax (80 MHz) / Ant. 1 / 6785 MHz

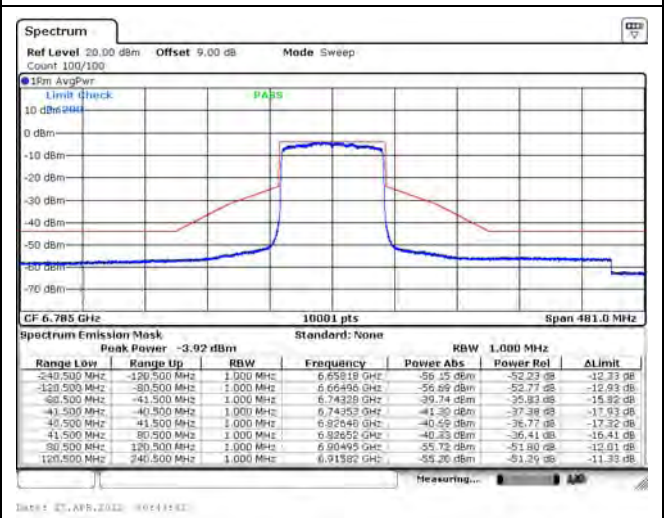


802.11ax (80 MHz) / Ant. 1 / 6865 MHz

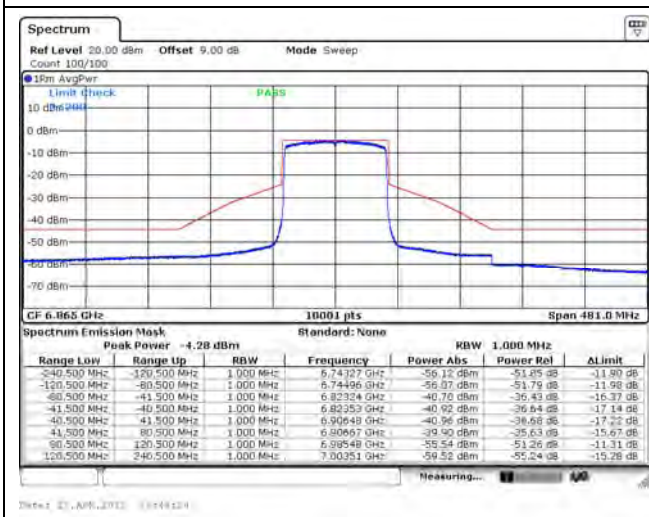

802.11ax (80 MHz) / Ant. 1 / 6945 MHz

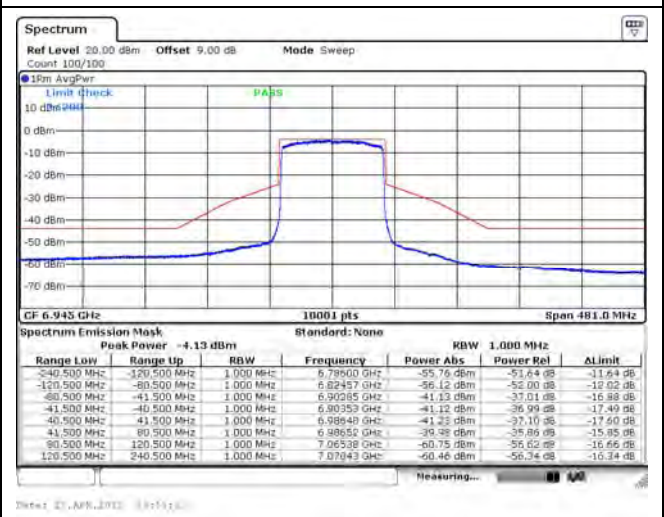

802.11ax (80 MHz) / Ant. 1 / 7025 MHz

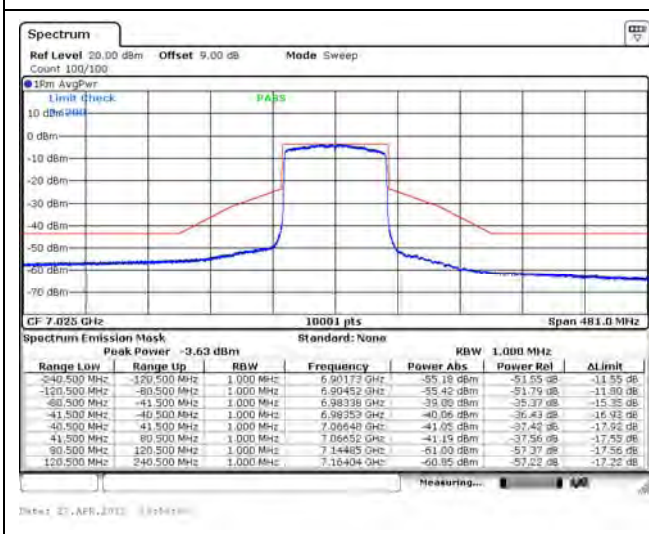


N/A


N/A

Spectrum Plot


802.11ax (80 MHz) / Ant. 2 / 6145 MHz

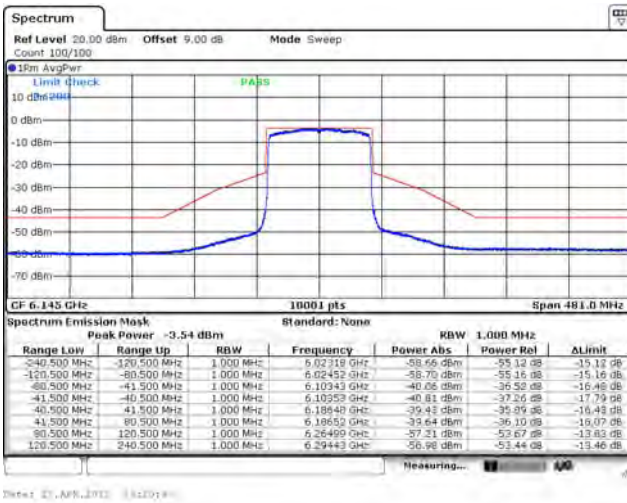


802.11ax (80 MHz) / Ant. 2 / 6225 MHz

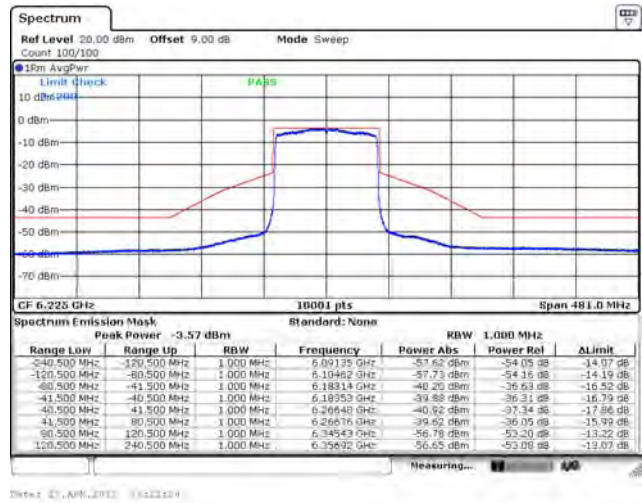


802.11ax (80 MHz) / Ant. 2 / 6385 MHz

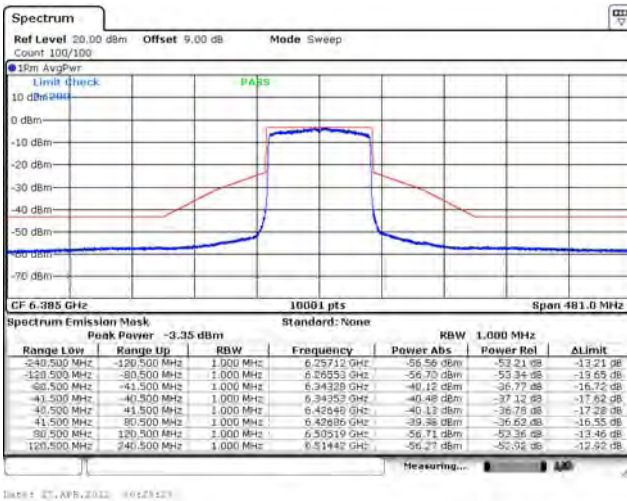

802.11ax (80 MHz) / Ant. 2 / 6465 MHz

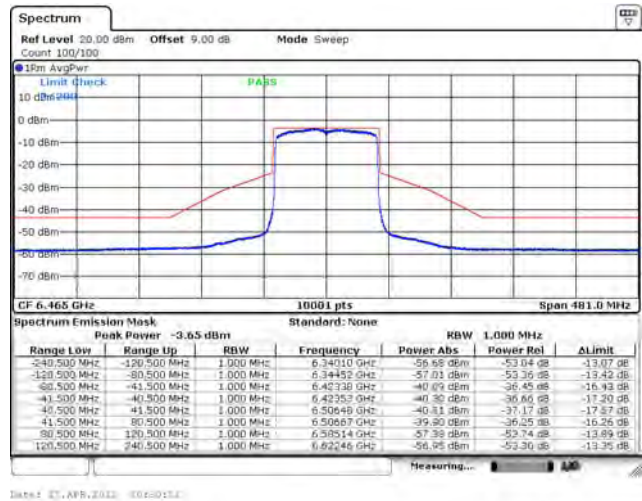

802.11ax (80 MHz) / Ant. 2 / 6545 MHz

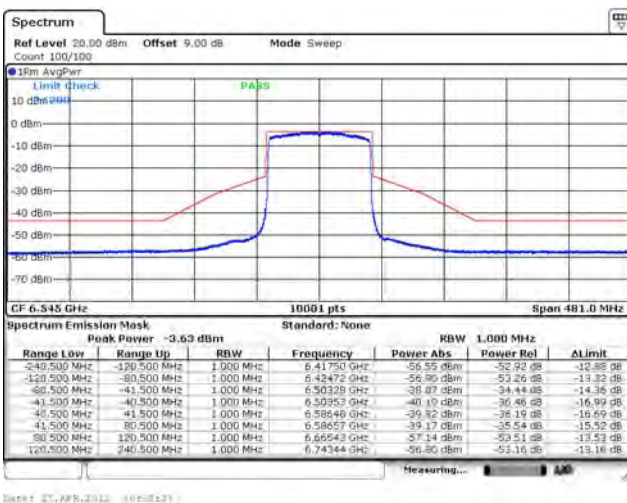



802.11ax (80 MHz) / Ant. 2 / 6625 MHz



Spectrum Plot



802.11ax (80 MHz) / Ant. 2 / 6705 MHz

802.11ax (80 MHz) / Ant. 2 / 6785 MHz

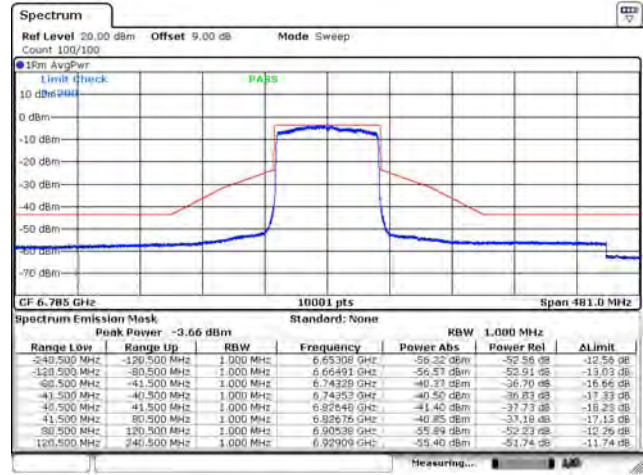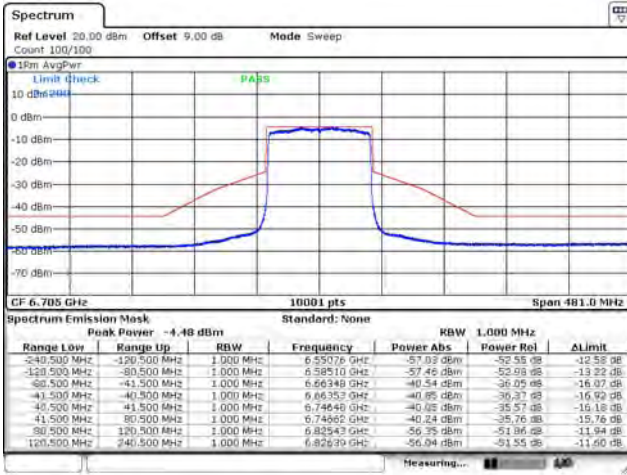


802.11ax (80 MHz) / Ant. 2 / 6865 MHz

802.11ax (80 MHz) / Ant. 2 / 6945 MHz

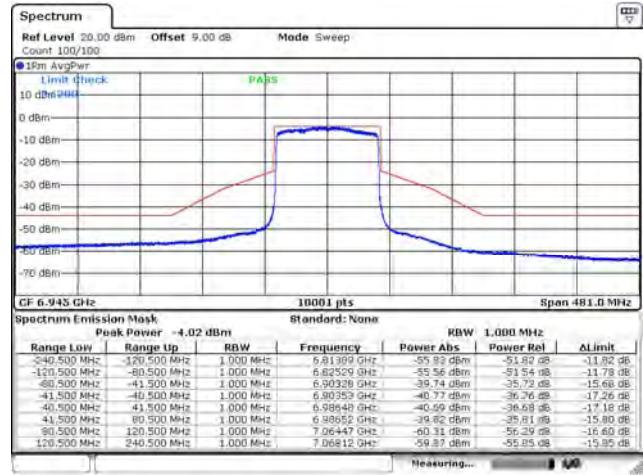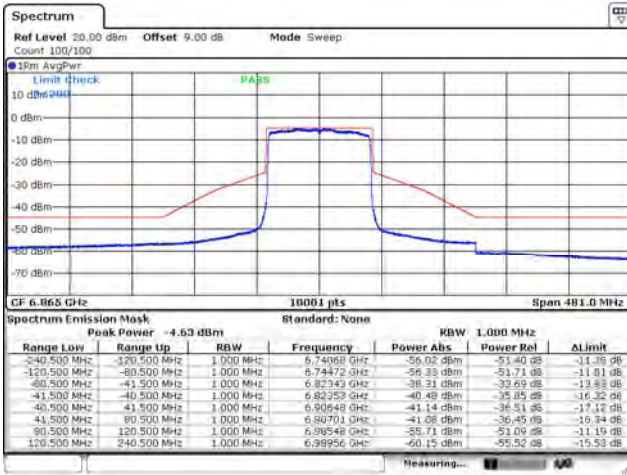

802.11ax (80 MHz) / Ant. 2 / 7025 MHz


N/A

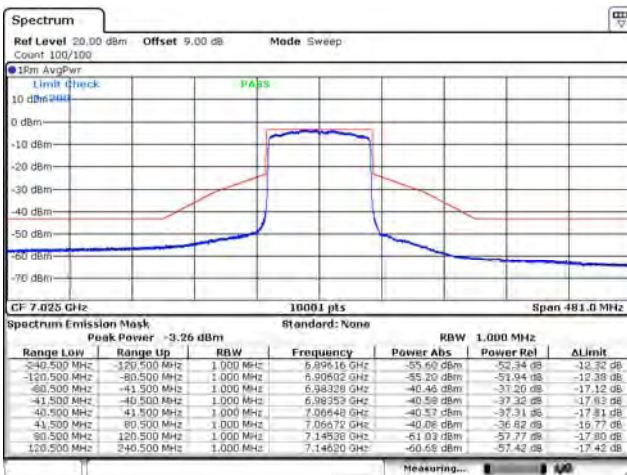


N/A

Spectrum Plot


802.11ax (80 MHz) / Ant. 3 / 6145 MHz

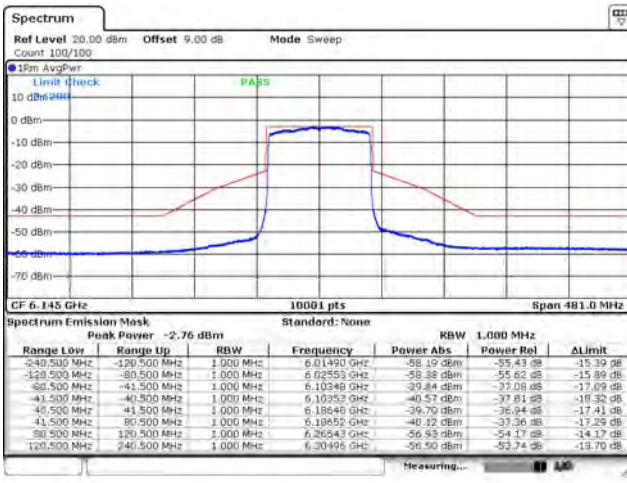


802.11ax (80 MHz) / Ant. 3 / 6225 MHz

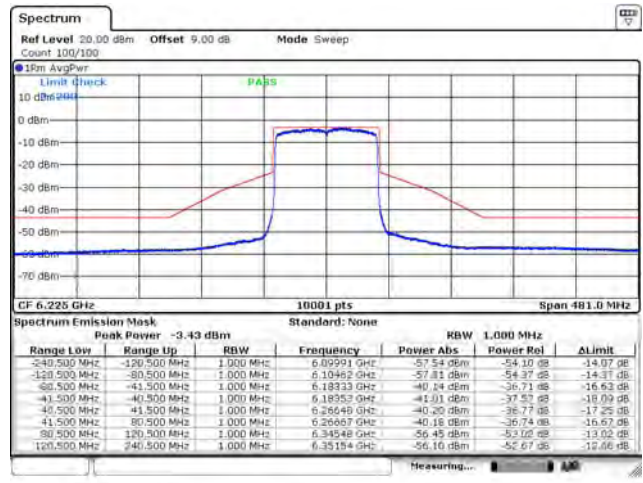


802.11ax (80 MHz) / Ant. 3 / 6385 MHz

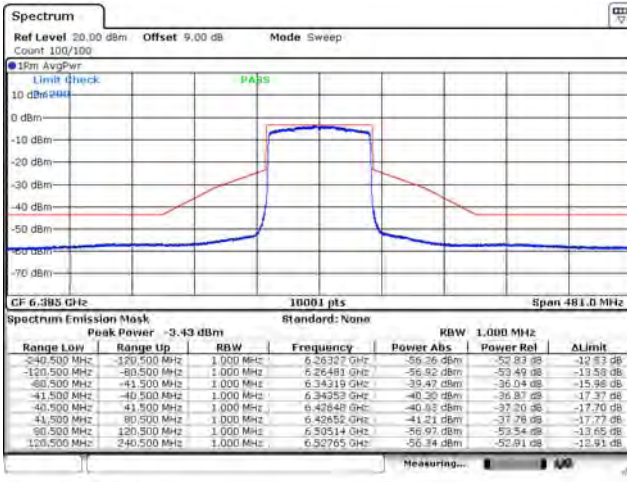

802.11ax (80 MHz) / Ant. 3 / 6465 MHz

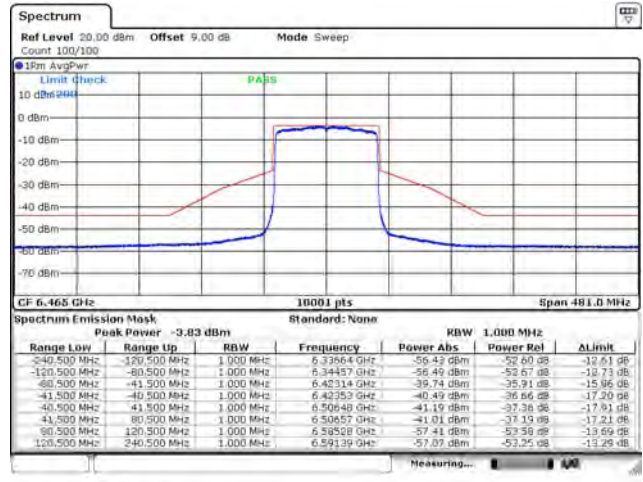

802.11ax (80 MHz) / Ant. 3 / 6545 MHz

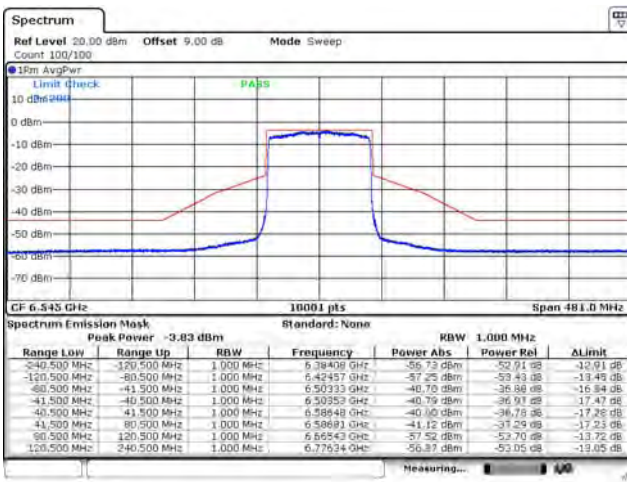

802.11ax (80 MHz) / Ant. 3 / 6625 MHz

