

FCC Test Report

FCC ID : NKR-R40

Equipment : 11bgn+BT combo module

Model No. : DHSB-R40

Brand Name : RICOH

Applicant : Wistron Neweb Corporation

Address : 20 Park Avenue II, Hsinchu Science Park,

Hsinchu 308, Taiwan, R.O.C.

Standard : 47 CFR FCC Part 15.247

Received Date : Jul. 16, 2014

Tested Date : Aug. 25 ~ Aug. 29, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager

Iac-MRA



Report No.: FR471601AC Report Version: Rev. 01 Page: 1 of 62



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	5
1.2	Local Support Equipment List	
1.3	Test Setup Chart	
1.4	The Equipment List	
1.5	Test Standards	9
1.6	Measurement Uncertainty	9
2	TEST CONFIGURATION	10
2.1	Testing Condition	10
2.2	The Worst Test Modes and Channel Details	10
3	TRANSMITTER TEST RESULTS	11
3.1	Conducted Emissions	11
3.2	6dB and Occupied Bandwidth	
3.3	RF Output Power	
3.4	Power Spectral Density	19
3.5	Unwanted Emissions into Restricted Frequency Bands	21
3.6	Emissions in Non-Restricted Frequency Bands	49
4	TEST LABORATORY INFORMATION	62



Release Record

Report No.	Version	Description	Issued Date
FR471601AC	Rev. 01	Initial issue	Sep. 05, 2014

Report No.: FR471601AC Page: 3 of 62



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.154MHz 55.32 (Margin -10.46dB) - QP	Pass
15.247(d)	Radiated Emissions	[dBuV/m at 3m]: 2483.50MHz	Pass
15.209	INdulated Effissions	73.00 (Margin -1.00dB) - PK	r ass
15.247(b)(3)	Fundamental Emission Output Power	Max Power [dBm]: 24.31	Pass
15.247(a)(2)	6dB Bandwidth	Meet the requirement of limit	Pass
15.247(e)	Power Spectral Density	Meet the requirement of limit	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

Report No.: FR471601AC Page: 4 of 62



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information								
Frequency Range (MHz)				Transmit Chains (N _{TX})	Data Rate / MCS			
2400-2483.5	b	2412-2462	1-11 [11]	1	1-11 Mbps			
2400-2483.5	g	2412-2462	1-11 [11]	1	6-54 Mbps			
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	1	MCS 0-7			
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	1	MCS 0-7			

Note 1: RF output power specifies that Maximum Peak Conducted Output Power.

Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation.

Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Туре	Gain (dBi)	Connector	Remarks
1	Printed	0.79		

1.1.3 Power Supply Type of Equipment under Test (EUT)

Power Supply Type	3.3Vdc from host.
-------------------	-------------------

1.1.4 Accessories

N/A

Report No.: FR471601AC Page: 5 of 62



1.1.5 Channel List

Frequency	band (MHz)	2400~2483.5		
802.11 b /	g / n HT20	802.11n HT40		
Channel	Channel Frequency(MHz)		Frequency(MHz)	
1	2412	3	2422	
2	2417	4	2427	
3	2422	5	2432	
4	2427	6	2437	
5	2432	7	2442	
6	2437	8	2447	
7	2442	9	2452	
8	2447			
9	2452			
10	2457			
11	2462			

1.1.6 Test Tool and Duty Cycle

Test Tool	MTool, version 2.0.0.8				
	Mode	Duty cycle (%)	Duty factor (dB)		
	11b	100.00%	0.00		
Duty Cycle and Duty Factor	11g	99.52%	0.02		
	HT20	99.49%	0.02		
	HT40	98.15%	0.08		

Report No.: FR471601AC Page: 6 of 62




1.1.7 Power Setting

Modulation Mode	Test Frequency (MHz)	Power Set
11b	2412	90
11b	2437	96
11b	2462	88
11g	2412	62
11g	2437	82
11g	2462	56
HT20	2412	60
HT20	2437	82
HT20	2462	52
HT40	2422	62
HT40	2437	70
HT40	2452	58

1.2 Local Support Equipment List

	Support Equipment List						
No.	No. Equipment Brand Model S/N FCC ID Signal cable / Length (m						
1	Notebook	DELL	E6430		DoC	USB, 1m shielded w/o core.	

1.3 Test Setup Chart

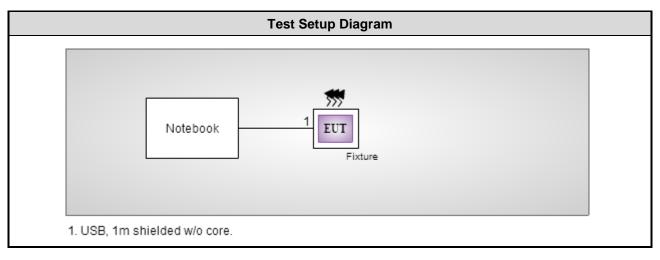

Report No.: FR471601AC Page: 7 of 62



1.4 The Equipment List

Test Item	Conducted Emission	Conducted Emission							
Test Site	Conduction room 1 / (Conduction room 1 / (CO01-WS)							
Instrument	Manufacturer	Manufacturer Model No. Serial No. Calibration Date Calibration Until							
EMC Receiver	R&S	ESCS 30	100169	Oct. 15, 2013	Oct. 14, 2014				
LISN	SCHWARZBECK	Schwarzbeck 8127	8127-667	Nov. 23, 2013	Nov. 22, 2014				
LISN (Support Unit)	SCHWARZBECK	Schwarzbeck 8127	8127-666	Dec. 04, 2013	Dec. 03, 2014				
RF Cable-CON	Woken	CFD200-NL	CFD200-NL-001	Apr. 23, 2014	Apr. 22, 2015				
50 ohm terminal (Support Unit) NA 50 04 Apr. 18, 2014 Apr. 17, 2015									
Note: Calibration Inte	rval of instruments liste	d above is one year.							

Test Item	Radiated Emission							
Test Site	966 chamber 3 / (03C	966 chamber 3 / (03CH03-WS)						
Instrument	Manufacturer	Model No.	Calibration Date	Calibration Until				
Spectrum Analyzer	Agilent	N9010A	MY53400091	Oct. 07, 2013	Oct. 06, 2014			
Receiver	Agilent	N9038A	MY53290044	Jan. 08, 2014	Jan. 07, 2015			
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-562	Feb. 07, 2014	Feb. 06, 2015			
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 20, 2014	Feb. 19, 2015			
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014			
Preamplifier	EMC	EMC02325	980187	Nov. 22, 2013	Nov. 21, 2014			
Preamplifier	Agilent	83017A	MY53270014	Nov. 22, 2013	Nov. 21, 2014			
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014			
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 19, 2014	Feb. 18, 2015			
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22601/4	Feb. 19, 2014	Feb. 18, 2015			
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 19, 2014	Feb. 18, 2015			
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800 -001	Feb. 17, 2014	Feb. 16, 2015			
LF cable-3M	EMC	EMC8D-NM-NM-300 0	131103	Feb. 17, 2014	Feb. 16, 2015			
LF cable-13M	EMC	EMC8D-NM-NM-130 00	131104	Feb. 17, 2014	Feb. 16, 2015			
Note: Calibration Inter	Note: Calibration Interval of instruments listed above is one year.							

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014			
Note: Calibration Interval of instruments listed above is two year.								

Report No.: FR471601AC Page: 8 of 62



Test Item	RF Conducted								
Test Site	(TH01-WS)								
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until				
Spectrum Analyzer	R&S	FSV40	101063	Feb. 17, 2014	Feb. 16, 2015				
Power Meter	Anritsu	ML2495A	1241002	Oct. 24, 2013	Oct. 23, 2014				
Power Sensor	Anritsu	MA2411B	1207366	Oct. 24, 2013	Oct. 23, 2014				
Note: Calibration Interval of instruments listed above is one year.									

1.5 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 ANSI C63.10-2009 FCC KDB 558074 D01 DTS Meas Guidance v03r02

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty						
Parameters	Uncertainty					
Bandwidth	±34.134 Hz					
Conducted power	±0.808 dB					
Frequency error	±34.134 Hz					
Temperature	±0.6 °C					
Conducted emission	±2.670 dB					
AC conducted emission	±2.92 dB					
Radiated emission ≤ 1GHz	±3.26 dB					
Radiated emission > 1GHz	±4.94 dB					

Report No.: FR471601AC Page: 9 of 62



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	22°C / 68%	Skys Huang
Radiated Emissions	03CH03-WS	20-21°C / 60-61%	Haru Yang Aska Huang
RF Conducted	TH01-WS	24°C / 63%	Brad Wu

FCC site registration No.: 390588IC site registration No.: 10807C-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate (Mbps) / MCS	Test Configuration
Conducted Emissions	11g	2437	6 Mbps	
Radiated Emissions ≤1GHz	11g	2437	6 Mbps	
Radiated Emissions >1GHz	11b	2412 / 2437 / 2462	1 Mbps	
Fundamental Emission Output Power	11g	2412 / 2437 / 2462	6 Mbps	
6dB bandwidth	HT20	2412 / 2437 / 2462	MCS 0	
Power spectral density	HT40	2422 / 2437 / 2452	MCS 0	

NOTE:

Report No.: FR471601AC Page: 10 of 62

^{1.} The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **Z-plane** results were found as the worst case and were shown in this report.



3 Transmitter Test Results

3.1 Conducted Emissions


3.1.1 Limit of Conducted Emissions

Conducted Emissions Limit							
Frequency Emission (MHz) Quasi-Peak Average							
0.15-0.5	66 - 56 *	56 - 46 *					
0.5-5	56	46					
5-30 60 50							
Note 1: * Decreases with the logarithm of the frequency.							

3.1.2 Test Procedures

- 1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
- 2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50 Ω LISN port.
- 3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
- 4. This measurement was performed with AC 120V / 60Hz.

3.1.3 Test Setup

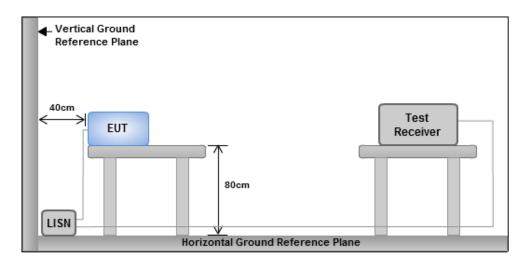


Note: 1. Support units were connected to second LISN.

Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

Report No.: FR471601AC Page: 11 of 62




3.1.4 Test Result of Conducted Emissions

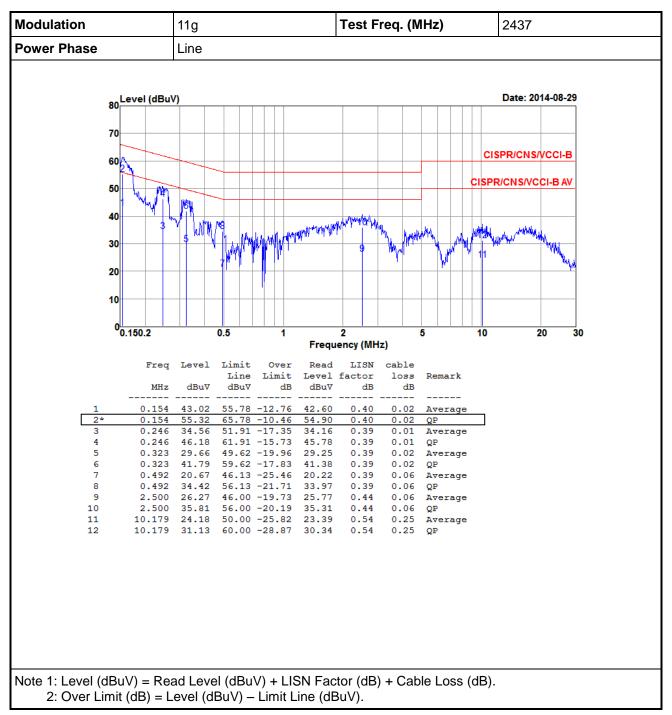

Report No.: FR471601AC Page : 12 of 62



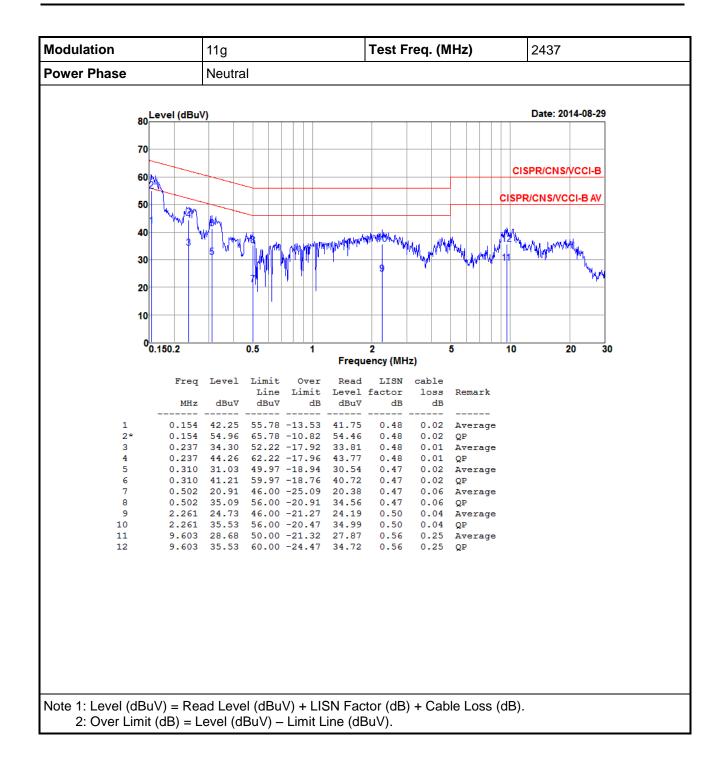

Report No.: FR471601AC Page: 13 of 62



3.2 6dB and Occupied Bandwidth


3.2.1 Limit of 6dB Bandwidth

The minimum 6dB bandwidth shall be at least 500 kHz.

3.2.2 Test Procedures

- 1. Set resolution bandwidth (RBW) = 100 kHz, Video bandwidth = 300 kHz.
- 2. Detector = Peak, Trace mode = max hold.
- 3. Sweep = auto couple, Allow the trace to stabilize.
- 4. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower) that are attenuated by 6dB relative to the maximum level measured in the fundamental emission.

3.2.3 Test Setup




Report No.: FR471601AC Page: 14 of 62



3.2.4 Test Result of 6dB and Occupied Bandwidth

Modulation	NI NI	Eron (MU=)	6dB Bandwidth (MHz)				Limit (Idua)
Mode	N _{TX}	Freq. (MHz)	Chain 0	Chain 1	Chain 2	Chain 3	Limit (kHz)
11b	1	2412	7.59				500
11b	1	2437	8.06				500
11b	1	2462	8.06				500
11g	1	2412	14.96				500
11g	1	2437	15.71				500
11g	1	2462	14.43				500
HT20	1	2412	16.00				500
HT20	1	2437	14.20				500
HT20	1	2462	15.13				500
HT40	1	2422	35.13				500
HT40	1	2437	35.13				500
HT40	1	2452	35.13				500

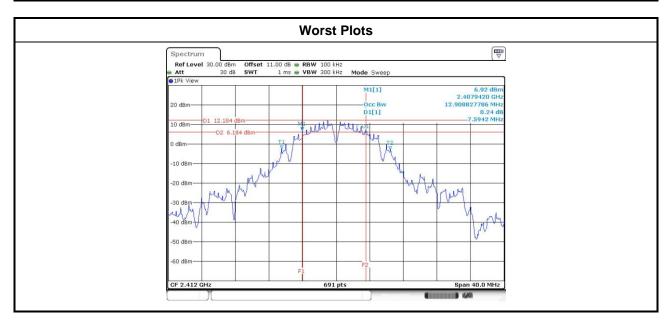

Report No.: FR471601AC Page: 15 of 62



Modulation	N	Freq.	99% Occupied Bandwidth (MHz)					
Mode	N _{TX}	(MHz)	Chain 0	Chain 1	Chain 2	Chain 3		
11b	1	2412	12.92					
11b	1	2437	13.21					
11b	1	2462	12.92					
11g	1	2412	16.53					
11g	1	2437	16.64					
11g	1	2462	16.53					
HT20	1	2412	17.51					
HT20	1	2437	17.62					
HT20	1	2462	17.51					
HT40	1	2422	36.21					
HT40	1	2437	36.21					
HT40	1	2452	36.21					



Report No.: FR471601AC Page: 16 of 62



3.3 RF Output Power

3.3.1 Limit of RF Output Power

Con	duct	ed power shall not exceed 1Watt.
\boxtimes	Ante	enna gain <= 6dBi, no any corresponding reduction is in output power limit.
	Ante	enna gain > 6dBi
		Non Fixed, point to point operations. The conducted output power from the intentional radiator shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dB
		Fixed, point to point operations Systems operating in the 2400–2483.5 MHz band that are used exclusively for fixed, point-to-point Operations, maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.
		Systems operating in the 5725–5850 MHz band that are used exclusively for fixed, point-to-point operations ,no any corresponding reduction is in transmitter peak output power

3.3.2 Test Procedures

Maximum Peak Conducted Output Power

□ Spectrum analyzer

- 1. Set RBW = 1MHz, VBW = 3MHz, Detector = Peak.
- 2. Sweep time = auto, Trace mode = max hold, Allow trace to fully stabilize.
- 3. Use the spectrum analyzer channel power measurement function with the band limits set equal to the DTS bandwidth edges.

Nower meter

- A broadband Peak RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.
- Maximum Conducted Output Power (For reference only)

Nower meter

 A broadband Average RF power meter is used for output power measurement. The video bandwidth of power meter is greater than DTS bandwidth of EUT. If duty cycle of test signal is not 100 %, trigger and gating function of power meter will be enabled to capture transmission burst for measuring output power.

3.3.3 Test Setup



Report No.: FR471601AC Page: 17 of 62



3.3.4 Test Result of Maximum Output Power

Modulation Mode	N _{TX}	Freq. (MHz)	Peak		d output p 3m)	output power n)		Total Power	Limit
Wode		(IVITIZ)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(dBm)
11b	1	2412	23.07				202.768	23.07	30.00
11b	1	2437	23.03				200.909	23.03	30.00
11b	1	2462	22.87				193.642	22.87	30.00
11g	1	2412	23.32				214.783	23.32	30.00
11g	1	2437	24.31				269.774	24.31	30.00
11g	1	2462	22.16				164.437	22.16	30.00
HT20	1	2412	23.13				205.589	23.13	30.00
HT20	1	2437	24.12				258.226	24.12	30.00
HT20	1	2462	22.03				159.588	22.03	30.00
HT40	1	2422	22.97				198.153	22.97	30.00
HT40	1	2437	23.57				227.510	23.57	30.00
HT40	1	2452	22.51				178.238	22.51	30.00

Modulation Mode	N _{TX}	Freq.	Conduc	onducted (average) output power (dBm)		Total Power	Total Power	Limit (dBm)	
Wiode		(1411712)	Chain 0	Chain 1	Chain 2	Chain 3	(mW)	(dBm)	(ubili)
11b	1	2412	20.51				112.460	20.51	30.00
11b	1	2437	20.44				110.662	20.44	30.00
11b	1	2462	20.18				104.232	20.18	30.00
11g	1	2412	14.34				27.164	14.34	30.00
11g	1	2437	18.59				72.277	18.59	30.00
11g	1	2462	13.26				21.184	13.26	30.00
HT20	1	2412	13.99				25.061	13.99	30.00
HT20	1	2437	18.42				69.502	18.42	30.00
HT20	1	2462	12.14				16.368	12.14	30.00
HT40	1	2422	13.93				24.717	13.93	30.00
HT40	1	2437	15.98				39.628	15.98	30.00
HT40	1	2452	13.19				20.845	13.19	30.00

Note: Conducted average output power is for reference only.

Report No.: FR471601AC Page: 18 of 62



3.4 Power Spectral Density


3.4.1 Limit of Power Spectral Density

Power spectral density shall not be greater than 8 dBm in any 3 kHz band.

3.4.2 Test Procedures

- Maximum peak conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 3kHz, VBW = 10kHz.
 - Detector = Peak, Sweep time = auto couple.
 - 3. Trace mode = max hold, allow trace to fully stabilize.
 - 4. Use the peak marker function to determine the maximum amplitude level.
- Maximum (average) conducted output power was used to demonstrate compliance to the fundamental output power limit.
 - Set the RBW = 100kHz, VBW = 300 kHz.
 - 2. Detector = RMS, Sweep time = auto couple.
 - 3. Set the sweep time to: ≥ 10 x (number of measurement points in sweep) x (maximum data rate per stream).
 - 4. Perform the measurement over a single sweep.
 - 5. Use the peak marker function to determine the maximum amplitude level.

3.4.3 Test Setup




Report No.: FR471601AC Page: 19 of 62



3.4.4 Test Result of Power Spectral Density

Modulation Mode	N _{TX}	Freq. (MHz)	Total Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)
11b	1	2412	-1.99	8.00
11b	1	2437	-1.83	8.00
11b	1	2462	-1.40	8.00
11g	1	2412	-9.80	8.00
11g	1	2437	-7.11	8.00
11g	1	2462	-11.81	8.00
HT20	1	2412	-11.20	8.00
HT20	1	2437	-6.65	8.00
HT20	1	2462	-13.28	8.00
HT40	1	2422	-13.82	8.00
HT40	1	2437	-12.04	8.00
HT40	1	2452	-13.67	8.00

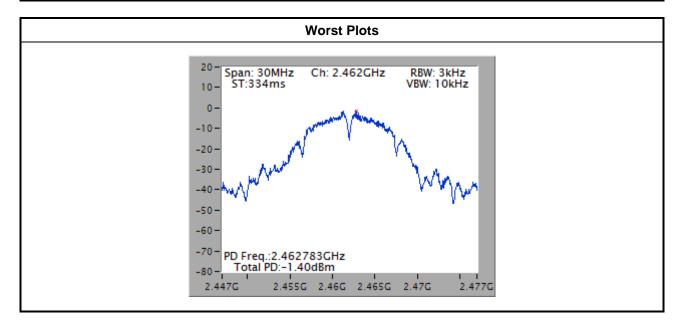

Report No.: FR471601AC Page: 20 of 62



3.5 Unwanted Emissions into Restricted Frequency Bands

3.5.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit										
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)							
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300							
0.490~1.705	24000/F(kHz)	33.8 - 23	30							
1.705~30.0	30	29	30							
30~88	100	40	3							
88~216	150	43.5	3							
216~960	200	46	3							
Above 960	500	54	3							

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.5.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR471601AC Page: 21 of 62




3.5.3 Test Setup

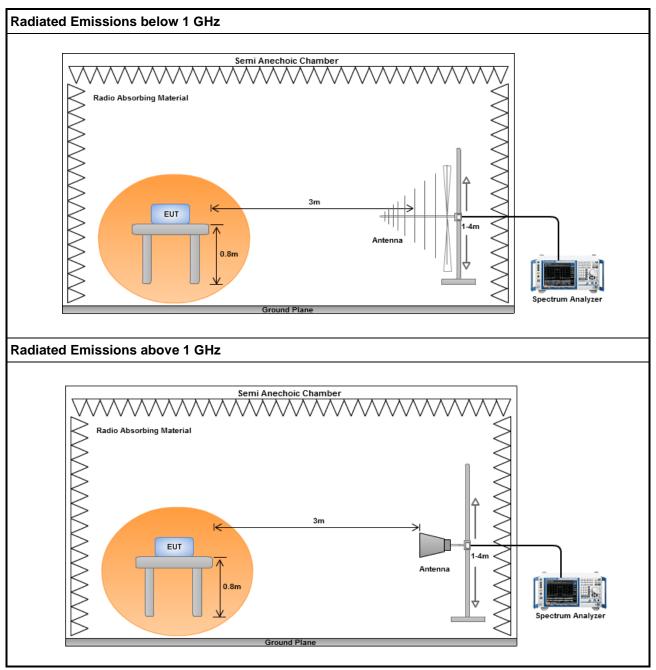

Report No.: FR471601AC Page: 22 of 62



3.5.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

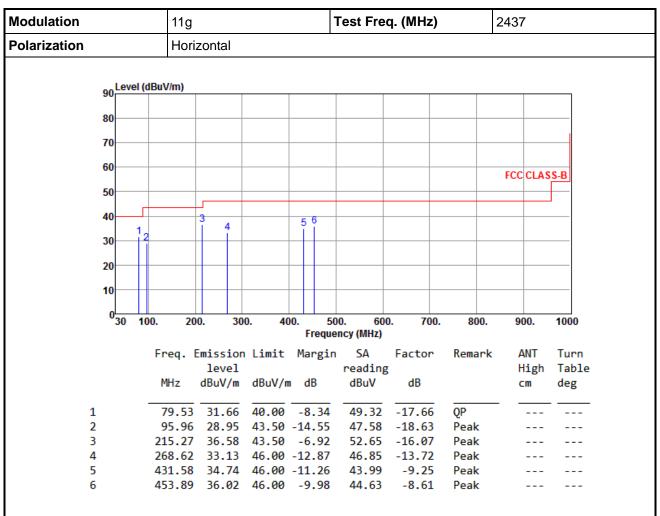

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR471601AC Page: 23 of 62



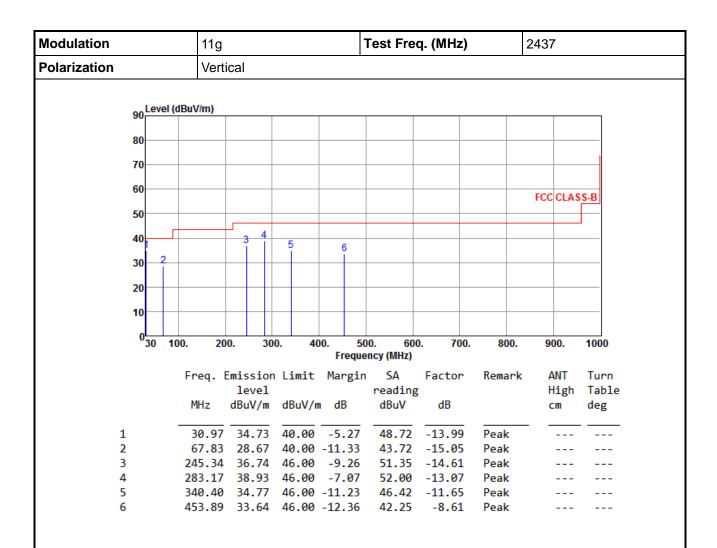

*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR471601AC Page: 24 of 62



3.5.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11b

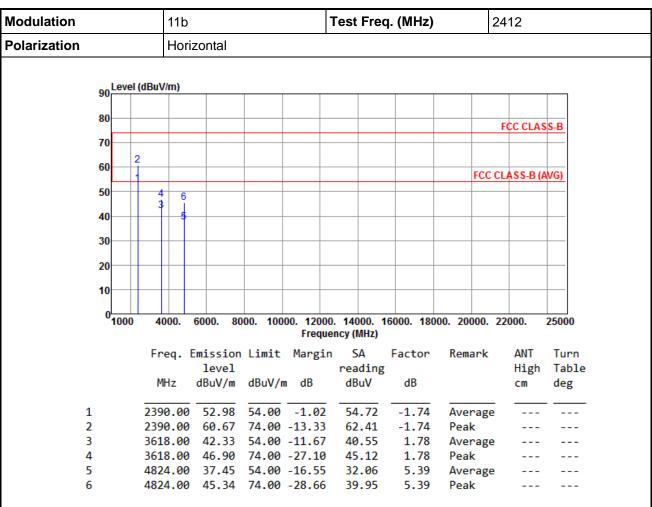

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR471601AC Page: 25 of 62



Modulation	11b	Test Freq. (MHz)	2412
Polarization	Vertical		
oo Level (dBu	V/m)		

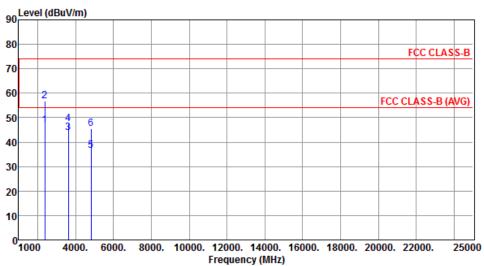


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	2390.00	46.80	54.00	-7 20	48.54	-1.74	Average		
2		56.81			58.55	-1.74	Peak		
_									
3	3618.00	43.99	54.00	-10.01	42.21	1.78	Average		
4	3618.00	47.43	74.00	-26.57	45.65	1.78	Peak		
5	4824.00	36.61	54.00	-17.39	31.22	5.39	Average		
6	4824.00	45.44	74.00	-28.56	40.05	5.39	Peak		

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Page: 26 of 62 Report No.: FR471601AC



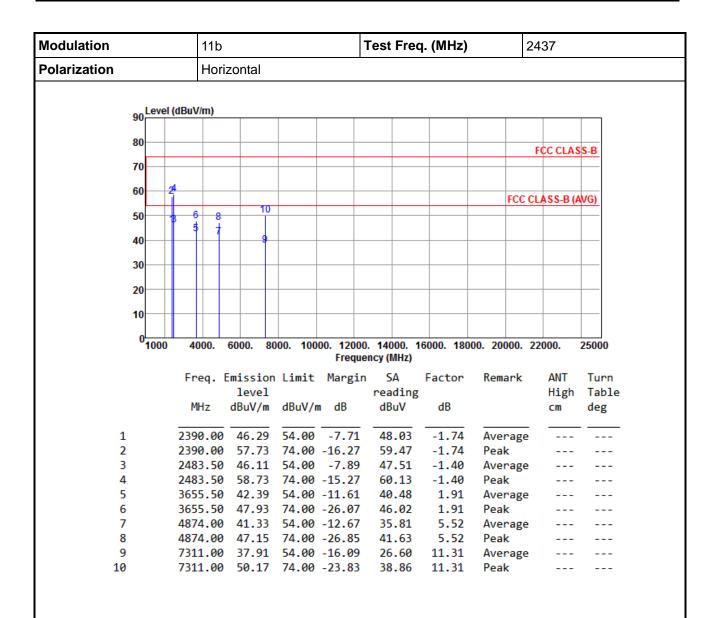


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 27 of 62



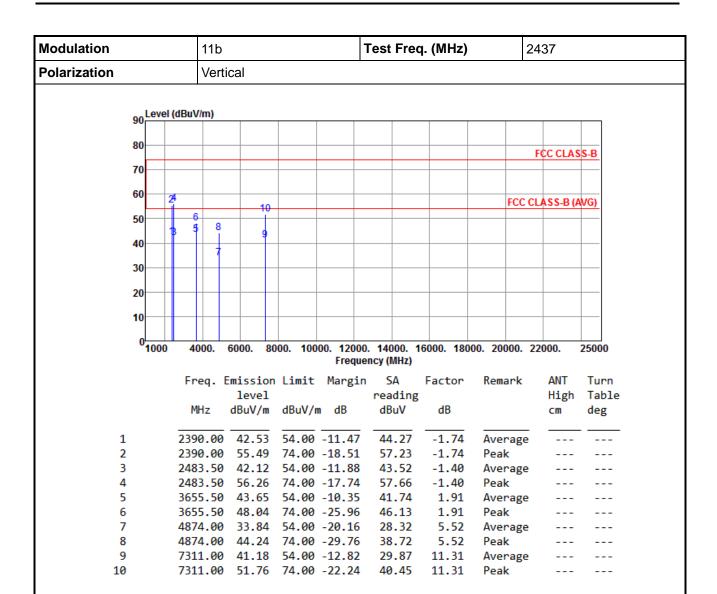


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 28 of 62



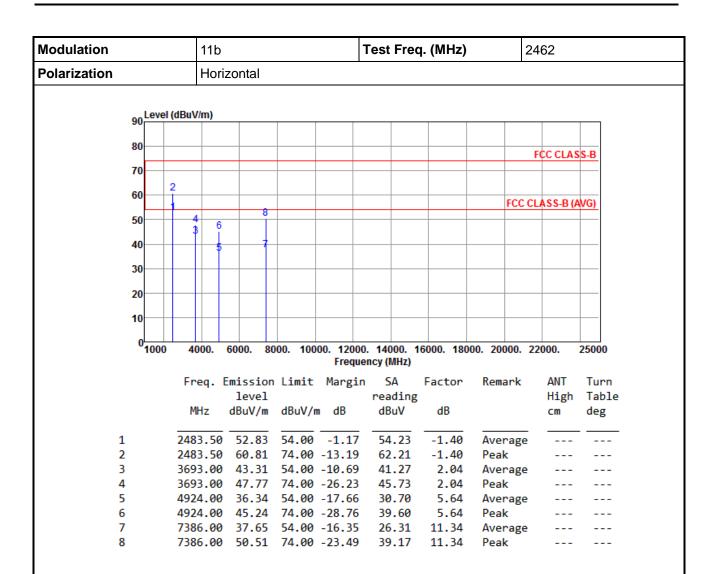


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 29 of 62



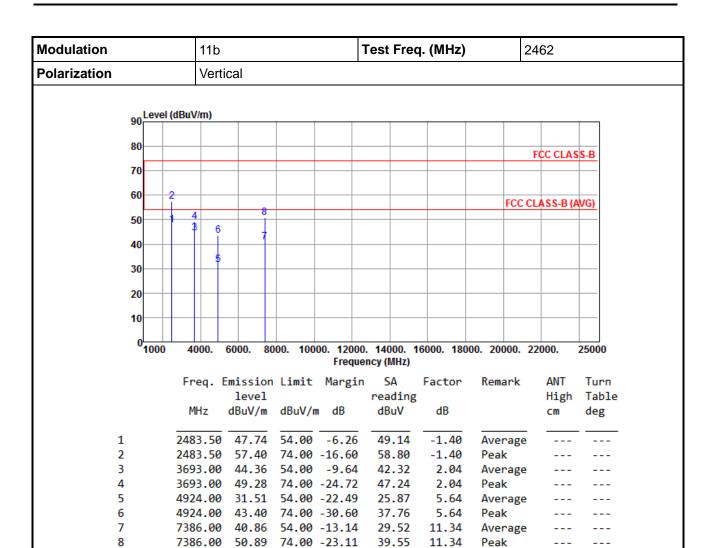


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 30 of 62



3.5.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11g

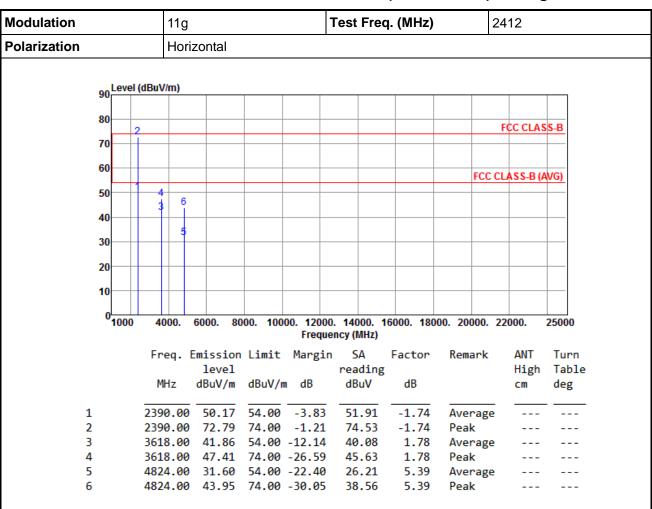

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR471601AC Page: 31 of 62



Modulation	11g	11g			Test Freq. (MHz)			2412		
Polarization		Vertical								
		•								
an	Level	(dBuV/m)								
30										
80									FCC CLAS	e D
70	2								TCC CLAS	3-6
	1									
60								FCC (CLASS-B (A	VG)
50		4						1001) U 001	, , , , , , , , , , , , , , , , , , ,
		3 6								
40										
30		5								
20										
10										
(1000	4000.	6000. 80	00. 100	00. 12000	. 14000. 1	6000. 180	00. 20000.	22000.	25000
					Freque	ncy (MHz)				
		Freq. E	mission	Limit	Margin	SA	Factor	Remark	ANT	Turn
			level			reading			High	Table
		MHz	dBuV/m	dBuV/ı	m dB	dBuV	dB		cm	deg
4		2200 00	47.22	<u> </u>		49.06		A		
1 2		2390.00 2390.00				48.96 70.12	-1.74 -1.74	Average Peak		
3		3618.00				40.54	1.78	Average		
4		3618.00				45.05	1.78	Peak		
5		4824 99					5 39	Average		

5.39

5.39

Average

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

4824.00 31.63 54.00 -22.37 26.24 4824.00 44.06 74.00 -29.94 38.67


*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 32 of 62

Report Version: Rev. 01

5



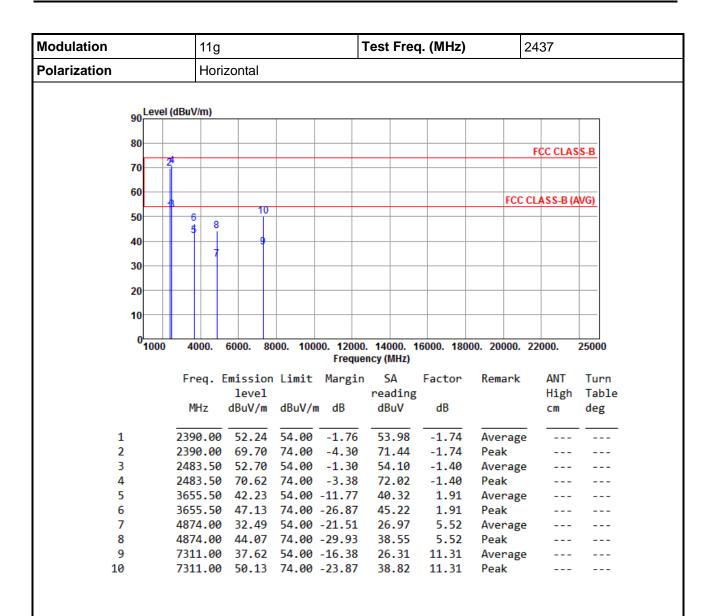


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 33 of 62



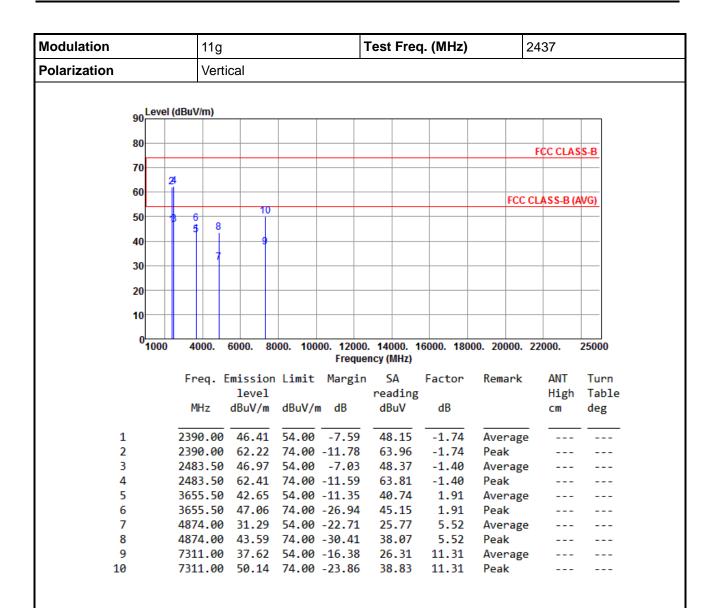


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 34 of 62



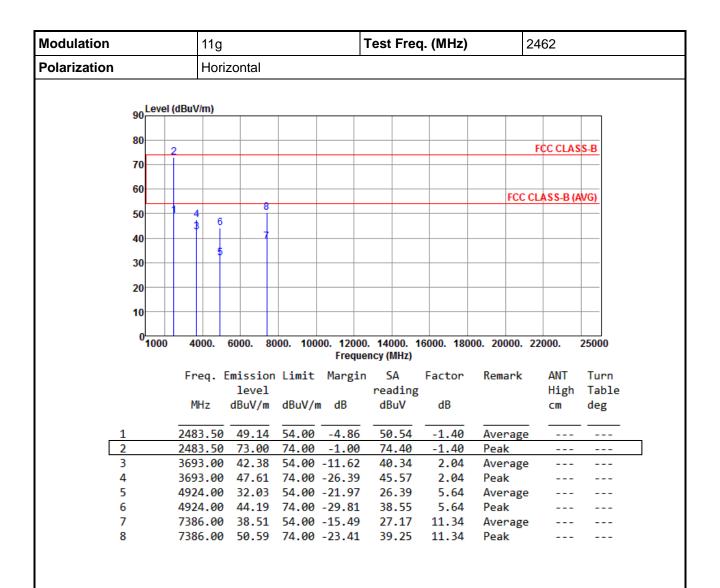

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 35 of 62



Modulation			11g			-	Test Fred	2462			
Polarization		Vertical									
			•								
	90 Lev	el (dBu\	//m)								
	80									FCC CLAS	S-B
	70	2									
	60										
	60								FCC	CLASS-B (A	VG)
	50		1 6	- °	<u> </u>						
	40		ľ	+							
	40		5								
	30										
	20										
	20										
	10										
	0			2000						2222	05000
	⁰ 100	10 4	000.	6000.	3000. 100). 14000. 1 ency (MHz)	16000. 180	00. 20000.	22000.	25000
		Fr	ea. E	Emissio	n Limit	Margin	SA	Factor	Remark	ANT	Turn
				level			reading			High	Table
		M	Hz	dBuV/m	dBuV/	m dB	dBuV	dB		cm	deg
	1	2/19	3 50	11 00	<u> </u>	-9.94	45.46	-1.40	Avanaga		
	2			67.48		-6.52	68.88	-1.40	Average Peak		
	3					-10.27	41.69	2.04	Average		
	4					-25.84	46.12	2.04	Peak		
	5	492	4.00	32.31	54.00	-21.69	26.67	5.64	Average		
	_	400		44 50	74 00	20 42	30.04		ъ .		

38.94

27.23

5.64

11.34

11.34

Peak

Peak

Average

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

4924.00 44.58 74.00 -29.42

7386.00 38.57 54.00 -15.43

7386.00 51.16 74.00 -22.84 39.82

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 36 of 62


Report Version: Rev. 01

6

7



3.5.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT20

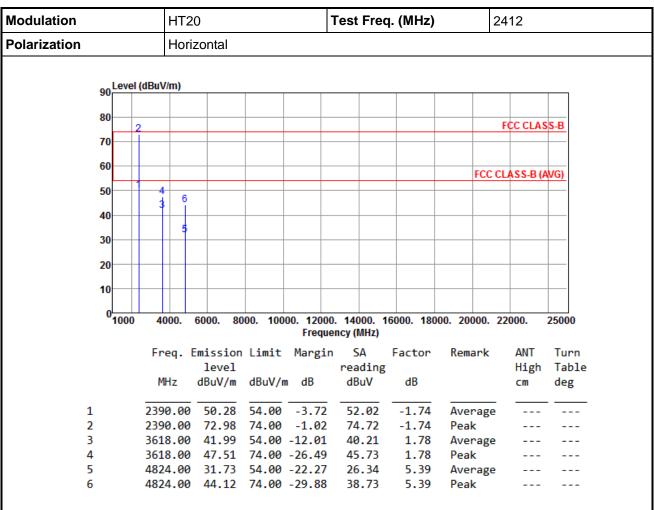

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Report No.: FR471601AC Page: 37 of 62



Modulation		HT20			Test	Freq.	24	2412				
Polarization	arization Vertical											
00												
90	Level (dBu)											

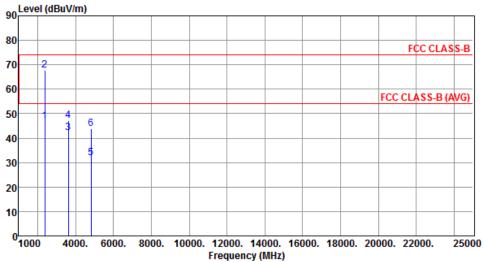


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Ū	SA reading dBuV	Factor dB	Remark	ANT High	Turn Table
	MITZ	ubuv/III	ubuv/III	ub	ubuv	ub		cm	deg
	2200 00	46.70			40.50				
1	2390.00	46.78	54.00	-/.22	48.52	-1.74	Average		
2	2390.00	67.79	74.00	-6.21	69.53	-1.74	Peak		
3	3618.00	42.27	54.00	-11.73	40.49	1.78	Average		
4	3618.00	47.00	74.00	-27.00	45.22	1.78	Peak		
5	4824.00	31.77	54.00	-22.23	26.38	5.39	Average		
6	4824.00	43.88	74.00	-30.12	38.49	5.39	Peak		

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 38 of 62



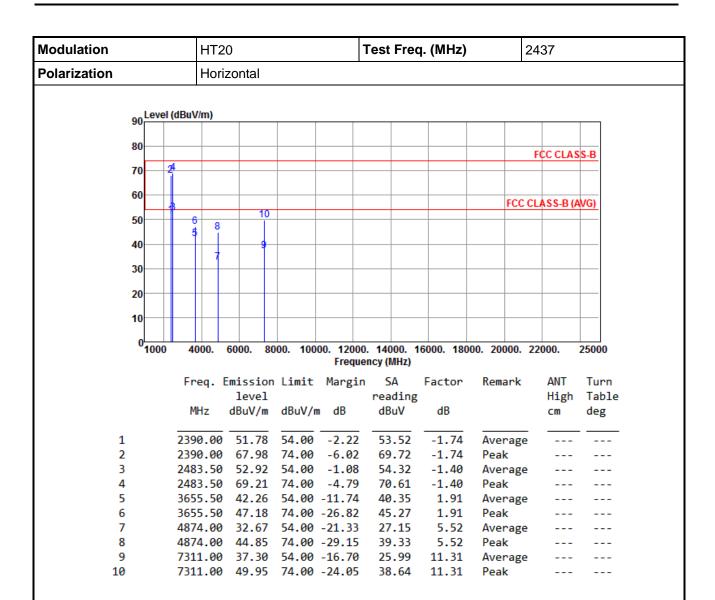

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 39 of 62



Modulation				HT:	20				Test	Free	q. (Mi	Hz)		2	437	
Polarization				Ver	tical									•		
	90	Level	(dBu\	//m)												
	80															
	00														FCC CLAS	SS-B
	70			+								\rightarrow				
	60	2	-													
	-					10						_		FCC C	LASS-B (A	AVG)
	50		- 6	8		Ť										
	40			<u>'</u>		9										
				1												
	30															
	20															
	10															
	0	4000		200	6000		00 400	00. 120	00 446	100	10000	4000	20 20	000 1	22000	25000
		1000	40	000.	6000.	80	00. 100		uency (I		10000.	1800	JU. 20	UUU. 2	22000.	25000
			Fr	eq.	Emiss	ion	Limit	Margi	in S	Α	Fact	or	Rem	ark	ANT	Turn
				•	lev					ding					High	Table
			М	Hz	dBuV	/m	dBuV/ı	n dB	dB	uV	dB				cm	deg
	1		239	0.00	47.	72	54.00	-6.28	49	.46	-1.	74	Ave	rage		
	2		239	0.00	61.	99	74.00	-12.01	63	.73	-1.	74	Pea	k Ü		
	3			3.50				-5.78		.62	-1.			rage		
	4							-11.09		.31	-1.		Pea			
	5			5.50				-11.46		.63		91		rage		
	6 7			5.50				-26.52		.57		91	Peal			
	/ 8			4.00				-22.85 -30.06		.63		52 52	Peal	rage v		
•	0		407	4.00	, 43.	54	74.00	-50.00	, 50	.42	٥.	32	real			

7311.00 37.38 54.00 -16.62 26.07 11.31

7311.00 50.27 74.00 -23.73 38.96 11.31

Average

Peak

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Report No.: FR471601AC Page: 40 of 62

Report Version: Rev. 01

9

10



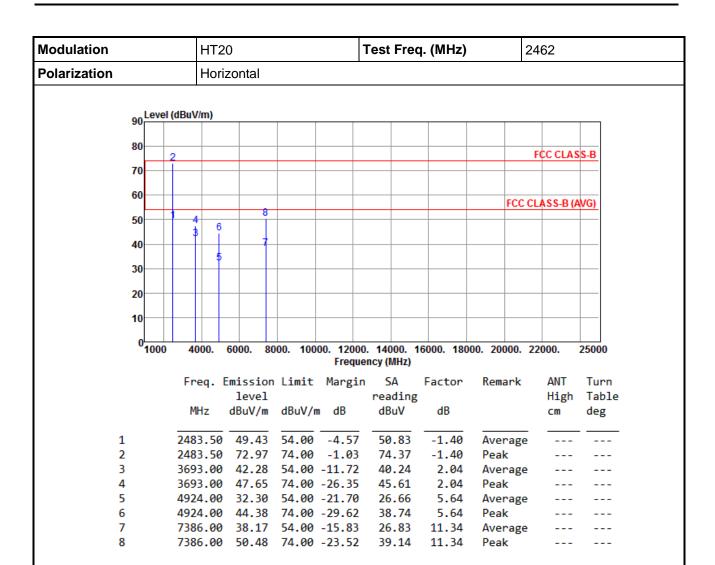

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 41 of 62



4

5

6

7

8

Modulation			НТ	20		•	Test Fred	ą. (MHz)	24	462	
Polarization			Vei	tical					•		
	90 Le	evel (di	BuV/m)								
	80										
	70	2								FCC CLAS	S-B
	60										
	00								FCC C	LASS-B (A	WG)
	50	+	3	5							
	40	-		7							
	30										
	20										
	10										
	010	000	4000.	6000.	8000. 100		. 14000. 1 ncy (MHz)	6000. 180	00. 20000. 2	2000.	25000
			Freq.	Emissio	n Limit	Margin		Factor	Remark	ANT	Turn
				level		_	reading			High	Table
			MHz	dBuV/n	dBuV/	m dB	dBuV	dB		cm	deg
1	1	2	483.5	45.87	54.00	-8.13	47.27	-1.40	Average		
	2			67.93		-6.07	69.33	-1.40	Peak		
-	3	3	693.0	8 43.25	54.00	-10.75	41.21	2.04	Average		

46.21

26.36

38.77

27.22

2.04

5.64

5.64

11.34

11.34

Peak

Peak

Peak

Average

Average

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

3693.00 48.25 74.00 -25.75

4924.00 32.00 54.00 -22.00

4924.00 44.41 74.00 -29.59

7386.00 38.56 54.00 -15.44


7386.00 50.66 74.00 -23.34 39.32

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 42 of 62



3.5.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for HT40

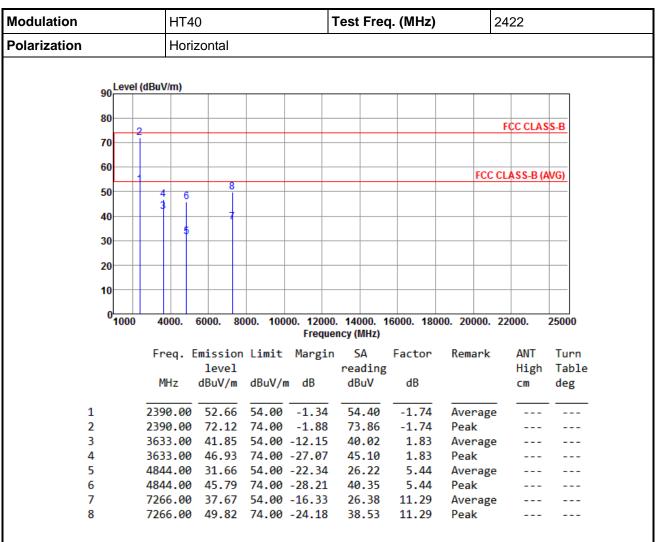

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)


*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 43 of 62



Modulation	HT40	Test Freq. (MHz)	2422
Polarization	Vertical		

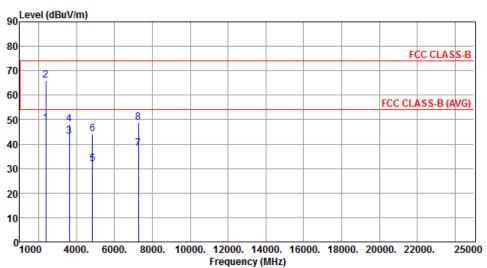


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2390.00	48.50	54.00	-5.50	50.24	-1.74	Average		
2	2390.00	65.99	74.00	-8.01	67.73	-1.74	Peak		
3	3633.00	43.03	54.00	-10.97	41.20	1.83	Average		
4	3633.00	48.14	74.00	-25.86	46.31	1.83	Peak		
5	4844.00	31.79	54.00	-22.21	26.35	5.44	Average		
6	4844.00	44.17	74.00	-29.83	38.73	5.44	Peak		
7	7266.00	38.25	54.00	-15.75	26.96	11.29	Average		
8	7266.00	48.67	74.00	-25.33	37.38	11.29	Peak		

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 44 of 62



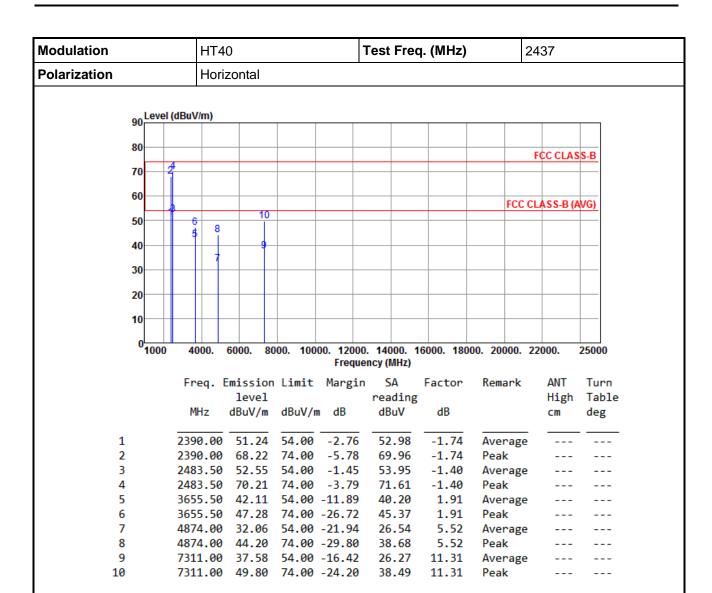

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 45 of 62



Modulation				HΤΔ	10				Test Fre	q. (MHz)		2437	
Polarization				Ver	tical								
			•										
	90 l	Level	(dBuV	/m)									
	80											FCC CLAS	S-B
	70												
		2	4										
	60										FCC	CLASS-B (A	VG)
	50		6	_		10							
	40		5	8									
	40			7									
	30			+-1									
	20												
	20												
	10												
	0												
	0,	1000	40	00.	6000.	800	00. 100). 14000. ency (MHz)		000. 20000.	22000.	25000
			Fre	ea.	Fmissi	on	limit	Margir		Factor	Remark	ANT	Turn
				-4.	leve			6	reading			High	Table
			M	Ηz	dBuV/	m	dBuV/ı	n dB	dBuV	dB		cm	deg
	1		220/	2 00	47.2	_	<u></u>		40.03	-1.74	A		
	1 2		2390		47.2 64.3		54.00 74.00		49.03 66.05		Average Peak		
	3		248					-6.30	49.10			a	
	4							-11.38	64.02		Peak		
				5.50		_		-11.23	40.86		Average		

45.67

26.38

26.78

38.42

1.91

5.52

5.52

11.31

11.31

Peak

Peak

Peak

Average

Average

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB) *Factor includes antenna factor, cable loss and amplifier gain

3655.50 47.58 74.00 -26.42

4874.00 31.90 54.00 -22.10

4874.00 43.94 74.00 -30.06

7311.00 38.09 54.00 -15.91

7311.00 50.66 74.00 -23.34 39.35

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 46 of 62

Report Version: Rev. 01

6

7

8

9

10



Modulation		HT4	0			Γest Fred	q. (MHz)	2	2452	
Polarization		Hori	zontal		<u>'</u>			1		
	90 Level	(dBuV/m)								
	80	_							FCC CLAS	S-B
	70	2								
	60									
	60							FCC (CLASS-B (A	VG)
	50	4 6	- i							
	40] 3 i								
	40	5								
	30									
	20									
	20									
	10									
	0									
	1000	4000.	6000. 80	000. 100		. 14000. 1 ncy (MHz)	16000. 1800	00. 20000.	22000.	25000
		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
			level		_	reading			High	Table
		MHz	dBuV/m	dBuV/	m dB	dBuV	dB		cm	deg
1		2483.50	52.93	54.00	-1.07	54.33	-1.40	Average		
2		2483.50			-2.96	72.44	-1.40	Peak		
3		3678.00	42.19		-11.81	40.20	1.99	Average		
4			47.33			45.34	1.99	Peak		
5		4904.00				26.52	5.59	Average		
6		4904.00	44.04	74.00	-29.96	38.45	5.59	Peak		

27.30

11.34

11.34

Peak

Average

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)

7356.00 38.64 54.00 -15.36

7356.00 50.67 74.00 -23.33 39.33

*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 47 of 62


Report Version: Rev. 01

7

8



Modulation	HT40	Test Freq. (MHz)	2452
Polarization	Vertical		

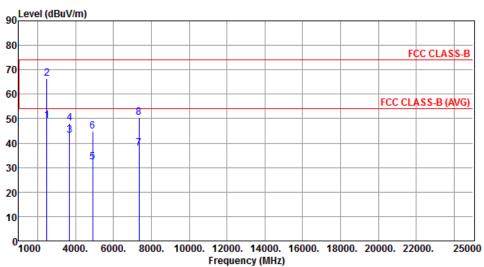

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	2483.50	49.11	54.00	-4.89	50.51	-1.40	Average		
2	2483.50	66.32	74.00	-7.68	67.72	-1.40	Peak		
3	3678.00	43.24	54.00	-10.76	41.25	1.99	Average		
4	3678.00	48.27	74.00	-25.73	46.28	1.99	Peak		
5	4904.00	32.09	54.00	-21.91	26.50	5.59	Average		
6	4904.00	44.76	74.00	-29.24	39.17	5.59	Peak		
7	7356.00	38.01	54.00	-15.99	26.67	11.34	Average		
8	7356.00	50.43	74.00	-23.57	39.09	11.34	Peak		

*Factor includes antenna factor , cable loss and amplifier gain Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR471601AC Page: 48 of 62



3.6 Emissions in Non-Restricted Frequency Bands

3.6.1 Emissions in Non-Restricted Frequency Bands Limit

Peak power in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 2 dB relative to the maximum in-band peak PSD level in 100 kHz

3.6.2 Measuring Instruments

Refer a test equipment and calibration data table in this test report.

3.6.3 Test Procedures


Reference level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Use the peak marker function to determine the maximum PSD level

Emission level measurement

- 1. Set RBW=100kHz, VBW = 300kHz, Detector = Peak, Sweep time = Auto
- 2. Trace = max hold, Allow Trace to fully stabilize
- 3. Scan Frequency range is up to 25GHz
- 4. Use the peak marker function to determine the maximum amplitude level

3.6.4 Test Setup

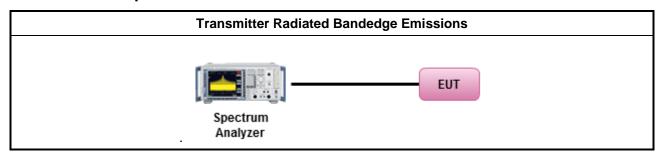


Report No.: FR471601AC Page: 49 of 62




3.6.5 Unwanted Emissions into Non-Restricted Frequency Bands

802.11b

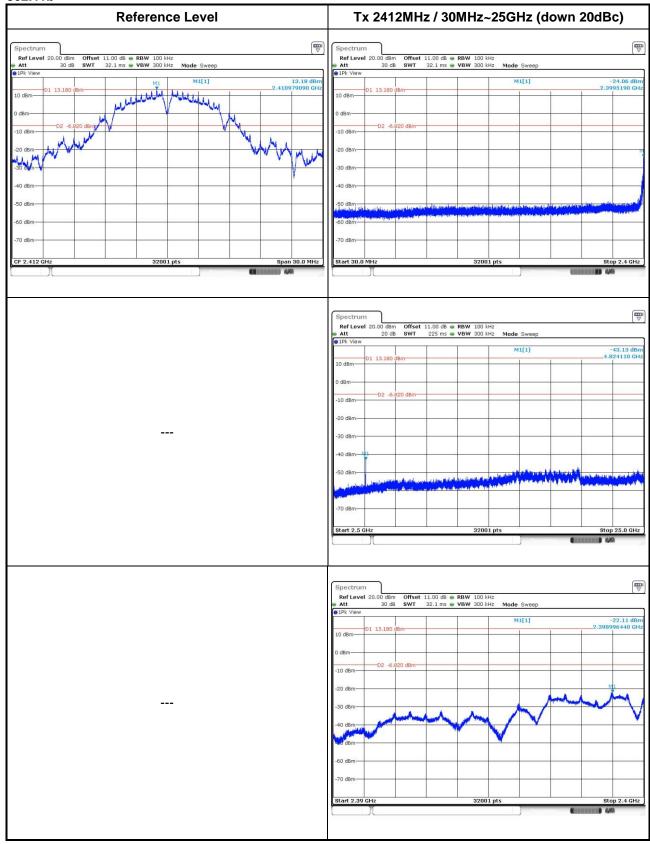


Report No.: FR471601AC Report Version: Rev. 01



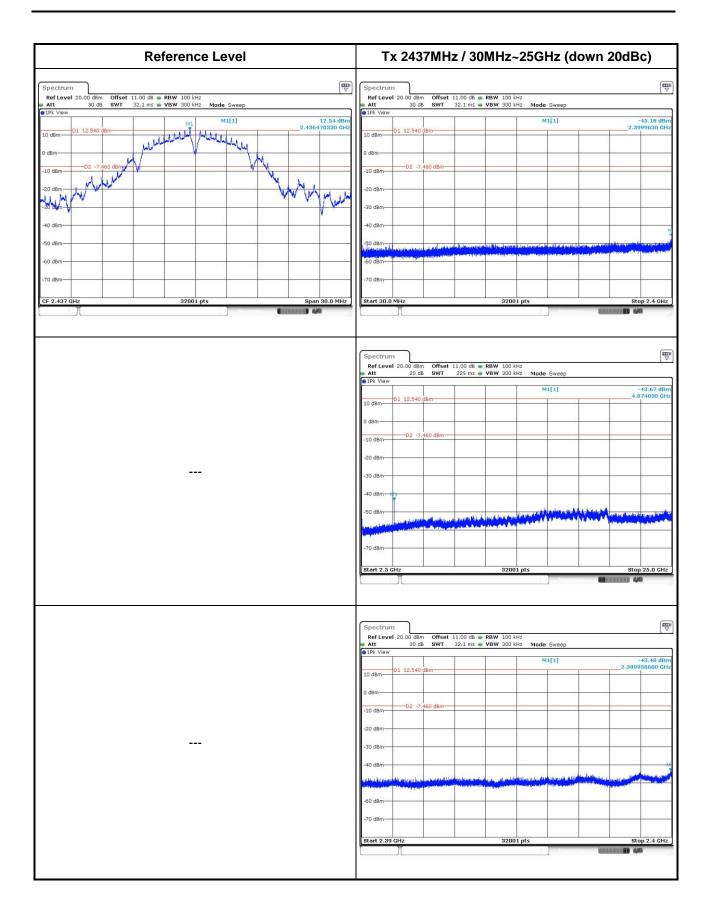


Report No.: FR471601AC Page: 51 of 62



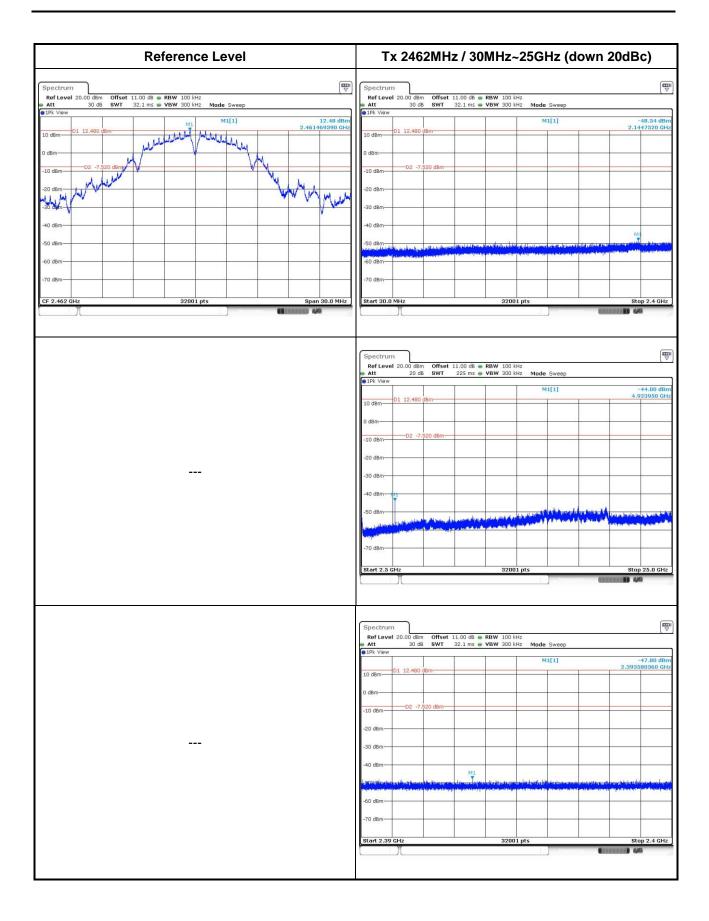


Report No.: FR471601AC Page: 52 of 62



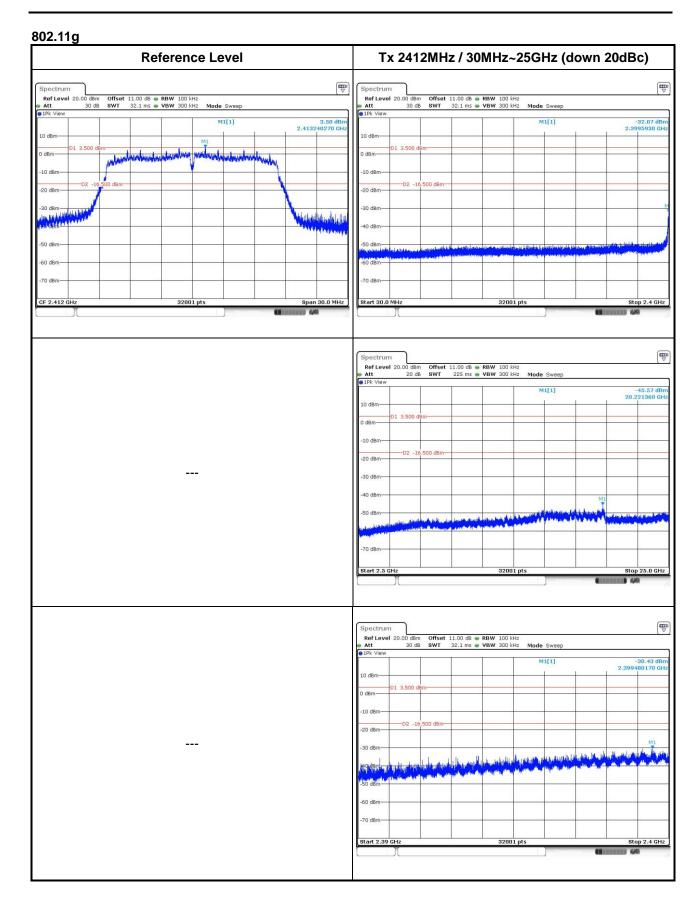


Report No.: FR471601AC Page: 53 of 62



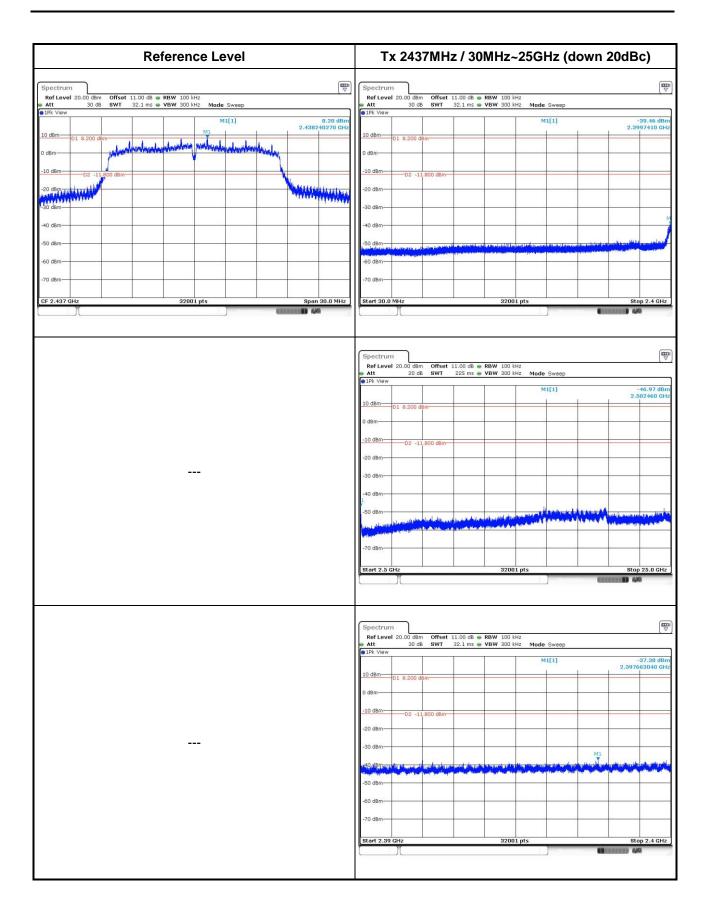

Report No.: FR471601AC Page: 54 of 62




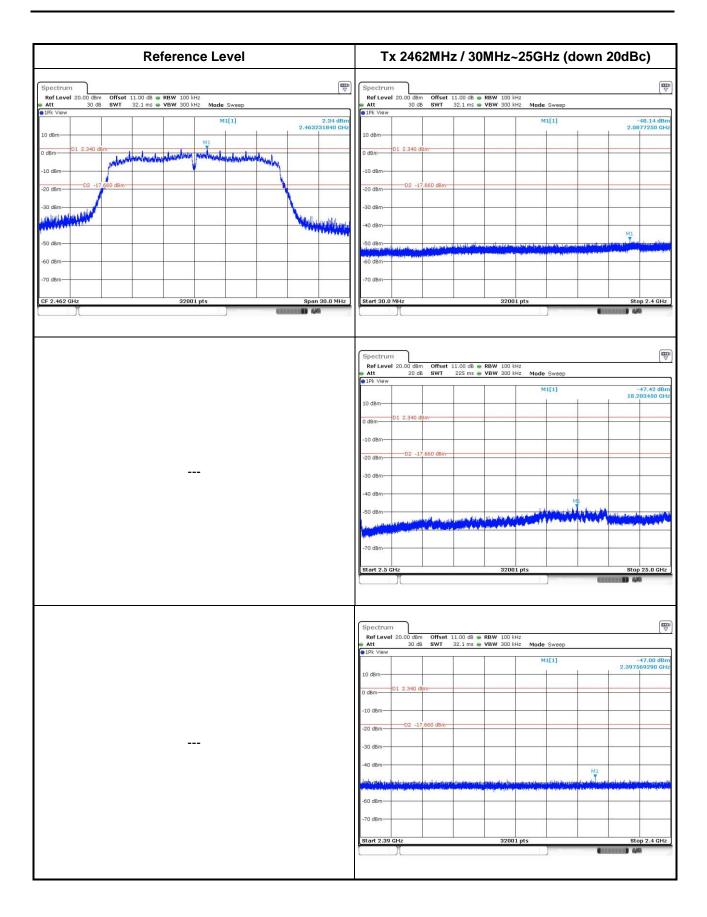

Report No.: FR471601AC Page: 55 of 62




802.11n HT20

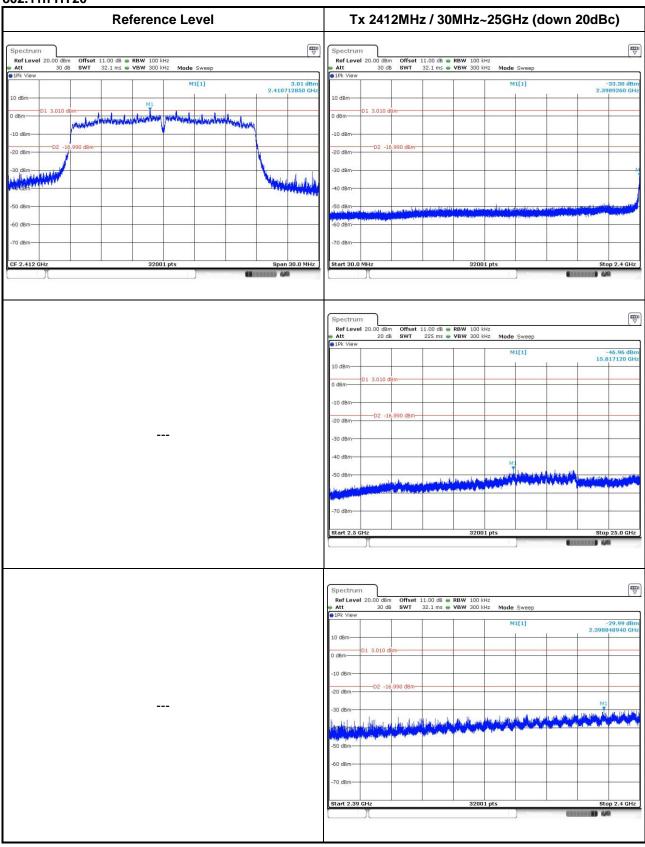


Report No.: FR471601AC Page: 56 of 62



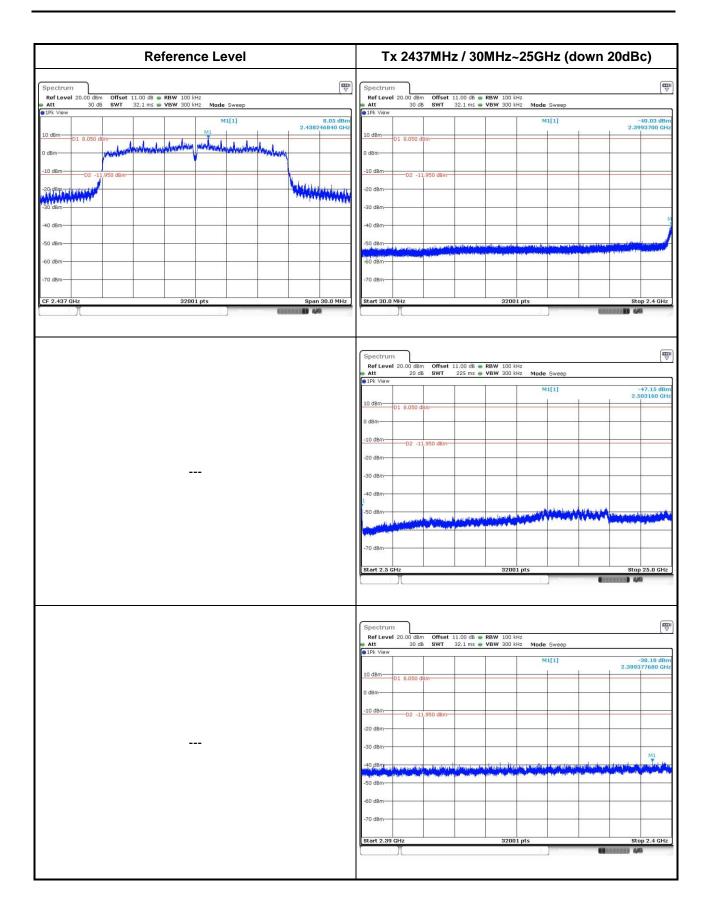

Report No.: FR471601AC Page: 57 of 62




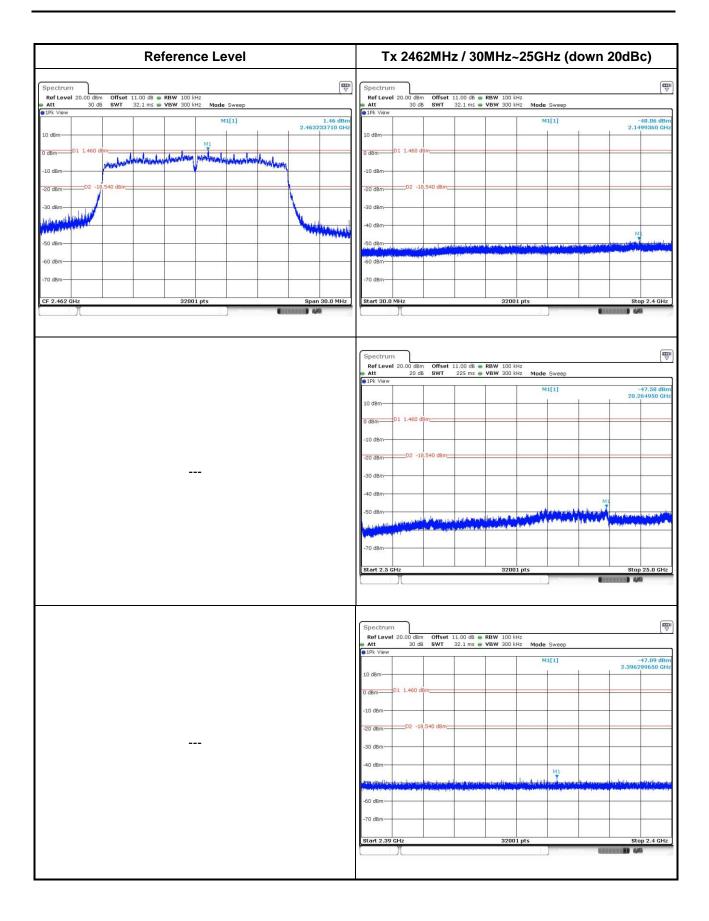

Report No.: FR471601AC Page: 58 of 62




802.11n HT40

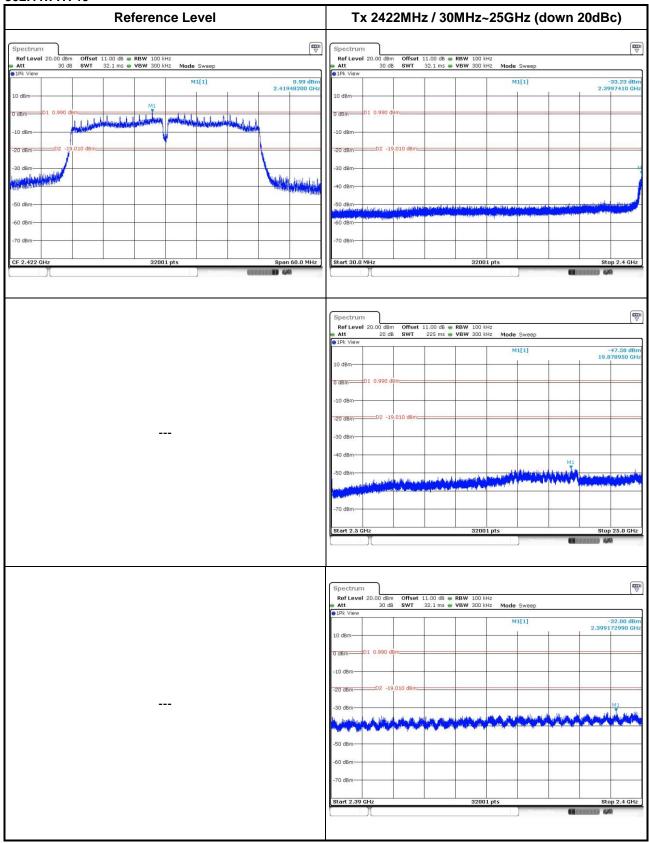


Report No.: FR471601AC Page: 59 of 62



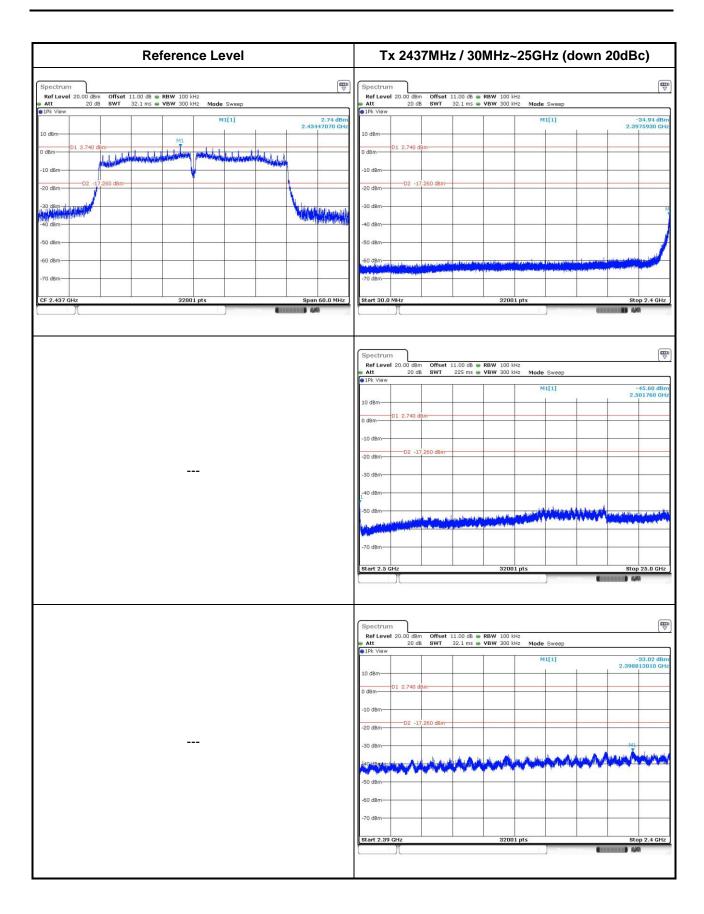

Report No.: FR471601AC Page: 60 of 62



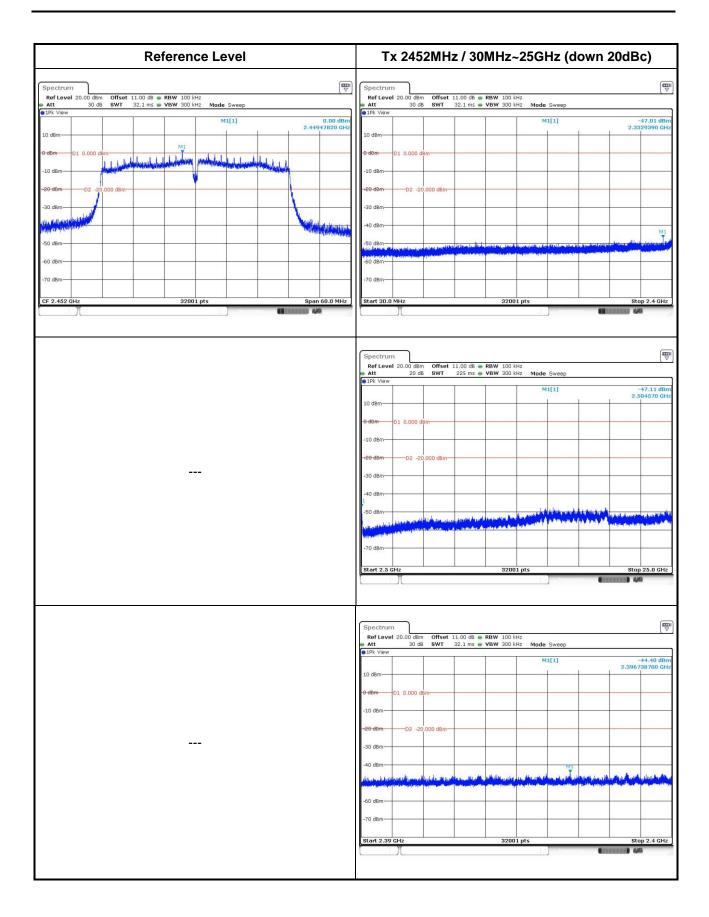

Report No.: FR471601AC Page: 61 of 62



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website http://www.icertifi.com.tw.

Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

___END___

Report No.: FR471601AC Page: 62 of 62