

TEST REPORT

CERTIFICATE OF CONFORMITY

Standard: 47 CFR FCC Part 22

47 CFR FCC Part 24

47 CFR FCC Part 27

47 CFR FCC Part 2

Report No.: RFBCKS-WTW-P24050344-2

FCC ID: NKR-UMCSTD35GN

Product: Automotive 5G-NR NAD

Brand: WNC

Model No.: UMC-STD35GN

Received Date: 2024/5/14

Test Date: 2024/6/3 ~ 2024/7/17

Issued Date: 2024/8/7

Applicant: Wistron NeWeb Corporation

Address: 20 Park Ave. II, Hsinchu Science Park, Hsinchu 308, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Lin Kou Laboratories

Lab Address: No. 47-2, 14th Ling, Chia Pau Vil., Lin Kou Dist., New Taipei City, Taiwan

Test Location: No. 19, Hwa Ya 2nd Rd., Wen Hwa Vil., Kewi Shan Dist., Taoyuan City 33383, Taiwan

FCC Registration / 788550 / TW0003

Designation Number:

Approved by:



Jeremy Lin / Project Engineer

, **Date:**

2024/8/7

This test report consists of 156 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The test results in the report only apply to the tested sample. The test results in this report are traceable to the national or international standards.



Prepared by : Gina Liu / Specialist

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	4
1 Certificate.....	5
2 Summary of Test Results	6
2.1 Measurement Uncertainty	7
2.2 Supplementary Information	7
3 General Information	8
3.1 General Description of EUT	8
3.2 Antenna Description of EUT	9
3.3 Test Mode Applicability and Tested Channel Detail.....	10
3.3.1 GSM 850.....	10
3.3.2 GSM 1900.....	11
3.3.3 WCDMA Band 2.....	12
3.3.4 WCDMA Band 4.....	13
3.3.5 WCDMA Band 5.....	14
3.4 Test Program Used and Operation Descriptions.....	15
3.5 Connection Diagram of EUT and Peripheral Devices	15
3.6 Configuration of Peripheral Devices and Cable Connections	15
4 Test Instruments	16
4.1 Effective Radiated Power and Equivalent Isotropically Radiated Power	16
4.2 Modulation Characteristics	16
4.3 Peak to Average Ratio.....	16
4.4 Bandwidth.....	16
4.5 Conducted Spurious Emissions	16
4.6 Radiated Spurious Emissions below 1GHz.....	17
4.7 Radiated Spurious Emissions above 1GHz	18
4.8 Frequency Stability	19
5 Limits of Test Items.....	20
5.1 Effective Radiated Power and Equivalent Isotropically Radiated Power	20
5.2 Modulation Characteristics	20
5.3 Peak to Average Ratio.....	20
5.4 Bandwidth.....	20
5.5 Conducted Spurious Emissions	20
5.6 Radiated Spurious Emissions below 1GHz.....	21
5.7 Radiated Spurious Emissions above 1GHz	21
5.8 Frequency Stability	21
6 Test Arrangements.....	22
6.1 Effective Radiated Power and Equivalent Isotropically Radiated Power	22
6.1.1 Test Setup	22
6.1.2 Test Procedure.....	22
6.2 Modulation Characteristics	23
6.2.1 Test Setup	23
6.2.2 Test Procedure.....	23
6.3 Peak to Average Ratio.....	23
6.3.1 Test Setup	23
6.3.2 Test Procedure.....	23
6.4 Bandwidth.....	24
6.4.1 Test Setup	24
6.4.2 Test Procedure.....	24
6.5 Conducted Spurious Emissions	26
6.5.1 Test Setup	26
6.5.2 Test Procedure.....	26
6.6 Radiated Spurious Emissions below 1GHz.....	27
6.6.1 Test Setup	27
6.6.2 Test Procedure.....	27

6.7	Radiated Spurious Emissions above 1GHz	28
6.7.1	Test Setup	28
6.7.2	Test Procedure	28
6.8	Frequency Stability	29
6.8.1	Test Setup	29
6.8.2	Test Procedure	29
7	Test Results of Test Item	30
7.1	Effective Radiated Power and Equivalent Isotropically Radiated Power	30
7.1.1	GSM850	30
7.1.2	GSM1900	30
7.1.3	WCDMA Band 2	31
7.1.4	WCDMA Band 4	31
7.1.5	WCDMA Band 5	32
7.2	Modulation Characteristics	33
7.2.1	GSM850	33
7.2.2	GSM1900	34
7.2.3	WCDMA Band 2	35
7.2.4	WCDMA Band 4	36
7.2.5	WCDMA Band 5	37
7.3	Peak to Average Ratio	38
7.3.1	GSM850	38
7.3.2	GSM1900	39
7.3.3	WCDMA Band 2	40
7.3.4	WCDMA Band 4	41
7.3.5	WCDMA Band 5	42
7.4	Bandwidth	43
7.4.1	GSM850	43
7.4.2	GSM1900	44
7.4.3	WCDMA Band 2	45
7.4.4	WCDMA Band 4	46
7.4.5	WCDMA Band 5	47
7.5	Conducted Spurious Emissions	48
7.5.1	GSM850	48
7.5.2	GSM1900	54
7.5.3	WCDMA Band 2	60
7.5.4	WCDMA Band 4	66
7.5.5	WCDMA Band 5	72
7.6	Radiated Spurious Emissions below 1GHz	78
7.6.1	GSM 850	78
7.6.2	GSM 1900	86
7.6.3	WCDMA Band II	94
7.6.4	WCDMA Band IV	98
7.6.5	WCDMA Band V	102
7.7	Radiated Spurious Emissions above 1GHz	106
7.7.1	GSM 850	106
7.7.2	GSM 1900	118
7.7.3	WCDMA Band II	130
7.7.4	WCDMA Band IV	136
7.7.5	WCDMA Band V	142
7.8	Frequency Stability	148
7.8.1	GSM850	148
7.8.2	EDGE850	149
7.8.3	GSM1900	150
7.8.4	EDGE1900	151
7.8.5	WCDMA Band 2	152
7.8.6	WCDMA Band 4	153
7.8.7	WCDMA Band 5	154
8	Pictures of Test Arrangements	155
9	Information of the Testing Laboratories	156



Release Control Record

Issue No.	Description	Date Issued
RFBCKS-WTW-P24050344-2	Original Release	2024/8/7



1 Certificate

Product: Automotive 5G-NR NAD

Brand: WNC

Test Model: UMC-STD35GN

Sample Status: Engineering Sample

Applicant: Wistron NeWeb Corporation

Test Date: 2024/6/3 ~ 2024/7/17

Standard: 47 CFR FCC Part 22

47 CFR FCC Part 24

47 CFR FCC Part 27

47 CFR FCC Part 2

Measurement

procedure: ANSI/TIA/EIA-603-E 2016

ANSI C63.26-2015

KDB 971168 D01 Power Meas License Digital Systems v03r01

KDB 971168 D02 Misc Rev Approv License Devices v02r02

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's RF characteristics under the conditions specified in this report.

2 Summary of Test Results

47 CFR FCC Part 22 47 CFR FCC Part 24 47 CFR FCC Part 27 47 CFR FCC Part 2			
Standard / Clause	Test Item	Result	Remark
FCC 47 CFR Part 2.1046 FCC 47 CFR Part 22.913 (a) FCC 47 CFR Part 24.232 (c) FCC 47 CFR Part 27.50(d)	Effective Radiated Power and Equivalent Isotropically Radiated Power	Pass	Meet the requirement of limit.
FCC 47 CFR Part 2.1047	Modulation Characteristics	Pass	Meet the requirement of limit.
FCC 47 CFR Part 22.913 (d) FCC 47 CFR Part 24.232 (d) FCC 47 CFR Part 27.50(d)	Peak to Average Ratio	Pass	Meet the requirement of limit.
FCC 47 CFR Part 2.1049	Bandwidth	Pass	Meet the requirement of limit.
FCC 47 CFR Part 2.1051 FCC 47 CFR Part 22.917 FCC 47 CFR Part 24.238 FCC 47 CFR Part 27.53(h)	Conducted Spurious Emissions	Pass	Meet the requirement of limit.
FCC 47 CFR Part 2.1053 FCC 47 CFR Part 22.917 FCC 47 CFR Part 24.238 FCC 47 CFR Part 27.53(h)	Radiated Spurious Emissions below 1GHz	Pass	Minimum passing margin is -23.26 dB at 41.64 MHz
FCC 47 CFR Part 2.1053 FCC 47 CFR Part 22.917 FCC 47 CFR Part 24.238 FCC 47 CFR Part 27.53(h)	Radiated Spurious Emissions above 1GHz	Pass	Minimum passing margin is -34.71 dB at 3760.00 MHz
FCC 47 CFR Part 2.1055 FCC 47 CFR Part 22.355 FCC 47 CFR Part 24.235 FCC 47 CFR Part 27.54	Frequency Stability	Pass	Meet the requirement of limit.

Note: Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Parameter	Specification	Uncertainty (±)
Maximum Output Power / Peak to Average Ratio	-	1.371 dB
26dB Bandwidth / Occupied Bandwidth	-	453.93 Hz / 72 Hz
Conducted emission / Spectrum Emission Mask	-	2.120 dB / 1.899 dB
Frequency Stability	-	0.176 ppm
Radiated Spurious Emissions below 1GHz	9 kHz ~ 30 MHz 30 MHz ~ 1 GHz	2.44 dB 2.95 dB
Radiated Spurious Emissions above 1GHz	1 GHz ~ 18 GHz 18 GHz ~ 40 GHz	2.26 dB 1.94 dB

The other instruments specified are routine verified to remain within the calibrated levels, no measurement uncertainty is required to be calculated.

2.2 Supplementary Information

There is not any deviation from the test standards for the test method, and no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Automotive 5G-NR NAD		
Brand	WNC		
Test Model	UMC-STD35GN		
Status of EUT	Engineering Sample		
Power Supply Rating	4.7 Vdc		

Note:

1. EUT Overview

Band / Bandwidth	TX Frequency Range (MHz)	Max. EIRP (W)	Max. EIRP (dBm)	Emission Designator
GSM1900	1850.2-1909.8	1.535	31.86	249KGXW
EDGE	1850.2-1909.8	0.675	28.29	248KG7W
WCDMA Band 2	1852.4-1907.6	0.398	26.00	4M16F9W
WCDMA Band 4	1712.4-1752.6	0.414	26.17	4M16F9W

Band / Bandwidth	TX Frequency Range (MHz)	Max. ERP (W)	Max. ERP (dBm)	Emission Designator
GSM850	824.2-848.8	2.138	33.30	249KGXW
EDGE	824.2-848.8	0.649	28.12	248KG7W
WCDMA Band 5	826.4-846.6	0.283	24.52	4M17F9W

2. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

3.2 Antenna Description of EUT

1. The antenna information is listed as below.

Antenna Type	Dipole
Antenna Connector	SMA
Band	Gain (dBi)
GSM 850	2.63
GSM 1900	2.03
WCDMA Band 2	2.03
WCDMA Band 4	2.03
WCDMA Band 5	2.63

*The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

*The EUT support 1TX/4RX.

3.3 Test Mode Applicability and Tested Channel Detail

Pre-Scan:	1. EUT can be used in the following ways: X-axis/ Y-axis/ Z-axis. Pre-scan these ways and find the worst case as a representative test condition. 2. The EUT's MCU, PMIC, Crystal, EMMC component will with shielding case or without shielding case. The EUT's RF component will always cover in the shielding case.
Worst Case:	1. X-axis/ Y-axis/ Z-axis Worst Condition: Z-axis 2. With shielding case or without shielding case (only MCU, PMIC, Crystal, EMMC component): without shielding case (only MCU, PMIC, Crystal, EMMC component) was chosen for final test; with shielding case was perform the radiated spurious emissions test only.

3.3.1 GSM 850

Test Item	EUT Configure Mode	Tested Channel	Channel Bandwidth	Modulation	Mode
ERP	Without shielding case	128 (824.20 MHz) 189 (836.40 MHz) 251 (848.80 MHz)	-	-	GSM, EDGE
Modulation Characteristics	Without shielding case	128 (824.20 MHz)	-	-	GSM, EDGE
Frequency Stability	Without shielding case	128 (824.20 MHz) 251 (848.80 MHz)	-	-	GSM, EDGE
Occupied Bandwidth	Without shielding case	128 (824.20 MHz) 189 (836.40 MHz) 251 (848.80 MHz)	-	-	GSM, EDGE
Peak to Average Ratio	Without shielding case	128 (824.20 MHz) 189 (836.40 MHz) 251 (848.80 MHz)	-	-	GSM, EDGE
Conducted Emission	Without shielding case	128 (824.20 MHz) 189 (836.40 MHz) 251 (848.80 MHz)	-	-	GSM, EDGE
Radiated Spurious Emissions below 1GHz	With shielding case, Without shielding case	189 (836.40 MHz)	-	-	GSM, EDGE
Radiated Spurious Emissions above 1GHz	With shielding case, Without shielding case	128 (824.20 MHz) 189 (836.40 MHz) 251 (848.80 MHz)	-	-	GSM, EDGE



BUREAU
VERITAS

3.3.2 GSM 1900

Test Item	EUT Configure Mode	Tested Channel	Channel Bandwidth	Modulation	Mode
EIRP	Without shielding case	512 (1850.20 MHz) 661 (1880.00 MHz) 810 (1909.80 MHz)	-	-	GSM, EDGE
Modulation Characteristics	Without shielding case	512 (1850.20 MHz)	-	-	GSM, EDGE
Frequency Stability	Without shielding case	512 (1850.20 MHz) 810 (1909.80 MHz)	-	-	GSM, EDGE
Occupied Bandwidth	Without shielding case	512 (1850.20 MHz) 661 (1880.00 MHz) 810 (1909.80 MHz)	-	-	GSM, EDGE
Peak to Average Ratio	Without shielding case	512 (1850.20 MHz) 661 (1880.00 MHz) 810 (1909.80 MHz)	-	-	GSM, EDGE
Conducted Emission	Without shielding case	512 (1850.20 MHz) 661 (1880.00 MHz) 810 (1909.80 MHz)	-	-	GSM, EDGE
Radiated Spurious Emissions below 1GHz	With shielding case, Without shielding case	661 (1880.00 MHz)	-	-	GSM, EDGE
Radiated Spurious Emissions above 1GHz	With shielding case, Without shielding case	512 (1850.20 MHz) 661 (1880.00 MHz) 810 (1909.80 MHz)	-	-	GSM, EDGE

3.3.3 WCDMA Band 2

Test Item	EUT Configure Mode	Tested Channel	Channel Bandwidth	Modulation	Mode
EIRP	Without shielding case	9262 (1852.40 MHz) 9400 (1880.00 MHz) 9538 (1907.60 MHz)	-	-	WCDMA HSDPA HSUPA
Modulation Characteristics	Without shielding case	9400 (1880.00 MHz)	-	-	WCDMA HSDPA HSUPA
Frequency Stability	Without shielding case	9262 (1852.40 MHz) 9538 (1907.60 MHz)	-	-	WCDMA
Occupied Bandwidth	Without shielding case	9262 (1852.40 MHz) 9400 (1880.00 MHz) 9538 (1907.60 MHz)	-	-	WCDMA HSDPA HSUPA
Peak to Average Ratio	Without shielding case	9262 (1852.40 MHz) 9400 (1880.00 MHz) 9538 (1907.60 MHz)	-	-	WCDMA HSDPA HSUPA
Conducted Emission	Without shielding case	9262 (1852.40 MHz) 9400 (1880.00 MHz) 9538 (1907.60 MHz)	-	-	WCDMA HSDPA HSUPA
Radiated Spurious Emissions below 1GHz	With shielding case, Without shielding case	9400 (1880.00 MHz)	-	-	WCDMA
Radiated Spurious Emissions above 1GHz	With shielding case, Without shielding case	9262 (1852.40 MHz) 9400 (1880.00 MHz) 9538 (1907.60 MHz)	-	-	WCDMA

3.3.4 WCDMA Band 4

Test Item	EUT Configure Mode	Tested Channel	Channel Bandwidth	Modulation	Mode
EIRP	Without shielding case	1312 (1712.40 MHz) 1413 (1732.60 MHz) 1513 (1752.60 MHz)	-	-	WCDMA HSDPA HSUPA
Modulation Characteristics	Without shielding case	1413 (1732.60 MHz)	-	-	WCDMA HSDPA HSUPA
Frequency Stability	Without shielding case	1312 (1712.40 MHz) 1513 (1752.60 MHz)	-	-	WCDMA
Occupied Bandwidth	Without shielding case	1312 (1712.40 MHz) 1413 (1732.60 MHz) 1513 (1752.60 MHz)	-	-	WCDMA HSDPA HSUPA
Peak to Average Ratio	Without shielding case	1312 (1712.40 MHz) 1413 (1732.60 MHz) 1513 (1752.60 MHz)	-	-	WCDMA HSDPA HSUPA
Conducted Emission	Without shielding case	1312 (1712.40 MHz) 1413 (1732.60 MHz) 1513 (1752.60 MHz)	-	-	WCDMA HSDPA HSUPA
Radiated Spurious Emissions below 1GHz	With shielding case, Without shielding case	1413 (1732.60 MHz)	-	-	WCDMA
Radiated Spurious Emissions above 1GHz	With shielding case, Without shielding case	1312 (1712.40 MHz) 1413 (1732.60 MHz) 1513 (1752.60 MHz)	-	-	WCDMA


3.3.5 WCDMA Band 5

Test Item	EUT Configure Mode	Tested Channel	Channel Bandwidth	Modulation	Mode
ERP	Without shielding case	4132 (826.40 MHz) 4182 (836.40 MHz) 4233 (846.60 MHz)	-	-	WCDMA HSDPA HSUPA
Modulation Characteristics	Without shielding case	4182 (836.40 MHz)	-	-	WCDMA HSDPA HSUPA
Frequency Stability	Without shielding case	4132 (826.40 MHz) 4233 (846.60 MHz)	-	-	WCDMA
Occupied Bandwidth	Without shielding case	4132 (826.40 MHz) 4182 (836.40 MHz) 4233 (846.60 MHz)	-	-	WCDMA HSDPA HSUPA
Peak to Average Ratio	Without shielding case	4132 (826.40 MHz) 4182 (836.40 MHz) 4233 (846.60 MHz)	-	-	WCDMA HSDPA HSUPA
Conducted Emission	Without shielding case	4132 (826.40 MHz) 4182 (836.40 MHz) 4233 (846.60 MHz)	-	-	WCDMA HSDPA HSUPA
Radiated Spurious Emissions below 1GHz	With shielding case, Without shielding case	4182 (836.40 MHz)	-	-	WCDMA
Radiated Spurious Emissions above 1GHz	With shielding case, Without shielding case	4132 (826.40 MHz) 4182 (836.40 MHz) 4233 (846.60 MHz)	-	-	WCDMA

3.4 Test Program Used and Operation Descriptions

There is no need to controlling software during the test, and the EUT can be paired with the Radio Communication Analyzer to test the connection when it is powered on.

3.5 Connection Diagram of EUT and Peripheral Devices

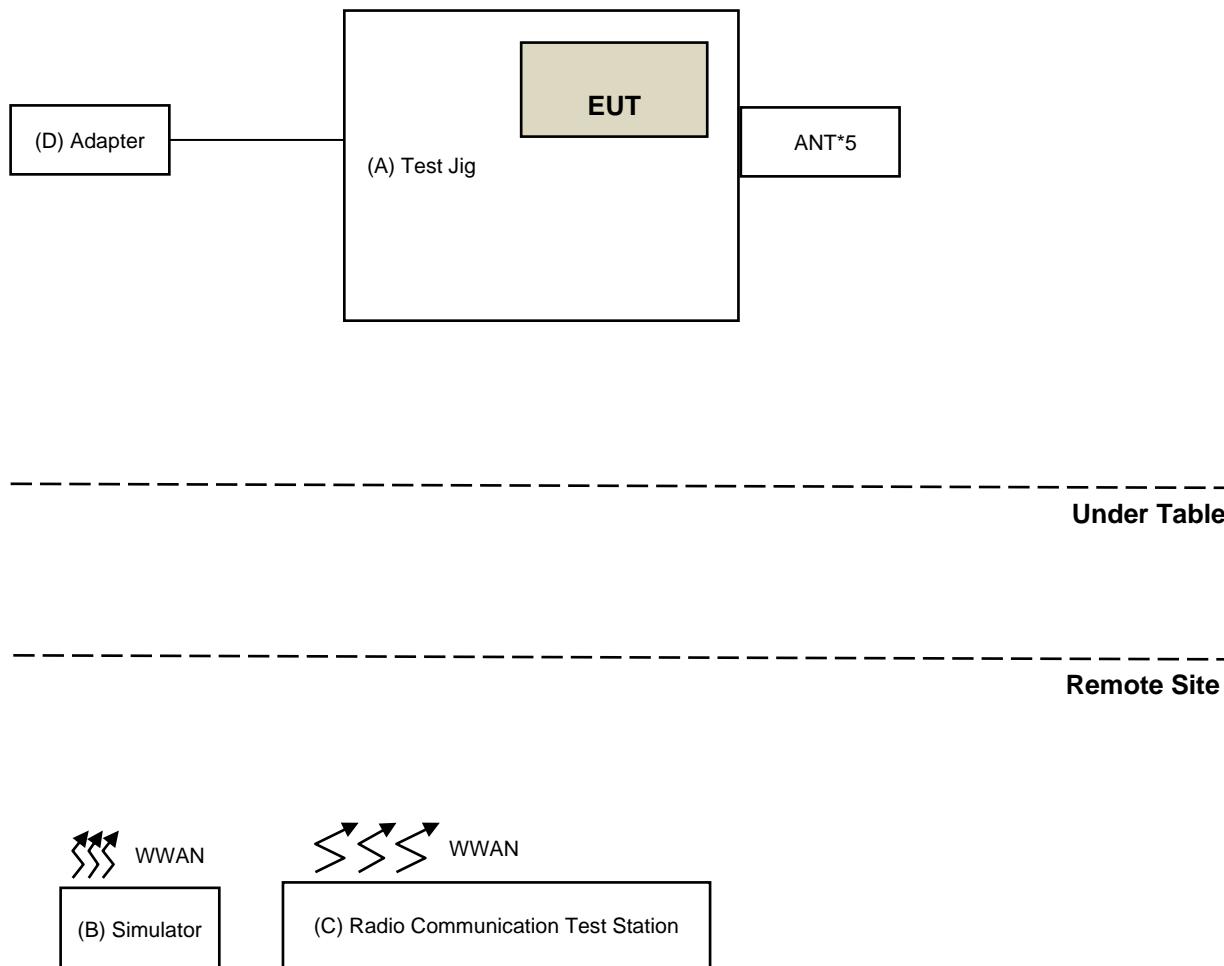

3.6 Configuration of Peripheral Devices and Cable Connections

ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A	Test Jig	N/A	N/A	N/A	N/A	Supplied by applicant
B	Radio Communication Analyzer	Anritsu	MT8821C	6201462755	N/A	Provided by Lab
C	Radio Communication Test Station	Anritsu	MT8000A	6272278595	N/A	Provided by Lab
D	ADAPTER	LEADER	MU12B1120100-A1	N/A	N/A	Supplied by applicant

4 Test Instruments

The calibration interval of the all test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030B	MY57140938	2024/3/20	2025/3/19
Radio Communication Analyzer Anritsu	MT8821C	6201462755	2024/3/13	2025/3/12
		6261806803	2024/2/15	2025/2/14
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/5/20 ~ 2024/7/10

4.2 Modulation Characteristics

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
PXA Signal Analyzer Keysight	N9030B	MY57140938	2024/3/20	2025/3/19
Radio Communication Analyzer Anritsu	MT8821C	6201462755	2024/3/13	2025/3/12
		6261806803	2024/2/15	2025/2/14
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/7/11

4.3 Peak to Average Ratio

Refer to section 4.1 to get information of the instruments.

4.4 Bandwidth

Refer to section 4.1 to get information of the instruments.

4.5 Conducted Spurious Emissions

Refer to section 4.1 to get information of the instruments.

4.6 Radiated Spurious Emissions below 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Bi_Log Antenna Schwarzbeck	VULB 9168	9168-472	2023/10/16	2024/10/15
EXA Signal Analyzer Agilent	N9010A	MY52220207	2023/12/28	2024/12/27
Loop Antenna Electro-Metrics	EM-6879	269	2023/9/23	2024/9/22
Loop Antenna TESEQ	HLA 6121	45745	2023/8/8	2024/8/7
MXE EMI Receiver Agilent	N9038A	MY51210203	2023/8/24	2024/8/23
Preamplifier EMCI	EMC 330H	980112	2023/9/27	2024/9/26
RF Coaxial Cable Woken	EMC001340	980201	2023/9/27	2024/9/26
	8D-FB	Cable-Ch10-01	2023/9/27	2024/9/26
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2024/6/6 ~ 2024/6/7

4.7 Radiated Spurious Emissions above 1GHz

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Antenna Tower & Turn Max-Full	MFA-440H	AT93021705	N/A	N/A
Boresight antenna tower fixture BV	BAF-02	7	N/A	N/A
EXA Signal Analyzer Agilent	N9010A	MY52220207	2023/12/28	2024/12/27
Horn Antenna Schwarzbeck	BBHA 9120D	9120D-969	2023/11/12	2024/11/11
MXE EMI Receiver Agilent	N9038A	MY51210203	2023/8/24	2024/8/23
Preamplifier EMCI	EMC 012645	980115	2023/9/27	2024/9/26
RF Coaxial Cable EMCI	EMC104-SM-SM- 8000+3000	171005	2023/9/27	2024/9/26
RF Coaxial Cable HUBER+SUHNER	SUCOFLEX 104	EMC104-SM-SM- 1000(140807)	2023/9/27	2024/9/26
Software BV ADT	ADT_Radiated_ V7.6.15.9.5	N/A	N/A	N/A
Turn Table Max-Full	MFT-201SS	N/A	N/A	N/A
Turn Table Controller Max-Full	MG-7802	N/A	N/A	N/A

Notes:

1. The test was performed in HY - 966 chamber 5.
2. Tested Date: 2024/6/3 ~ 2024/6/5

4.8 Frequency Stability

Description Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
3-channel DC power supply JIN YIH Technology	ODP3033	ODP30332128138	N/A	N/A
Digital Multimeter Fluke	8050A	4660081	2024/6/14	2025/6/13
PXA Signal Analyzer Keysight	N9030B	MY57140938	2024/3/20	2025/3/19
Radio Communication Analyzer Anritsu	MT8821C	6261806803	2024/2/15	2025/2/14
Software BV	ADT_RF Test Software V7.6.5.4	N/A	N/A	N/A
Temperature & Humidity Chamber Terchy	HRM-120RF	931022	2023/12/19	2024/12/18

Notes:

1. The test was performed in Oven room.
2. Tested Date: 2024/7/17

5 Limits of Test Items

5.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

For GSM1900, WCDMA Band 2:

Mobile and portable stations are limited to 2 watts EIRP.

For WCDMA Band 4:

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

For GSM850, WCDMA Band 5:

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

5.2 Modulation Characteristics

A curve or equivalent data which shows that the equipment will meet the modulation requirements of the rules under which the equipment is to be licensed.

5.3 Peak to Average Ratio

In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13 dB.

5.4 Bandwidth

According to FCC 47 CFR part 2.1049, the occupied bandwidth, that is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers radiated are each equal to 0.5% of the total mean power radiated by a given emission.

5.5 Conducted Spurious Emissions

For GSM850, GSM1900, WCDMA Band 2, WCDMA Band 5:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

For WCDMA Band 4:

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz, 1915-1920 MHz, 1995-2000 MHz, 2000-2020 MHz, 2110-2155 MHz, 2155-2180 MHz, and 2180-2200 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

5.6 Radiated Spurious Emissions below 1GHz

For GSM850, GSM1900, WCDMA Band 2, WCDMA Band 5:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

For WCDMA Band 4:

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB. The limit of emission is equal to -13 dBm.

5.7 Radiated Spurious Emissions above 1GHz

For GSM850, GSM1900, WCDMA Band 2, WCDMA Band 5:

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

For WCDMA Band 4:

According to FCC 47 CFR part 27.53(h), for operations in the 1695-1710 MHz, 1710-1755 MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log(P)$ dB. The limit of emission is equal to -13 dBm.

5.8 Frequency Stability

For GSM850, WCDMA Band 5:

1.5 ppm is for base and fixed station. 2.5 ppm is for mobile station.

For GSM1900, WCDMA Band 2, WCDMA Band 4:


The frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation (authorized frequency block).

6 Test Arrangements

6.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

6.1.1 Test Setup

Conducted Power Measurement:

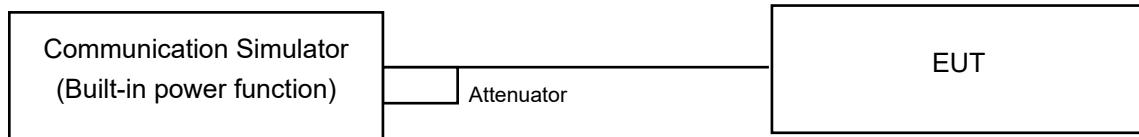

6.1.2 Test Procedure

Conducted Power Measurement:

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology. The average (rms) power measurement was performed on emulator and power value was measured from power function on emulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Maximum EIRP / ERP

The relevant equation for determining the maximum ERP or EIRP from the measured RF output power is given in Equation as follows:

$$\text{EIRP} = P_{\text{Meas}} + G_T$$

$$\text{ERP} = P_{\text{Meas}} + G_T - 2.15$$

where

ERP or EIRP effective radiated power or equivalent isotropically radiated power, respectively


(expressed in the same units as P_{Meas} , e.g., dBm or dBW)

P_{Meas} measured transmitter output power or PSD, in dBm or dBW

G_T gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP)

6.2 Modulation Characteristics

6.2.1 Test Setup




6.2.2 Test Procedure

Connect the EUT to Communication Simulator via the antenna connector, the frequency band is set as EUT supported Modulation and Channels, the EUT output is matched with 50 ohm load, the waveform quality and constellation of the EUT was tested.

6.3 Peak to Average Ratio

6.3.1 Test Setup

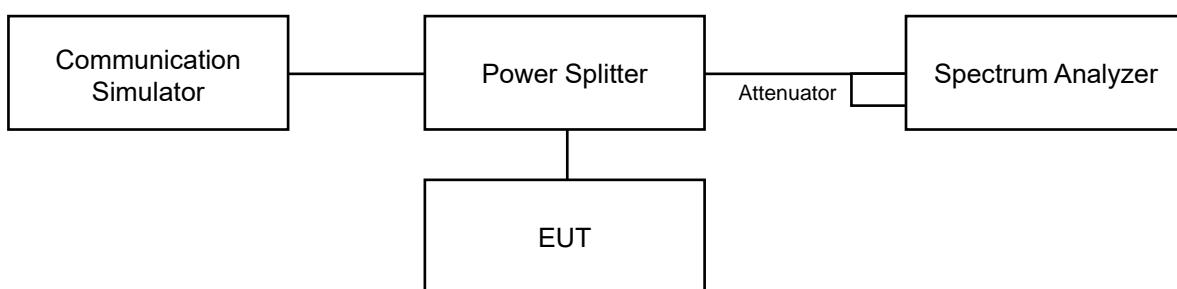


6.3.2 Test Procedure

- Set resolution/measurement bandwidth \geq signal's occupied bandwidth;
- Set the number of counts to a value that stabilizes the measured CCDF curve;
- Record the maximum PAPR level associated with a probability of 0.1%.

6.4 Bandwidth

6.4.1 Test Setup

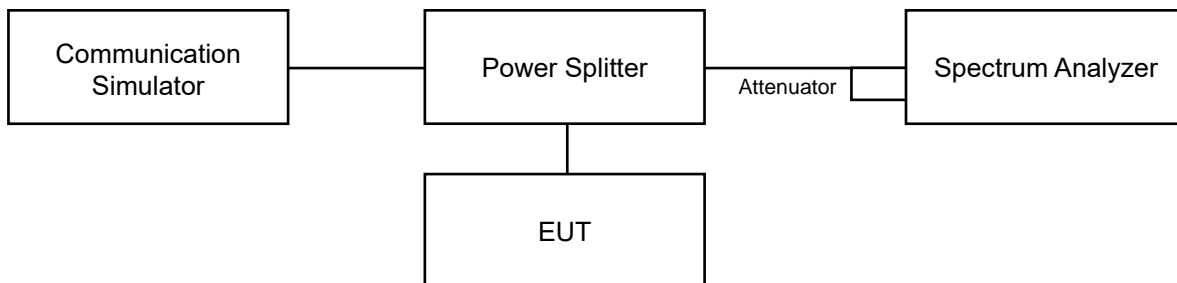

6.4.2 Test Procedure

For the 26 dBc bandwidth measurement method, please refer to section 5.4.3 of ANSI C63.26.


- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e. Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f. Determine the following reference values: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
- g. Determine the “-X dB amplitude” as equal to (Reference Value - X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- h. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers.
- i. The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

For the occupied bandwidth measurement method, please refer to section 5.4.4 of ANSI C63.26.

- a. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be wide enough to see sufficient roll off of the signal to make the measurement.
- b. The nominal RBW shall be in the range of 1% to 5% of the anticipated OBW, and the VBW shall be set $\geq 3 \times$ RBW.
- c. Set the reference level of the instrument as required to prevent the signal amplitude from exceeding the maximum spectrum analyzer input mixer level for linear operation. See guidance provided in 4.2.3.
- d. The dynamic range of the spectrum analyzer at the selected RBW shall be more than 10 dB below the target “-X dB” requirement, i.e., if the requirement calls for measuring the -26 dB OBW, the spectrum analyzer noise floor at the selected RBW shall be at least 36 dB below the reference level.
- e. Set spectrum analyzer detection mode to peak, and the trace mode to max hold.
- f. Determine the reference value by either of the following:
 - g. 1) Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace (this is the reference value).
 - h. 2) Set the EUT to transmit an unmodulated carrier. Set the spectrum analyzer marker to the level of the carrier.
- i. Determine the “-X dB amplitude” as equal to (Reference Value – X). Alternatively, this calculation can be performed on the spectrum analyzer using the delta-marker measurement function.
- j. If the reference value was determined using an unmodulated carrier, turn the EUT modulation on, then either clear the existing trace or start a new trace on the spectrum analyzer and allow the new trace to stabilize. Otherwise the trace from step f) shall be used for step i).
- k. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB amplitude” determined in step f). If a marker is below this “-X dB amplitude” value it should be as close as possible to this value. The OBW is the positive frequency difference between the two markers. The spectral envelope can cross the “-X dB amplitude” at multiple points. The lowest or highest frequency shall be selected as the frequencies that are the farthest away from the center frequency at which the spectral envelope crosses the “-X dB amplitude.”
- l. The OBW shall be reported by providing plot(s) of the measuring instrument display, to include markers depicting the relevant frequency and amplitude information (e.g., marker table). The frequency and amplitude axis and scale shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

6.5 Conducted Spurious Emissions

6.5.1 Test Setup

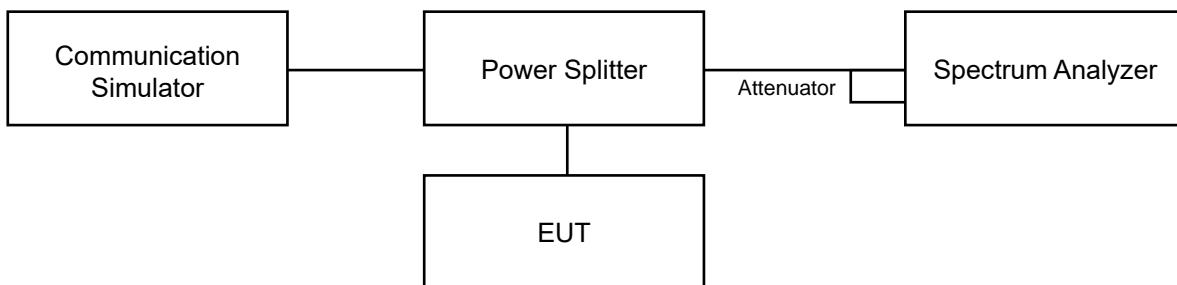


6.5.2 Test Procedure

- a. Measurement refer to ANSI C63.26 section 5.7.
- b. All measurements were done at 3 channels: low, middle and high operational frequency range.
- c. Measuring frequency range is from 9 kHz up to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. 20 dB attenuation pad is connected with spectrum.
- d. The fundamental frequency above 1 GHz, the spectrum set RBW = 1 MHz, VBW = 3 MHz, Detector = Average.
- e. The fundamental frequency below 1 GHz, the spectrum set RBW ≥ 100 kHz, VBW ≥ 3 x RBW, Detector = Average.
- f. Measuring frequency band edge, narrow RBW (no less than 1% of the OBW) is used for conducted emission measurement.

6.6 Radiated Spurious Emissions below 1GHz

6.6.1 Test Setup

For radiated emission 30 MHz to 1 GHz

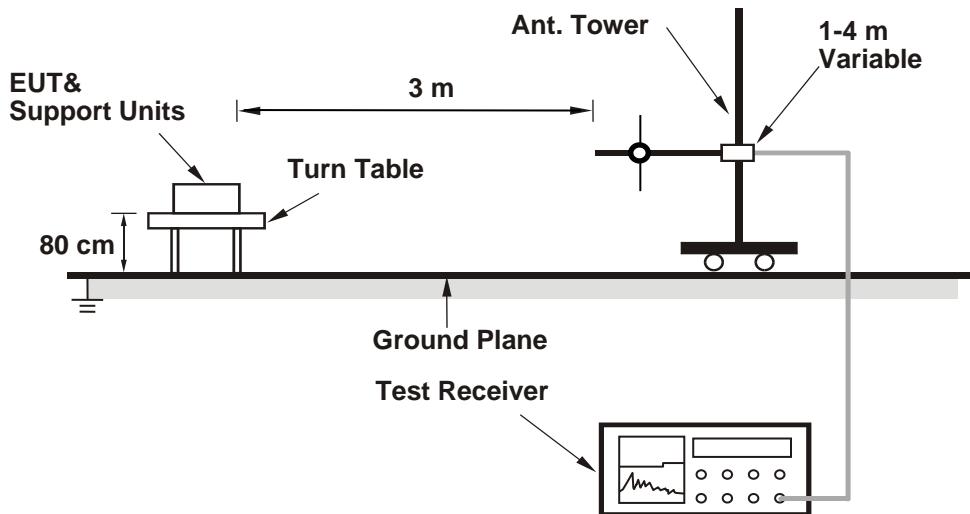

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.6.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.

- In the semi-anechoic chamber, EUT placed on the 0.8 m (below or equal 1 GHz) height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- Following C63.26 section 5.5 and 5.2.7
- $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- $ERP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.


Note:

- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.
- The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

6.7 Radiated Spurious Emissions above 1GHz

6.7.1 Test Setup

For radiated emission above 1 GHz

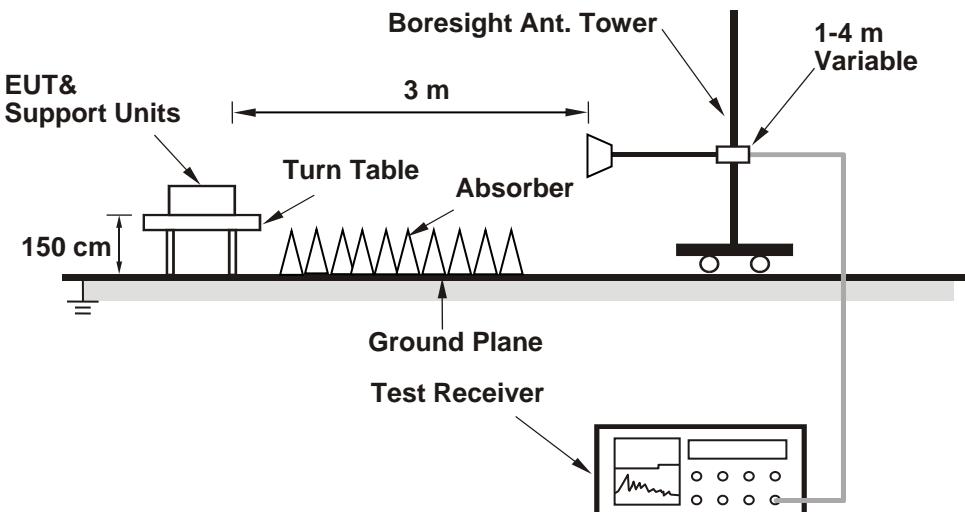

For the actual test configuration, please refer to the attached file (Test Setup Photo).

6.7.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.


- a. In the semi-anechoic chamber, EUT placed on the 1.5 m height of turn table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1 m to 4 m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
- e. $EIRP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
- f. $ERP \text{ (dBm)} = E \text{ (dB}\mu\text{V/m)} + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz/3 MHz.

6.8 Frequency Stability

6.8.1 Test Setup

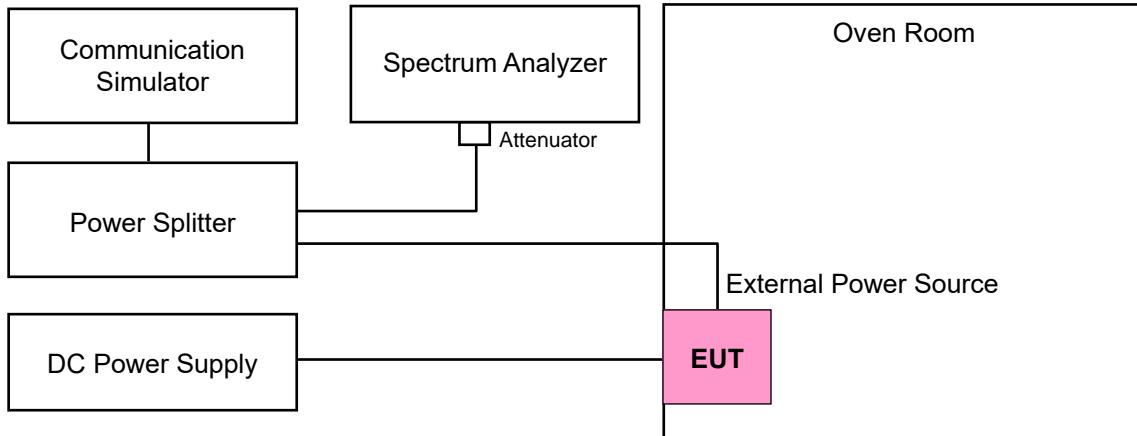

6.8.2 Test Procedure

The EUT is configured by emulator to set data modulation and maximum power using WWAN technology.

- Device is placed at the oven room. The oven room could control the temperatures and humidity. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- EUT is connected the external power supply to control the DC input power. The test voltage range is from minimum to maximum working voltage. Each step shall be record the frequency error rate.
- The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

Note: The frequency error was recorded frequency error from the communication simulator.

7 Test Results of Test Item

7.1 Effective Radiated Power and Equivalent Isotropically Radiated Power

Input Power:	4.7 Vdc	Environmental Conditions:	23°C, 71% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------

7.1.1 GSM850

Conducted Output Power (dBm)

Band	GSM850		
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
GSM	32.67	32.82	32.73
GPRS	32.59	32.79	32.66
EDGE (MCS9)	27.36	27.64	27.37

ERP Power (dBm)

Band	GSM850		
Channel	128	189	251
Frequency (MHz)	824.2	836.4	848.8
GSM	33.15	33.30	33.21
GPRS	33.07	33.27	33.14
EDGE (MCS9)	27.84	28.12	27.85

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15

7.1.2 GSM1900

Conducted Output Power (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM	29.83	29.75	29.82
GPRS	29.77	29.71	29.78
EDGE (MCS9)	26.15	26.26	26.15

EIRP Power (dBm)

Band	GSM1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880	1909.8
GSM	31.86	31.78	31.85
GPRS	31.80	31.74	31.81
EDGE (MCS9)	28.18	28.29	28.18

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.3 WCDMA Band 2

Conducted Output Power (dBm)

Band	WCDMA II		
TX Channel	9262	9400	9538
Rx Channel	9662	9800	9938
Frequency	1852.4	1880	1907.6
RMC 12.2K	23.82	23.97	23.85
HSDPA	22.93	23.09	22.91
HSUPA	22.98	22.82	22.97

EIRP Power (dBm)

Band	WCDMA II		
TX Channel	9262	9400	9538
Rx Channel	9662	9800	9938
Frequency	1852.4	1880	1907.6
RMC 12.2K	25.85	26.00	25.88
HSDPA	24.96	25.12	24.94
HSUPA	25.01	24.85	25.00

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.4 WCDMA Band 4

Conducted Output Power (dBm)

Band	WCDMA IV		
TX Channel	1312	1413	1513
Rx Channel	1537	1638	1738
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	23.95	24.14	23.97
HSDPA	22.90	23.06	23.06
HSUPA	22.91	23.05	22.98

EIRP Power (dBm)

Band	WCDMA IV		
TX Channel	1312	1413	1513
Rx Channel	1537	1638	1738
Frequency	1712.4	1732.6	1752.6
RMC 12.2K	25.98	26.17	26.00
HSDPA	24.93	25.09	25.09
HSUPA	24.94	25.08	25.01

*EIRP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi)

7.1.5 WCDMA Band 5

Conducted Output Power (dBm)

Band	WCDMA V		
TX Channel	4132	4182	4233
Rx Channel	4357	4407	4458
Frequency	826.4	836.4	846.6
RMC 12.2K	23.96	24.04	23.89
HSDPA	23.01	22.85	22.88
HSUPA	22.94	22.87	22.93

ERP Power (dBm)


Band	WCDMA V		
TX Channel	4132	4182	4233
Rx Channel	4357	4407	4458
Frequency	826.4	836.4	846.6
RMC 12.2K	24.44	24.52	24.37
HSDPA	23.49	23.33	23.36
HSUPA	23.42	23.35	23.41

*ERP (dBm) = Conducted Output Power (dBm) + Antenna Gain (dBi) - 2.15


7.2 Modulation Characteristics

Input Power:	4.7 Vdc	Environmental Conditions:	22°C, 68% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------


7.2.1 GSM850

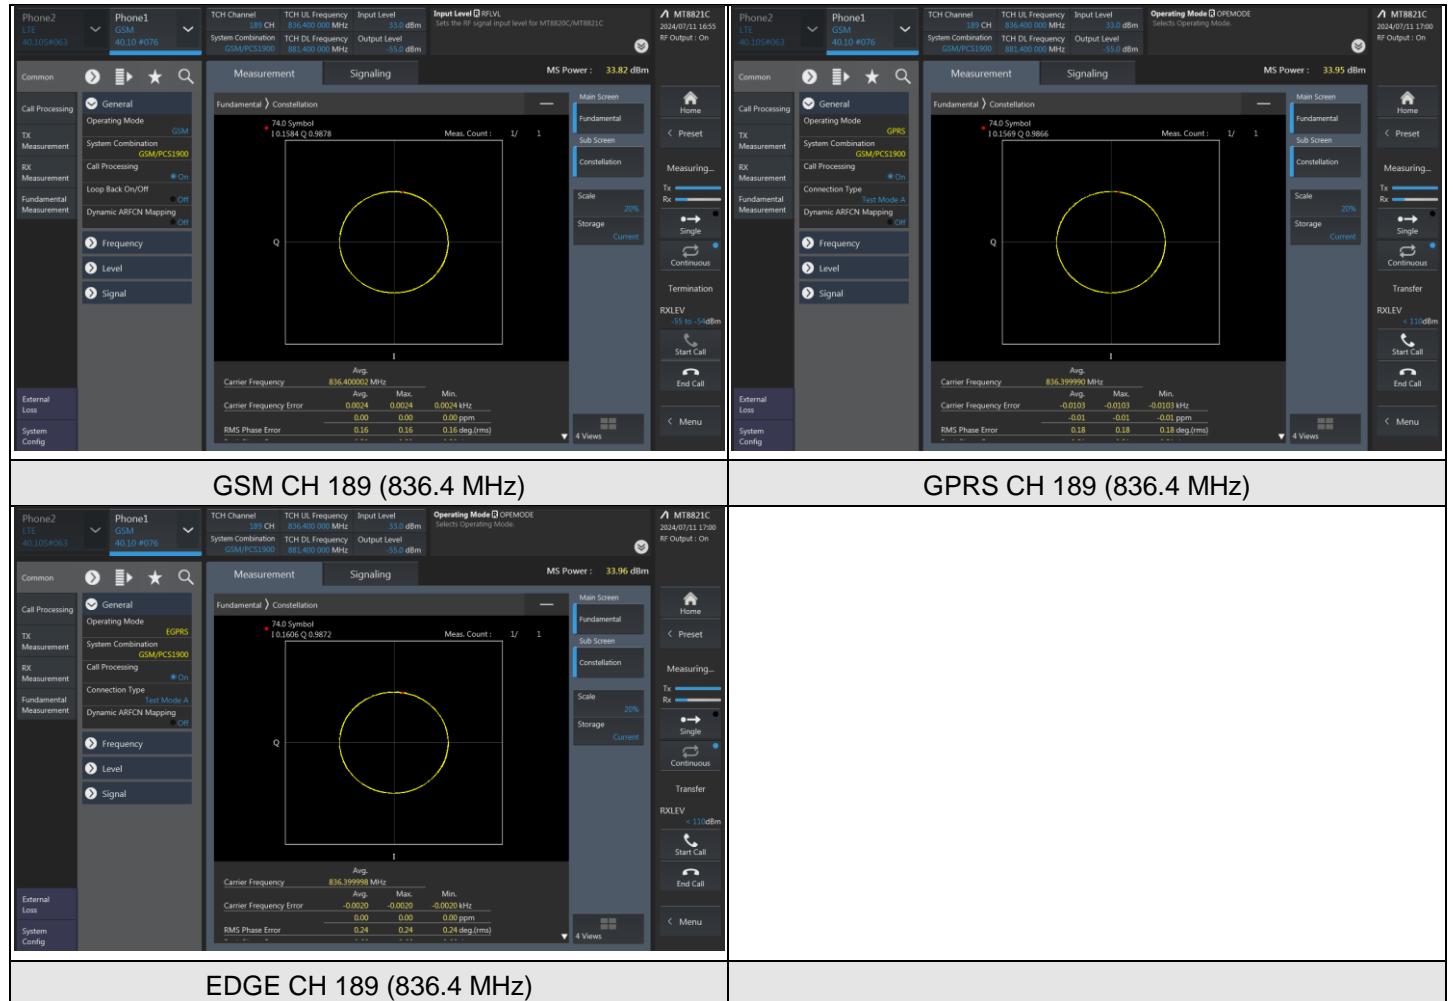


7.2.2 GSM1900

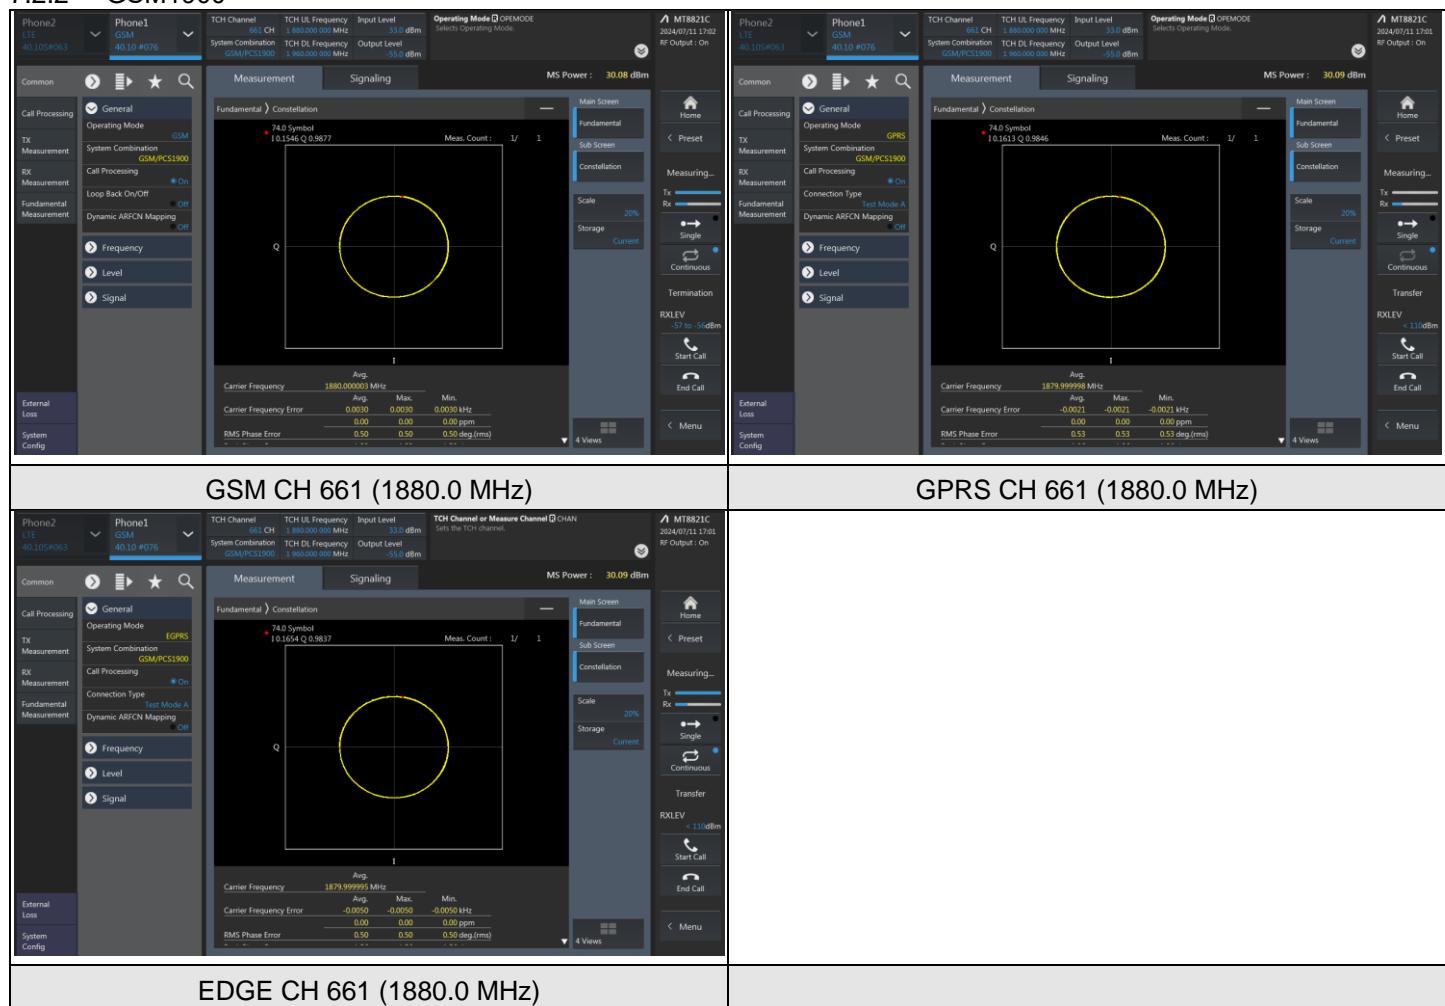


7.2.3 WCDMA Band 2

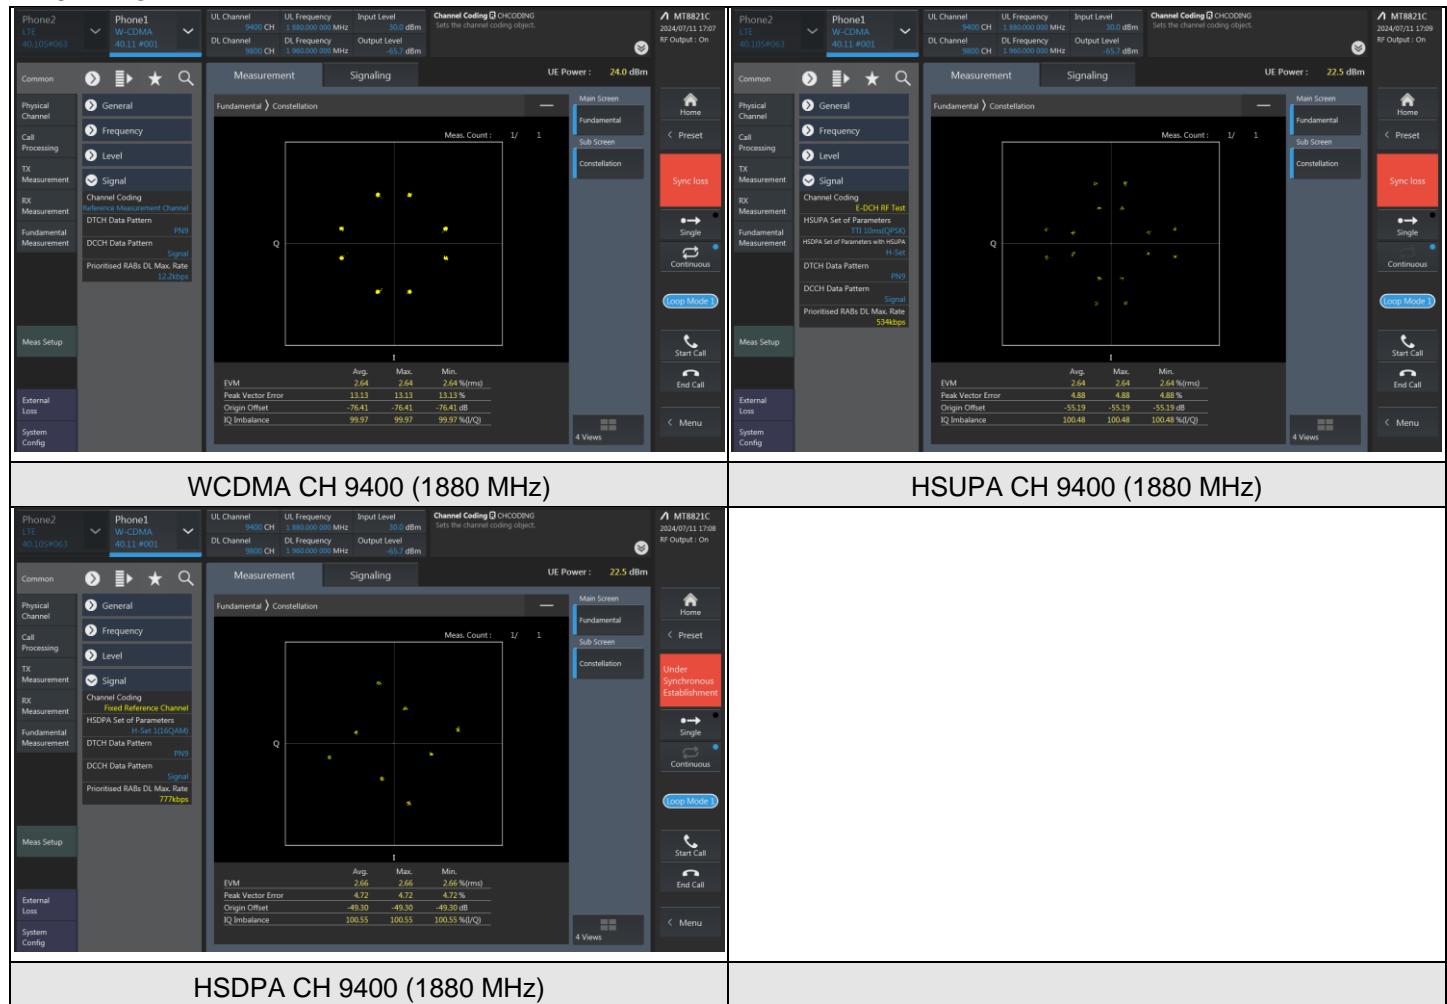

7.2.4 WCDMA Band 4

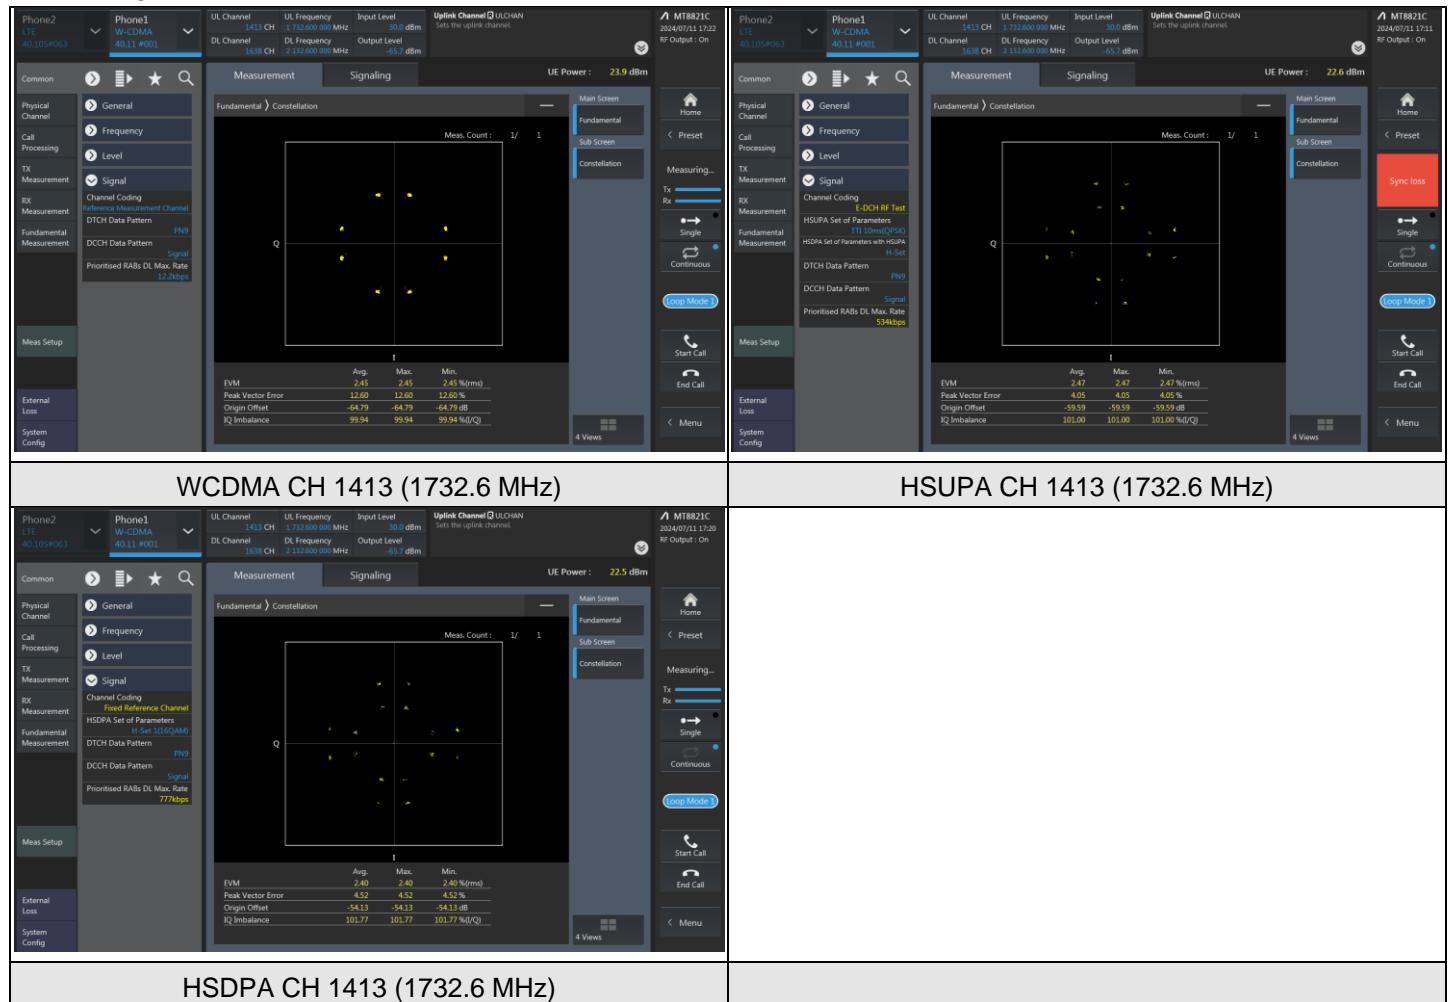

7.2.5 WCDMA Band 5

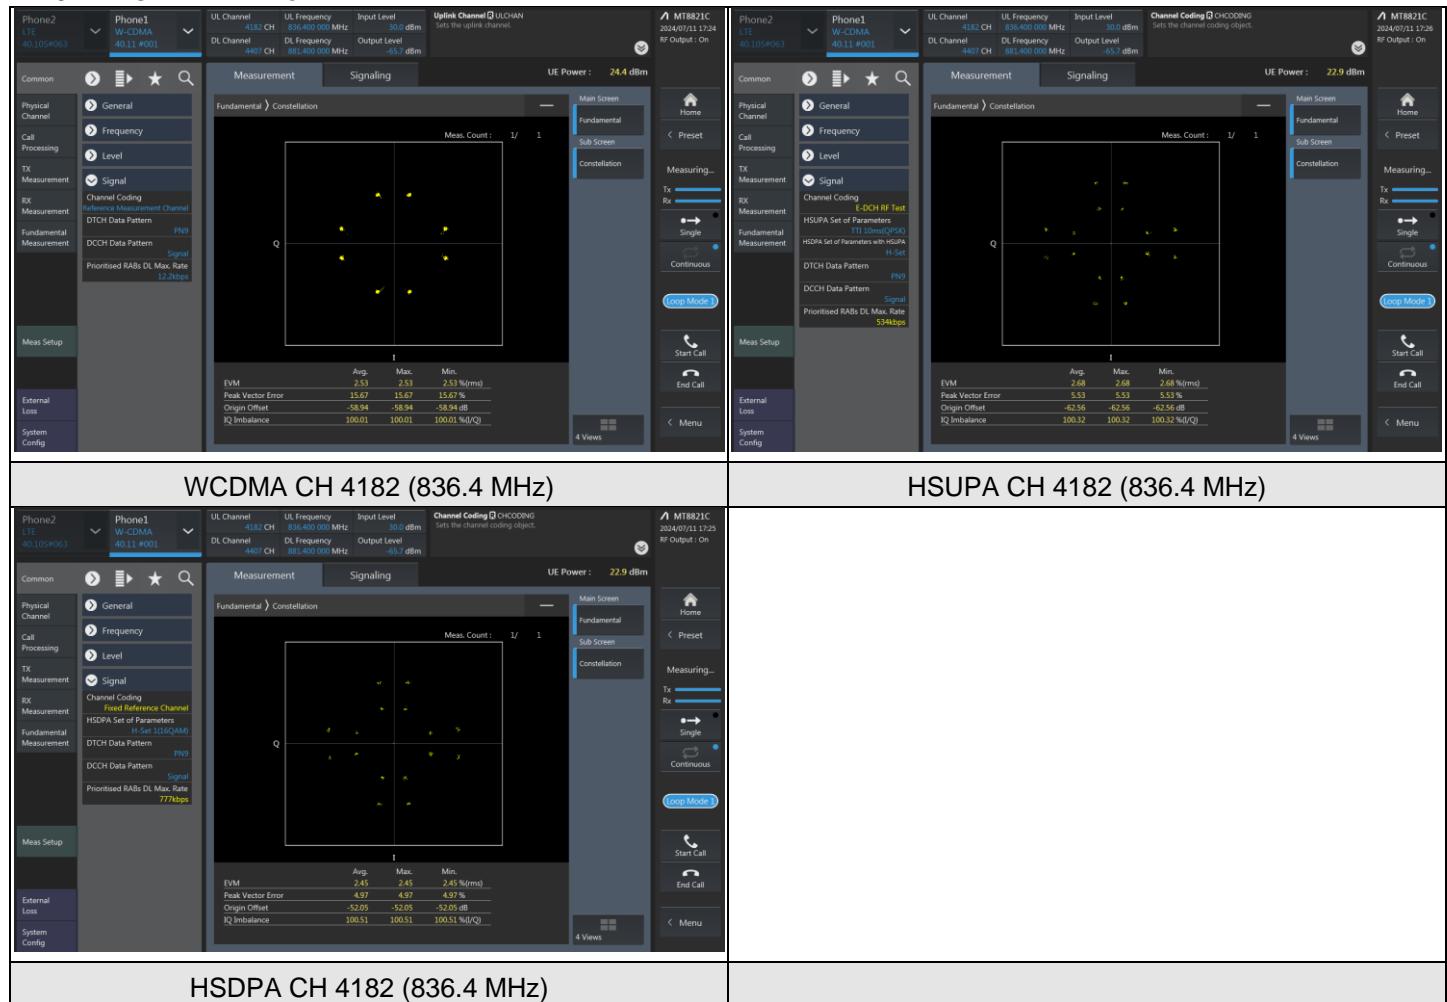


7.3 Peak to Average Ratio

Input Power:	4.7 Vdc	Environmental Conditions:	22°C, 68% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------


7.3.1 GSM850

Modulation	Channel	Frequency (MHz)	Measurement Value (dB)	Limit (dB)	Result
GSM	128	824.2	2.64	13	Pass
GSM	189	836.4	2.64	13	Pass
GSM	251	848.8	2.64	13	Pass
GPRS	128	824.2	2.64	13	Pass
GPRS	189	836.4	2.64	13	Pass
GPRS	251	848.8	2.64	13	Pass
EDGE	128	824.2	2.64	13	Pass
EDGE	189	836.4	2.64	13	Pass
EDGE	251	848.8	2.63	13	Pass

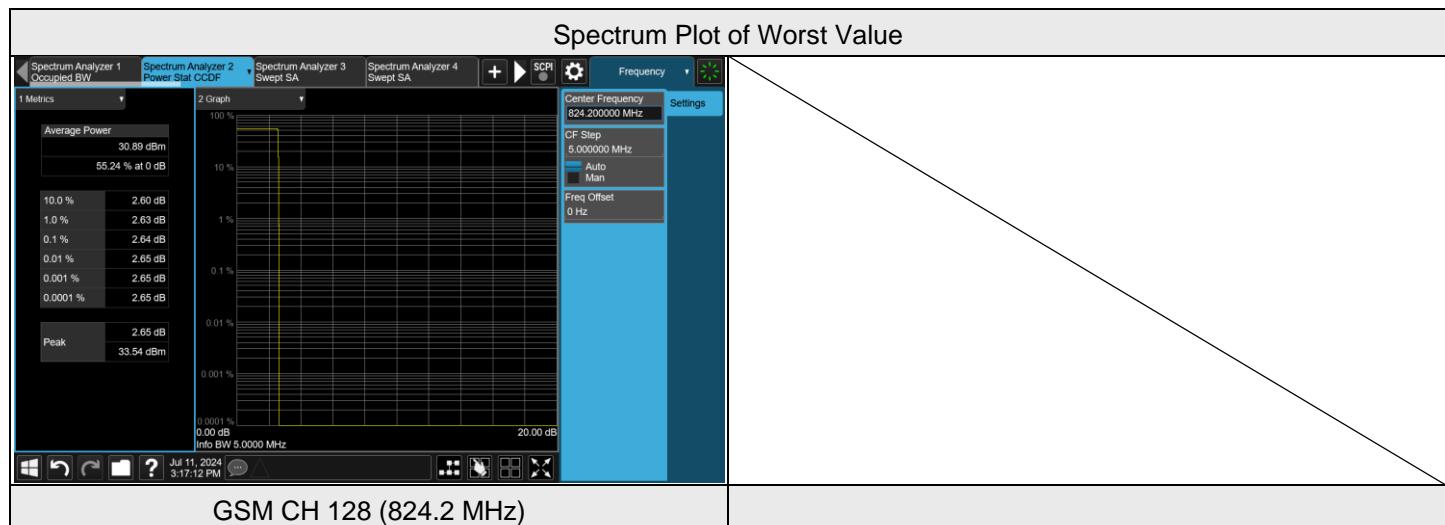


7.3.2 GSM1900

Modulation	Channel	Frequency (MHz)	Measurement Value (dB)	Limit (dB)	Result
GSM	512	1850.2	2.66	13	Pass
GSM	661	1880	2.68	13	Pass
GSM	810	1909.8	2.71	13	Pass
GPRS	512	1850.2	2.67	13	Pass
GPRS	661	1880	2.68	13	Pass
GPRS	810	1909.8	2.70	13	Pass
EDGE	512	1850.2	2.66	13	Pass
EDGE	661	1880	2.68	13	Pass
EDGE	810	1909.8	2.70	13	Pass

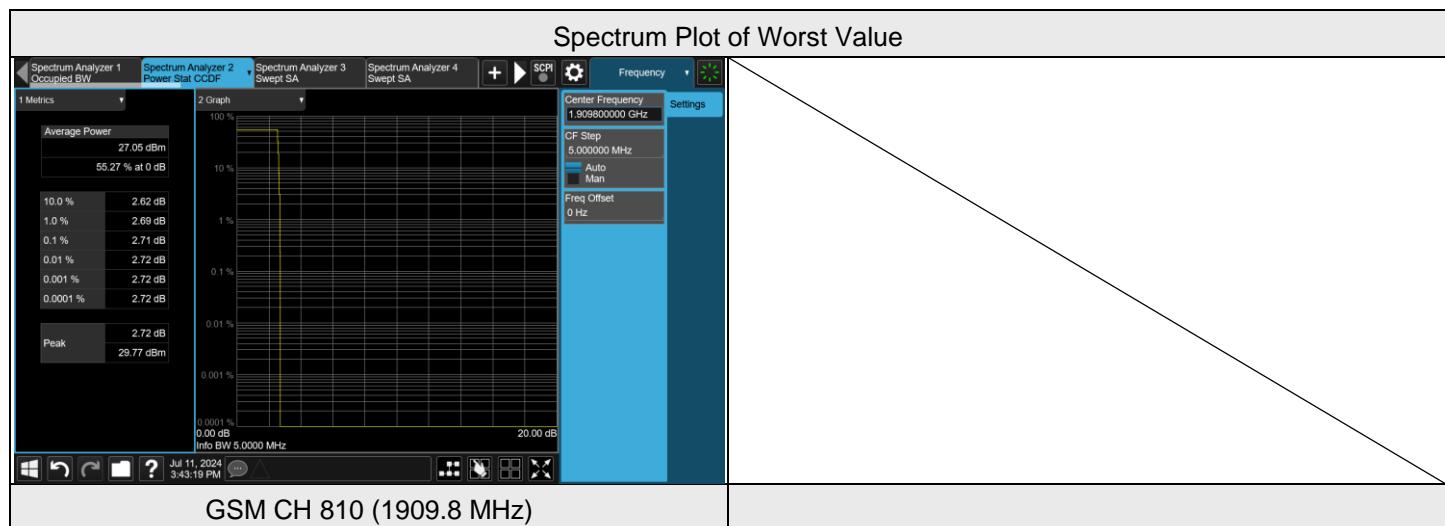


7.3.3 WCDMA Band 2

Modulation	Channel	Frequency (MHz)	Measurement Value(dB)	Limit (dB)	Result
WCDMA	9262	1852.4	3.01	13	Pass
WCDMA	9400	1880	3.03	13	Pass
WCDMA	9538	1907.6	3.02	13	Pass
HSDPA	9262	1852.4	3.75	13	Pass
HSDPA	9400	1880	3.83	13	Pass
HSDPA	9538	1907.6	3.76	13	Pass
HSUPA	9262	1852.4	3.74	13	Pass
HSUPA	9400	1880	3.89	13	Pass
HSUPA	9538	1907.6	3.78	13	Pass

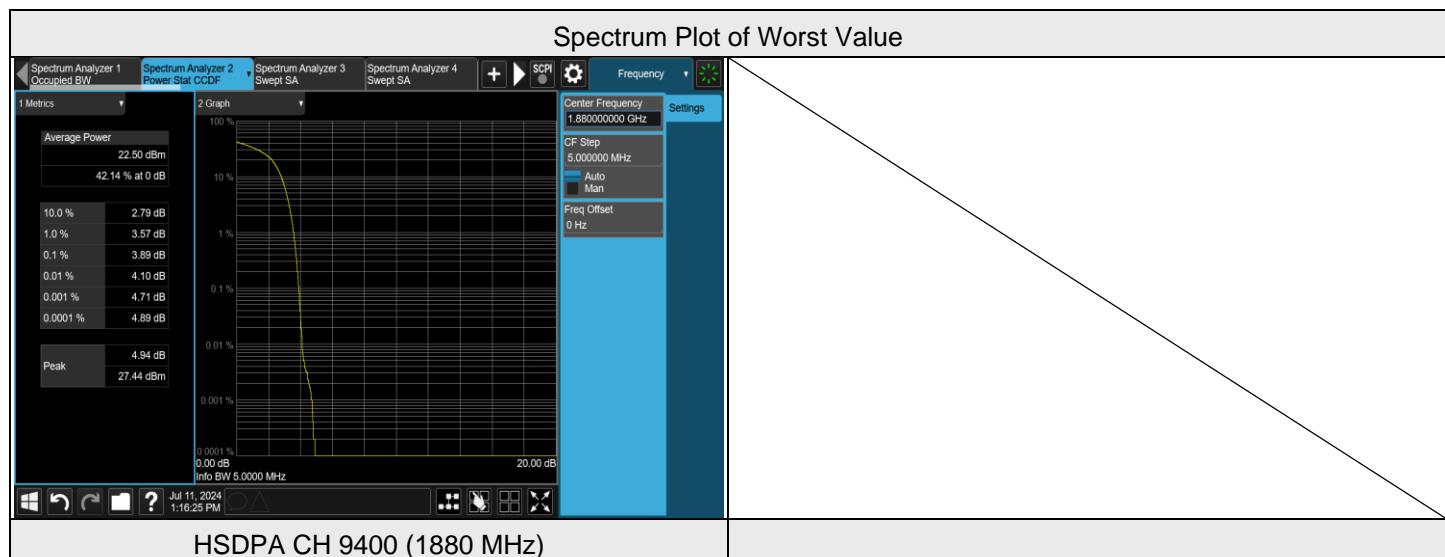


7.3.4 WCDMA Band 4

Modulation	Channel	Frequency (MHz)	Measurement Value(dB)	Limit (dB)	Result
WCDMA	1312	1712.4	2.92	13	Pass
WCDMA	1413	1732.6	2.92	13	Pass
WCDMA	1513	1752.6	2.96	13	Pass
HSDPA	1312	1712.4	3.76	13	Pass
HSDPA	1413	1732.6	3.66	13	Pass
HSDPA	1513	1752.6	3.74	13	Pass
HSUPA	1312	1712.4	3.71	13	Pass
HSUPA	1413	1732.6	3.63	13	Pass
HSUPA	1513	1752.6	3.75	13	Pass

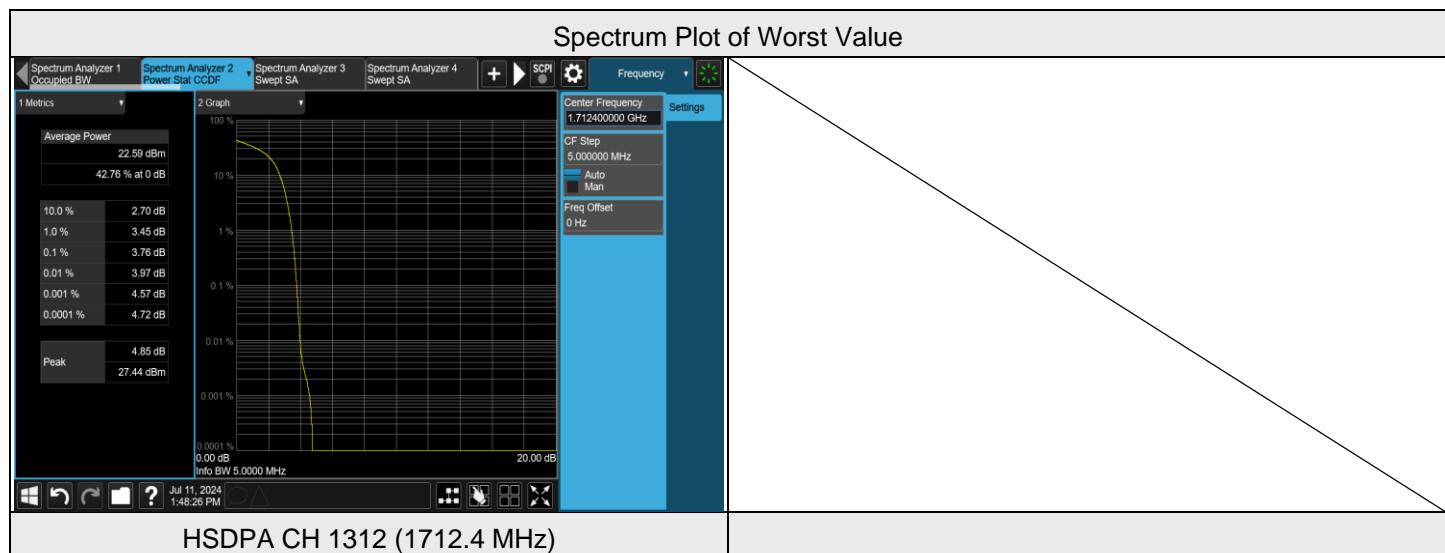

7.3.5 WCDMA Band 5

Modulation	Channel	Frequency (MHz)	Measurement Value(dB)	Limit (dB)	Result
WCDMA	4132	826.4	3.30	13	Pass
WCDMA	4182	836.4	3.26	13	Pass
WCDMA	4223	846.6	3.09	13	Pass
HSDPA	4132	826.4	4.16	13	Pass
HSDPA	4182	836.4	4.00	13	Pass
HSDPA	4223	846.6	4.09	13	Pass
HSUPA	4132	826.4	4.19	13	Pass
HSUPA	4182	836.4	4.02	13	Pass
HSUPA	4223	846.6	4.12	13	Pass

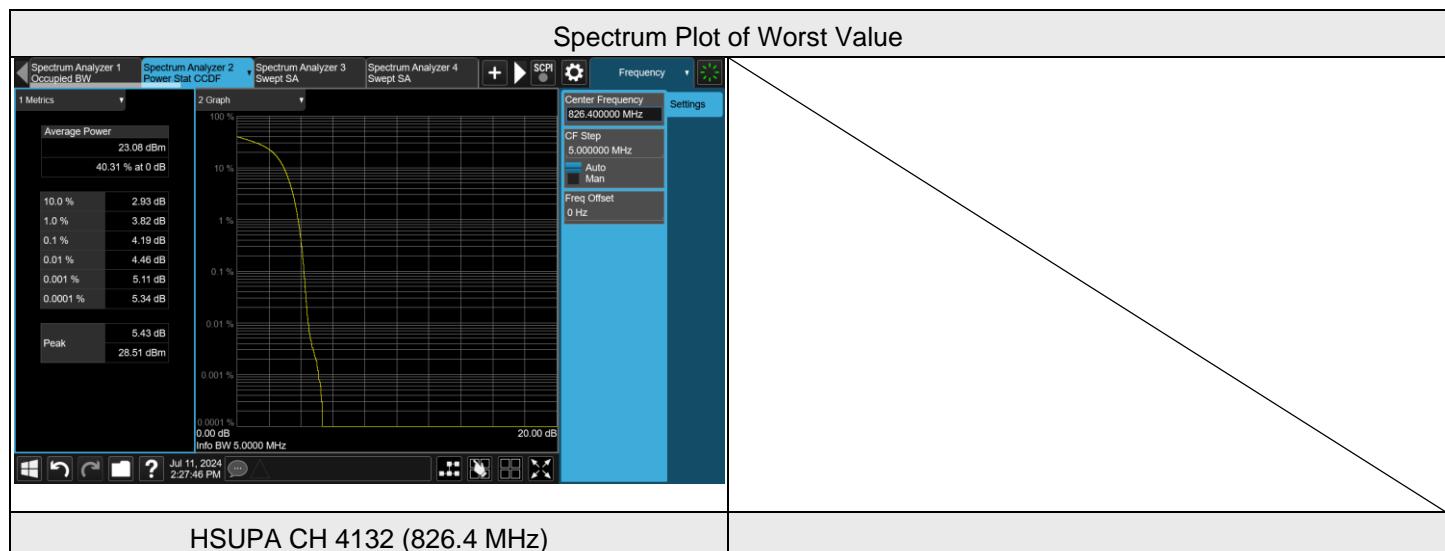


7.4 Bandwidth

Input Power:	4.7 Vdc	Environmental Conditions:	22°C, 68% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------


7.4.1 GSM850

Modulation	Channel	Frequency (MHz)	Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
GSM	128	824.2	240.77	307.7
GSM	189	836.4	242.16	311.8
GSM	251	848.8	245.46	310.5
GPRS	128	824.2	248.85	321.5
GPRS	189	836.4	245.03	314.0
GPRS	251	848.8	244.79	318.4
EDGE	128	824.2	245.01	307.6
EDGE	189	836.4	246.17	313.9
EDGE	251	848.8	247.96	324.6

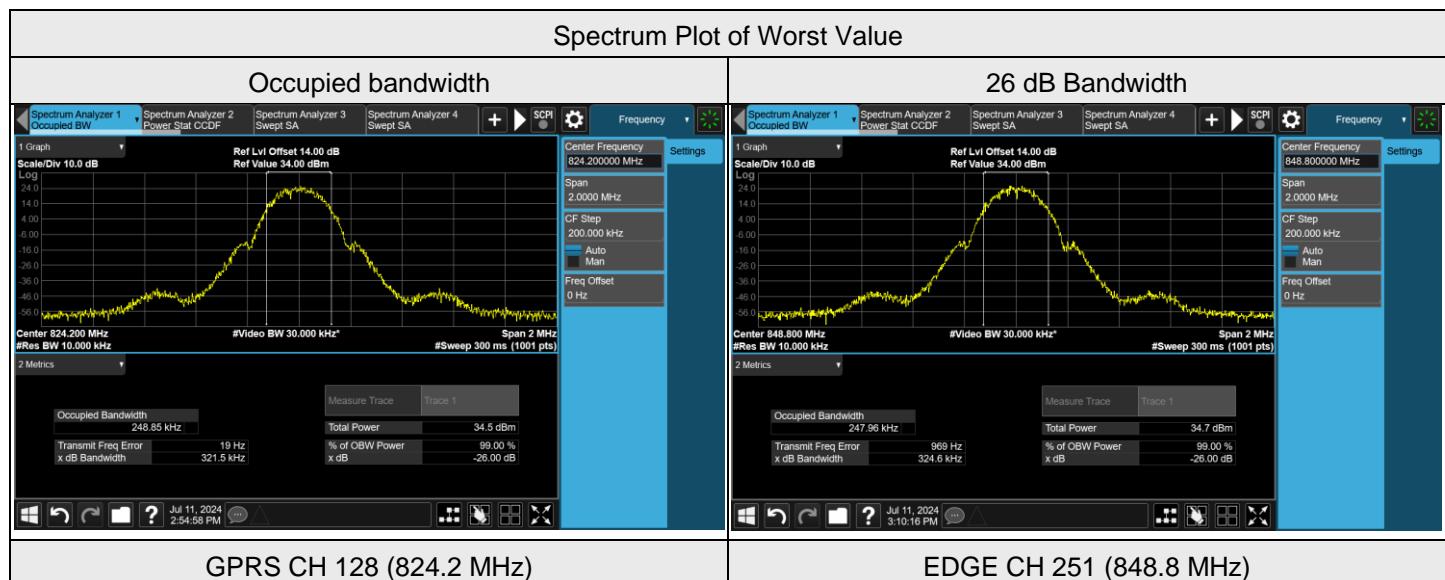


7.4.2 GSM1900

Modulation	Channel	Frequency (MHz)	Occupied Bandwidth (kHz)	26 dB Bandwidth (kHz)
GSM	512	1850.2	244.33	310.9
GSM	661	1880	239.82	304.9
GSM	810	1909.8	241.50	303.6
GPRS	512	1850.2	248.52	319.4
GPRS	661	1880	244.88	316.5
GPRS	810	1909.8	245.68	313.3
EDGE	512	1850.2	247.83	317.4
EDGE	661	1880	247.28	316.8
EDGE	810	1909.8	246.95	317.5

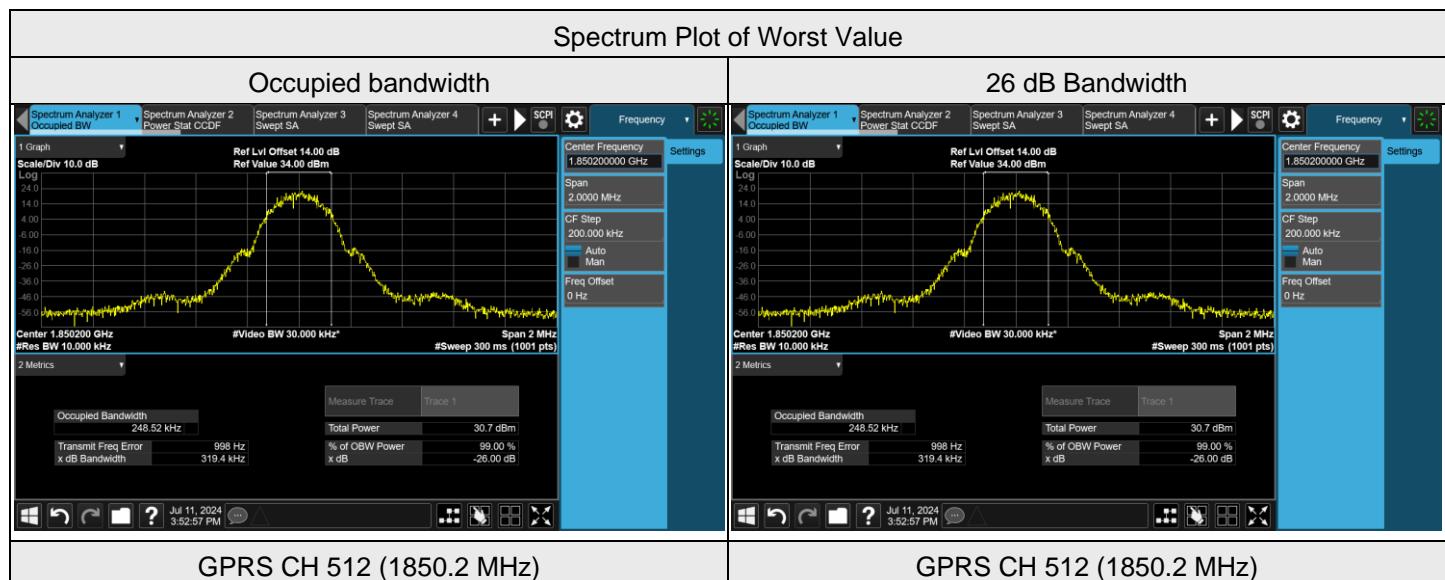


7.4.3 WCDMA Band 2

Modulation	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
WCDMA	9262	1852.4	4.1546	4.680
WCDMA	9400	1880	4.1518	4.674
WCDMA	9538	1907.6	4.1559	4.678
HSDPA	9262	1852.4	4.1572	4.674
HSDPA	9400	1880	4.1522	4.656
HSDPA	9538	1907.6	4.1564	4.674
HSUPA	9262	1852.4	4.1495	4.673
HSUPA	9400	1880	4.1588	4.665
HSUPA	9538	1907.6	4.1604	4.667

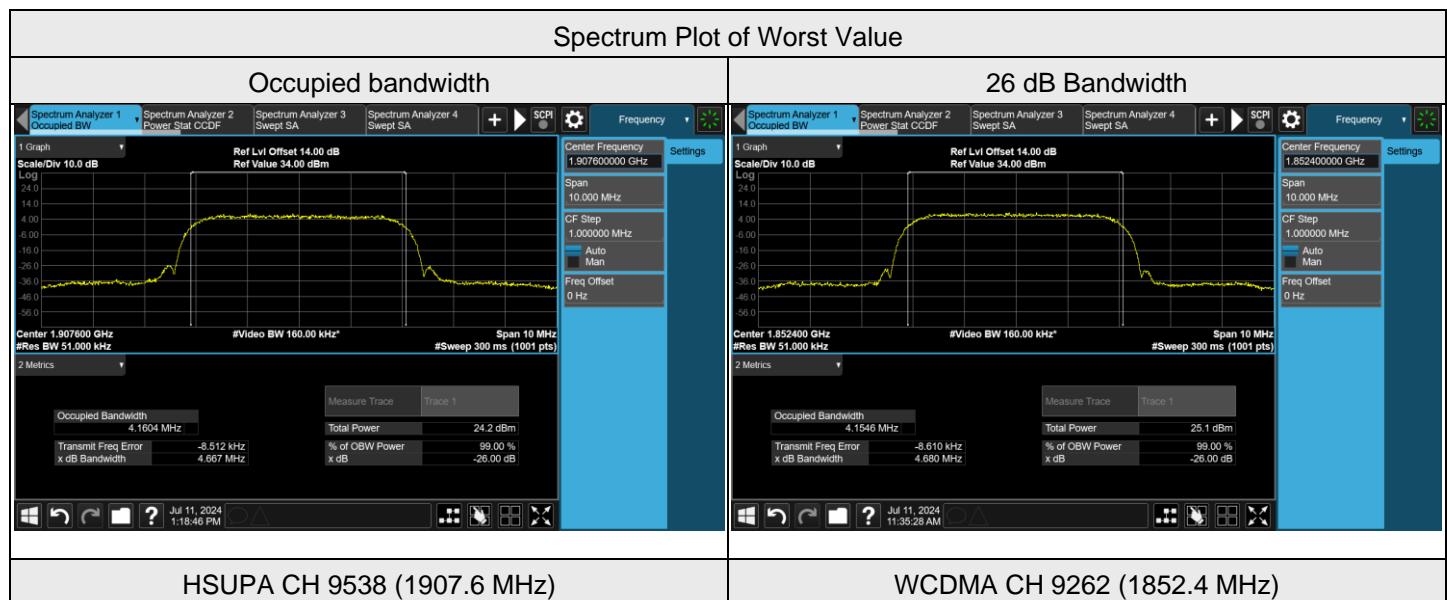


7.4.4 WCDMA Band 4

Modulation	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
WCDMA	1312	1712.4	4.1630	4.694
WCDMA	1413	1732.6	4.1628	4.690
WCDMA	1513	1752.6	4.1590	4.678
HSDPA	1312	1712.4	4.1578	4.685
HSDPA	1413	1732.6	4.1622	4.669
HSDPA	1513	1752.6	4.1550	4.678
HSUPA	1312	1712.4	4.1622	4.677
HSUPA	1413	1732.6	4.1592	4.686
HSUPA	1513	1752.6	4.1525	4.674

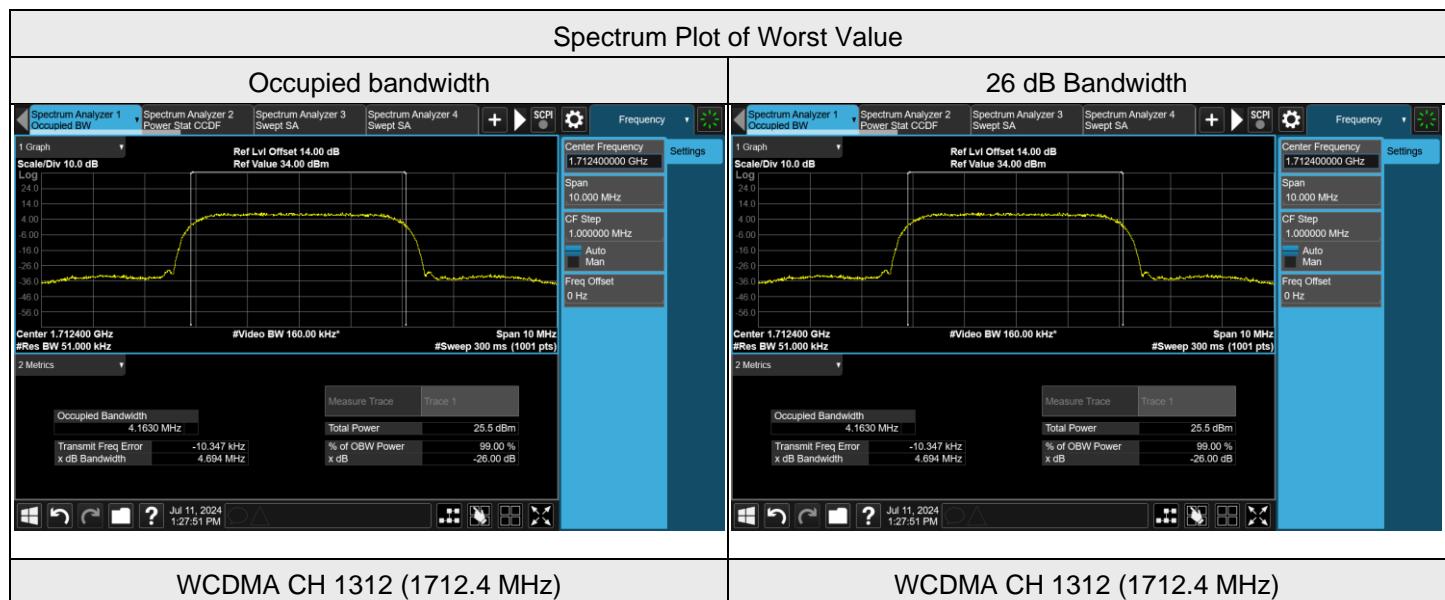

7.4.5 WCDMA Band 5

Modulation	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)	26 dB Bandwidth (MHz)
WCDMA	4132	826.4	4.1630	4.664
WCDMA	4182	836.4	4.1573	4.655
WCDMA	4223	846.6	4.1449	4.668
HSDPA	4132	826.4	4.1669	4.670
HSDPA	4182	836.4	4.1647	4.666
HSDPA	4223	846.6	4.1407	4.666
HSUPA	4132	826.4	4.1657	4.664
HSUPA	4182	836.4	4.1650	4.677
HSUPA	4223	846.6	4.1528	4.671

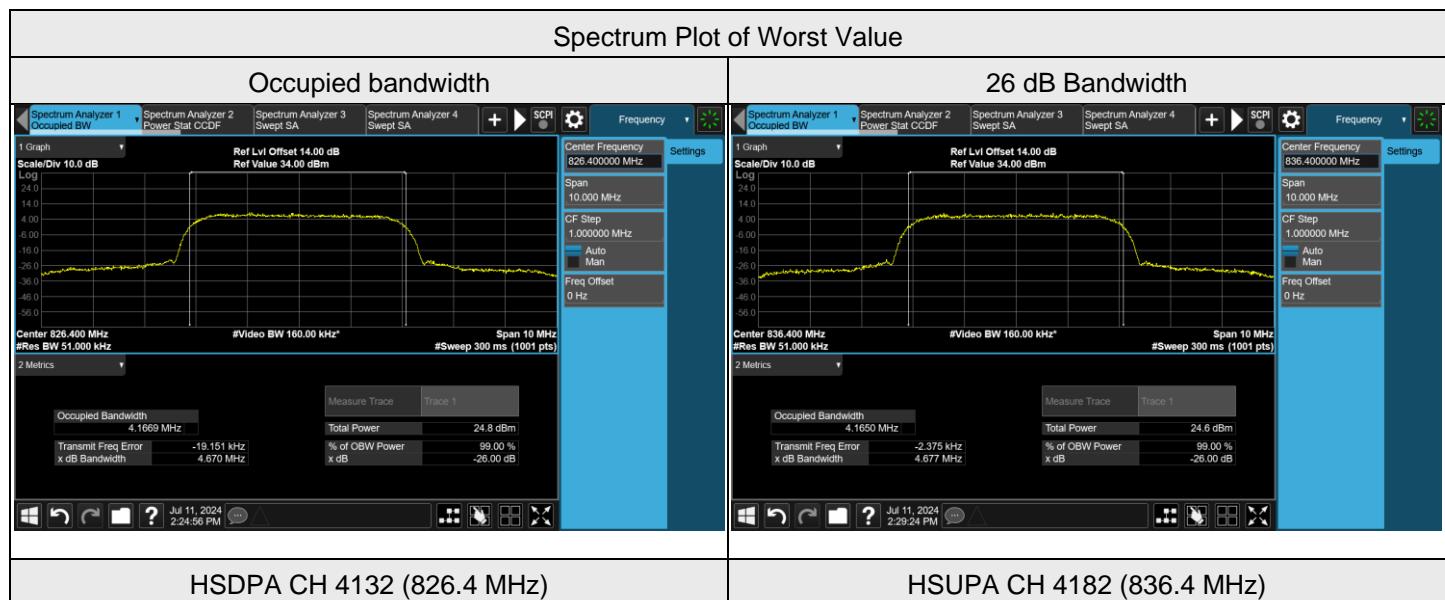

7.5 Conducted Spurious Emissions

Input Power:	4.7 Vdc	Environmental Conditions:	22°C, 68% RH	Tested By:	Noah Chang
--------------	---------	---------------------------	--------------	------------	------------

7.5.1 GSM850

GSM




Note: The signal at 9 kHz is IF signal from spectrum analyzer.



BUREAU
VERITAS



GPRS

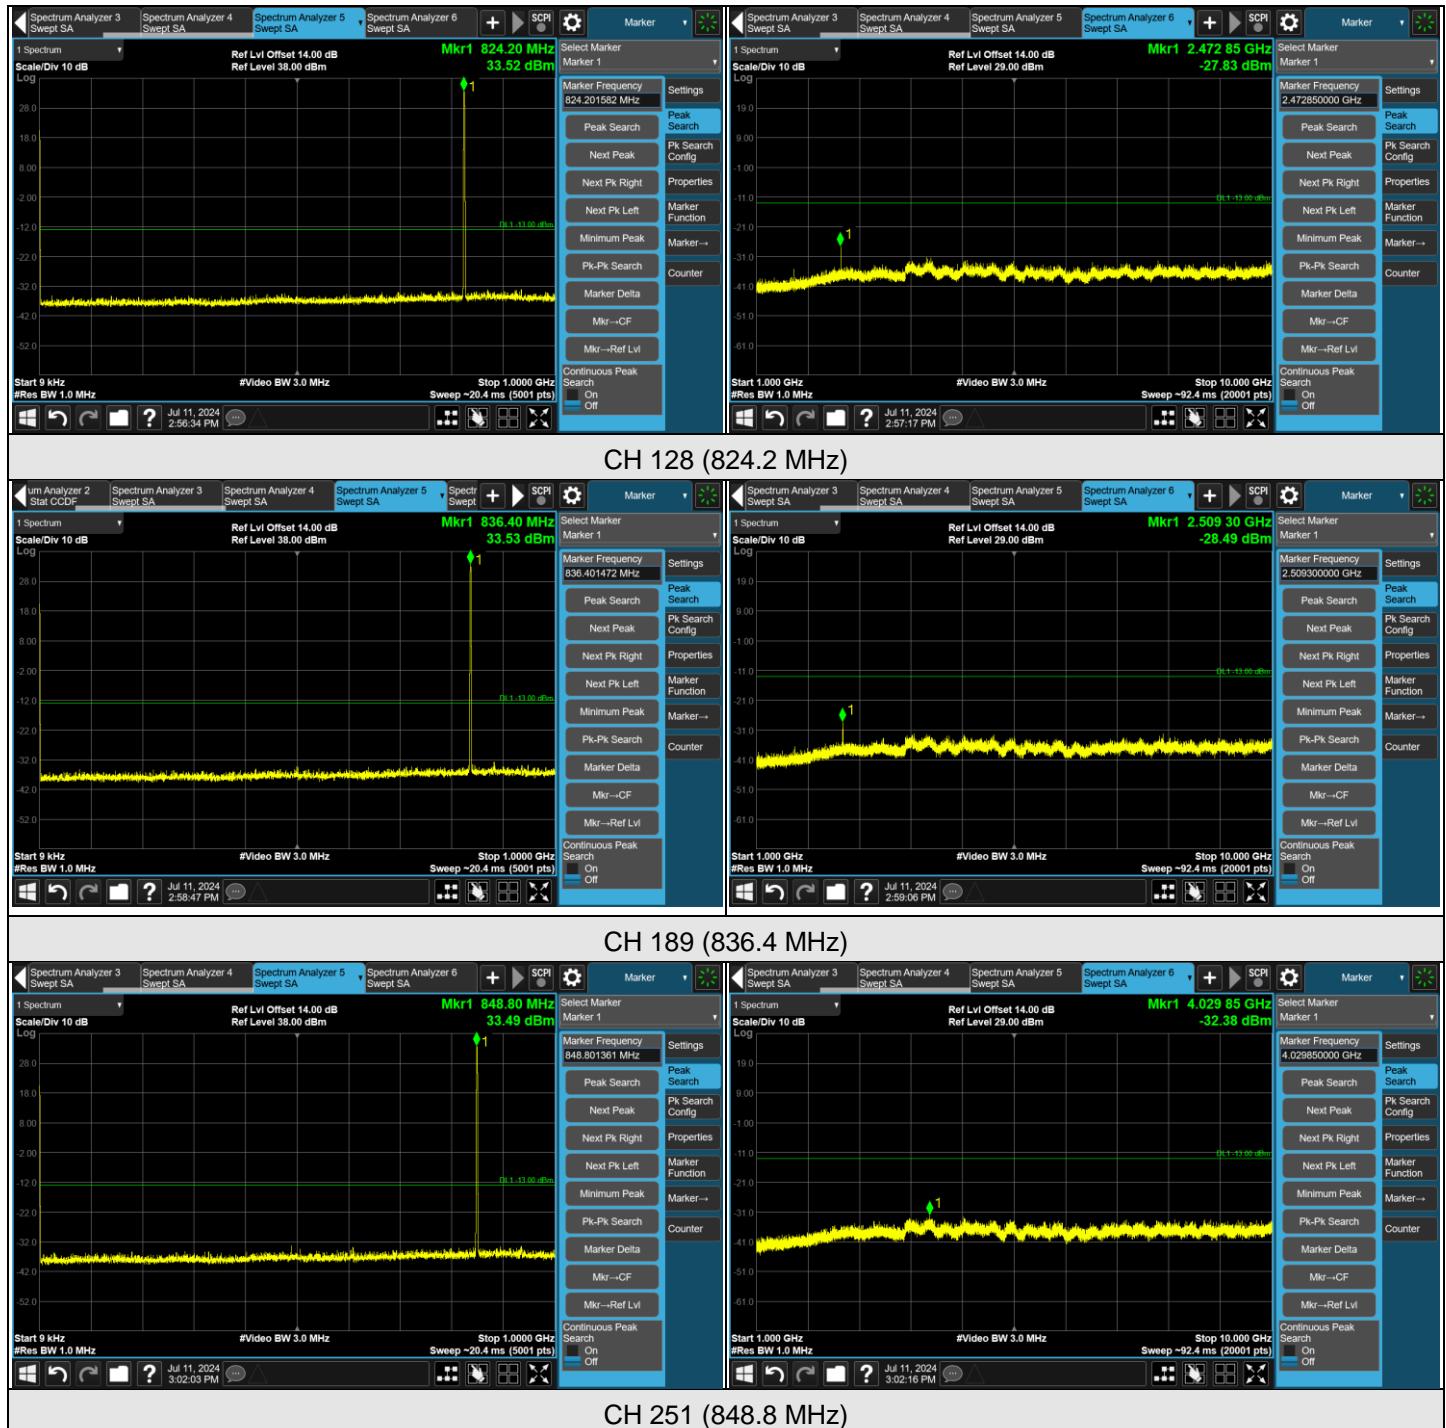

Note: The signal at 9 kHz is IF signal from spectrum analyzer.



BUREAU
VERITAS



EDGE


Note: The signal at 9 kHz is IF signal from spectrum analyzer.




BUREAU
VERITAS



7.5.2 GSM1900

GSM

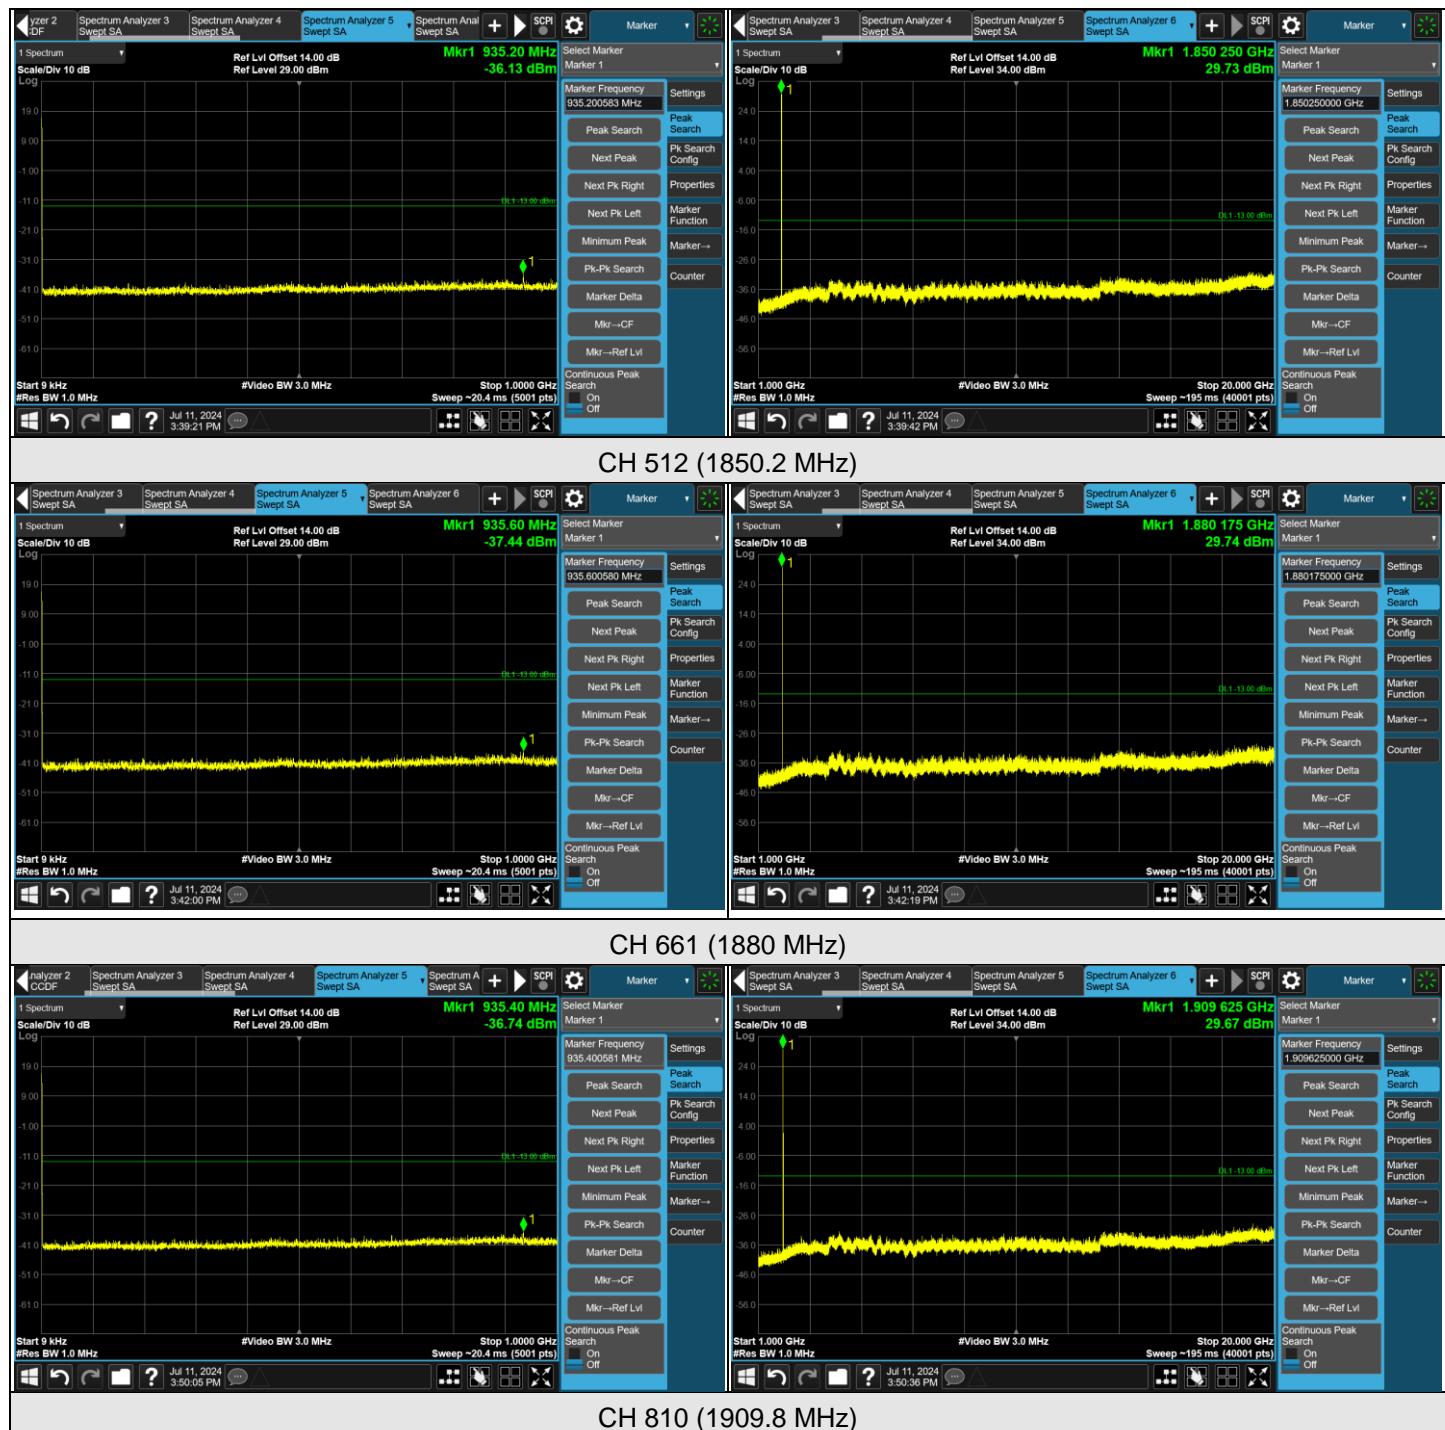

Note: The signal at 9 kHz is IF signal from spectrum analyzer.



BUREAU
VERITAS

