


NOTES:


- 1. MATERIAL: WHITE PET, T=0.075 ADHESIVE: EMBOSSED ADHESIVE, T=0.035 壓克力網紋背膠
- 2.FINISH: 霧PET, T=0.025 可打印
- 3. COLOR:
- a. BACKGROUND= PET COLOR (WHITE)
- b. PRINTING=PMS BLACK 6C
- 4. 捲狀進料,離型紙左右間距各 3 ± 0.5 mm, 上下間距各3 ± 0.3 mm
- 5.被貼物材質:塑膠
- 6.TEMPERATURE RESISTANT=120°C.
- 7.圖案印刷公差:尺寸30mm以下~120mm為±0.3mm,120~315mm為±0.5mm,315以上±0.8mm

8.UL

9.TEST REQUIREMENTS OR OTHER EQUIVALENT TEST METHOD

	TEST ITEM	TEST SPEC	TEST CONDITION	CRITERIA
1	附著力測試	ISO Class.: 1 ASTM Class.: 4 B	ASTM D3359-02/ ISO 2409:2007	Detachment of small flakes of the coating at the intersections of the cuts. A cross-cut area not significantly greater than 5% is affected.



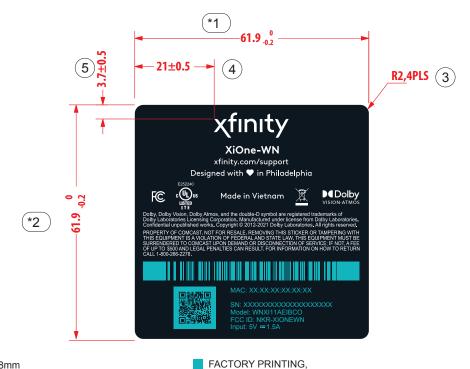

打印內容請參照以LABEL FORM為準

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN mm AND TOLERANCES ARE: INTEGRAL DIMENSIONS ± 0.2 1 PLACE DECIMAL ± 0.2 ANGULAR DIMENSIONS ± 2° HOLES UNDER Ø5.00 ± 0.2		THIRD ANGLE PROJECTION	Wistron NeWeb Corp. Wistro NeWeb Corp. Wistro Neweb Corp. Due Title 5					
		V V	DWG TITLE LABEL,PRODUCT LABEL,RIMR-BS2					
DRAWN	CATHY CHEN	08/31/21	SIZE	DWG NO.				REV
ENGR	CATHY CHEN	08/31/21	A4		4L.RIMRB.00602DT			
APVD	SANDY CHEN	08/31/21	SCALE	1/1		SHEET	1 OF 1	