

FCC TEST REPORT

REPORT NO.: RF910222R03

MODEL NO.: BT-500

RECEIVED: Feb. 22, 2002

TESTED: Feb. 22 ~ March 4, 2002

APPLICANT: Wistron NeWeb Corp.

ADDRESS: No. 10-1, Li-hsin Road I, Science-based
Industrial Park, Hsinchu 300, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB LOCATION: 47 14th Lin, Chiapau Tsun, Linko, Taipei,
Taiwan, R.O.C.

This test report consists of 59 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, NVLAP or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



Lab Code: 200102-0



TABLE OF CONTENTS

- 1 CERTIFICATION.....4
- 2 SUMMARY OF TEST RESULTS5
- 3 GENERAL INFORMATION6
 - 3.1 GENERAL DESCRIPTION OF EUT6
 - 3.2 DESCRIPTION OF TEST MODES7
 - 3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS7
 - 3.4 DESCRIPTION OF SUPPORT UNITS.....8
- 4 TEST PROCEDURES AND RESULTS9
 - 4.1 CONDUCTED EMISSION MEASUREMENT9
 - 4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT9
 - 4.1.2 TEST INSTRUMENTS9
 - 4.1.3 TEST PROCEDURES10
 - 4.1.4 TEST SETUP10
 - 4.1.5 TEST RESULTS11
 - 4.2 NUMBER OF HOPPING FREQUENCY USED17
 - 4.2.1 LIMIT OF HOPPING FREQUENCY USED17
 - 4.2.2 TEST INSTRUMENTS17
 - 4.2.3 TEST PROCEDURES18
 - 4.2.4 TEST SETUP18
 - 4.2.5 TEST RESULTS18
 - 4.3 DWELL TIME ON EACH CHANNEL21
 - 4.3.1 LIMIT OF DWELL TIME USED21
 - 4.3.2 TEST INSTRUMENTS21
 - 4.3.3 TEST PROCEDURES22
 - 4.3.4 TEST SETUP22
 - 4.3.5 TEST RESULTS23
 - 4.4 CHANNEL BANDWIDTH27
 - 4.4.1 LIMITS OF CHANNEL BANDWIDTH27
 - 4.4.2 TEST INSTRUMENTS27
 - 4.4.3 TEST PROCEDURE28
 - 4.4.4 TEST SETUP28
 - 4.4.5 EUT OPERATING CONDITION28
 - 4.4.6 TEST RESULTS29
 - 4.5 HOPPING CHANNEL SEPARATION.....33



4.5.1	LIMIT OF HOPPING CHANNEL SEPARATION	33
4.5.2	TEST INSTRUMENTS	33
4.5.3	TEST PROCEDURES	34
4.5.4	TEST SETUP	34
4.5.5	TEST RESULTS	34
4.6	MAXIMUM PEAK OUTPUT POWER	38
4.6.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	38
4.6.2	INSTRUMENTS.....	38
4.6.3	TEST PROCEDURES	39
4.6.4	TEST SETUP	39
4.6.5	EUT OPERATING CONDITION	39
4.6.6	TEST RESULTS	40
4.7	RADIATED EMISSION MEASUREMENT	44
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	44
4.7.2	TEST INSTRUMENTS	45
4.7.3	TEST PROCEDURES	46
4.7.4	TEST SETUP	47
4.7.5	TEST RESULTS	48
4.7.6	TEST RESULTS	49
4.8	BAND EDGES MEASUREMENT	52
4.8.1	LIMITS OF BAND EDGES MEASUREMENT	52
4.8.2	TEST INSTRUMENTS	52
4.8.3	TEST PROCEDURE	52
4.8.4	EUT OPERATING CONDITION	53
4.8.5	TEST RESULTS	53
4.9	ANTENNA REQUIREMENT	56
4.9.1	STANDARD APPLICABLE	56
4.9.2	ANTENNA CONNECTED CONSTRUCTION.....	56
5	PHOTOGRAPHS OF THE TEST CONFIGURATION.....	57
6	INFORMATION ON THE TESTING LABORATORIES	59



1 CERTIFICATION

PRODUCT : Bluetooth Dongle
BRAND NAME : Wistron NeWeb
MODEL NO. : BT-500
APPLICANT : Wistron NeWeb Corp.
STANDARDS : 47 CFR Part 15, Subpart C (Section 15.247),
ANSI C63.4-1992, Canada RSS 210,
New Zealand RFS 29

We, **Advance Data Technology Corporation**, hereby certify that one sample of the designation has been tested in our facility from Feb. 22, 2002 to March 4, 2002, The test record, data evaluation and Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions herein specified.

TESTED BY: Gary Chang , DATE: Mar. 8, 2002
Gary Chang

CHECKED BY: Emily Lu , DATE: Mar. 8, 2002
Emily Lu

APPROVED BY: Alan Lane , DATE: Mar. 8, 2002
Dr. Alan Lane
Manager

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: 47 CFR Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	REMARK
15.107	AC Power Conducted Emission Limit: 48dBuV	PASS	Meet the requirement of limit Minimum passing margin is -8.09 dBuV at 2.008 MHz
15.247(a)(1)(I)-(ii)	Number of Hopping Frequency Used Spec.: At least 75 channels	PASS	Meet the requirement of limit
15.247(a)(1)(ii)	Dwell Time on Each Channel Spec. : Max. 0.4 second within 30 second	PASS	Meet the requirement of limit
15.247(a)(1)(I)-(ii)	Hopping Channel Separation Spec. : Min. 25 kHz or 20 dB bandwidth	PASS	Meet the requirement of limit
15.247(a)(2)	Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System Spec.: Max. 1 MHz	PASS	Meet the requirement of limit
15.247(b)	Maximum Peak Output Power Spec.: max. 30dBm	PASS	Meet the requirement of limit
15.247(c)	Transmitter Radiated Emissions Spec.: Table 15.209	PASS	Meet the requirement of limit Minimum passing margin is -3.2 dBuV at 4804.0MHz
15.247(c)	Band Edge Measurement	PASS	Meet the requirement of limit

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth Dongle
MODEL NO.	BT-500
POWER SUPPLY	5.0VDC from host equipment
MODULATION TYPE	FHSS (GFSK)
FREQUENCY RANGE	2402MHz ~ 2480MHz
NUMBER OF CHANNEL	79
OUTPUT POWER	-1dBm
ANTENNA TYPE	Meander IFA
DATA CABLE	NA
I/O PORTS	USB port
ASSOCIATED DEVICES	NA

NOTE: For a more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a Bluetooth Dongle. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC CFR 47 Part 15, Subpart C. (15.247)

ANSI C63.4 : 1992, Canada RSS 210, New Zealand RFS 29

All tests have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP01L	TW-09C748-12800-190-B220	FCC DoC APPROVED
2	PRINTER	HP	2225C+	3123S97230	DSI6XU2225
3	MODEM	ACEEX	1414	980020510	IFAXDM1414

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m braid shielded wire, terminated with DB25 and Centronics connector via metallic frame, w/o core.
3	1.2 m braid shielded wire, terminated with DB25 and DB9 connector via metallic frame, w/o core.

NOTE: All power cords of the above support units are non shielded (1.8m).

4 TEST PROCEDURES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.45 – 30	48	-	48	-

Notes:

- The lower limit shall apply at the transition frequencies.
- All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS30	845552/004	May. 22, 2002
ROHDE & SCHWARZ Artificial Mains Network (for EUT)	ESH2-Z5	828075/003	July 19, 2002
ROHDE & SCHWARZ 200-A Four-line V-Network	ENV4200	830326/018	Oct. 25, 2002
* ROHDE & SCHWARZ 4-wire ISN	ENY41	838119/028	Dec. 2, 2002
* ROHDE & SCHWARZ 2-wire ISN	ENY22	837497/018	Dec. 2, 2002
EMCO-L.I.S.N. (for peripheral)	3825/2	90031627	July 19, 2002
Software	Cond-V2L	NA	NA
RF cable (JYEBAO)	5D-FB	Cable-C05.01	July 19, 2002
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-305	Feb. 20, 2003
LYNICS Terminator (For EMCO LISN)	0900510	E1-01-306	Feb. 20, 2003
Shielded Room	Site 5	ADT-C05	NA
VCCI Site Registration No.	Site 5	C-1093	NA

NOTE: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.


2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

3. “*”: These equipment are used for conducted telecom port test only (if tested).

4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 450 kHz to 30 MHz was searched. Emission levels over 10dB under the prescribed limits could not be reported

4.1.4 TEST SETUP

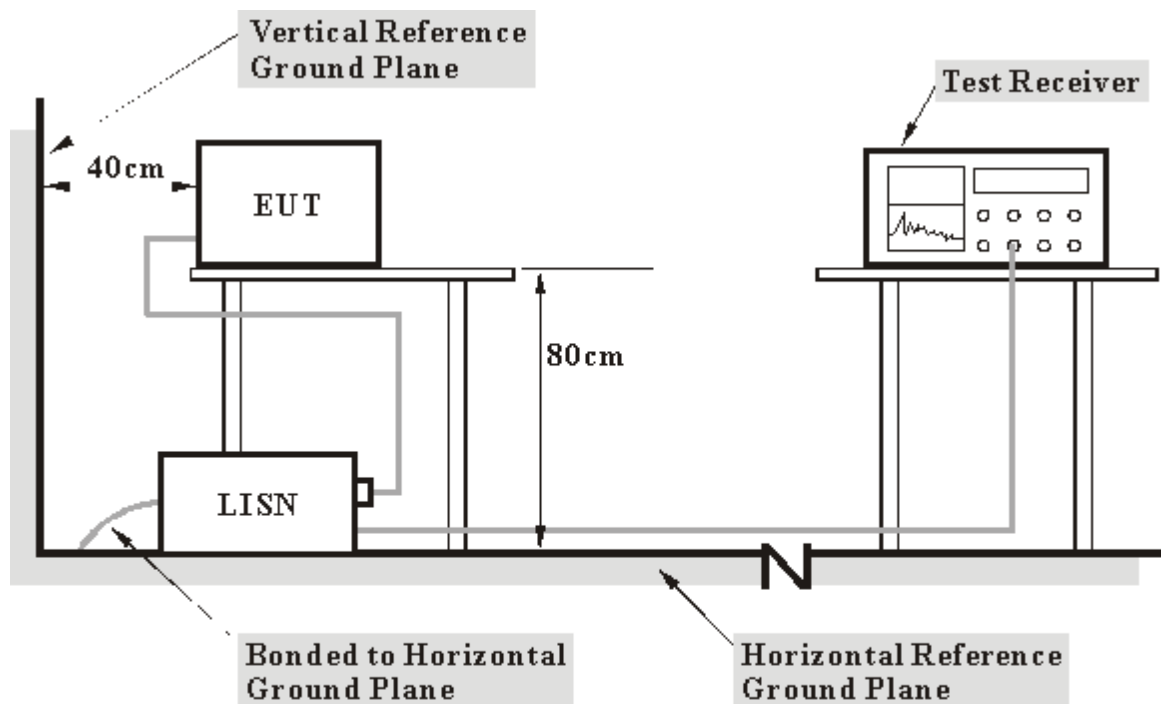

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.




4.1.5 TEST RESULTS

EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 0	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.516	0.12	29.77	-	29.89	-	48.00	-	-18.11	-
2	1.090	0.20	35.23	-	35.43	-	48.00	-	-12.57	-
3	2.180	0.22	39.10	-	39.32	-	48.00	-	-8.68	-
4	5.160	0.44	37.15	-	37.59	-	48.00	-	-10.41	-
5	8.371	0.55	32.17	-	32.72	-	48.00	-	-15.28	-
6	22.570	1.10	34.48	-	35.58	-	48.00	-	-12.42	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

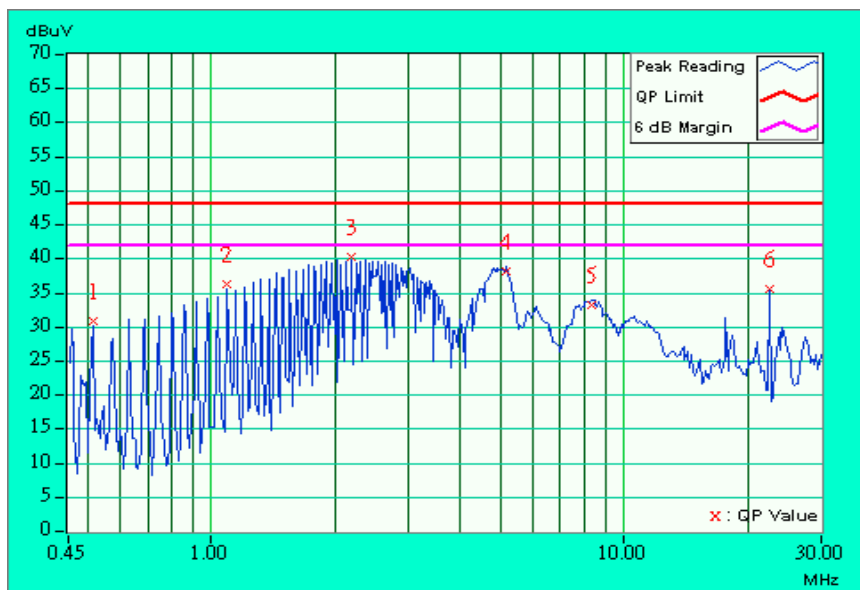




EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 0	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.460	0.11	30.27	-	30.38	-	48.00	-	-17.62	-
2	1.090	0.20	35.23	-	35.43	-	48.00	-	-12.57	-
3	2.008	0.20	39.69	-	39.89	-	48.00	-	-8.11	-
4	4.934	0.32	38.36	-	38.68	-	48.00	-	-9.32	-
5	8.547	0.38	32.06	-	32.44	-	48.00	-	-15.56	-
6	22.570	0.75	34.82	-	35.57	-	48.00	-	-12.43	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

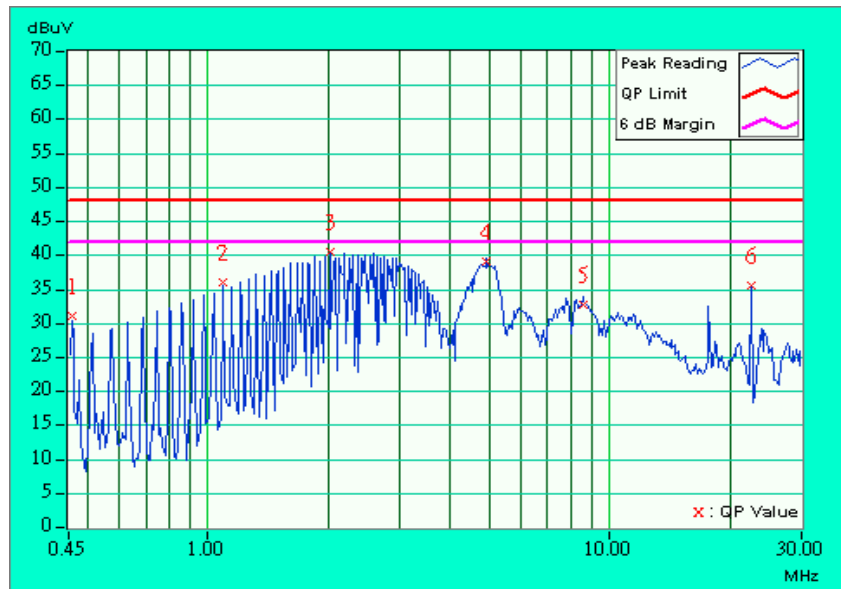




EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 39	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.516	0.12	29.61	-	29.73	-	48.00	-	-18.27	-
2	1.434	0.20	36.86	-	37.06	-	48.00	-	-10.94	-
3	2.008	0.20	38.62	-	38.82	-	48.00	-	-9.18	-
4	4.992	0.43	37.67	-	38.10	-	48.00	-	-9.90	-
5	7.918	0.53	32.42	-	32.95	-	48.00	-	-15.05	-
6	22.570	1.10	34.42	-	35.52	-	48.00	-	-12.48	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

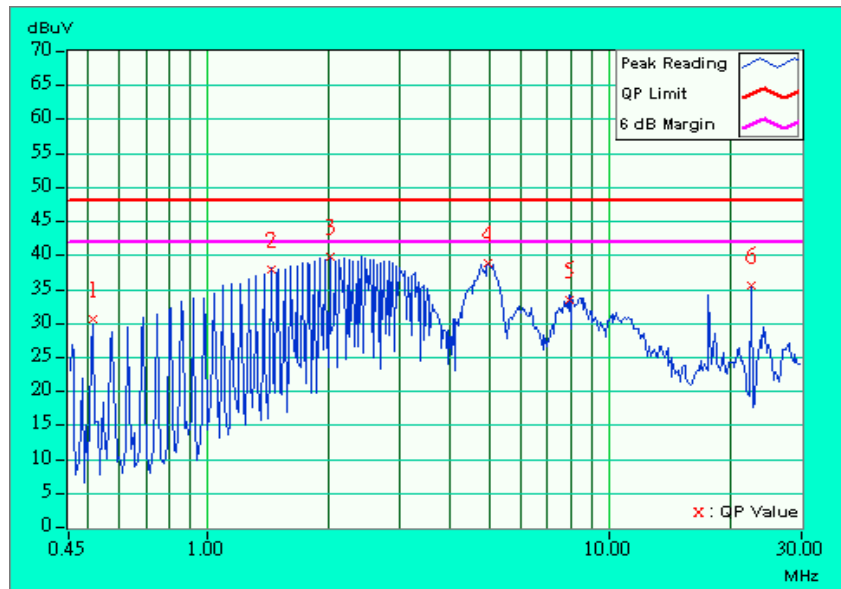




EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 39	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Neutral (N)
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq.	Corr. Factor	Reading Value [dB (Uv)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.458	0.11	29.92	-	30.03	-	48.00	-	-17.97	-
2	1.262	0.20	36.51	-	36.71	-	48.00	-	-11.29	-
3	2.008	0.20	39.71	-	39.91	-	48.00	-	-8.09	-
4	4.992	0.32	37.85	-	38.17	-	48.00	-	-9.83	-
5	7.973	0.37	32.16	-	32.53	-	48.00	-	-15.47	-
6	22.570	0.75	34.76	-	35.51	-	48.00	-	-12.49	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

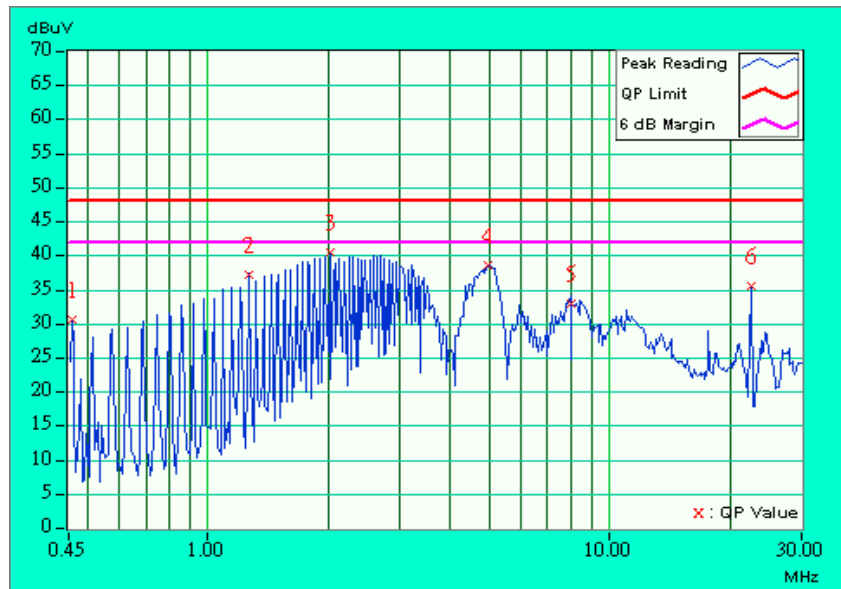




EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 78	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Line (L)
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.516	0.12	29.61	-	29.73	-	48.00	-	-18.27	-
2	1.434	0.20	36.86	-	37.06	-	48.00	-	-10.94	-
3	2.008	0.20	38.62	-	38.82	-	48.00	-	-9.18	-
4	4.992	0.43	37.67	-	38.10	-	48.00	-	-9.90	-
5	7.918	0.53	32.42	-	32.95	-	48.00	-	-15.05	-
6	22.570	1.10	34.42	-	35.52	-	48.00	-	-12.48	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

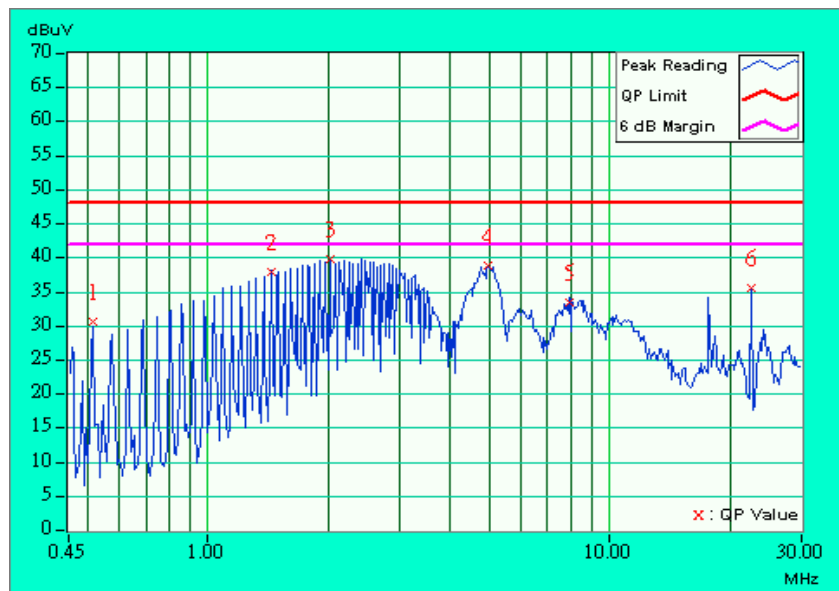




EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 78	6dB BANDWIDTH	10 kHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	PHASE	Netural (N)
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 1005 hPa	TESTED BY: James Lee	

No	Freq.	Corr. Factor	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
	[MHz]		(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.516	0.12	29.81	-	29.93	-	48.00	-	-18.07	-
2	1.031	0.20	34.04	-	34.24	-	48.00	-	-13.76	-
3	2.180	0.21	39.54	-	39.75	-	48.00	-	-8.25	-
4	4.992	0.32	37.83	-	38.15	-	48.00	-	-9.85	-
5	8.262	0.37	32.59	-	32.96	-	48.00	-	-15.04	-
6	22.570	0.75	34.72	-	35.47	-	48.00	-	-12.53	-

NOTE:

1. QP. and AV. are abbreviations of quasi-peak and average individually.
2. "-": NA
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Emission Level = Reading Value + Correction Factor.

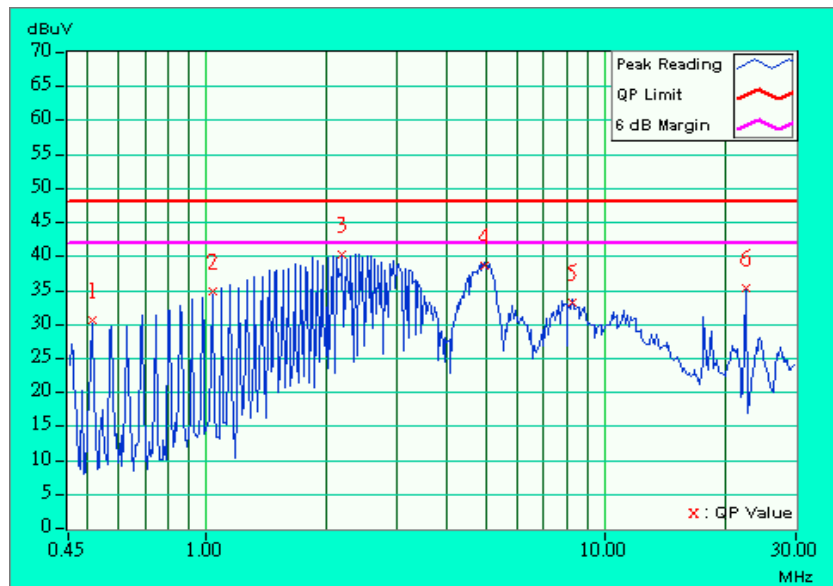

4.2 NUMBER OF HOPPING FREQUENCY USED

4.2.1 LIMIT OF HOPPING FREQUENCY USED

At least 75 hopping frequencies, and should be equally spaced.

4.2.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTE:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURES


1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
4. Set the SA on View mode and then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.


4.2.4 TEST SETUP



4.2.5 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.

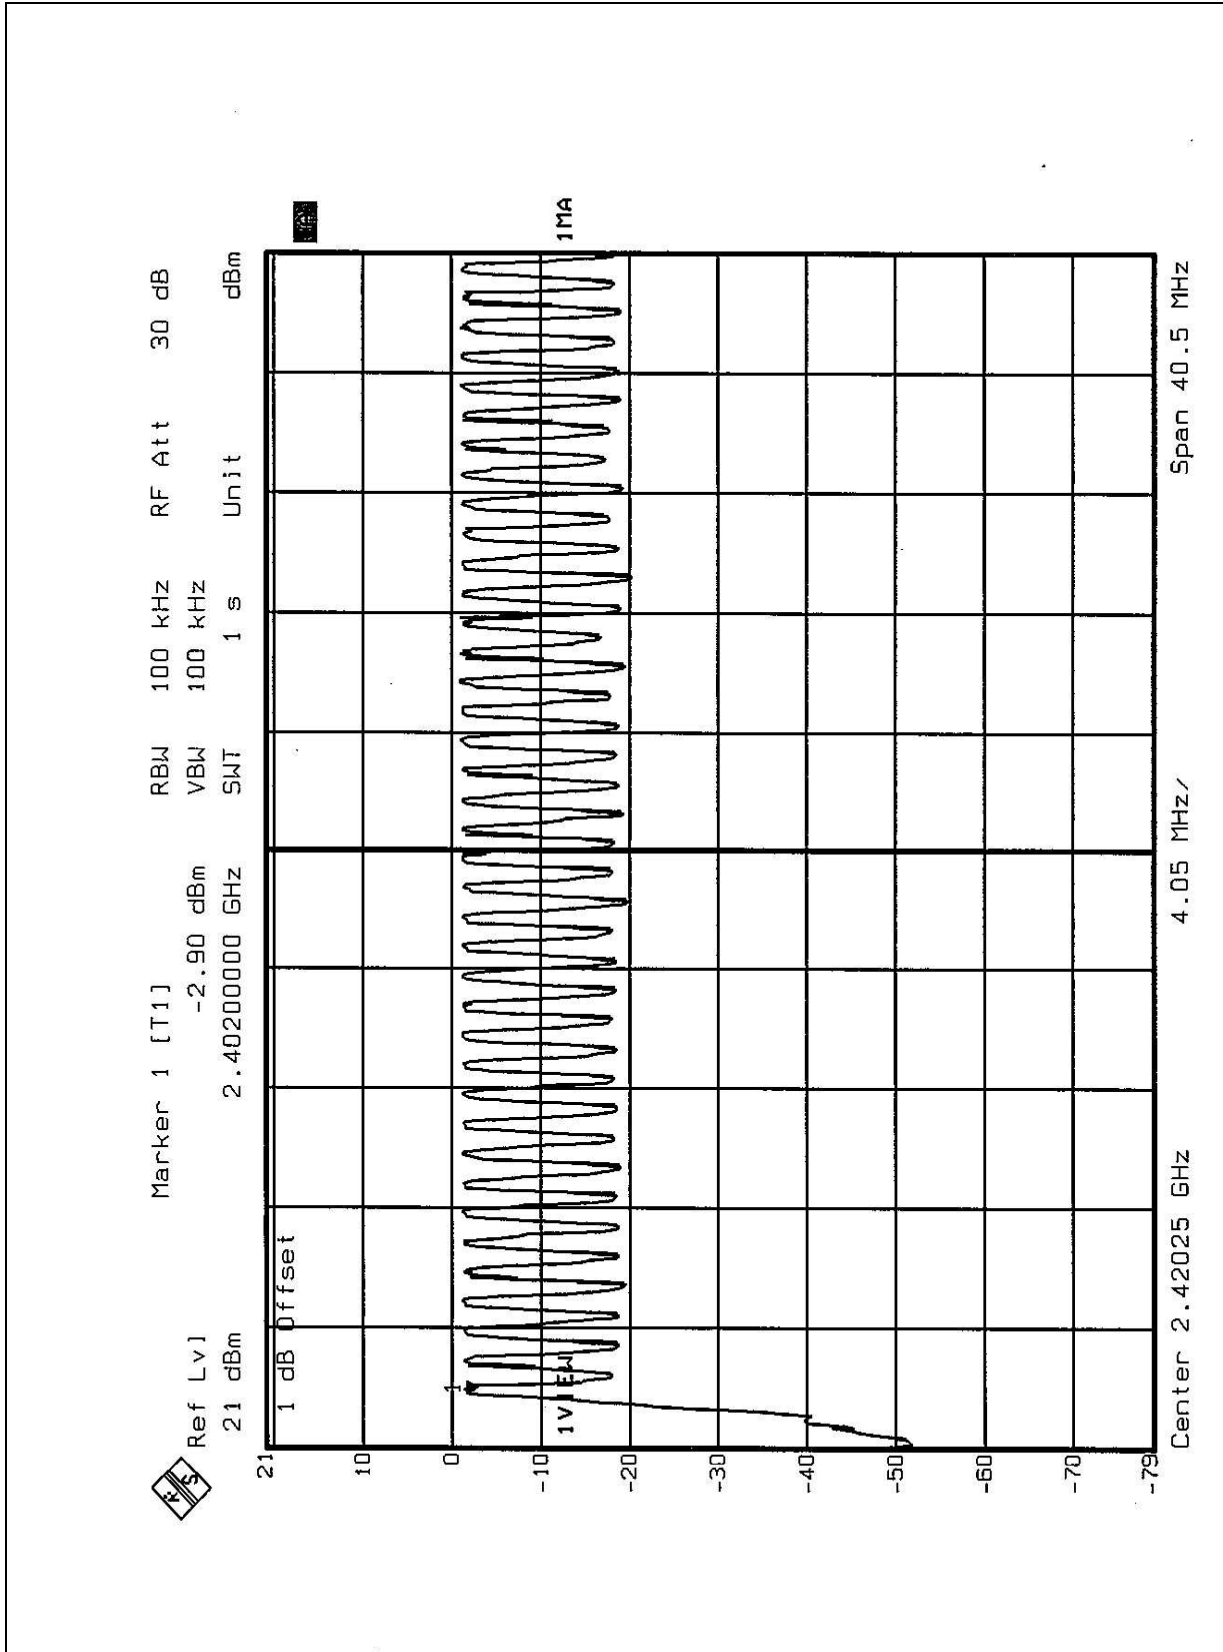

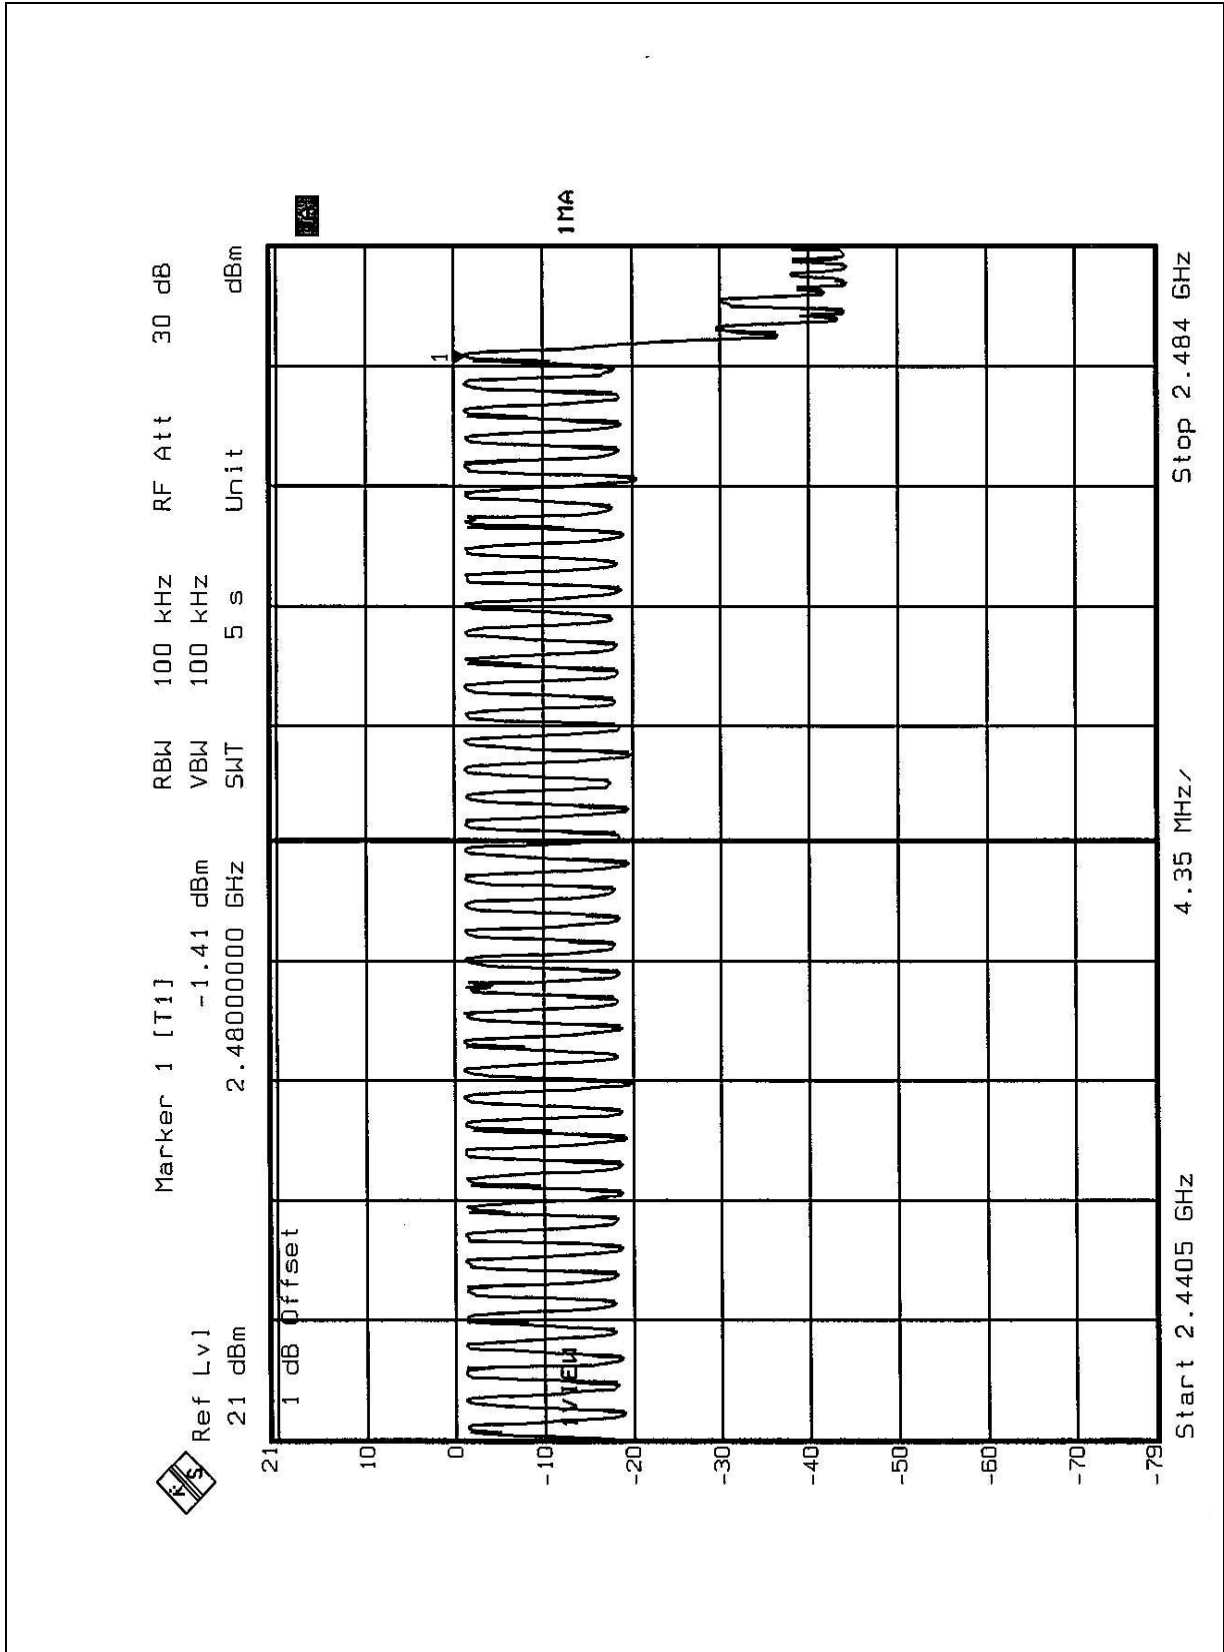

4.3 DWELL TIME ON EACH CHANNEL

4.3.1 LIMIT OF DWELL TIME USED

For FHSS, the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 30 second period. For hybrid systems, the average time of occupancy on any frequency should not exceed 0.4 seconds within a time period in seconds equal to the number of hopping frequencies employed multiplied by 0.4.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

NOTES:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
4. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
5. Repeat above procedures until all frequencies measured were complete.

4.3.4 TEST SETUP





4.3.5 TEST RESULTS


CHANNEL	DWELL TIME
0	341.54ms
39	340.93ms
78	340.93ms

Note : This product is averagely hopped on 79 frequencies. The maximum hopping rate is 500 hops/sec. The longest pulse duration is 562.12 μ sec.

So, the longest Dwell Time = $562.12 \mu \text{ sec} \times 1600 \div 79 \times 30 = 341.54 \text{ msec.}$ which is smaller than 0.4sec.


Test plots of the transmitting time slot are shown on next three pages.

Channel 0

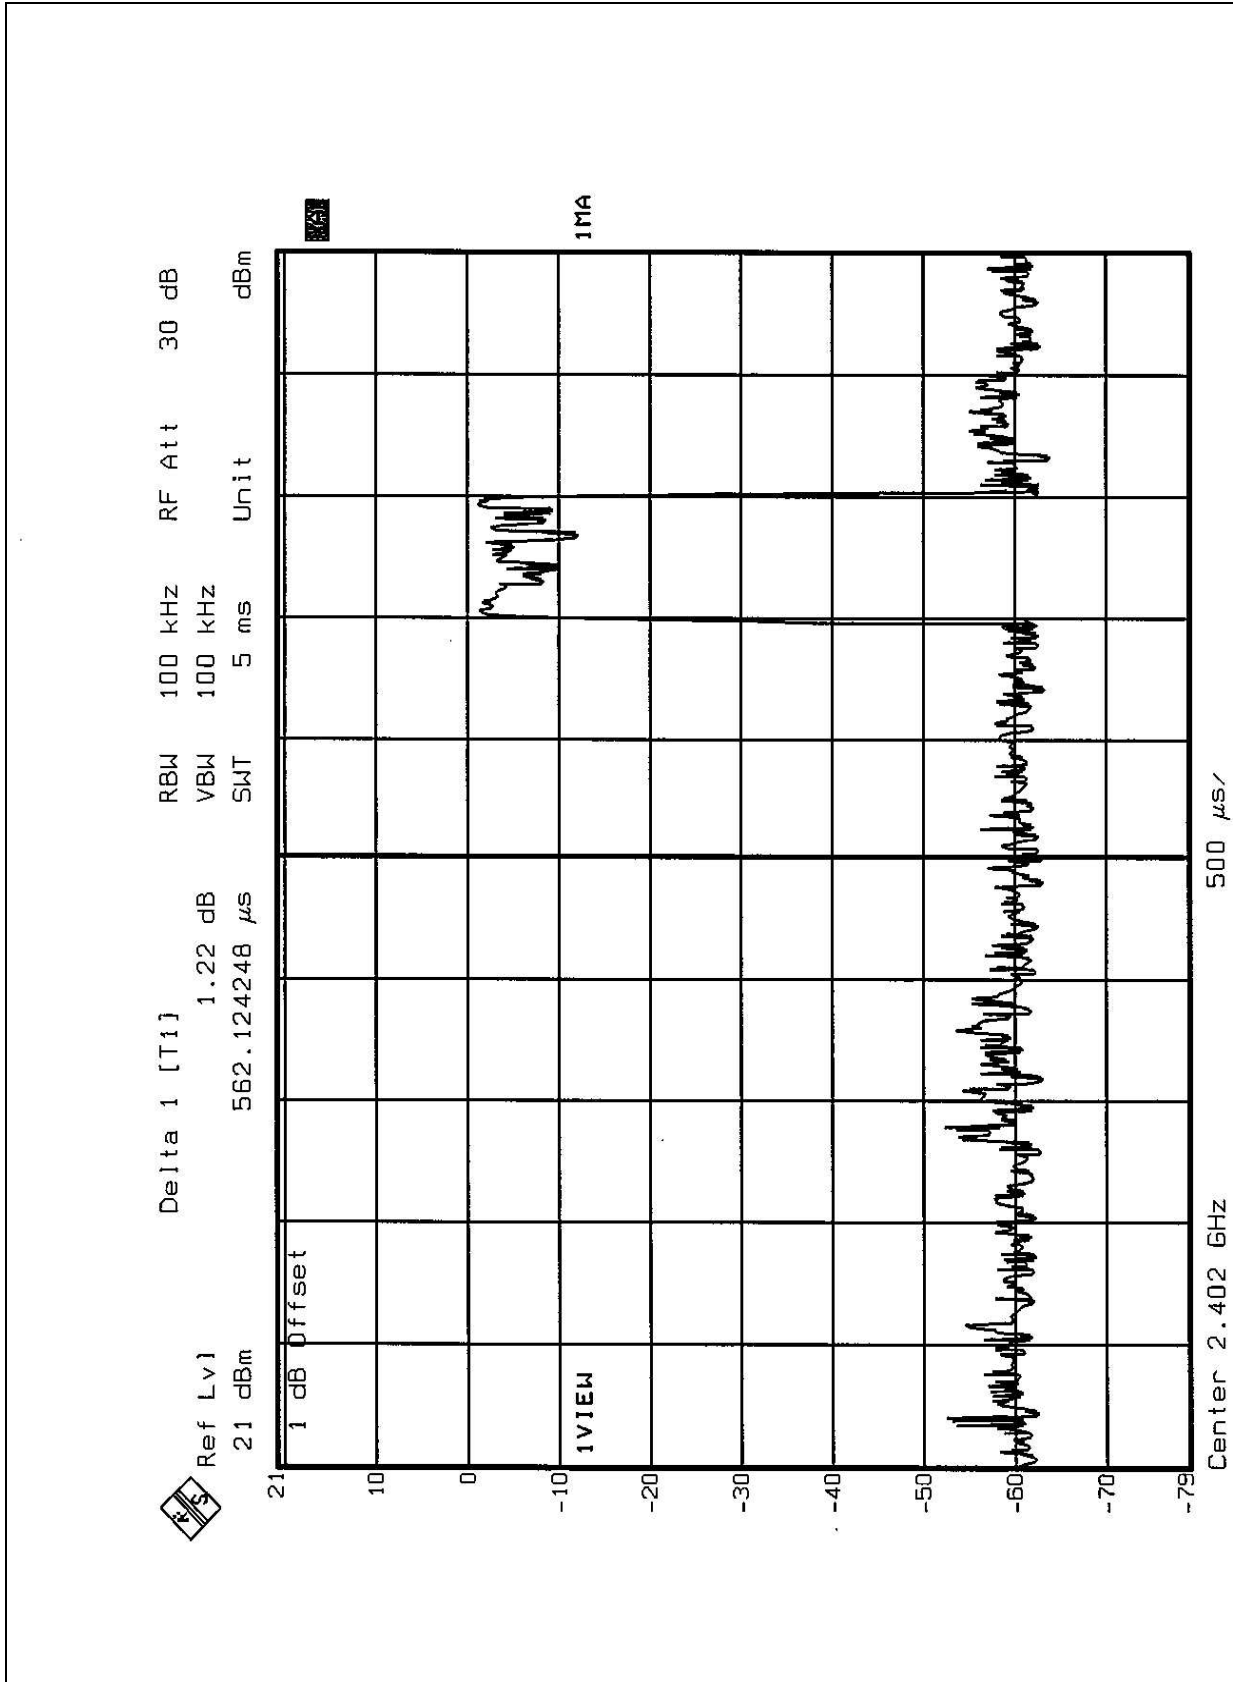




Channel 39

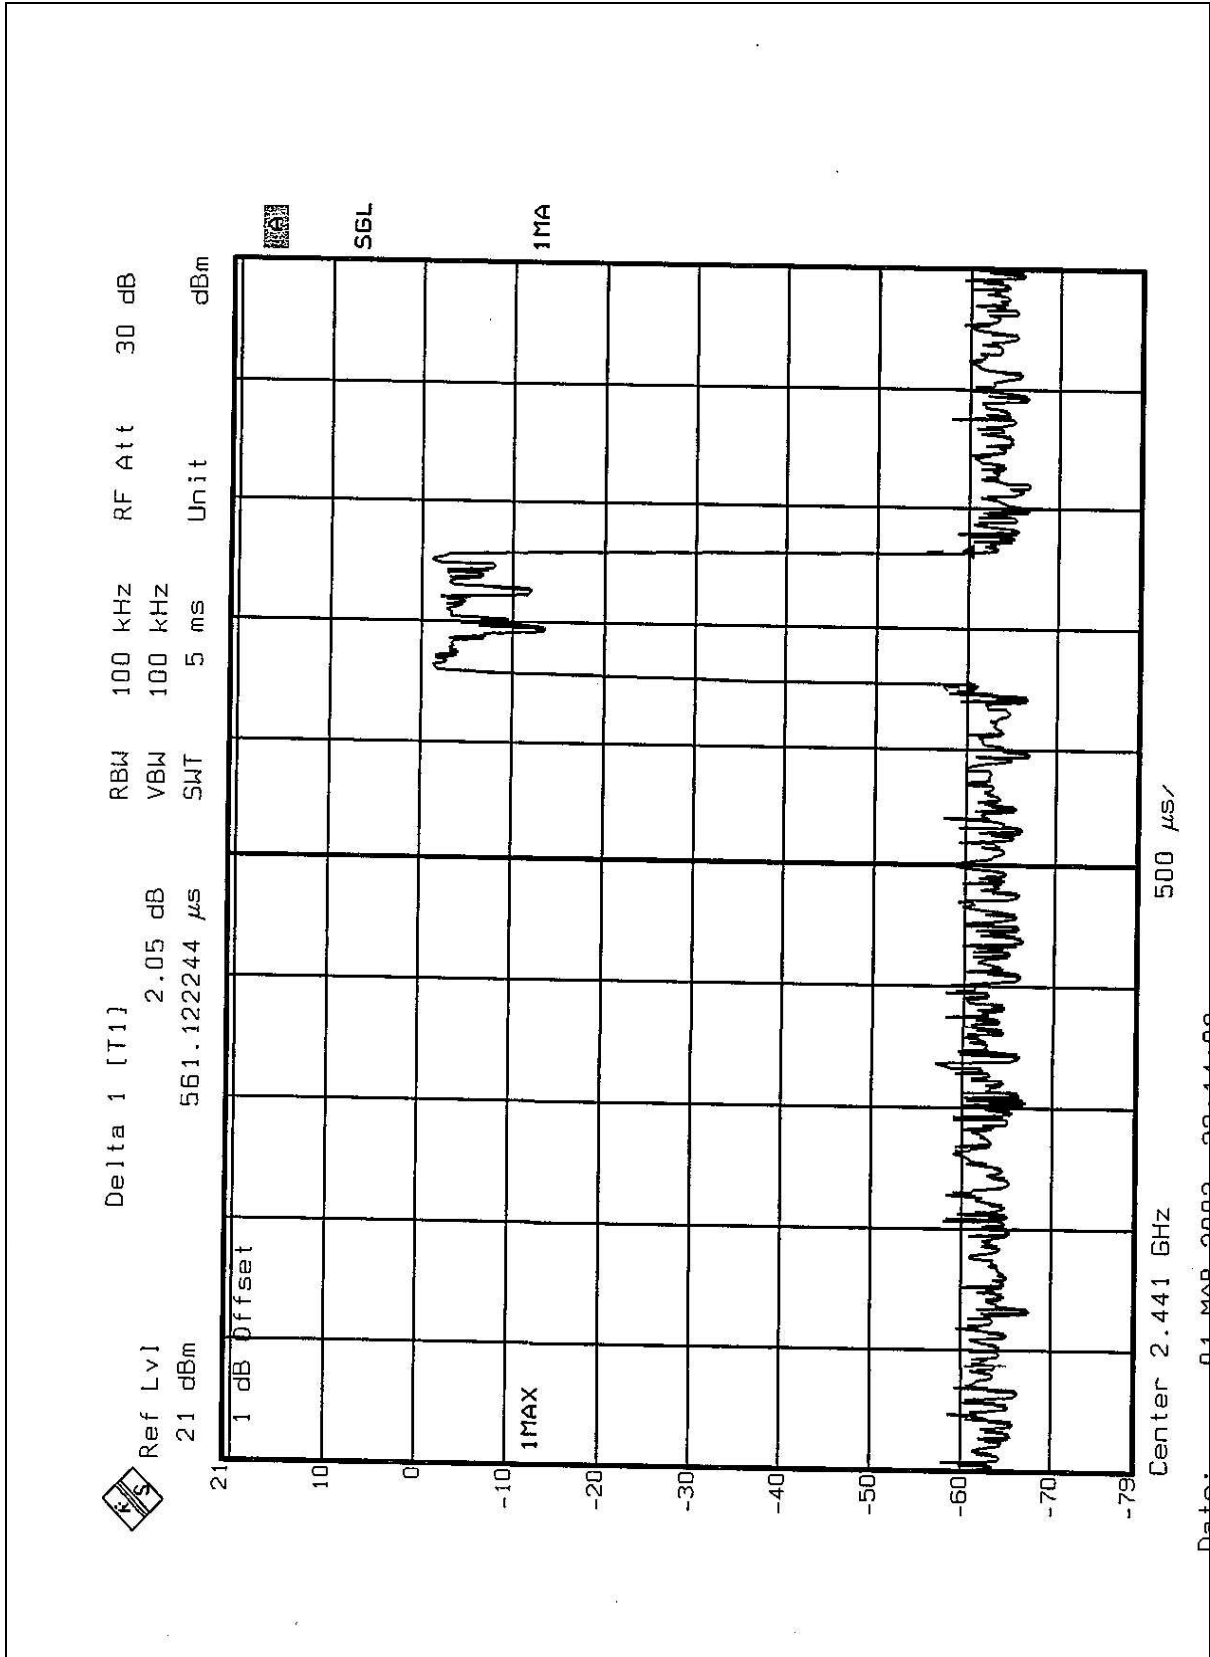

Channel 78

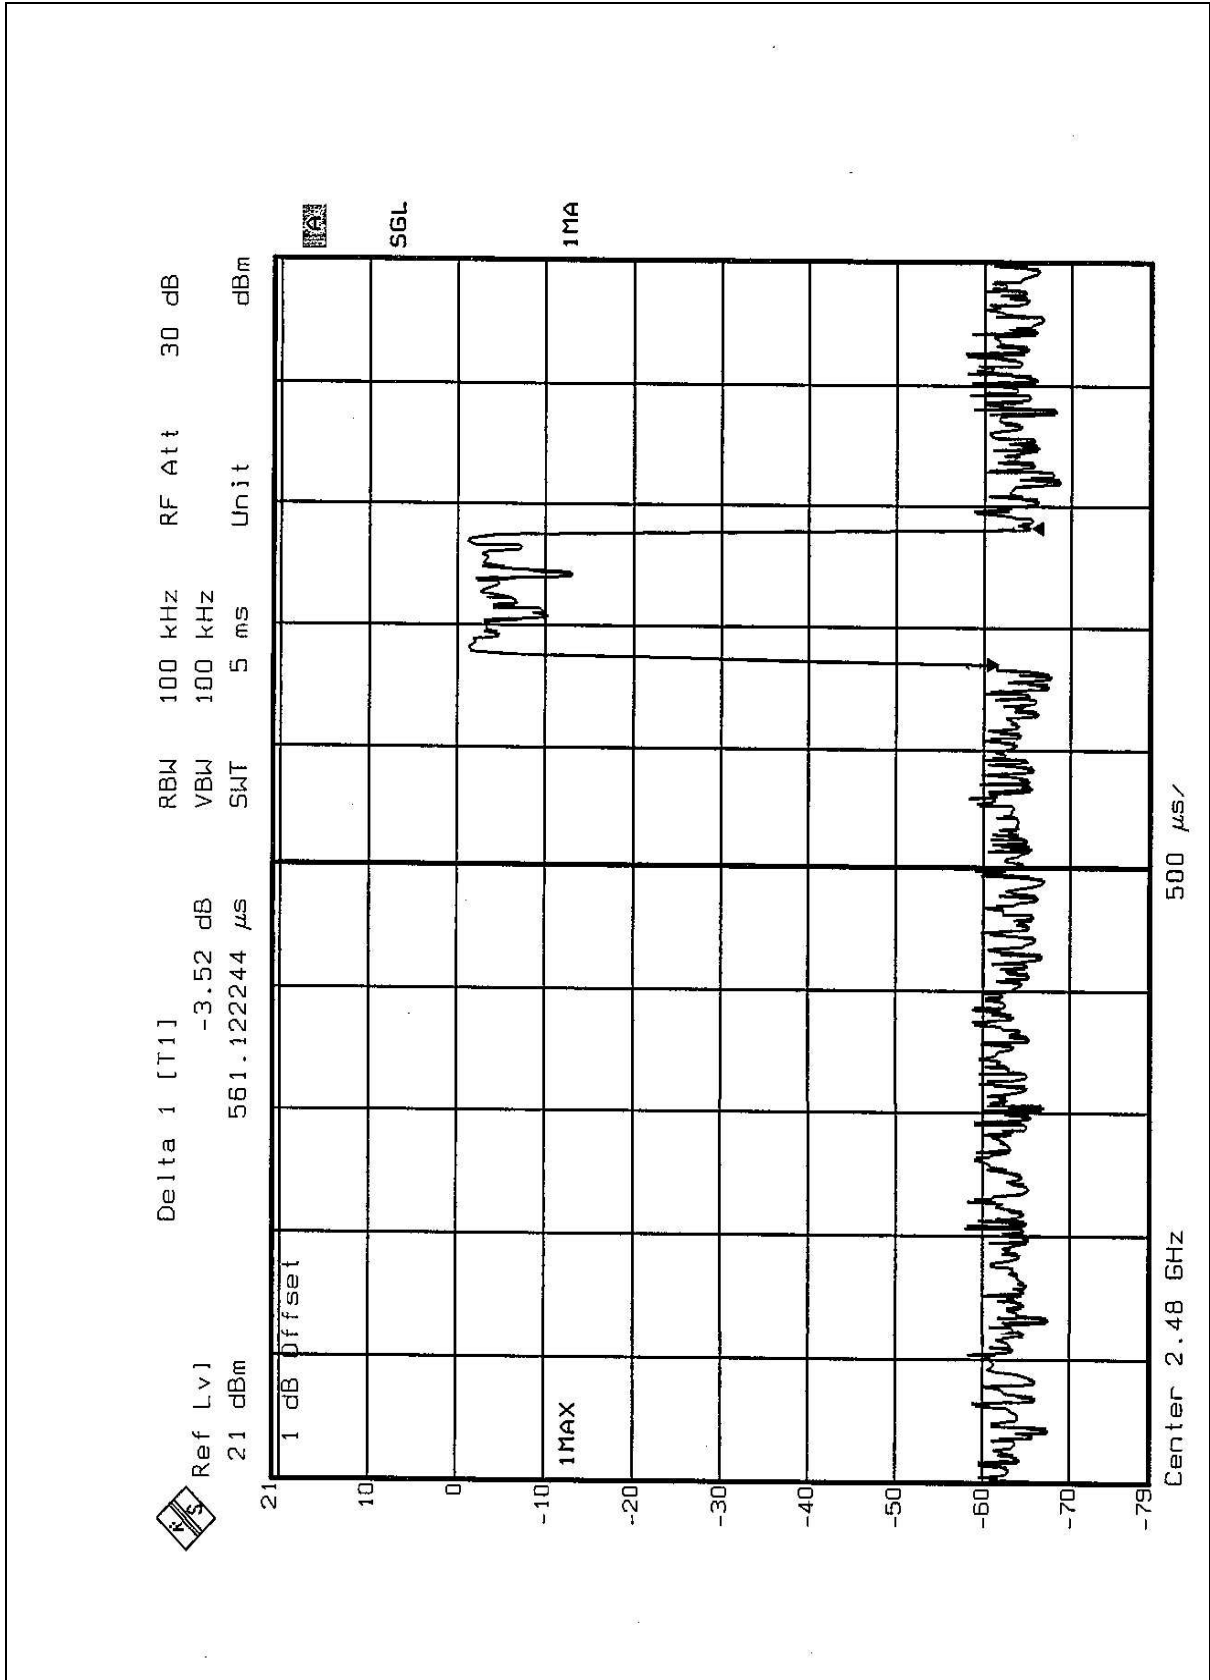



4.4 CHANNEL BANDWIDTH

4.4.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5 MHz and 5725-5850 MHz bands, the maximum 20 dB bandwidth of the hopping channel is 1 MHz.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002


NOTES:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST PROCEDURE

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
4. Repeat above procedures until all frequencies measured were complete.

4.4.4 TEST SETUP

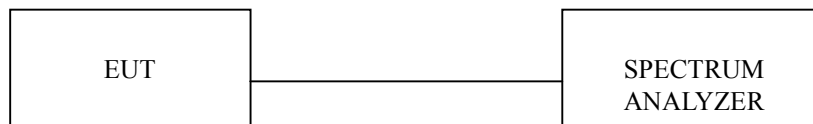


4.4.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.


4.4.6 TEST RESULTS

CHANNEL	CHANNEL FREQUENCY (MHz)	20 dB BANDWIDTH (kHz)	MAXIMUM LIMIT (MHz)	PASS/FAIL
0	2402	829.66	1	PASS
39	2441	829.66	1	PASS
78	2480	829.66	1	PASS


Channel 0

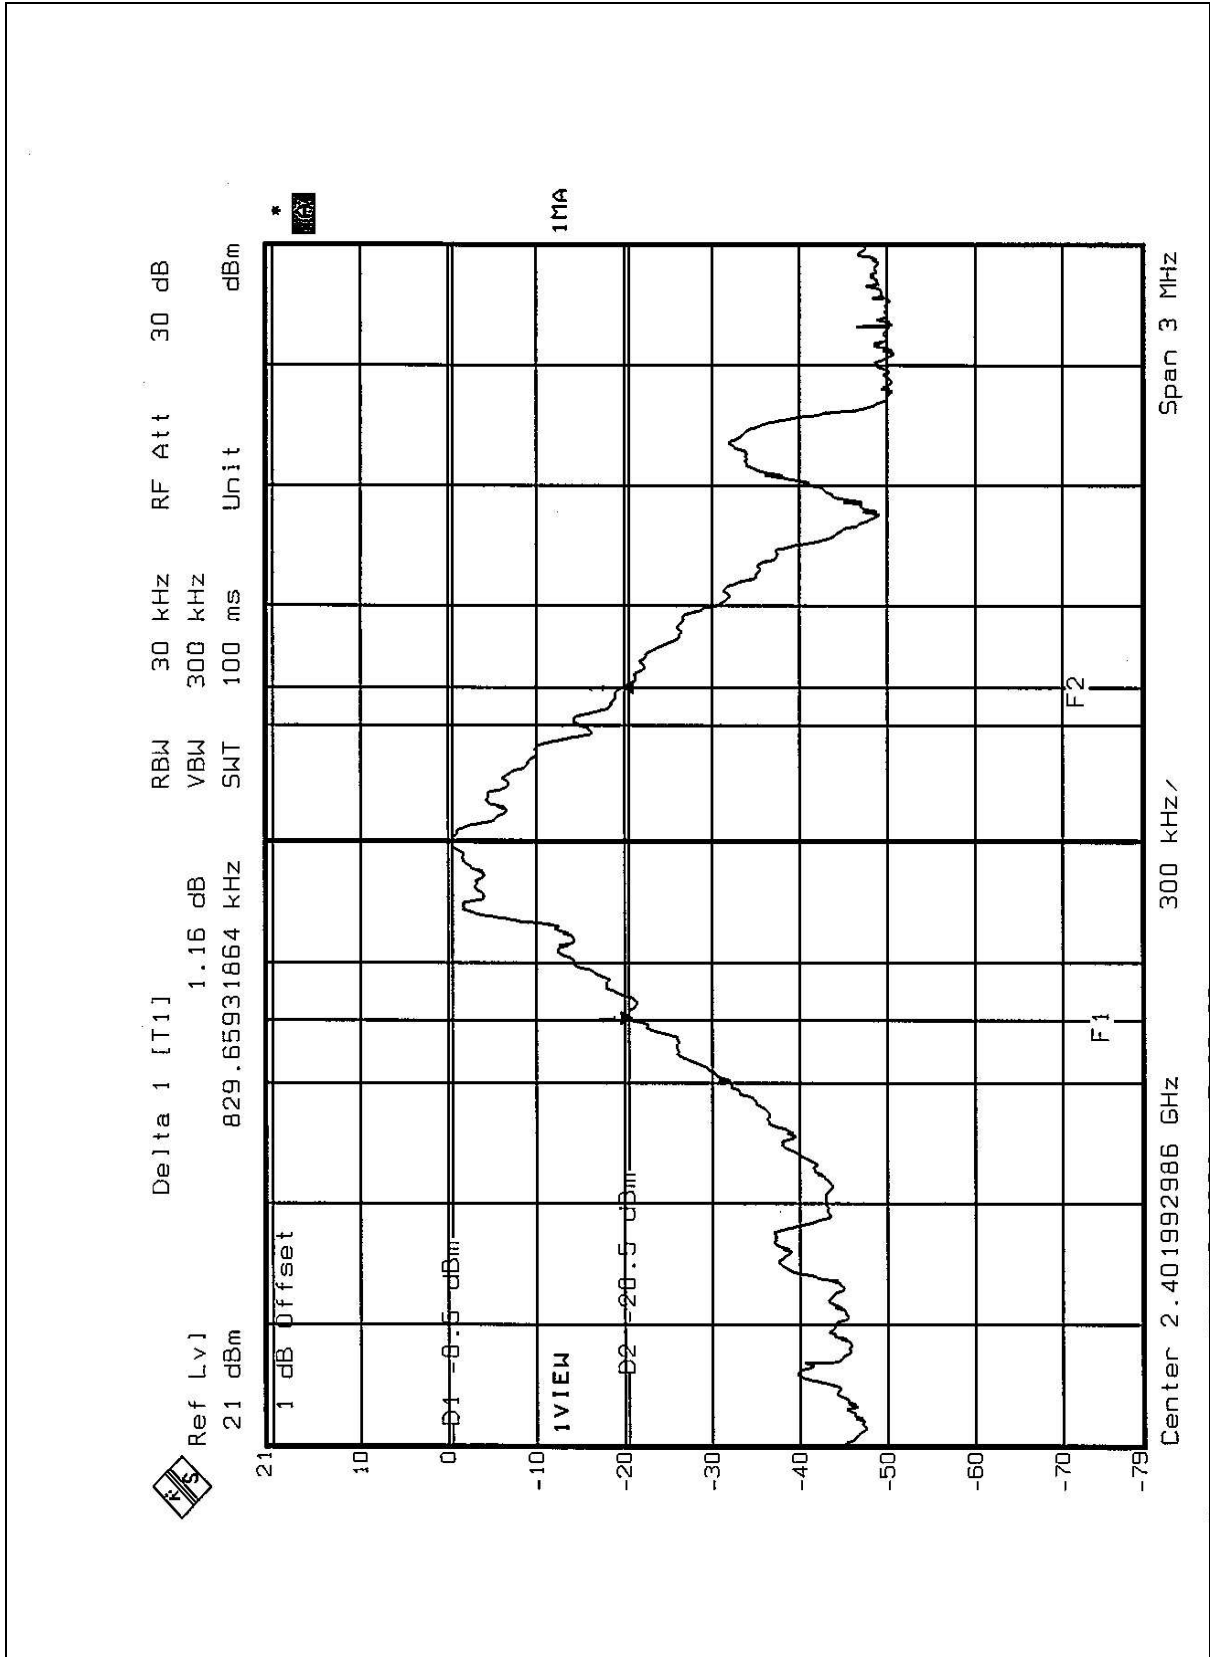

Channel 39

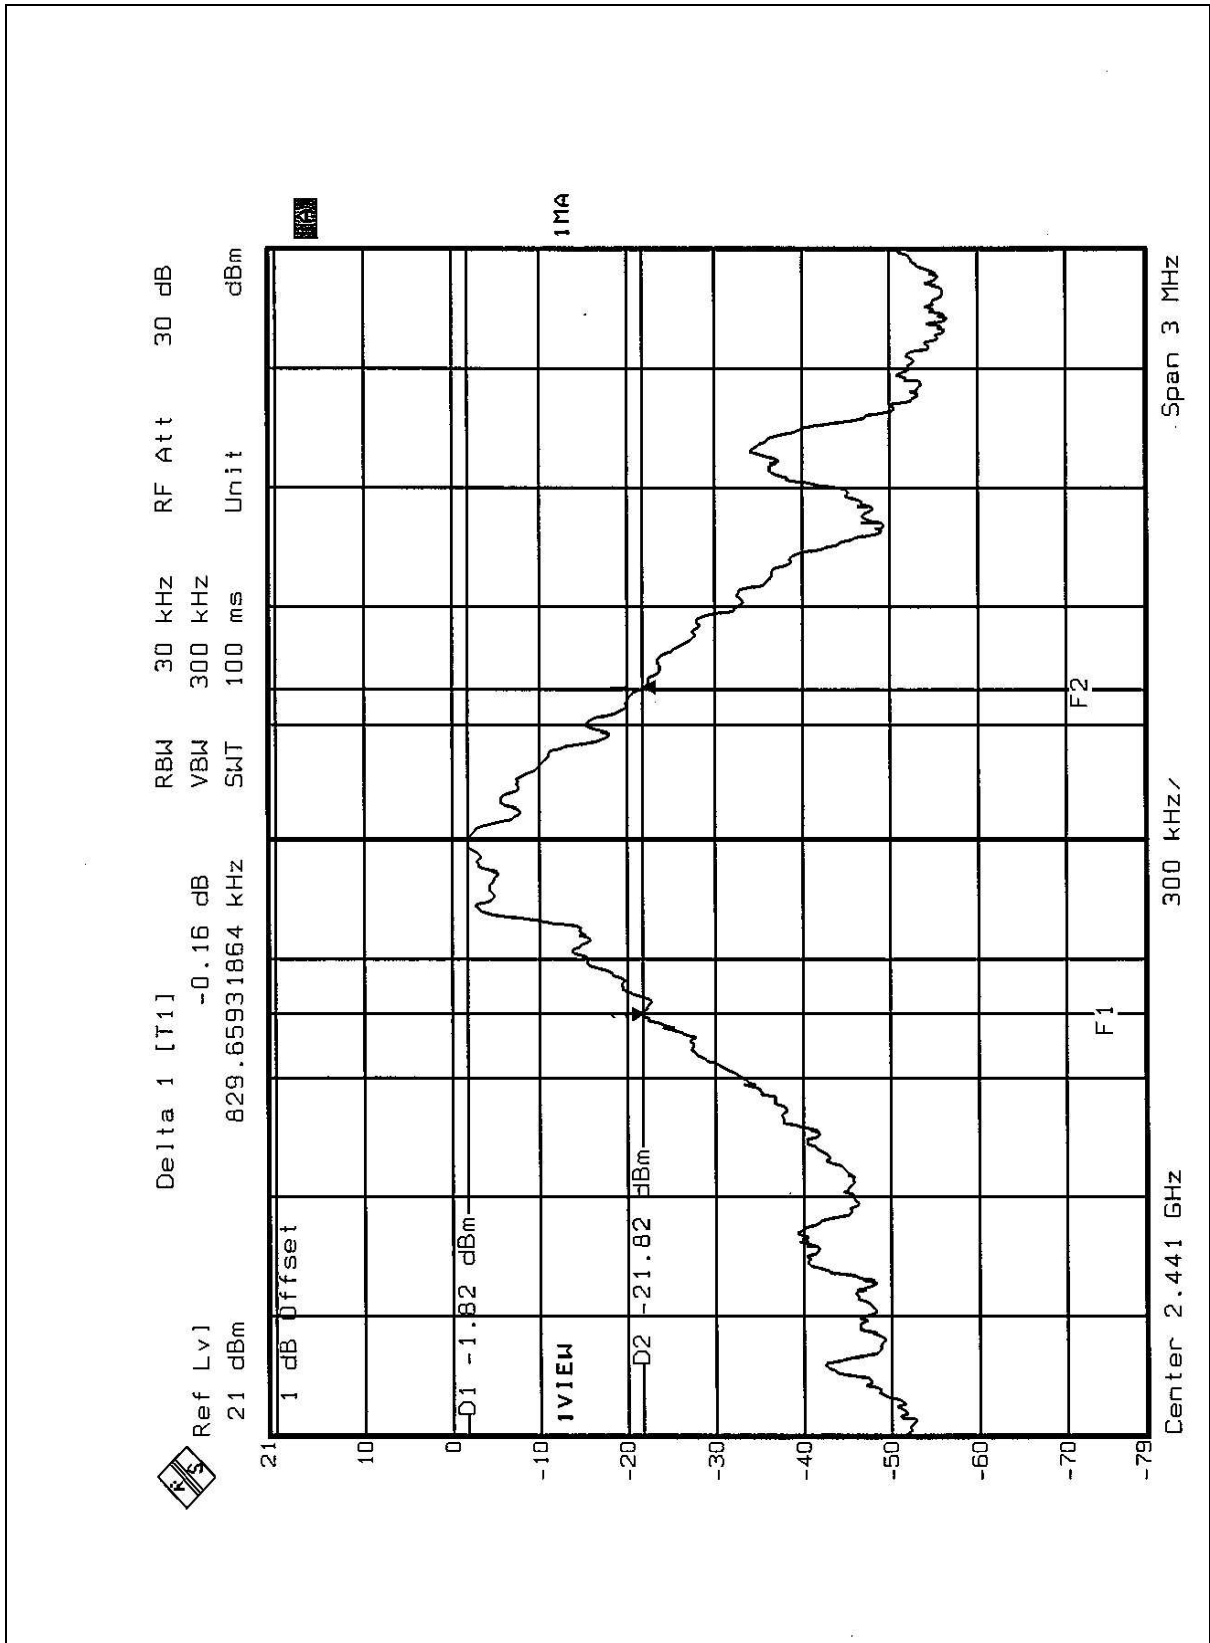

Channel 78

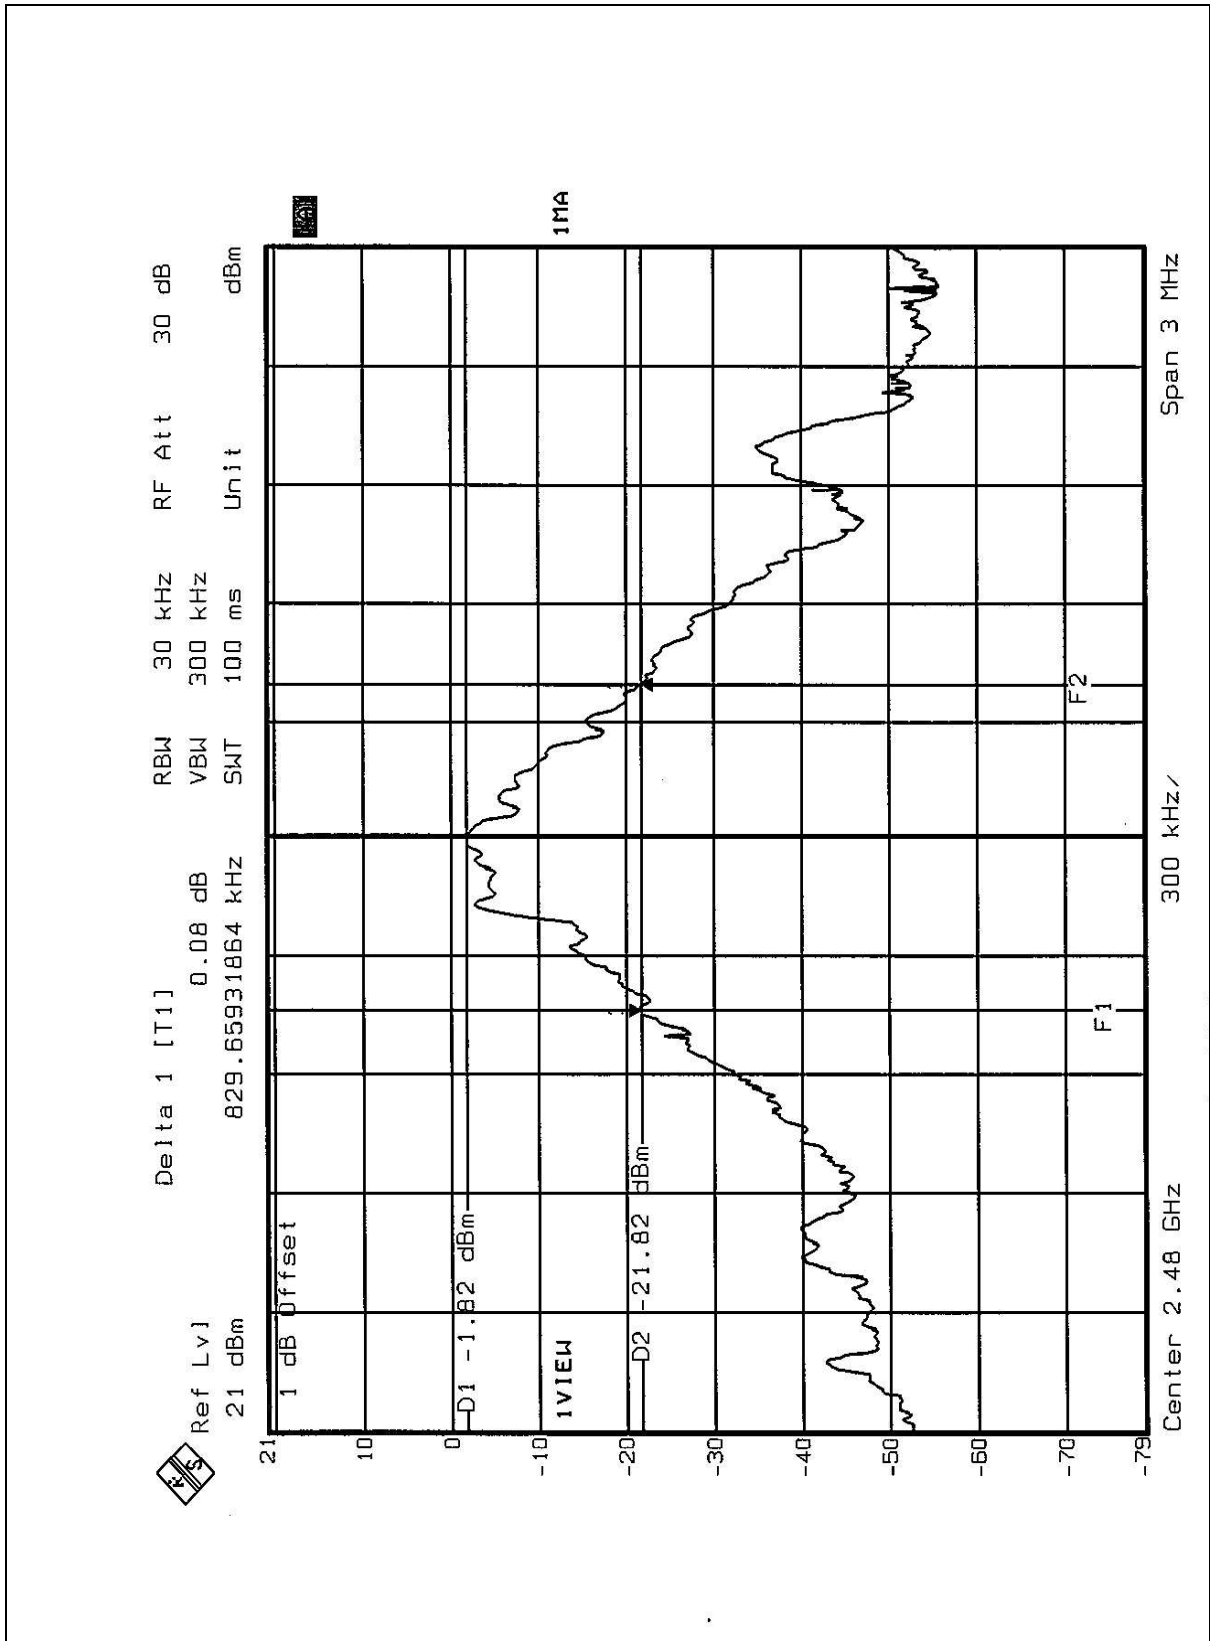

4.5 HOPPING CHANNEL SEPARATION

4.5.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25KHz or 20dB bandwidth (whichever is greater).

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002


NOTES:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. By using the MaxHold function record the separation of two adjacent channels.
4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
5. Repeat above procedures until all frequencies measured were complete.

4.5.4 TEST SETUP

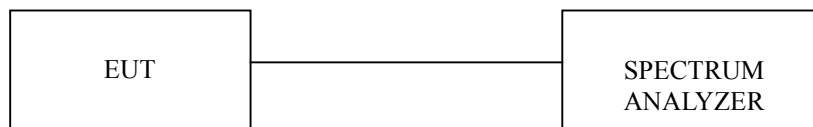


4.5.5 TEST RESULTS


Channel	Frequency (MHz)	Adjacent Channel Separation	Minimum Limit (kHz)	Pass / Fail
0	2402	1MHz	829.66	PASS
39	2441	1MHz	829.66	PASS
78	2480	1MHz	829.66	PASS

The minimum limit is 20dB bandwidth. Test results please refer to next three pages.


Channel 0

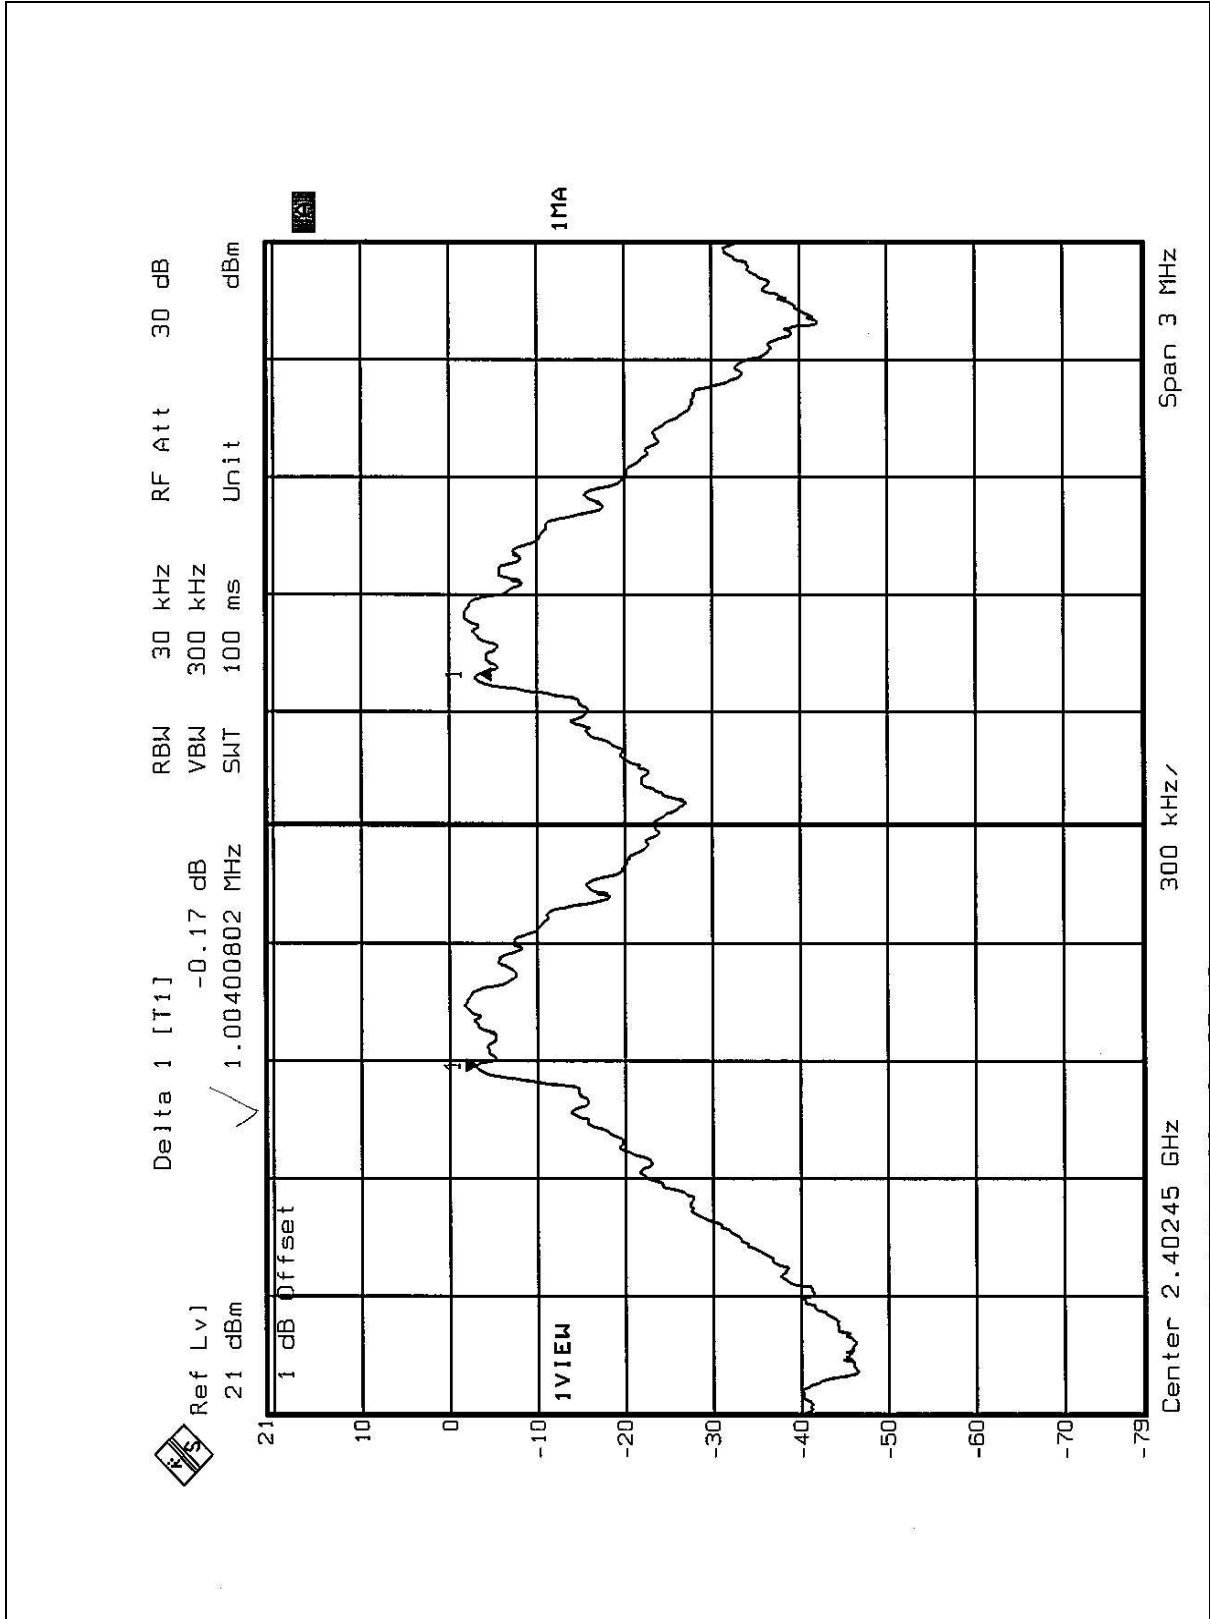

Channel 39

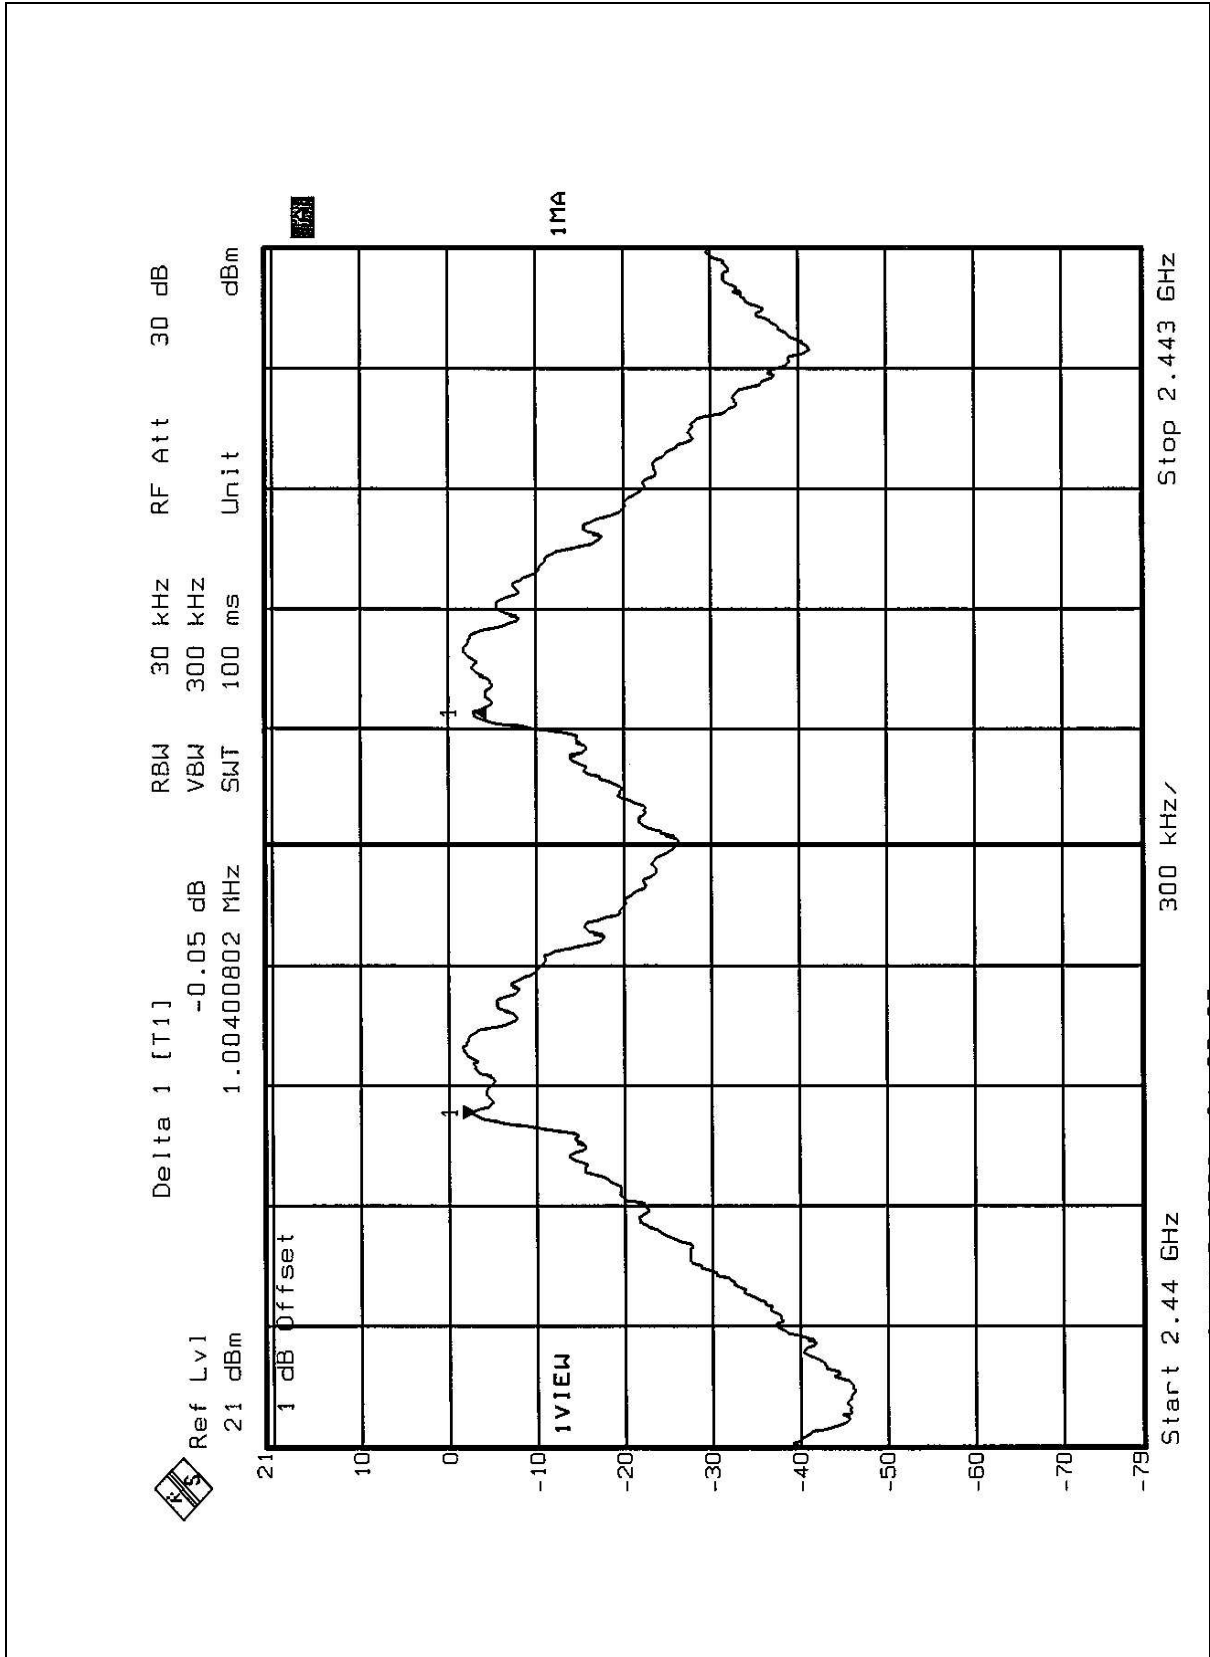

Channel 78

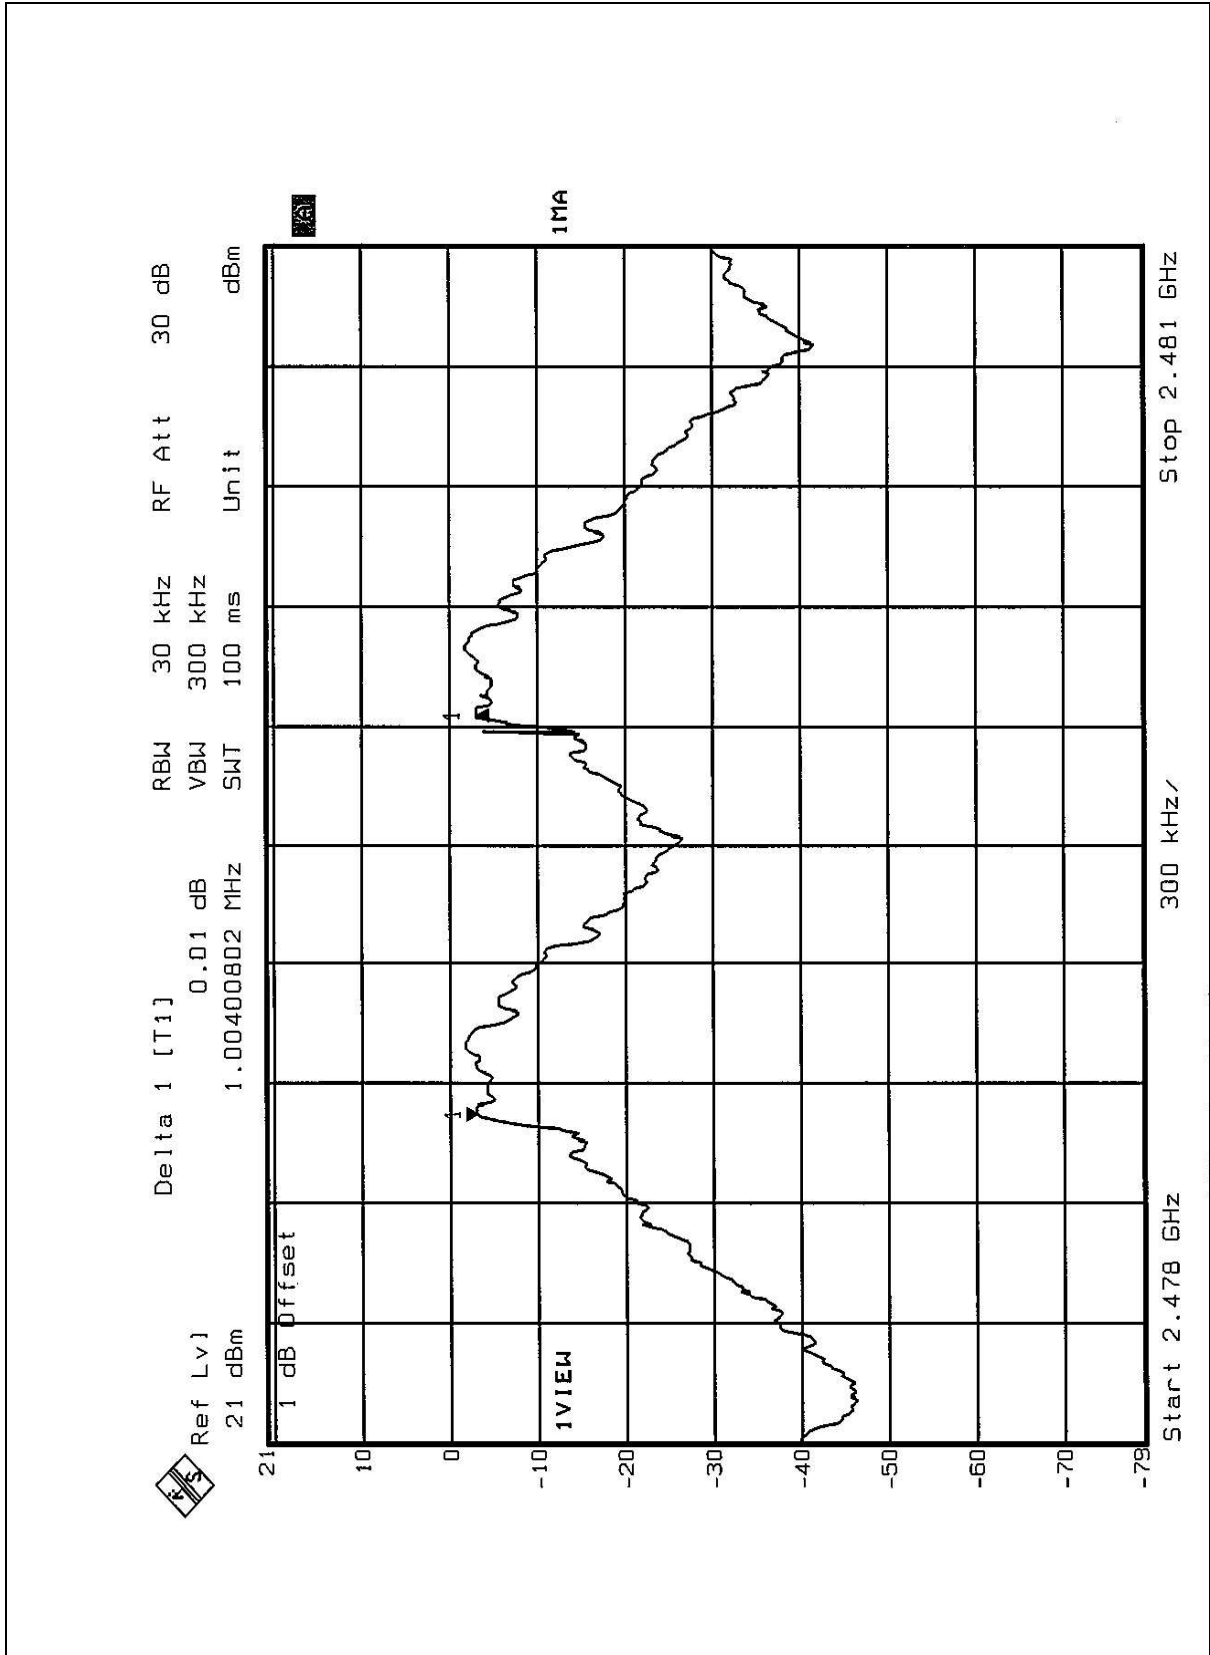

4.6 MAXIMUM PEAK OUTPUT POWER

4.6.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Limit of Maximum Peak Output Power Measurement is 30dBm.

4.6.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002


NOTES:

- 1.The measurement uncertainty is less than +/- 2.6dB, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURES

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
3. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 2 MHz RBW and 3 MHz VBW.
4. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
5. Repeat above procedures until all frequencies measured were complete.

4.6.4 TEST SETUP

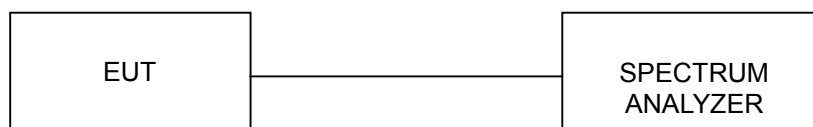

For the actual test configuration, please refer to the related Item – Photographs of the Test Configuration.

4.6.5 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.6.6 TEST RESULTS


Output Power Into Antenna:

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
0	2402	-1.14	30	PASS
39	2441	-0.98	30	PASS
78	2480	-1.14	30	PASS


Channel 0

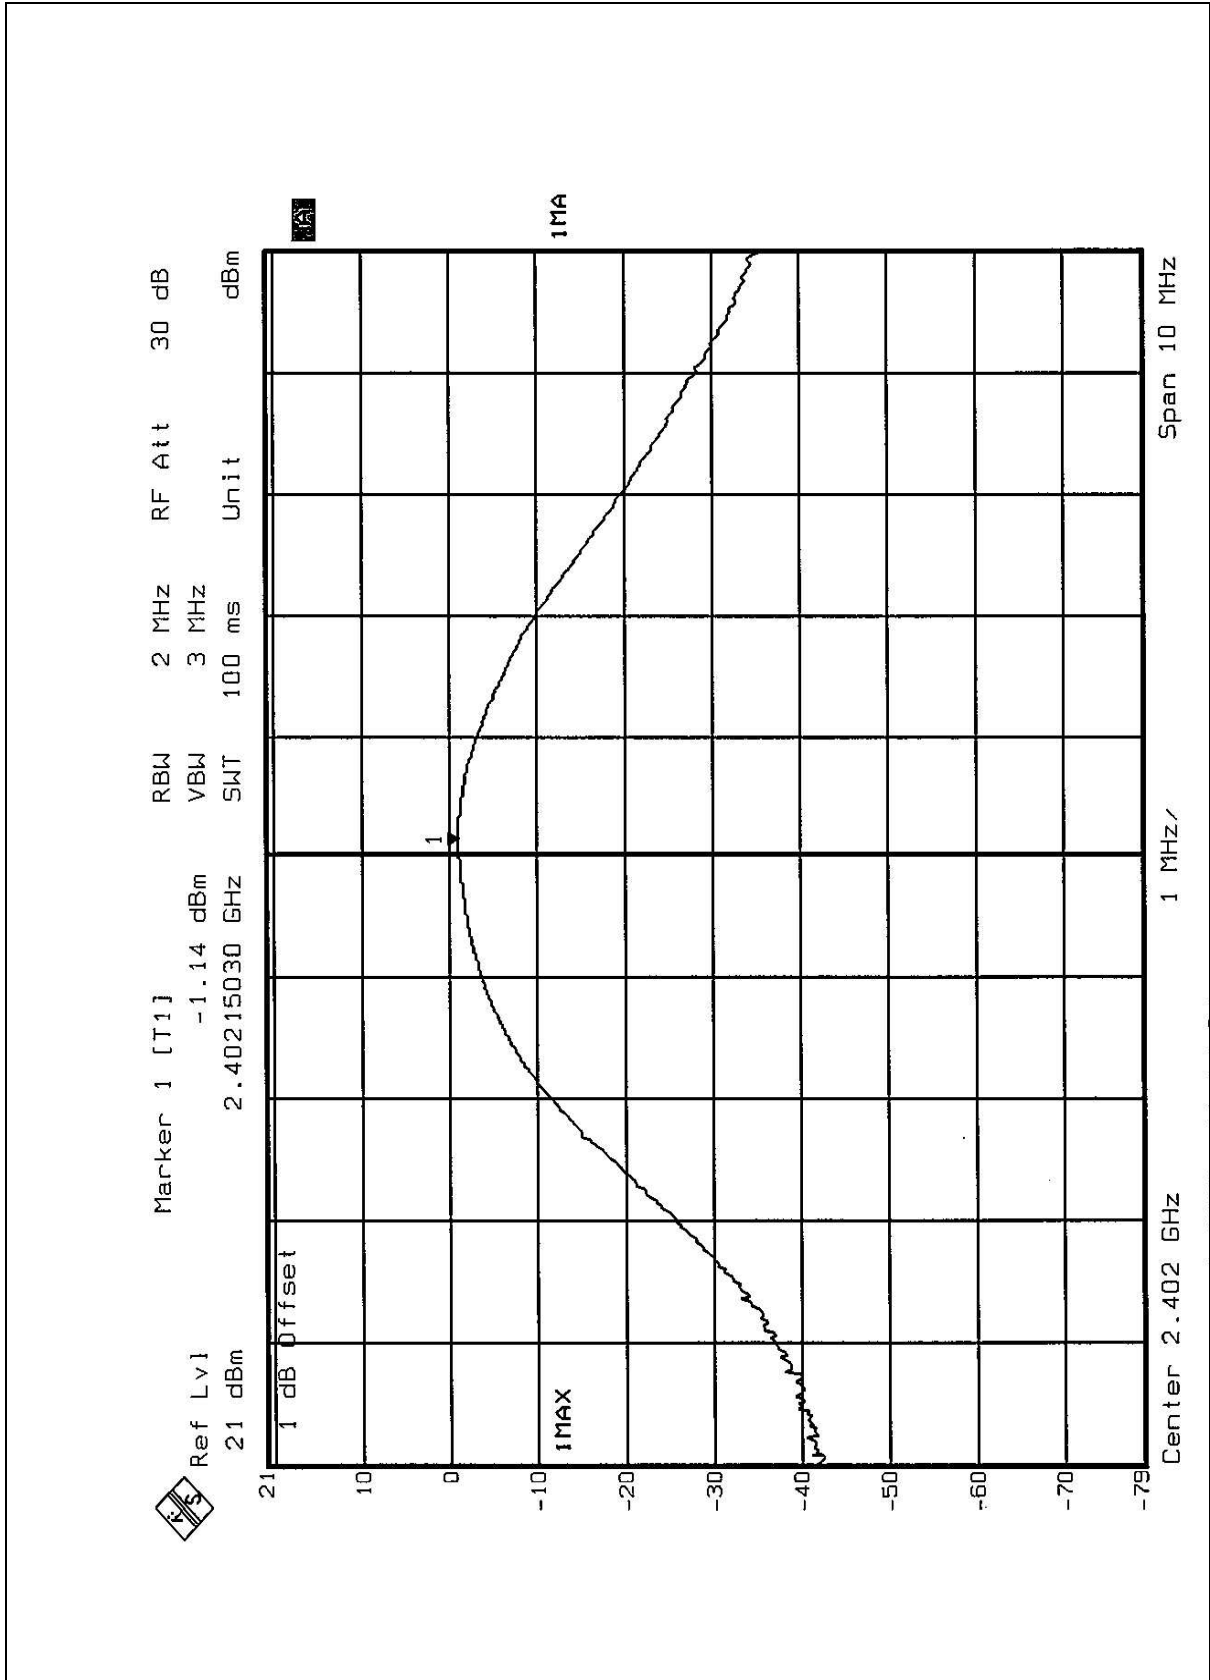

Channel 39

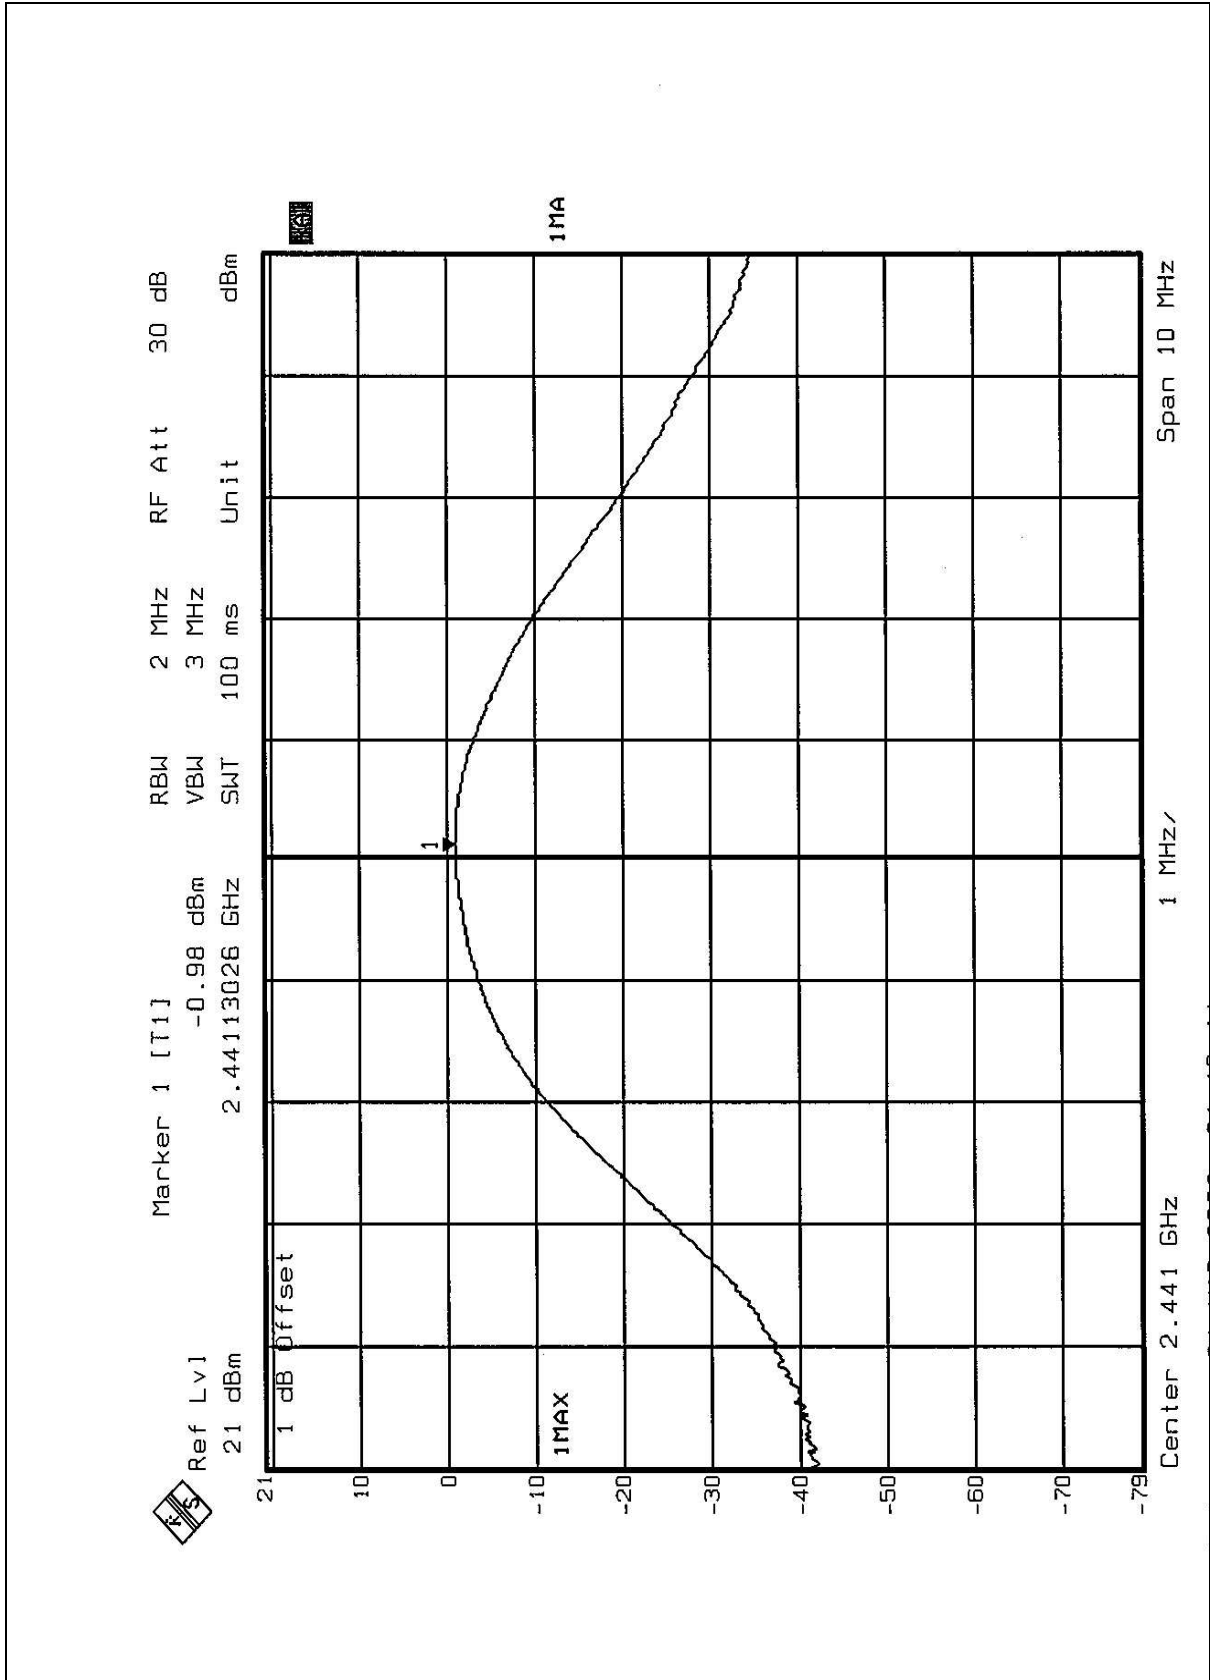

Channel 78

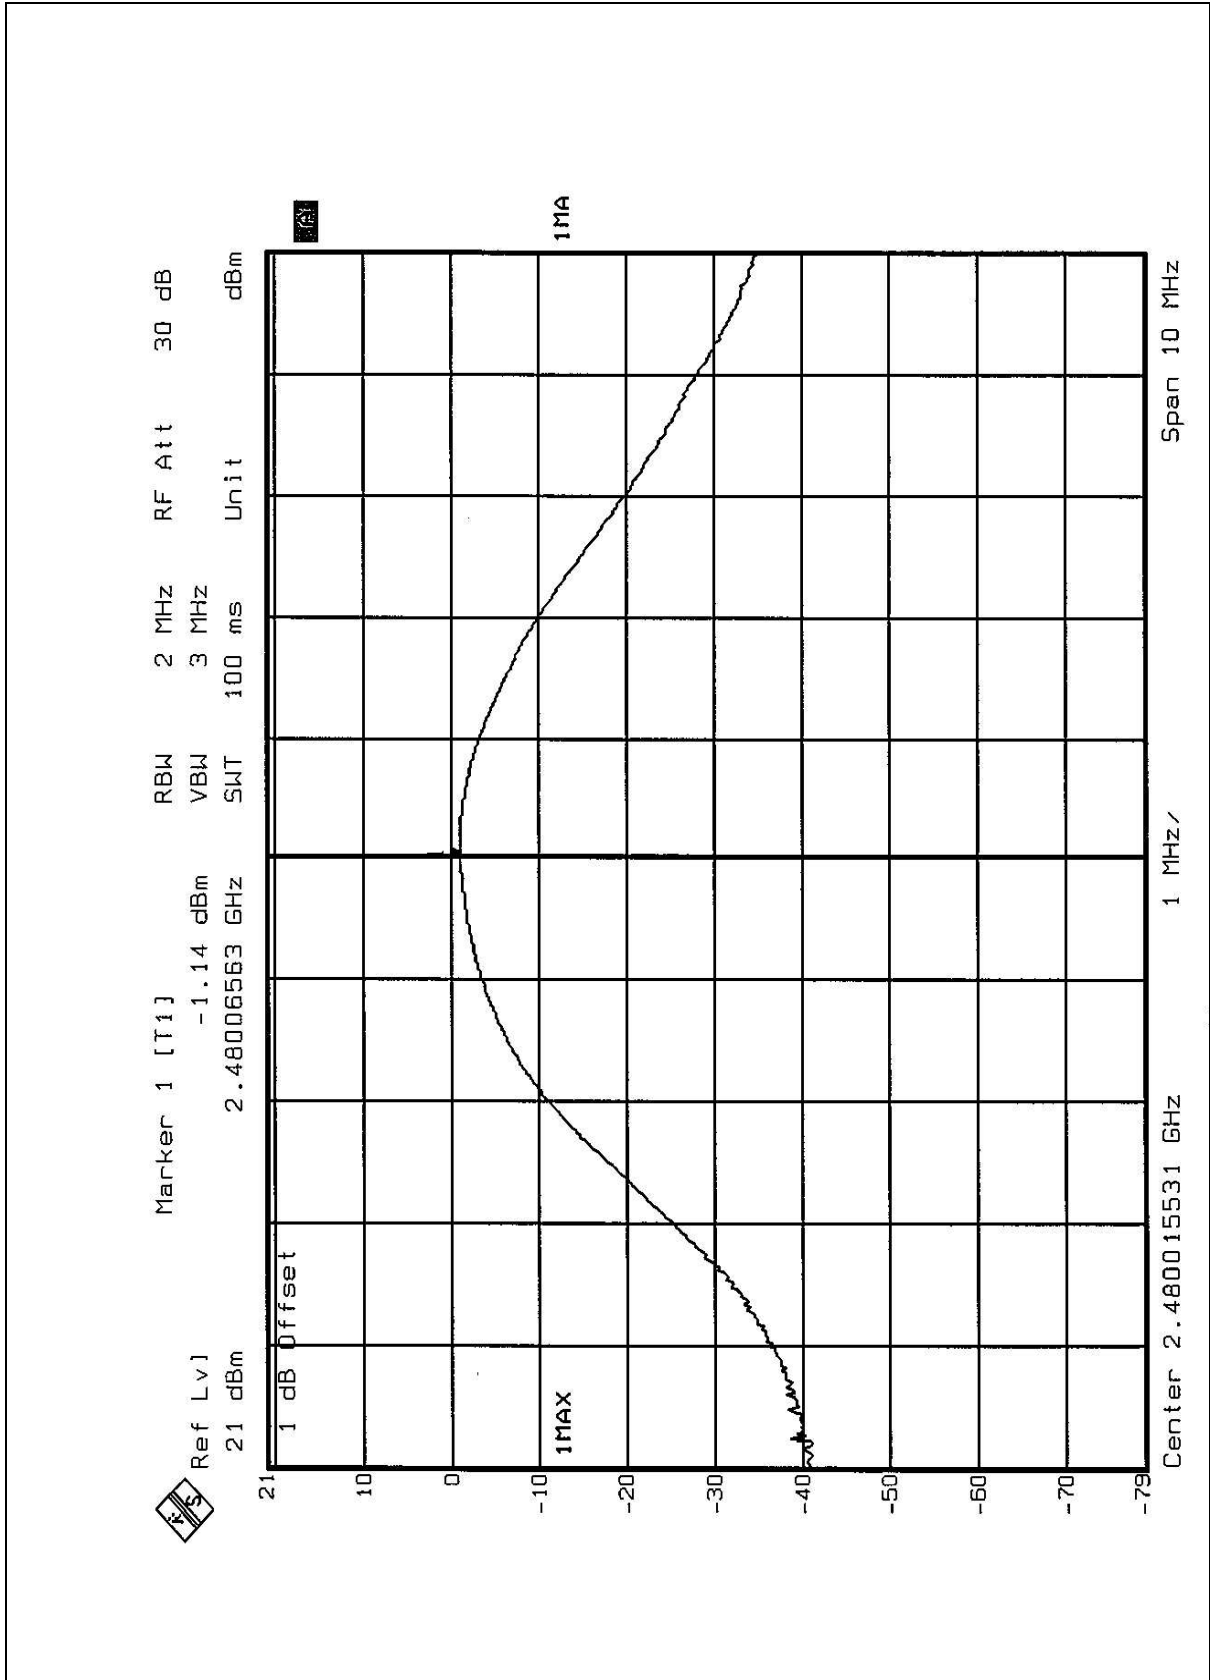

4.7 RADIATED EMISSION MEASUREMENT

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Field strength limits are at the distance of 3 meters, emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field Strength of Fundamental	
	uV/m	dBuV/m
30-88	100	40.0
88-216	150	43.5
216-960	200	46.0
Above 960	500	54.0

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
* HP Spectrum Analyzer	8590L	3544A01176	May 7, 2002
* HP Preamplifier	8447D	2944A08485	May 7, 2002
* HP Preamplifier	8449B	3008A01201	Dec. 06, 2002
* HP Preamplifier	8449B	3008A01292	Aug. 21, 2002
* ROHDE & SCHWARZ TEST RECEIVER	ESMI	839013/007 839379/002	Jan. 27, 2003
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 23, 2002
* CHASE BILOG Antenna	CBL6112A	2221	Aug. 2, 2002
* SCHWARZBECK Horn Antenna	BBHA9120-D1	D130	July 6, 2002
* EMCO Horn Antenna	3115	9312-4192	April 15, 2002
* EMCO Turn Table	1060	1115	NA
* SHOSHIN Tower	AP-4701	A6Y005	NA
* Software	AS61D4	NA	NA
* ANRITSU RF Switches	MP59B	M35046	Aug. 2, 2002
* TIMES RF cable	LMR-600	CABLE-ST5-01	Aug. 2, 2002
Open Field Test Site	Site 5	ADT-R05	July 28, 2002
Site Registration No.	FCC: 90422 Canada IC: IC 3789 VCCI : R-1039		

NOTE:

1. The measurement uncertainty is less than +/- 3.0dB, which is calculated as per the NAMAS document NIS81.
2. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
3. "*" = These equipment are used for the final measurement.




4.7.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 10 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 300 Hz for Average detection (AV) at frequency above 1GHz.

4.7.4 TEST SETUP

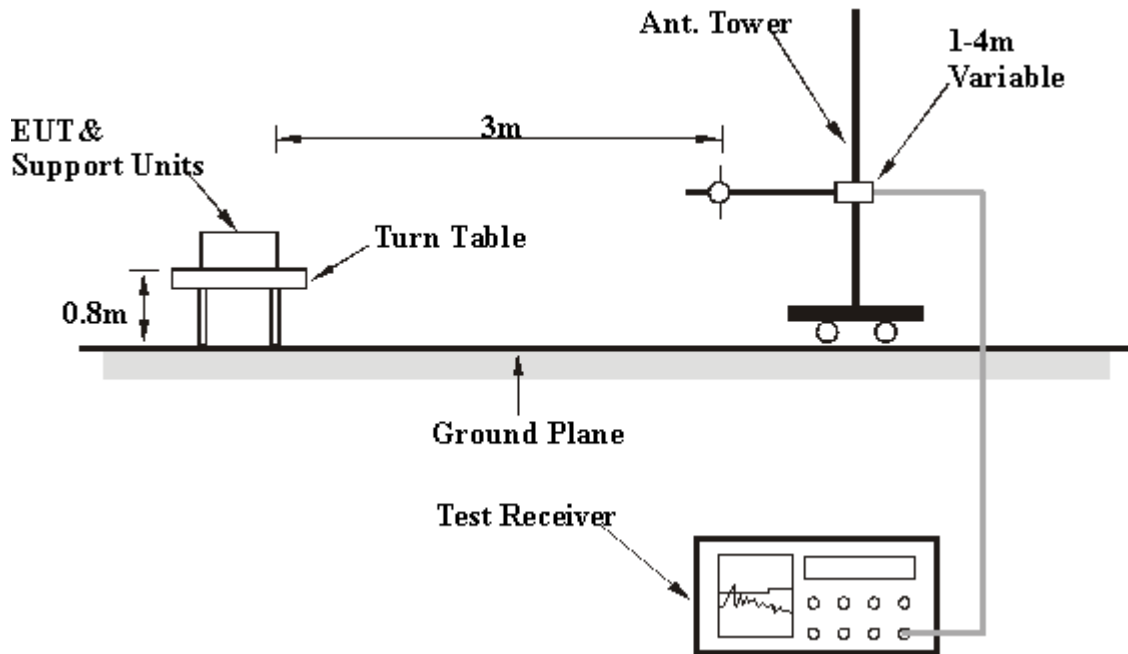

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.5 TEST RESULTS

Digital Portion:

EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 78	FREQUENCY RANGE	30-1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Quasi-Peak
ENVIRONMENTAL CONDITIONS	20 deg. C, 70%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	80.00	28.2 QP	40.00	-11.80	1.29H	185	20.00	7.33	0.85	0.00	-8.18
2	144.00	29.8 QP	43.50	-13.70	1.12H	123	18.00	10.58	1.18	0.00	-11.76
3	288.00	31.7 QP	46.00	-14.30	1.05H	305	17.00	12.88	1.81	0.00	-14.69
4	336.00	33.1 QP	46.00	-12.90	1.23H	216	17.20	13.92	1.99	0.00	-15.91
5	384.00	33.7 QP	46.00	-12.30	1.19H	180	16.00	15.50	2.18	0.00	-17.67
6	420.00	33.5 QP	46.00	-12.50	1.23H	59	15.00	16.21	2.31	0.00	-18.53

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	80.00	26.2 QP	40.00	-13.80	1.25V	28	18.00	7.33	0.85	0.00	-8.18
2	108.30	28.9 QP	43.50	-14.60	1.21V	8	17.00	10.87	1.01	0.00	-11.88
3	252.00	32.5 QP	46.00	-13.50	1.11V	299	18.50	12.29	1.67	0.00	-13.96
4	324.00	32.1 QP	46.00	-13.90	1.24V	40	16.50	13.67	1.95	0.00	-15.64
5	360.00	33.7 QP	46.00	-12.30	1.31V	53	17.00	14.58	2.08	0.00	-16.67
6	420.00	30.5 QP	46.00	-15.50	1.27V	324	12.00	16.21	2.31	0.00	-18.52

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. The other emission levels were very low against the limit.

4.7.6 TEST RESULTS

RF Portion :

EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 0	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2402.0	94.2PK	-	-	1.67H	5	59.40	28.30	6.48	0.00	-34.78
2	*2402.0	83.7AV	-	-	1.67H	362	48.90	28.30	6.48	0.00	-34.78
3	4804.0	49.0PK	74.0	-25.0	1.55H	351	45.00	31.43	7.23	34.63	-4.01

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2402.0	94.8PK	-	-	0.99V	5	60.00	28.30	6.48	0.00	-34.78
2	*2402.0	83.9AV	-	-	0.99V	362	49.10	28.30	6.48	0.00	-34.78
3	4804.0	53.3PK	74.0	-20.7	1.05V	137	49.25	31.43	7.23	34.63	-4.02
4	4804.0	50.8AV	54.0	-3.2	1.05V	137	46.80	31.43	7.23	34.63	-4.02

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 39	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.0	94.5PK	-	-	1.66H	5	59.40	28.38	6.67	0.00	-35.05
2	*2441.0	83.5AV	-	-	1.66H	344	48.40	28.38	6.67	0.00	-35.05
3	4882.0	50.1PK	74.0	-23.9	1.03H	39	46.00	31.47	7.21	34.63	-4.05

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2441.0	95.9PK	-	-	1.29V	362	60.80	28.38	6.67	0.00	-35.05
2	*2441.0	84.8AV	-	-	1.31V	5	49.70	28.38	6.67	0.00	-35.05
3	4882.0	50.6PK	74.0	-23.4	1.38V	304	46.50	31.47	7.21	34.63	-4.05

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. “ * “ : Fundamental frequency
5. The other emission levels were very low against the limit.

EUT	Bluetooth Dongle	MODEL	BT-500
MODE	Channel 78	FREQUENCY RANGE	Above 1000 MHz
INPUT POWER (SYSTEM)	120Vac, 60 Hz	DETECTOR FUNCTION	Peak(PK) Average (AV)
ENVIRONMENTAL CONDITIONS	20 deg. C, 60%RH, 1050 hPa	TESTED BY: Gary Chang	

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.0	93.1PK	-	-	1.52H	362	57.90	28.46	6.72	0.00	-35.18
2	*2480.0	82.7AV	-	-	1.52H	362	47.50	28.46	6.72	0.00	-35.18
3	4960.0	48.2PK	74.0	-25.8	1.25H	113	44.00	31.55	7.26	34.61	-4.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (DbuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Antenna Factor (dB)	Cable Factor (dB)	Pre-Amp. Factor (dB)	Correction Factor (dB)
1	*2480.0	96.7PK	-	-	1.28V	5	61.49	28.46	6.72	0.00	-35.18
2	*2480.0	85.4AV	-	-	1.28V	362	50.26	28.46	6.72	0.00	-35.18
3	4960.0	49.2PK	74.0	-24.8	1.22V	309	45.00	31.55	7.26	34.61	-4.21

NOTE:

1. Emission level = Raw value - Correction Factor
2. Correction Factor = Pre-Amp. Factor - Ant. Factor - Cable loss
(Pre-Amp. Factor = 0, when a Pre-Amplifier is not used for the test.)
3. Margin value = Emission level - Limit value
4. " * " : Fundamental frequency
5. The other emission levels were very low against the limit.

4.8 BAND EDGES MEASUREMENT

4.8.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100KHz RB).

4.8.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK30	100049	July 17, 2002

Notes:

- 1.The measurement uncertainty is less than $\pm 2.6\text{dB}$, which is calculated as per the NAMAS document NIS81.
- 2.The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.8.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 kHz bandwidth from band edge. The band edges was measured and recorded.


4.8.4 EUT OPERATING CONDITION


The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.

4.8.5 TEST RESULTS

The spectrum plots are attached on the following 2 pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(C).

NOTE: The band edge emission plot on the following 2 pages shows 35.31dB delta between carrier maximum power and local maximum emission in restrict band (2.4839GHz). The emission of carrier strength list in the test result of channel 78 at the item 4.7.6 (Page 51) is 85.4dBuV/m, so the maximum field strength in restrict band is $85.4 - 35.31 = 50.09$ dBuV/m which is under 54 dBuV/m limit.

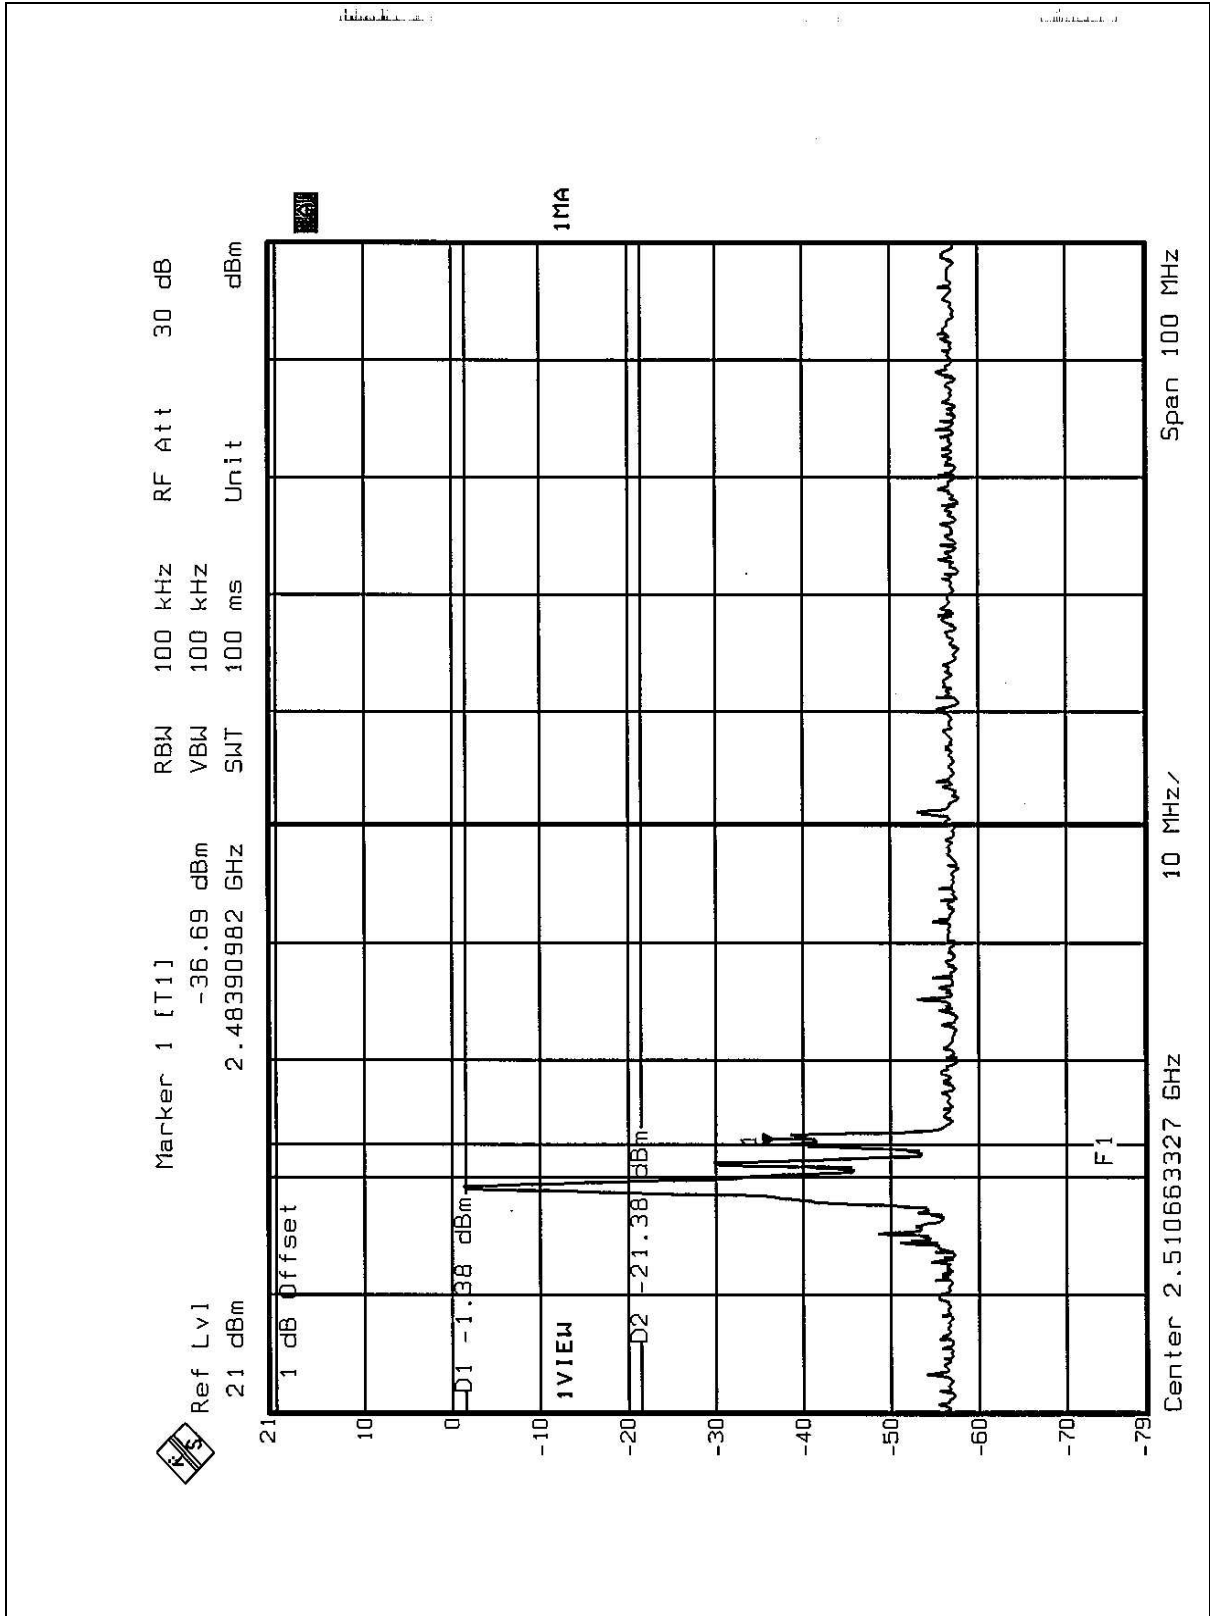

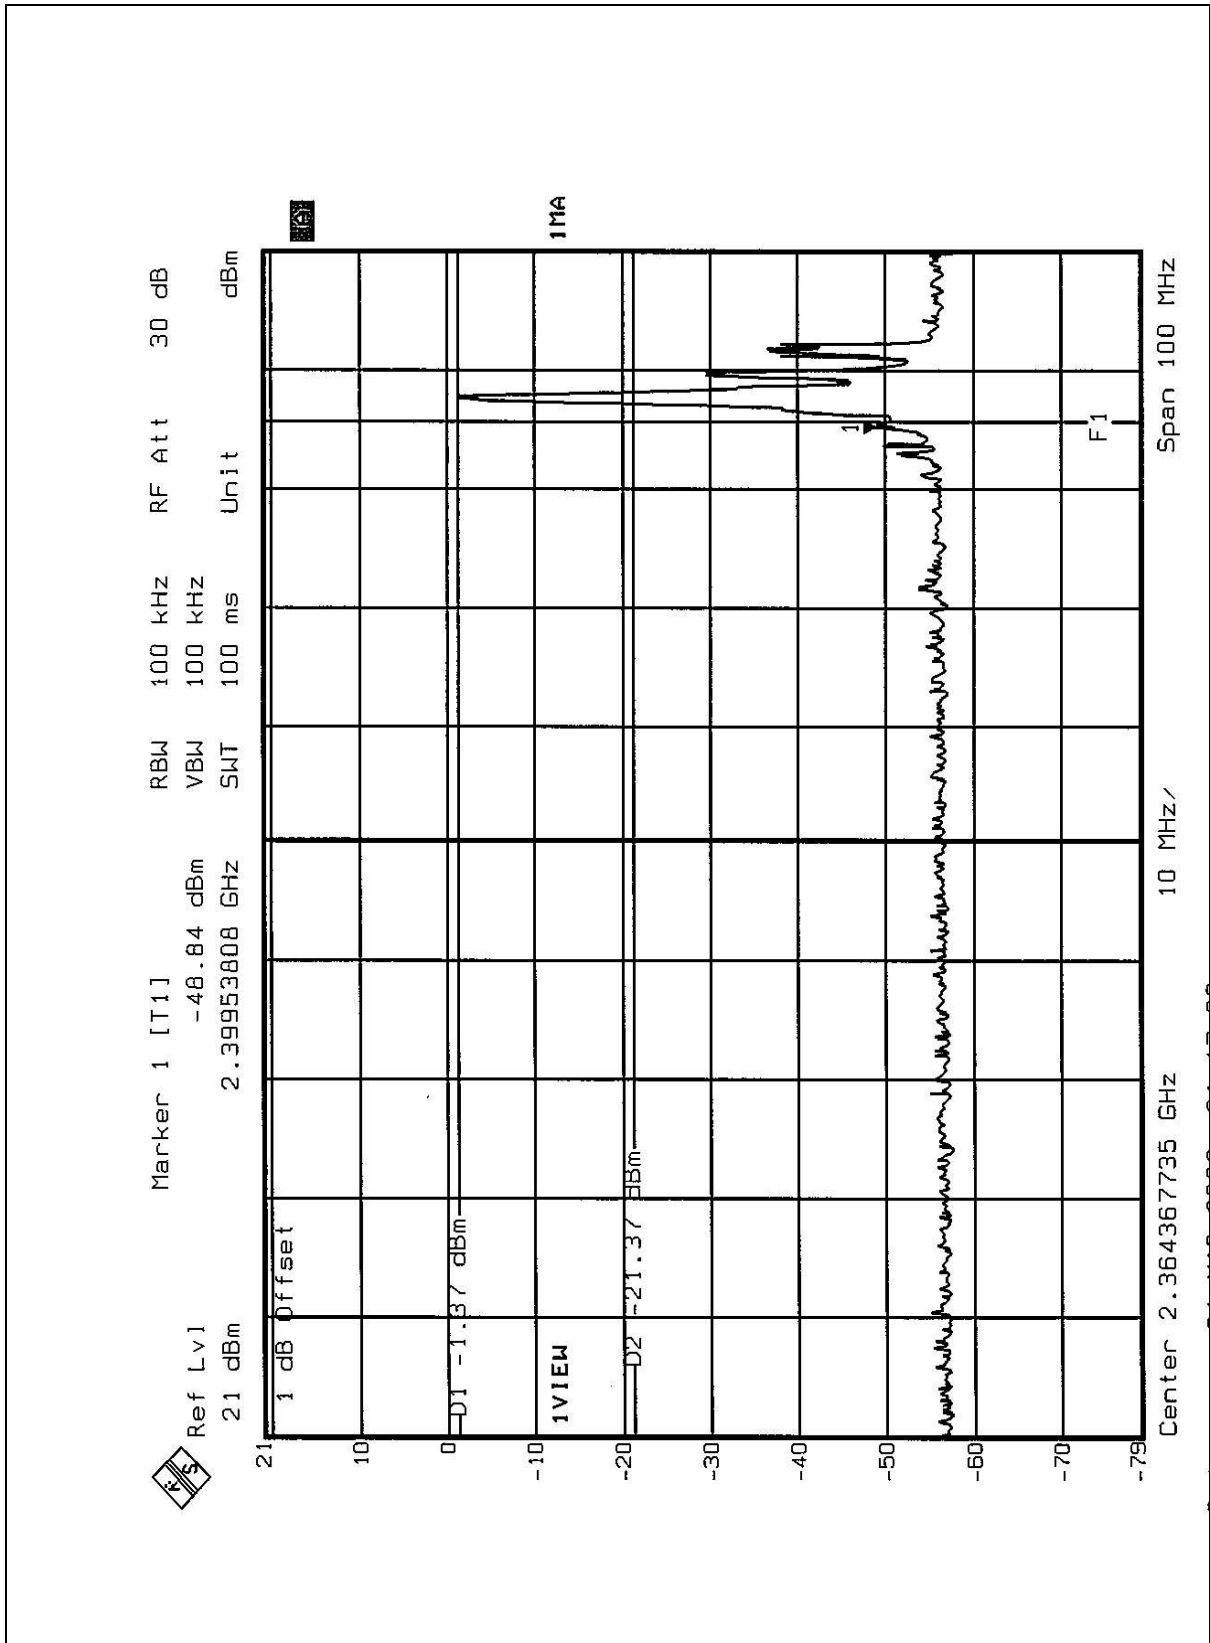



4.9 ANTENNA REQUIREMENT

4.9.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.


And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6 dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

4.9.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Meander IFA. There is no antenna connector. The maximum Gain of this antenna is only -1dBi.

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST

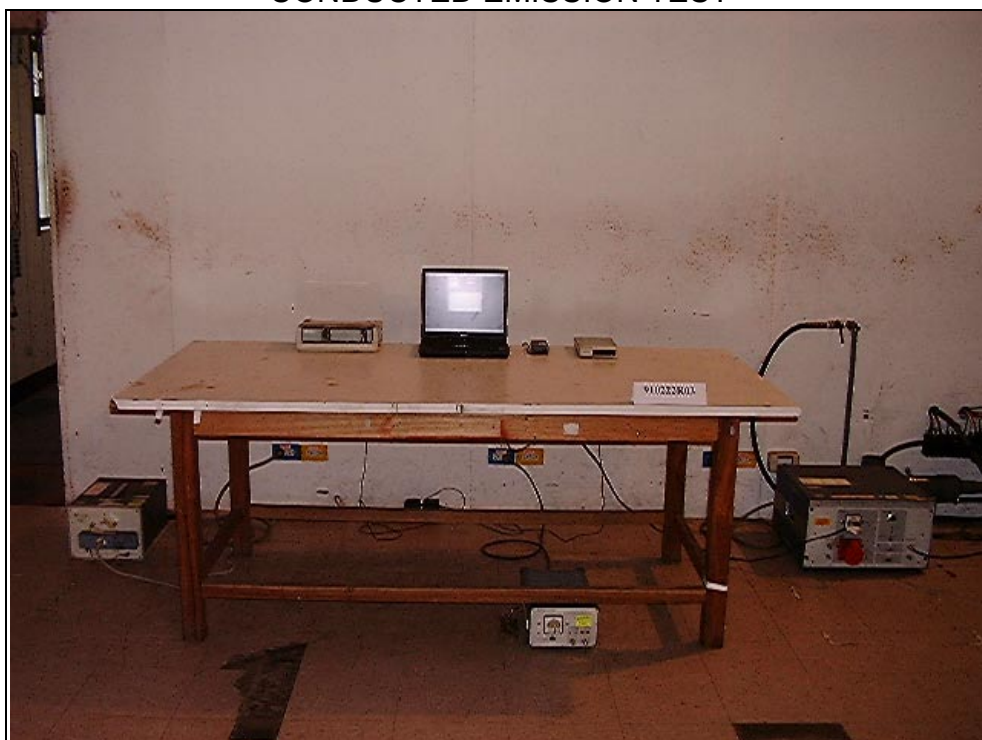

RADIATED EMISSION TEST





6 INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025, Guide 25 or EN 45001:

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
New Zealand	MoC
Norway	NEMKO
R.O.C.	BSMI, DGT, CNLA

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab:

Tel: 886-2-26093195

Fax: 886-2-26093184

Lin Kou RF&Telecom Lab

Tel: 886-3-3270910

Fax: 886-3-3270892

Email: service@mail.adt.com.tw

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.