
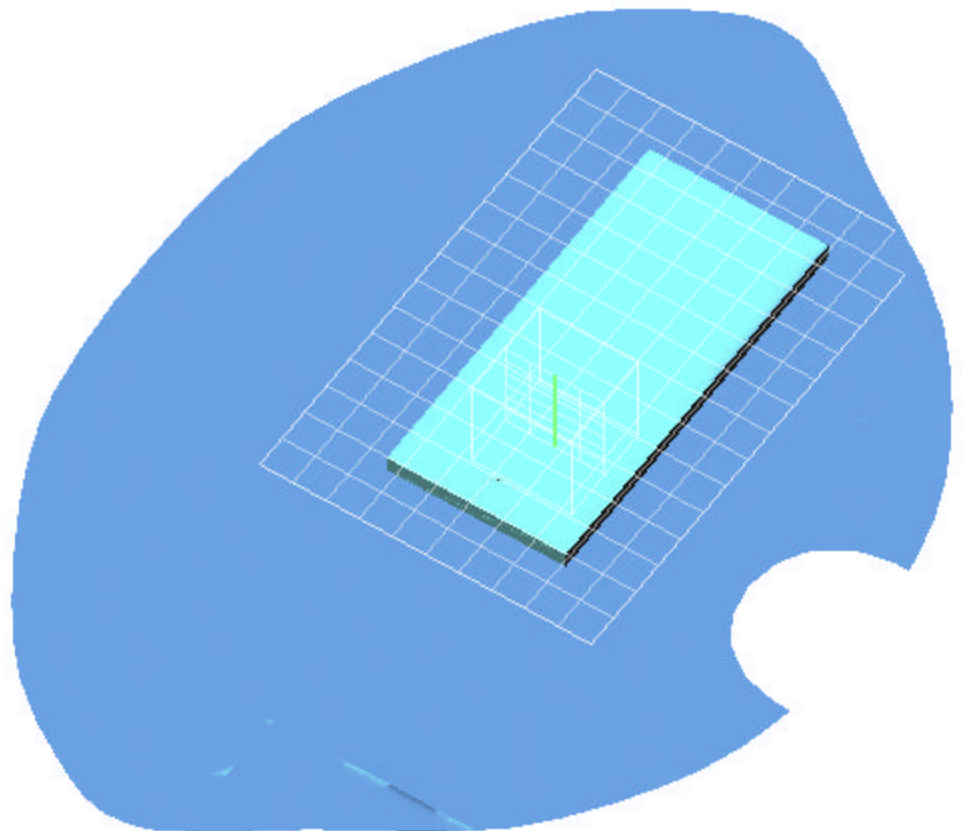


Test Laboratory: Compliance Certification Services
File Name: 1L-CH_1.19 mW.da4

EUT Setup Configuration 1 (Antenna A)

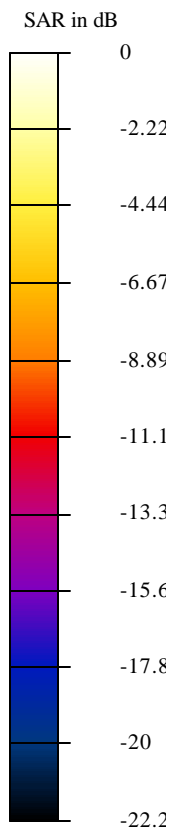

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_1.19 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT Setup Configuration 1 (11b) - Antenna A; Air temp 25 deg C & Liquid temp 23.7 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 21.6 V/m

Peak SAR = 2.59 mW/g

SAR(1 g) = 1.19 mW/g; SAR(10 g) = 0.583 mW/g

Power Drift = -0.003 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

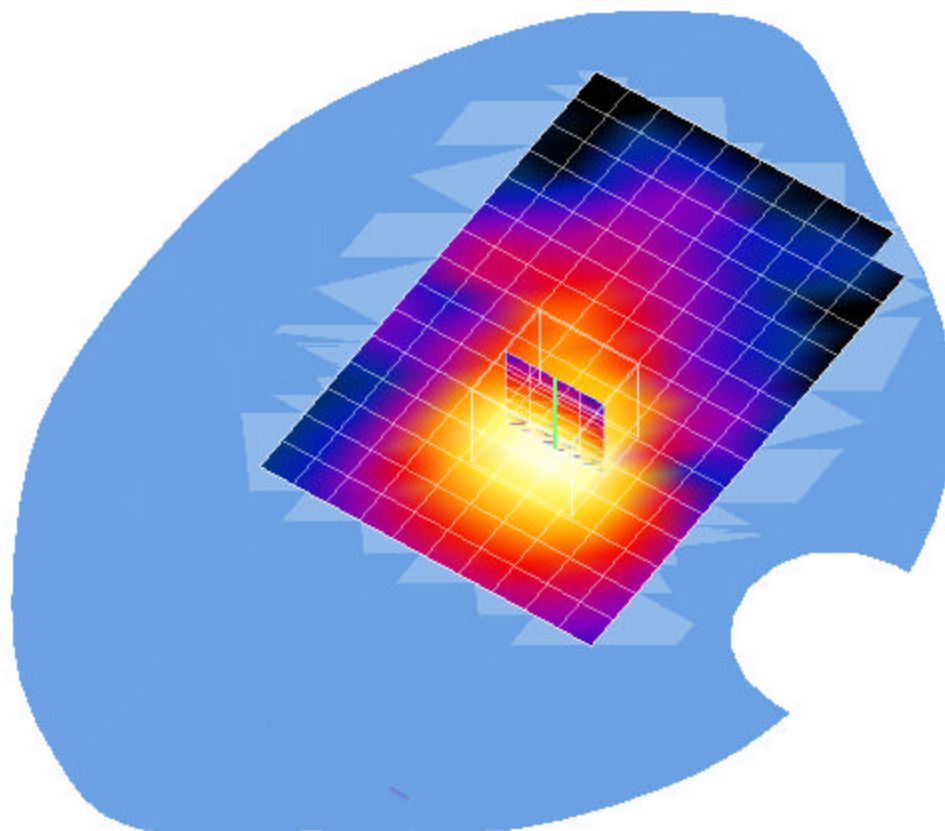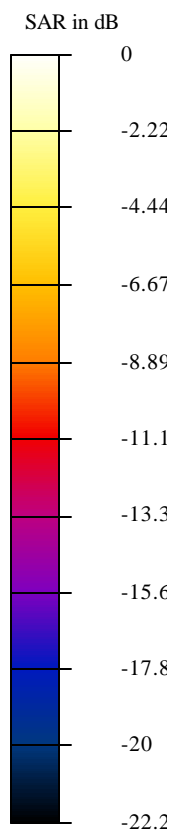

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_1.14 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT Setup Configuration 1 (11b) - Antenna A; Air temp 25 deg C & Liquid temp 23.5 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 20.1 V/m

Peak SAR = 2.51 mW/g

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.549 mW/g

Power Drift = 0.08 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

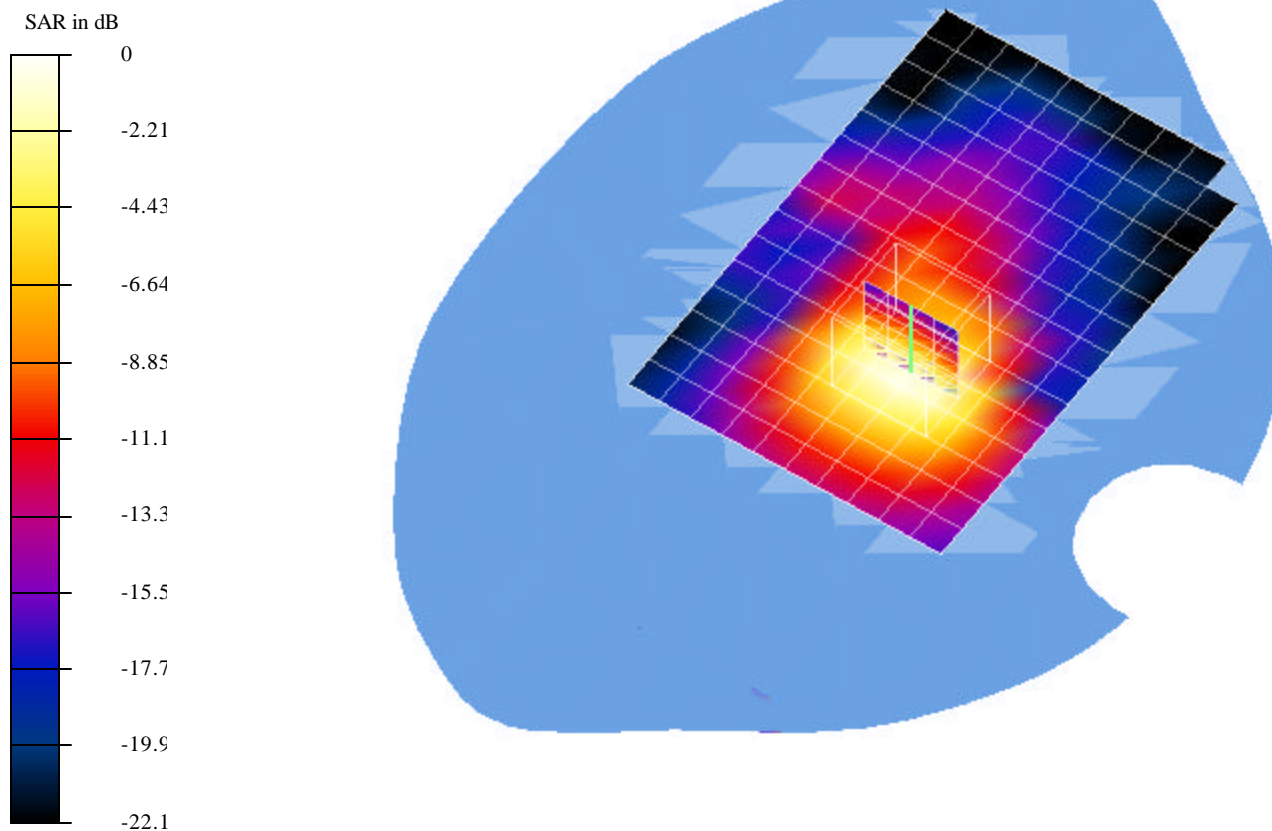

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.912 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT Setup Configuration 1 (11b) - Antenna A; Air temp 25 deg C & Liquid temp 23.5 deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 19.8 V/m

Peak SAR = 2 mW/g

SAR(1 g) = 0.912 mW/g; SAR(10 g) = 0.438 mW/g


Power Drift = -0.003 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

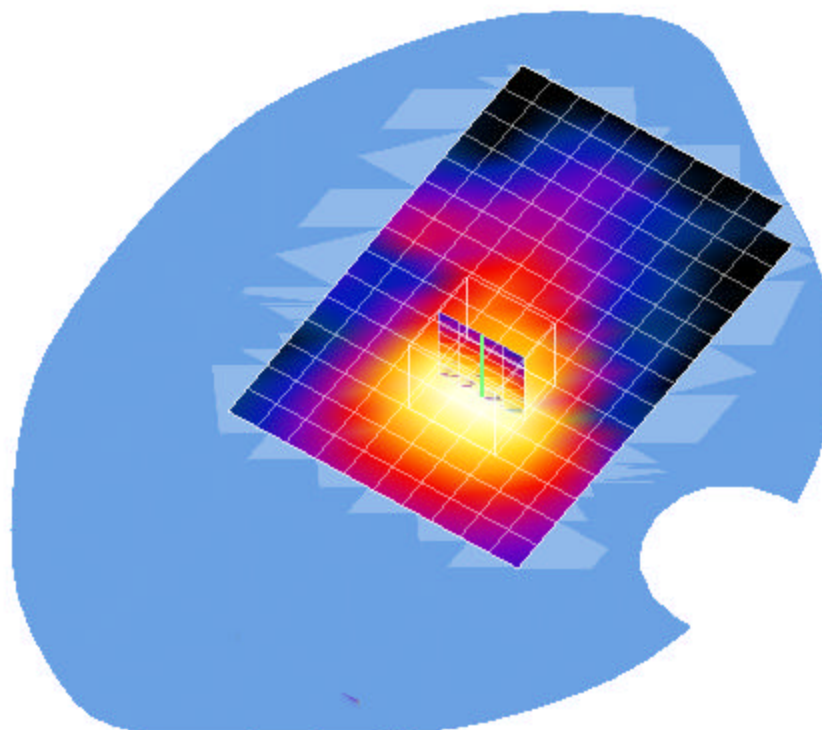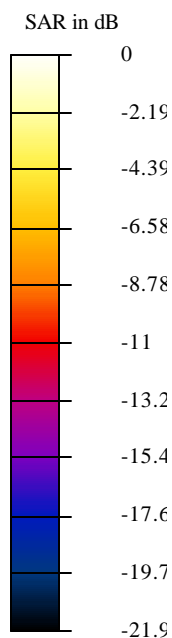

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.393 mW.da4

EUT Setup Configuration 1 (Antenna B)

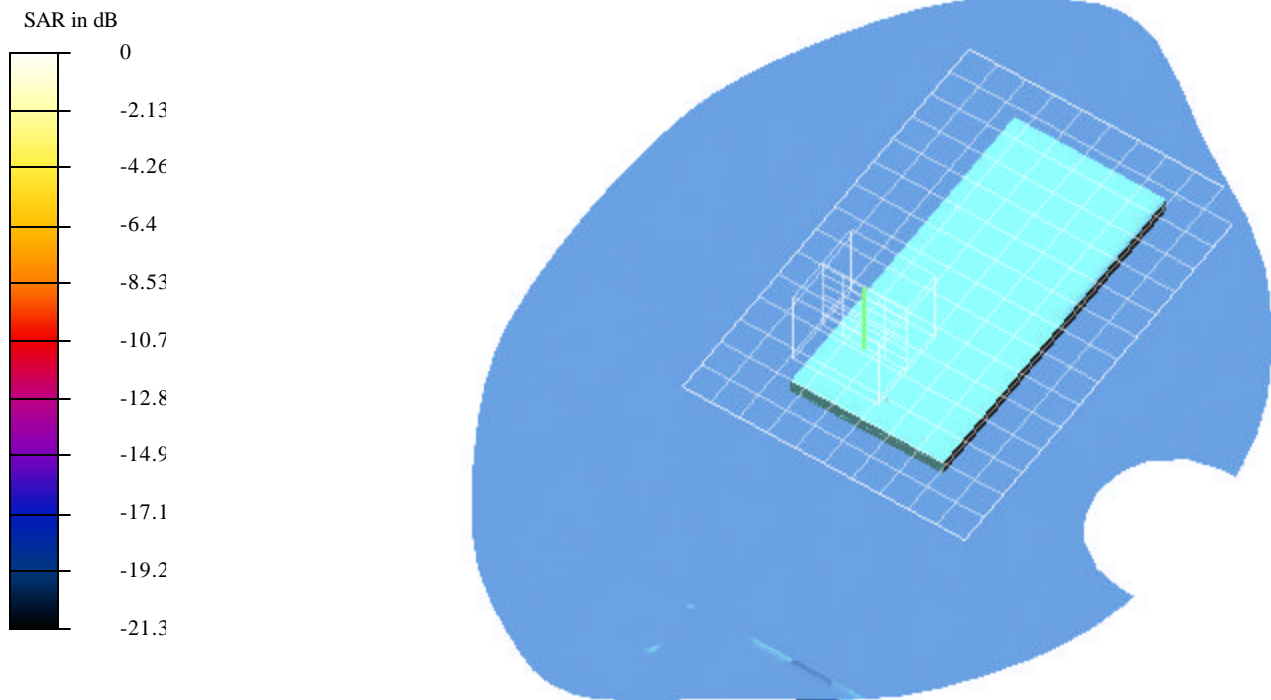

Test Laboratory: Compliance Certification Services

File Name: 1L-CH_0.393 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT Setup Configuration 1 (11b) - Antenna B; Air temp 25 deg C & Liquid temp 23.4 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 13.7 V/m

Peak SAR = 0.786 mW/g

SAR(1 g) = 0.393 mW/g; SAR(10 g) = 0.206 mW/g



Power Drift = -0.12 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

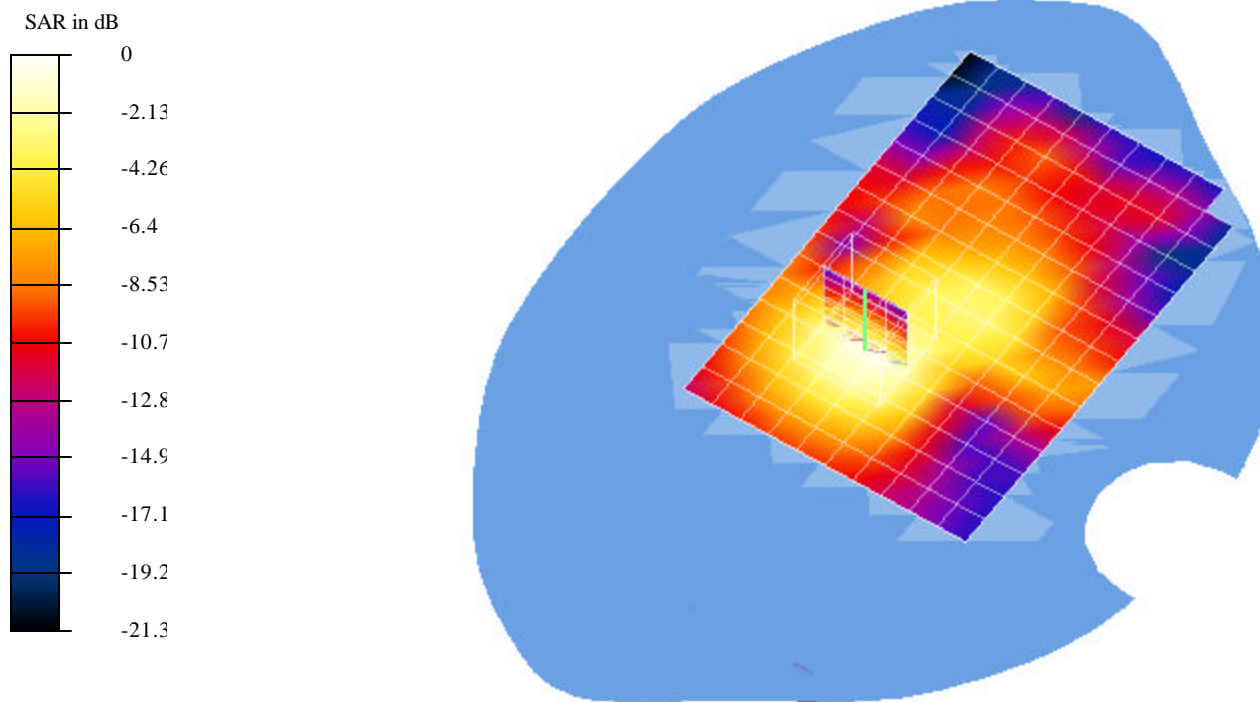

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_1.11 mW.da4

EUT Setup Configuration 1 (Antenna A)

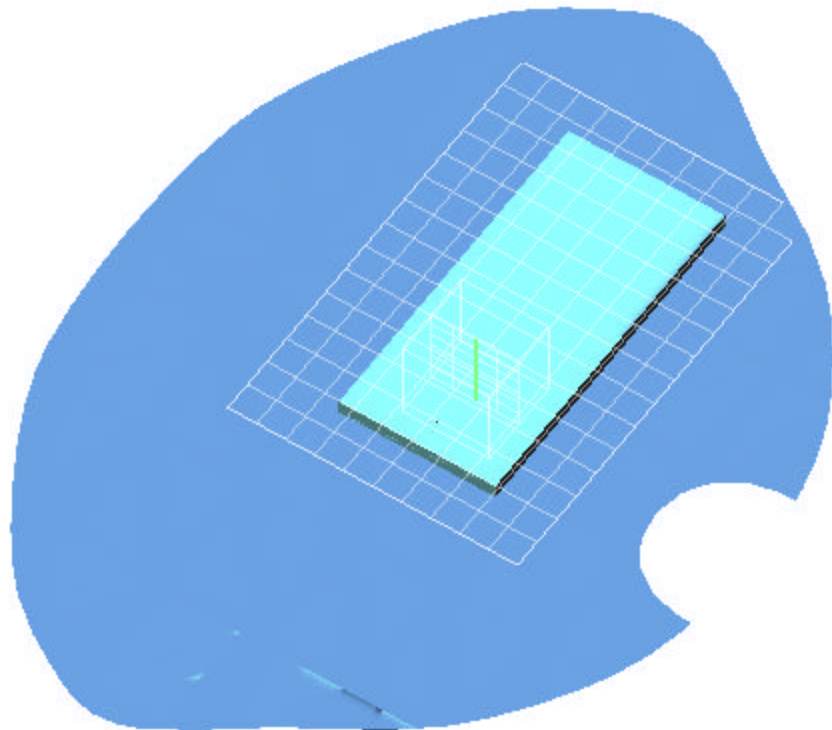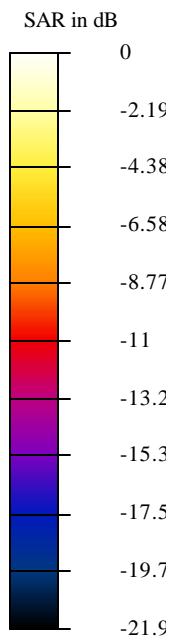

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_1.11 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT Setup Configuration 1 (11g) - Antenna A; Air temp 25 deg C & Liquid temp 23.3 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 22.4 V/m

Peak SAR = 2.44 mW/g

SAR(1 g) = 1.11 mW/g; SAR(10 g) = 0.538 mW/g

Power Drift = -0.05 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

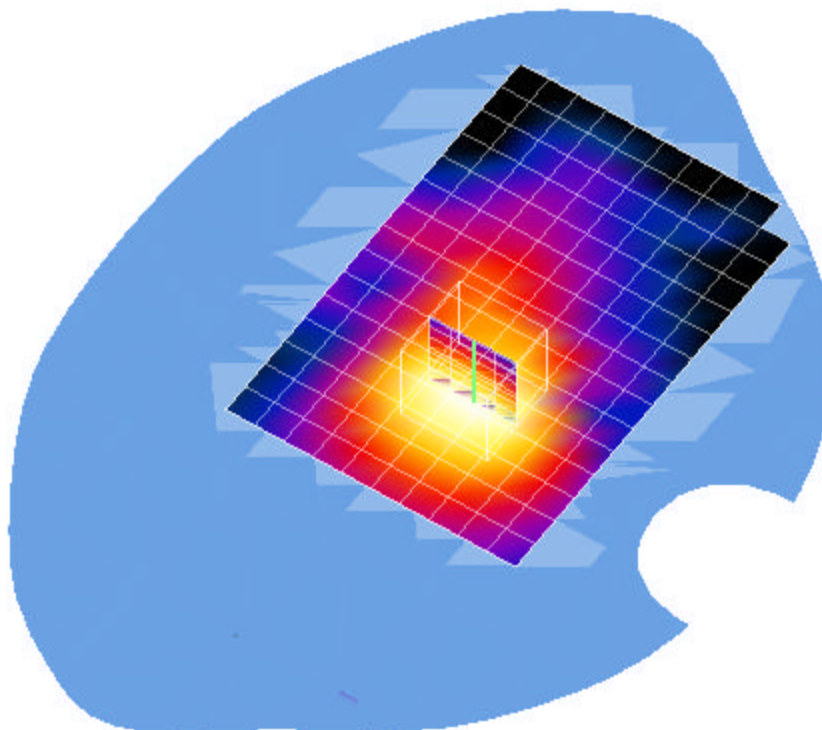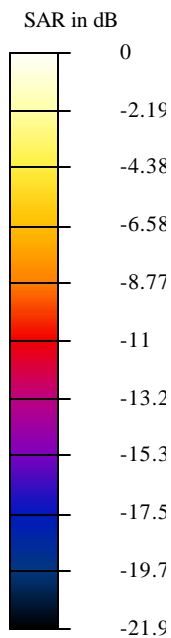

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_1.06 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT Setup Configuration 1 (11g) - Antenna A; Air temp 25 deg C & Liquid temp 23.3 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 24.6 V/m

Peak SAR = 2.34 mW/g

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.513 mW/g

Power Drift = 0.004 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

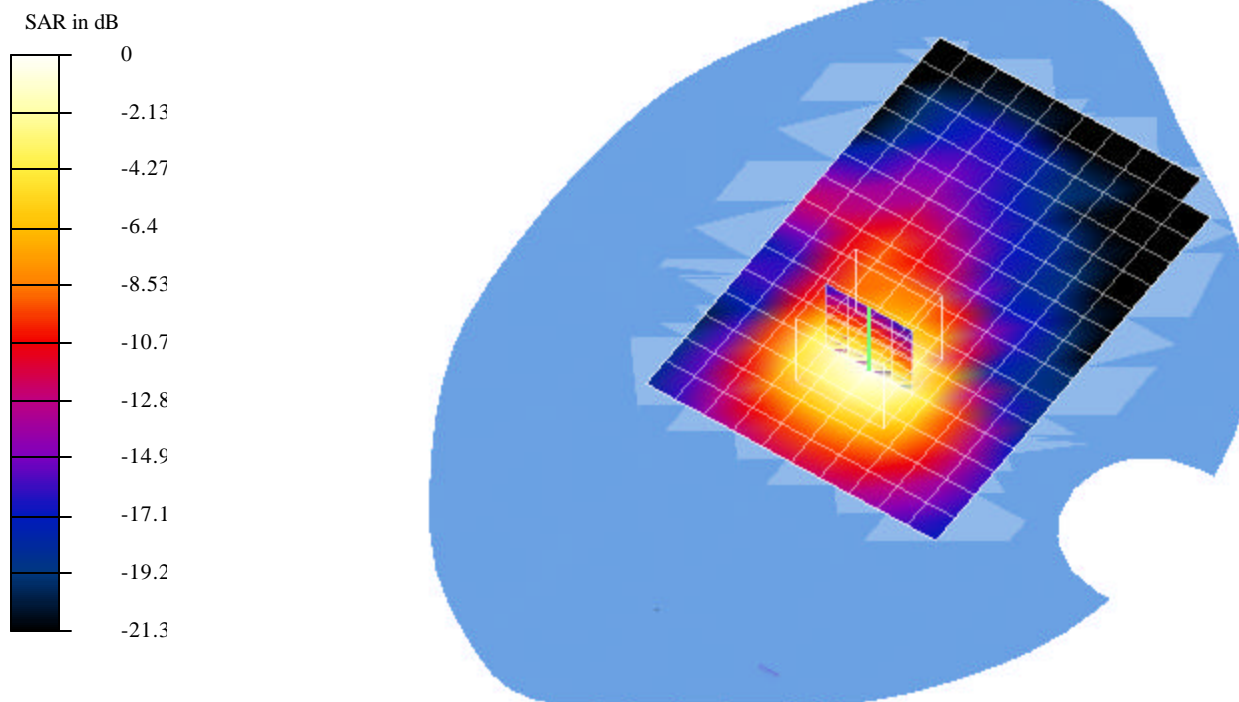

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.933 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT Setup Configuration 1 (11g - turbo) - Antenna A; Air temp 25 deg C & Liquid temp 23 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450MHz ($\sigma=1.9409$ mho/m, $\epsilon= 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 23.1 V/m

Peak SAR = 2.08 mW/g

SAR(1 g) = 0.933 mW/g; SAR(10 g) = 0.45 mW/g

Power Drift = -0.12 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

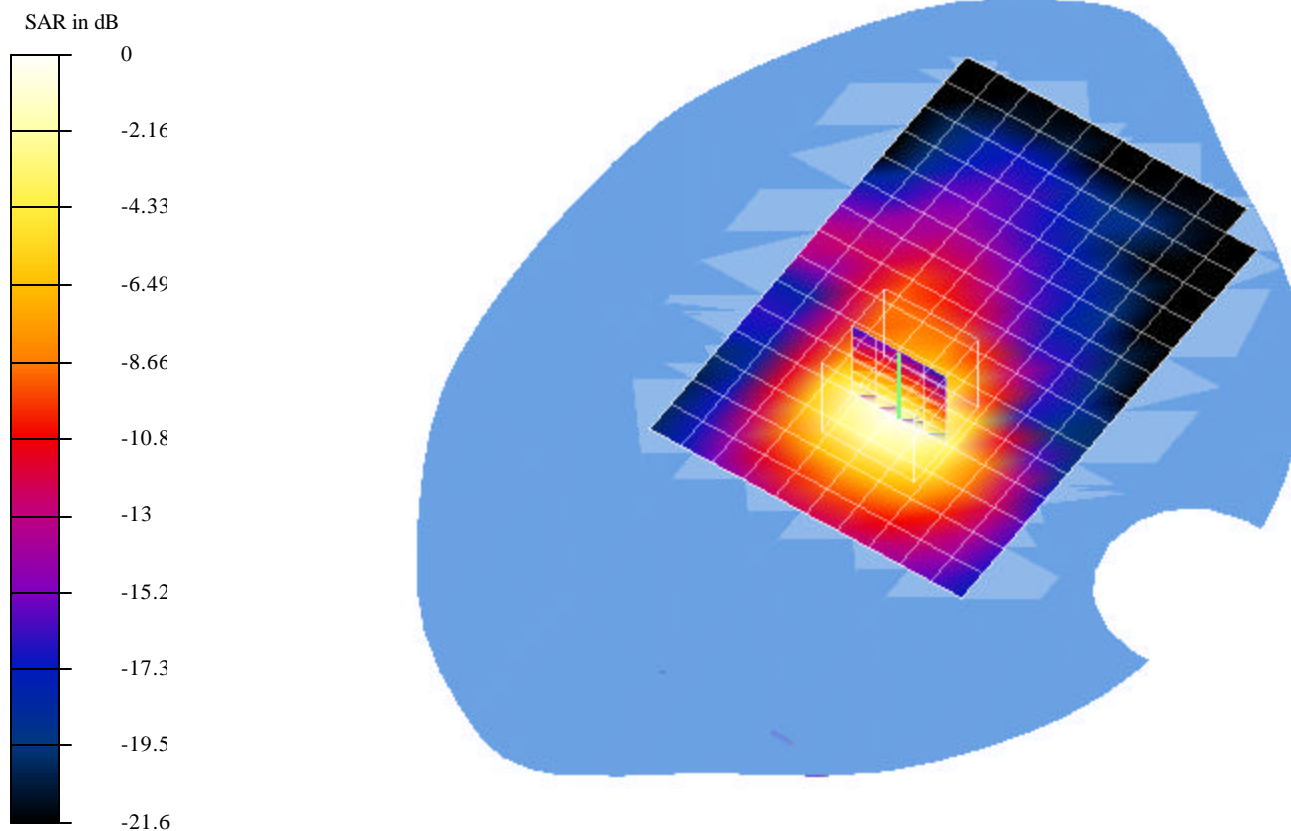

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.928 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT Setup Configuration 1 (11g) - Antenna A; Air temp 25 deg C & Liquid temp 23.2 deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 23 V/m

Peak SAR = 2.06 mW/g

SAR(1 g) = 0.928 mW/g; SAR(10 g) = 0.445 mW/g

Power Drift = 0.04 dB


Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

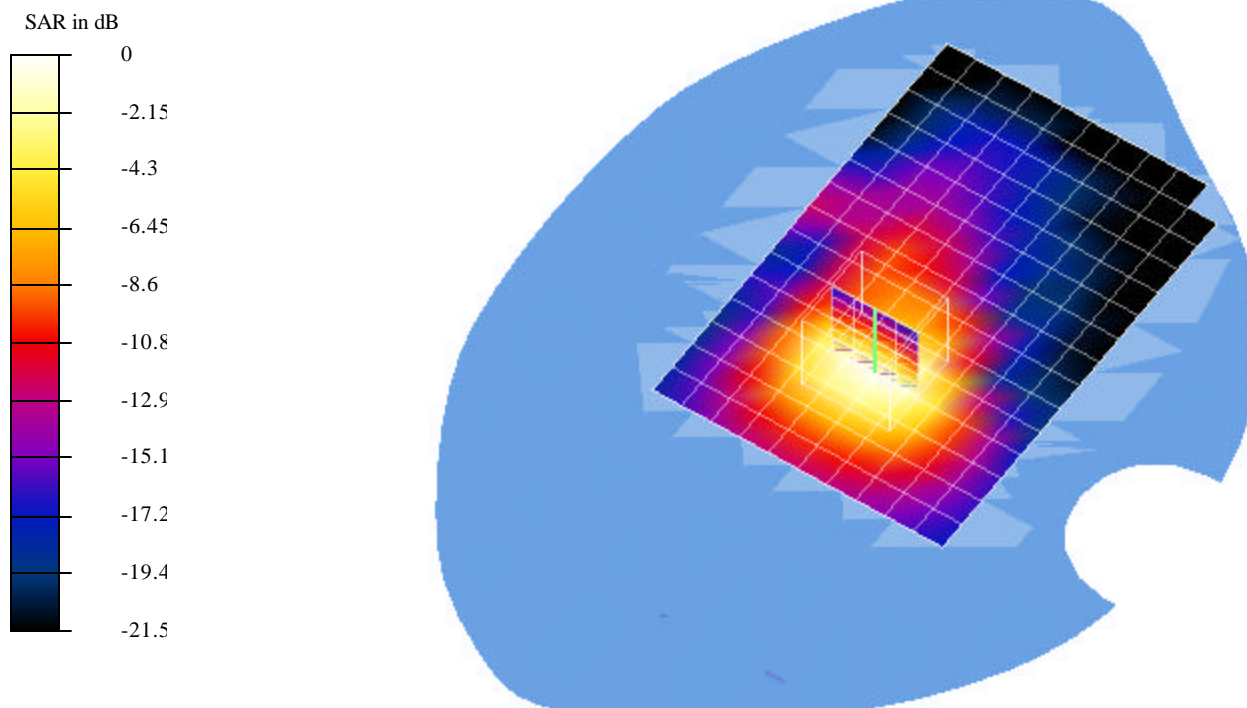

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.319 mW.da4

EUT Setup Configuration 1 (Antenna B)

ε

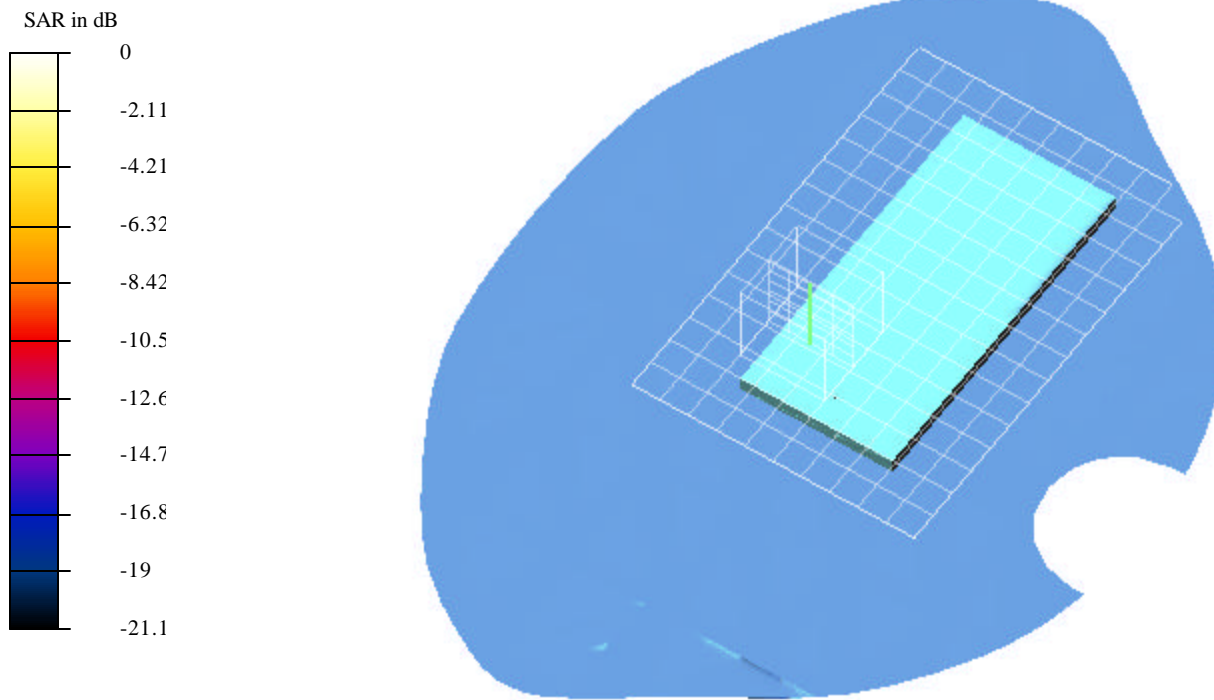

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.319 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT Setup Configuration 1 (11g) - Antenna B; Air temp 25 deg C & Liquid temp 23.2 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 12.4 V/m

Peak SAR = 0.641 mW/g

SAR(1 g) = 0.319 mW/g; SAR(10 g) = 0.167 mW/g


Power Drift = -0.009 dB

Area Scan (11x16x1): Measurement grid: dx=10mm, dy=10mm

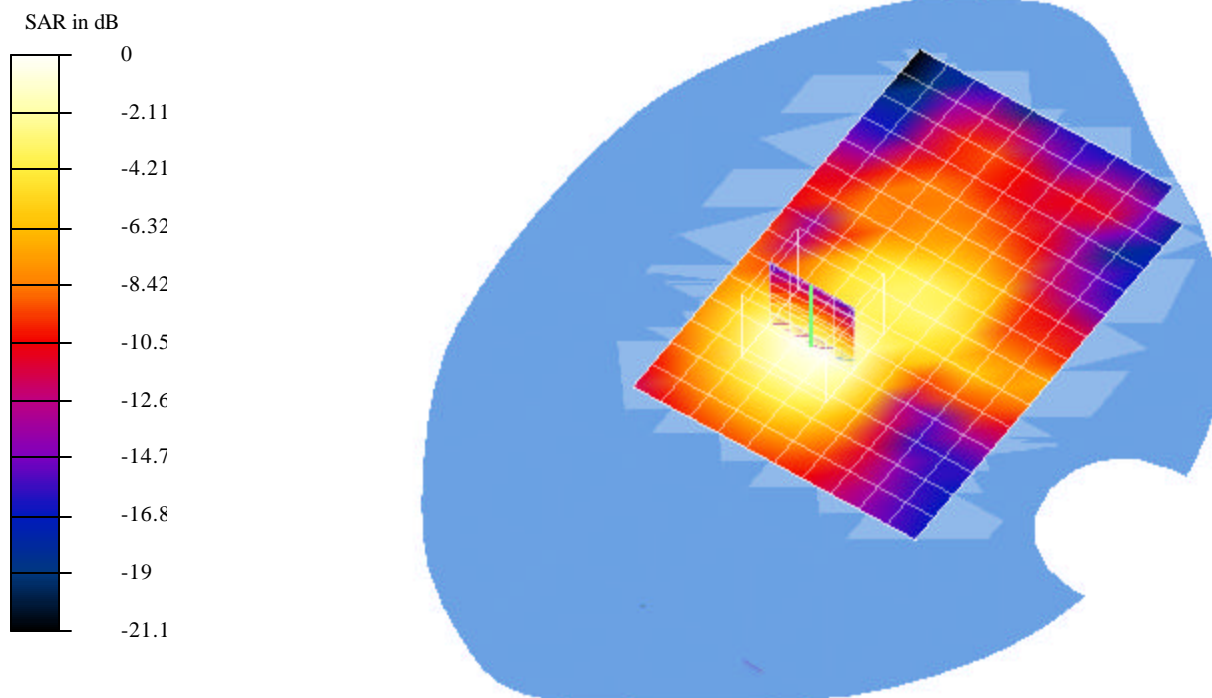

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.469 mW.da4

EUT setup Configuration 2 (Antenna A)

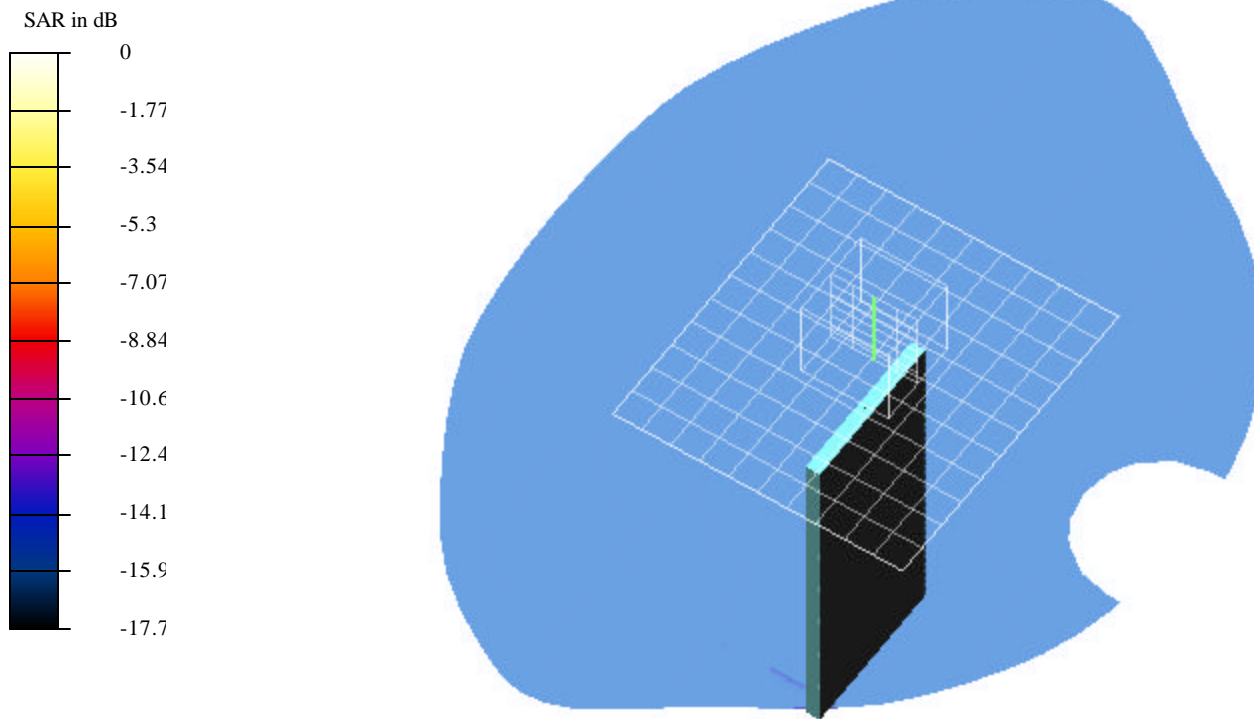

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.469 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT setup Configuration 2 (802.11b) - Antenna A; Air temp 25 deg C & Liquid temp 23.2 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 16.4 V/m

Peak SAR = 0.935 mW/g

SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.256 mW/g

Power Drift = 0.04 dB

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

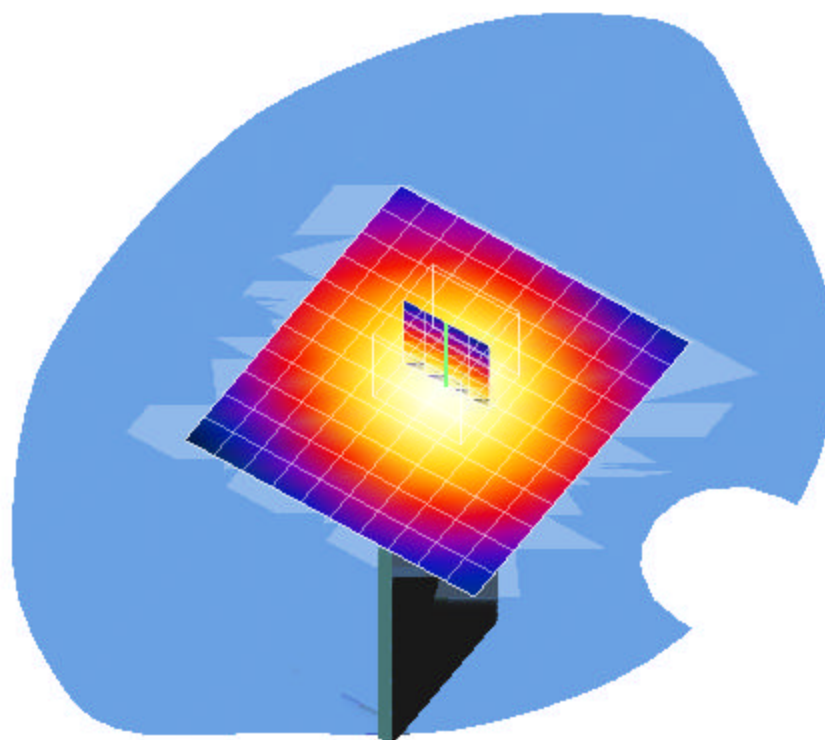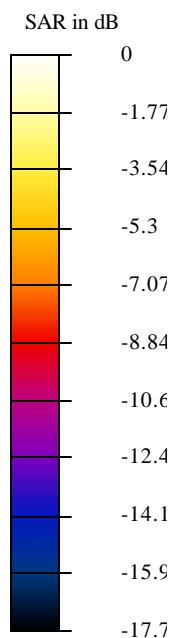

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.472 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT setup Configuration 2 (802.11b) - Antenna A; Air temp 25 deg C & Liquid temp 23 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 16.6 V/m

Peak SAR = 0.958 mW/g

SAR(1 g) = 0.472 mW/g; SAR(10 g) = 0.255 mW/g

Power Drift = 0.1 dB

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

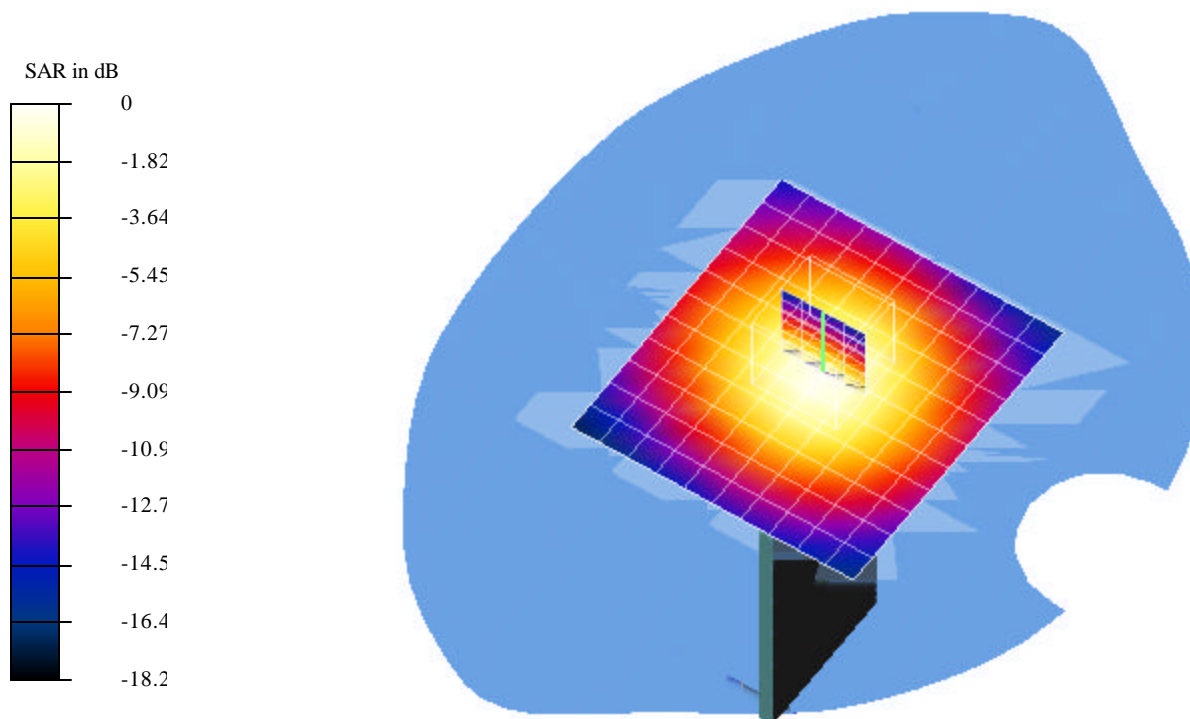

Test Laboratory: Compliance Certification Services

File Name: 3H-CH_0.455 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT setup Configuration 2 (802.11b) - Antenna A; Air temp 25 deg C & Liquid temp 23 deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 16.4 V/m

Peak SAR = 0.936 mW/g

SAR(1 g) = 0.455 mW/g; SAR(10 g) = 0.244 mW/g


Power Drift = -0.07 dB

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

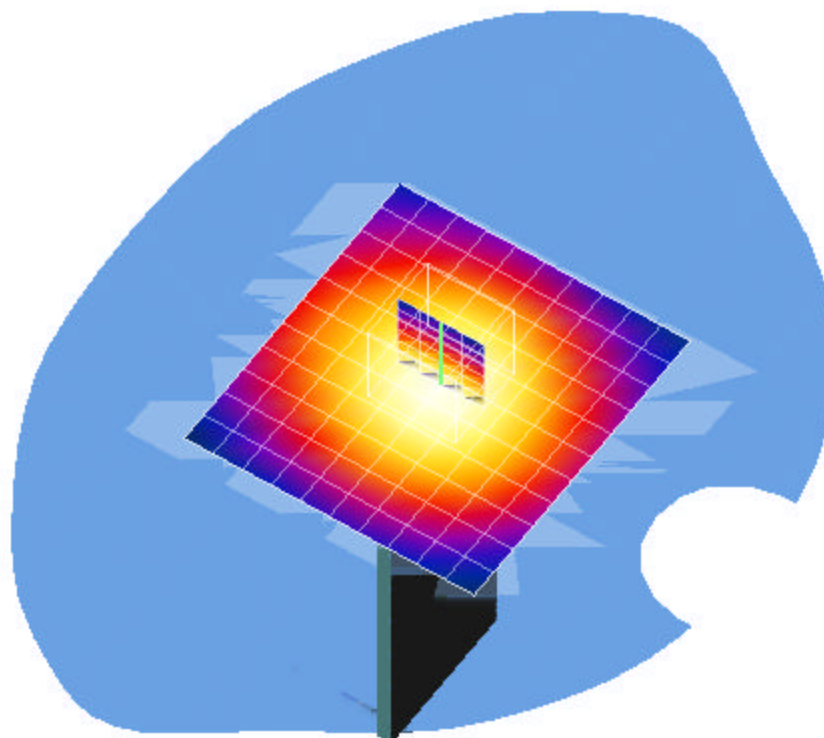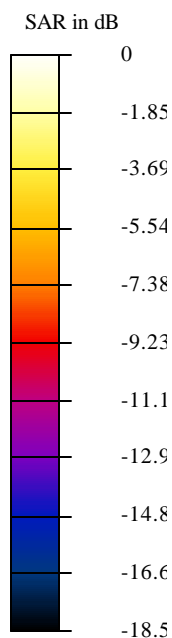

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.225 mW.da4

EUT setup Configuration 2 (Antenna B)

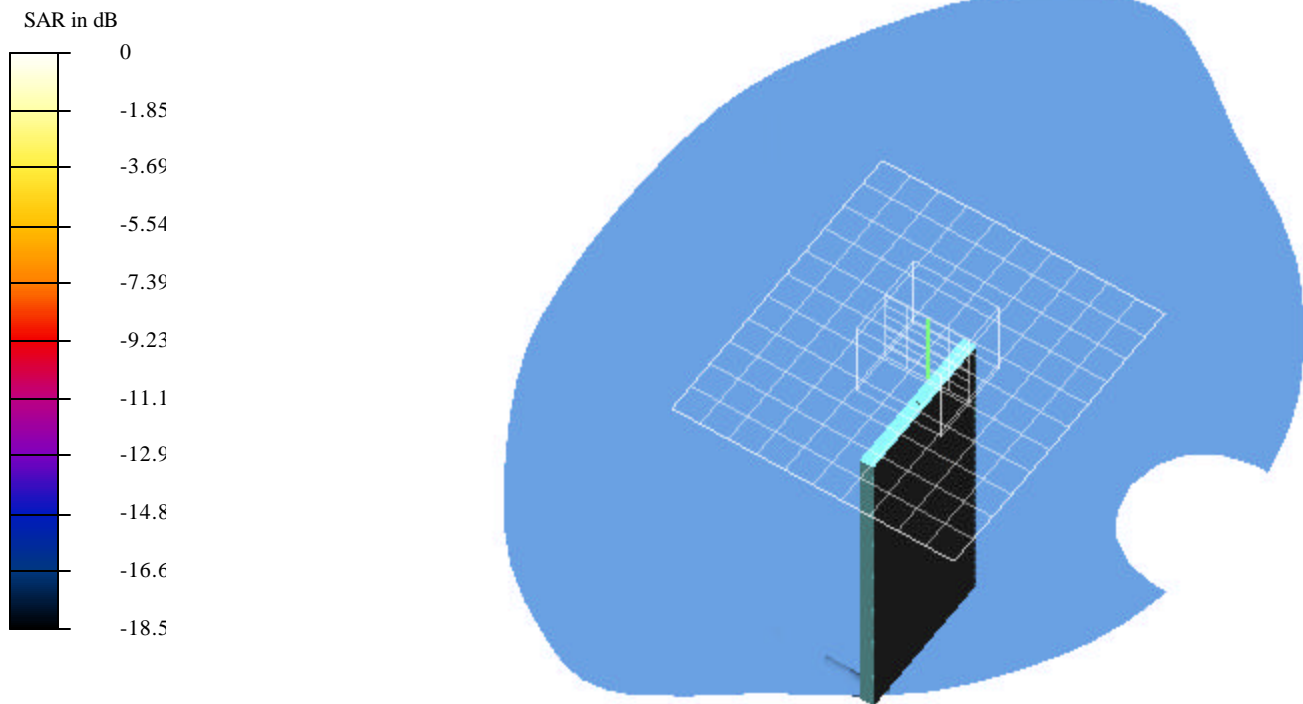

Test Laboratory: Compliance Certification Services

File Name: 2M-CH_0.225 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT setup Configuration 2 (802.11b) - Antenna B; Air temp 25 deg C & Liquid temp 22.8 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 10.9 V/m

Peak SAR = 0.493 mW/g

SAR(1 g) = 0.225 mW/g; SAR(10 g) = 0.117 mW/g


Power Drift = -0.04 dB

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

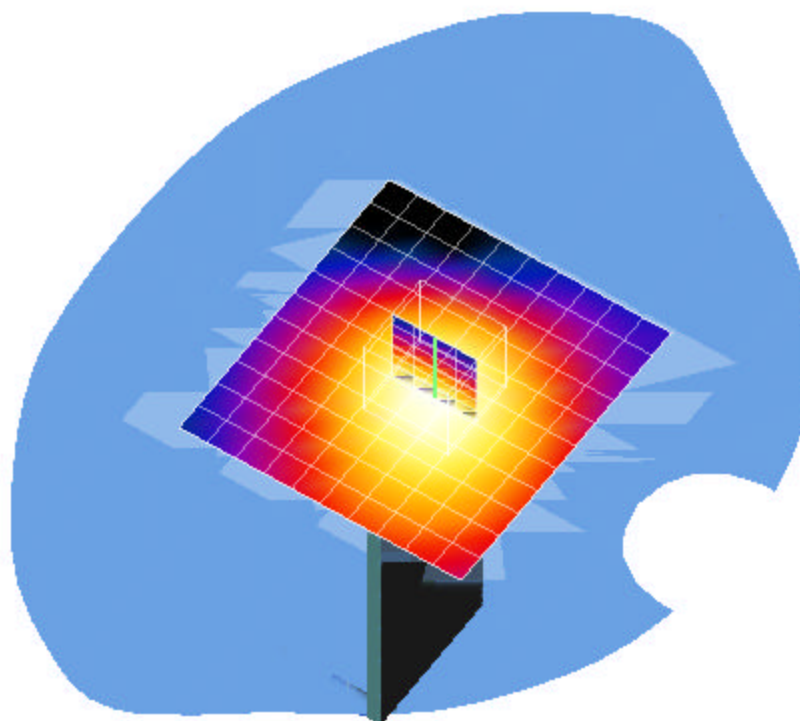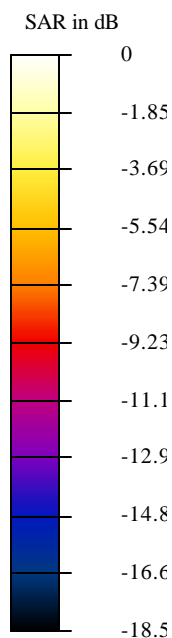

Test Laboratory: Compliance Certification Services
File Name: 1L-CH_0.359 mW.da4

EUT setup Configuration 2 (Antenna A)

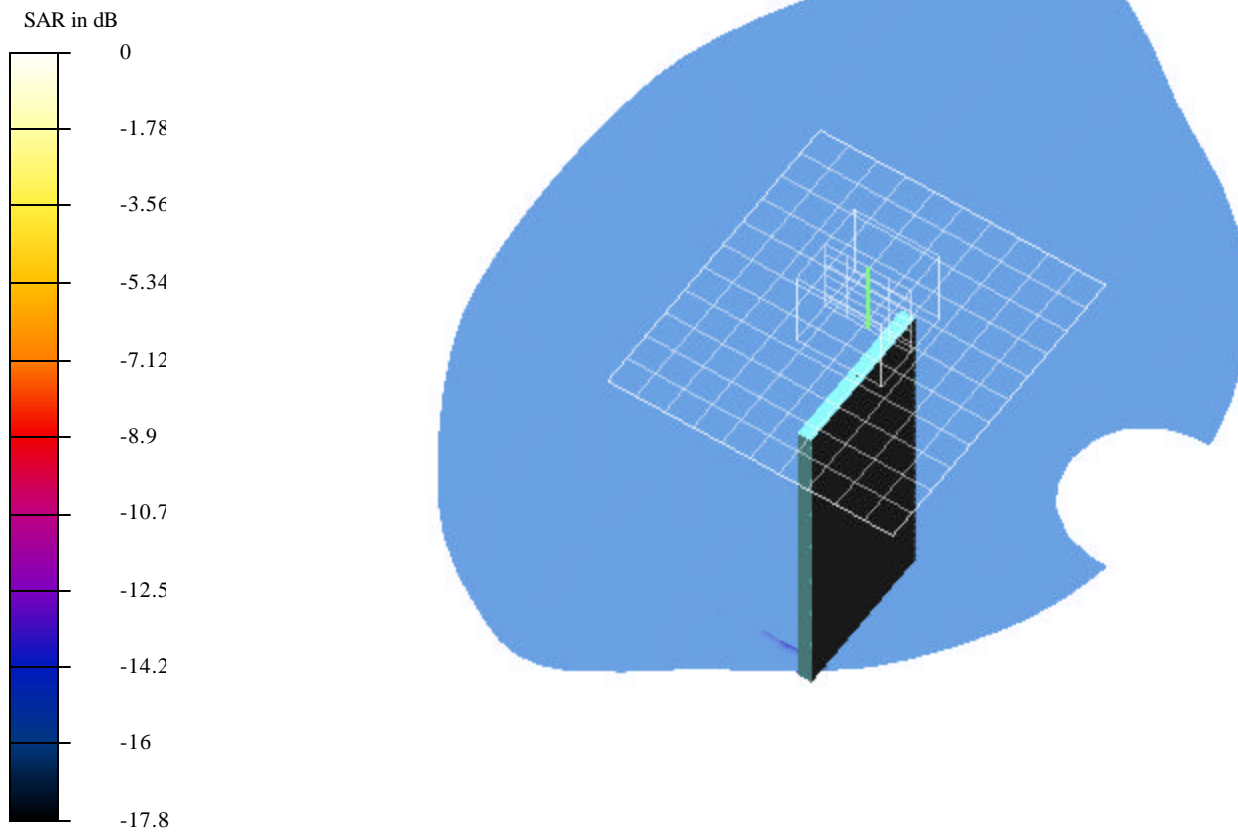

Test Laboratory: Compliance Certification Services

File Name: 1L-CH_0.359 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT setup Configuration 2 (802.11g) - Antenna A; Air temp 25 deg C & Liquid temp 22.8 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)

Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003

- Sensor-Surface: 4mm (Mechanical Surface Detection)

- Electronics: DAE3 Sn427; Calibrated: 2/4/2003

- Phantom: SAM 2 - TP:1050

- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 14.5 V/m

Peak SAR = 0.727 mW/g

SAR(1 g) = 0.359 mW/g; SAR(10 g) = 0.194 mW/g

Power Drift = -0.06 dB

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

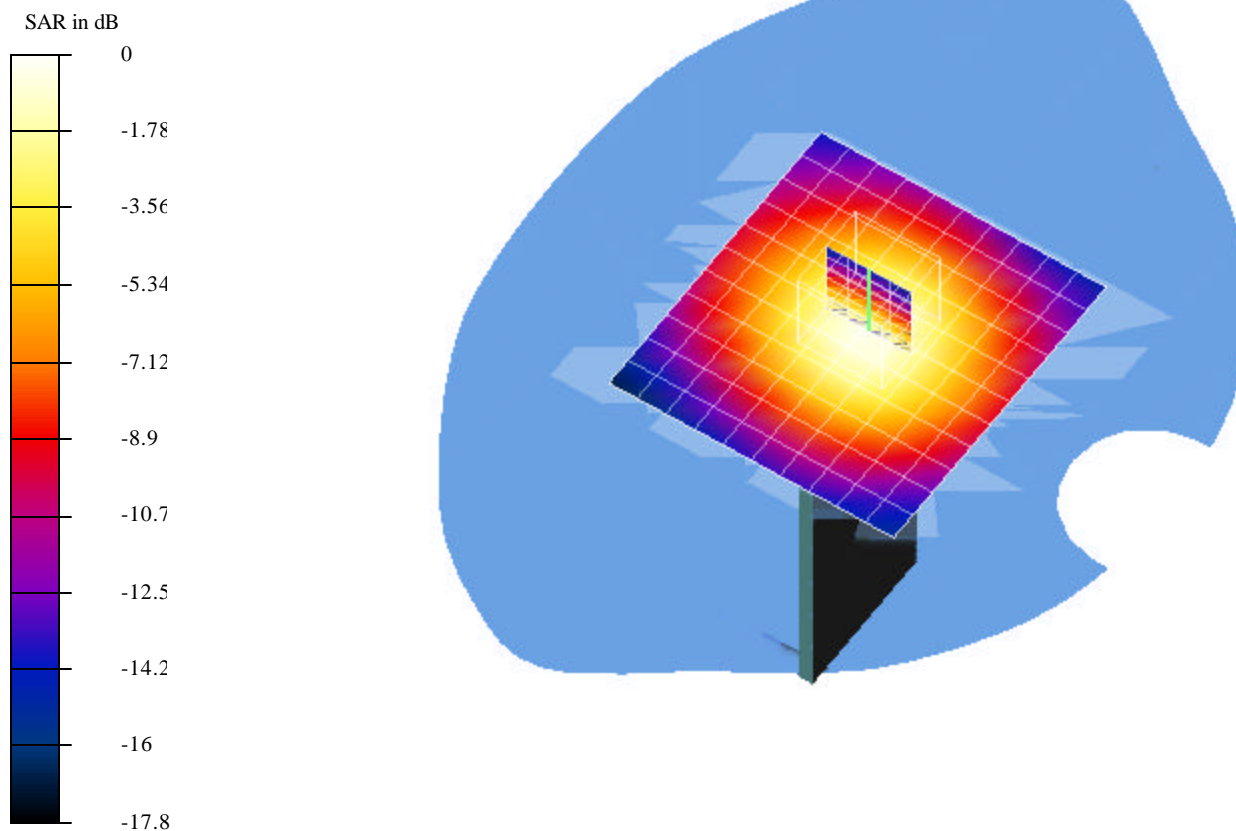

Test Laboratory: Compliance Certification Services
File Name: 2M-CH_0.353 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT setup Configuration 2 (802.11g) - Antenna A; Air temp 25 deg C & Liquid temp 23.1 deg C

Communication System: DSSS; Frequency: 2437 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm



Reference Value = 14.4 V/m

Peak SAR = 0.722 mW/g

SAR(1 g) = 0.353 mW/g; SAR(10 g) = 0.189 mW/g

Power Drift = -0.08 dB

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

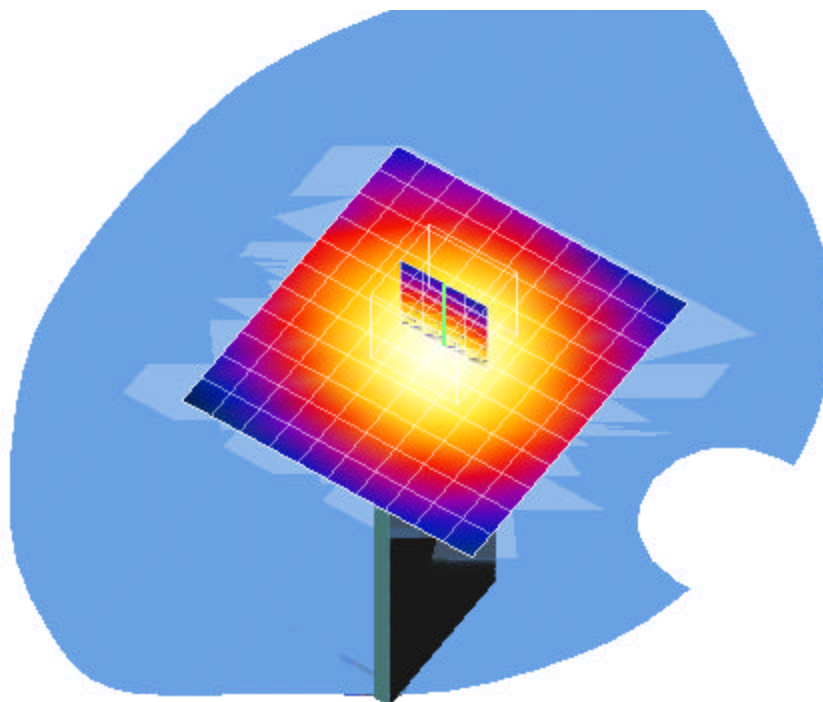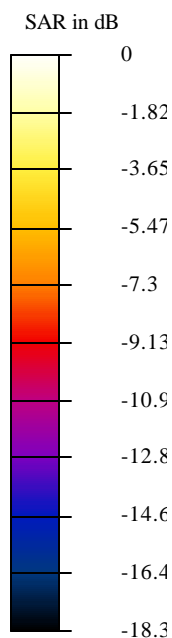

Test Laboratory: Compliance Certification Services
File Name: 3H-CH_0.318 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT setup Configuration 2 (802.11g) - Antenna A; Air temp 25 deg C & Liquid temp 23.1 deg C

Communication System: DSSS; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm


Reference Value = 13.6 V/m

Peak SAR = 0.651 mW/g

SAR(1 g) = 0.318 mW/g; SAR(10 g) = 0.17 mW/g


Power Drift = -0.03 dB

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

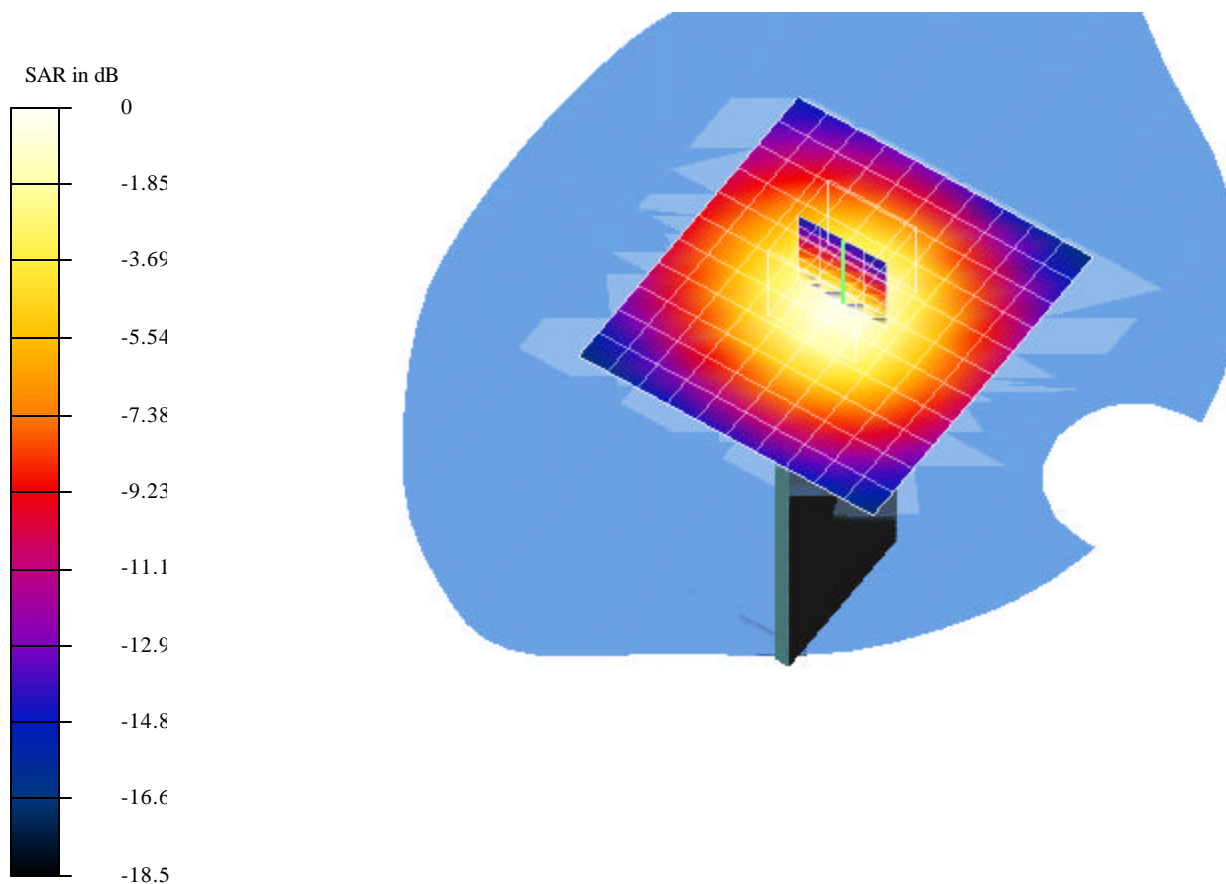

Test Laboratory: Compliance Certification Services
File Name: L-CH_0.217 mW.da4

EUT setup Configuration 2 (Antenna B)

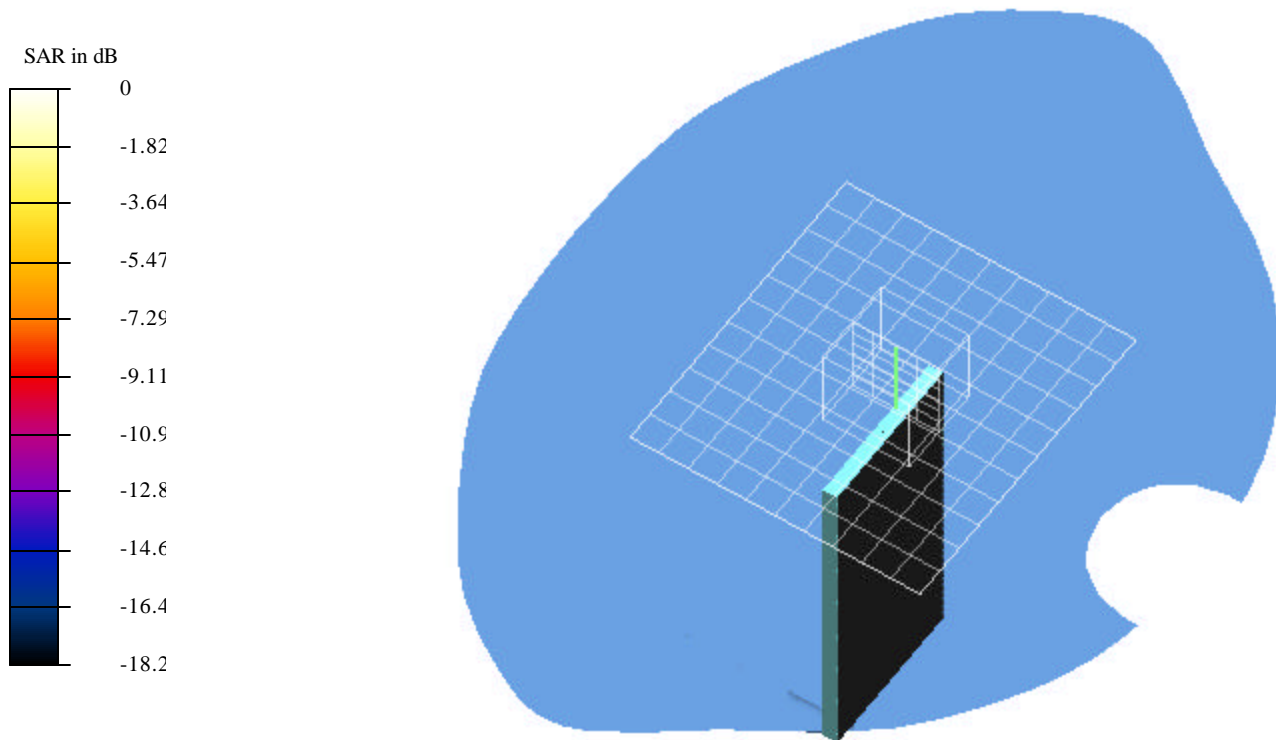

Test Laboratory: Compliance Certification Services
File Name: L-CH_0.217 mW.da4

DUT: Wistron Type & Serial Number: CB-500AG

Program: EUT setup Configuration 2 (802.11g) - Antenna B; Air temp 25 deg C & Liquid temp 23.2 deg C

Communication System: DSSS; Frequency: 2412 MHz; Duty Cycle: 1:1
Medium: Muscle 2450 MHz ($\sigma = 1.9409$ mho/m, $\epsilon = 50.48$, $\rho = 1000$ kg/m³)
Phantom section: FlatSection

DASY4 Configuration:

- Probe: ET3DV6 - SN1577; ConvF(4.7, 4.7, 4.7); Calibrated: 2/7/2003
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 2/4/2003
- Phantom: SAM 2 - TP:1050
- Software: DASY4, V4.0 Build 51

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm

Reference Value = 10.5 V/m

Peak SAR = 0.476 mW/g

SAR(1 g) = 0.217 mW/g; SAR(10 g) = 0.114 mW/g

Power Drift = 0.01 dB

Area Scan (11x12x1): Measurement grid: dx=10mm, dy=10mm

