

**Test Report**  
**for**  
**FCC Part 15 Subpart B & C & E**

*of*

*Product Name*

**802.11 a+b+g Wireless Cardbus Adapter**

*Model*

**CB9-GP**  
**(Brand: Wistron Neweb)**

*Applied by:*

Wistron Neweb Corporation  
No. 10-1, Li-hsin Road 1,  
Science-based Industrial Park, Hsinchu 300,  
Taiwan, R. O. C.

*Test Performed by:*

**International Standards Laboratory**

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.  
Lung-Tan Hsiang, Tao Yuan County 325  
Taiwan, R.O.C.  
Tel:(03)407-1718 Fax:(03)407-1738

**Report Number: ISL-05LR025FC**

**Issue Date: 2005/09/08**

HC LAB:NVLAP:200234-0;VCCI: R-341,C-354;NEMKO:ELA 113a,113c;BSMI:SL2-IN-E-0037;SL2-R1-E-0037;CNLA:1178

LT LAB:NVLAP:200234-0;VCCI: R-1435,C-1440;NEMKO:ELA 113b,113d;BSMI:SL2-IN-E-0013;CNLA:0997

ISL-T10-R29-1

Contents of Report

1. General..... 1

1.1 Certification of Accuracy of Test Data ..... 1

2. Test Results Summary ..... 2

3. Description of Equipment Under Test (EUT) ..... 3

4. TEST RESULTS (802.11a) ..... 5

4.1 Maximum Peak Output Power [Section 15.407 (a)(1)(2)(3)] ..... 5

4.1.1 Test Procedure ..... 5

4.1.2 Test Setup ..... 5

4.1.3 Test Data: (Normal Mode) ..... 5

4.1.4 Test Data: (Turbo Mode) ..... 6

4.2 Peak Power Spectral Density [Section 15.407(a)(1)(2)(3) ] ..... 13

4.2.1 Test Procedure ..... 13

4.2.2 Test Setup ..... 13

4.2.3 Test Data: (Normal Mode) ..... 13

4.2.4 Test Data: (Turbo Mode) ..... 13

4.3 Peak Power Excursion Measurement [Section 15.407(a)(6) ] ..... 20

4.3.1 Test Procedure ..... 20

4.3.2 Test Setup ..... 20

4.3.3 Test Data: (Normal Mode) ..... 20

4.3.4 Test Data: (Turbo Mode) ..... 20

4.4 Powerline Conducted Emissions [Section 15.207 & 15.407 (b)(5) ] ..... 27

4.4.1 EUT Configuration ..... 27

4.4.2 Test Procedure ..... 27

4.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested) 27

4.4.4 Test Data: ..... 28

4.5 Radiated Emission Measurement [Section 15.209 & 15.407(b)(5)] ..... 30

4.5.1 EUT Configuration ..... 30

4.5.2 Test Procedure ..... 30

4.5.3 EMI Receiver/Spectrum Analyzer Configuration ..... 30

4.5.4 Test Data (30MHz – 1GHz) . ..... 31

4.5.5 Test Data ( 1GHz – 40 GHz, Transmitting ) ..... 32

4.6 Band Edge Measurement (Section 15.407 (b) (1) (2)) ..... 44

4.6.1 Test Procedure (Conducted) ..... 44

4.6.2 Test Setup (Conducted) ..... 44

4.6.3 Test Data (conducted): ..... 44

4.6.4 Bandedge Measurement Test Procedure (Radiated) ..... 50

4.6.5 Test Setup (Radiated) ..... 51

4.6.6 Test Data (Radiated): ..... 52

4.7 RF Exposure Measurement [Section 15.407(f)(4) & 1.1307(b)] ..... 62

4.8 Frequency Stability [Section 15.407(g)] ..... 63

4.8.1 Limits of Frequency Stability Measurement ..... 63

4.8.2 Test Procedure ..... 63

4.8.3 Test Setup ..... 63

4.8.4 Test Data ..... 64

5. TEST RESULTS (802.11b)..... 65

5.1 Powerline Conducted Emissions [Section 15.207] ..... 65

5.1.1 EUT Configuration ..... 65

5.1.2 Test Procedure ..... 65

5.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)65

5.1.4 Test Data:..... 66

5.2 Bandwidth for DSSS [Section 15.247 (a)(2)]..... 68

5.2.1 Test Procedure ..... 68

5.2.2 Test Setup ..... 68

5.2.3 Test Data:..... 68

5.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 71

5.3.1 Test Procedure ..... 71

5.3.2 Test Setup ..... 71

5.3.3 Test Data ..... 71

5.4 Radiated Emission Measurement [Section [15.247(c)(4)] ..... 72

5.4.1 EUT Configuration ..... 72

5.4.2 Test Procedure ..... 72

5.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)72

5.4.4 Test Data (30MHz – 1GHz): ..... 73

5.4.5 Test Data ( 1GHz – 25 GHz) ..... 74

5.5 Band Edge Measurement..... 77

5.5.1 Test Procedure (Conducted) ..... 77

5.5.2 Test Setup (Conducted) ..... 77

5.5.3 Test Data:..... 77

5.5.4 Test Procedure (Radiated) ..... 79

5.5.5 Test Setup (Radiated)..... 79

5.5.6 Test Data ..... 80

5.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 83

5.7 DSSS Peak Power Spectral Density [Section 15.247(d) ]..... 84

5.7.1 Test Procedure ..... 84

5.7.2 Test Setup ..... 84

5.7.3 Test Data ..... 84

6. TEST RESULTS (802.11g)..... 87

6.1 Powerline Conducted Emissions [Section 15.207] ..... 87

6.1.1 EUT Configuration ..... 87

6.1.2 Test Procedure ..... 87

6.1.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)87

6.1.4 Test Data:..... 88

6.2 Bandwidth for DSSS [Section 15.247 (a)(2)]..... 90

6.2.1 Test Procedure ..... 90

6.2.2 Test Setup ..... 90

6.2.3 Test Data:..... 90

6.3 DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]..... 93

6.3.1 Test Procedure ..... 93

6.3.2 Test Setup ..... 93

- 6.3.3 Test Data..... 93
- 6.4 Radiated Emission Measurement [Section [15.247(c)(4)] ..... 94
  - 6.4.1 EUT Configuration ..... 94
  - 6.4.2 Test Procedure ..... 94
  - 6.4.3 EMI Receiver/Spectrum Analyzer Configuration (for the frequencies tested)94
  - 6.4.4 Test Data (30MHz – 1GHz): ..... 95
  - 6.4.5 Test Data ( 1GHz – 25 GHz) ..... 97
- 6.5 Band Edge Measurement..... 101
  - 6.5.1 Test Procedure (Conducted) ..... 101
  - 6.5.2 Test Setup (Conducted) ..... 101
  - 6.5.3 Test Data:..... 101
  - 6.5.4 Test Procedure (Radiated) ..... 103
  - 6.5.5 Test Setup (Radiated)..... 103
  - 6.5.6 Test Data ..... 104
- 6.6 RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]..... 107
- 6.7 DSSS Peak Power Spectral Density [Section 15.247(d) ]..... 108
  - 6.7.1 Test Procedure ..... 108
  - 6.7.2 Test Setup ..... 108
  - 6.7.3 Test Data ..... 108
- 7. Appendix ..... 111
  - 7.1 Appendix A: Measurement Procedure for Power line Conducted Emissions..... 111
  - 7.2 Appendix B: Test Procedure for Radiated Emissions ..... 112
  - 7.3 Appendix C: Test Equipment ..... 113
    - 7.3.1 Test Equipment List..... 113
    - 7.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data ..... 113
  - 7.4 Appendix D: Layout of EUT and Support Equipment ..... 114
    - 7.4.1 General Conducted Test Configuration ..... 114
    - 7.4.2 General Radiation Test Configuration ..... 115
  - 7.5 Appendix E: Description of Support Equipment..... 116
    - 7.5.1 Description of Support Equipment ..... 116
    - 7.5.2 Software for Controlling Support Unit ..... 117
    - 7.5.3 I/O Cable Condition of EUT and Support Units..... 117
  - 7.6 Appendix F: Accuracy of Measurement..... 118
  - 7.7 Appendix G: Photographs of EUT Configuration Test Set Up ..... 120
  - 7.8 Appendix H: Antenna Spec. .... 123

# 1. General

## 1.1 Certification of Accuracy of Test Data

**Standards:** CFR 47 Part 15 Subpart B Class B  
 CFR 47 Part 15 Subpart C (Section 15.247)  
 CFR 47 Part 15 Subpart E (Section 15.407)

**Test Procedure:** ANSI C63.4:2003

**Equipment Tested:** 802.11 a+b+g Wireless Cardbus Adapter

**Model:** CB9-GP

**Applied by:** Wistron Neweb Corporation

**Sample received Date:** 2005/07/27

**Final test Date :** 2005/08/15- 2005/08/26

**Test Result** PASS

**Test Site:** Chamber 02, Conduction 02

**Temperature** Refer to each site test data

**Humidity:** Refer to each site test data

  
 \_\_\_\_\_  
 Jerry Chiou

**Test Engineer:**

All the tests in this report have been performed and recorded in accordance with the standards described above and performed by an independent electromagnetic compatibility consultant, International Standards Laboratory.

The test results contained in this report accurately represent the measurements of the characteristics and the energy generated by sample equipment under test at the time of the test. The sample equipment tested as described in this report is in compliance with the limits of above standards.

Approve & Signature

  
 -----  
 Eddy Hsiung/Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 127 pages, including 1 cover page , 3 contents page, and 123 pages for the test description. This report must not be use to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard. International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

## 2. Test Results Summary

The 802.11b functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247( c )	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 ( c )	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	SAR report attached
15.247 (d)	Power Spectral Density	Pass	

The 802.11g functions of EUT has been tested according to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247( c )	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 ( c )	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	SAR report attached
15.247 (d)	Power Spectral Density	Pass	

The 802.11a functions of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart E			
Standard Section	Test Type	Result	Remarks
15.407 (a)(1)(2)(3)	Peak Transmit Power	Pass	
15.407 (a)(1)(2)(3)	Peak Power Spectral Density	Pass	
15.407 (a)(6)	Peak Power Excursion	Pass	
15.407 (b)(5)	AC Power Line Emissions	Pass	
15.407 (b)(5)	Radiated Emissions 30MHz – 40 GHz	Pass	
15.407(f)	Radiation exposure	Pass	SAR report attached
15.407 (g)	Frequency Stability	Pass	

### 3. Description of Equipment Under Test (EUT)

Description: 802.11a+b+g WIRELESS CARDBUS ADAPTER  
 Model No.: CB9-GP  
 FCC ID: **NKRCB9GP**  
 Frequency Range 802.11a: 5150~5350 MHz, 5725 ~ 5825MHz  
 Frequency Range 802.11b/g: 2400~2483.5 MHz  
 Support channel:  
 802.11a 12 Channels  
 802.11a Turbo mode 5 Channels  
 802.11b/g 11 Channels

Modulation Skill:  
 802.11a Normal mode OFDM (6 Mbps – 54 Mbps)  
 802.11a Turbo mode OFDM (12 Mbps – 108 MBps)  
 802.11b DBPSK(1Mbps), DQPSK(2Mbps),  
 CCK(5.5/11Mbps)  
 802.11g OFDM (6M - 54Mbps)

Antennas Type:  
 Left ANT : Dual band printed IFA type  
 made by Wistron NeWeb Corp.  
 Right ANT: Dual band printed IFA type  
 made by Wistron NeWeb Corp.

Antenna Connected: The Antenna is layout in the PCB of the WLAN  
 module, the user is not possible to change the  
 antenna.

Antenna peak Gain:  
 Left antenna -2.9 dB (11b/g), 0.65 dB (11a)  
 Right antenna 1.5 dB (11b/g), 1.06 dB (11a)

Power Type of LAN module: 3.3V DC from Notebook PC

The channel and the operation frequency of 802.11b and 802.11g is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	2412	07	2442
02	2417	08	2447
03	2422	09	2452
04	2427	10	2457
05	2432	11	2462
06	2437		

The channel and the operation frequency of 802.11a Normal Mode is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	5180	07	5300
02	5200	08	5320
03	5220	09	5745
04	5240	10	5765
05	5260	11	5785
06	5280	12	5805

The channel and the operation frequency of 802.11a Turbo Mode is listed below:

Channel	Frequency(MHz)	Channel	Frequency(MHz)
01	5210	04	5760
02	5250	05	5800
03	5290		

PCMCIA Connector: one 68 pins

EMI Noise Source:

Crystal: 40MHz (Y2)

EMI Solution:

1. add two gaskets upon RF shield cover to contact metal casing.

#### 4. TEST RESULTS (802.11a)

##### 4.1 Maximum Peak Output Power [Section 15.407 (a)(1)(2)(3)]

###### 4.1.1 Test Procedure

The transmitter output of EUT was connected to the peak power analyzer.

###### 4.1.2 Test Setup



Frequency Band	Limit
5.15 – 5.25 GHz	The lesser of 50mW (17dBm) or 4dBm+10logB
5.25 – 5.35GHz	The lesser of 250mW (24dBm) or 11dBm+10logB
5.725-5.825GHz	The lesser of 1W (30dBm) or 17dBm+10logB

Note: B is the 26dB emission bandwidth in MHz

###### 4.1.3 Test Data: (Normal Mode)

##### Maximum Peak Output Power

Temperature ( ):25

Test Engineer:Jerry Chiou

Humidity (%):50

Chennel	Frequency (Mhz)	Peak Power Output (dBm)	26 dBc BW/Limit Mhz/dBm	The lesser Limit (dBm)	Pass/Fail
1	5180	15.30	28.07/ 18.48	17	Pass
4	5240	15.07	26.88/ 18.29	17	Pass
5	5260	15.73	28.21/ 25.50	24	Pass
8	5320	14.76	27.37/ 25.37	24	Pass
9	5745	13.05	28.91/ 31.61	30	Pass
10	5765	13.99	28.91/ 31.31	30	Pass
12	5805	14.07	26.32/ 31.20	30	Pass

4.1.4 Test Data: (Turbo Mode)

Maximum Peak Output Power

Temperature ( ):25


Test Engineer:Jerry Chiou

Humidity (%):50

Chennel	Frequency (Mhz)	Peak Power Output (dBm)	26 dBc BW/Limit Mhz/dBm	The lesser Limit (dBm)	Pass/Fail
1	5210	15.39	53.04/ 21.25	17	Pass
2	5250	14.76	53.16/ 21.26	17	Pass
3	5290	13.84	52.68/ 28.22	24	Pass
4	5760	13.09	52.56/ 34.21	30	Pass
5	5800	8.85	51.48/ 34.12	30	Pass





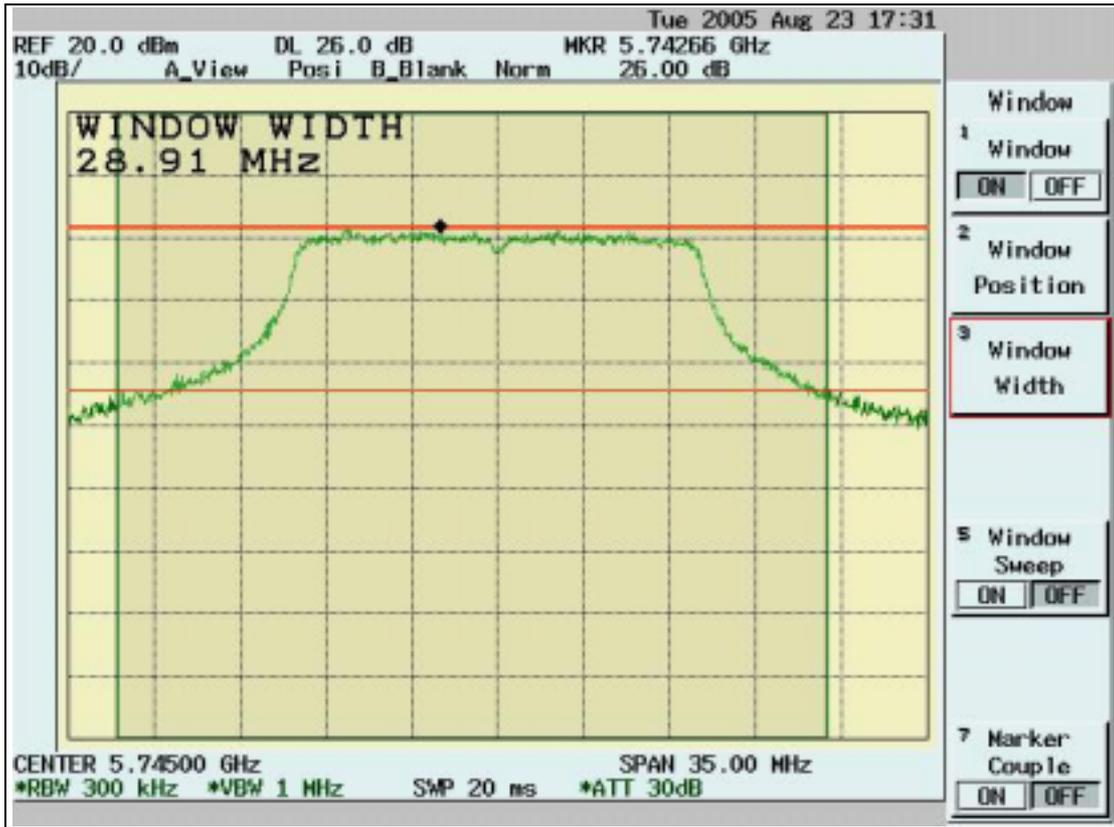








### 4.2 Peak Power Spectral Density [Section 15.407(a)(1)(2)(3) ]

#### 4.2.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.  
 Equipment mode: Spectrum analyzer  
 Detector function: Peak mode  
 SPAN: 30MHz or 50MHz  
 RBW: 1MHz  
 VBW: 3MHz  
 Sweep time: 30 or 50 sec.  
 Center frequency: fundamental frequency tested
2. Peak search was read to the peak power after maximum hold function is completed.

#### 4.2.2 Test Setup



#### 4.2.3 Test Data: (Normal Mode)

##### Maximum Peak Output Power Density

Temperature ( ):25

Test Engineer:Jerry Chiou

Humidity (%):50

Channel	Frequency (Mhz)	Spectrum Reading (dBm)	Cable Loss(dB)	Peak Power Output dBm/MHz)	Limit (dBm/Mhz)	Pass/Fail
1	5180	-2.97	1.80	-1.17	4	Pass
4	5240	-2.92	1.80	-1.12	4	Pass
5	5260	-3.10	1.80	-1.30	11	Pass
8	5320	-4.18	1.80	-2.38	11	Pass
9	5745	-5.48	1.80	-3.68	17	Pass
10	5765	-4.81	1.80	-3.01	17	Pass
12	5805	-5.15	1.80	-3.35	17	Pass

#### 4.2.4 Test Data: (Turbo Mode)



##### Maximum Peak Output Power Density



Temperature ( ):25



Test Engineer:Jerry Chiou



Humidity (%):50



Channel	Frequency (Mhz)	Spectrum Reading (dBm)	Cable Loss(dB)	Peak Power Output dBm/MHz)	Limit (dBm/Mhz)	Pass/Fail
1	5210	-6.59	1.80	-4.79	4	Pass
2	5250	-6.77	1.80	-4.97	4	Pass
3	5290	-7.09	1.80	-5.29	11	Pass
4	5760	-8.45	1.80	-6.65	11	Pass
5	5800	-14.21	1.80	-12.41	17	Pass

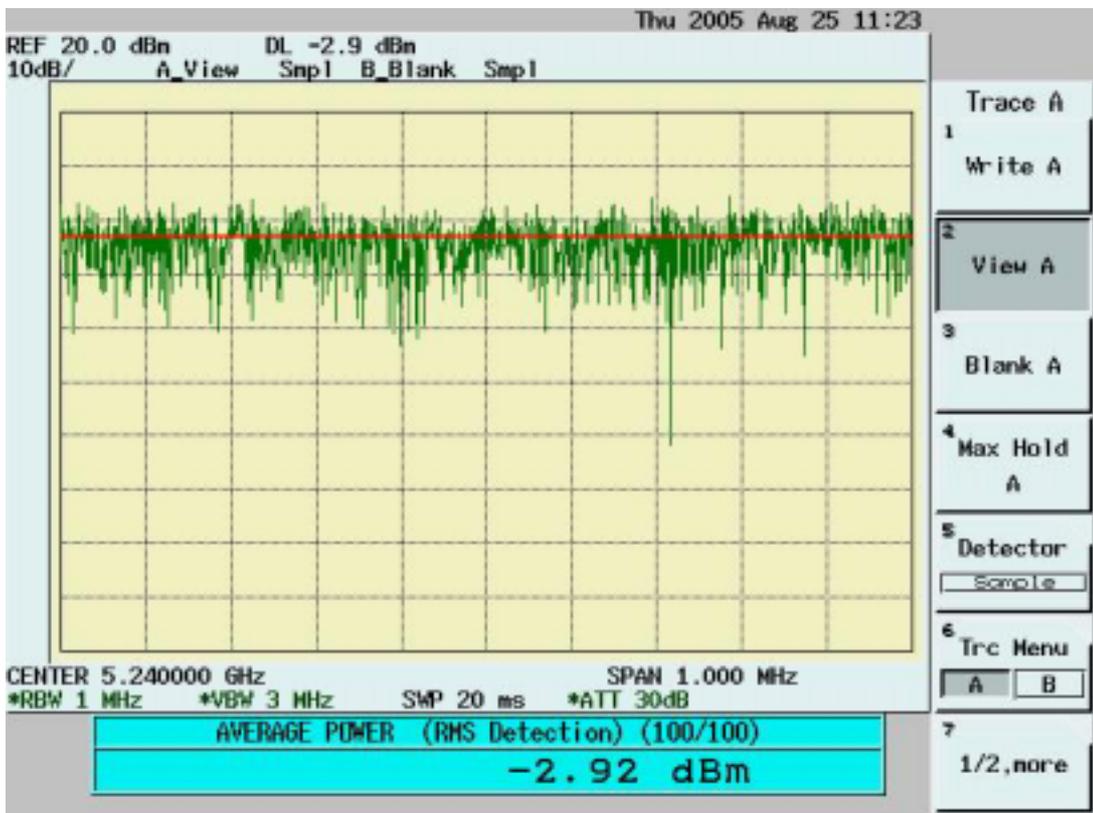
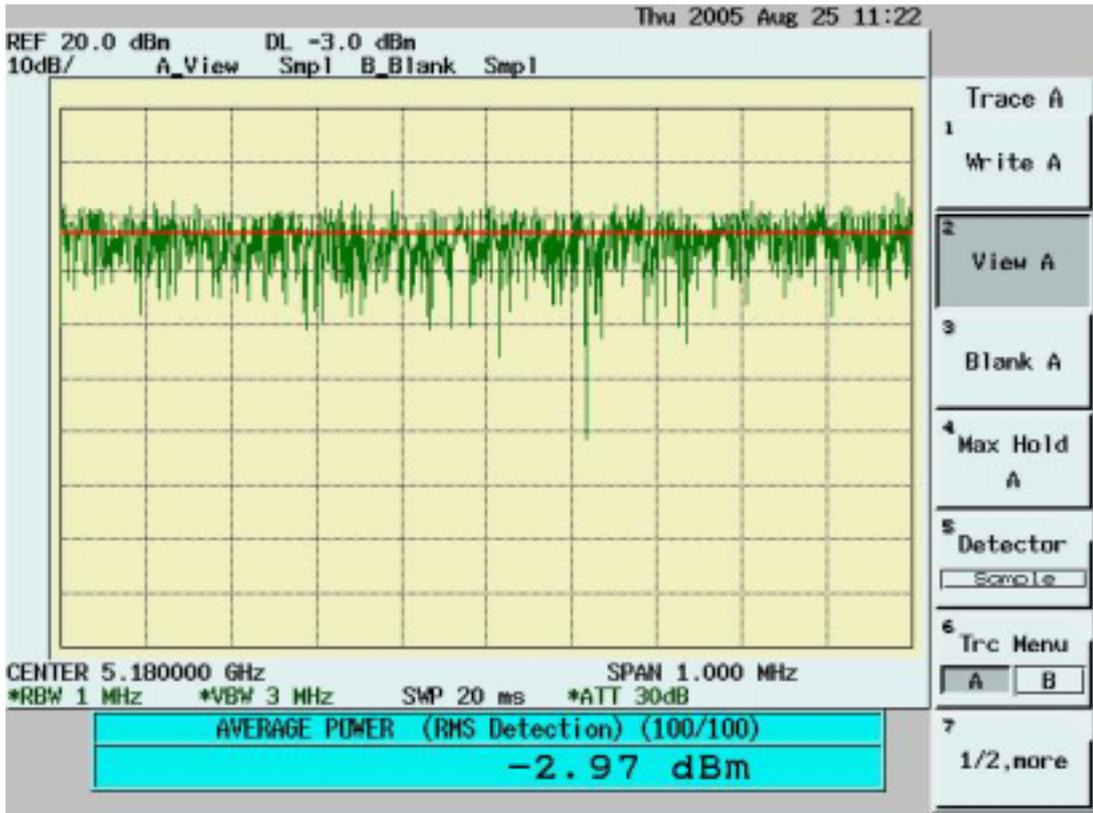


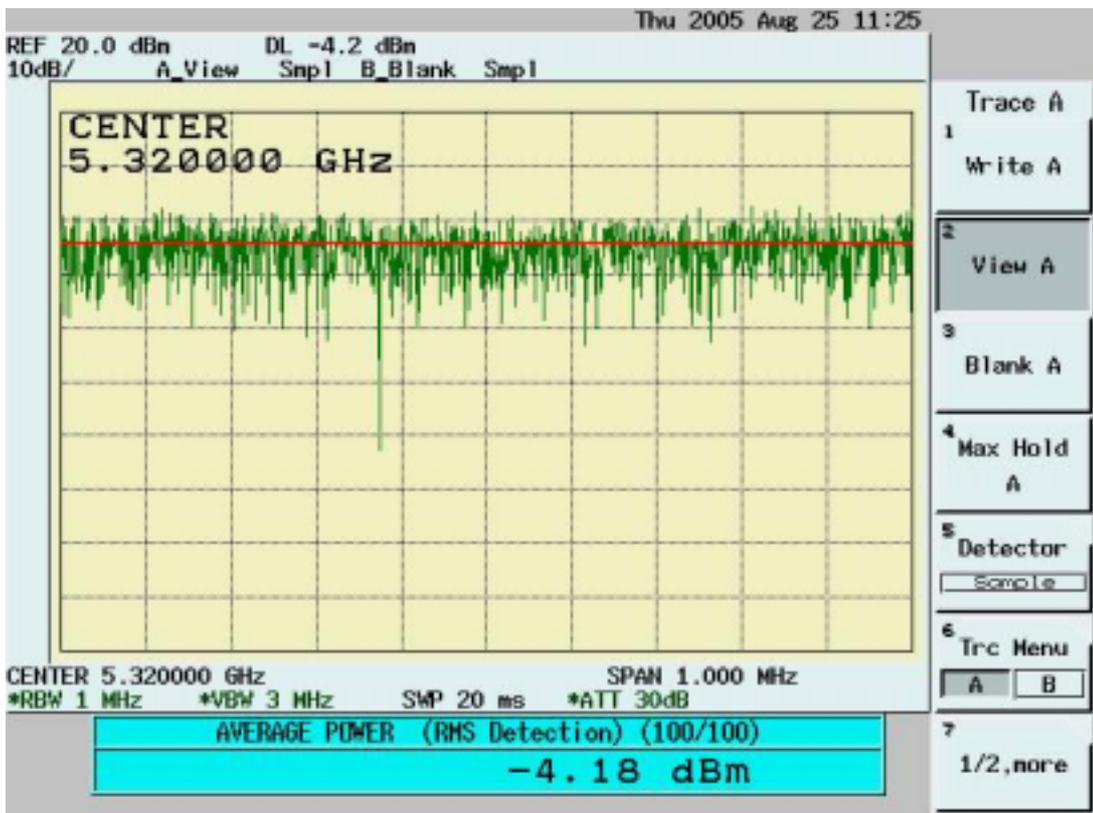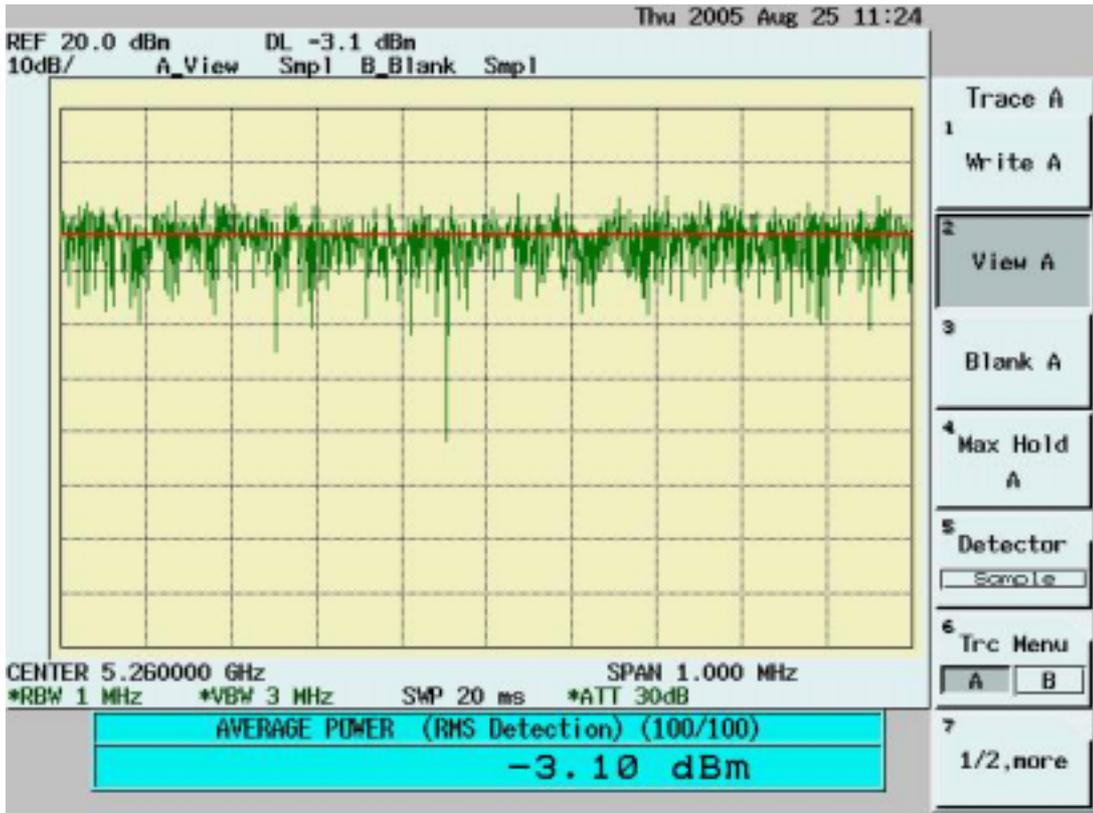

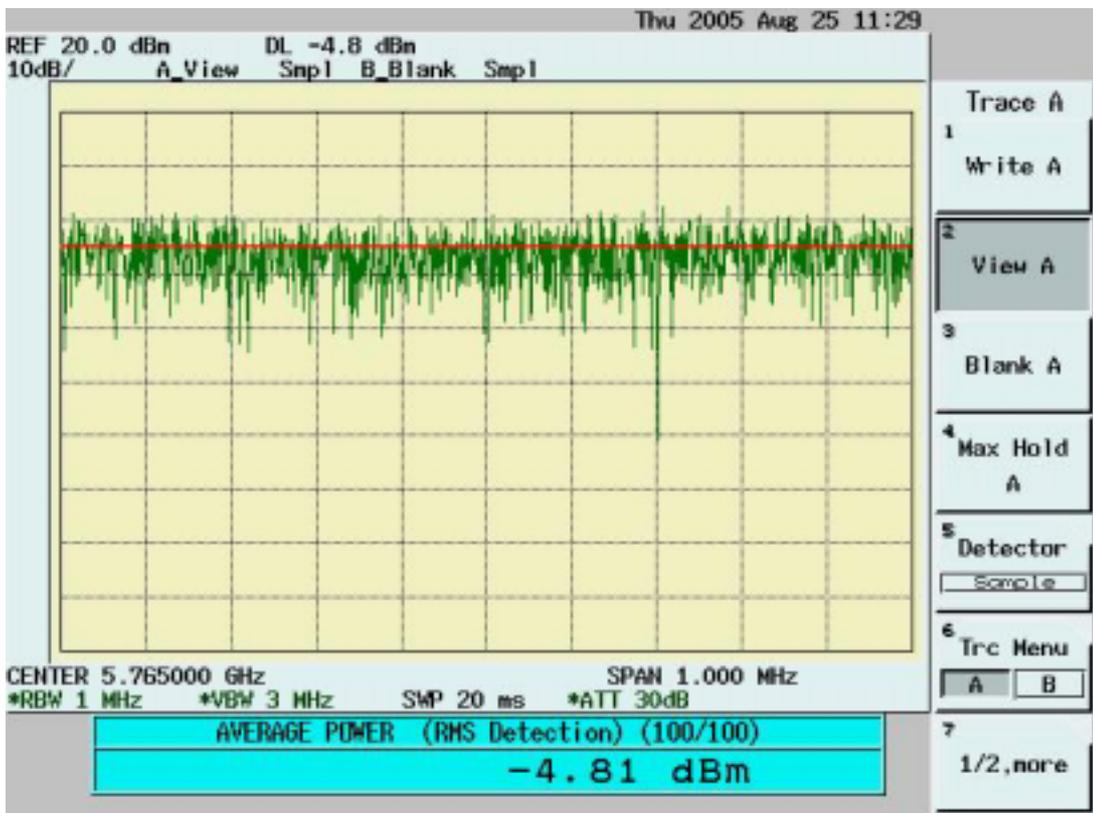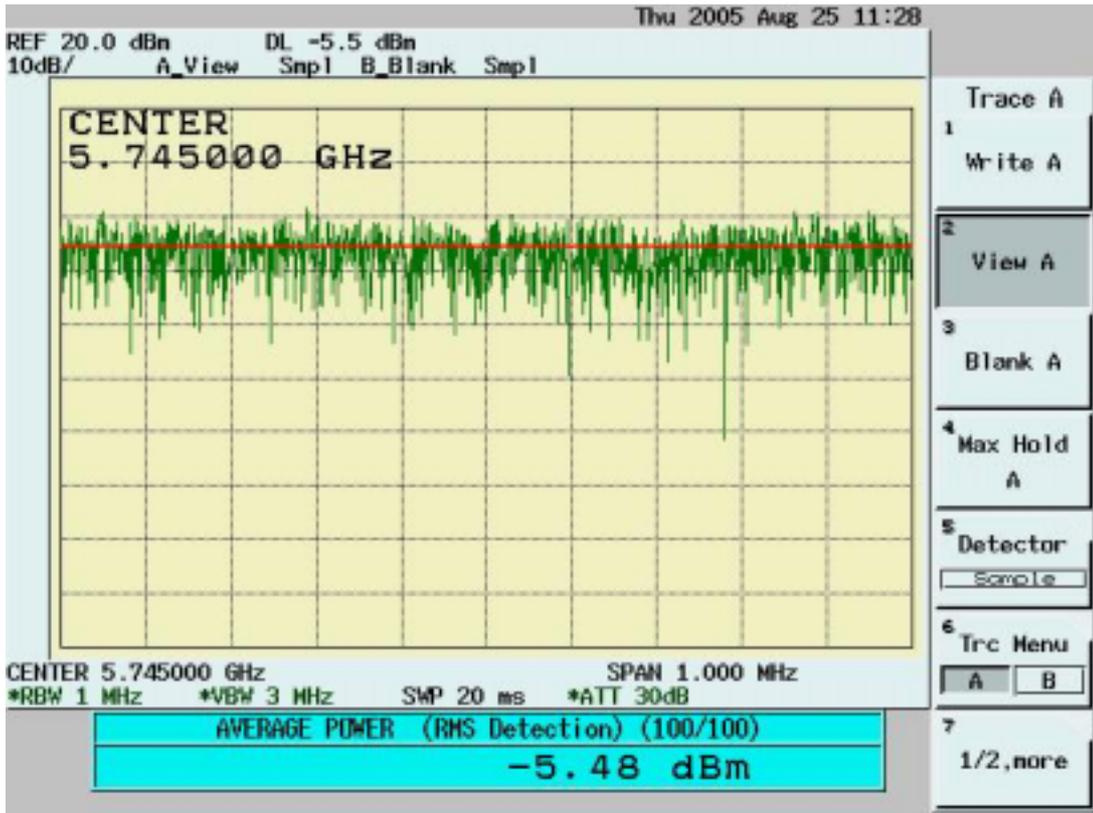

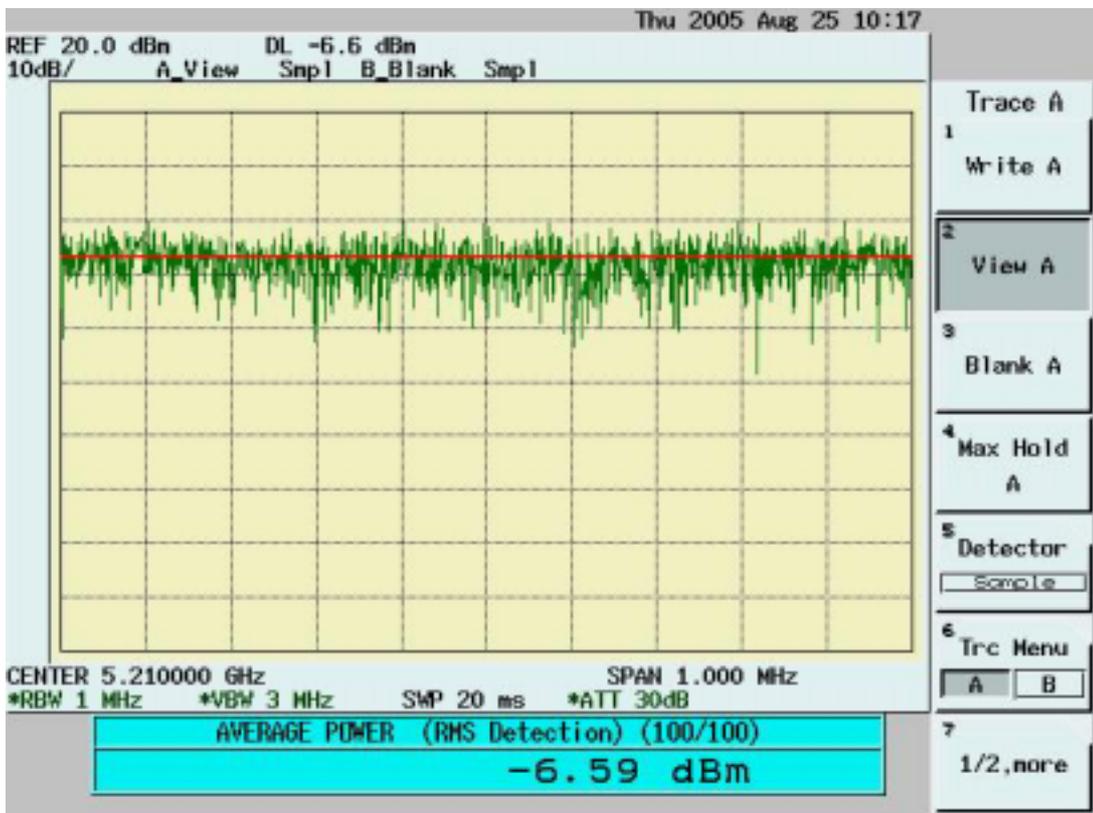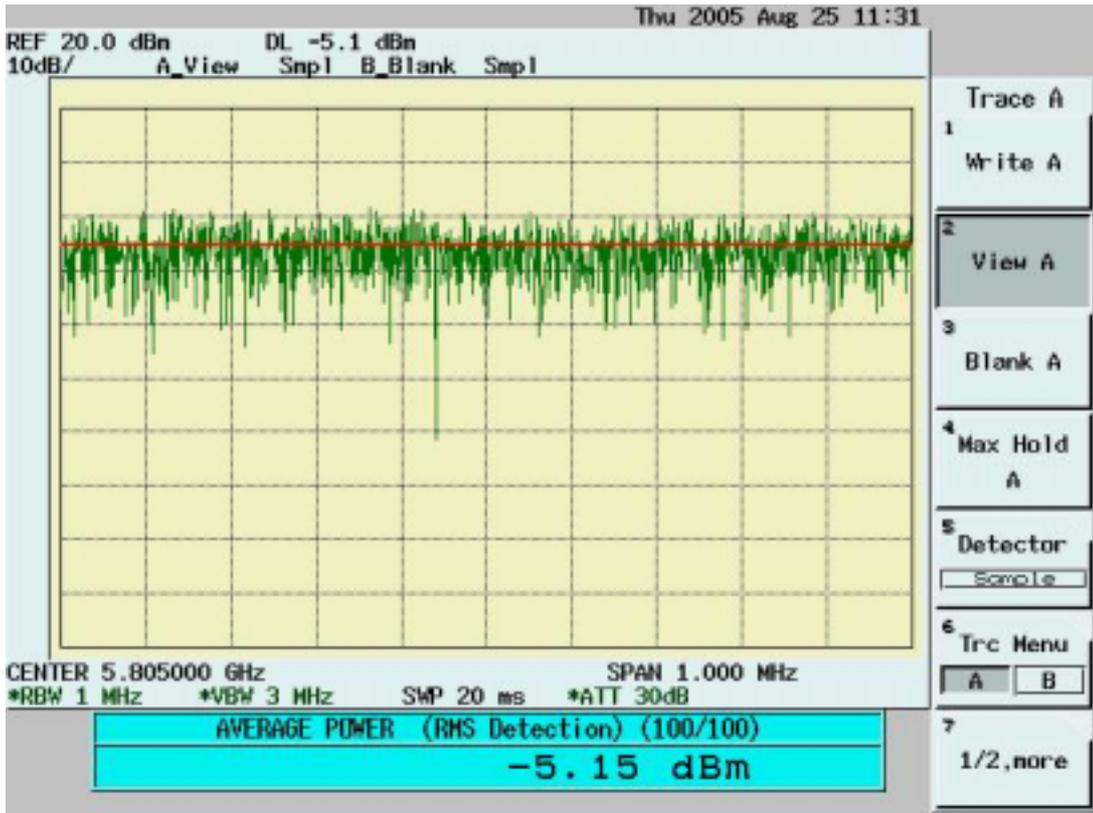

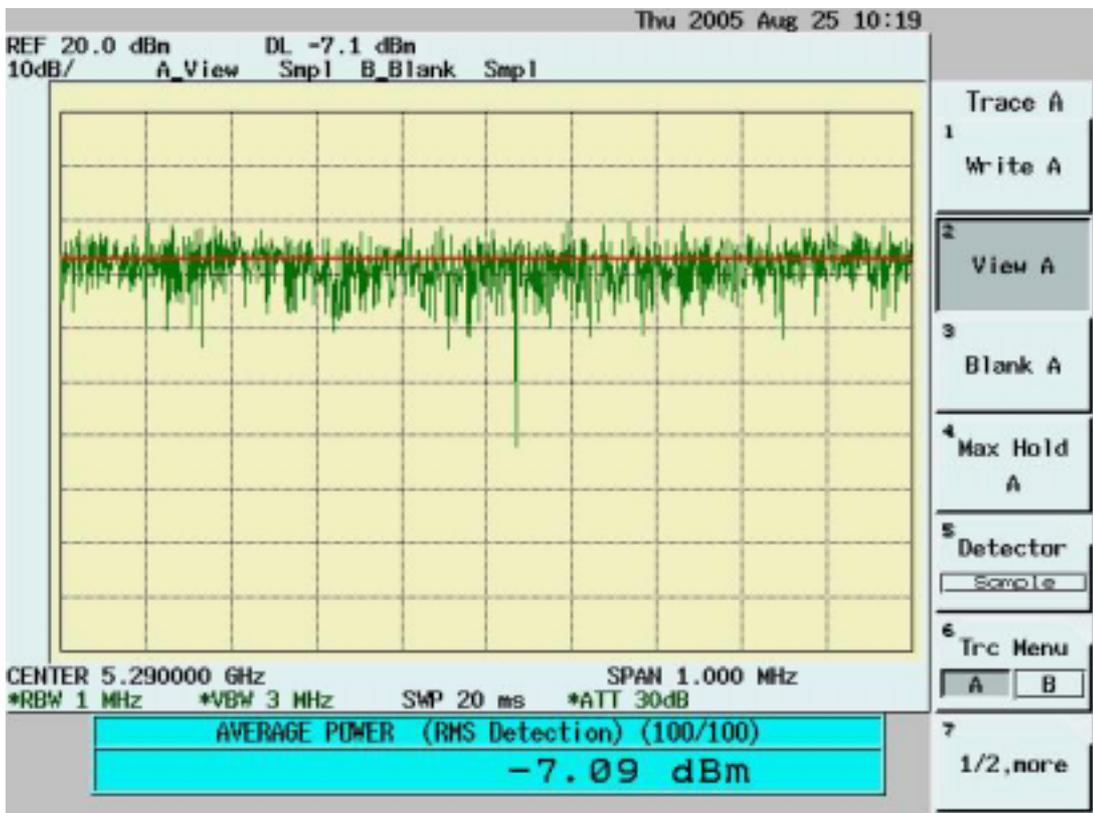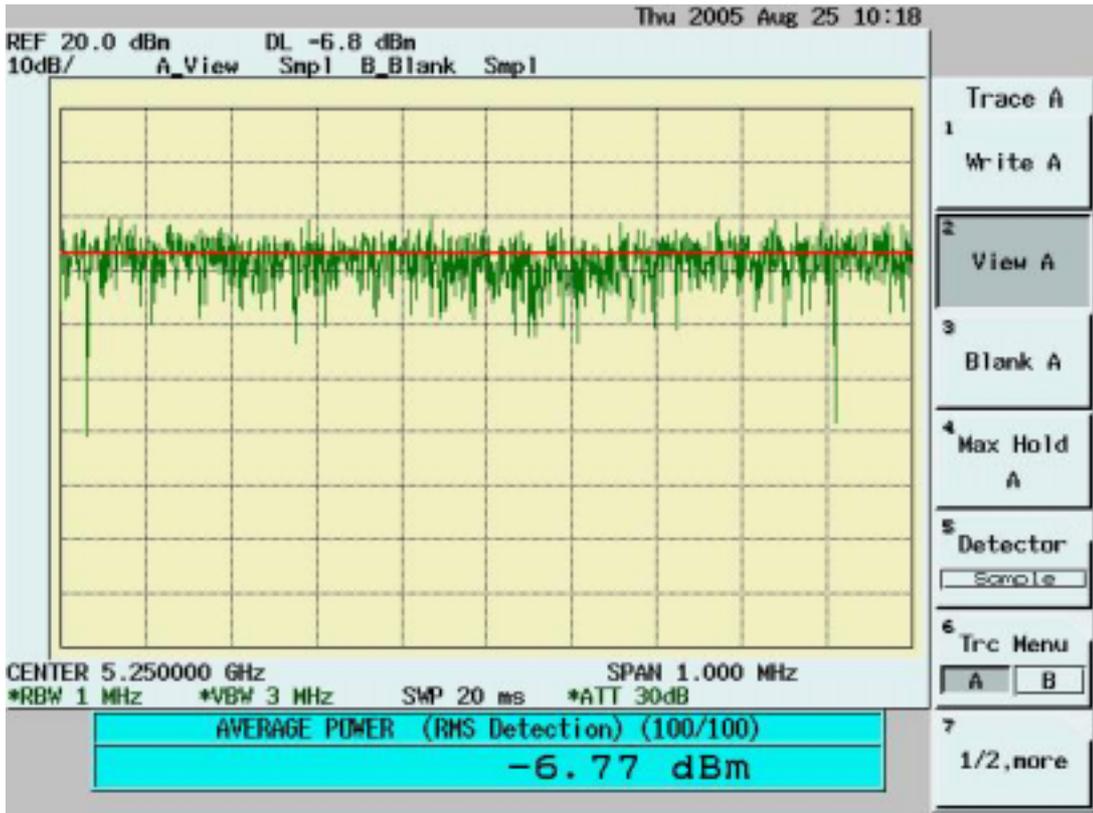

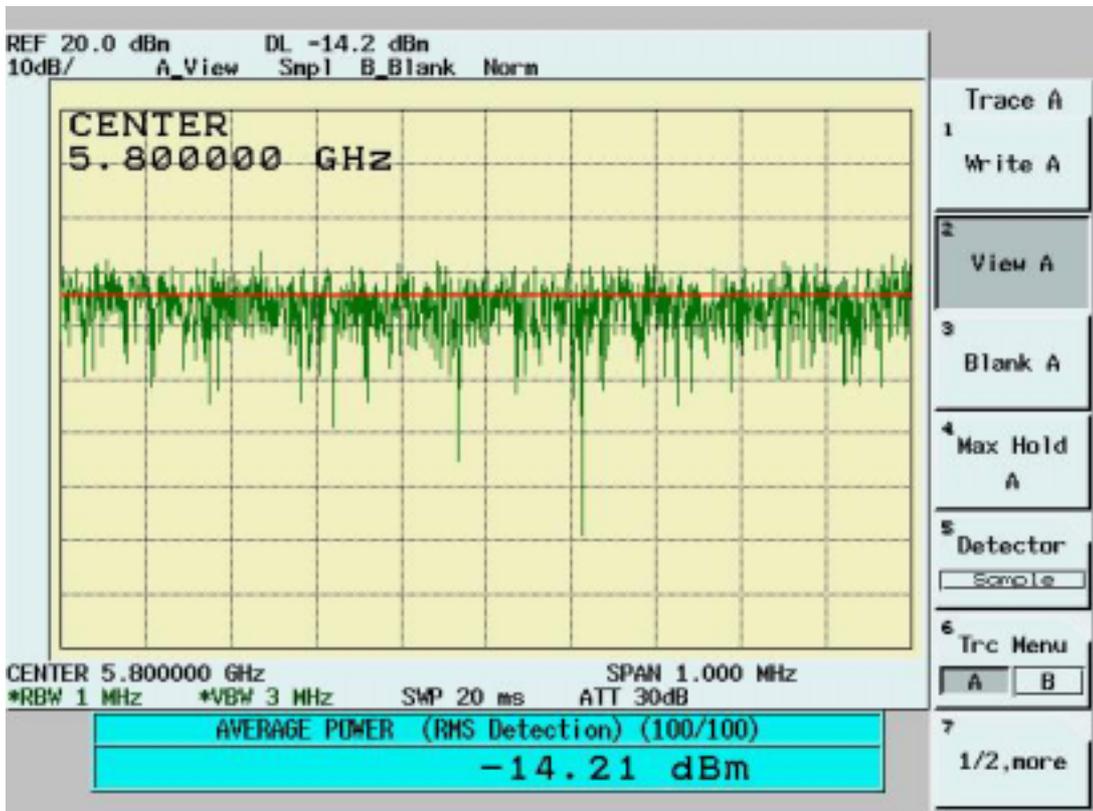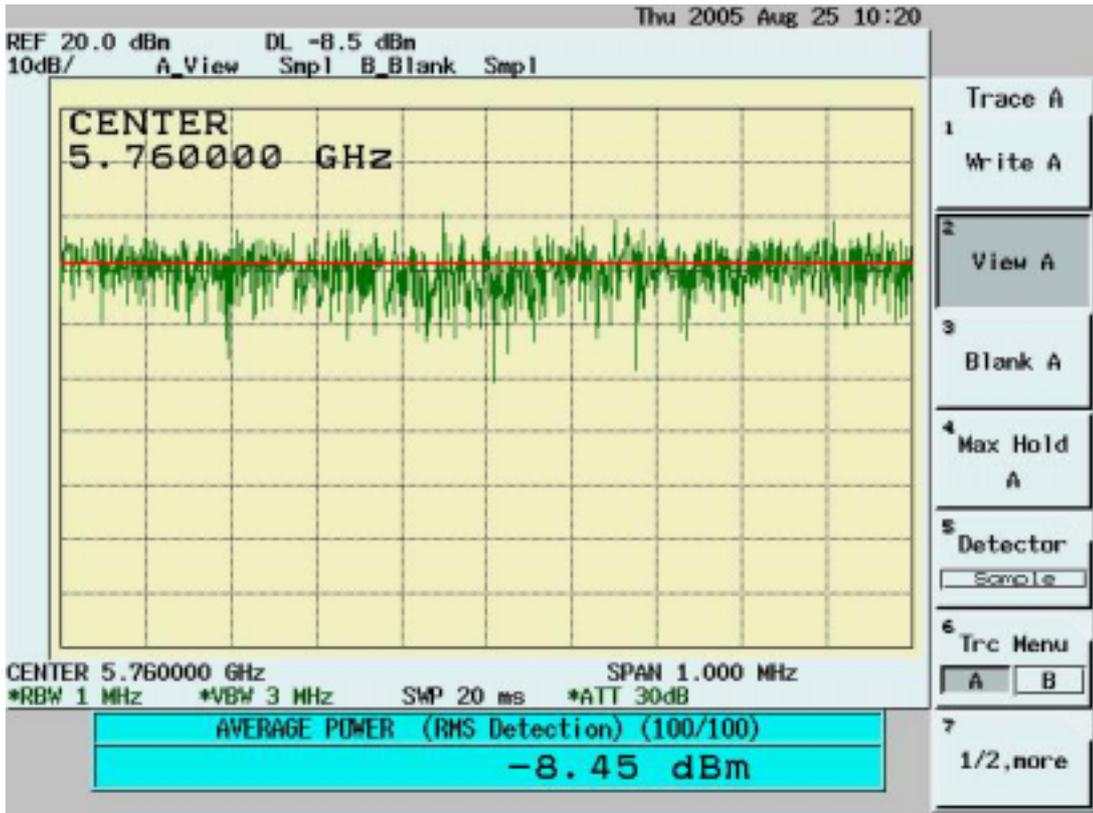


### 4.3 Peak Power Excursion Measurement [Section 15.407(a)(6) ]

#### 4.3.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.
2. Frequency SPAN of Spectrum: 30MHz or 50MHz.
3. Trace 1 : RBW: 1MHz, VBW: 3MHz. Using positive detector and Max -hold
4. Trace 2 : RBW: 1MHz, VBW: 3MHz. Using Sample detector and Max-hold
5. Record the largest difference between Trace 1 and Trace 2.

#### 4.3.2 Test Setup

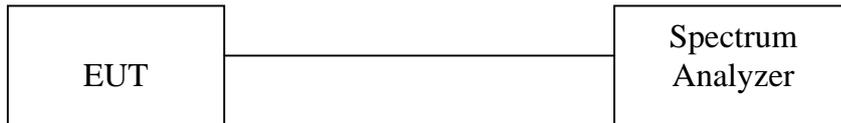

#### 4.3.3 Test Data: (Normal Mode)

##### Peak Power Excursion

Temperature ( ):25

Test Engineer:Jerry Chiou

Humidity (%):50

Channel	Frequency (Mhz)	Peak Power Excursion (dBm)	Limit (dBm)	Pass/Fail
1	5180	9.43	13	Pass
4	5240	9.29	13	Pass
5	5260	9.76	13	Pass
8	5320	9.44	13	Pass
9	5745	9.93	13	Pass
10	5765	9.82	13	Pass
12	5805	9.82	13	Pass

#### 4.3.4 Test Data: (Turbo Mode)

##### Peak Power Excursion

Temperature ( ):25

Test Engineer:Jerry Chiou

Humidity (%):50

Channel	Frequency (Mhz)	Peak Power Excursion (dBm)	Limit (dBm)	Pass/Fail
1	5210	10.98	13	Pass
2	5250	10.09	13	Pass
3	5290	10.20	13	Pass
4	5760	9.98	13	Pass
5	5800	9.80	13	Pass

