



FCC RF Test Report

APPLICANT : Wistron NeWeb Corporation
EQUIPMENT : Connected Cooler Radio USA and
North America version
BRAND NAME : Wistron NeWeb Corporation
MODEL NAME : D54A1
FCC ID : NKRD54A1
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System

The product was received on Nov. 08, 2016 and testing was completed on Jan. 04, 2017. We, SPORTON INTERNATIONAL (KUNSHAN) INC., would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (KUNSHAN) INC., the test report shall not be reproduced except in full.

Prepared by: James Huang / Manager

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (KUNSHAN) INC.
No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China



TABLE OF CONTENTS

REVISION HISTORY 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant 5

 1.2 Manufacturer 5

 1.3 Product Feature of Equipment Under Test 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 7

 1.6 Testing Location 7

 1.7 Applicable Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Carrier Frequency and Channel 8

 2.2 Test Mode 9

 2.3 Connection Diagram of Test System 10

 2.4 Support Unit used in test configuration and system 11

 2.5 EUT Operation Test Setup 11

 2.6 Measurement Results Explanation Example 11

3 TEST RESULT 12

 3.1 6dB and 99% Bandwidth Measurement 12

 3.2 Output Power Measurement 14

 3.3 Power Spectral Density Measurement 15

 3.4 Conducted Band Edges and Spurious Emission Measurement 17

 3.5 Radiated Band Edges and Spurious Emission Measurement 32

 3.6 Antenna Requirements 36

4 LIST OF MEASURING EQUIPMENT 37

5 UNCERTAINTY OF EVALUATION 38

APPENDIX A. CONDUCTED TEST RESULTS

APPENDIX B. RADIATED SPURIOUS EMISSION

APPENDIX C. DUTY CYCLE PLOTS

APPENDIX D. SETUP PHOTOGRAPHS



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR6N0801B	Rev. 01	Initial issue of report	Jan. 04, 2017

**SUMMARY OF TEST RESULT**

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Pass	-
3.2	15.247(b)	Power Output Measurement	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges	$\leq 20\text{dBc}$	Pass	-
		Conducted Spurious Emission		Pass	-
3.5	15.247(d)	Radiated Band Edges and Radiated Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 3.23 dB at 2484.700 MHz
3.6	15.203 & 15.247(b)	Antenna Requirement	N/A	Pass	-



1 General Description

1.1 Applicant

Wistron NeWeb Corporation

20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C

1.2 Manufacturer

Wistron NeWeb Corporation

20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Connected Cooler Radio USA and North America version
Brand Name	Wistron NeWeb Corporation
Model Name	D54A1
FCC ID	NKRD54A1
EUT supports Radios application	WCDMA/HSPA/HSPA+(16QAM uplink is not supported)/LTE/ WLAN 2.4GHz 802.11b/g/n (HT20/HT40)/ Bluetooth v4.1 LE(Uplink Only)
IMEI Code	Conducted: 014760000031529 Radiated: 014785000001529
HW Version	v1.0
SW Version	D54A1_v00.01
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. WLAN supports search capabilities, but unable to connect to other devices.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Channel Frequency Range	2412 MHz ~ 2462 MHz
Maximum (Peak) Output Power to antenna	802.11b : 18.58 dBm (0.0721 W) 802.11g : 21.16 dBm (0.1306 W) 802.11n HT20 : 21.67 dBm (0.1469 W) 802.11n HT40 : 21.96 dBm (0.1570 W)
99% Occupied Bandwidth	802.11b : 13.34MHz 802.11g : 16.78MHz 802.11n HT20 : 17.73MHz 802.11n HT40 : 36.16MHz
Antenna Type / Gain	PCB Antenna with gain 1.00 dBi
Type of Modulation	802.11b : DSSS (DBPSK / DQPSK / CCK) 802.11g/n : OFDM (BPSK / QPSK / 16QAM / 64QAM)



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Test Site	SPORTON INTERNATIONAL (KUNSHAN) INC.		
Test Site Location	No. 3-2, PingXiang Road, Kunshan, Jiangsu Province, P. R. China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958		
Test Site No.	Sporton Site No.		FCC Registration No.
	TH01-KS	03CH02-KS	418269

Note: The test site complies with ANSI C63.4 2014 requirement.

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiated emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). The worst cases were recorded in this report.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	1	2412	7	2442
	2	2417	8	2447
	3	2422	9	2452
	4	2427	10	2457
	5	2432	11	2462
	6	2437	-	-




2.2 Test Mode

Final test mode of conducted test items and radiated spurious emissions are considering the modulation and worse data rates from the power table described in section 2.2.

Modulation	Data Rate
802.11b	1 Mbps
802.11g	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0

2.3 Connection Diagram of Test System

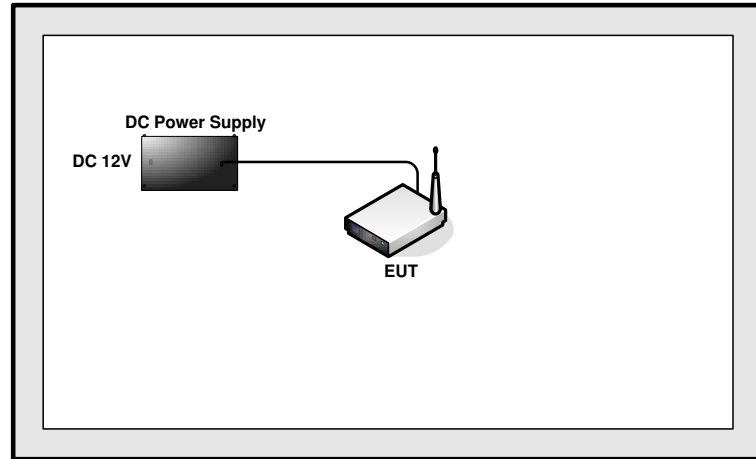



2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m

2.5 EUT Operation Test Setup

For WLAN function, the engineering test program was provided and enabled to make EUT continuous transmit/receive.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss.

Offset = RF cable loss.

Following shows an offset computation example with cable loss 5.8 dB.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 5.8 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 DTS D01 Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) = 1MHz and set the Video bandwidth (VBW) = 3MHz.
6. Measure and record the results in the test report.


3.1.4 Test Setup





3.1.5 Test Result of 6dB and 99% Occupied Bandwidth

Please refer to Appendix A.

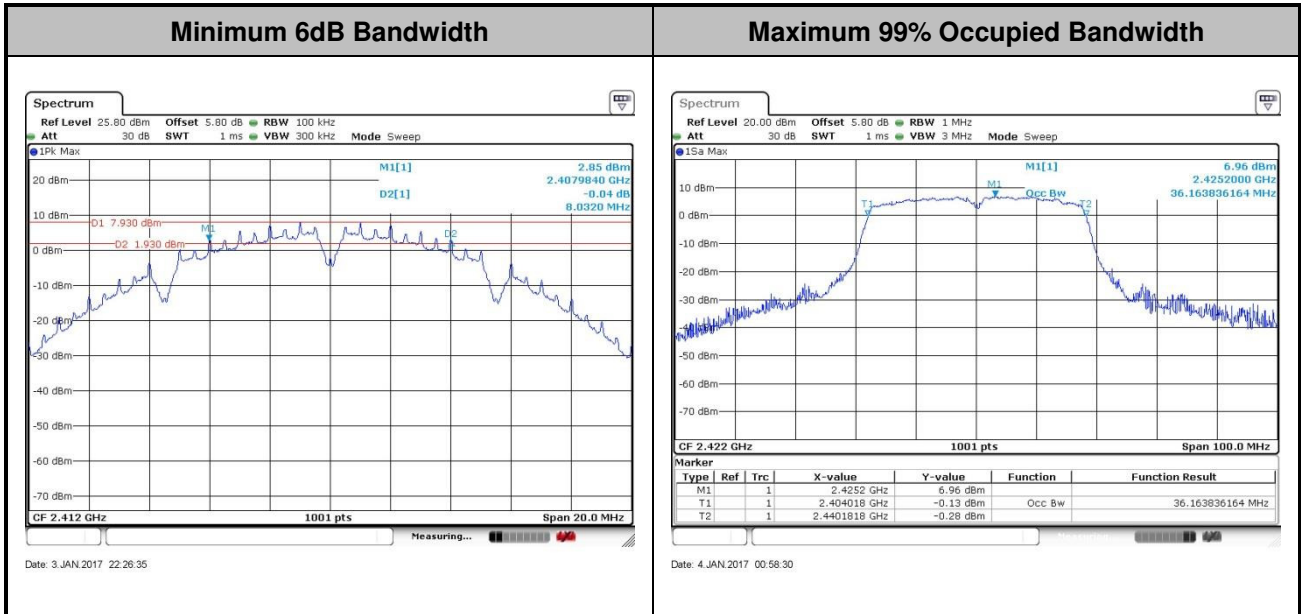

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi are used the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of FCC KDB No. 558074 DTS D01 Meas. Guidance v03r05 section 9.1.2 PKPM1 Peak power meter method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

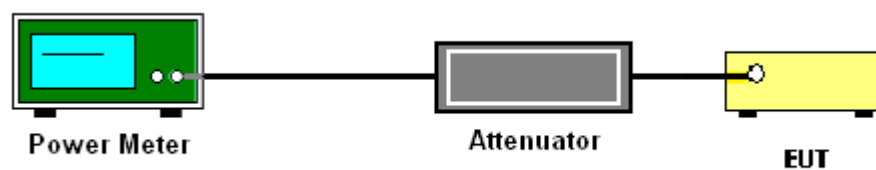

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure 10.2 Method PKPSD of FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.


3.3.4 Test Setup





3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

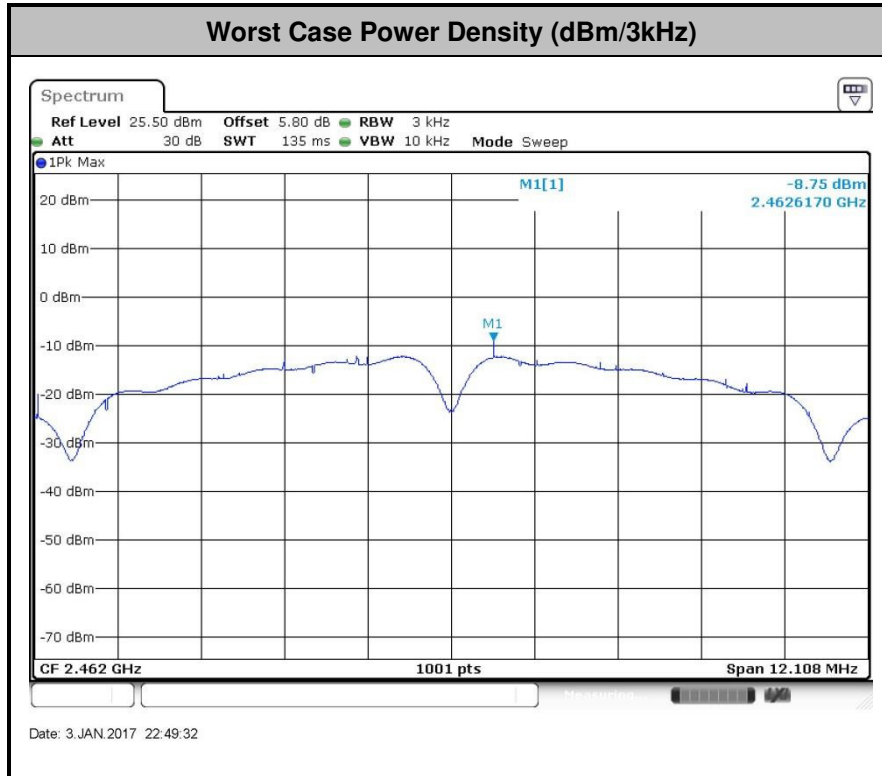

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission Measurement

In any 100 kHz bandwidth outside of the authorized frequency band, the emissions which fall in the non-restricted bands shall be attenuated at least 20 dB / 30dB relative to the maximum PSD level in 100 kHz by RF conducted measurement and radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a).


3.4.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB per 15.247(d).
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.


3.4.4 Test Setup

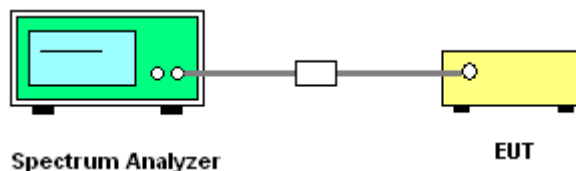



3.4.5 Test Result of Conducted Band Edges and Spurious Emission

Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	53~55%
Test Channel :	01	Test Engineer :	Jacky Huang

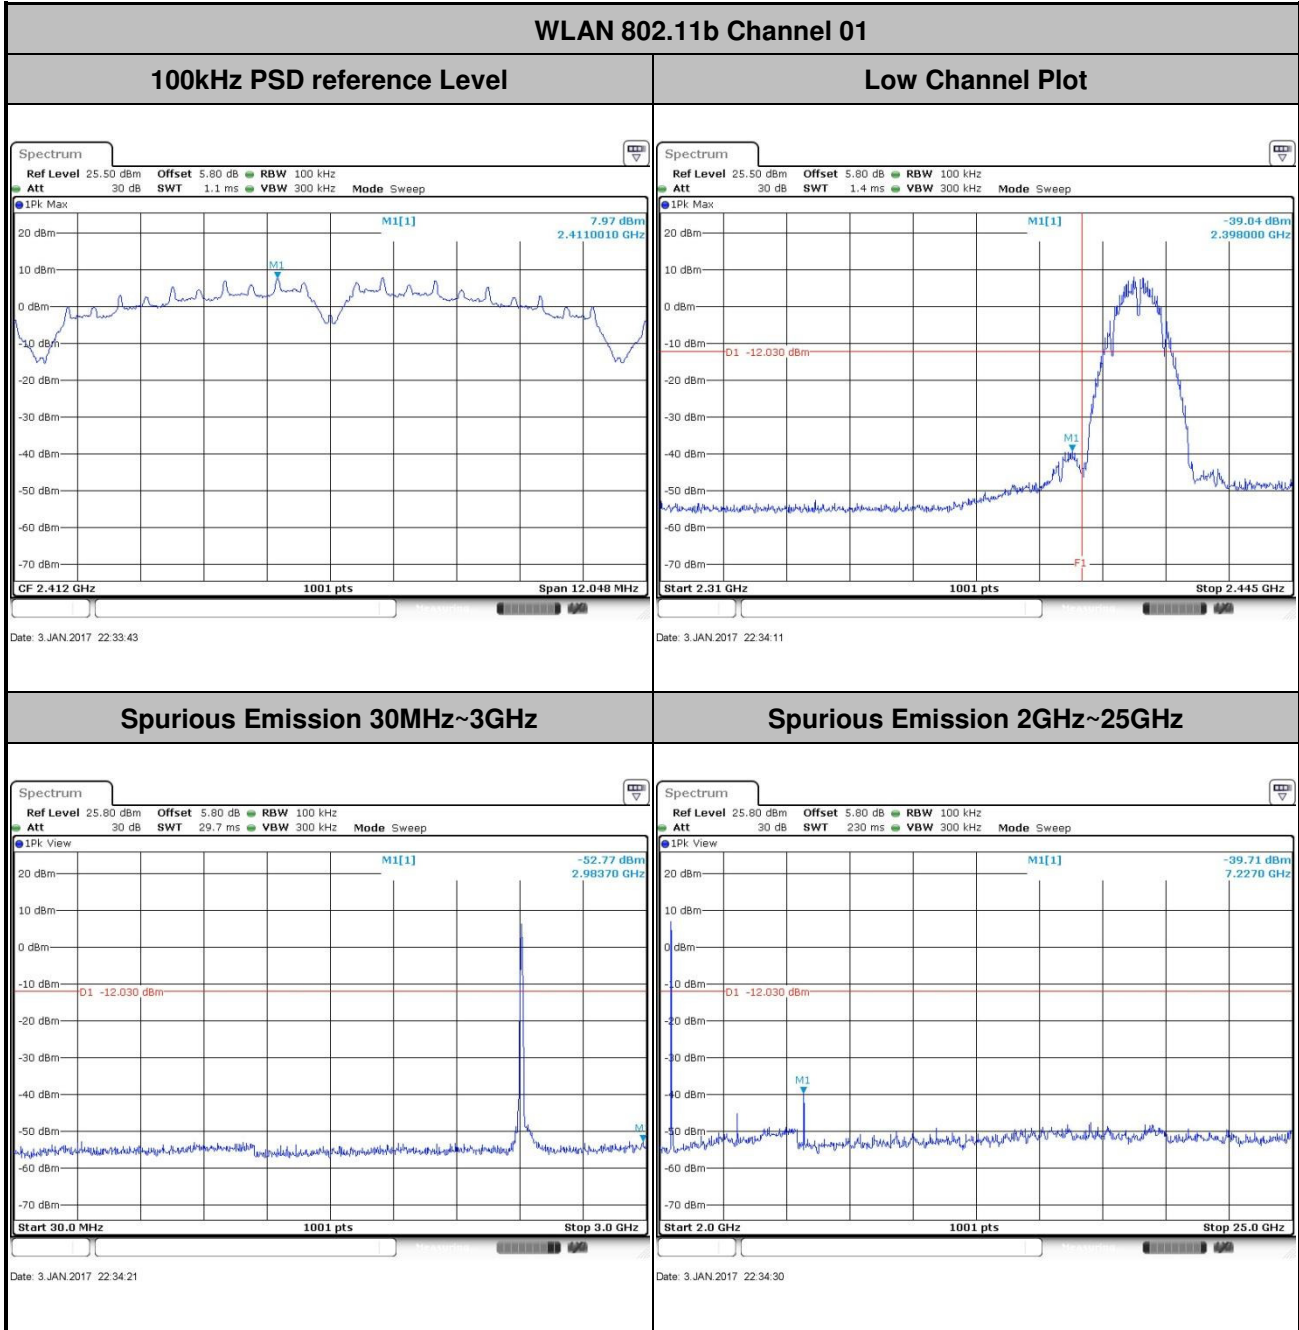





Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	53~55%
Test Channel :	06	Test Engineer :	Jacky Huang

WLAN 802.11b Channel 06


100kHz PSD reference Level

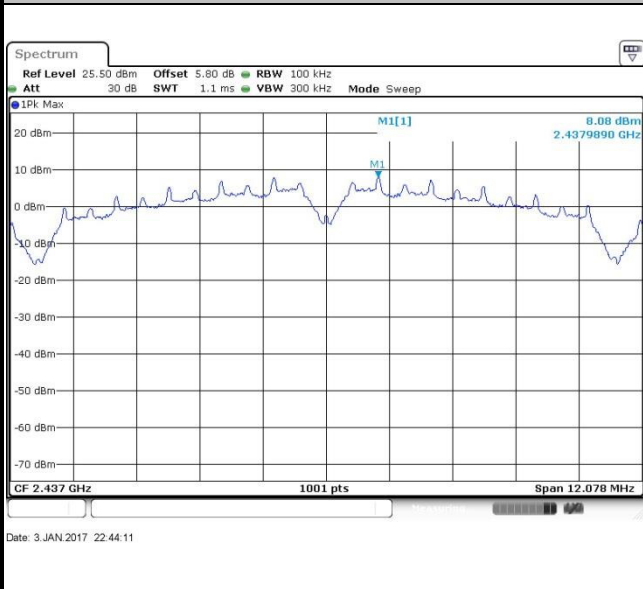

Spurious Emission 30MHz~3GHz

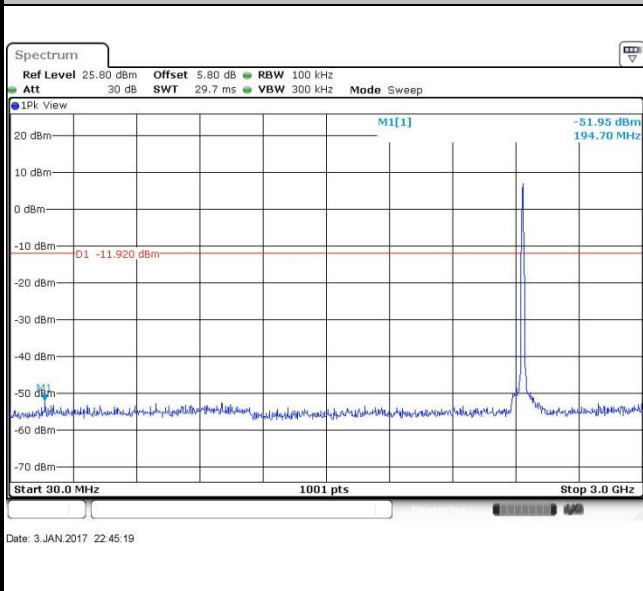

Spurious Emission 2GHz~25GHz

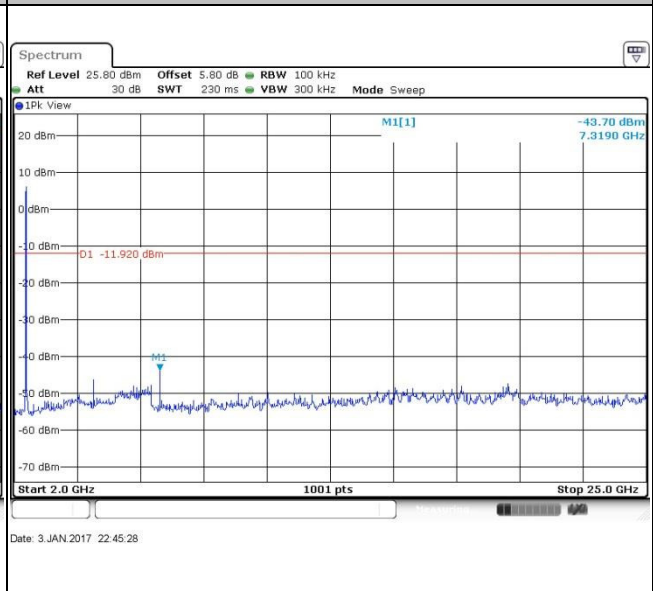





Test Mode :	802.11b	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	53~55%
Test Channel :	11	Test Engineer :	Jacky Huang

WLAN 802.11b Channel 11


100kHz PSD reference Level

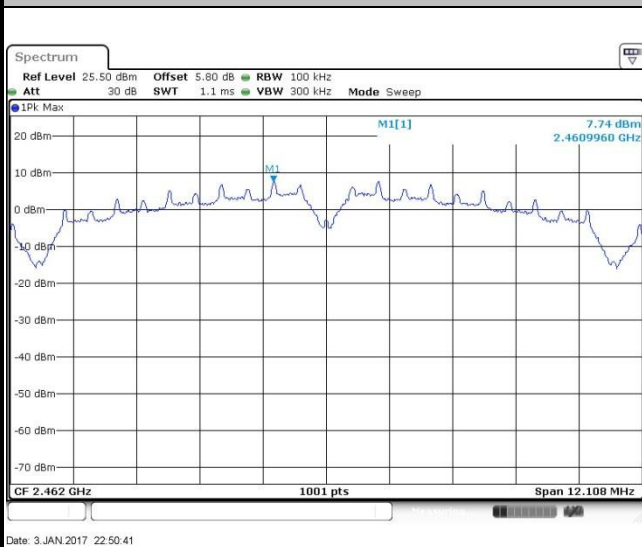


High Channel Plot

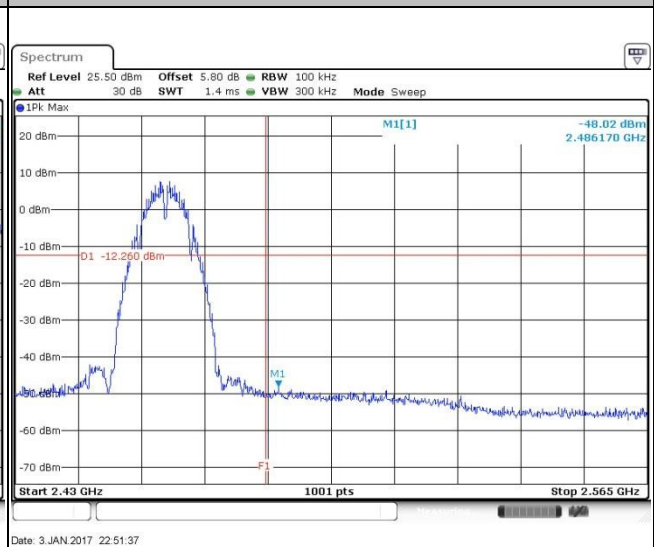

Spurious Emission 30MHz~3GHz

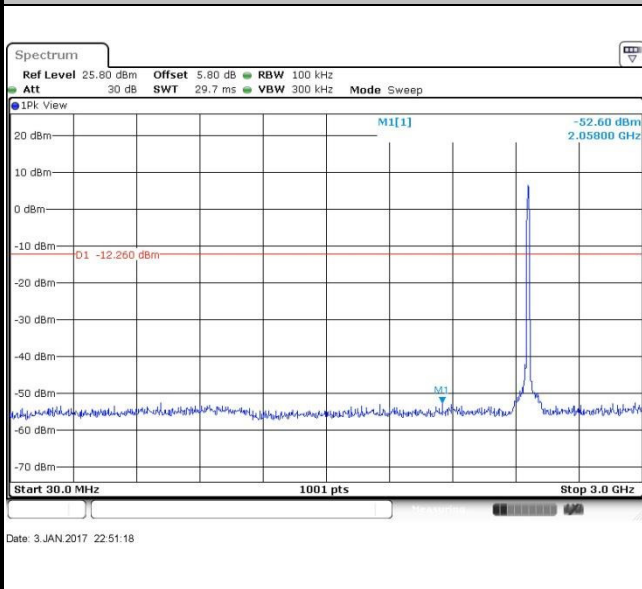

Spurious Emission 2GHz~25GHz

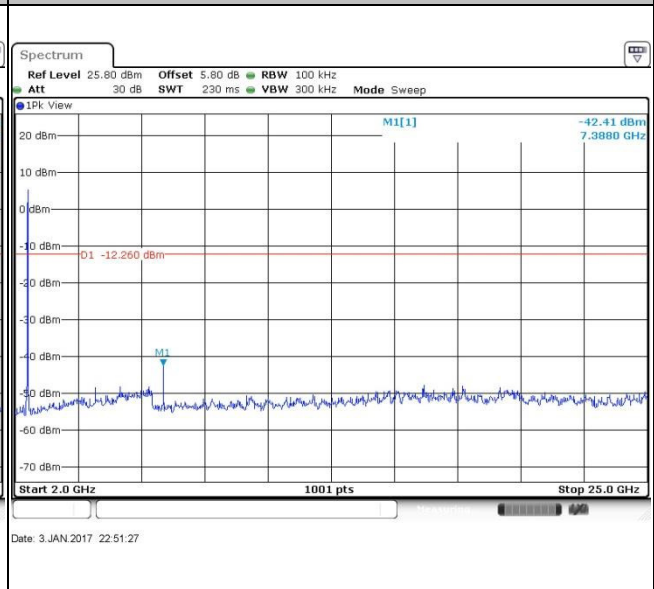




Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	53~55%
Test Channel :	01	Test Engineer :	Jacky Huang


WLAN 802.11g Channel 01

100kHz PSD reference Level

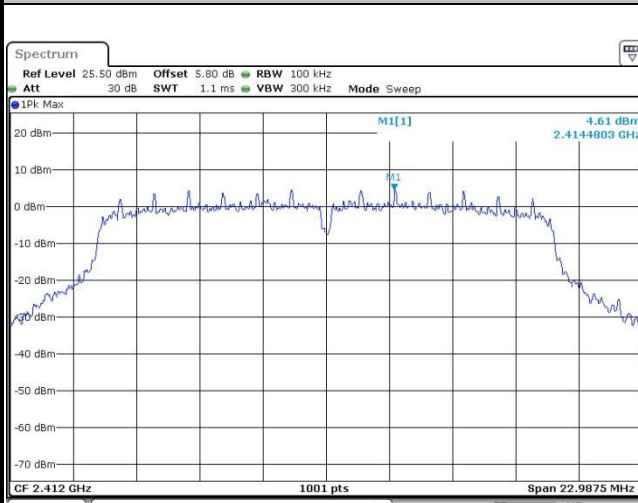


Date: 3 JAN 2017 22:56:00

Low Channel Plot

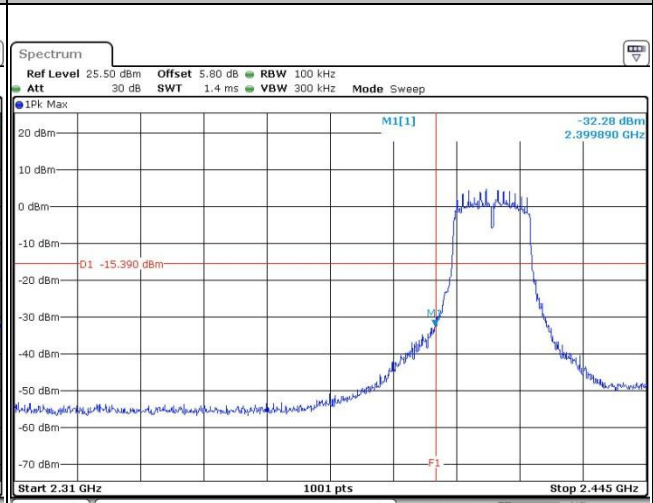


Date: 3 JAN 2017 22:58:31

Spurious Emission 30MHz~3GHz

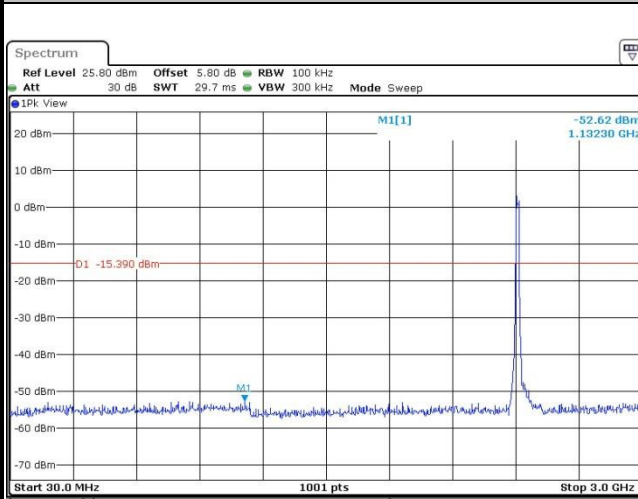

Date: 3 JAN 2017 22:58:03

Spurious Emission 2GHz~25GHz

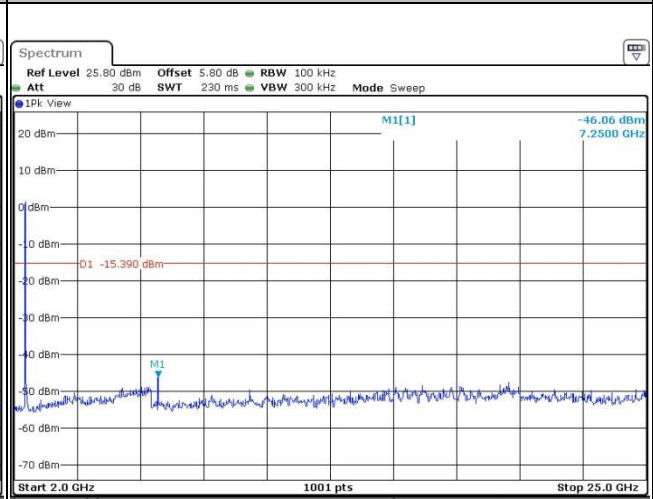


Date: 3 JAN 2017 22:58:12




Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	53~55%
Test Channel :	06	Test Engineer :	Jacky Huang

WLAN 802.11g Channel 06


100kHz PSD reference Level

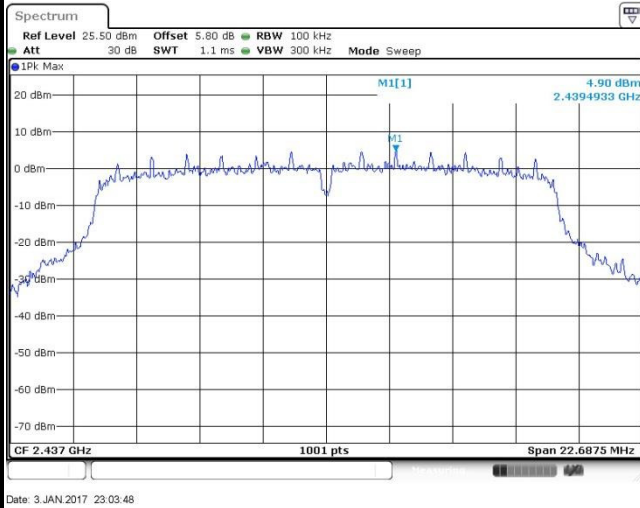

Spurious Emission 30MHz~3GHz

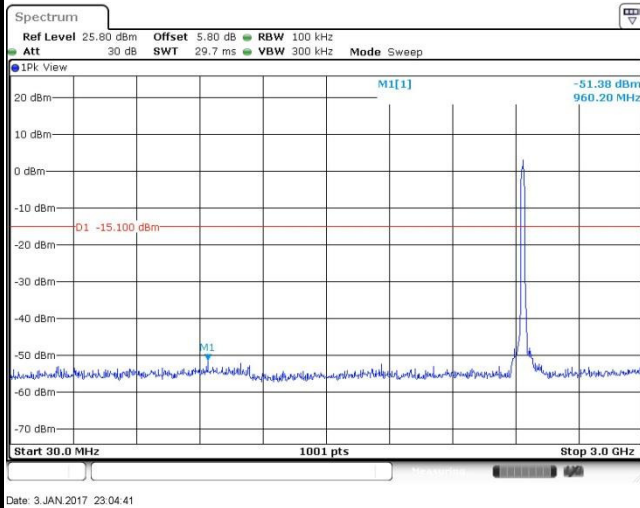

Spurious Emission 2GHz~25GHz

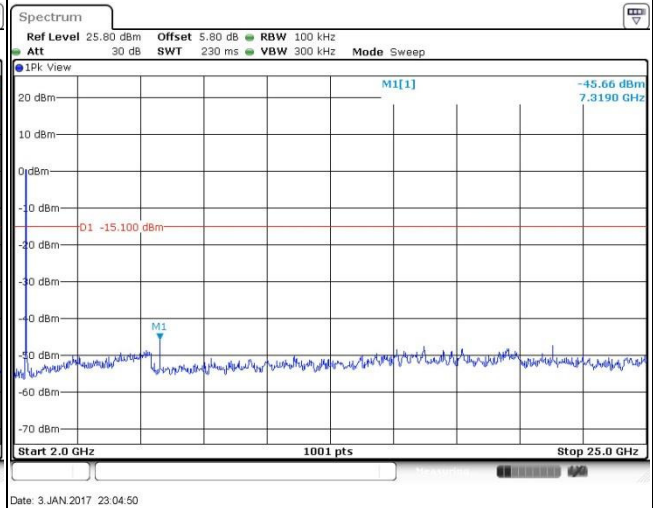





Test Mode :	802.11g	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	53~55%
Test Channel :	11	Test Engineer :	Jacky Huang

WLAN 802.11g Channel 11


100kHz PSD reference Level

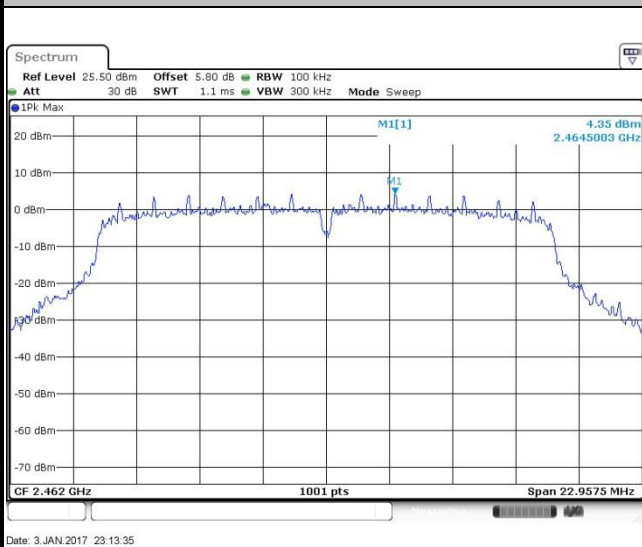


High Channel Plot

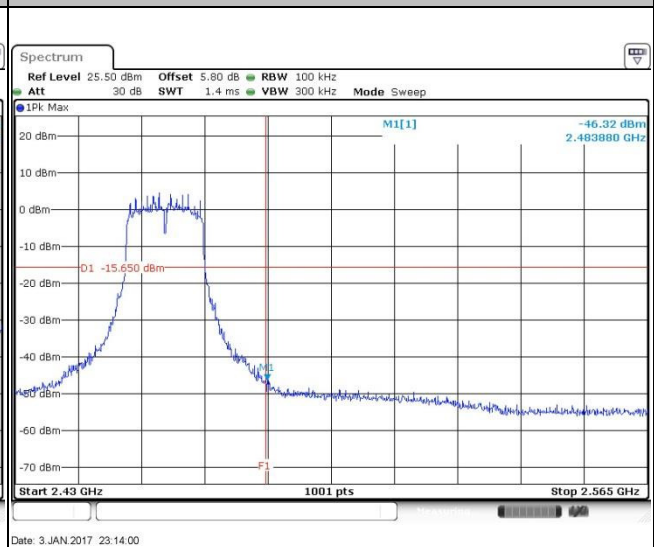

Spurious Emission 30MHz~3GHz

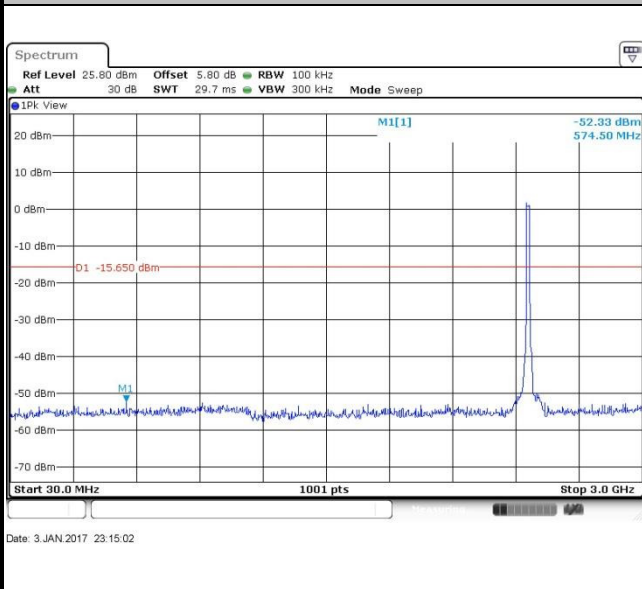


Spurious Emission 2GHz~25GHz

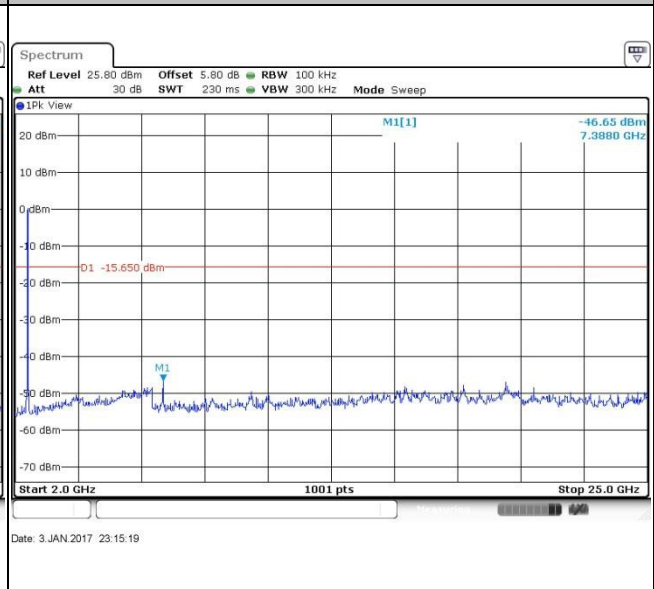



Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	53~55%
Test Channel :	01	Test Engineer :	Jacky Huang

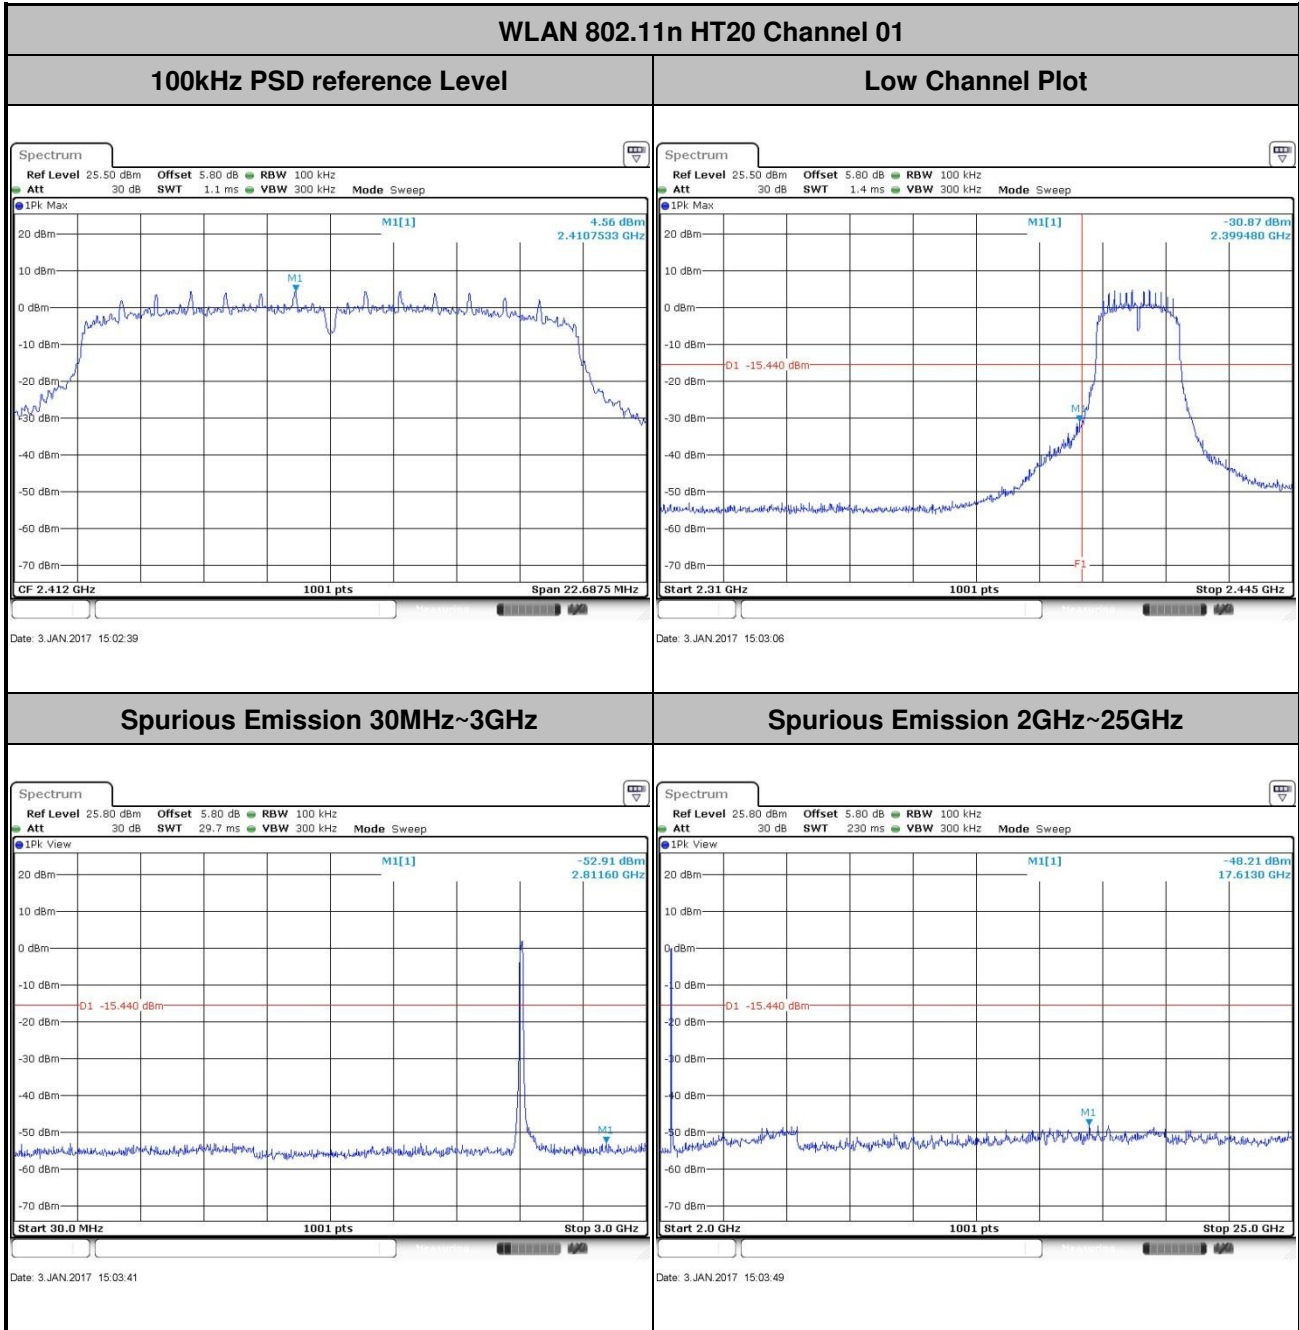





Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	53~55%
Test Channel :	06	Test Engineer :	Jacky Huang

WLAN 802.11n HT20 Channel 06


100kHz PSD reference Level

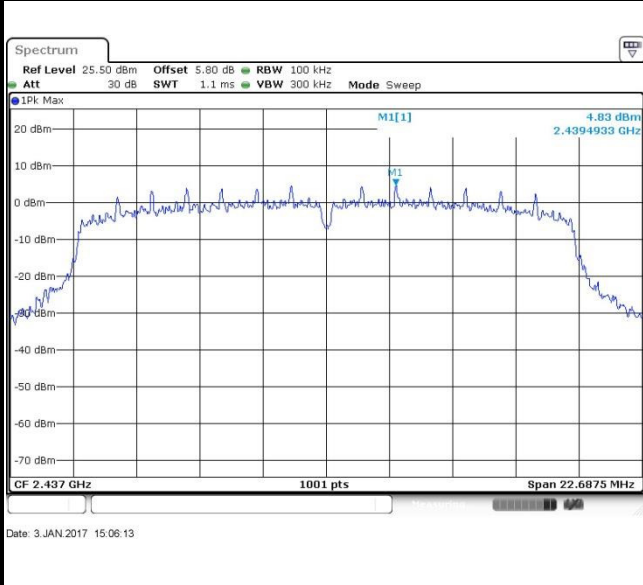

Spurious Emission 30MHz~3GHz

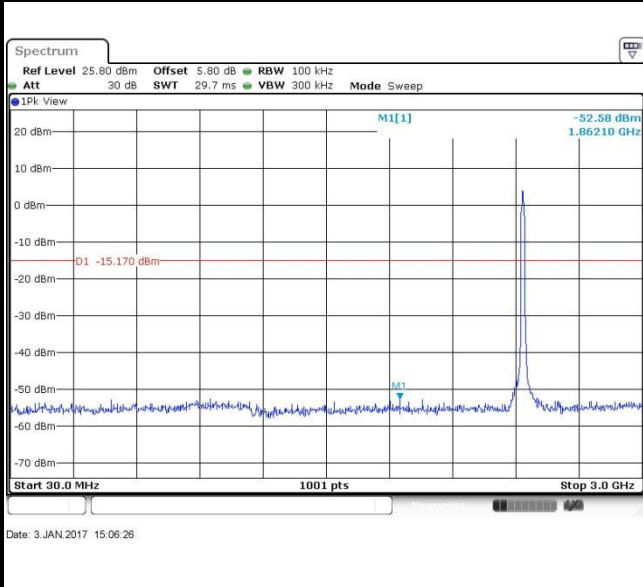


Spurious Emission 2GHz~25GHz

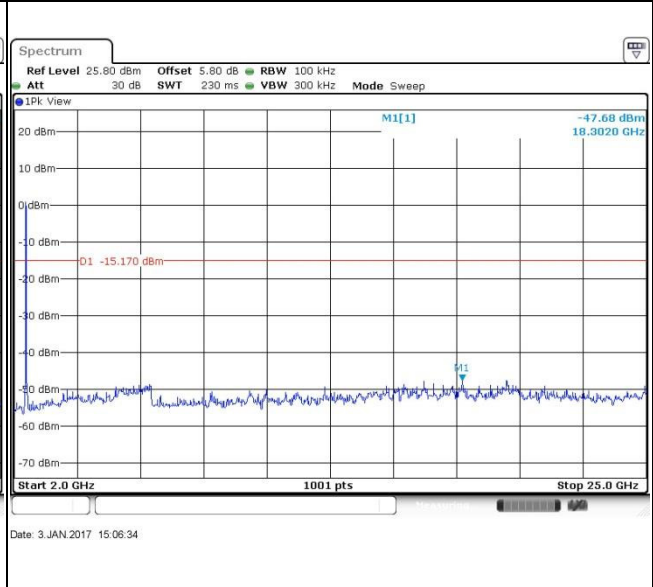




Test Mode :	802.11n HT20	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	53~55%
Test Channel :	11	Test Engineer :	Jacky Huang

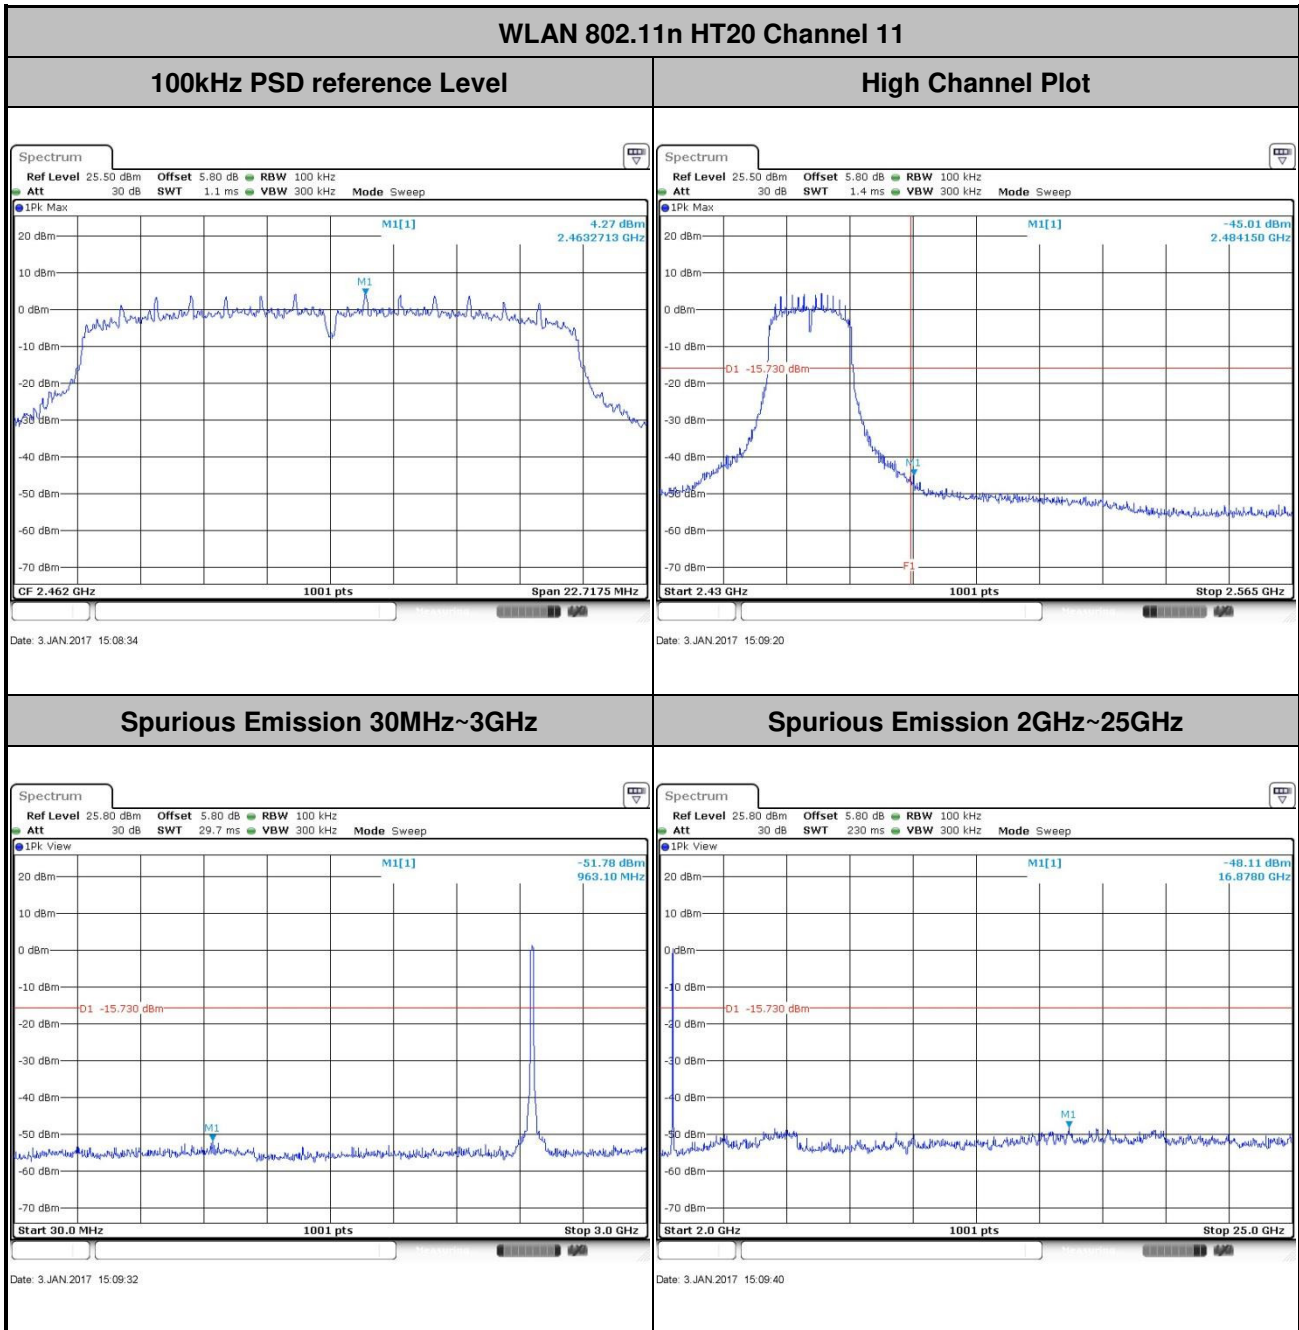



Test Mode :	802.11n HT40	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	53~55%
Test Channel :	03	Test Engineer :	Jacky Huang

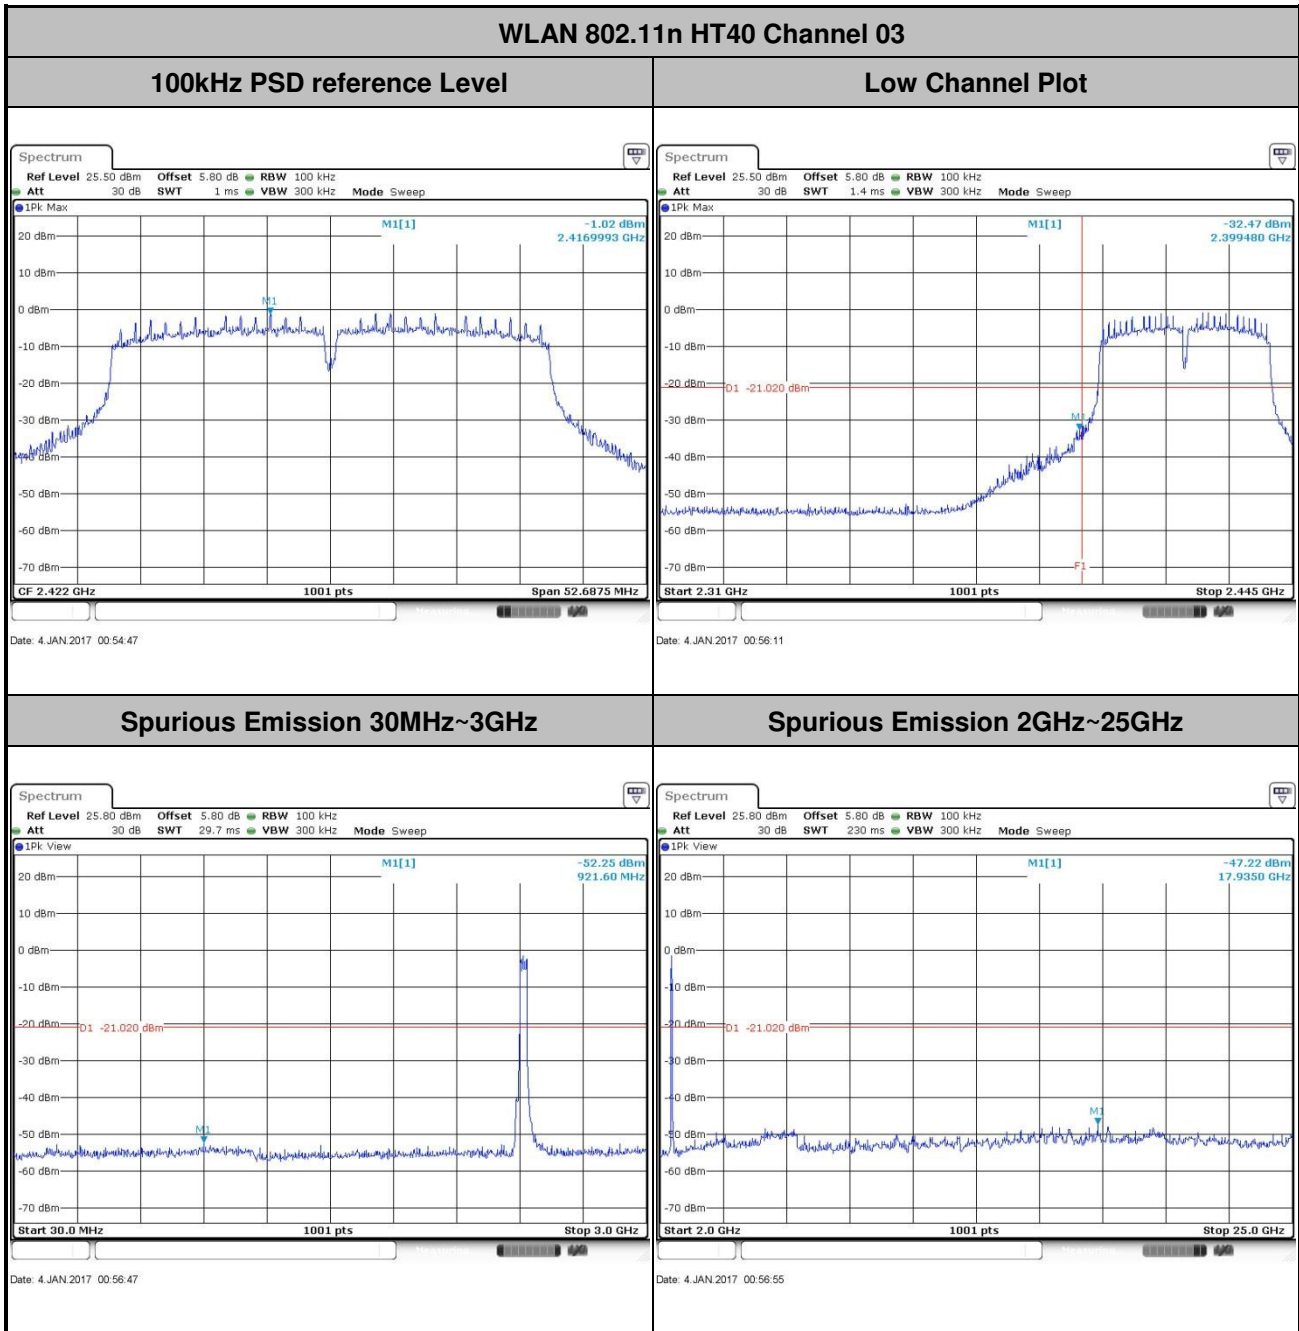




Test Mode :	802.11n HT40	Temperature :	22~23°C
Test Band :	2.4GHz Low	Relative Humidity :	53~55%
Test Channel :	04	Test Engineer :	Jacky Huang


WLAN 802.11n HT40 Channel 04

100kHz PSD reference Level

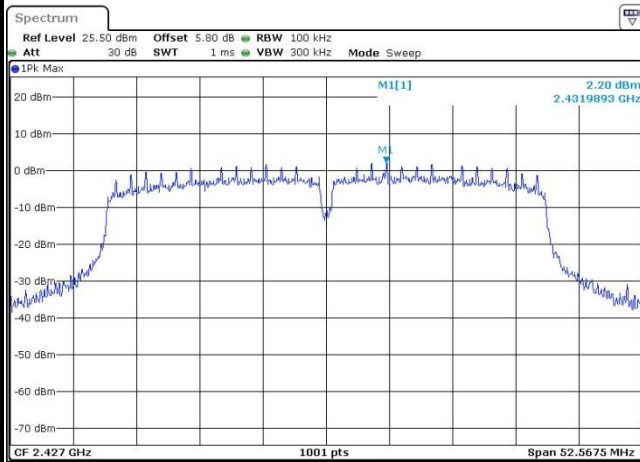


Date: 4 JAN 2017 01:02:46

Low Channel Plot

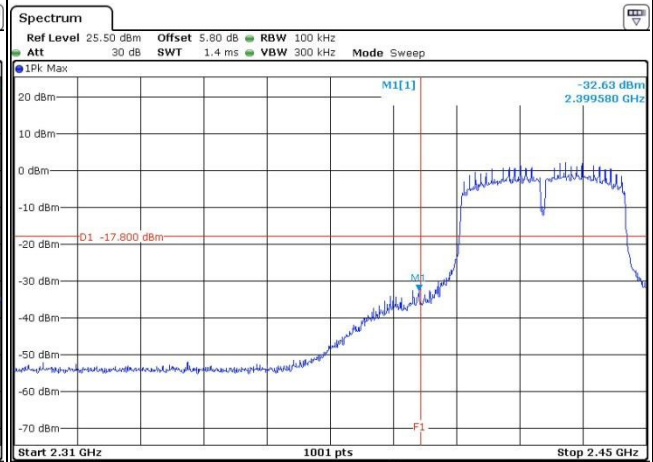


Date: 4 JAN 2017 08:18:37

Spurious Emission 30MHz~3GHz

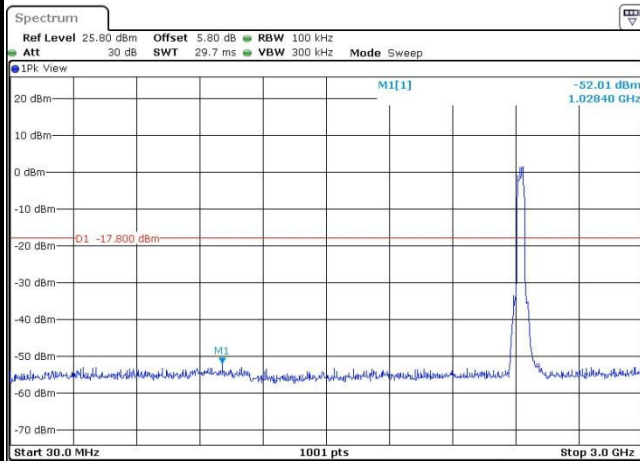

Date: 4 JAN 2017 01:03:58

Spurious Emission 2GHz~25GHz

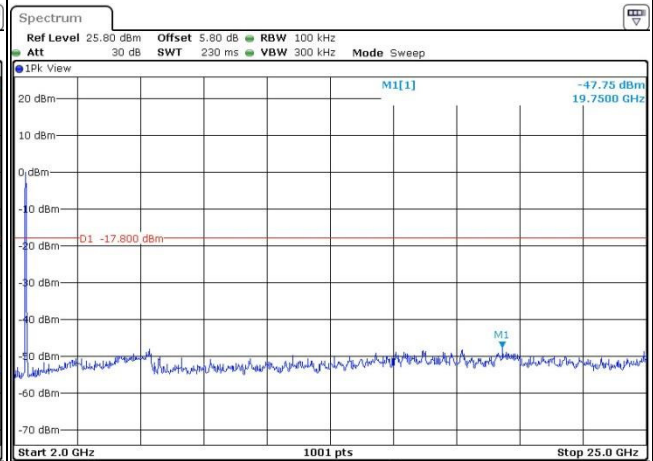


Date: 4 JAN 2017 01:04:07




Test Mode :	802.11n HT40	Temperature :	22~23°C
Test Band :	2.4GHz Mid	Relative Humidity :	53~55%
Test Channel :	06	Test Engineer :	Jacky Huang

WLAN 802.11n HT40 Channel 06


100kHz PSD reference Level

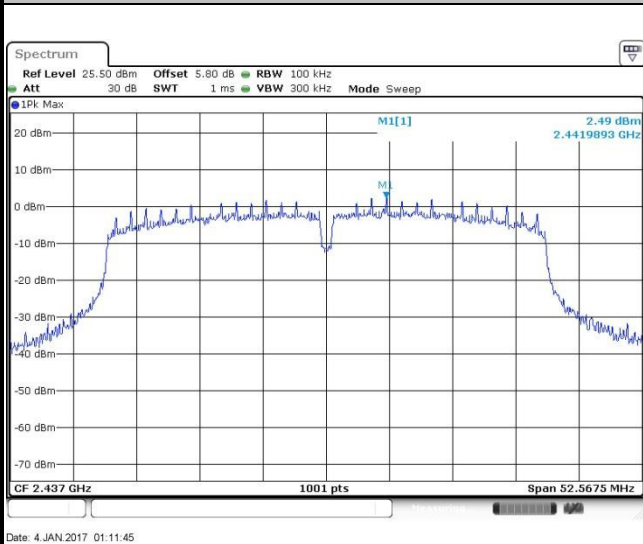

Spurious Emission 30MHz~3GHz

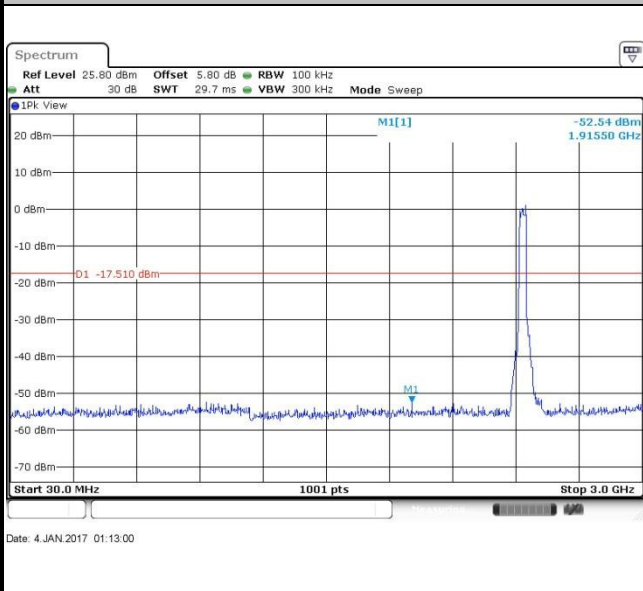


Spurious Emission 2GHz~25GHz

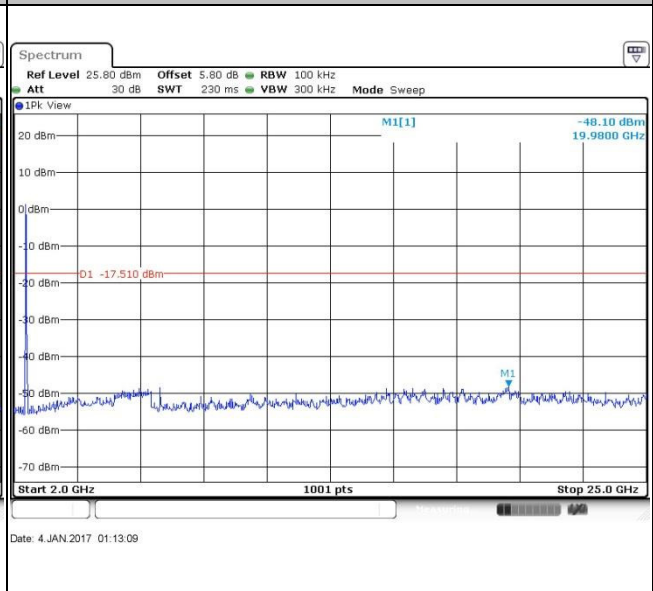




Test Mode :	802.11n HT40	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	53~55%
Test Channel :	08	Test Engineer :	Jacky Huang

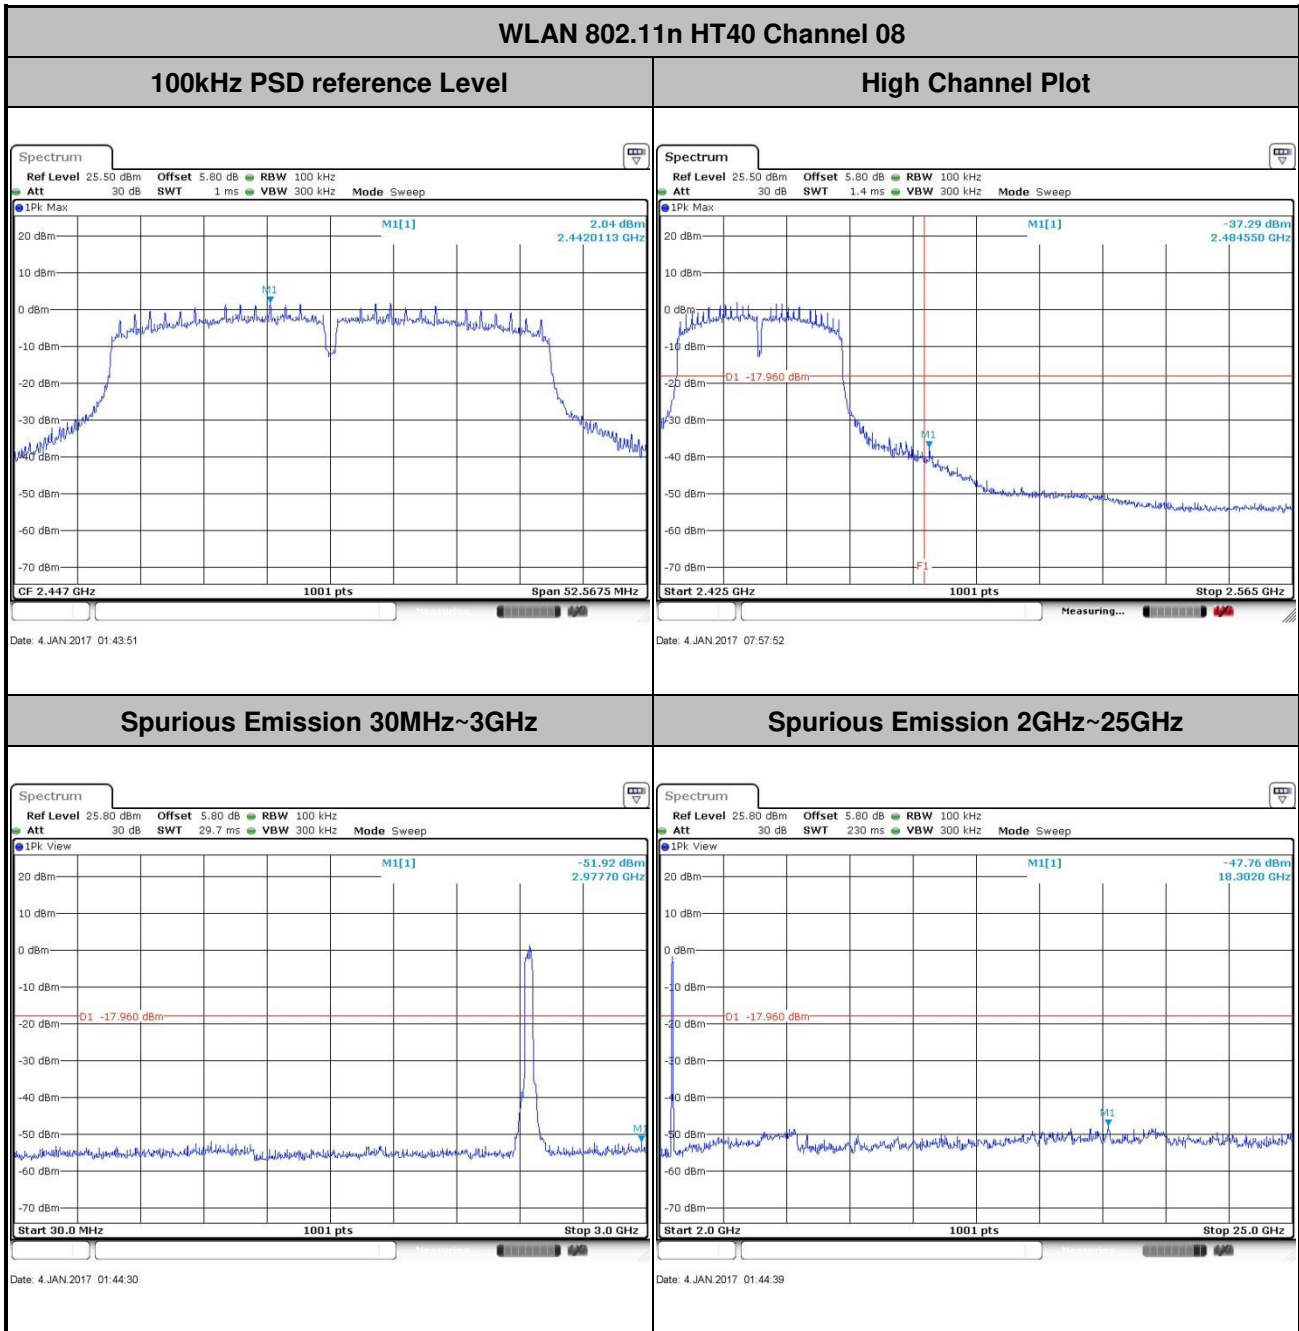



Test Mode :	802.11n HT40	Temperature :	22~23°C
Test Band :	2.4GHz High	Relative Humidity :	53~55%
Test Channel :	09	Test Engineer :	Jacky Huang

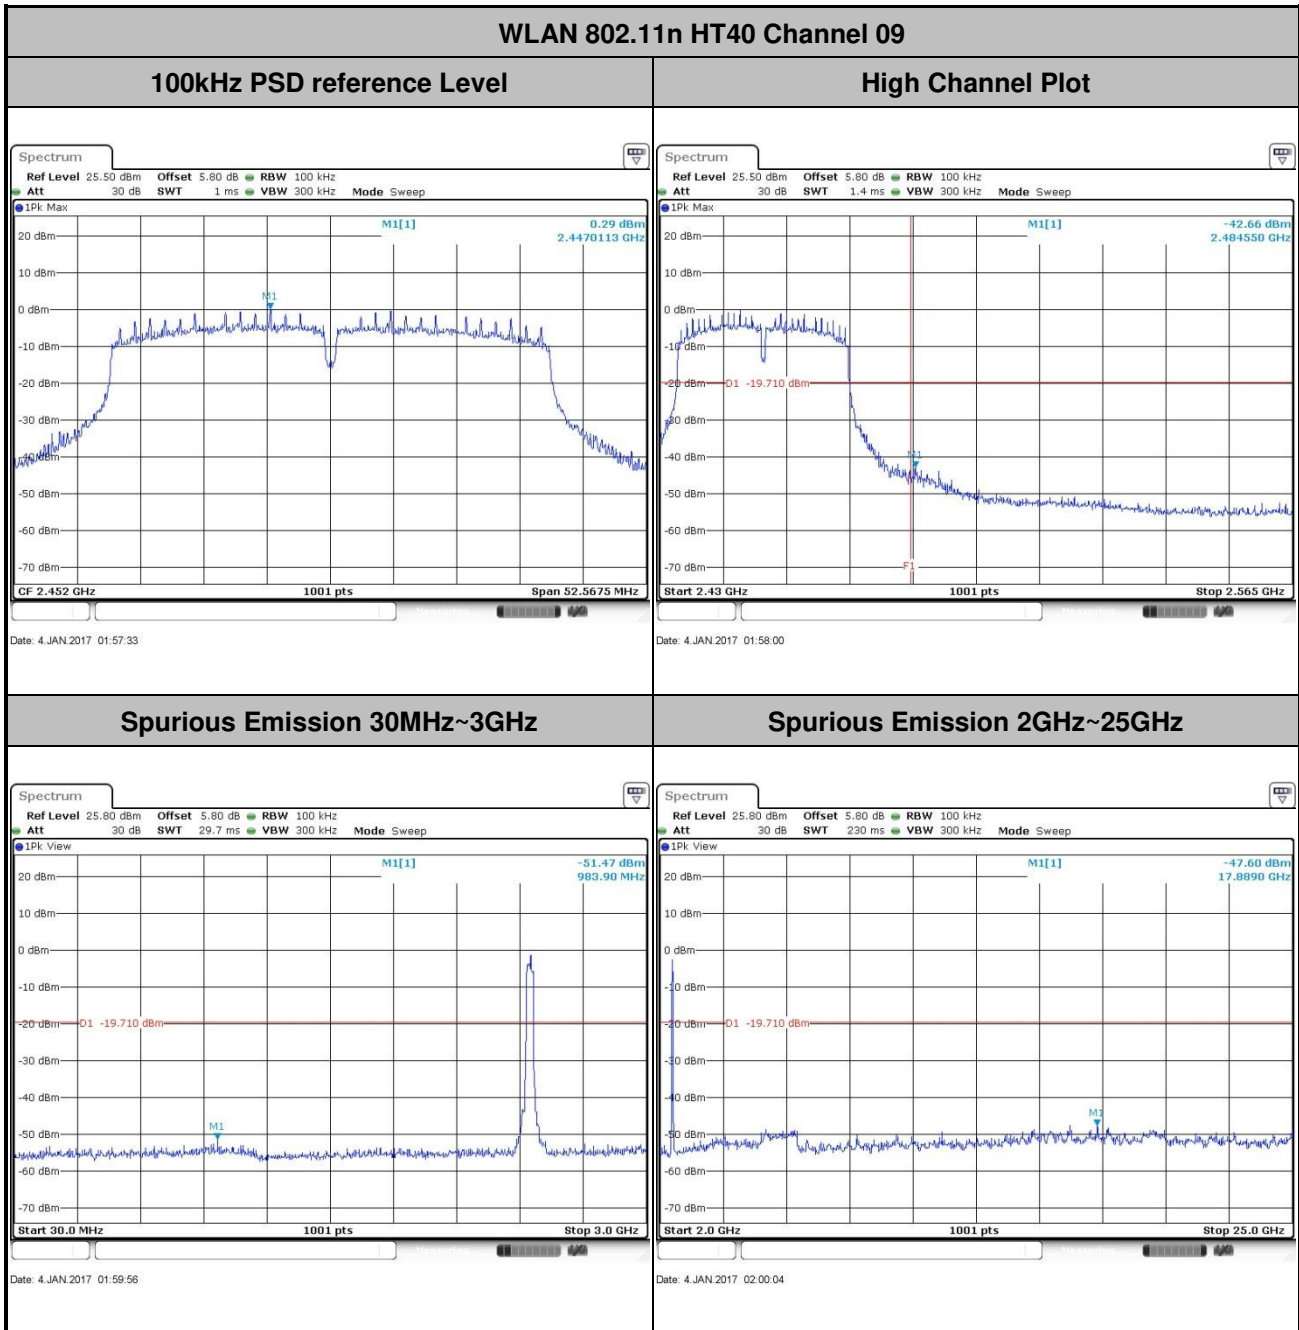



3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated band edge and Spurious Emission Measurement

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the FCC section 15.209 limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.




3.5.3 Test Procedures


1. The testing follows FCC KDB Publication No. 558074 D01 DTS Meas. Guidance v03r05.
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For measurement below 1GHz, If the emission level of the EUT measured by the peak detector is 3 dB lower than the applicable limit, the peak emission level will be reported. Otherwise, the emission measurement will be repeated using the quasi-peak detector and reported.
7. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; VBW \geq RBW; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

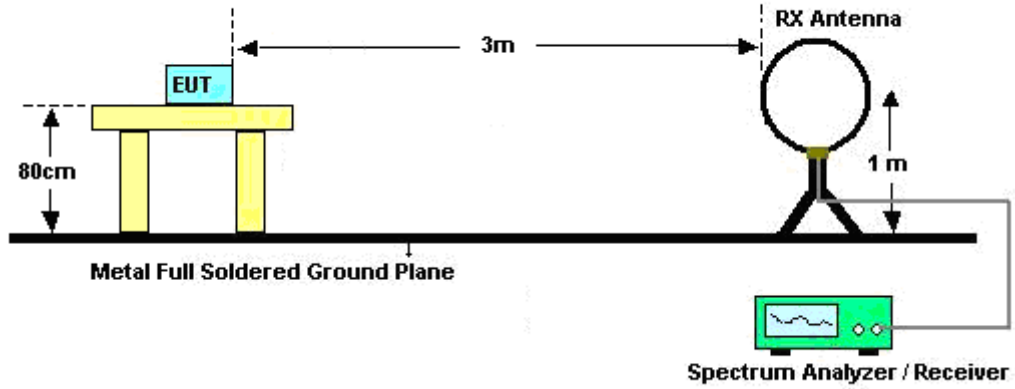

For radiated emissions from 30MHz to 1GHz

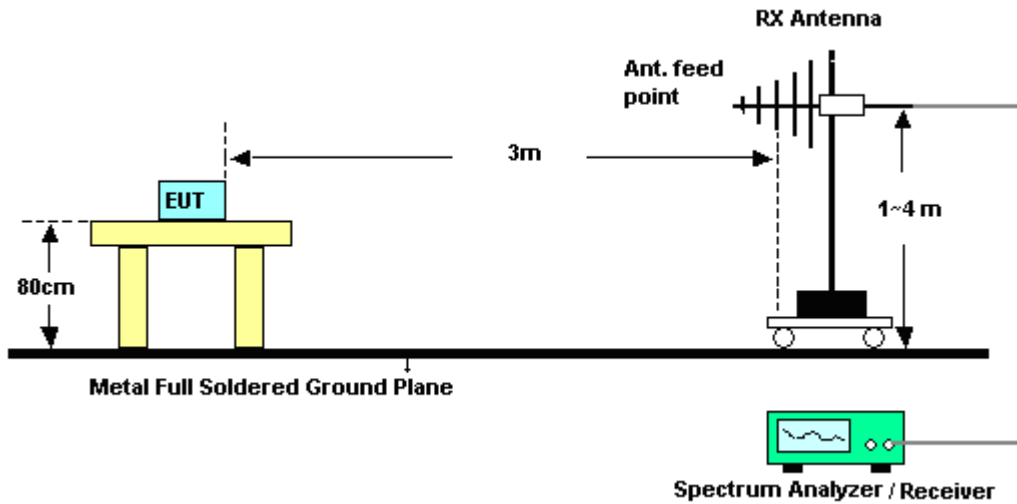

For radiated emissions above 1GHz

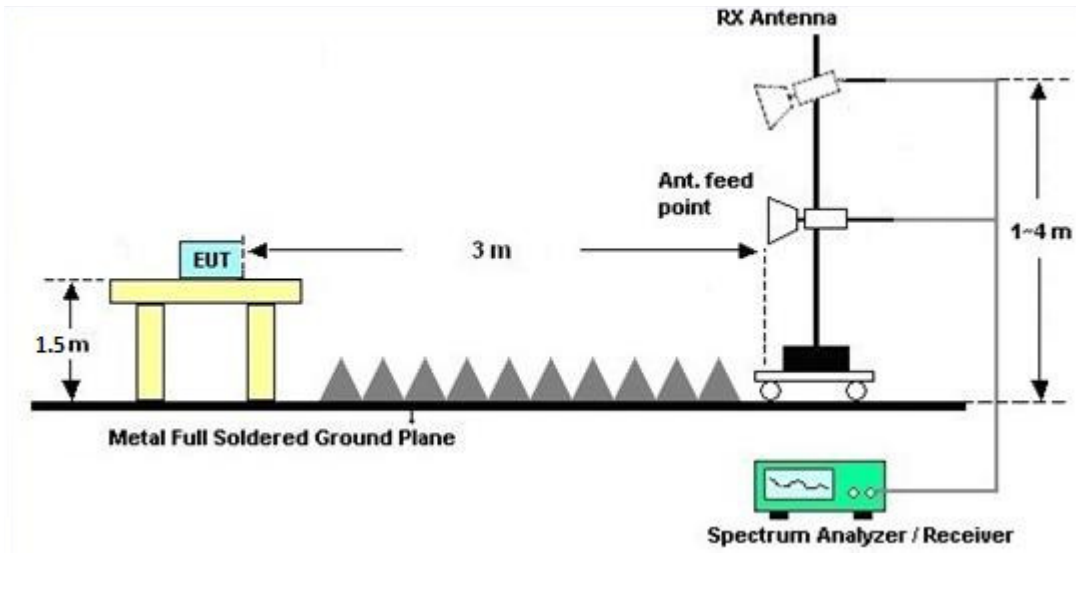

3.5.5 Test Results of Radiated Spurious Emissions (9kHz ~ 30MHz)

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line per 15.31(o) was not reported.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B.

3.5.7 Duty Cycle

Please refer to Appendix C.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic)

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the FCC rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Aug. 09, 2016	Jan. 03, 2014~ Jan. 04, 2014	Aug. 08, 2017	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 20, 2016	Jan. 03, 2014~ Jan. 04, 2014	Jan. 19, 2017	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 20, 2016	Jan. 03, 2014~ Jan. 04, 2014	Jan. 19, 2017	Conducted (TH01-KS)
EMI Test Receiver	R&S	ESR7	101403	9kHz~7GHz; Max 30dBm	Aug. 09, 2016	Jan. 03, 2014~ Jan. 04, 2014	Aug. 08, 2017	Radiation (03CH02-KS)
EXA Spectrum Analyzer	Keysight	N9010A	MY55150 208	10Hz~44GHz, MAX 30dB	Apr. 22, 2016	Jan. 03, 2014~ Jan. 04, 2014	Apr. 21, 2017	Radiation (03CH02-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Nov. 23, 2016	Jan. 03, 2014~ Jan. 04, 2014	Nov. 22, 2017	Radiation (03CH02-KS)
Bilog Antenna	TeseQ	CBL6112D	37879	30MHz~2GHz	Aug. 20, 2016	Jan. 03, 2014~ Jan. 04, 2014	Aug. 19, 2017	Radiation (03CH02-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	75957	1GHz~18GHz	Oct. 22, 2016	Jan. 03, 2014~ Jan. 04, 2014	Oct. 21, 2017	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	1865802	1GHz~18GHz	Jan. 20, 2016	Jan. 03, 2014~ Jan. 04, 2014	Jan. 19, 2017	Radiation (03CH02-KS)
high gain Amplifier	MITEQ	AMF-7D-0010 1800-30-10P	1943529	1GHz~18GHz	Jan. 20, 2016	Jan. 03, 2014~ Jan. 04, 2014	Jan. 19, 2017	Radiation (03CH02-KS)
SHF-EHF Horn	Schwarzbeck	BBHA 9170	BBHA170 249	15GHz~40GHz	Mar. 03, 2016	Jan. 03, 2014~ Jan. 04, 2014	Mar. 02, 2017	Radiation (03CH02-KS)
Amplifier	com-power	PA-103A	161069	1kHz~1000MHz / 32 dB	Apr. 22, 2016	Jan. 03, 2014~ Jan. 04, 2014	Apr. 21, 2017	Radiation (03CH02-KS)
Amplifier	Agilent	8449B	3008A023 84	1GHz~26.5GHz	Oct. 13, 2016	Jan. 03, 2014~ Jan. 04, 2014	Oct. 12, 2017	Radiation (03CH02-KS)
Amplifier	MITEQ	TTA1840-35- HG	1887435	18GHz~40GHz	Jan. 20, 2016	Jan. 03, 2014~ Jan. 04, 2014	Jan. 19, 2017	Radiation (03CH02-KS)
AC Power Source	Chroma	61601	61601000 2473	N/A	NCR	Jan. 03, 2014~ Jan. 04, 2014	NCR	Radiation (03CH02-KS)
Turn Table	MF	MF7802	N/A	0~360 degree	NCR	Jan. 03, 2014~ Jan. 04, 2014	NCR	Radiation (03CH02-KS)
Antenna Mast	MF	MF7802	N/A	1 m~4 m	NCR	Jan. 03, 2014~ Jan. 04, 2014	NCR	Radiation (03CH02-KS)

NCR: No Calibration Required



5 Uncertainty of Evaluation

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------

Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.1 dB
---	--------



Appendix A. Conducted Test Results

A1 - DTS Part

Test Engineer:	Jacky Huang	Temperature:	22~23	°C
Test Date:	2017/1/3~2017/1/4	Relative Humidity:	53~55	%

TEST RESULTS DATA
6dB and 99% Occupied Bandwidth

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
11b	1Mbps	1	1	2412	13.29	8.03	0.50	Pass
11b	1Mbps	1	6	2437	13.24	8.05	0.50	Pass
11b	1Mbps	1	11	2462	13.34	8.07	0.50	Pass
11g	6Mbps	1	1	2412	16.78	15.33	0.50	Pass
11g	6Mbps	1	6	2437	16.68	15.13	0.50	Pass
11g	6Mbps	1	11	2462	16.73	15.31	0.50	Pass
HT20	MCS0	1	1	2412	17.73	15.13	0.50	Pass
HT20	MCS0	1	6	2437	17.68	15.13	0.50	Pass
HT20	MCS0	1	11	2462	17.73	15.15	0.50	Pass
HT40	MCS0	1	3	2422	36.16	35.13	0.50	Pass
HT40	MCS0	1	4	2427	36.06	35.05	0.50	Pass
HT40	MCS0	1	6	2437	35.96	35.05	0.50	Pass
HT40	MCS0	1	8	2447	35.86	35.05	0.50	Pass
HT40	MCS0	1	9	2452	35.96	35.05	0.50	Pass

TEST RESULTS DATA
Peak Power Table

2.4GHz Band										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
11b	1Mbps	1	1	2412	18.58	30.00	1.00	19.58	36.00	Pass
11b	1Mbps	1	6	2437	18.46	30.00	1.00	19.46	36.00	Pass
11b	1Mbps	1	11	2462	18.16	30.00	1.00	19.16	36.00	Pass
11g	6Mbps	1	1	2412	21.16	30.00	1.00	22.16	36.00	Pass
11g	6Mbps	1	6	2437	21.09	30.00	1.00	22.09	36.00	Pass
11g	6Mbps	1	11	2462	20.71	30.00	1.00	21.71	36.00	Pass
HT20	MCS0	1	1	2412	21.67	30.00	1.00	22.67	36.00	Pass
HT20	MCS0	1	6	2437	21.43	30.00	1.00	22.43	36.00	Pass
HT20	MCS0	1	11	2462	20.94	30.00	1.00	21.94	36.00	Pass
HT40	MCS0	1	3	2422	18.91	30.00	1.00	19.91	36.00	Pass
HT40	MCS0	1	4	2427	21.96	30.00	1.00	22.96	36.00	Pass
HT40	MCS0	1	6	2437	21.74	30.00	1.00	22.74	36.00	Pass
HT40	MCS0	1	8	2447	21.53	30.00	1.00	22.53	36.00	Pass
HT40	MCS0	1	9	2452	18.84	30.00	1.00	19.84	36.00	Pass

TEST RESULTS DATA
Average Power Table
(Reporting Only)

2.4GHz Band						
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)
11b	1Mbps	1	1	2412	0.03	16.04
11b	1Mbps	1	6	2437	0.03	15.89
11b	1Mbps	1	11	2462	0.03	15.79
11g	6Mbps	1	1	2412	0.21	14.99
11g	6Mbps	1	6	2437	0.21	14.92
11g	6Mbps	1	11	2462	0.21	14.72
HT20	MCS0	1	1	2412	0.22	14.84
HT20	MCS0	1	6	2437	0.22	14.76
HT20	MCS0	1	11	2462	0.22	14.42
HT40	MCS0	1	3	2422	0.41	12.13
HT40	MCS0	1	4	2427	0.41	15.07
HT40	MCS0	1	6	2437	0.41	14.99
HT40	MCS0	1	8	2447	0.41	14.66
HT40	MCS0	1	9	2452	0.41	12.07

TEST RESULTS DATA
Peak Power Density

2.4GHz Band								
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
11b	1Mbps	1	1	2412	-9.13	1.00	8.00	Pass
11b	1Mbps	1	6	2437	-9.57	1.00	8.00	Pass
11b	1Mbps	1	11	2462	-8.75	1.00	8.00	Pass
11g	6Mbps	1	1	2412	-11.28	1.00	8.00	Pass
11g	6Mbps	1	6	2437	-11.42	1.00	8.00	Pass
11g	6Mbps	1	11	2462	-12.15	1.00	8.00	Pass
HT20	MCS0	1	1	2412	-12.03	1.00	8.00	Pass
HT20	MCS0	1	6	2437	-12.20	1.00	8.00	Pass
HT20	MCS0	1	11	2462	-11.61	1.00	8.00	Pass
HT40	MCS0	1	3	2422	-15.13	1.00	8.00	Pass
HT40	MCS0	1	4	2427	-12.97	1.00	8.00	Pass
HT40	MCS0	1	6	2437	-12.87	1.00	8.00	Pass
HT40	MCS0	1	8	2447	-13.86	1.00	8.00	Pass
HT40	MCS0	1	9	2452	-16.83	1.00	8.00	Pass



Appendix B. Radiated Spurious Emission

2.4GHz 2400~2483.5MHz

WIFI 802.11b (Band Edge @ 3m)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b CH 01 2412MHz		2388	51.87	-22.13	74	53.23	25.4	4.76	31.52	359	126	P	H
		2387.09	41.36	-12.64	54	42.72	25.4	4.76	31.52	359	126	A	H
	*	2412	102.9	-	-	104.08	25.54	4.78	31.5	359	126	P	H
	*	2414	98.31	-	-	99.49	25.54	4.78	31.5	359	126	A	H
		2389.3	49.82	-24.18	74	51.18	25.4	4.76	31.52	130	232	P	V
		2387.35	39.13	-14.87	54	40.49	25.4	4.76	31.52	130	232	A	V
	*	2412	99.35	-	-	100.53	25.54	4.78	31.5	130	232	P	V
	*	2414	94.74	-	-	95.92	25.54	4.78	31.5	130	232	A	V
802.11b CH 06 2437MHz		2388.91	45.48	-28.52	74	46.84	25.4	4.76	31.52	136	285	P	H
		2389.95	34.77	-19.23	54	36.13	25.4	4.76	31.52	136	285	A	H
		2485.78	47.57	-26.43	74	48.06	26.11	4.86	31.46	136	285	P	H
		2483.51	36.4	-17.6	54	36.89	26.11	4.86	31.46	136	285	A	H
	*	2438	102.32	-	-	103.15	25.83	4.82	31.48	136	285	P	H
	*	2436	98.7	-	-	99.7	25.69	4.8	31.49	136	285	A	H
		2384.62	44.6	-29.4	74	46.03	25.35	4.75	31.53	153	70	P	V
		2389.69	33.15	-20.85	54	34.51	25.4	4.76	31.52	153	70	A	V
		2483.51	45.88	-28.12	74	46.37	26.11	4.86	31.46	153	70	P	V
		2484.16	34.52	-19.48	54	35.01	26.11	4.86	31.46	153	70	A	V
	*	2436	99.74	-	-	100.74	25.69	4.8	31.49	153	70	P	V
*	2436	95.79	-	-	96.79	25.69	4.8	31.49	153	70	A	V	



802.11b CH 11 2462MHz		2493.94	54.03	-19.97	74	54.34	26.26	4.88	31.45	311	125	P	H
		2494.3	42.8	-11.2	54	43.11	26.26	4.88	31.45	311	125	A	H
	*	2462	102.19	-	-	102.85	25.97	4.84	31.47	311	125	P	H
	*	2464	97.46	-	-	98.12	25.97	4.84	31.47	311	125	A	H
		2490.64	49.15	-24.85	74	49.46	26.26	4.88	31.45	101	284	P	V
		2490.46	38.28	-15.72	54	38.59	26.26	4.88	31.45	101	284	A	V
	*	2462	98.09	-	-	98.75	25.97	4.84	31.47	101	284	P	V
	*	2462	93.41	-	-	94.07	25.97	4.84	31.47	101	284	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
WIFI 802.11b (Harmonic @ 3m)

Table with 14 columns: WIFI, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11b CH 01 (2412MHz), 802.11b CH 06 (2437MHz), and 802.11b CH 11 (2462MHz).



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Band Edge @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11g CH 01 2412MHz		2389.95	54.3	-19.7	74	55.66	25.4	4.76	31.52	361	126	P	H
		2389.95	44.35	-9.65	54	45.71	25.4	4.76	31.52	361	126	A	H
	*	2416	104.36	-	-	105.54	25.54	4.78	31.5	361	126	P	H
	*	2414	96.51	-	-	97.69	25.54	4.78	31.5	361	126	A	H
		2389.82	50.76	-23.24	74	52.12	25.4	4.76	31.52	254	150	P	V
		2389.82	41.11	-12.89	54	42.47	25.4	4.76	31.52	254	150	A	V
	*	2408	100.31	-	-	101.49	25.54	4.78	31.5	254	150	P	V
	*	2416	92.23	-	-	93.41	25.54	4.78	31.5	254	150	A	V
802.11g CH 06 2437MHz		2389.17	51.19	-22.81	74	52.55	25.4	4.76	31.52	362	125	P	H
		2389.56	41.08	-12.92	54	42.44	25.4	4.76	31.52	362	125	A	H
		2484.82	50.01	-23.99	74	50.5	26.11	4.86	31.46	362	125	P	H
		2483.74	39.42	-14.58	54	39.91	26.11	4.86	31.46	362	125	A	H
	*	2436	104.13	-	-	105.13	25.69	4.8	31.49	362	125	P	H
	*	2436	96.28	-	-	97.28	25.69	4.8	31.49	362	125	A	H
		2388.91	44.63	-29.37	74	45.99	25.4	4.76	31.52	152	72	P	V
		2389.69	35.07	-18.93	54	36.43	25.4	4.76	31.52	152	72	A	V
		2484.04	46.7	-27.3	74	47.19	26.11	4.86	31.46	152	72	P	V
		2484.76	36.67	-17.33	54	37.16	26.11	4.86	31.46	152	72	A	V
	*	2434	98.82	-	-	99.82	25.69	4.8	31.49	152	72	P	V
	*	2434	91.88	-	-	92.88	25.69	4.8	31.49	152	72	A	V



802.11g CH 11 2462MHz		2483.62	52.25	-21.75	74	52.74	26.11	4.86	31.46	365	246	P	H
		2483.51	43.02	-10.98	54	43.51	26.11	4.86	31.46	365	246	A	H
	*	2466	101.84	-	-	102.5	25.97	4.84	31.47	365	246	P	H
	*	2464	93.63	-	-	94.29	25.97	4.84	31.47	365	246	A	H
		2497.9	49.65	-24.35	74	49.96	26.26	4.88	31.45	100	60	P	V
		2483.51	39.9	-14.1	54	40.39	26.11	4.86	31.46	100	60	A	V
	*	2460	98.7	-	-	99.36	25.97	4.84	31.47	100	60	P	V
	*	2462	90.08	-	-	90.74	25.97	4.84	31.47	100	60	A	V
Remark	<ol style="list-style-type: none"> No other spurious found. All results are PASS against Peak and Average limit line. 												



2.4GHz 2400~2483.5MHz
WIFI 802.11g (Harmonic @ 3m)

Table with 14 columns: WIFI, Note, Frequency (MHz), Level (dBµV/m), Over Limit (dB), Limit Line (dBµV/m), Read Level (dBµV), Antenna Factor (dB/m), Cable Loss (dB), Preamp Factor (dB), Ant Pos (cm), Table Pos (deg), Peak Avg. (P/A), Pol. (H/V). Rows include data for 802.11g CH 01 (2412MHz), CH 06 (2437MHz), and CH 11 (2462MHz).



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Band Edge @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		2389.82	57.49	-16.51	74	56.63	27.62	4.76	31.52	181	107	P	H
		2389.82	47.82	-6.18	54	46.96	27.62	4.76	31.52	181	107	A	H
	*	2416	108.04	-	-	107.15	27.61	4.78	31.5	181	107	P	H
	*	2414	100.19	-	-	99.3	27.61	4.78	31.5	181	107	A	H
		2389.95	50.22	-23.78	74	49.36	27.62	4.76	31.52	368	296	P	V
		2389.95	41.02	-12.98	54	40.16	27.62	4.76	31.52	368	296	A	V
	*	2414	103.02	-	-	102.13	27.61	4.78	31.5	368	296	P	V
	*	2416	94.87	-	-	93.98	27.61	4.78	31.5	368	296	A	V
802.11n HT20 CH 06 2437MHz		2387.22	52.27	-21.73	74	51.41	27.62	4.76	31.52	184	121	P	H
		2389.43	42.38	-11.62	54	41.52	27.62	4.76	31.52	184	121	A	H
		2484.22	54.12	-19.88	74	53.13	27.59	4.86	31.46	184	121	P	H
		2483.62	43.45	-10.55	54	42.46	27.59	4.86	31.46	184	121	A	H
	*	2436	105.56	-	-	104.64	27.61	4.8	31.49	184	121	P	H
	*	2434	97.46	-	-	96.54	27.61	4.8	31.49	184	121	A	H
		2388.39	46.01	-27.99	74	45.15	27.62	4.76	31.52	100	318	P	V
		2389.69	36.47	-17.53	54	35.61	27.62	4.76	31.52	100	318	A	V
		2492.14	47.35	-26.65	74	46.34	27.58	4.88	31.45	100	318	P	V
		2485.24	37.31	-16.69	54	36.32	27.59	4.86	31.46	100	318	A	V
	*	2436	99.11	-	-	98.19	27.61	4.8	31.49	100	318	P	V
	*	2436	90.91	-	-	89.99	27.61	4.8	31.49	100	318	A	V



802.11n HT20 CH 11 2462MHz		2484.22	58.28	-15.72	74	57.29	27.59	4.86	31.46	184	121	P	H
		2483.5	48.1	-5.9	54	47.11	27.59	4.86	31.46	184	121	A	H
	*	2460	105.31	-	-	104.35	27.59	4.84	31.47	184	121	P	H
	*	2464	97.1	-	-	96.14	27.59	4.84	31.47	184	121	A	H
		2484.34	52.05	-21.95	74	51.06	27.59	4.86	31.46	100	318	P	V
		2483.56	41.24	-12.76	54	40.25	27.59	4.86	31.46	100	318	A	V
	*	2460	100.07	-	-	99.11	27.59	4.84	31.47	100	318	P	V
	*	2460	91.78	-	-	90.82	27.59	4.84	31.47	100	318	A	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT20 (Harmonic @ 3m)**

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT20 CH 01 2412MHz		4824	36.58	-37.42	74	58.19	30.9	6.87	59.38	150	360	P	H
		4824	35.54	-38.46	74	57.15	30.9	6.87	59.38	150	360	P	V
802.11n HT20 CH 06 2437MHz		4872	36.51	-37.49	74	57.78	31.01	6.86	59.14	150	360	P	H
		7308	42.05	-31.95	74	56.79	35.34	8.47	58.55	150	360	P	H
		4872	37.21	-36.79	74	58.48	31.01	6.86	59.14	150	360	P	V
		7308	40.86	-33.14	74	55.6	35.34	8.47	58.55	150	360	P	V
802.11n HT20 CH 11 2462MHz		4926	37.31	-36.69	74	58.25	31.12	6.84	58.9	150	360	P	H
		7386	40.98	-33.02	74	55.92	35.55	8.49	58.98	150	360	P	H
		4926	36.52	-37.48	74	57.46	31.12	6.84	58.9	150	360	P	V
		7386	40.36	-33.64	74	55.3	35.55	8.49	58.98	150	360	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



**2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Band Edge @ 3m)**

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n HT40 CH 03 2422MHz		2389.56	63.81	-10.19	74	65.17	25.4	4.76	31.52	127	110	P	H
		2388.13	46.16	-7.84	54	47.52	25.4	4.76	31.52	127	110	A	H
		2484.76	56.22	-17.78	74	56.71	26.11	4.86	31.46	127	110	P	H
		2484.88	41.42	-12.58	54	41.91	26.11	4.86	31.46	127	110	A	H
	*	2428	99.92	-	-	100.92	25.69	4.8	31.49	127	110	P	H
	*	2430	92.05	-	-	93.05	25.69	4.8	31.49	127	110	A	H
		2388.39	58.05	-15.95	74	59.41	25.4	4.76	31.52	100	294	P	V
		2388	40.79	-13.21	54	42.15	25.4	4.76	31.52	100	294	A	V
		2485.48	49.82	-24.18	74	50.31	26.11	4.86	31.46	100	294	P	V
		2491.06	36.08	-17.92	54	36.39	26.26	4.88	31.45	100	294	A	V
	*	2432	93.64	-	-	94.64	25.69	4.8	31.49	100	294	P	V
	*	2430	85.79	-	-	86.79	25.69	4.8	31.49	100	294	A	V
802.11n HT40 CH 04 2427MHz		2388	59.95	-14.05	74	61.31	25.4	4.76	31.52	133	286	P	H
		2389.82	44.05	-9.95	54	45.41	25.4	4.76	31.52	133	286	A	H
	*	2489.56	55.74	-18.26	74	56.05	26.26	4.88	31.45	133	286	P	H
	*	2484.22	40.88	-13.12	54	41.37	26.11	4.86	31.46	133	286	A	H
		2434	102.12	-	-	103.12	25.69	4.8	31.49	133	286	P	H
		2430	91.81	-	-	92.81	25.69	4.8	31.49	133	286	A	H
		2387.22	58.9	-15.1	74	60.26	25.4	4.76	31.52	100	57	P	V
		2386.96	42.2	-11.8	54	43.56	25.4	4.76	31.52	100	57	A	V
	*	2483.74	54.16	-19.84	74	54.65	26.11	4.86	31.46	100	57	P	V
	*	2483.5	38.21	-15.79	54	38.7	26.11	4.86	31.46	100	57	A	V
		2424	95.82	21.82	74	96.82	25.69	4.8	31.49	100	57	P	V
		2422	87.55	33.55	54	88.55	25.69	4.8	31.49	100	57	A	V



802.11n HT40 CH 06 2437MHz		2389.82	60.96	-13.04	74	62.32	25.4	4.76	31.52	124	110	P	H
		2389.56	45.06	-8.94	54	46.42	25.4	4.76	31.52	124	110	A	H
		2489.92	60.87	-13.13	74	61.18	26.26	4.88	31.45	124	110	P	H
		2483.56	47.41	-6.59	54	47.9	26.11	4.86	31.46	124	110	A	H
	*	2434	102.65	-	-	103.65	25.69	4.8	31.49	124	110	P	H
	*	2432	94.59	-	-	95.59	25.69	4.8	31.49	124	110	A	H
		2389.56	58.33	-15.67	74	59.69	25.4	4.76	31.52	100	294	P	V
		2389.3	41.89	-12.11	54	43.25	25.4	4.76	31.52	100	294	A	V
		2488.96	55.57	-18.43	74	55.88	26.26	4.88	31.45	100	294	P	V
		2483.5	40.47	-13.53	54	40.96	26.11	4.86	31.46	100	294	A	V
	*	2434	97.91	-	-	98.91	25.69	4.8	31.49	100	294	P	V
	*	2432	89.96	-	-	90.96	25.69	4.8	31.49	100	294	A	V
802.11n HT40 CH 08 2447MHz	*	2388.39	58.7	-15.3	74	60.06	25.4	4.76	31.52	136	286	P	H
	*	2389.3	41.81	-12.19	54	43.17	25.4	4.76	31.52	136	286	A	H
		2485.72	61.72	-12.28	74	62.21	26.11	4.86	31.46	136	286	P	H
		2486.32	48	-6	54	48.49	26.11	4.86	31.46	136	286	A	H
		2450	102.28	-	-	103.11	25.83	4.82	31.48	136	286	P	H
		2438	92.23	-	-	93.06	25.83	4.82	31.48	136	286	A	H
	*	2389.3	56.43	-17.57	74	57.79	25.4	4.76	31.52	154	69	P	V
	*	2389.3	39.44	-14.56	54	40.8	25.4	4.76	31.52	154	69	A	V
		2486.38	57.96	-16.04	74	58.45	26.11	4.86	31.46	154	69	P	V
		2483.56	44.68	-9.32	54	45.17	26.11	4.86	31.46	154	69	A	V
		2436	97.03	-	-	98.03	25.69	4.8	31.49	154	69	P	V
		2436	88.64	-	-	89.64	25.69	4.8	31.49	154	69	A	V



802.11n HT40 CH 09 2452MHz		2389.04	56.19	-17.81	74	57.55	25.4	4.76	31.52	149	110	P	H
		2389.3	39.94	-14.06	54	41.3	25.4	4.76	31.52	149	110	A	H
		2485.18	64.24	-9.76	74	64.73	26.11	4.86	31.46	149	110	P	H
		2484.7	50.77	-3.23	54	51.26	26.11	4.86	31.46	149	110	A	H
	*	2446	99.55	-	-	100.38	25.83	4.82	31.48	149	110	P	H
	*	2446	92.17	-	-	93	25.83	4.82	31.48	149	110	A	H
		2387.22	53.62	-20.38	74	54.98	25.4	4.76	31.52	101	295	P	V
		2389.3	36.34	-17.66	54	37.7	25.4	4.76	31.52	101	295	A	V
		2485.24	56.97	-17.03	74	57.46	26.11	4.86	31.46	101	295	P	V
		2483.98	42.24	-11.76	54	42.73	26.11	4.86	31.46	101	295	A	V
	*	2444	94.05	-	-	94.88	25.83	4.82	31.48	101	295	P	V
	*	2444	86.64	-	-	87.47	25.83	4.82	31.48	101	295	A	V
Remark	<p>1. No other spurious found.</p> <p>2. All results are PASS against Peak and Average limit line.</p>												



2.4GHz 2400~2483.5MHz
WIFI 802.11n HT40 (Harmonic @ 3m)

WIFI	Note	Frequency (MHz)	Level (dBμV/m)	Over Limit (dB)	Limit Line (dBμV/m)	Read Level (dBμV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamp Factor (dB)	Ant Pos (cm)	Table Pos (deg)	Peak Avg. (P/A)	Pol. (H/V)
802.11n		4844	35.55	-38.45	74	57.05	30.93	6.87	59.3	100	360	P	H
HT40		7266	41.04	-32.96	74	55.7	35.26	8.46	58.38	100	360	P	H
CH 03		4844	35.9	-38.1	74	57.4	30.93	6.87	59.3	100	360	P	V
2422MHz		7266	41.1	-32.9	74	55.76	35.26	8.46	58.38	100	360	P	V
802.11n		4854	35.55	-38.45	74	56.94	30.97	6.86	59.22	100	360	P	H
HT40		7281	41.04	-32.96	74	55.7	35.26	8.46	58.38	100	360	P	H
CH 04		4854	36.9	-37.1	74	58.29	30.97	6.86	59.22	100	360	P	V
2427MHz		7284	41.41	-32.59	74	56.11	35.3	8.47	58.47	100	360	P	V
802.11n		4874	37.31	-36.69	74	58.58	31.01	6.86	59.14	150	360	P	H
HT40		7311	40.45	-33.55	74	55.19	35.34	8.47	58.55	150	360	P	H
CH 06		4874	37.28	-36.72	74	58.55	31.01	6.86	59.14	150	360	P	V
2437MHz		7311	40.81	-33.19	74	55.55	35.34	8.47	58.55	150	360	P	V
802.11n		4896	36.34	-37.66	74	57.51	31.04	6.85	59.06	150	360	P	H
HT40		7344	40.51	-33.49	74	55.32	35.43	8.48	58.72	150	360	P	H
CH 08		4896	36.84	-37.16	74	58.01	31.04	6.85	59.06	150	360	P	V
2447MHz		7344	42.08	-31.92	74	56.89	35.43	8.48	58.72	150	360	P	V
802.11n		4902	37.81	-36.19	74	58.86	31.08	6.85	58.98	100	360	P	H
HT40		7356	40.08	-33.92	74	54.93	35.47	8.49	58.81	100	360	P	H
CH 09		4902	36.01	-37.99	74	57.06	31.08	6.85	58.98	100	0	P	V
2452MHz		7356	40.48	-33.52	74	55.33	35.47	8.49	58.81	100	0	P	V
Remark	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz

Emission below 1GHz

2.4GHz WIFI 802.11n HT40 (LF)

WIFI	Note	Frequency	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.
		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
2.4GHz 802.11n HT40 LF		33.88	24.31	-15.69	40	35.15	19	0.65	30.49	100	36	P	H
		111.48	17.47	-26.03	43.5	33.4	12.28	1.13	29.34	-	-	P	H
		178.41	19.1	-24.4	43.5	34.51	11.78	1.41	28.6	-	-	P	H
		240.49	18.02	-27.98	46	31.3	13.2	1.64	28.12	-	-	P	H
		403.45	23.88	-22.12	46	31.94	16.98	2.12	27.16	-	-	P	H
		714.82	27.03	-18.97	46	29.23	20.89	2.81	25.9	-	-	P	H
		30.97	25.22	-14.78	40	33.96	21.1	0.65	30.49	-	-	P	V
		43.58	23.69	-16.31	40	39.18	14.12	0.73	30.34	-	-	P	V
		59.1	26.68	-13.32	40	48.9	7.02	0.84	30.08	100	201	P	V
		80.44	22.37	-17.63	40	40.49	10.7	0.97	29.79	-	-	P	V
		177.44	22.51	-20.99	43.5	37.88	11.83	1.41	28.61	-	-	P	V
		405.39	24.29	-21.71	46	32.34	16.98	2.12	27.15	-	-	P	V
Remark	1. No other spurious found. 2. All results are PASS against limit line.												



Note symbol

*	Fundamental Frequency which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is over limit line.
P/A	P eak or A verage
H/V	H orizontal or V ertical



A calculation example for radiated spurious emission is shown as below:

WIFI	Note	Frequency	Level	Over	Limit	Read	Antenna	Cable	Preamp	Ant	Table	Peak	Pol.
Ant.				Limit	Line	Level	Factor	Loss	Factor	Pos	Pos	Avg.	
2		(MHz)	(dBμV/m)	(dB)	(dBμV/m)	(dBμV)	(dB/m)	(dB)	(dB)	(cm)	(deg)	(P/A)	(H/V)
802.11b		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
CH 01													
2412MHz		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

- Level(dBμV/m) =
Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
- Over Limit(dB) = Level(dBμV/m) – Limit Line(dBμV/m)

For Peak Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)
= 55.45 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 55.45(dBμV/m) – 74(dBμV/m)
= -18.55(dB)

For Average Limit @ 2390MHz:

- Level(dBμV/m)
= Antenna Factor(dB/m) + Cable Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)
= 43.54 (dBμV/m)
- Over Limit(dB)
= Level(dBμV/m) – Limit Line(dBμV/m)
= 43.54(dBμV/m) – 54(dBμV/m)
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.




Appendix C. Duty Cycle Plots


Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
802.11b	99.31	-	-	10Hz
802.11g	95.30	2.06	0.49	1kHz
802.11n HT20	94.96	1.91	0.52	1kHz
802.11n HT40	90.97	0.95	1.05	3kHz



802.11b

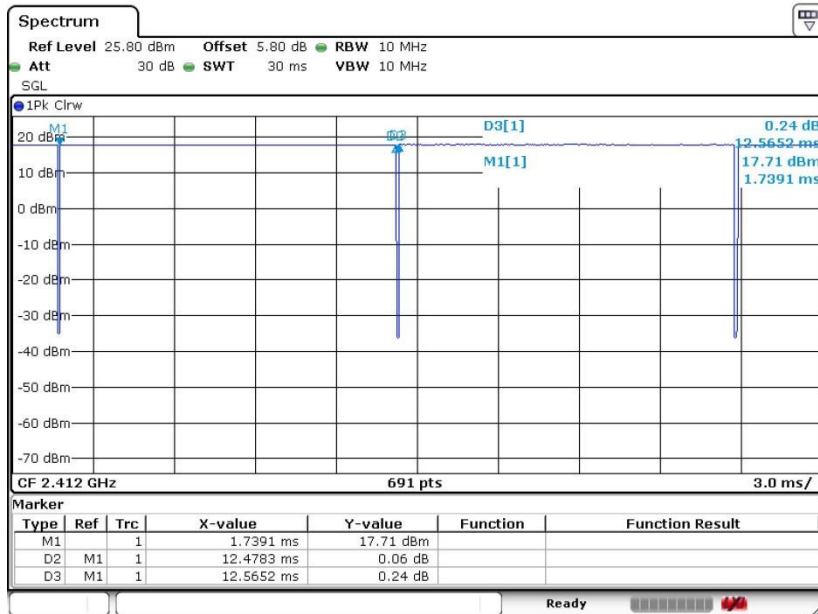


802.11g

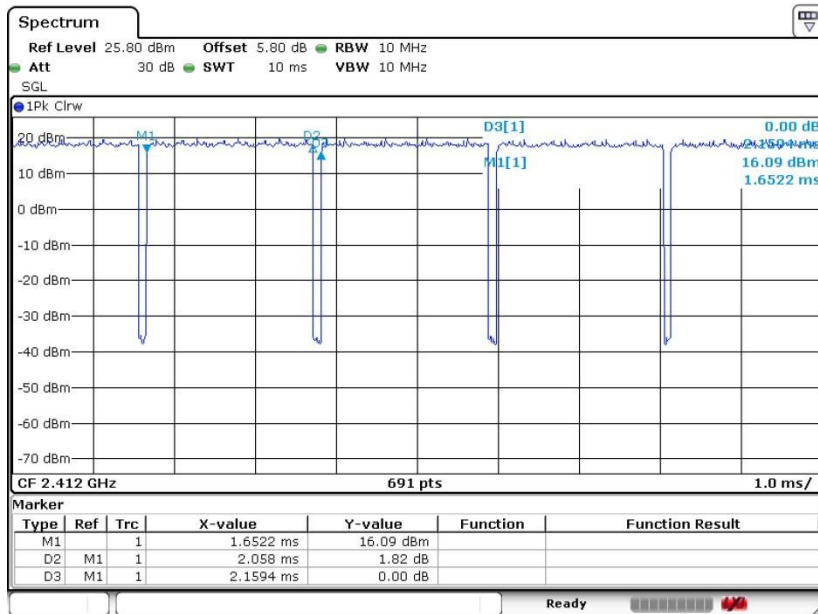



802.11n HT20

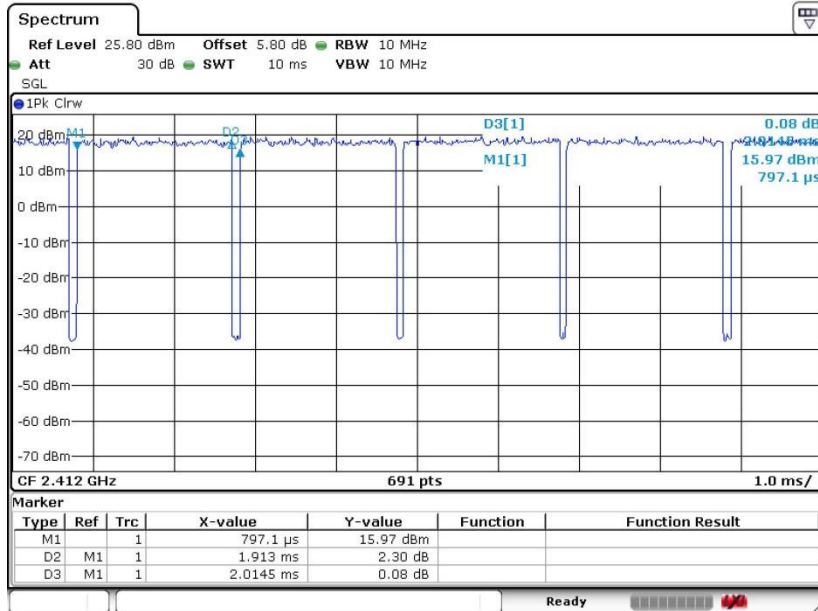

802.11n HT40

