

FCC TEST REPORT (15.247)

REPORT NO.: RF940526L11
MODEL NO.: DCUA-81
(refer to page 7 for other Models)
RECEIVED: May 26, 2005
TESTED: May 30 ~ Jun. 13, 2005
ISSUED: Jun. 15, 2005

APPLICANT: Wistron NeWeb Corp.

ADDRESS: No. 10-1, Li-hsin Road I, Science-based
Industrial Park, Hsinchu 300, Taiwan, R.O.C.

ISSUED BY: Advance Data Technology Corporation

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang 244, Taipei Hsien, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd., Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 126 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by CNLA, A2LA or any government agencies. The test results in the report only apply to the tested sample.



0528
ILAC MRA



No. 2177-01



Table of Contents

1.	CERTIFICATION	5
2.	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	9
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:.....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	12
3.4	DESCRIPTION OF SUPPORT UNITS	12
4.	TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz BAND)	13
4.1	CONDUCTED EMISSION MEASUREMENT	13
4.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	13
4.1.2	TEST INSTRUMENTS.....	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP	15
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	RADIATED EMISSION MEASUREMENT	28
4.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	28
4.2.2	TEST INSTRUMENTS.....	29
4.2.3	TEST PROCEDURES	30
4.2.4	DEVIATION FROM TEST STANDARD	30
4.2.5	TEST SETUP	31
4.2.6	EUT OPERATING CONDITIONS	31
4.2.7	TEST RESULTS	32
4.3	6dB BANDWIDTH MEASUREMENT	41
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	41
4.3.2	TEST INSTRUMENTS.....	41
4.3.3	TEST PROCEDURE.....	42
4.3.4	DEVIATION FROM TEST STANDARD	42
4.3.5	TEST SETUP	42
4.3.6	EUT OPERATING CONDITIONS	42
4.3.7	TEST RESULTS	43
4.4	MAXIMUM PEAK OUTPUT POWER	51
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	51
4.4.2	INSTRUMENTS.....	51
4.4.1	TEST PROCEDURES	52
4.4.2	DEVIATION FROM TEST STANDARD	52
4.4.3	TEST SETUP	52
4.4.4	EUT OPERATING CONDITIONS	52



4.4.3	TEST RESULTS	53
4.5	POWER SPECTRAL DENSITY MEASUREMENT	55
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	55
4.5.2	TEST INSTRUMENTS.....	55
4.5.3	TEST PROCEDURE.....	56
4.5.4	DEVIATION FROM TEST STANDARD	56
4.5.5	TEST SETUP	56
4.5.6	EUT OPERATING CONDITION	56
4.5.7	TEST RESULTS	57
4.6	BAND EDGES MEASUREMENT	65
4.6.1	LIMITS OF BAND EDGES MEASUREMENT	65
4.6.2	TEST INSTRUMENTS.....	65
4.6.3	TEST PROCEDURE.....	65
4.6.4	DEVIATION FROM TEST STANDARD	65
4.6.5	EUT OPERATING CONDITION	65
4.6.6	TEST RESULTS	66
4.7	ANTENNA REQUIREMENT	77
4.7.1	STANDARD APPLICABLE	77
4.7.2	ANTENNA CONNECTED CONSTRUCTION.....	77
5.	TEST TYPES AND RESULTS (802.11a 5725~5850MHz BAND)	78
5.1	CONDUCTED EMISSION MEASUREMENT	78
5.1.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT.....	78
5.1.2	TEST INSTRUMENTS.....	78
5.1.3	TEST PROCEDURES	79
5.1.4	DEVIATION FROM TEST STANDARD	79
5.1.5	TEST SETUP	80
5.1.6	EUT OPERATING CONDITIONS	80
5.1.7	TEST RESULTS	81
5.2	RADIATED EMISSION MEASUREMENT	85
5.2.1	LIMITS OF RADIATED EMISSION MEASUREMENT.....	85
5.2.2	TEST INSTRUMENTS.....	86
5.2.3	TEST PROCEDURES	87
5.2.4	DEVIATION FROM TEST STANDARD	87
5.2.5	TEST SETUP	88
5.2.6	EUT OPERATING CONDITIONS	88
5.2.7	TEST RESULTS	89
5.3	6dB BANDWIDTH MEASUREMENT	96
5.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	96
5.3.2	TEST INSTRUMENTS.....	96
5.3.3	TEST PROCEDURE.....	97
5.3.4	DEVIATION FROM TEST STANDARD	97
5.3.5	TEST SETUP	97
5.3.6	EUT OPERATING CONDITIONS	97
5.3.7	TEST RESULTS	98
5.4	MAXIMUM PEAK OUTPUT POWER	103



5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT 103

5.4.2 INSTRUMENTS..... 103

5.4.3 TEST PROCEDURES 104

5.4.4 DEVIATION FROM TEST STANDARD 104

5.4.5 TEST SETUP 104

5.4.6 EUT OPERATING CONDITIONS 104

5.4.7 TEST RESULTS 105

5.5 POWER SPECTRAL DENSITY MEASUREMENT 106

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT 106

5.5.2 TEST INSTRUMENTS..... 106

5.5.3 TEST PROCEDURE..... 107

5.5.4 DEVIATION FROM TEST STANDARD 107

5.5.5 TEST SETUP 107

5.5.6 EUT OPERATING CONDITION 107

5.5.7 TEST RESULTS 108

5.6 BAND EDGES MEASUREMENT 113

5.6.1 LIMITS OF BAND EDGES MEASUREMENT 113

5.6.2 TEST INSTRUMENTS..... 113

5.6.3 TEST PROCEDURE..... 113

5.6.4 DEVIATION FROM TEST STANDARD 113

5.6.5 EUT OPERATING CONDITION 114

5.6.6 TEST RESULTS 114

5.7 ANTENNA REQUIREMENT 121

5.7.1 STANDARD APPLICABLE 121

5.7.2 ANTENNA CONNECTED CONSTRUCTION 121

6. PHOTOGRAPHS OF THE TEST CONFIGURATION..... 122

7. INFORMATION ON THE TESTING LABORATORIES 126



1. CERTIFICATION

PRODUCT: IEEE 802.11 a/g USB 2.0 Adapter
BRAND NAME: Wistron NeWeb
MODEL NO.: DCUA-81
(refer to page 7 for other Models)
APPLICANT: Wistron NeWeb Corp.
TEST SAMPLE: ENGINEERING SAMPLE
TESTED: May 30 ~ Jun. 13, 2005
STANDARDS: FCC Part 15, Subpart C (Section 15.247),
ANSI C63.4-2003

The above equipment has been tested by **Advance Data Technology Corporation**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Windy Chou , **DATE:** Jun. 15, 2005
(Windy Chou)

TECHNICAL
ACCEPTANCE : Gary Chang , **DATE:** Jun. 15, 2005
Responsible for RF (Gary Chang)

APPROVED BY : Cody Chang , **DATE:** Jun. 15, 2005
(Cody Chang, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Section 15.247)			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -15.08dB at 0.209MHz
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.17dB at 11570.00MHz
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4:

Measurement	Frequency	Uncertainty
Conducted emissions	9kHz ~ 30MHz	2.44 dB
	30MHz ~ 200MHz	3.55 dB
Radiated emissions	200MHz ~ 1000MHz	3.58 dB
	1GHz ~ 18GHz	1.10 dB
	18GHz ~ 40GHz	0.91 dB



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	IEEE 802.11 a/g USB 2.0 Adapter
MODEL NO.	DCUA-81 (refer to the NOATE 3 as below for other model)
POWER SUPPLY	5Vdc from host equipment
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11/5.5/2/1Mbps 802.11g: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 108Mbps *see Note 2) 802.11a: 54/48/36/24/18/12/9/6Mbps (Turbo mode: up to 108Mbps *see Note 2)
FREQUENCY RANGE	802.11b & 802.11g: 2.412 ~ 2.462GHz 802.11a: 5.150 ~ 5.350GHz and 5.725 ~ 5.850GHz
NUMBER OF CHANNEL	802.11b & 802.11g: 11 for Normal mode / 1 for Turbo mode 802.11a: 13 for Normal mode / 5 for Turbo mode
CHANNEL SPACING	802.11b & 802.11g: 5MHz 802.11a: 20MHz for Normal mode / 40MHz for Turbo mode
OUTPUT POWER	60.256mW for 802.11b 56.234mW for 802.11g 22.284mW for 5.150 ~ 5.350GHz 22.803mW for 5.725 ~ 5.850GHz
ANTENNA TYPE	Printed Antenna with -1.10dBi gain for 2.4GHz band Printed Antenna with 3.18dBi gain for 5.0GHz band
DATA CABLE	NA
I/O PORTS	USB
ASSOCIATED DEVICES	NA

NOTE:

1. The EUT operates in both the 5GHz and 2.4GHz Bands and compatibility with 802.11a and 802.11b, 802.11g technology.
2. This EUT is capable of providing data rates of up to 108 Mbps in Turbo mode depending upon reception quality.
3. The models as below are identical to each other expect for their models due to marketing requirement.

Model Name	Brand	Remark
DCUA-81	Wistron NeWeb	The EUT use a fixed USB connector
DCUA-82	Wistron NeWeb	The EUT use a rotatable USB connector

4. The above EUT information was declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.

3.2 DESCRIPTION OF TEST MODES

Operated in 2400 ~ 2483.5MHz band:

For 802.11b/g: Eleven channels are provided to this EUT for normal mode.

Channel	Frequency	Channel	Frequency
1	2412 MHz	7	2442 MHz
2	2417 MHz	8	2447 MHz
3	2422 MHz	9	2452 MHz
4	2427 MHz	10	2457 MHz
5	2432 MHz	11	2462 MHz
6	2437 MHz		

For 802.11g: One channel is provided to this EUT for turbo mode.

Channel	Frequency
6	2437 MHz

Operated in 5725 ~ 5850MHz band:

For 802.11a: Five channels are provided to this EUT for normal mode.


Channel	Frequency
1	5745 MHz
2	5765 MHz
3	5785 MHz
4	5805 MHz
5	8525 MHz

For 802.11a: Two channels are provided to this EUT for turbo mode.

Channel	Frequency
1	5760 MHz
2	5800 MHz

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

Test Mode 1 & 2

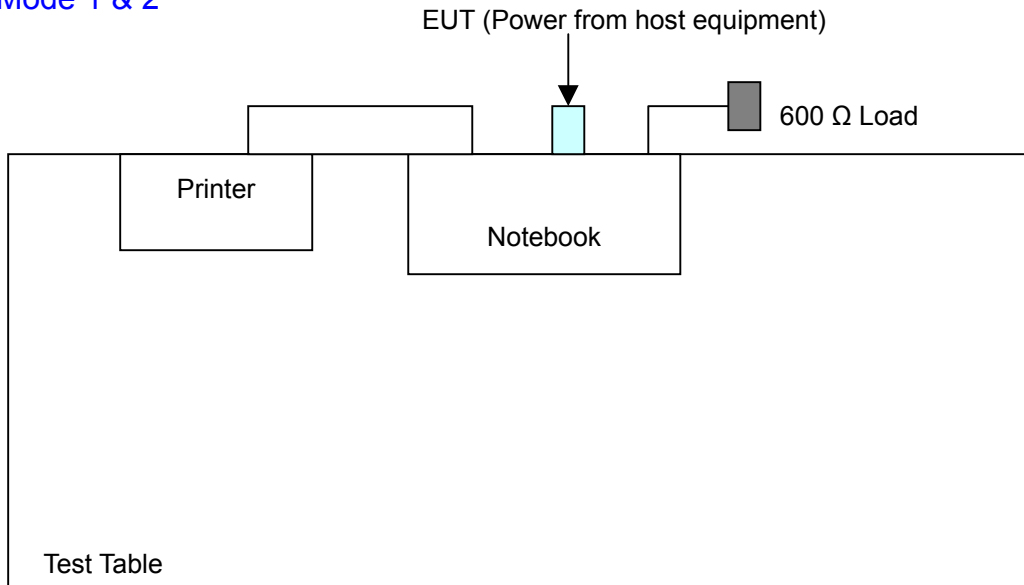



3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL:

EUT configure mode	Applicable to				Description
	PLC	RE<1G	RE≥1G	APCM	
1	v	v	Note1	Note 2	The USB connector was fixed (Model: DCUA-81)
2	v	v	Note1	Note 2	The USB connector with rotator (Model: DCUA-82)

Where PLC: Power Line Conducted Emission RE<1G RE: Radiated Emission below 1GHz
 RE≥1G: Radiated Emission above 1GHz APCM: Antenna Port Conducted Measurement

Note 1: No effect on Radiated Emission below 1GHz.

Note 2: No effect on Conducted RF measurement.

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
1	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
2	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
1	802.11a	1 to 5	3	OFDM	BPSK	6
2	802.11a	1 to 5	3	OFDM	BPSK	6

Radiated Emission Test (Below 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, rotatable angle of EUT and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Rotator angle
1	802.11g	1 to 11	11	OFDM	BPSK	6	0° (X Axis)
2	802.11g	1 to 11	11	OFDM	BPSK	6	
1	802.11a	1 to 5	3	OFDM	BPSK	6	
2	802.11a	1 to 5	3	OFDM	BPSK	6	



Radiated Emission Test (Above 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, rotatable angle of EUT and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT configure mode	Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)	Rotator angle
2	802.11b	1 to 11	1, 6, 11	DSSS	CCK	11	0° (X Axis)
2	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	
2	802.11g Turbo	6	6	OFDM	BPSK	12	
2	802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6	
2	802.11a Turbo	1 to 2	1, 2	OFDM	BPSK	12	

Bandedge Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 11	DSSS	CCK	11
802.11g	1 to 11	1, 11	OFDM	BPSK	6
802.11g Turbo	6	6	OFDM	BPSK	12
802.11a	1 to 5	1, 5	OFDM	BPSK	6
802.11a Turbo	1 to 2	1, 2	OFDM	BPSK	12

Antenna Port Conducted Measurement:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Mode	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	CCK	11
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11g Turbo	6	6	OFDM	BPSK	12
802.11a	1 to 5	1, 3, 5	OFDM	BPSK	6
802.11a Turbo	1 to 2	1, 2	OFDM	BPSK	12



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is an IEEE 802.11 a/g USB 2.0 Adapter. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C. (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	Notebook	Compaq	N800C	470048-515	FCC DoC Approved
2	PRINTER	EPSON	LQ-300+	DCGY047265	FCC DoC Approved
3	600Ω Load	NA	NA	NA	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	NA
2	1.2m shielded cable.
3	NA

NOTE: All power cords of the above support units are non shielded (1.8m).



4. TEST TYPES AND RESULTS (802.11b & g 2412~2462MHz Band)

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Feb. 15, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.




4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

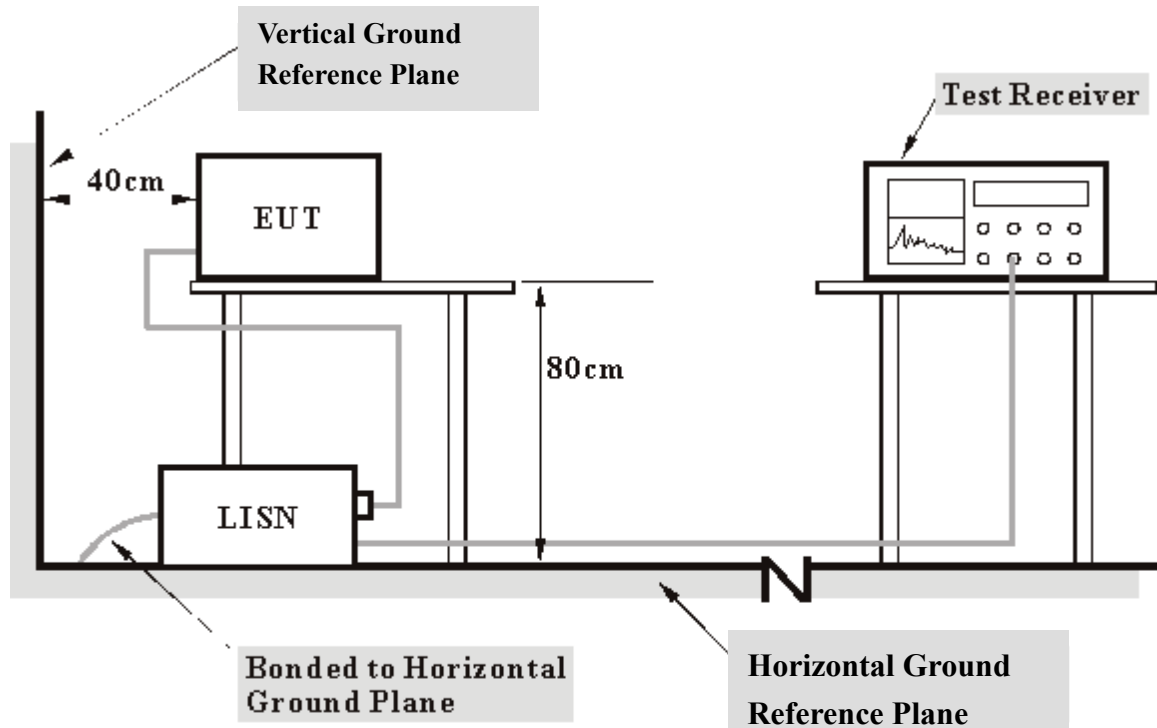

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS

- a. Plugged the EUT to the Notebook system.
- b. The Notebook system ran a test program (provided by manufacturer) to enable EUT under transmission/receiving condition continuously at specific channel frequency.
- c. The notebook system sent "H" messages to its screen.
- d. The notebook system sent "H" messages to printer and the printer printed them on paper.
- e. Steps c ~ d were repeated.




4.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.158	0.11	37.77	-	37.88	-	65.58
2	0.213	0.11	46.43	-	46.54	-	63.10	53.10	-16.56	-
3	0.326	0.11	33.60	-	33.71	-	59.56	49.56	-25.85	-
4	0.423	0.12	38.70	-	38.82	-	57.38	47.38	-18.57	-
5	0.529	0.14	36.36	-	36.50	-	56.00	46.00	-19.50	-
6	0.623	0.16	36.68	-	36.84	-	56.00	46.00	-19.16	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

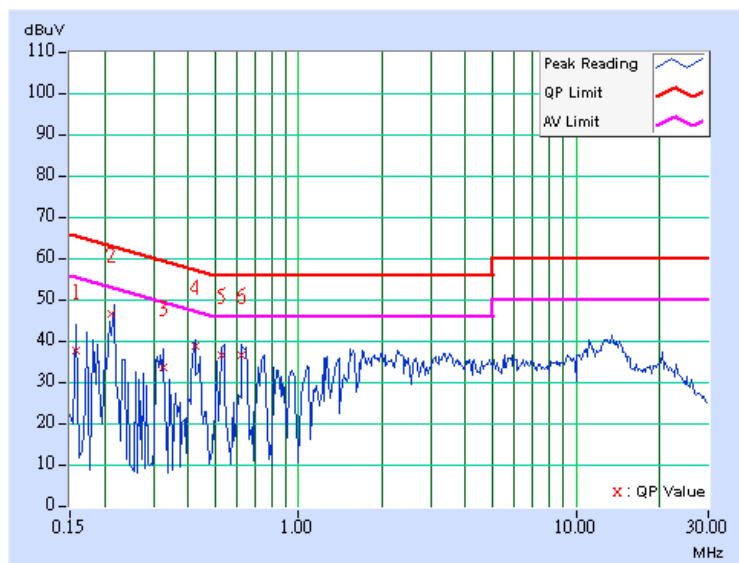




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.209	0.11	46.98	-	47.09	-	63.26
2	0.310	0.11	34.88	-	34.99	-	59.97	49.97	-24.98	-
3	0.427	0.12	39.31	-	39.43	-	57.30	47.30	-17.88	-
4	0.646	0.16	36.62	-	36.78	-	56.00	46.00	-19.22	-
5	0.752	0.19	34.51	-	34.70	-	56.00	46.00	-21.30	-
6	1.586	0.25	34.97	-	35.22	-	56.00	46.00	-20.78	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

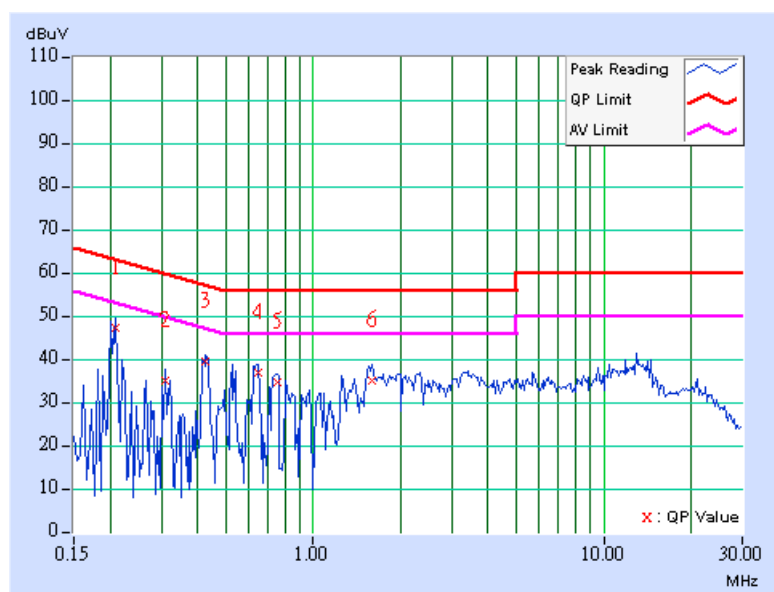




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.162	0.11	35.44	-	35.55	-	65.38
2	0.185	0.11	34.18	-	34.29	-	64.25	54.25	-29.96	-
3	0.213	0.11	47.68	-	47.79	-	63.11	53.11	-15.32	-
4	0.416	0.11	37.85	-	37.96	-	57.54	47.54	-19.57	-
5	0.646	0.16	37.59	-	37.75	-	56.00	46.00	-18.25	-
6	1.570	0.25	33.04	-	33.29	-	56.00	46.00	-22.71	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

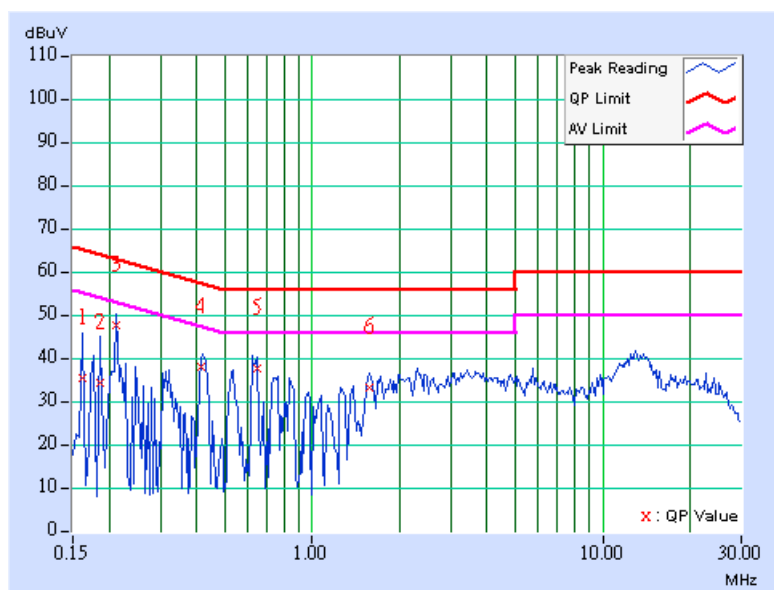




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.11	37.69	-	37.80	-	65.18
2	0.209	0.11	47.65	-	47.76	-	63.26	53.26	-15.50	-
3	0.211	0.11	46.96	-	47.07	-	63.15	53.15	-16.08	-
4	0.427	0.12	39.19	-	39.31	-	57.30	47.30	-18.00	-
5	0.627	0.16	36.97	-	37.13	-	56.00	46.00	-18.87	-
6	1.535	0.25	33.73	-	33.98	-	56.00	46.00	-22.02	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

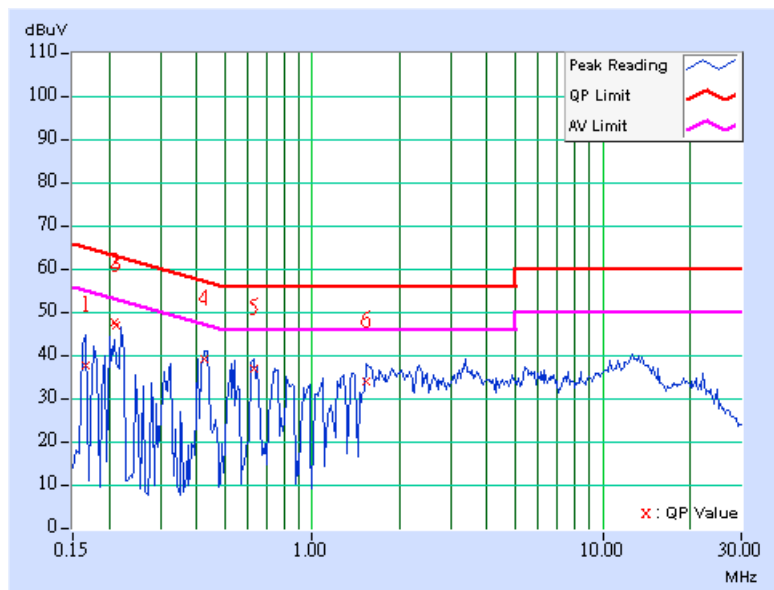




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.11	35.11	-	35.22	-	65.18
2	0.193	0.11	38.69	-	38.80	-	63.91	53.91	-25.11	-
3	0.209	0.11	48.07	-	48.18	-	63.26	53.26	-15.08	-
4	0.408	0.11	36.87	-	36.98	-	57.69	47.69	-20.71	-
5	0.638	0.16	37.59	-	37.75	-	56.00	46.00	-18.25	-
6	0.841	0.21	32.75	-	32.96	-	56.00	46.00	-23.04	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

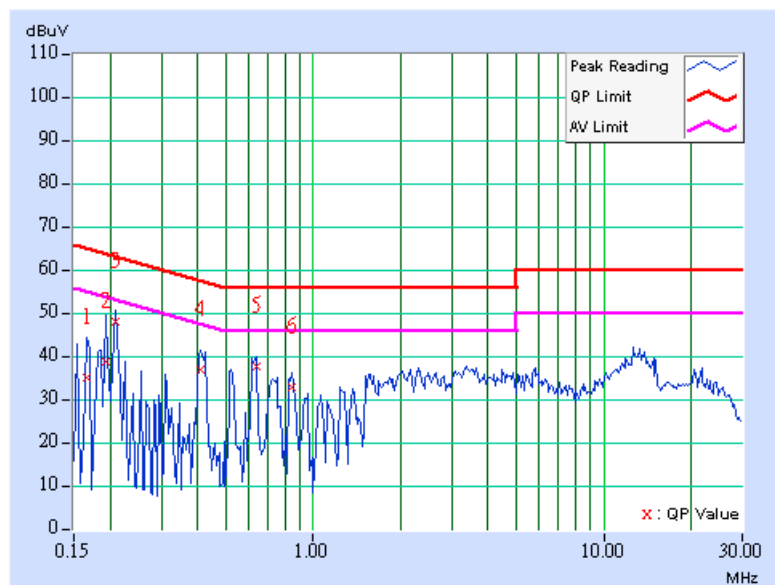




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.162	0.11	36.20	-	36.31	-	65.38
2	0.189	0.11	37.04	-	37.15	-	64.08	54.08	-26.93	-
3	0.205	0.11	46.53	-	46.64	-	63.42	53.42	-16.78	-
4	0.220	0.11	42.45	-	42.56	-	62.81	52.81	-20.25	-
5	0.423	0.12	38.07	-	38.19	-	57.38	47.38	-19.20	-
6	13.637	0.45	33.07	-	33.52	-	60.00	50.00	-26.48	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

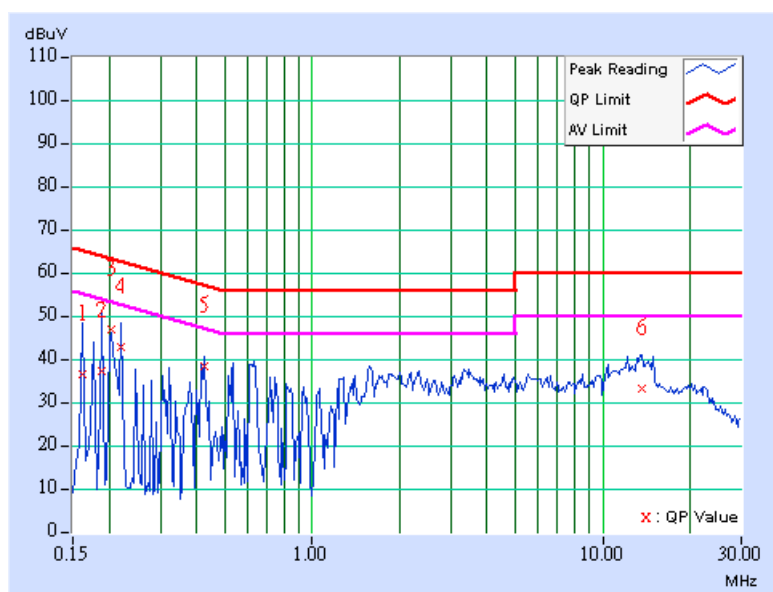




Conducted Worst-Case Data

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 1
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.197	0.11	41.33	-	41.44	-	63.74
2	0.220	0.11	36.05	-	36.16	-	62.81	52.81	-26.65	-
3	0.416	0.11	38.94	-	39.05	-	57.54	47.54	-18.48	-
4	0.627	0.16	37.78	-	37.94	-	56.00	46.00	-18.06	-
5	0.826	0.20	33.58	-	33.78	-	56.00	46.00	-22.22	-
6	1.574	0.25	32.98	-	33.23	-	56.00	46.00	-22.77	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

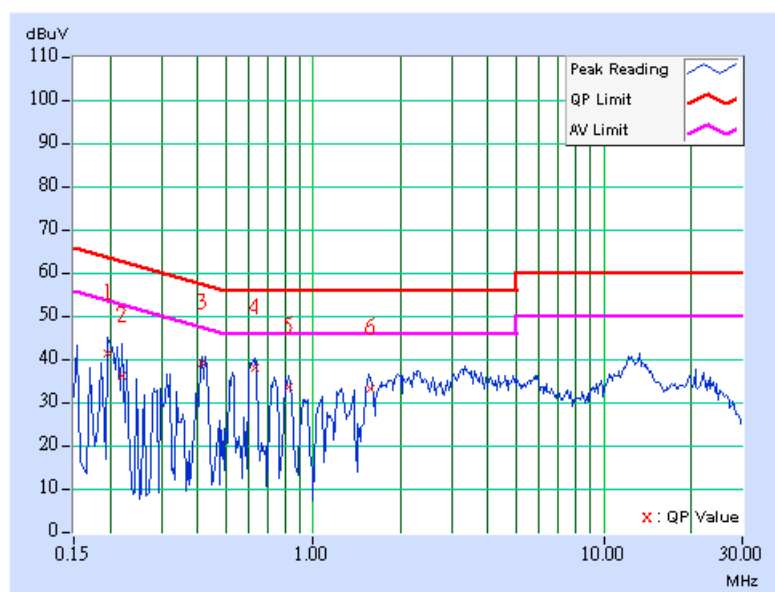




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 2
CHANNEL	Channel 1	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.11	36.79	-	36.90	-	65.79
2	0.185	0.11	34.60	-	34.71	-	64.25	54.25	-29.54	-
3	0.213	0.11	45.91	-	46.02	-	63.11	53.11	-17.09	-
4	0.412	0.11	38.35	-	38.46	-	57.61	47.61	-19.15	-
5	0.619	0.16	37.48	-	37.64	-	56.00	46.00	-18.36	-
6	0.713	0.18	33.32	-	33.50	-	56.00	46.00	-22.50	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

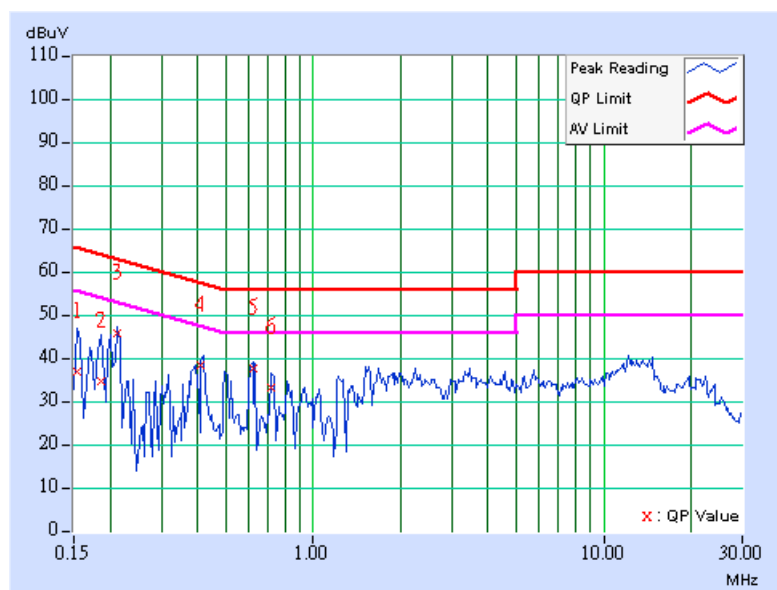




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 1
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.166	0.11	35.48	-	35.59	-	65.18
2	0.205	0.11	47.78	-	47.89	-	63.42	53.42	-15.53	-
3	0.224	0.11	33.75	-	33.86	-	62.66	52.66	-28.80	-
4	0.310	0.11	34.84	-	34.95	-	59.97	49.97	-25.02	-
5	0.420	0.11	38.78	-	38.89	-	57.46	47.46	-18.56	-
6	0.623	0.16	37.95	-	38.11	-	56.00	46.00	-17.89	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

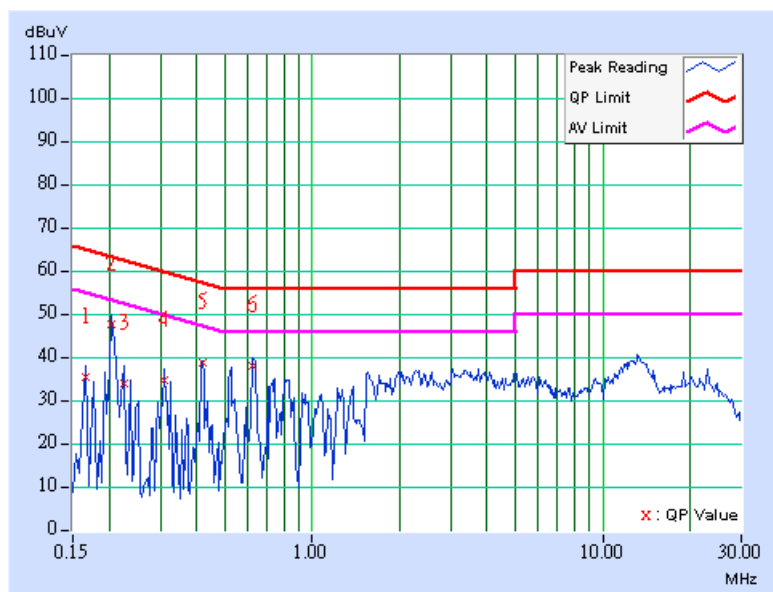




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 2
CHANNEL	Channel 6	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.11	33.53	-	33.64	-	64.98
2	0.209	0.11	46.90	-	47.01	-	63.26	53.26	-16.25	-
3	0.318	0.11	34.57	-	34.68	-	59.76	49.76	-25.08	-
4	0.416	0.11	38.89	-	39.00	-	57.54	47.54	-18.53	-
5	0.615	0.16	37.00	-	37.16	-	56.00	46.00	-18.84	-
6	1.520	0.25	33.13	-	33.38	-	56.00	46.00	-22.62	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

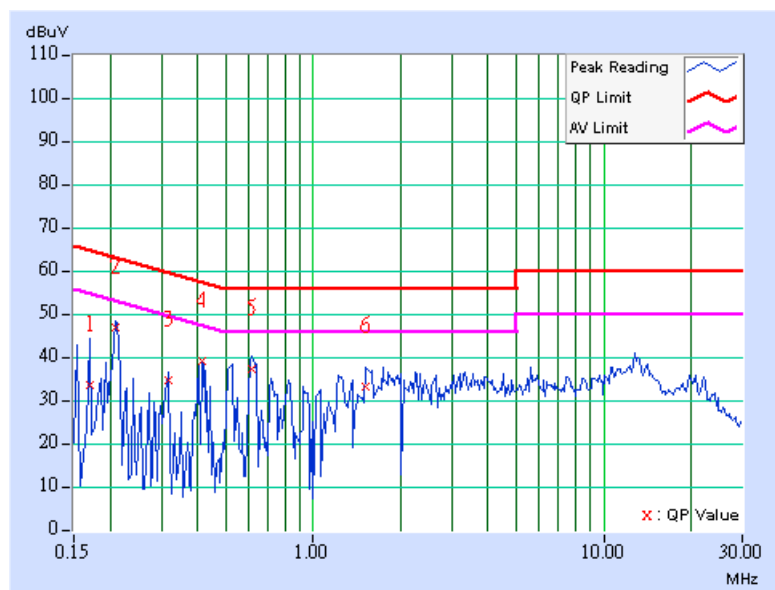




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 1
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.11	36.75	-	36.86	-	65.79
2	0.173	0.11	37.08	-	37.19	-	64.79	54.79	-27.61	-
3	0.193	0.11	39.17	-	39.28	-	63.91	53.91	-24.63	-
4	0.216	0.11	44.67	-	44.78	-	62.96	52.96	-18.18	-
5	0.416	0.11	38.33	-	38.44	-	57.54	47.54	-19.09	-
6	0.623	0.16	37.89	-	38.05	-	56.00	46.00	-17.95	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

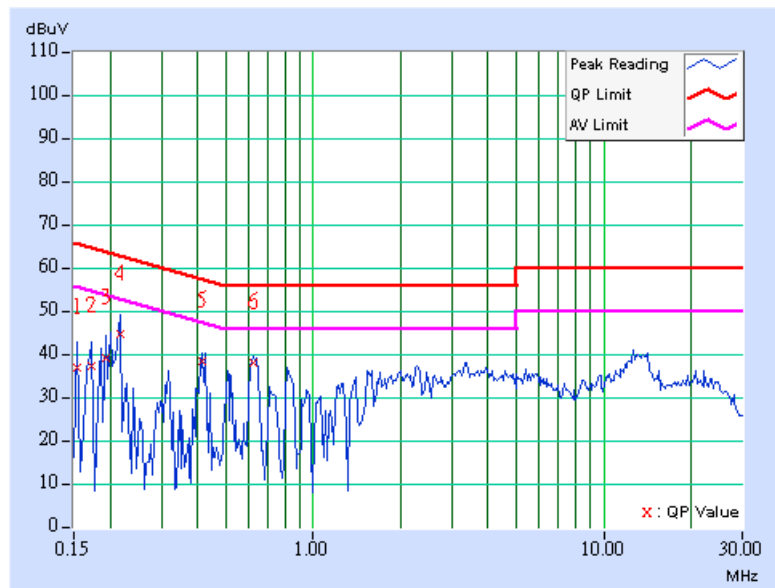




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 2
CHANNEL	Channel 11	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.181	0.11	34.23	-	34.34	-	64.43	54.43	-30.09	-
2	0.209	0.11	47.02	-	47.13	-	63.26	53.26	-16.13	-
3	0.412	0.11	38.52	-	38.63	-	57.61	47.61	-18.98	-
4	0.513	0.13	35.42	-	35.55	-	56.00	46.00	-20.45	-
5	0.611	0.16	36.61	-	36.77	-	56.00	46.00	-19.23	-
6	1.551	0.25	35.23	-	35.48	-	56.00	46.00	-20.52	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

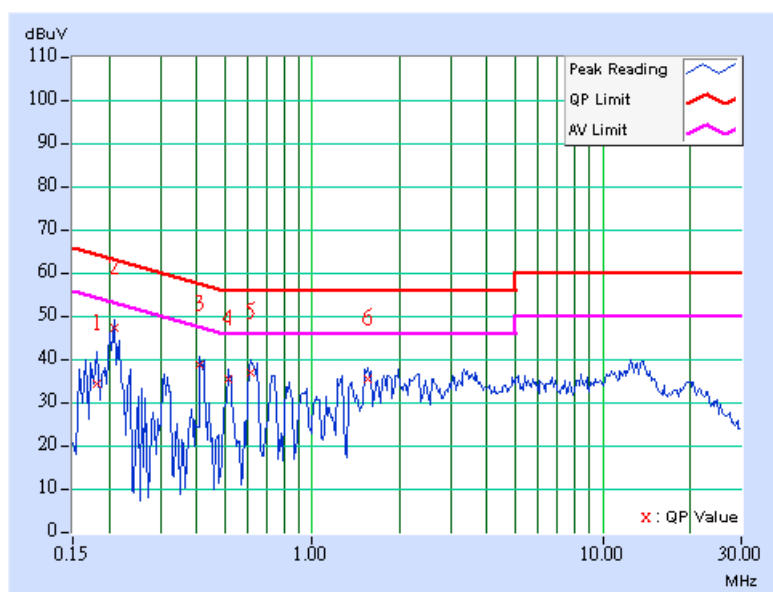



4.2 RADIATED EMISSION MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 09, 2005
Preamplifier Agilent	8449B	3008A01964	Nov. 06, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi- anechoic. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation

4.2.5 TEST SETUP

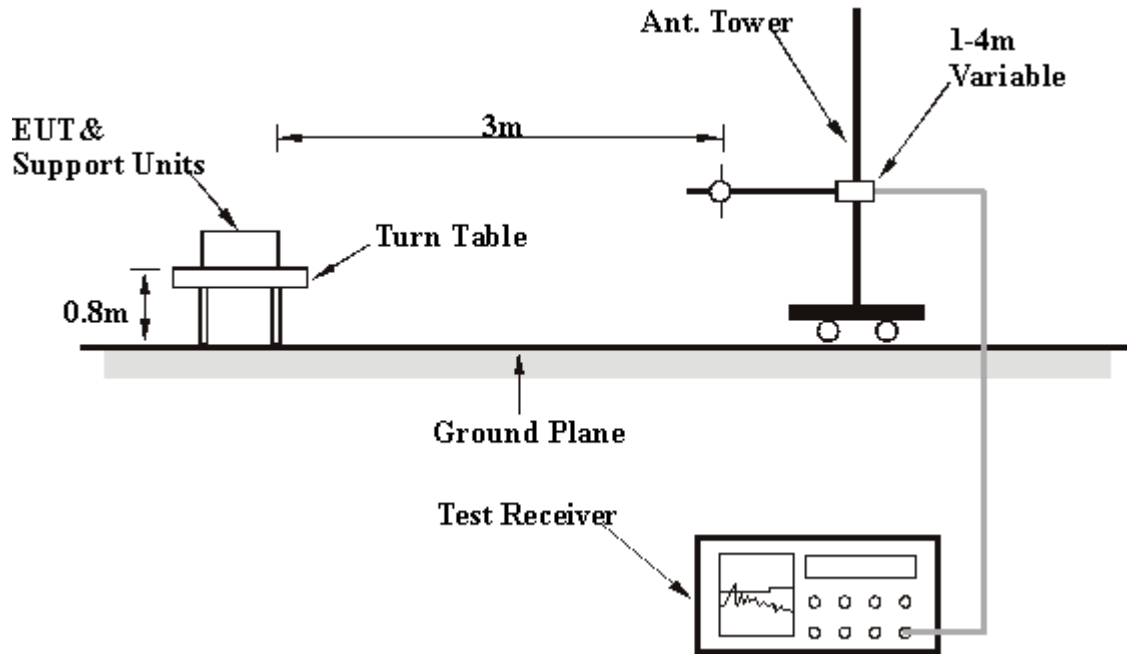

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	111.64	33.27 QP	43.50	-10.23	1.00 H	46	20.77	12.50
2	249.66	36.57 QP	46.00	-9.43	1.00 H	256	22.93	13.64
3	605.39	38.23 QP	46.00	-7.77	1.00 H	64	16.47	21.75
4	681.20	35.63 QP	46.00	-10.37	1.00 H	88	12.94	22.69
5	733.69	37.95 QP	46.00	-8.05	1.00 H	100	14.10	23.85
6	861.98	35.52 QP	46.00	-10.48	1.00 H	10	10.30	25.22

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.55	28.27 QP	40.00	-11.73	1.00 V	145	12.74	15.53
2	111.64	37.87 QP	43.50	-5.63	1.00 V	271	25.36	12.50
3	440.16	35.38 QP	46.00	-10.62	1.00 V	334	17.01	18.37
4	599.56	33.40 QP	46.00	-12.60	1.00 V	253	11.72	21.68
5	731.74	34.12 QP	46.00	-11.88	1.00 V	25	10.33	23.79
6	865.87	34.38 QP	46.00	-11.62	1.00 V	85	9.09	25.29

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

Below 1GHz Worst-Case Data

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	111.64	33.57 QP	43.50	-9.93	1.00 H	286	21.07	12.50
2	249.66	37.13 QP	46.00	-8.87	1.00 H	247	23.48	13.64
3	399.34	32.02 QP	46.00	-13.98	1.00 H	202	14.80	17.22
4	609.28	33.49 QP	46.00	-12.51	1.00 H	55	11.69	21.80
5	733.69	37.72 QP	46.00	-8.28	1.00 H	106	13.87	23.85
6	861.98	34.60 QP	46.00	-11.40	1.00 H	1	9.38	25.22

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.55	28.16 QP	40.00	-11.84	1.00 V	166	12.62	15.53
2	111.64	36.89 QP	43.50	-6.61	1.00 V	280	24.39	12.50
3	440.16	34.43 QP	46.00	-11.57	1.00 V	232	16.06	18.37
4	494.59	38.90 QP	46.00	-7.10	1.00 V	67	19.69	19.21
5	593.73	32.76 QP	46.00	-13.24	1.00 V	262	11.25	21.52
6	928.08	36.05 QP	46.00	-9.95	1.00 V	139	9.82	26.23

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value

802.11b DSSS modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2386.00	61.04 PK	74.00	-12.96	1.19 H	140	27.74	33.30
1	2386.00	50.50 AV	54.00	-3.50	1.19 H	140	17.20	33.30
2	*2412.00	111.75 PK			1.19 H	140	78.34	33.41
2	*2412.00	103.36 AV			1.19 H	140	69.95	33.41
3	4824.00	55.96 PK	74.00	-18.04	1.05 H	187	16.17	39.79
3	4824.00	41.01 AV	54.00	-12.99	1.05 H	187	1.22	39.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	58.97 PK	74.00	-15.03	1.05 V	175	25.65	33.32
1	2390.00	47.79 AV	54.00	-6.21	1.05 V	175	14.47	33.32
2	*2412.00	104.61 PK			1.05 V	175	71.20	33.41
2	*2412.00	95.95 AV			1.05 V	175	62.54	33.41
3	4824.00	49.38 PK	74.00	-24.62	1.62 V	131	9.59	39.79
3	4824.00	35.29 AV	54.00	-18.71	1.62 V	131	-4.50	39.79

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. " * " : Fundamental frequency

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	112.31 PK			1.20 H	141	78.79	33.52
1	*2437.00	103.62 AV			1.20 H	141	70.10	33.52
2	4874.00	60.56 PK	74.00	-13.44	1.16 H	183	20.63	39.93
2	4874.00	46.21 AV	54.00	-7.79	1.16 H	183	6.28	39.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.12 PK			1.19 V	169	70.60	33.52
1	*2437.00	95.61 AV			1.19 V	169	62.09	33.52
2	4874.00	51.20 PK	74.00	-22.80	1.40 V	247	11.27	39.93
2	4874.00	36.50 AV	54.00	-17.50	1.40 V	247	-3.43	39.93

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	CCK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	11Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	110.73 PK			1.17 H	141	77.10	33.63
1	*2462.00	101.98 AV			1.17 H	141	68.35	33.63
2	2483.50	58.66 PK	74.00	-15.34	1.17 H	141	24.94	33.72
2	2483.50	47.66 AV	54.00	-6.34	1.17 H	141	13.94	33.72
3	4924.00	60.89 PK	74.00	-13.11	1.00 H	182	20.81	40.08
3	4924.00	46.88 AV	54.00	-7.12	1.00 H	182	6.80	40.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	102.75 PK			1.36 V	164	69.12	33.63
1	*2462.00	94.16 AV			1.36 V	164	60.53	33.63
2	2483.50	58.32 PK	74.00	-15.68	1.36 V	164	24.60	33.72
2	2483.50	46.54 AV	54.00	-7.46	1.36 V	164	12.82	33.72
3	4924.00	55.26 PK	74.00	-18.74	1.05 V	158	15.18	40.08
3	4924.00	40.52 AV	54.00	-13.48	1.05 V	158	0.44	40.08

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

802.11g OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	69.25 PK	74.00	-4.75	1.20 H	139	35.93	33.32
1	2390.00	51.80 AV	54.00	-2.20	1.20 H	139	18.48	33.32
2	*2412.00	108.17 PK			1.20 H	139	74.76	33.41
2	*2412.00	98.00 AV			1.20 H	139	64.59	33.41
3	4824.00	51.99 PK	74.00	-22.01	1.03 H	183	12.20	39.79
3	4824.00	38.29 AV	54.00	-15.71	1.03 H	183	-1.50	39.79

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	65.15 PK	74.00	-8.85	1.00 V	141	31.83	33.32
1	2390.00	47.89 AV	54.00	-6.11	1.00 V	141	14.57	33.32
2	*2412.00	102.78 PK			1.00 V	141	69.37	33.41
2	*2412.00	91.58 AV			1.00 V	141	58.17	33.41
3	4824.00	47.49 PK	74.00	-26.51	1.00 V	167	7.70	39.79
3	4824.00	34.05 AV	54.00	-19.95	1.00 V	167	-5.74	39.79

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency



EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	110.54 PK			1.19 H	139	77.02	33.52
1	*2437.00	99.57 AV			1.19 H	139	66.05	33.52
2	4874.00	59.28 PK	74.00	-14.72	1.03 H	183	19.35	39.93
2	4874.00	43.62 AV	54.00	-10.38	1.03 H	183	3.69	39.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2437.00	104.37 PK			1.00 V	138	70.85	33.52
1	*2437.00	93.19 AV			1.00 V	138	59.67	33.52
2	4874.00	51.29 PK	74.00	-22.71	1.08 V	128	11.36	39.93
2	4874.00	37.42 AV	54.00	-16.58	1.08 V	128	-2.51	39.93

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 11	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	107.32 PK			1.18 H	142	73.69	33.63
1	*2462.00	96.08 AV			1.18 H	142	62.45	33.63
2	2483.50	68.57 PK	74.00	-5.43	1.18 H	142	34.85	33.72
2	2483.50	50.38 AV	54.00	-3.62	1.18 H	142	16.66	33.72
3	4924.00	54.72 PK	74.00	-19.28	1.14 H	181	14.64	40.08
3	4924.00	41.62 AV	54.00	-12.38	1.14 H	181	1.54	40.08

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*2462.00	99.60 PK			1.00 V	154	65.97	33.63
1	*2462.00	88.53 AV			1.00 V	154	54.90	33.63
2	2483.50	62.75 PK	74.00	-11.25	1.00 V	154	29.03	33.72
2	2483.50	47.42 AV	54.00	-6.58	1.00 V	154	13.70	33.72
3	4924.00	50.30 PK	74.00	-23.70	1.06 V	161	10.22	40.08
3	4924.00	37.53 AV	54.00	-16.47	1.06 V	161	-2.55	40.08

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. The limit value is defined as per 15.247
 6. “ * “ : Fundamental frequency

802.11g Turbo OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 25GHz
CHANNEL	Channel 6	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 70%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Jamison Chan		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	64.57 PK	74.00	-9.43	1.18 H	136	31.25	33.32
1	2390.00	50.93 AV	54.00	-3.07	1.18 H	136	17.61	33.32
2	*2437.00	106.17 PK			1.18 H	136	72.65	33.52
2	*2437.00	95.40 AV			1.18 H	136	61.88	33.52
3	2483.50	63.25 PK	74.00	-10.75	1.18 H	136	29.53	33.72
3	2483.50	48.57 AV	54.00	-5.43	1.18 H	136	14.85	33.72
4	4874.00	54.28 PK	74.00	-19.72	1.03 H	182	14.35	39.93
4	4874.00	40.26 AV	54.00	-13.74	1.03 H	182	0.33	39.93

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	2390.00	61.68 PK	74.00	-12.32	1.00 V	164	28.36	33.32
1	2390.00	48.16 AV	54.00	-5.84	1.00 V	164	14.84	33.32
2	*2437.00	98.48 PK			1.00 V	164	64.96	33.52
2	*2437.00	87.77 AV			1.00 V	164	54.25	33.52
3	2483.50	58.22 PK	74.00	-15.78	1.39 V	179	24.50	33.72
3	2483.50	46.61 AV	54.00	-7.39	1.39 V	179	12.89	33.72
4	4874.00	47.36 PK	74.00	-26.64	1.00 V	240	7.43	39.93
4	4874.00	33.83 AV	54.00	-20.17	1.00 V	240	-6.10	39.93

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
SPECTRUM ANALYZER	FSEK 30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP

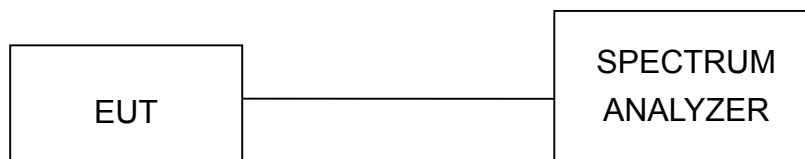

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS


802.11b DSSS modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	11.68	0.5	PASS
6	2437	12.48	0.5	PASS
11	2462	11.44	0.5	PASS



CH 1

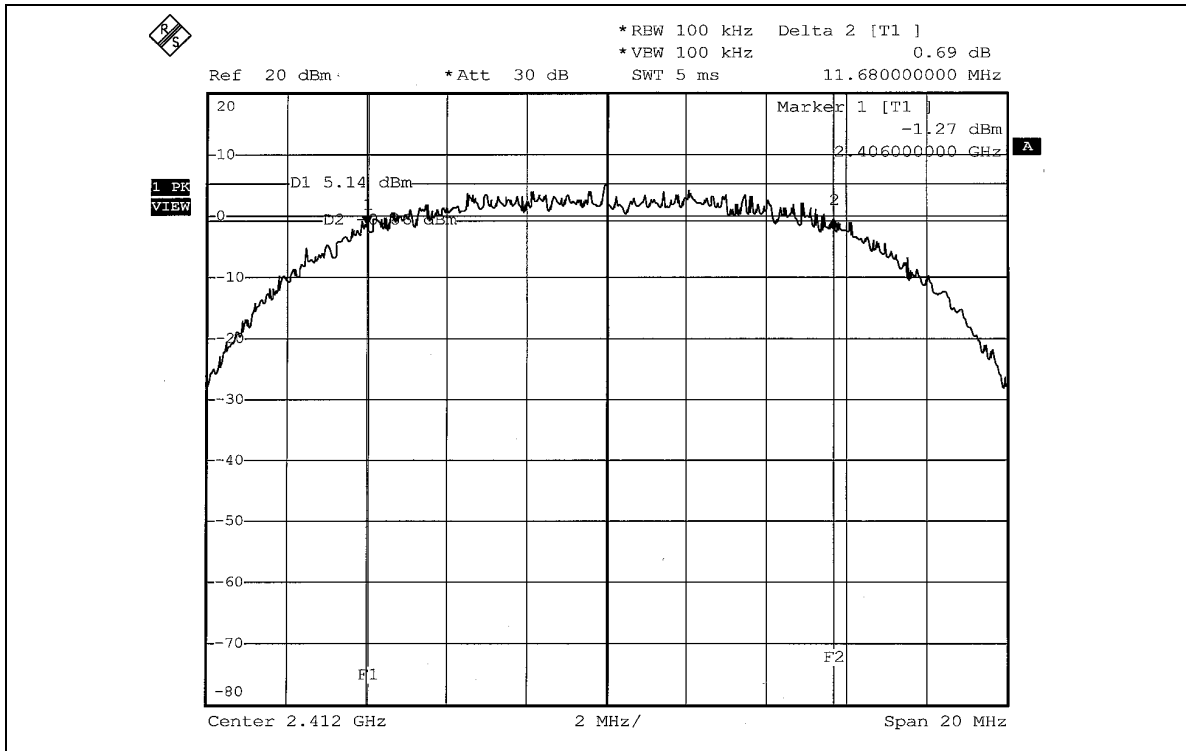


CH 6

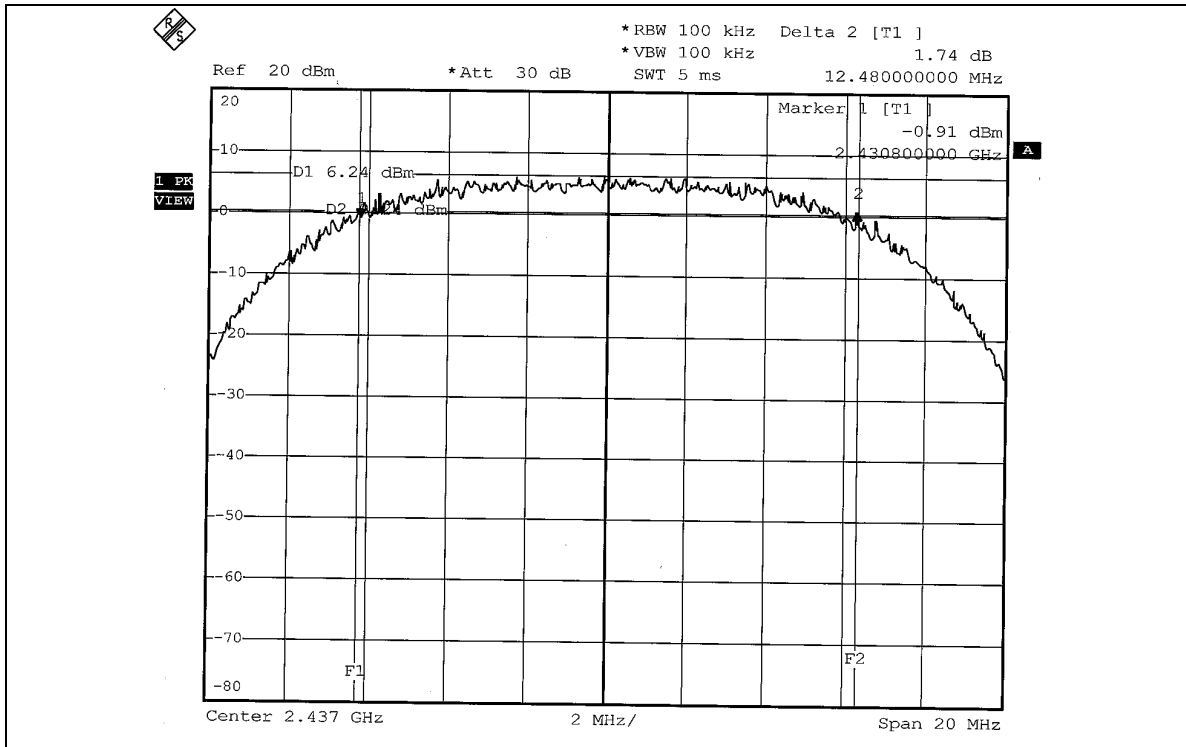



CH 11

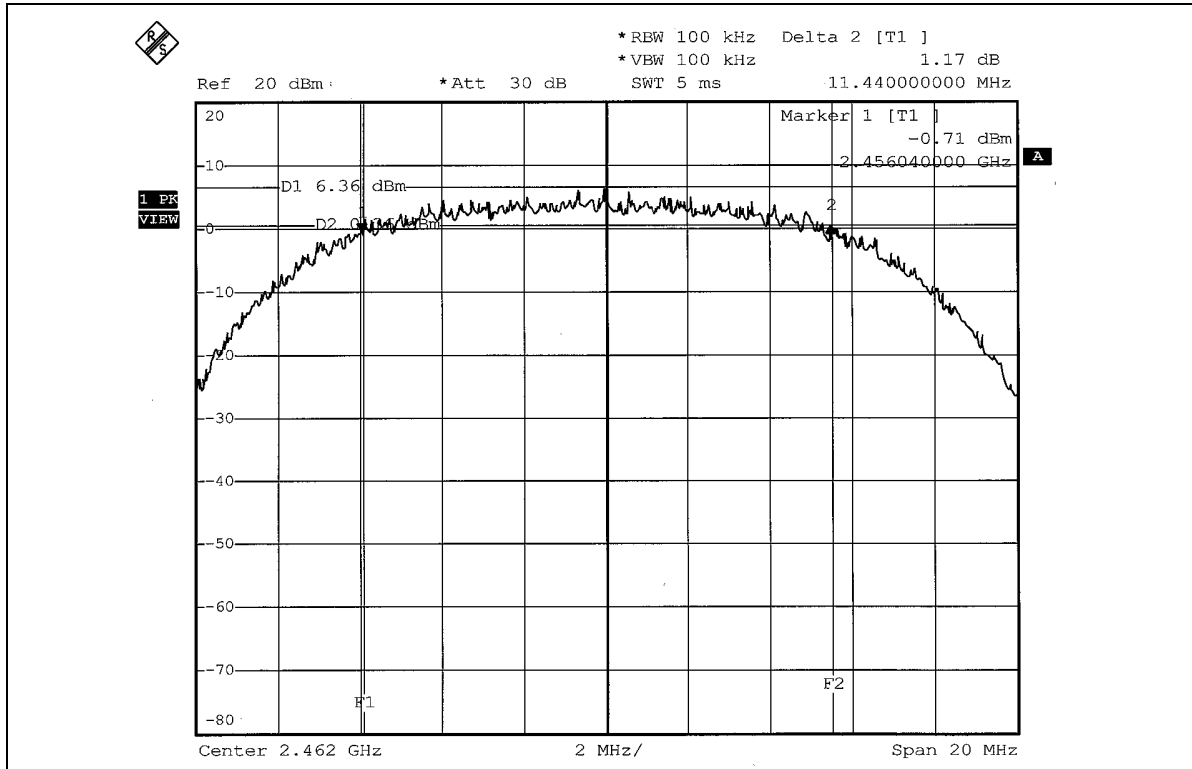




802.11g OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	2412	16.40	0.5	PASS
6	2437	16.40	0.5	PASS
11	2462	16.40	0.5	PASS



CH 1

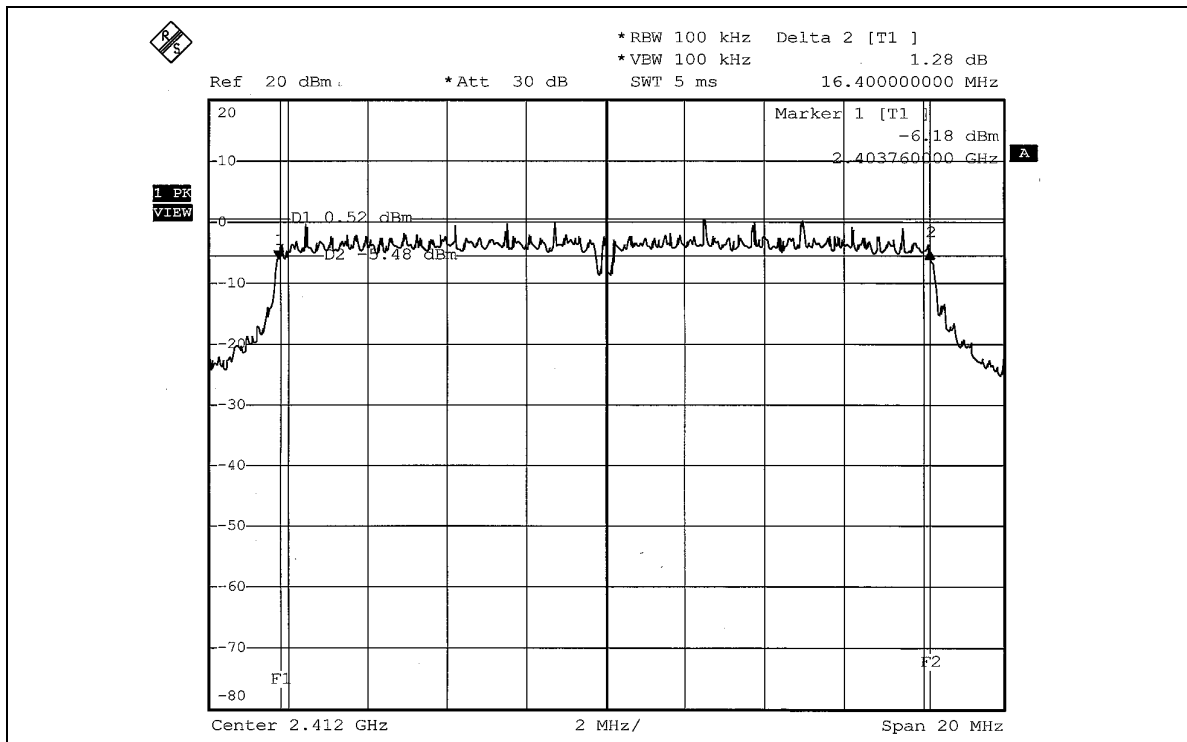


CH 6

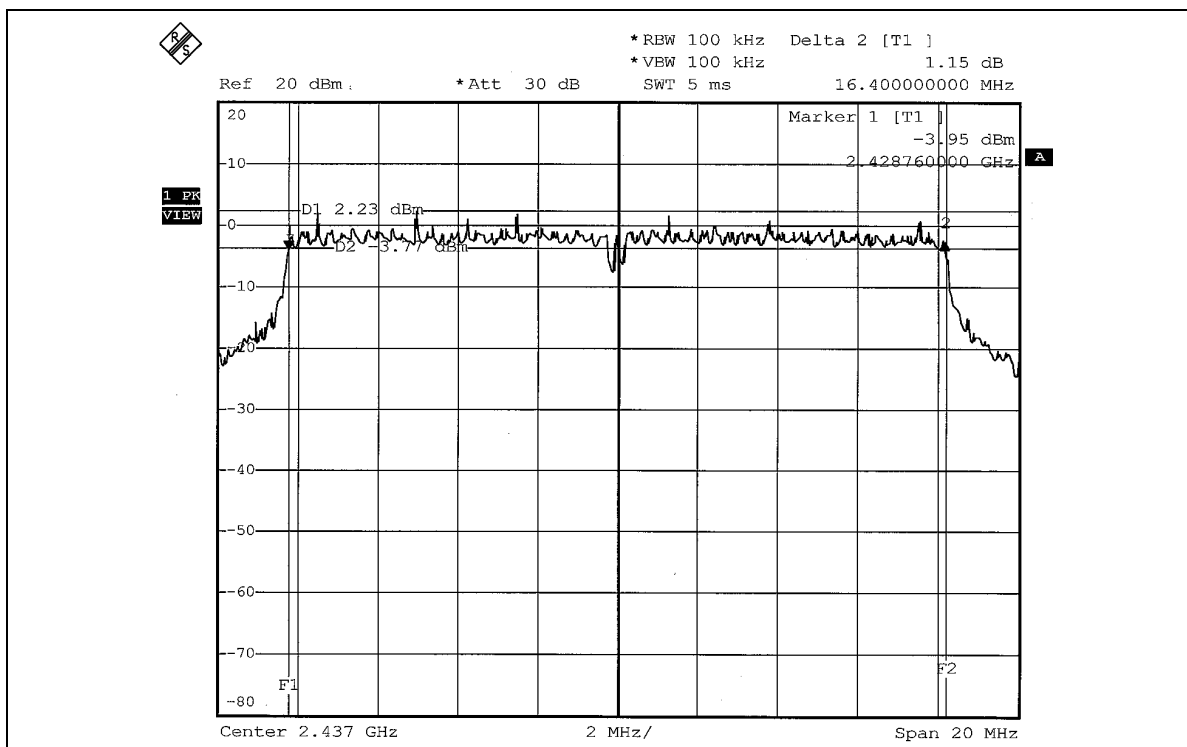



CH 11

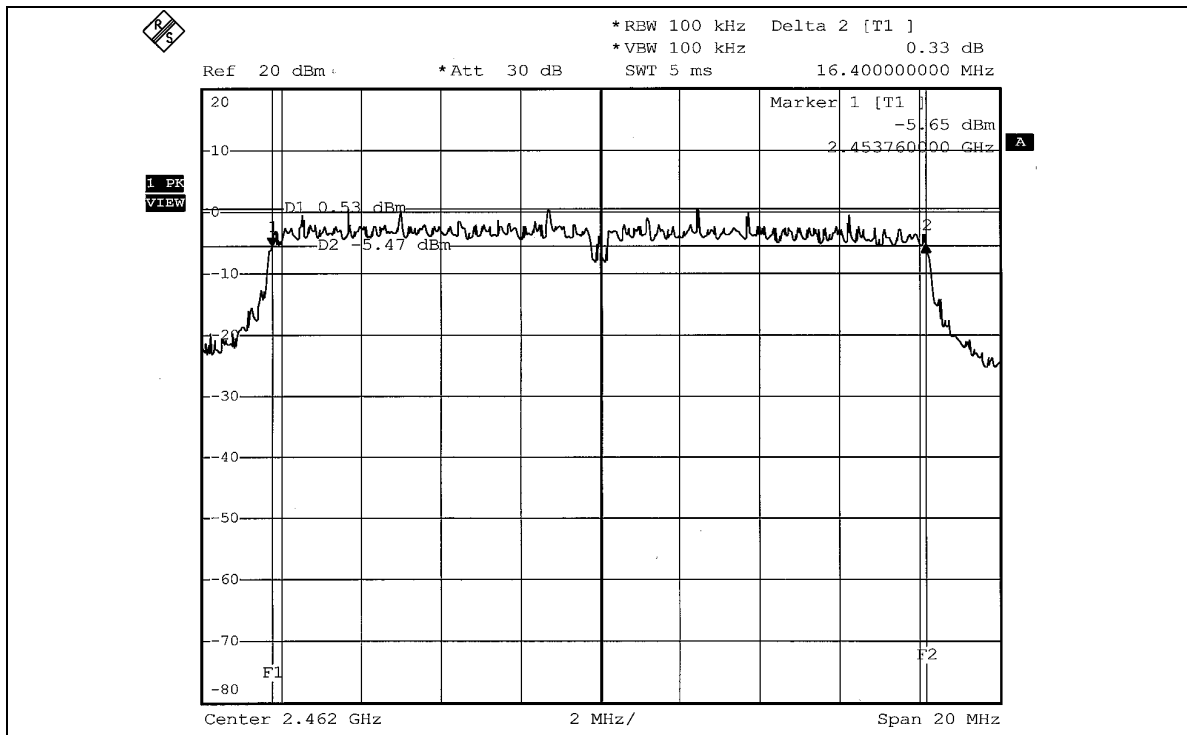




802.11g Turbo OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	6 dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
6	2437	32.64	0.5	PASS



CH 6

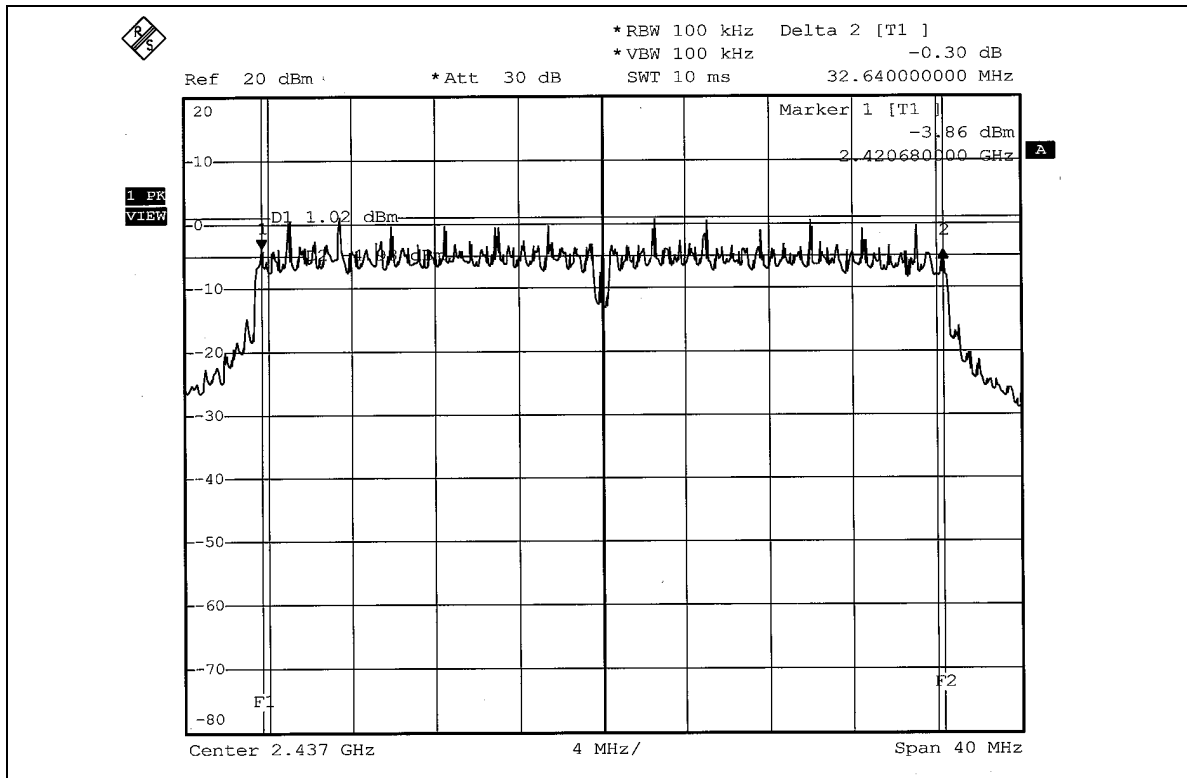



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.1 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator. The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

4.4.2 DEVIATION FROM TEST STANDARD

No deviation

4.4.3 TEST SETUP



4.4.4 EUT OPERATING CONDITIONS

Same as Item 4.3.6



4.4.3 TEST RESULTS

802.11b DSSS modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	50.699	17.05	30	PASS
6	2437	60.256	17.80	30	PASS
11	2462	51.523	17.12	30	PASS

802.11g OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	41.687	16.20	30	PASS
6	2437	56.234	17.50	30	PASS
11	2462	39.902	16.01	30	PASS



802.11g Turbo OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
6	2437	44.668	16.50	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded. The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6



4.5.7 TEST RESULTS


802.11b DSSS modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	CCK	TRANSFER RATE	11Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-4.87	8	PASS
6	2437	-2.76	8	PASS
11	2462	-3.41	8	PASS



CH 1

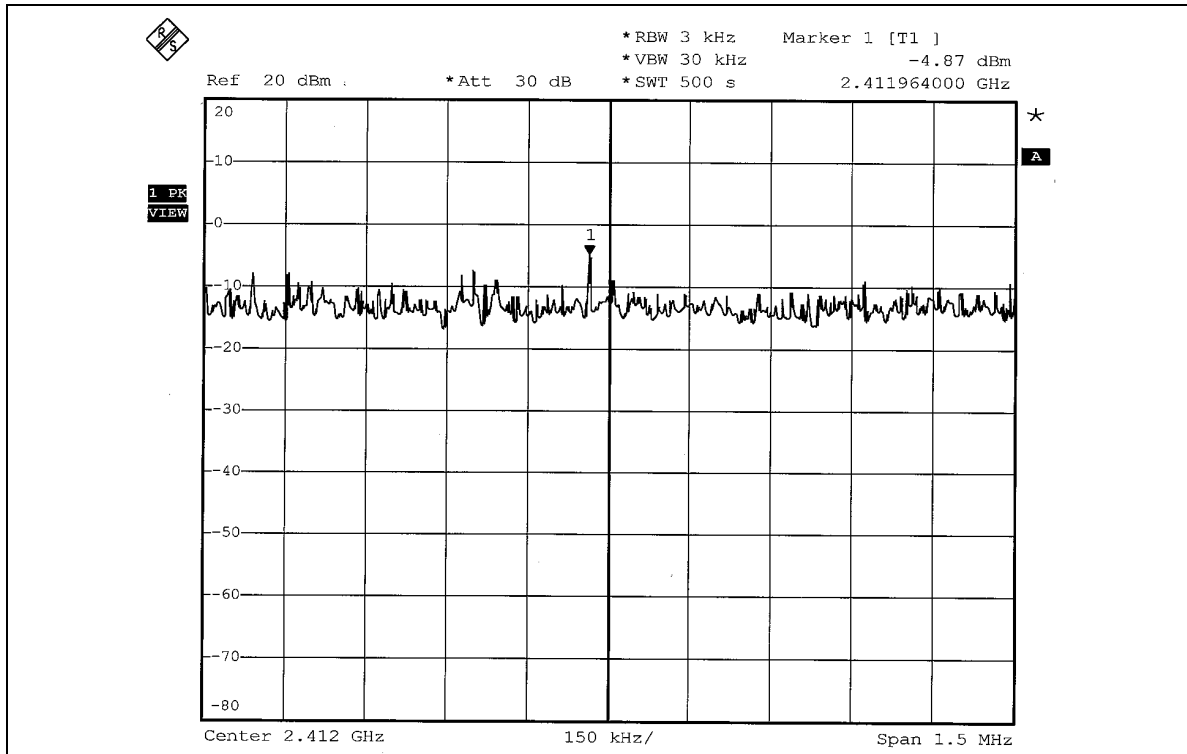


CH 6

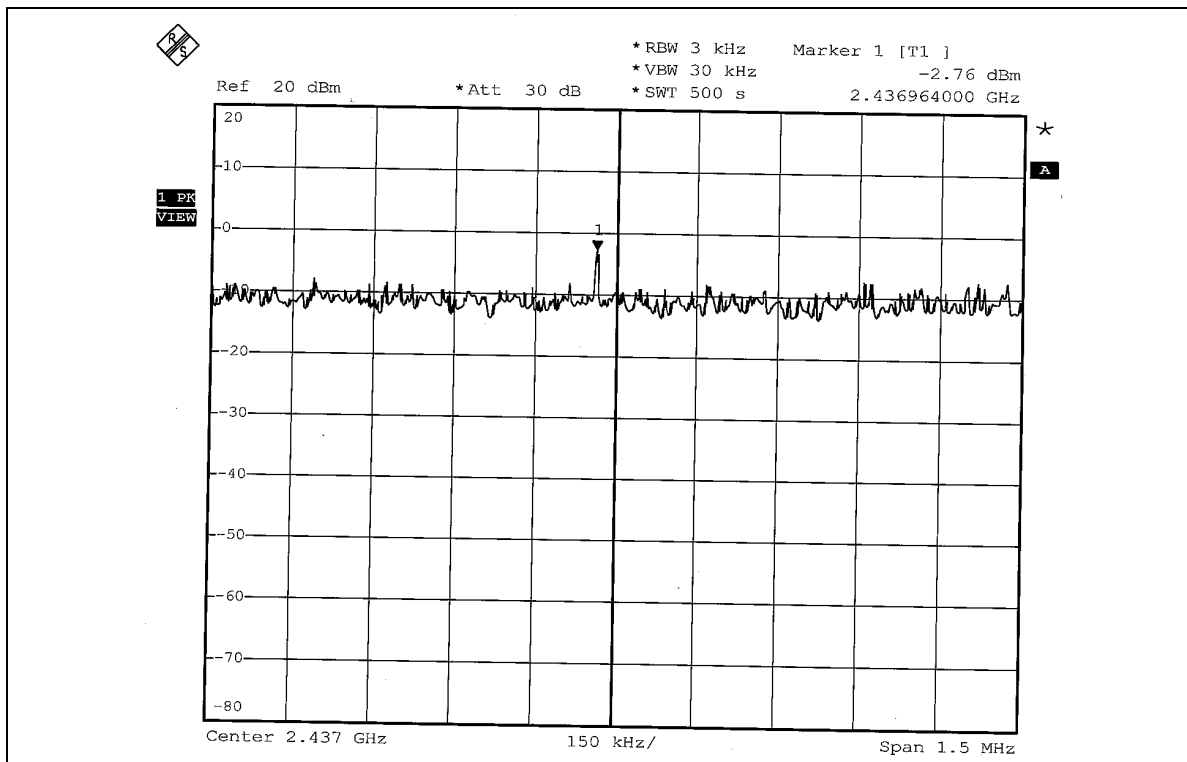



CH 11

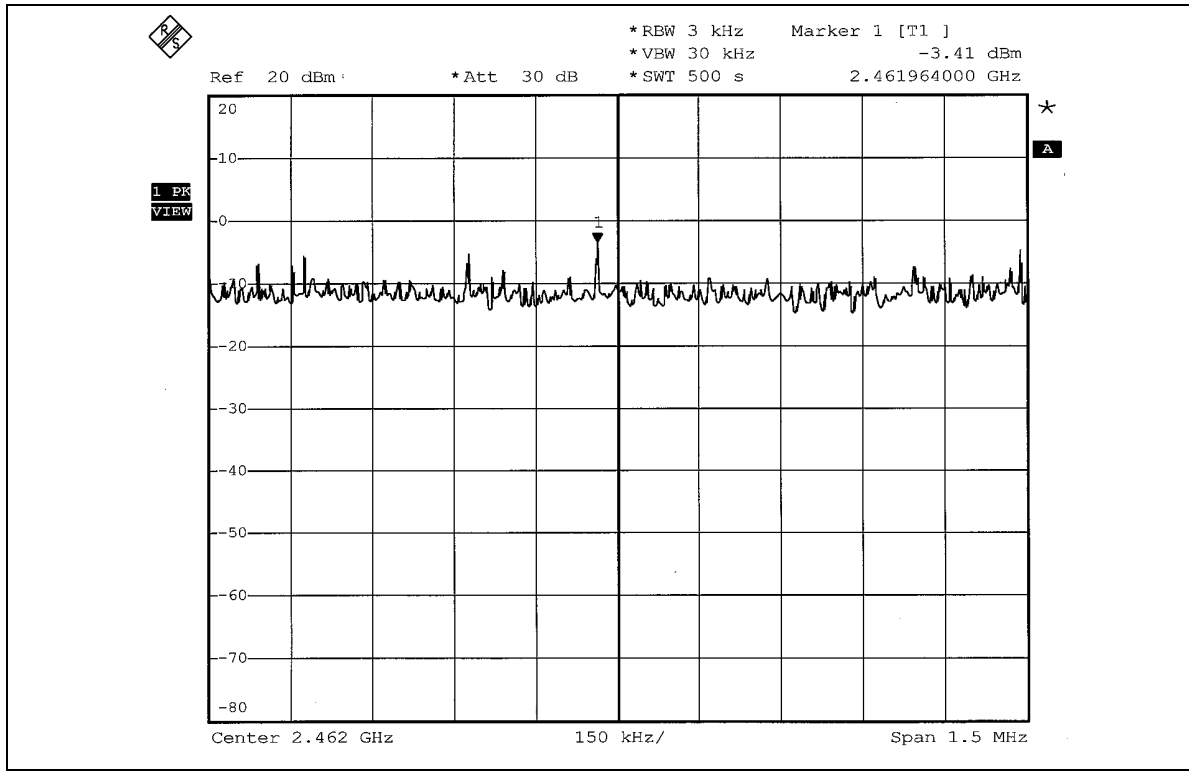


**802.11g OFDM modulation**

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-6.96	8	PASS
6	2437	-5.14	8	PASS
11	2462	-7.03	8	PASS



CH 1

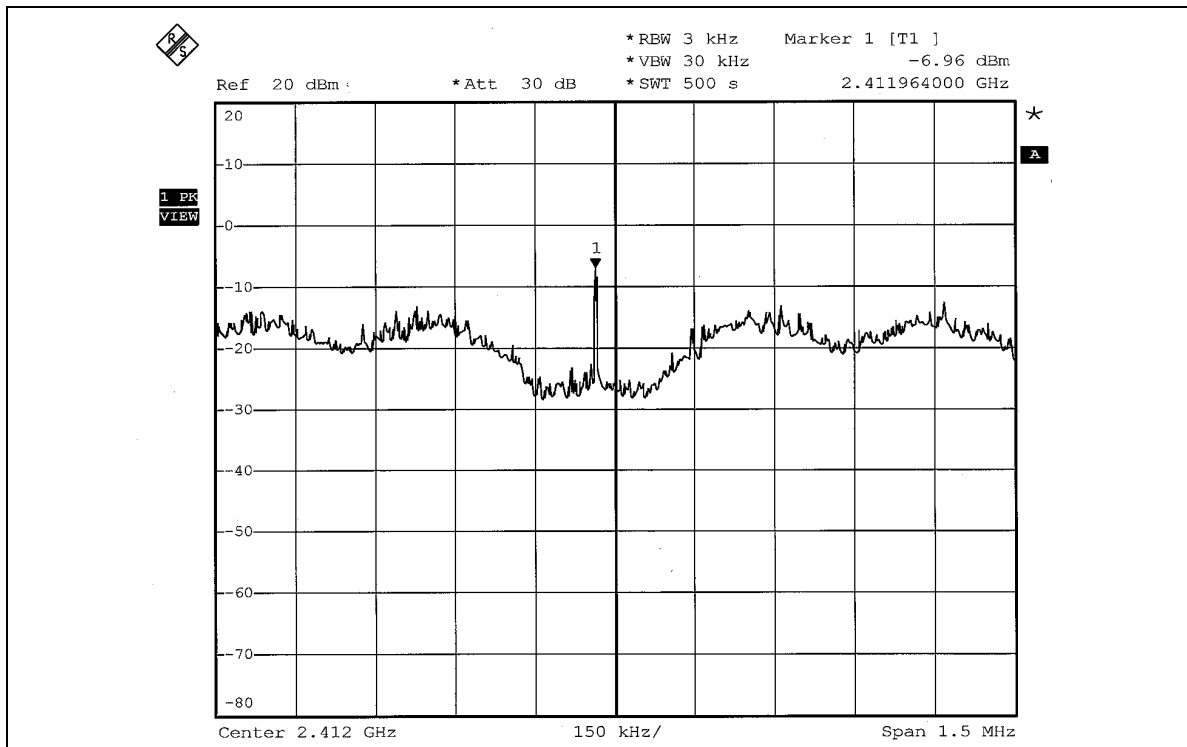


CH 6

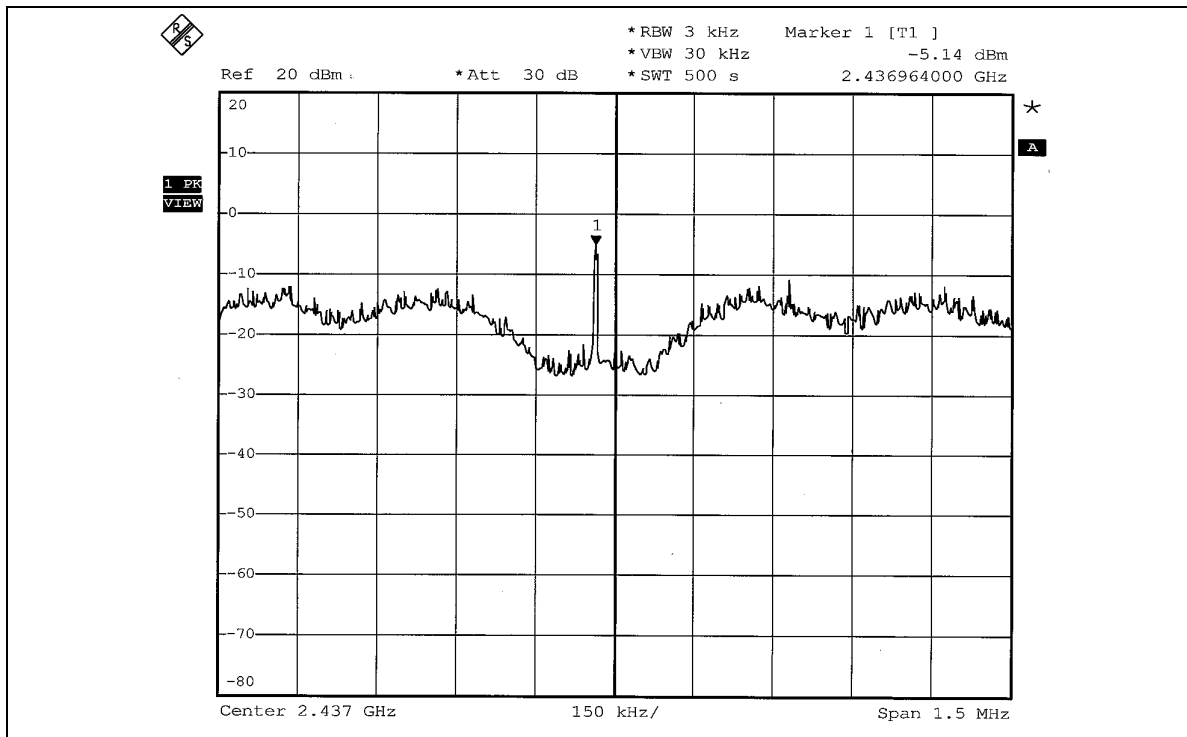



CH 11

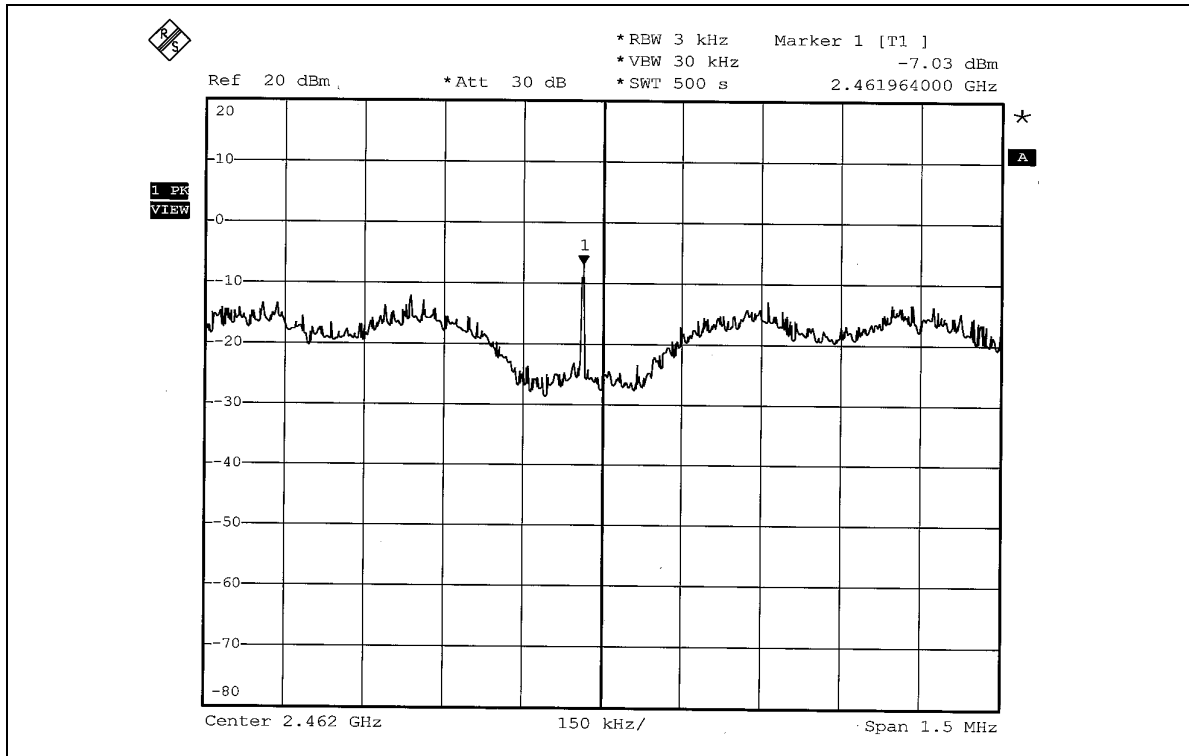




802.11g Turbo OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
6	2437	-7.19	8	PASS



CH 6

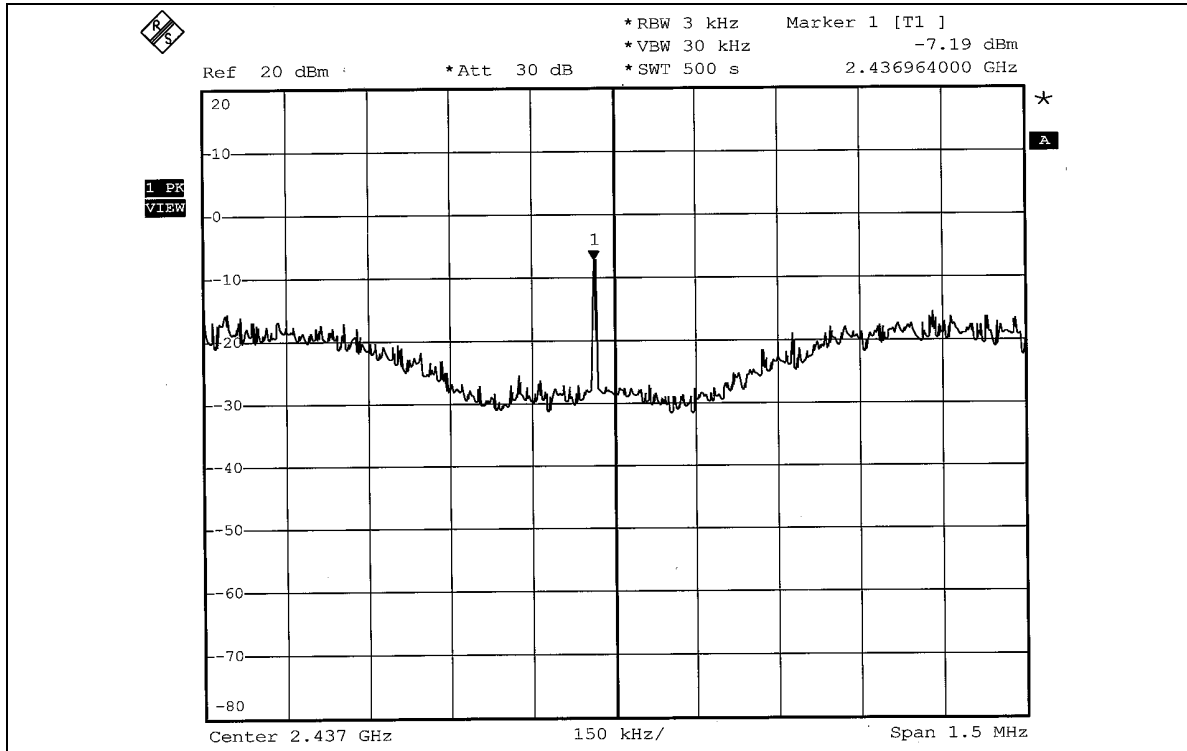



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW=VBW=100kHz ; Average RBW=1MHz, VBW=10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 18 images. D2 line indicates the highest level, and D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS modulation

NOTE 1: The band edge emission plot on page 68 shows 53.02dBc between carrier maximum power and local maximum band (2.3879GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 111.75dBuV/m (Peak), so the maximum field strength in restrict band is $111.75 - 53.02 = 58.73$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of on page 68 shows 54.95dBc between carrier maximum power and local maximum emission in restrict band (2.3863GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 103.36dBuV/m (Average), so the maximum field strength in restrict band is $103.36 - 54.95 = 48.41$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on page 69 shows 51.73dBc between carrier maximum power and local maximum emission in restrict band (2.4870GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 110.73dBuV/m (Peak), so the maximum field strength in restrict band is $110.73 - 51.73 = 59.00$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 70 shows 56.20dBc between carrier maximum power and local maximum emission in restrict band (2.4874GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 101.98dBuV/m (Average), so the maximum field strength in restrict band is $101.98 - 56.20 = 45.78$ dBuV/m which is under 54dBuV/m limit.

802.11g OFDM modulation

NOTE 1: The band edge emission plot on page 71 shows 46.10dBc between carrier maximum power and local maximum emission in restrict band (2.3874GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 108.17dBuV/m (Peak), so the maximum field strength in restrict band is $108.17 - 46.10 = 62.07$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot of on page 71 shows 48.94dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.2.7 is 98.00dBuV/m (Average), so the maximum field strength in restrict band is $98.00 - 48.94 = 49.06$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot on page 72 shows 46.05dBc between carrier maximum power and local maximum emission in restrict band (2.4841GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 107.32dBuV/m (Peak), so the maximum field strength in restrict band is $107.32 - 46.05 = 61.27$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on page 73 shows 49.61dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.2.7 is 96.08dBuV/m (Average), so the maximum field strength in restrict band is $96.08 - 49.61 = 46.47$ dBuV/m which is under 54dBuV/m limit.

802.11g Turbo OFDM modulation

NOTE 1: The band edge emission plot on page 74 shows 47.87dBc between carrier maximum power and local maximum emission in restrict band (2.3792GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 106.17dBuV/m (Peak), so the maximum field strength in restrict band is $106.17 - 47.87 = 58.30$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot of on page 74 shows 49.60dBc between carrier maximum power and local maximum emission in restrict band (2.3900GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 95.40dBuV/m (Average), so the maximum field strength in restrict band is $95.40 - 49.60 = 45.80$ dBuV/m which is under 54dBuV/m limit.



NOTE 2: The band edge emission plot on page 75 shows 49.79dBc between carrier maximum power and local maximum emission in restrict band (2.4911GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 106.17dBuV/m (Peak), so the maximum field strength in restrict band is $106.17 - 49.79 = 56.38$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on page 76 shows 49.57dBc between carrier maximum power and local maximum emission in restrict band (2.4835GHz). The emission of carrier strength list in the test result of channel 6 at the item 4.2.7 is 95.40dBuV/m (Average), so the maximum field strength in restrict band is $95.40 - 49.57 = 45.83$ dBuV/m which is under 54dBuV/m limit.



802.11b DSSS modulation

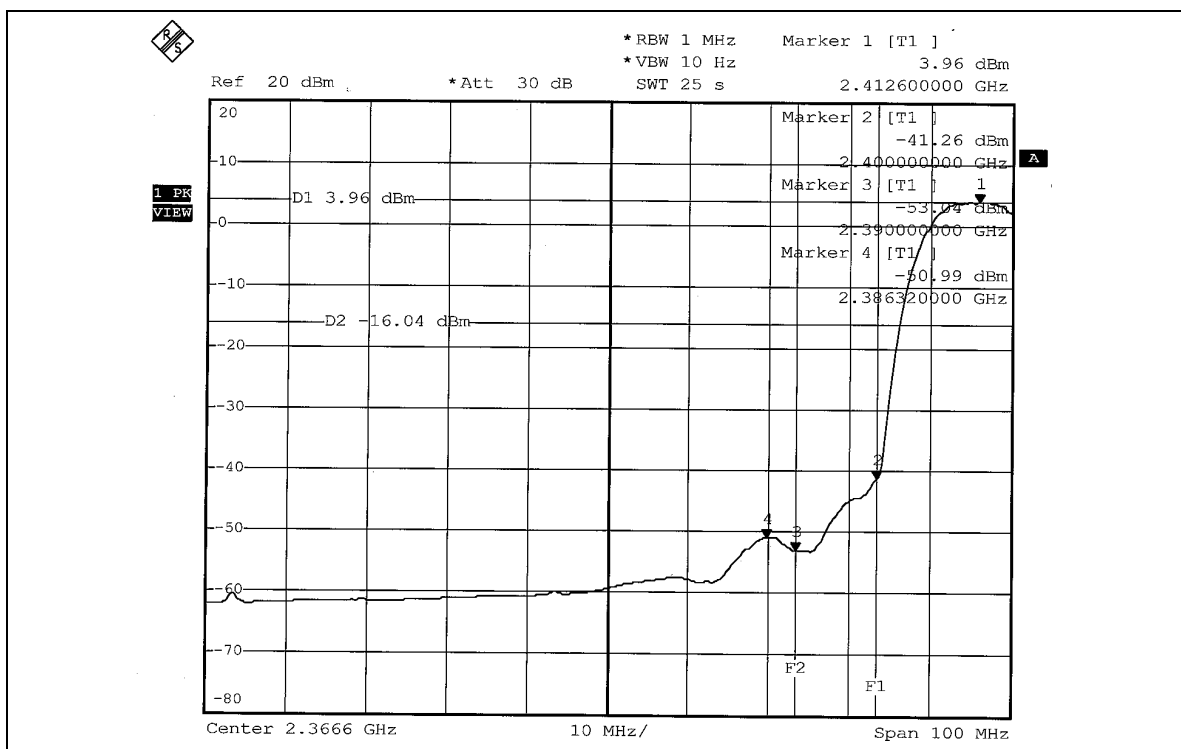
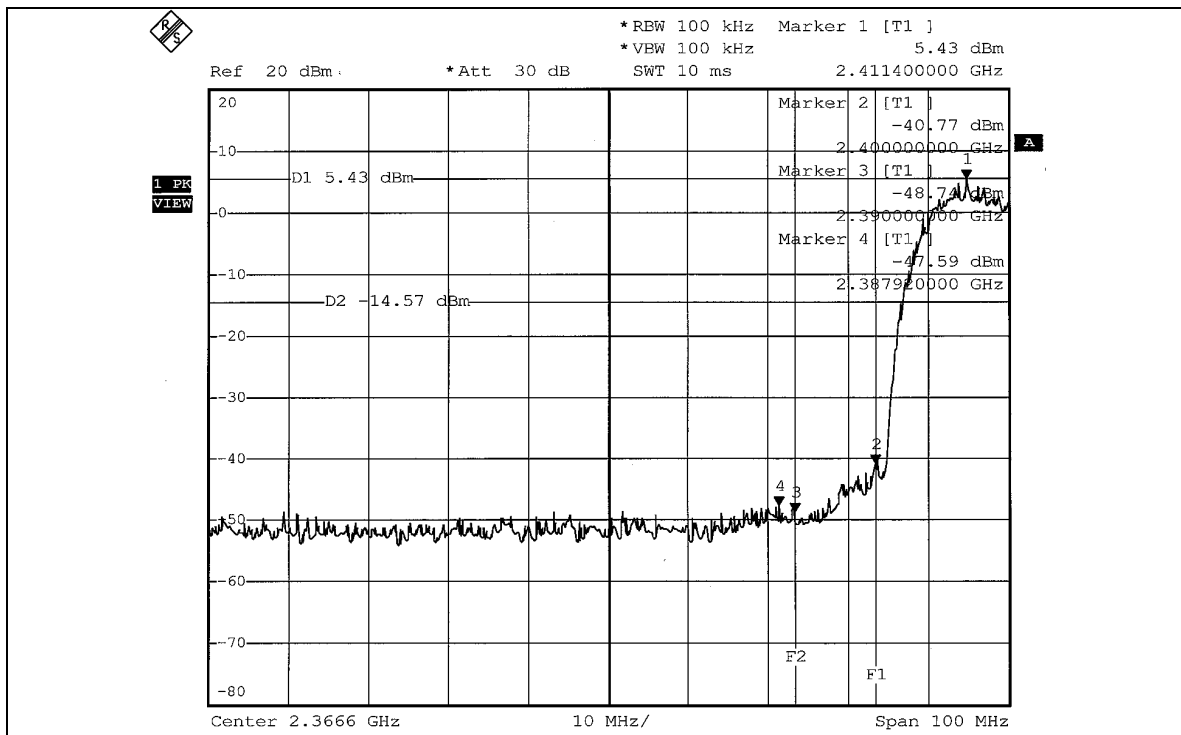


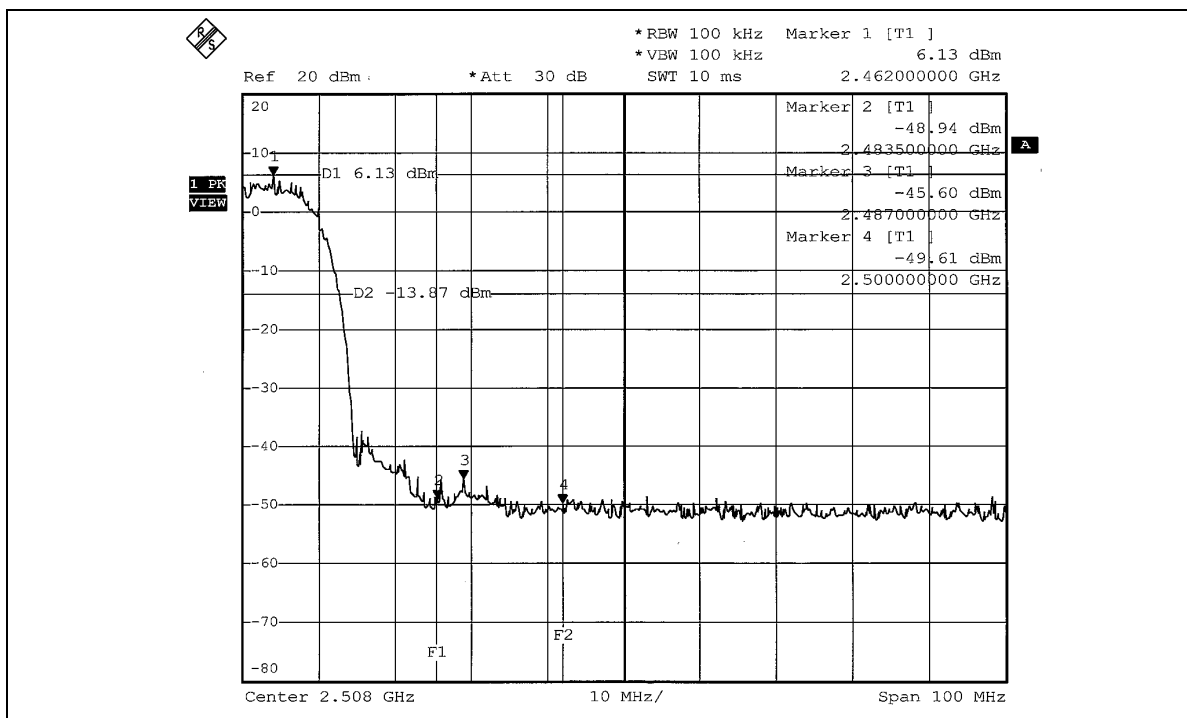
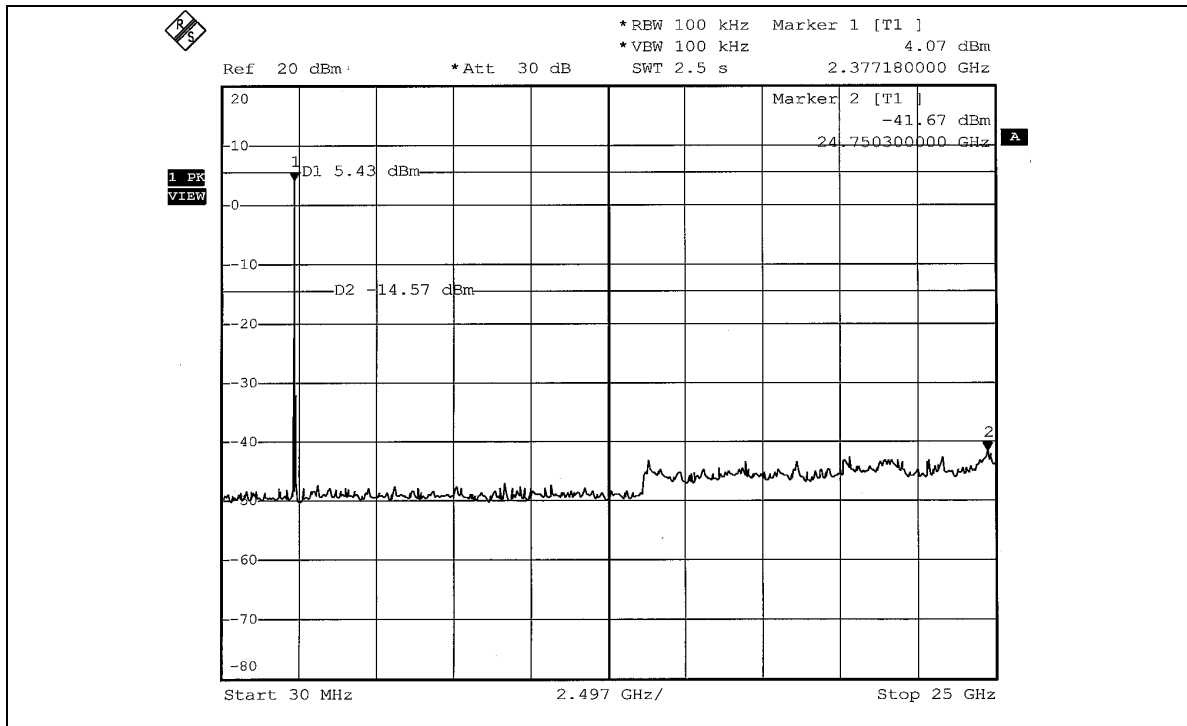


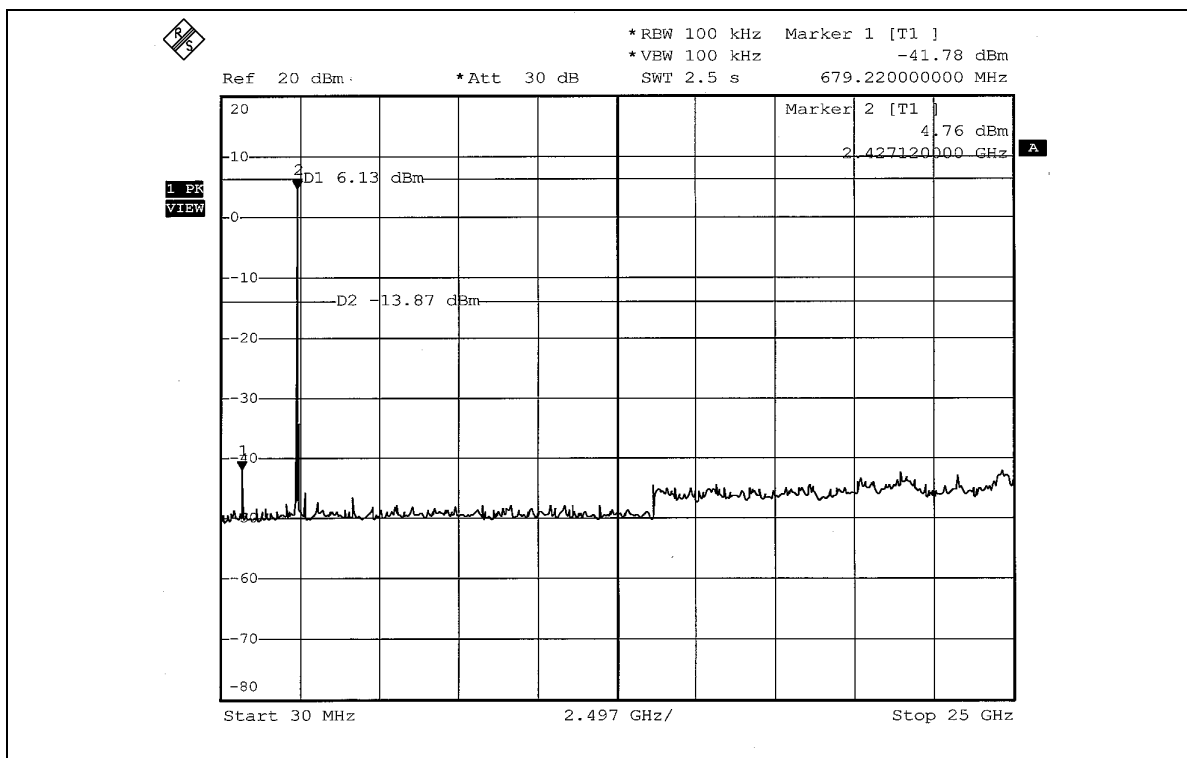
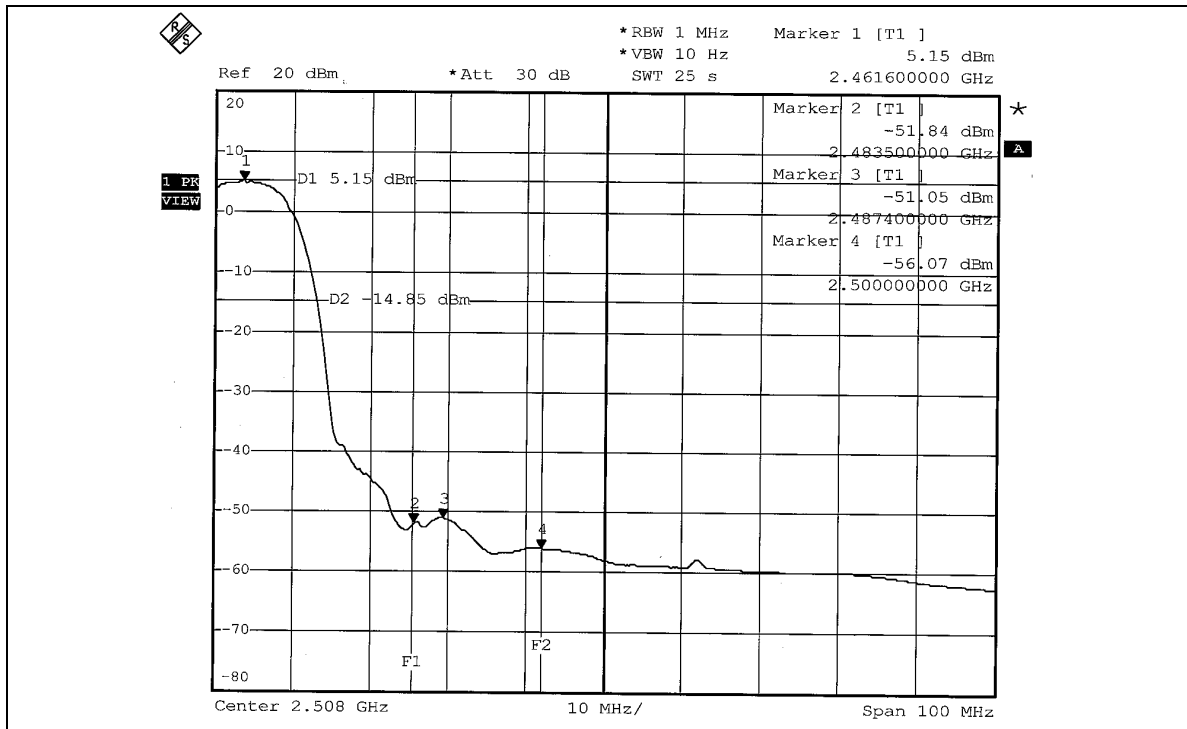




802.11g OFDM modulation

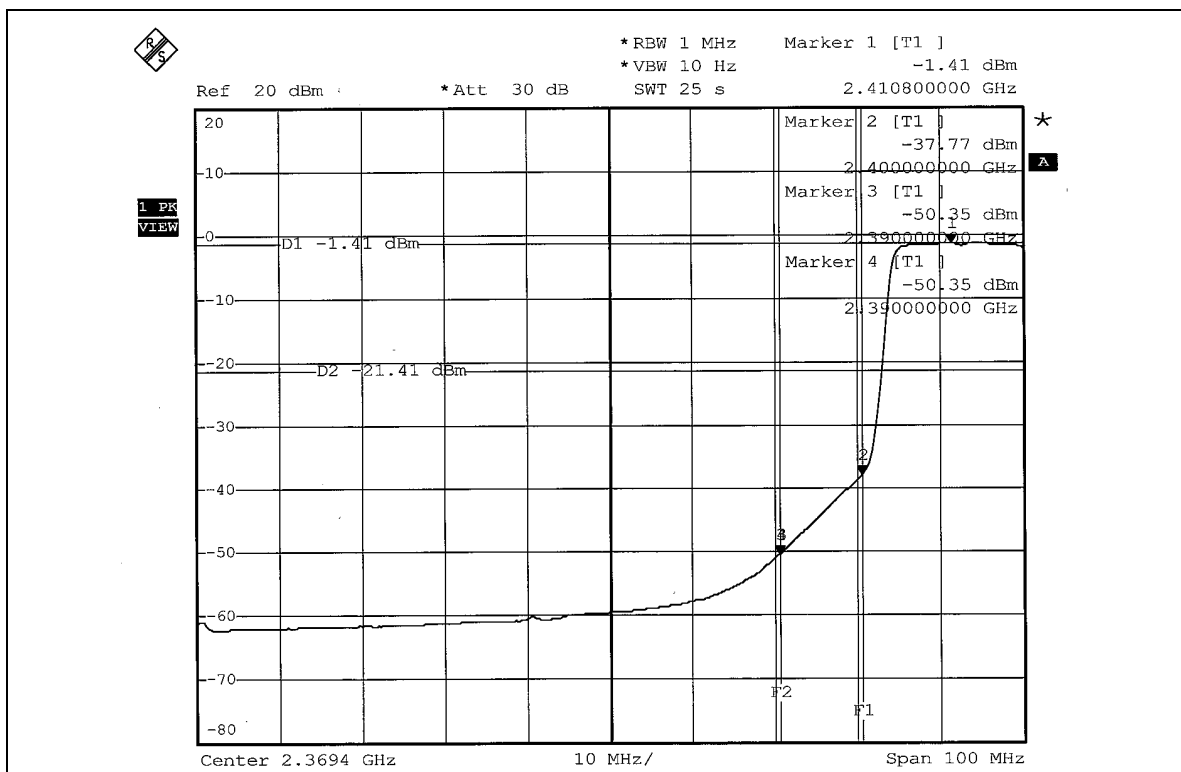
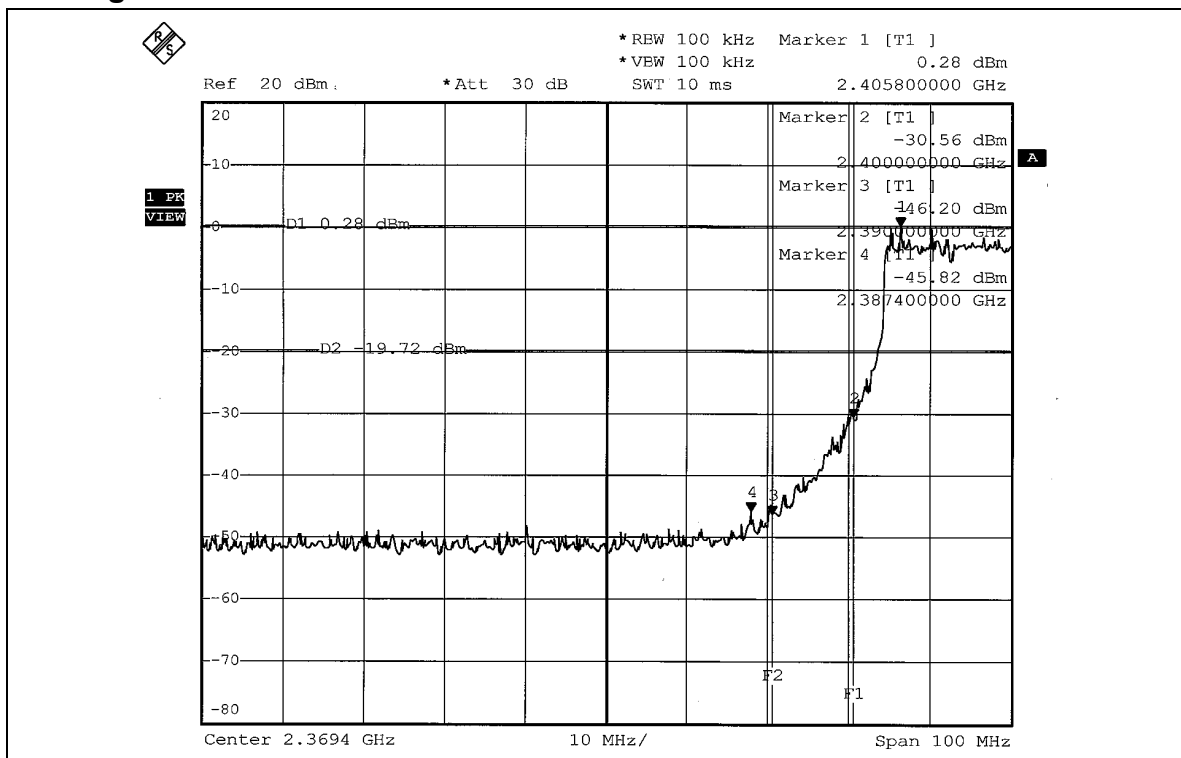


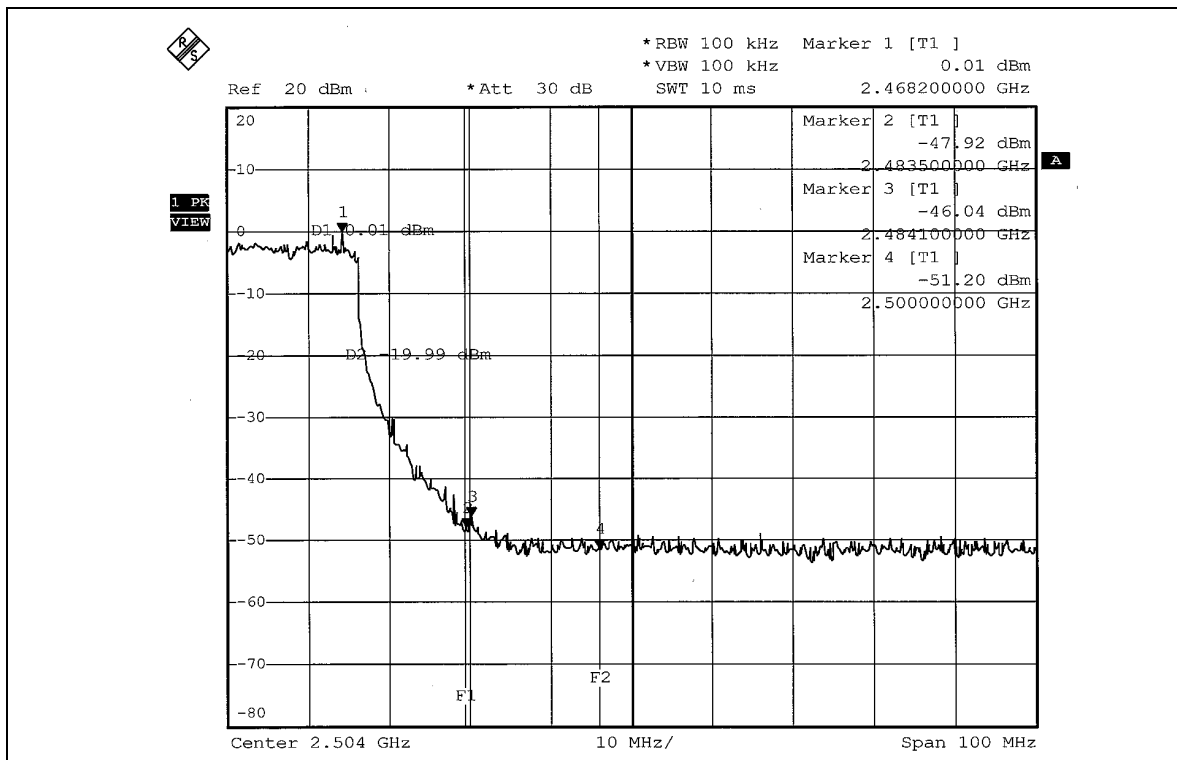
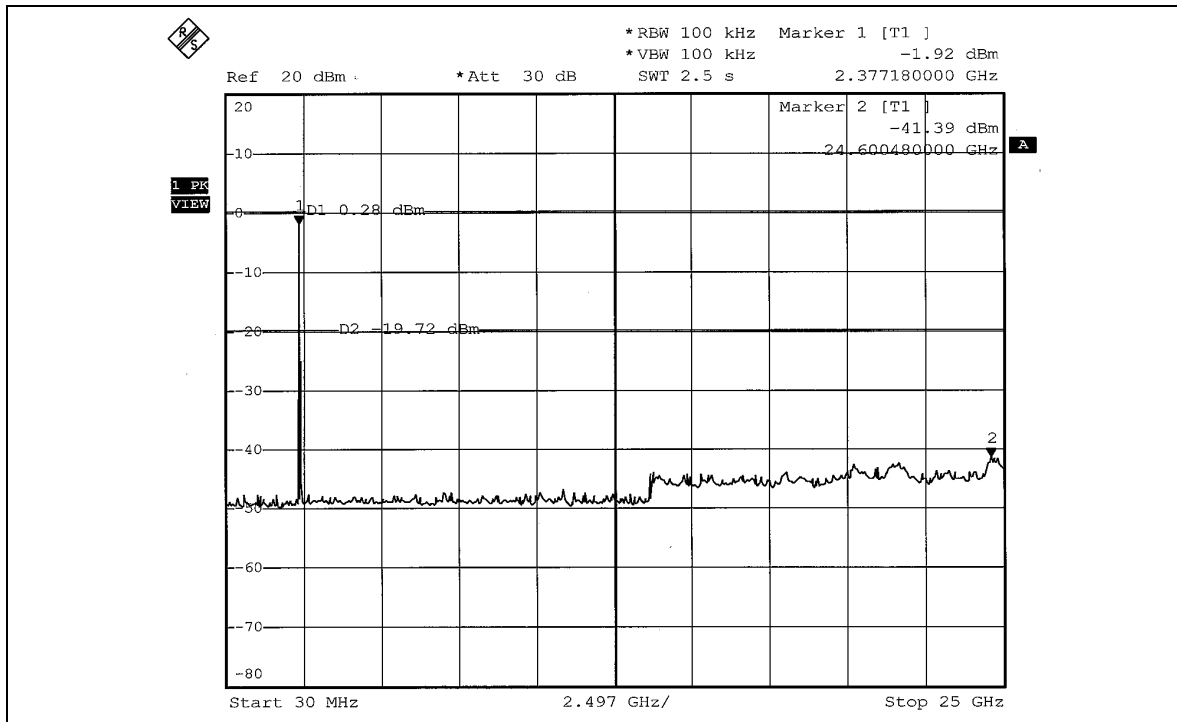


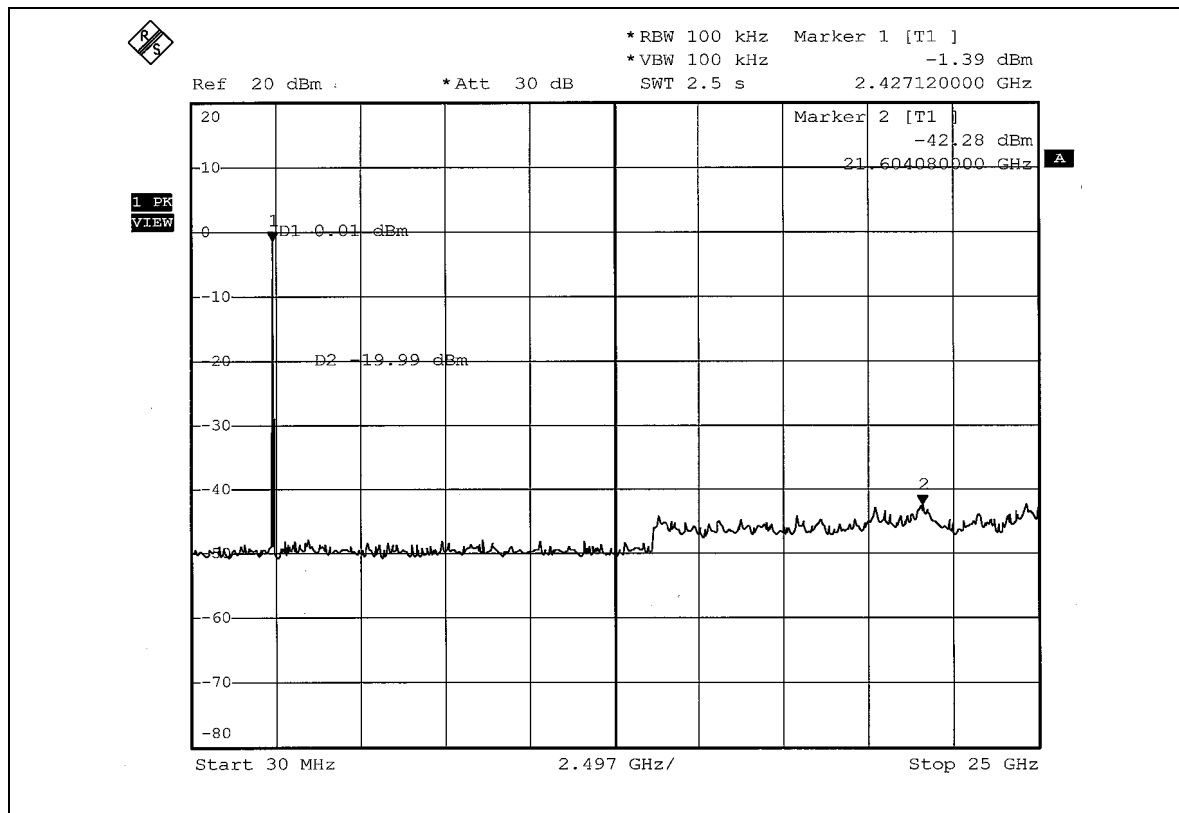
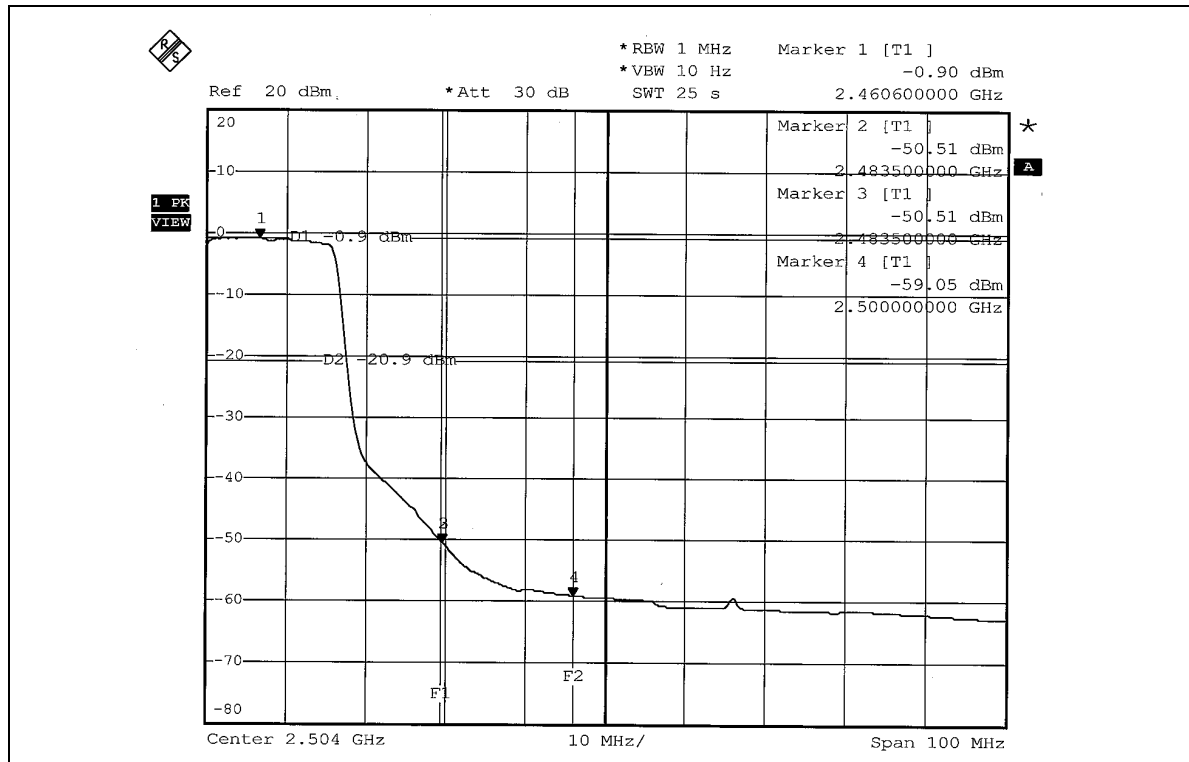




802.11g Turbo OFDM modulation

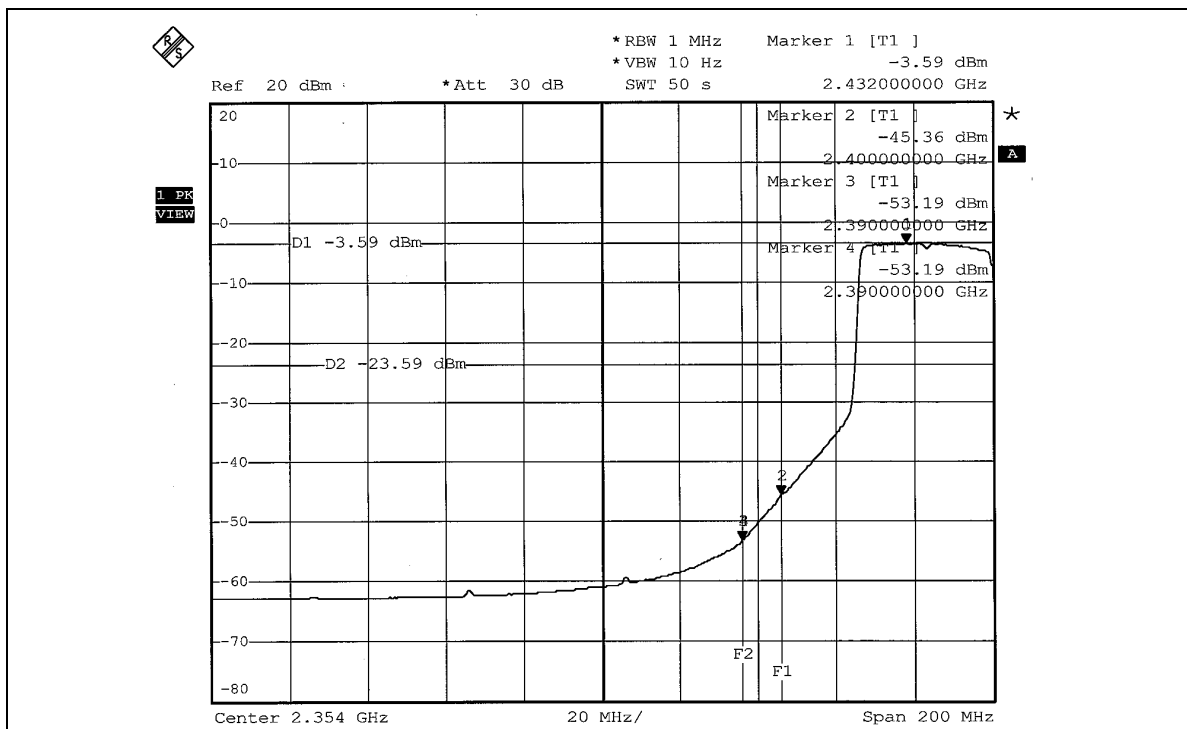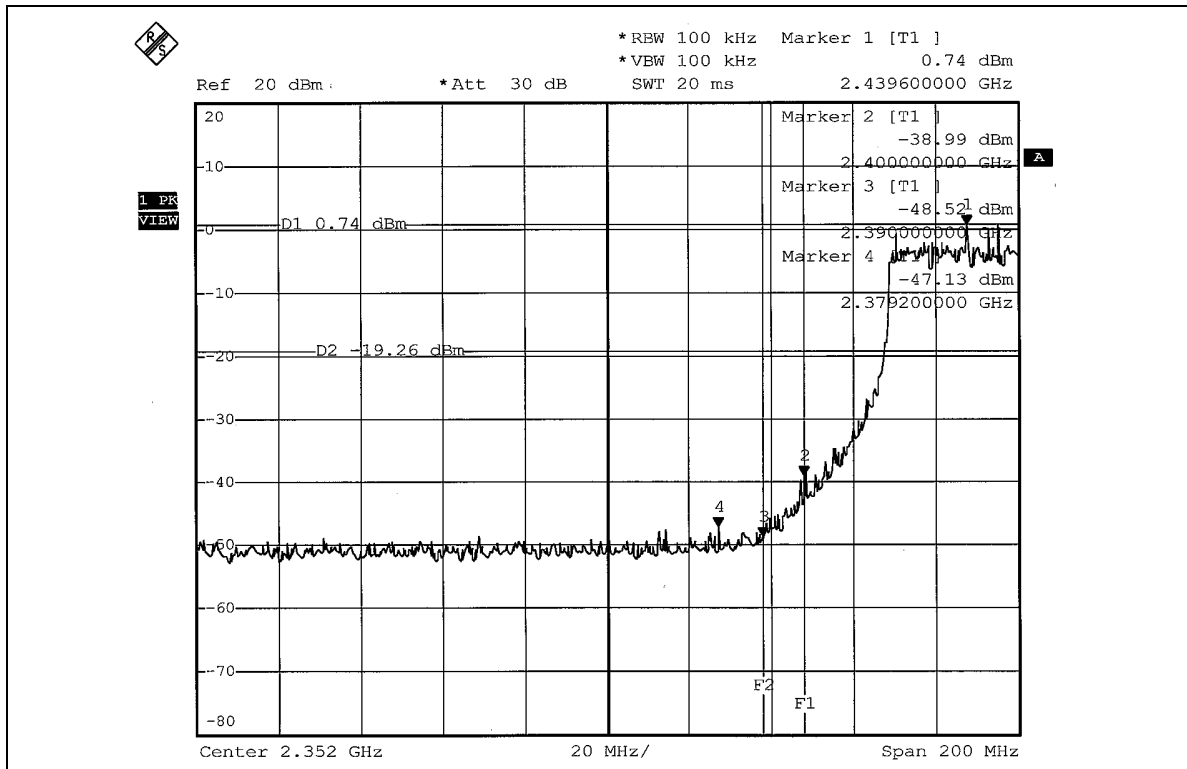

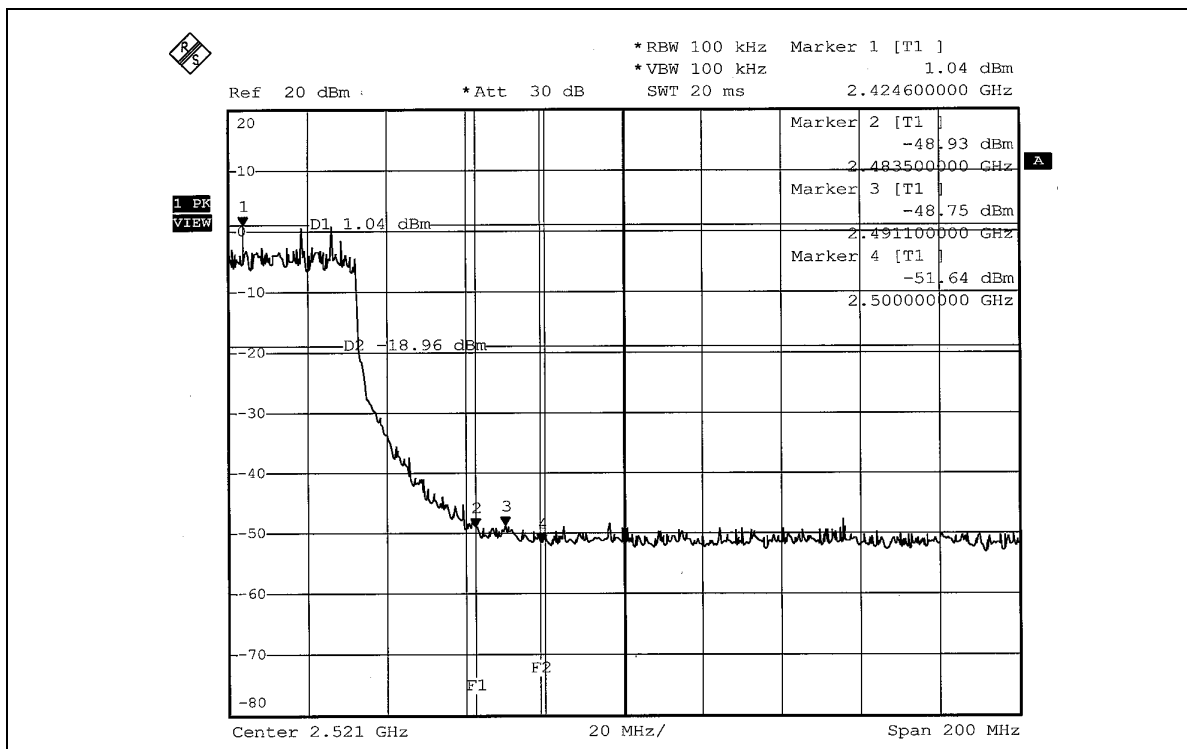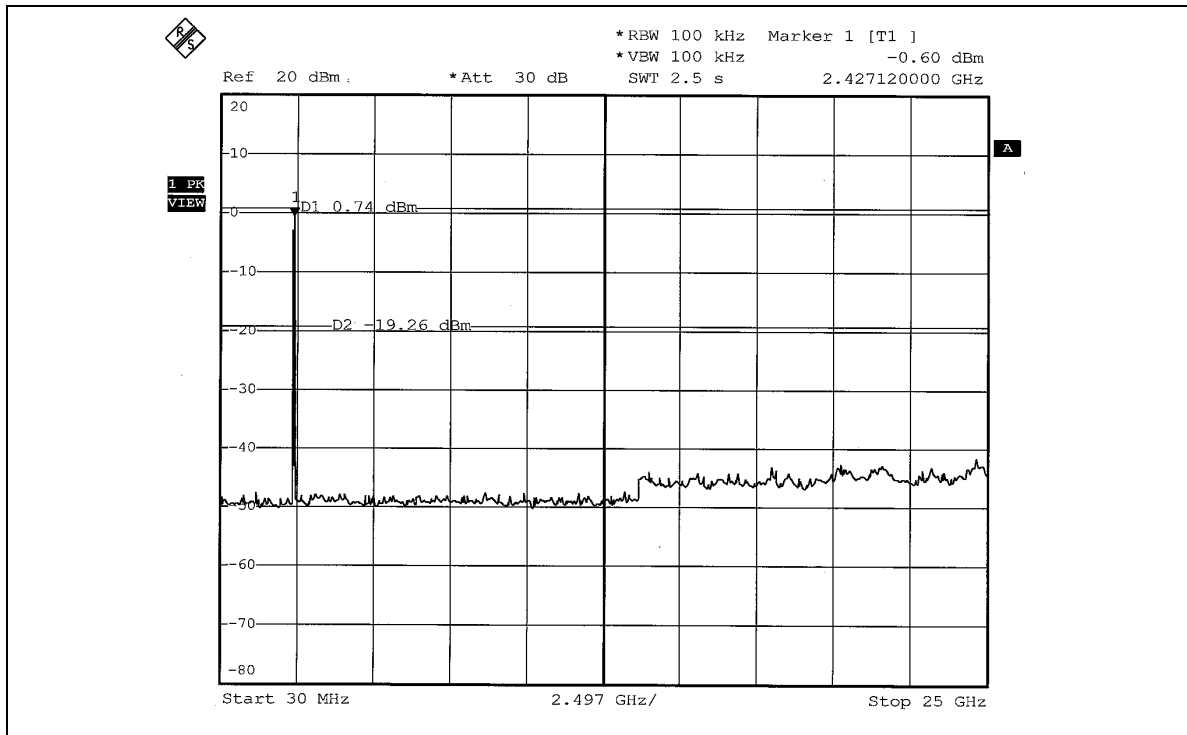

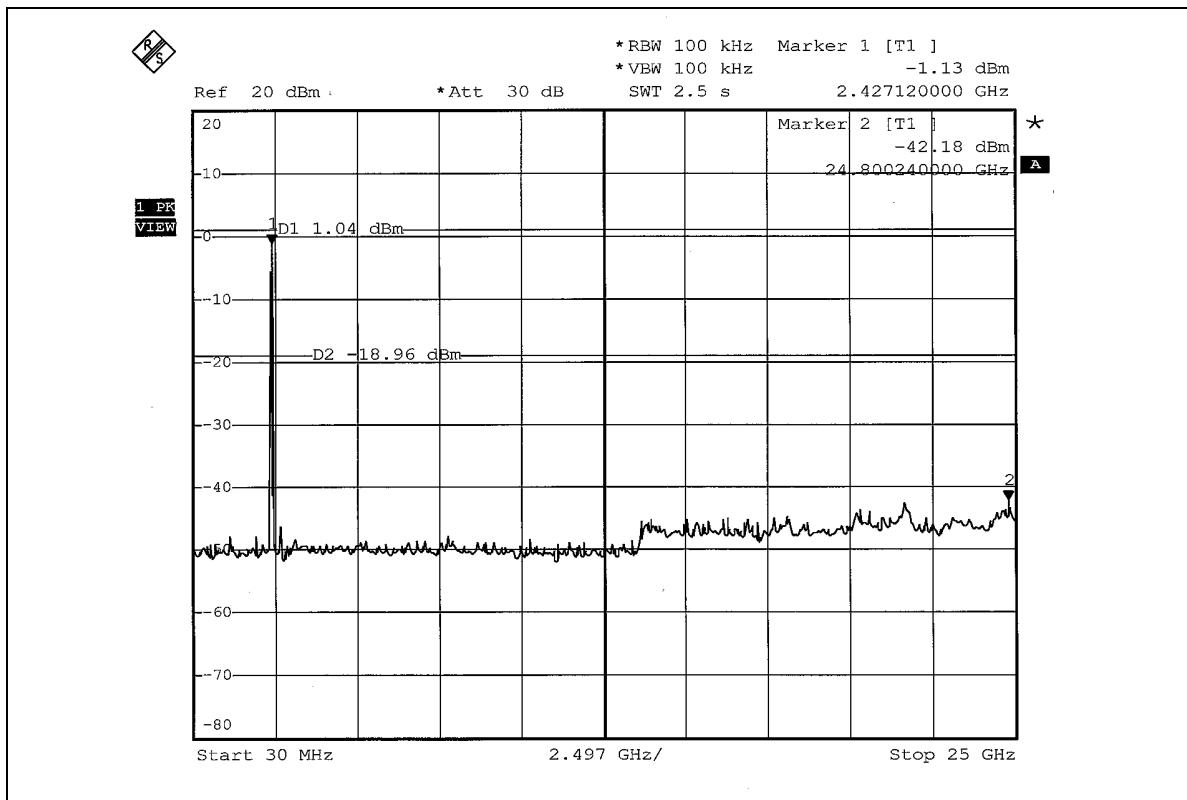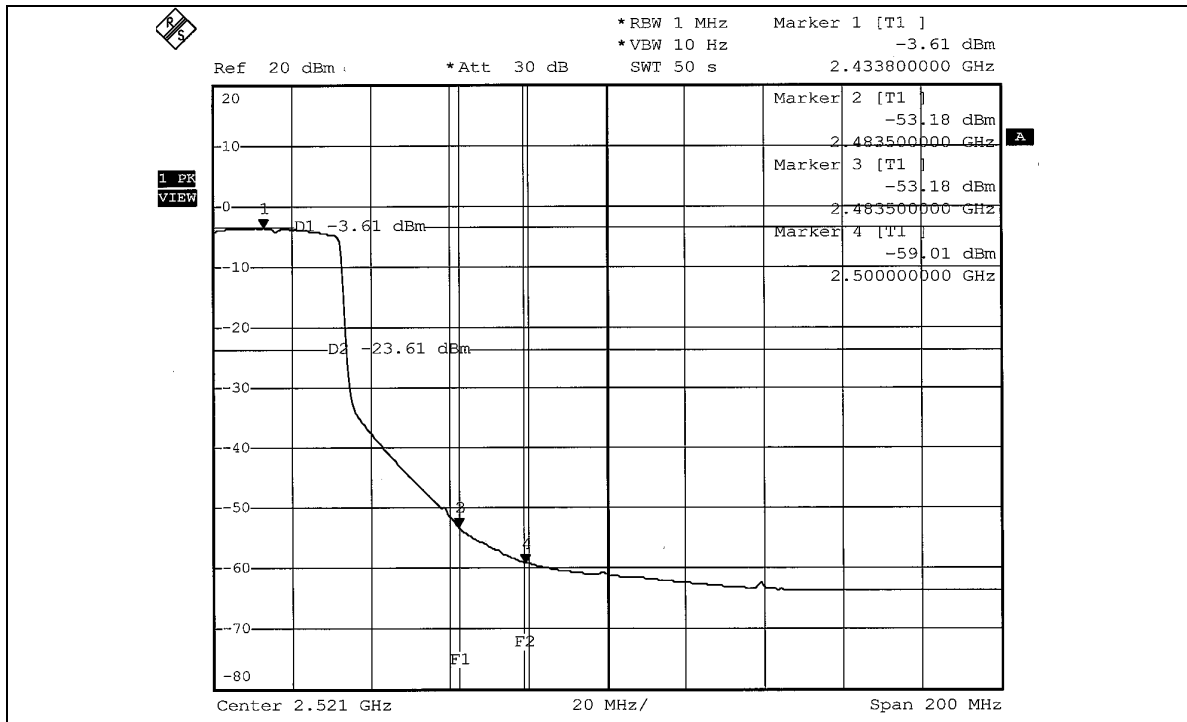



4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without connector. The maximum Gain of the antenna is -1.10dBi .



5. TEST TYPES AND RESULTS (802.11a 5725~5850MHz Band)

5.1 CONDUCTED EMISSION MEASUREMENT

5.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
- The lower limit shall apply at the transition frequencies.
 - The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 - All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

5.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 16, 2005
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 09, 2006
LISN SCHWARZBECK	NNBL 8226-2	8226-142	May. 02, 2006
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Feb. 15, 2006
Software ADT	ADT_Cond_V3	NA	NA

- NOTE:**
- The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - The test was performed in HwaYa Shielded Room 1.
 - The VCCI Site Registration No. is C-2040.




5.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit – 20dB) was not recorded.

5.1.4 DEVIATION FROM TEST STANDARD

No deviation

5.1.5 TEST SETUP

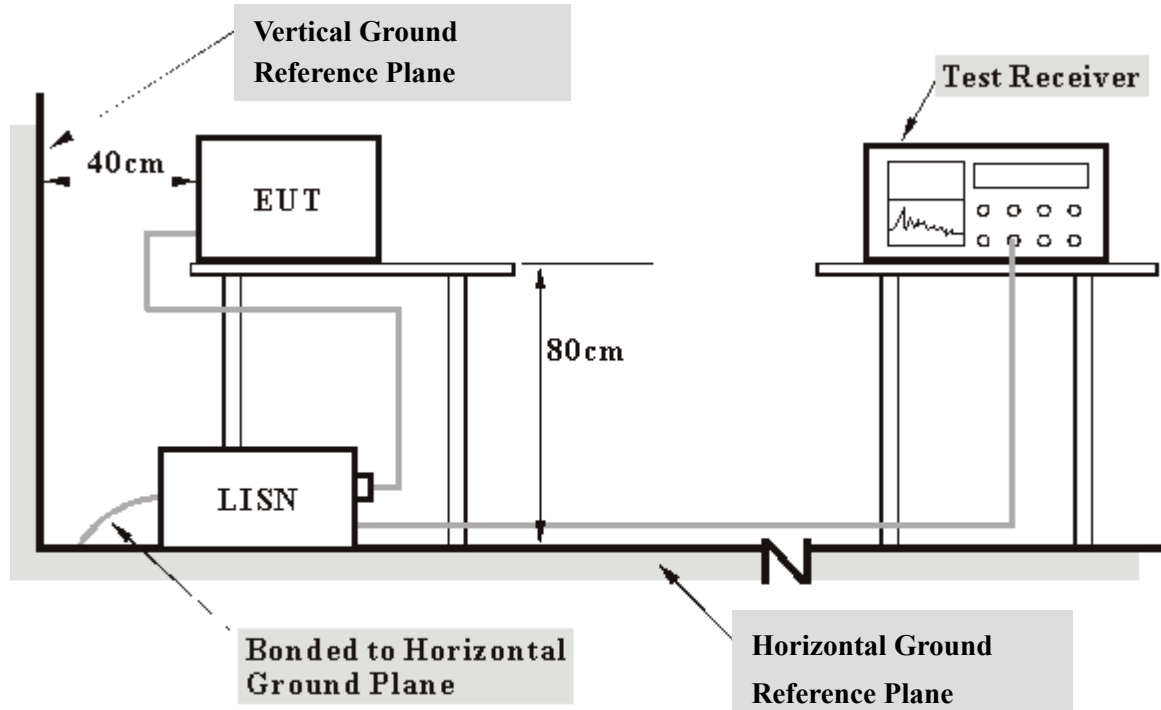

- Note:**
1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.1.6 EUT OPERATING CONDITIONS

Same as 4.1.6




5.1.7 TEST RESULTS

Conducted Worst-Case Data

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 1
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.11	36.83	-	36.94	-	65.79
2	0.166	0.11	37.17	-	37.28	-	65.18	55.18	-27.90	-
3	0.209	0.11	47.30	-	47.41	-	63.26	53.26	-15.85	-
4	0.423	0.12	39.32	-	39.44	-	57.38	47.38	-17.95	-
5	0.615	0.16	37.72	-	37.88	-	56.00	46.00	-18.12	-
6	12.926	0.55	33.80	-	34.35	-	60.00	50.00	-25.65	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

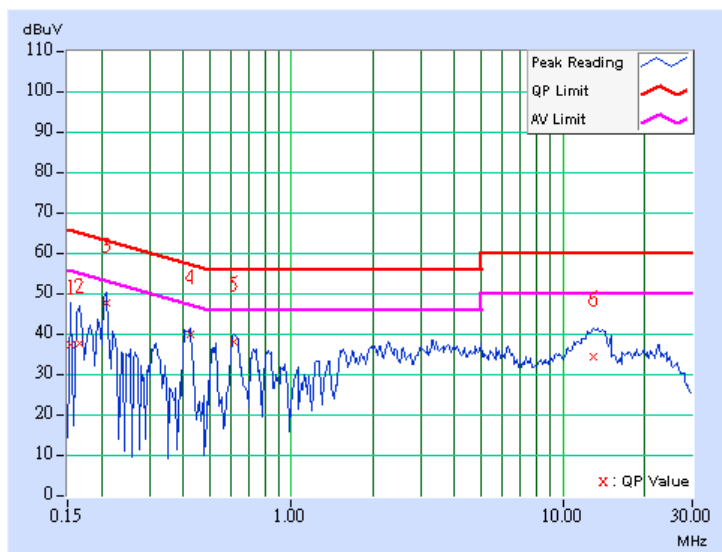




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	PHASE	Line 2
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.205	0.11	46.21	-	46.32	-	63.42
2	0.206	0.11	46.58	-	46.69	-	63.37	53.37	-16.68	-
3	0.207	0.11	46.54	-	46.65	-	63.32	53.32	-16.67	-
4	0.427	0.12	39.13	-	39.25	-	57.30	47.30	-18.06	-
5	0.525	0.14	36.42	-	36.56	-	56.00	46.00	-19.44	-
6	0.611	0.16	36.55	-	36.71	-	56.00	46.00	-19.29	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

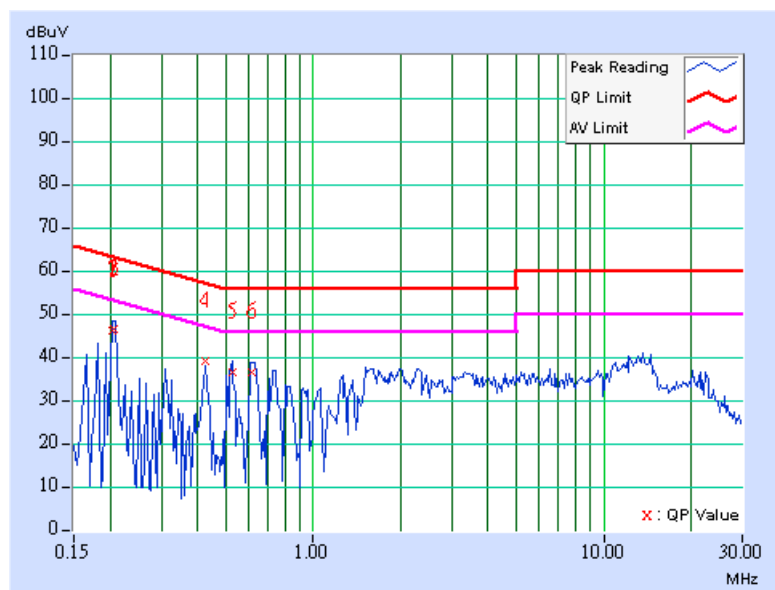




Conducted Worst-Case Data

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 1
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.154	0.11	36.80	-	36.91	-	65.79
2	0.197	0.11	40.48	-	40.59	-	63.74	53.74	-23.15	-
3	0.213	0.11	46.07	-	46.18	-	63.11	53.11	-16.93	-
4	0.416	0.11	38.76	-	38.87	-	57.54	47.54	-18.66	-
5	0.619	0.16	37.89	-	38.05	-	56.00	46.00	-17.95	-
6	0.810	0.20	32.70	-	32.90	-	56.00	46.00	-23.10	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

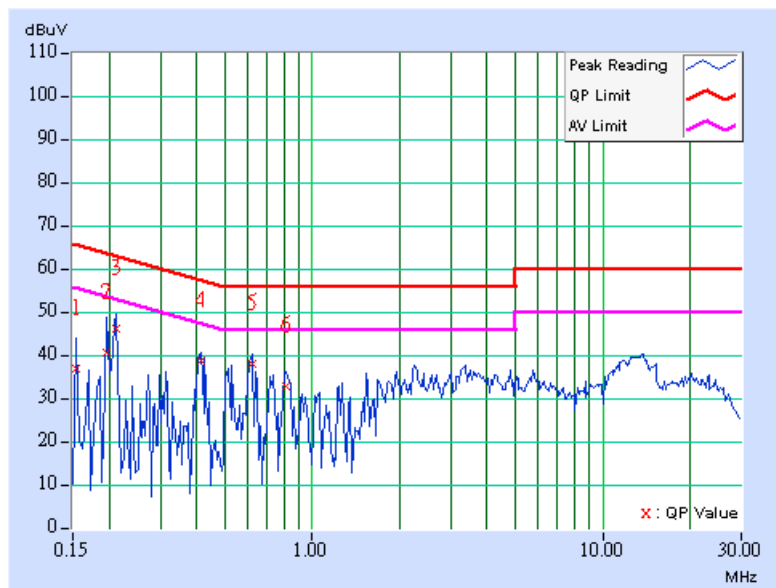




EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	PHASE	Line 2
CHANNEL	Channel 3	6dB BANDWIDTH	9 kHz
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	22deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.170	0.11	36.75	-	36.86	-	64.98
2	0.205	0.11	46.52	-	46.63	-	63.42	53.42	-16.79	-
3	0.314	0.11	33.78	-	33.89	-	59.86	49.86	-25.97	-
4	0.416	0.11	39.04	-	39.15	-	57.54	47.54	-18.38	-
5	0.529	0.14	37.22	-	37.36	-	56.00	46.00	-18.64	-
6	1.543	0.25	34.68	-	34.93	-	56.00	46.00	-21.07	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

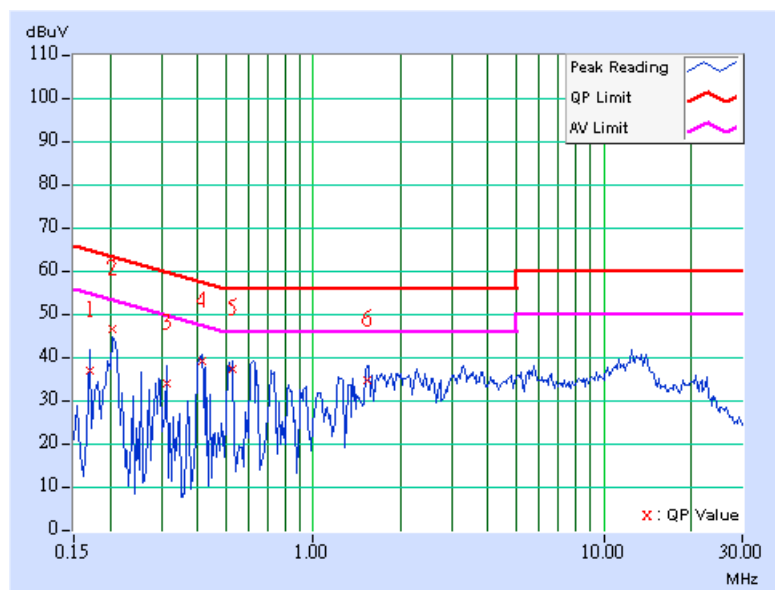



5.2 RADIATED EMISSION MEASUREMENT

5.2.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



5.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED UNTIL
Test Receiver ROHDE & SCHWARZ	ESI7	100033	May. 19, 2006
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100039	Nov. 21, 2006
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	Jun. 01, 2006
HORN Antenna SCHWARZBECK	9120D	9120D-408	Jan. 17, 2006
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Jan. 23, 2006
Preamplifier Agilent	8447D	2944A10633	Nov. 09, 2005
Preamplifier Agilent	8449B	3008A01964	Nov. 06, 2005
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218183/4	Jan. 26, 2006
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	218195/4	Jan. 26, 2006
Software ADT.	ADT_Radiated_V5.14	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA
Turn Table ADT.	TT100.	TT93021703	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 2.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The VCCI Site Registration No. is R-237.
 5. The IC Site Registration No. is IC4924-3.



5.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.

5.2.4 DEVIATION FROM TEST STANDARD

No deviation

5.2.5 TEST SETUP

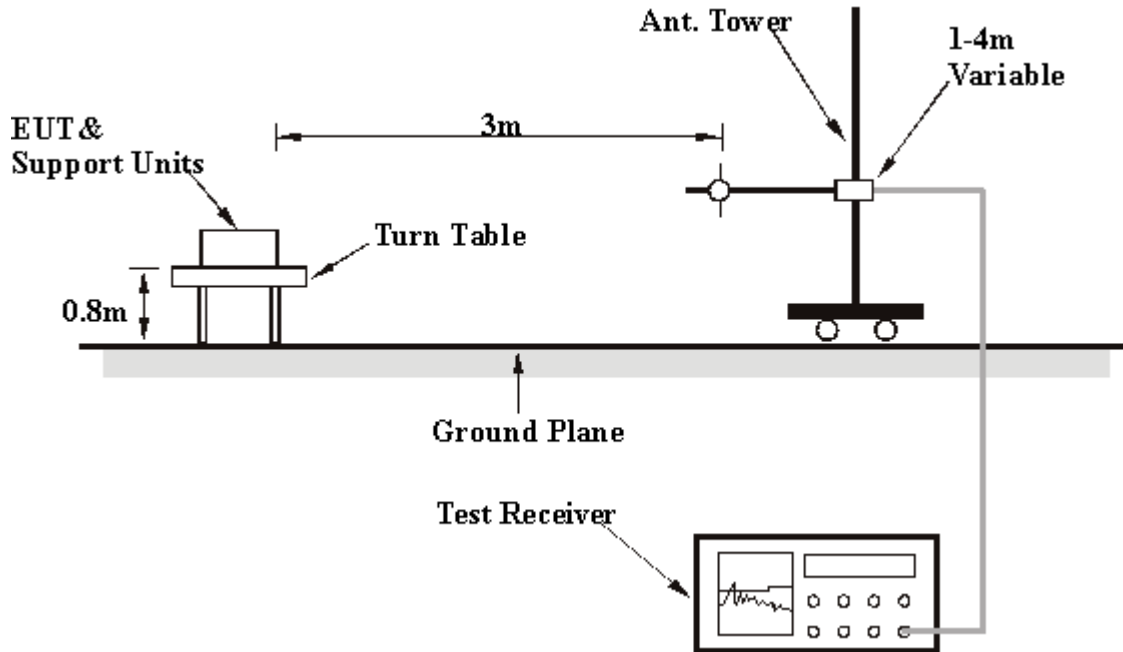

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

5.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6



5.2.7 TEST RESULTS

Below 1GHz Worst-Case Data

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-81	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	1	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	111.64	32.96 QP	43.50	-10.54	3.00 H	274	20.46	12.50
2	199.12	31.61 QP	43.50	-11.89	3.00 H	247	19.68	11.93
3	249.66	37.30 QP	46.00	-8.70	1.00 H	268	23.66	13.64
4	399.34	36.42 QP	46.00	-9.58	2.00 H	349	19.20	17.22
5	681.20	34.59 QP	46.00	-11.41	1.00 H	238	11.90	22.69
6	733.69	38.50 QP	46.00	-7.50	1.00 H	115	14.66	23.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	107.76	30.68 QP	43.50	-12.82	1.00 V	220	18.58	12.10
2	399.34	37.03 QP	46.00	-8.97	1.00 V	79	19.80	17.22
3	465.43	36.23 QP	46.00	-9.77	1.00 V	85	17.39	18.84
4	733.69	33.93 QP	46.00	-12.07	2.00 V	175	10.08	23.85
5	865.87	33.25 QP	46.00	-12.75	2.00 V	208	7.96	25.29
6	933.91	34.43 QP	46.00	-11.57	1.00 V	259	8.13	26.30

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 1. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 2. The other emission levels were very low against the limit.
 3. Margin value = Emission level – Limit value

**Below 1GHz Worst-Case Data**

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	Below 1000MHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Quasi-Peak
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	23deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TEST MODE	2	TESTED BY	Morgan Chen

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	111.64	34.73 QP	43.50	-8.77	1.00 H	295	22.23	12.50
2	249.66	37.78 QP	46.00	-8.22	1.00 H	259	24.14	13.64
3	479.04	40.08 QP	46.00	-5.92	2.00 H	154	21.07	19.01
4	595.67	35.05 QP	46.00	-10.95	3.00 H	82	13.48	21.57
5	646.21	35.10 QP	46.00	-10.90	1.00 H	298	12.86	22.24
6	733.69	38.91 QP	46.00	-7.09	1.00 H	118	15.07	23.85

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	45.55	28.34 QP	40.00	-11.66	1.00 V	139	12.81	15.53
2	113.59	38.52 QP	43.50	-4.98	1.00 V	268	25.81	12.70
3	440.16	33.87 QP	46.00	-12.13	2.00 V	7	15.50	18.37
4	479.04	32.69 QP	46.00	-13.31	1.00 V	358	13.68	19.01
5	733.69	32.49 QP	46.00	-13.51	2.00 V	178	8.64	23.85
6	928.08	38.18 QP	46.00	-7.82	1.00 V	16	11.95	26.23

- REMARKS:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 4. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 5. The other emission levels were very low against the limit.
 6. Margin value = Emission level – Limit value

802.11a OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	52.49 PK	74.00	-21.51	1.02 H	345	16.87	35.62
1	#3830.00	48.28 AV	54.00	-5.72	1.02 H	345	12.66	35.62
2	5725.00	81.25 PK	87.91	-6.66	1.05 H	11	41.36	39.89
2	5725.00	58.86 AV	78.04	-19.18	1.05 H	11	18.97	39.89
3	*5745.00	107.91 PK			1.05 H	11	67.91	40.00
3	*5745.00	98.04 AV			1.05 H	11	58.04	40.00
4	7660.00	49.13 PK	74.00	-24.87	1.46 H	158	3.74	45.39
5	#11490.00	68.28 PK	74.00	-5.72	1.03 H	10	18.60	49.68
5	#11490.00	52.78 AV	54.00	-1.22	1.03 H	10	3.10	49.68

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3830.00	50.03 PK	74.00	-23.97	1.24 V	345	14.41	35.62
1	#3830.00	44.74 AV	54.00	-9.26	1.24 V	345	9.12	35.62
2	5725.00	71.01 PK	82.07	-11.06	1.26 V	5	31.12	39.89
2	5725.00	57.49 AV	71.81	-14.32	1.26 V	5	17.60	39.89
3	*5745.00	102.07 PK			1.26 V	5	62.07	40.00
3	*5745.00	91.81 AV			1.26 V	5	51.81	40.00
4	#7660.00	47.59 PK	74.00	-26.41	1.02 V	321	2.20	45.39
5	#11490.00	66.26 PK	74.00	-7.74	1.37 V	317	16.58	49.68
5	#11490.00	52.56 AV	54.00	-1.44	1.37 V	317	2.88	49.68

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 3	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.60	53.12 PK	74.00	-20.88	1.05 H	10	17.52	35.60
1	#3856.60	49.12 AV	54.00	-4.88	1.05 H	10	13.52	35.60
2	*5785.00	110.54 PK			1.03 H	8	70.34	40.20
2	*5785.00	99.52 AV			1.03 H	8	59.32	40.20
3	#7713.20	48.89 PK	74.00	-25.11	1.20 H	35	3.42	45.47
4	#11570.00	68.35 PK	74.00	-5.65	1.04 H	12	18.11	50.24
4	#11570.00	52.83 AV	54.00	-1.17	1.04 H	12	2.59	50.24

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3856.60	50.01 PK	74.00	-23.99	1.31 V	355	14.41	35.60
1	#3856.60	44.69 AV	54.00	-9.31	1.31 V	355	9.09	35.60
2	*5785.00	106.94 PK			1.15 V	8	66.74	40.20
2	*5785.00	96.28 AV			1.15 V	8	56.08	40.20
3	#7713.20	47.10 PK	74.00	-26.90	1.40 V	35	1.63	45.47
4	#11570.00	67.08 PK	74.00	-6.92	1.42 V	324	16.84	50.24
4	#11570.00	52.25 AV	54.00	-1.75	1.42 V	324	2.01	50.24

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247



EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 5	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	6Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.30	52.85 PK	74.00	-21.15	1.00 H	335	17.27	35.58
1	#3883.30	48.59 AV	54.00	-5.41	1.00 H	335	13.01	35.58
2	*5825.00	107.29 PK			1.00 H	8	67.00	40.29
2	*5825.00	96.72 AV			1.00 H	8	56.43	40.29
3	5850.00	71.63 PK	87.29	-15.66	1.00 H	8	31.33	40.30
3	5850.00	58.38 AV	76.72	-18.34	1.00 H	8	18.08	40.30
4	7766.60	48.85 PK	87.29	-38.44	1.06 H	351	3.24	45.61
5	#11650.00	67.98 PK	74.00	-6.02	1.06 H	35	17.93	50.05
5	#11650.00	52.65 AV	54.00	-1.35	1.06 H	35	2.60	50.05

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3883.30	50.04 PK	74.00	-23.96	1.26 V	355	14.46	35.58
1	#3883.30	43.98 AV	54.00	-10.02	1.26 V	355	8.40	35.58
2	*5825.00	103.12 PK			1.16 V	12	62.83	40.29
2	*5825.00	92.89 AV			1.16 V	12	52.60	40.29
3	5850.00	71.52 PK	83.12	-11.60	1.16 V	12	31.22	40.30
3	5850.00	58.29 AV	72.89	-14.60	1.16 V	12	17.99	40.30
4	7766.60	47.65 PK	83.12	-35.47	1.25 V	34	2.04	45.61
5	#11650.00	66.85 PK	74.00	-7.15	1.45 V	324	16.80	50.05
5	#11650.00	52.13 AV	54.00	-1.87	1.45 V	324	2.08	50.05

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

802.11a Turbo OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 1	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3840.00	52.23 PK	74.00	-21.77	1.06 H	325	16.62	35.61
1	#3840.00	48.27 AV	54.00	-5.73	1.06 H	325	12.66	35.61
2	5725.00	49.58 PK	88.16	-38.58	1.08 H	319	9.69	39.89
3	*5760.00	108.16 PK			1.08 H	319	68.09	40.07
3	*5760.00	98.09 AV			1.08 H	319	58.02	40.07
4	#7680.00	48.32 PK	74.00	-25.68	1.08 H	324	2.90	45.42
5	#11520.00	65.31 PK	74.00	-8.69	1.18 H	12	15.42	49.89
5	#11520.00	51.40 AV	54.00	-2.60	1.18 H	12	1.51	49.89

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3840.00	50.15 PK	74.00	-23.85	1.02 V	315	14.54	35.61
1	#3840.00	46.17 AV	54.00	-7.83	1.02 V	315	10.56	35.61
2	5725.00	49.51 PK	84.59	-35.08	1.13 V	29	9.62	39.89
3	*5760.00	104.59 PK			1.13 V	29	64.52	40.07
3	*5760.00	94.65 AV			1.13 V	29	54.58	40.07
4	#7680.00	47.13 PK	74.00	-26.87	1.05 V	325	1.71	45.42
5	#11520.00	64.28 PK	74.00	-9.72	1.07 V	239	14.39	49.89
5	#11520.00	50.25 AV	54.00	-3.75	1.07 V	239	0.36	49.89

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MEASUREMENT DETAIL	
MODEL	DCUA-82	FREQUENCY RANGE	1 ~ 40 GHz
CHANNEL	Channel 2	DETECTOR FUNCTION	Peak(PK) Average (AV)
MODULATION TYPE	BPSK	ENVIRONMENTAL CONDITIONS	25deg. C, 68%RH, 991hPa
TRANSFER RATE	12Mbps	INPUT POWER (SYSTEM)	120Vac, 60 Hz
TESTED BY	Morgan Chen		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3866.60	52.17 PK	74.00	-21.83	1.03 H	324	16.57	35.60
1	#3866.60	48.12 AV	54.00	-5.88	1.03 H	324	12.52	35.60
2	*5800.00	108.85 PK			1.24 H	315	68.57	40.28
2	*5800.00	98.78 AV			1.24 H	315	58.50	40.28
3	5850.00	49.19 PK	88.85	-39.66	1.24 H	315	8.89	40.30
4	#7733.20	48.15 PK	74.00	-25.85	1.06 H	315	2.63	45.52
5	#11600.00	65.22 PK	74.00	-8.78	1.17 H	8	14.77	50.45
5	#11600.00	51.31 AV	54.00	-2.69	1.17 H	8	0.86	50.45

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#3866.60	50.35 PK	74.00	-23.65	1.03 V	325	14.75	35.60
1	#3866.60	46.85 AV	54.00	-7.15	1.03 V	325	11.25	35.60
2	*5800.00	104.75 PK			1.15 V	9	64.47	40.28
2	*5800.00	94.85 AV			1.15 V	9	54.57	40.28
3	5850.00	49.02 PK	84.75	-35.73	1.15 V	9	8.72	40.30
4	#7733.20	47.56 PK	74.00	-26.44	1.35 V	328	2.04	45.52
5	#11600.00	64.12 PK	74.00	-9.88	1.29 V	318	13.67	50.45
5	#11600.00	50.24 AV	54.00	-3.76	1.29 V	318	-0.21	50.45

- NOTE:**
1. Emission level(dBuV/m)=Raw Value(dBuV) + Correction Factor(dB/m)
 2. Correction Factor(dB/m) = Antenna Factor (dB/m) + Cable Factor (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value
 5. "*" : Fundamental frequency
 6. "#"The radiated frequency falling in the restricted band.
 7. The limit value is defined as per 15.247



5.3 6dB BANDWIDTH MEASUREMENT

5.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

5.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


5.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

5.3.4 DEVIATION FROM TEST STANDARD

No deviation

5.3.5 TEST SETUP

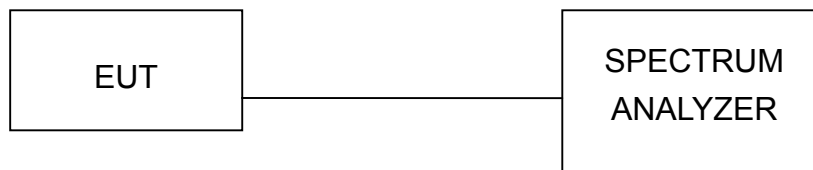

5.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



5.3.7 TEST RESULTS


802.11a OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5745	16.40	0.5	PASS
3	5785	16.40	0.5	PASS
5	5825	16.40	0.5	PASS



CH 1

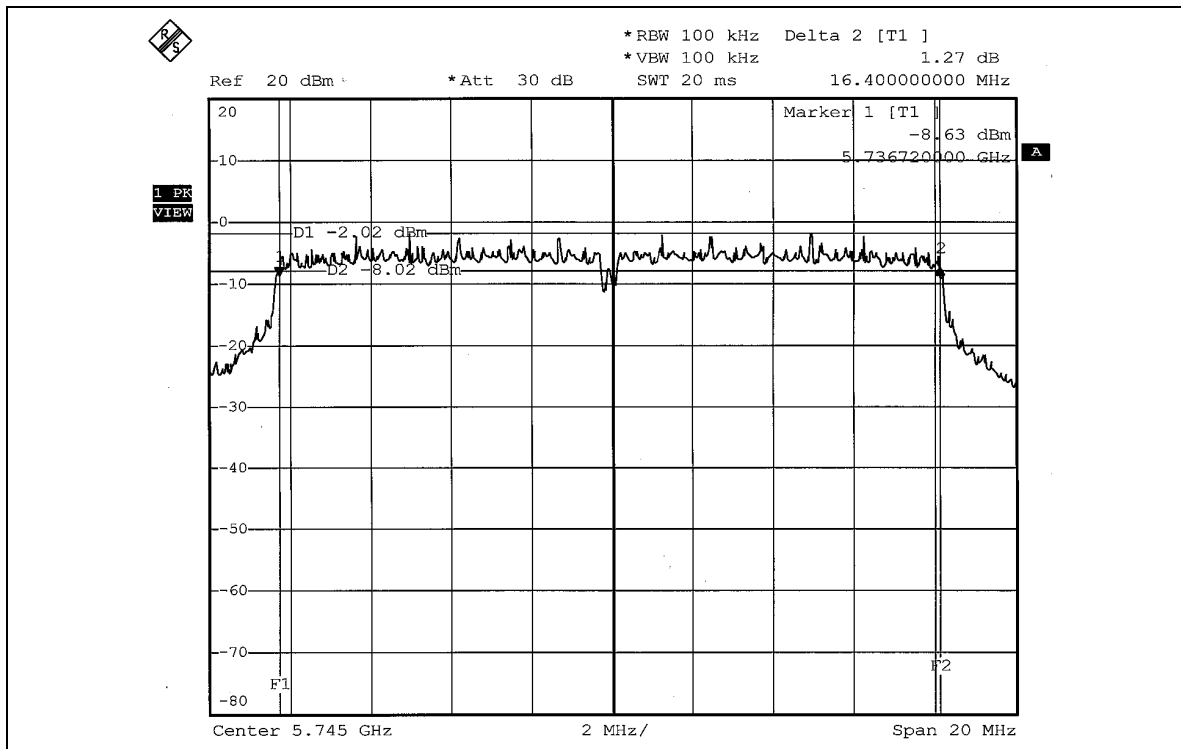


CH 3

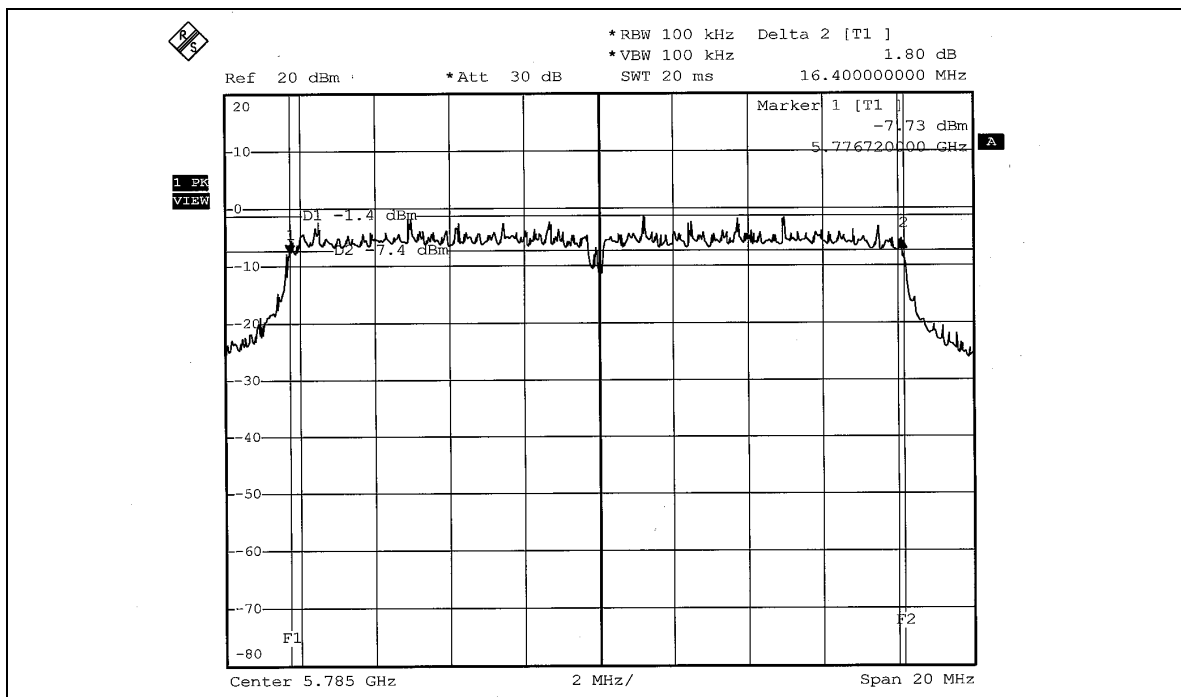



CH 5

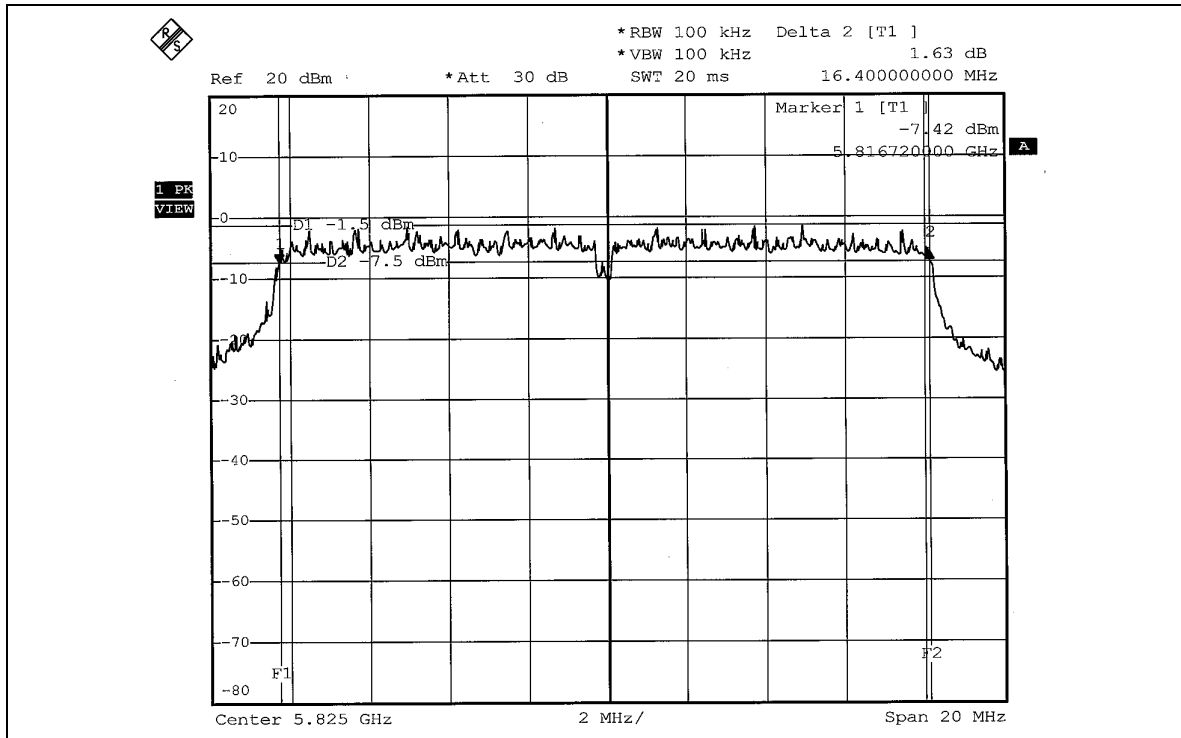


**802.11a Turbo OFDM modulation**

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS/FAIL
1	5760	32.64	0.5	PASS
2	5800	32.64	0.5	PASS



CH 1

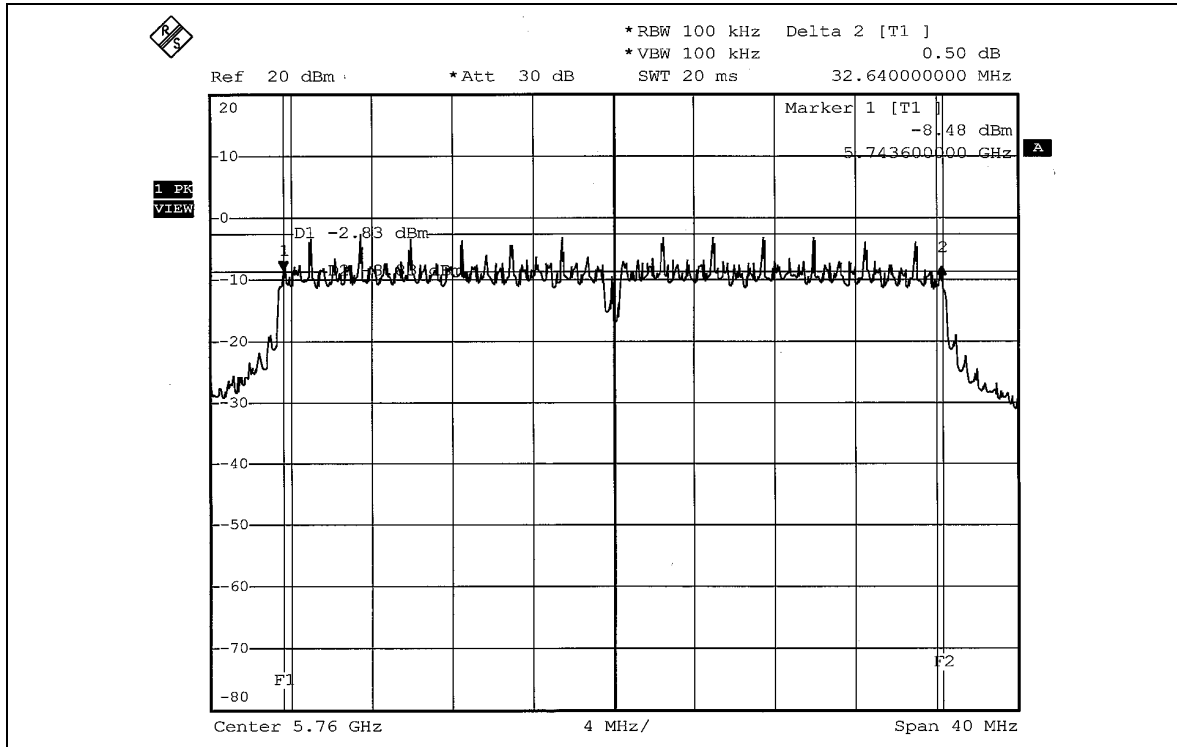

CH 2

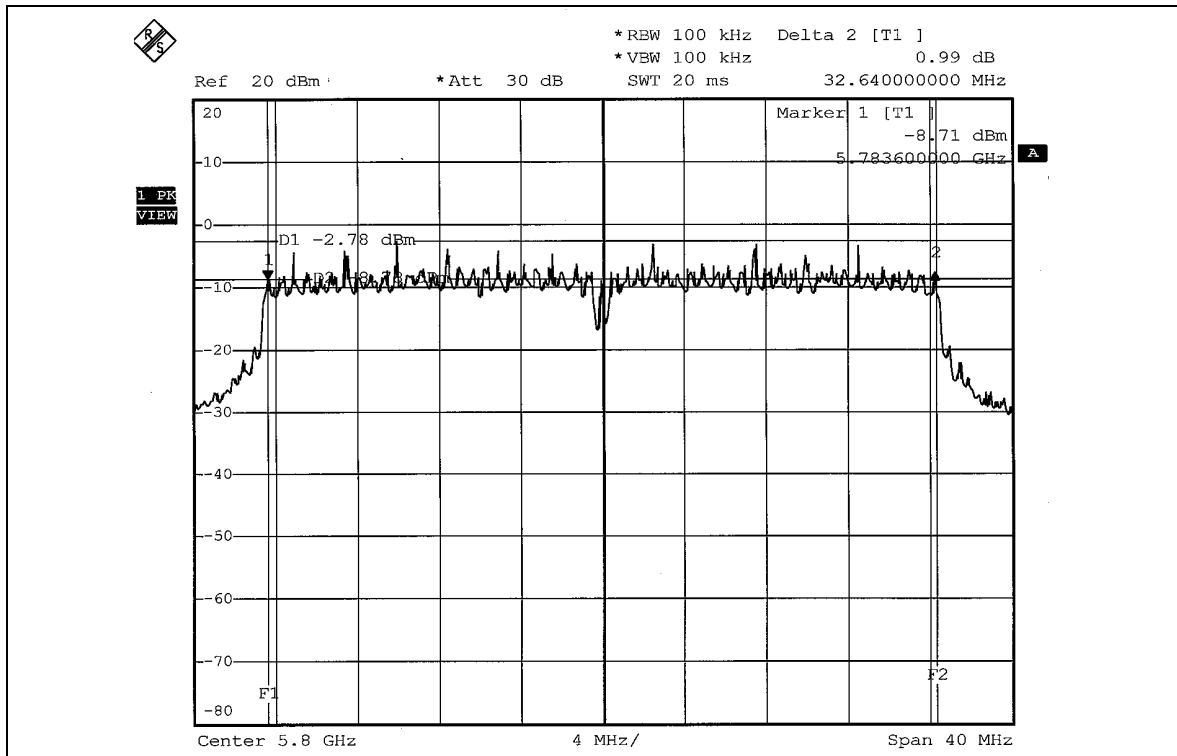



5.4 MAXIMUM PEAK OUTPUT POWER

5.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

5.4.2 INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005
AGILENT SIGNAL GENERATOR	E8257C	MY43320668	Dec. 31, 2005
TEKTRONIX OSCILLOSCOPE	TDS 1012	C019167	Feb. 01, 2006
NARDA DETECTOR	4503A	FSCM99899	NA

NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA..

5.4.3 TEST PROCEDURES

1. A detector was used on the output port of the EUT. An oscilloscope was used to read the response of the detector.
2. Replaced the EUT by the signal generator . The center frequency of the S.G was adjusted to the center frequency of the measured channel.
3. Adjusted the power to have the same reading on oscilloscope. Record the power level.

5.4.4 DEVIATION FROM TEST STANDARD

No deviation

5.4.5 TEST SETUP



5.4.6 EUT OPERATING CONDITIONS

Same as Item 5.3.6

5.4.7 TEST RESULTS

802.11a OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5745	22.439	13.51	30	PASS
3	5785	22.803	13.58	30	PASS
5	5825	22.646	13.55	30	PASS

802.11a Turbo OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		

CHANNEL	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	5760	22.542	13.53	30	PASS
2	5800	22.646	13.55	30	PASS



5.5 POWER SPECTRAL DENSITY MEASUREMENT

5.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

5.5.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.5.3 TEST PROCEDURE


The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3 kHz RBW and 30 kHz VBW, set sweep time = span/3 kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3 kHz for a full response of the mixer in the spectrum analyzer.

5.5.4 DEVIATION FROM TEST STANDARD

No deviation

5.5.5 TEST SETUP



5.5.6 EUT OPERATING CONDITION

Same as Item 5.3.6



5.5.7 TEST RESULTS


802.11a OFDM modulation

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	6Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5745	-12.47	8	PASS
3	5785	-12.31	8	PASS
5	5825	-13.75	8	PASS



CH 1

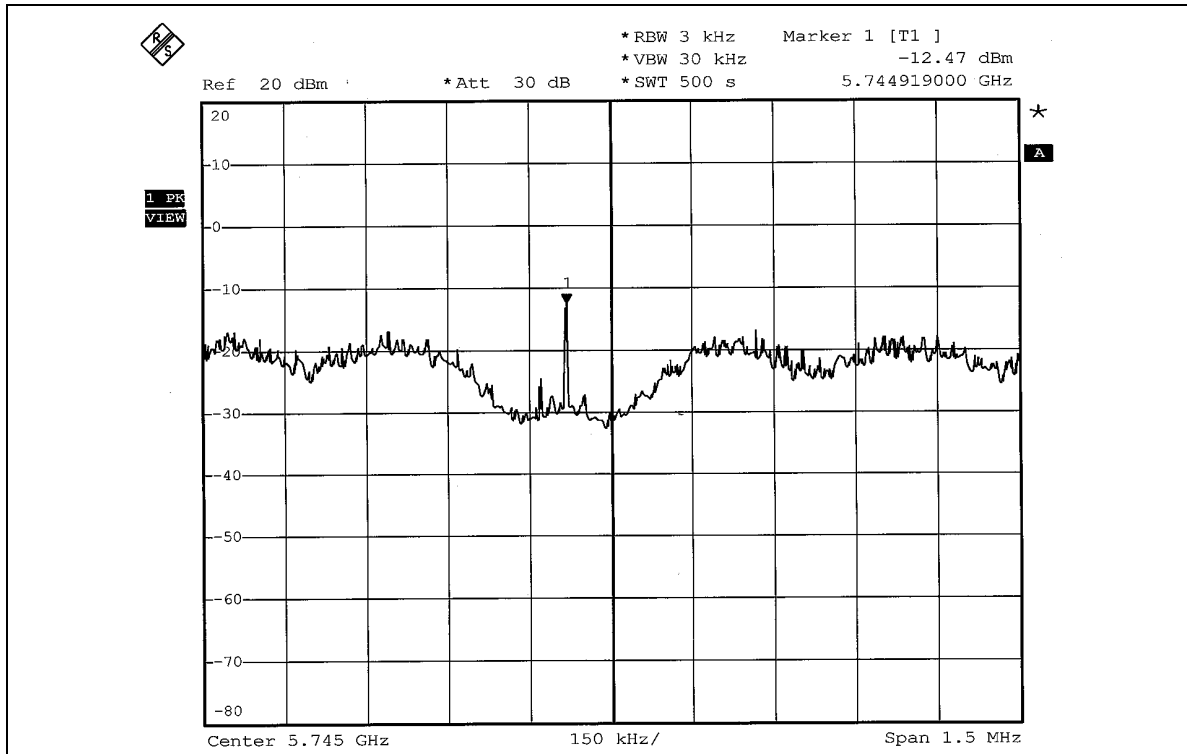


CH 3

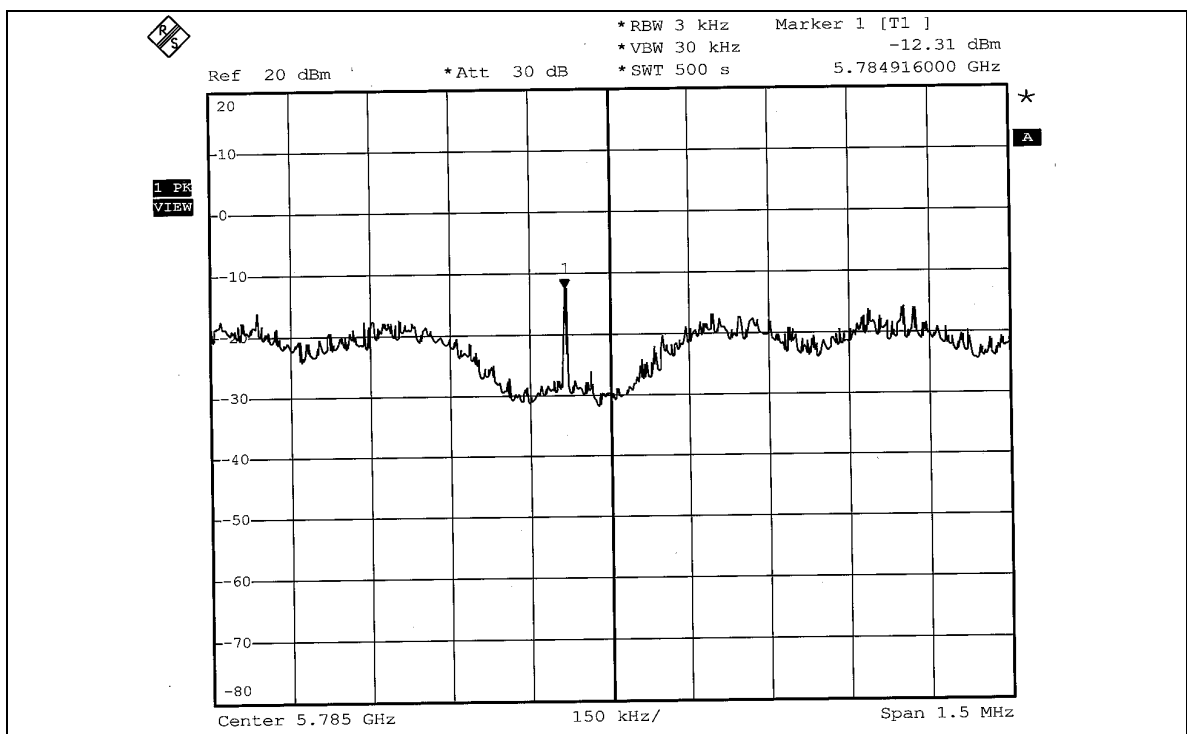



CH 5

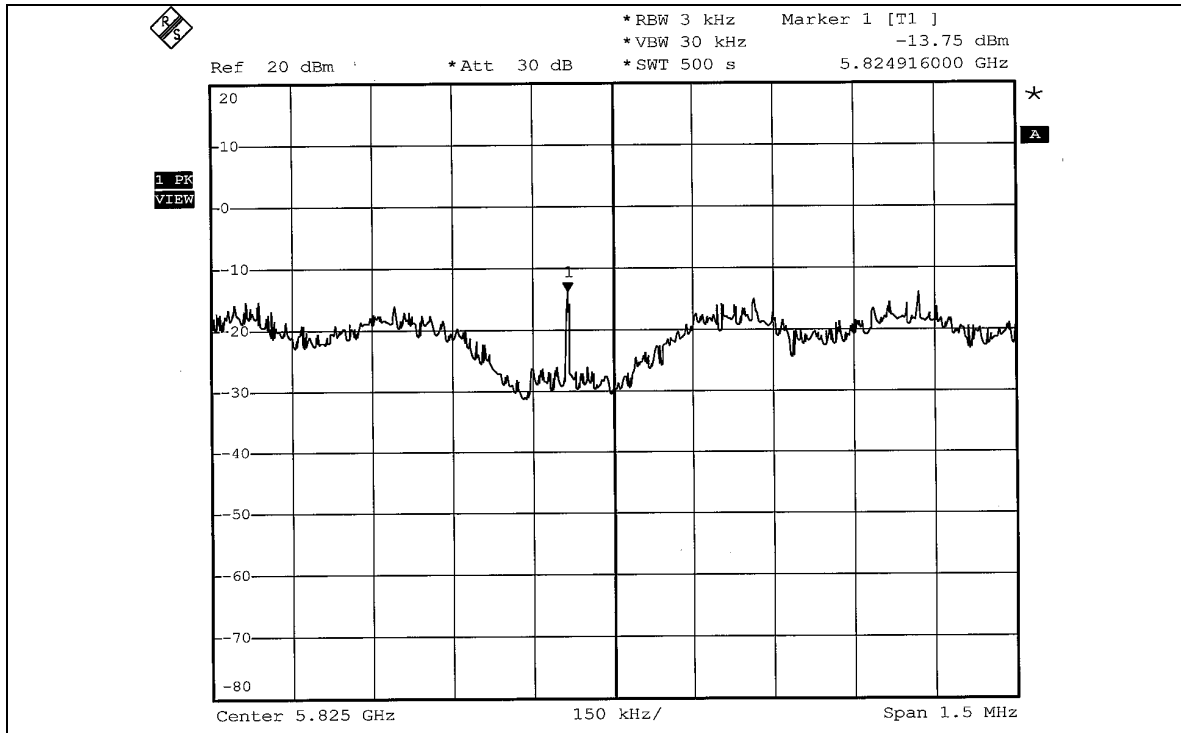


**802.11a Turbo OFDM modulation**

EUT	IEEE 802.11 a/g USB 2.0 Adapter	MODEL	DCUA-82
MODULATION TYPE	BPSK	TRANSFER RATE	12Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	24deg.C, 65%RH, 991hPa
TESTED BY	Gary Chang		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	5760	-12.94	8	PASS
2	5800	-12.60	8	PASS



CH 1

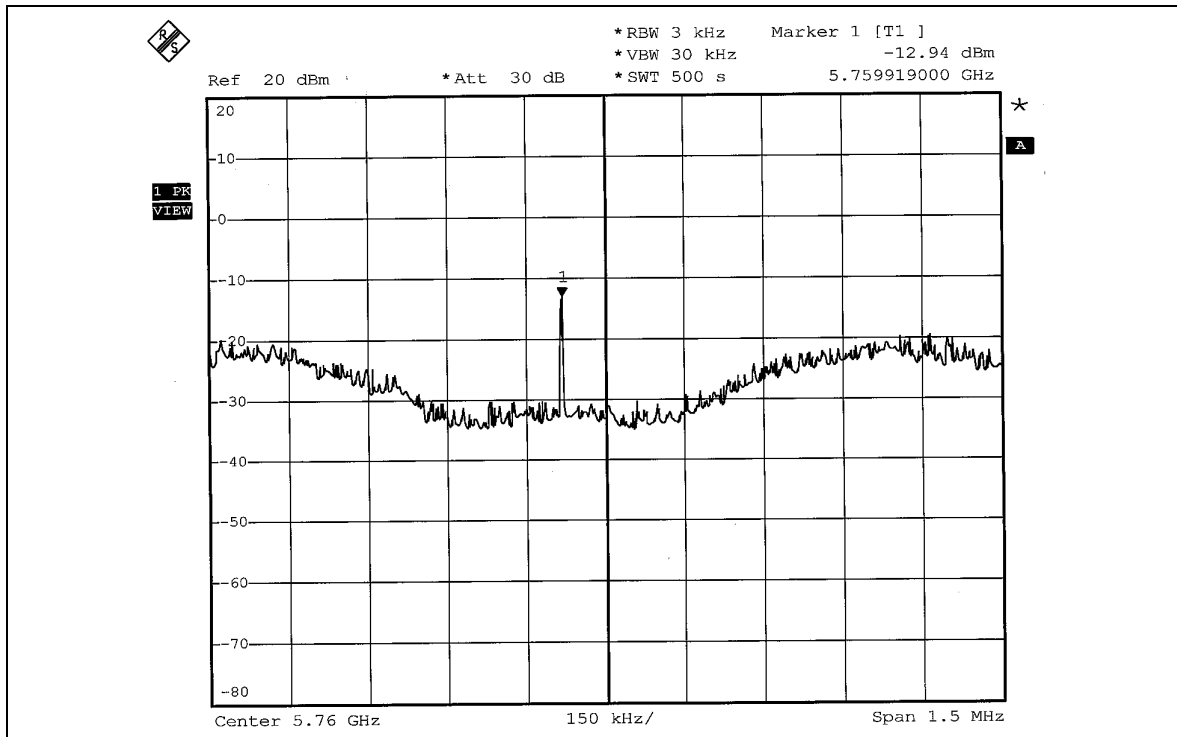

CH 2

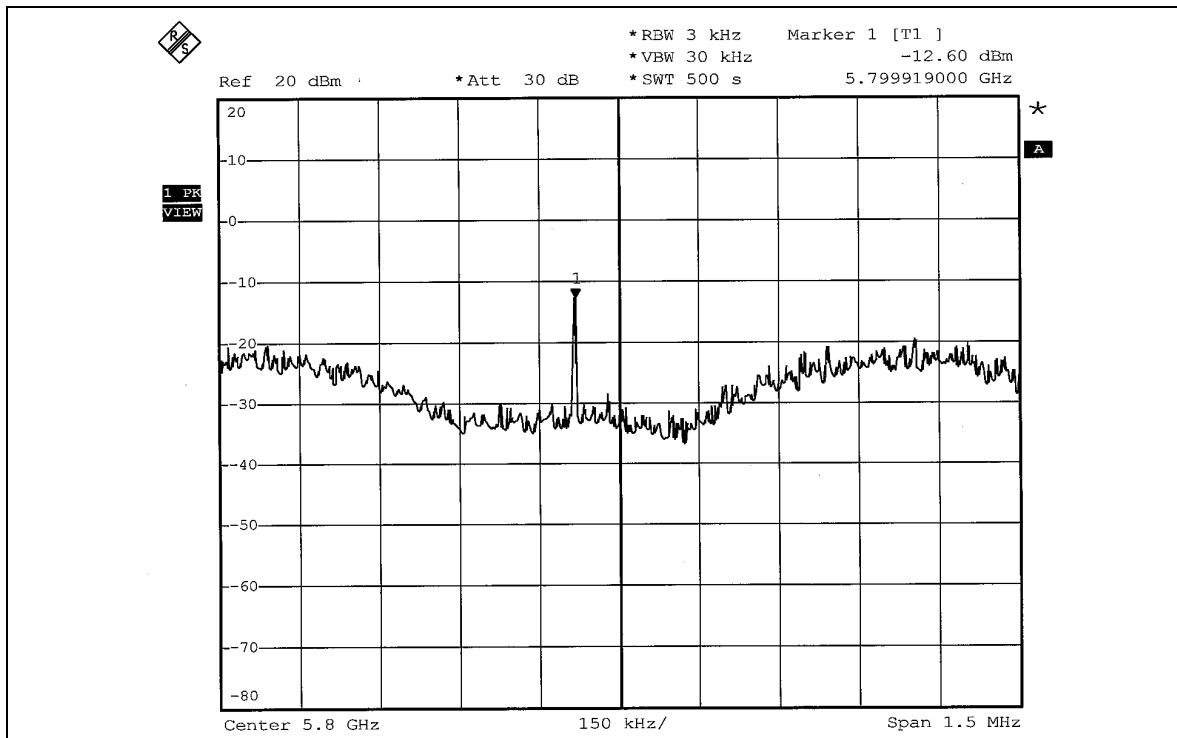

5.6 BAND EDGES MEASUREMENT

5.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

5.6.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
R&S SPECTRUM ANALYZER	FSEK30	100049	Aug. 12, 2005

NOTES:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

5.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low lose cable. Set both RBW and VBW of spectrum analyzer to 100 kHz with suitable frequency span including 100 MHz bandwidth from band edge. The band edges was measured and recorded.

5.6.4 DEVIATION FROM TEST STANDARD

No deviation



5.6.5 EUT OPERATING CONDITION



Same as Item 5.9.6



5.6.6 TEST RESULTS



The spectrum plots are attached on the following pages. D2 line indicates the highest level, D1 line indicates the 20dB offset below D2. It shows compliance with the requirement in part 15.247(d).



802.11a OFDM modulation

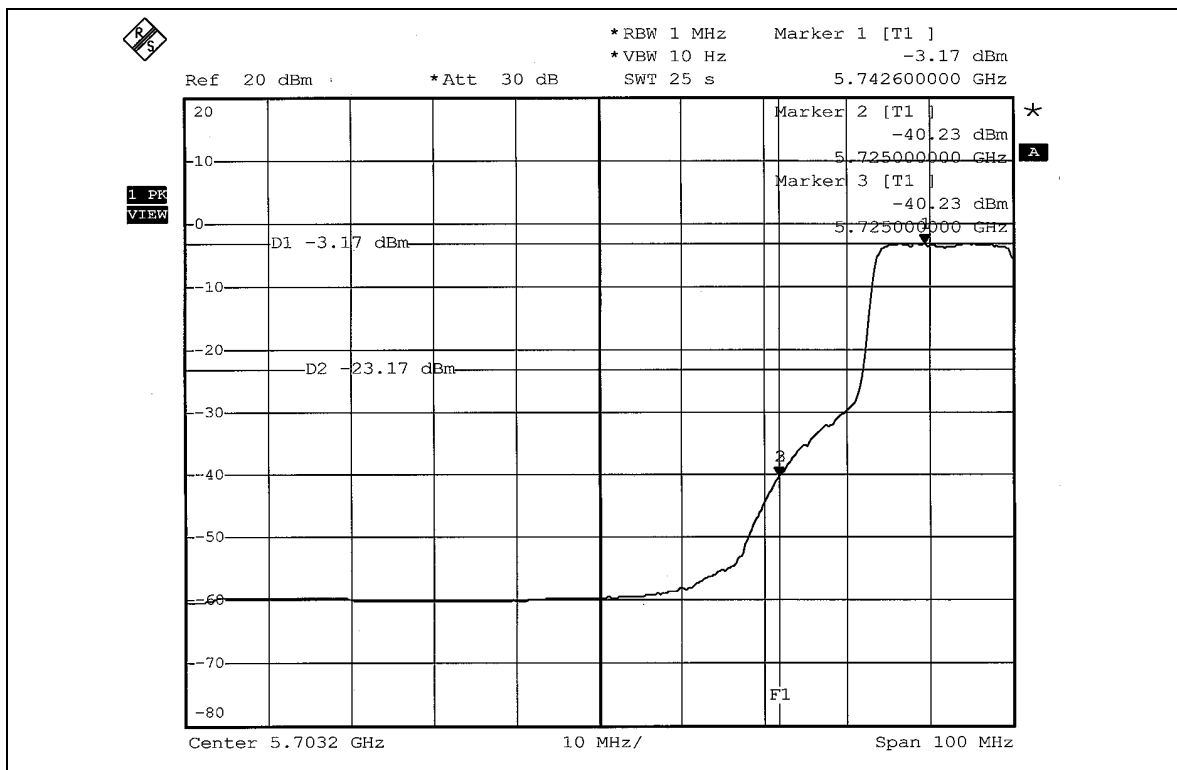
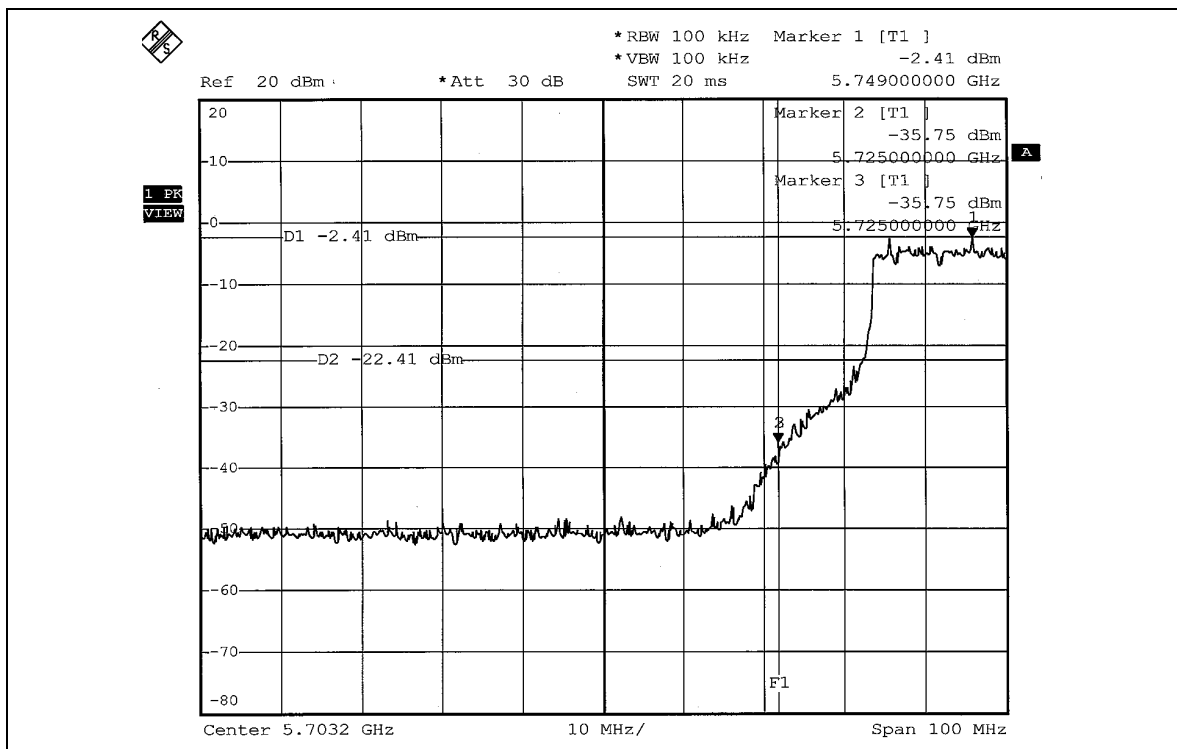


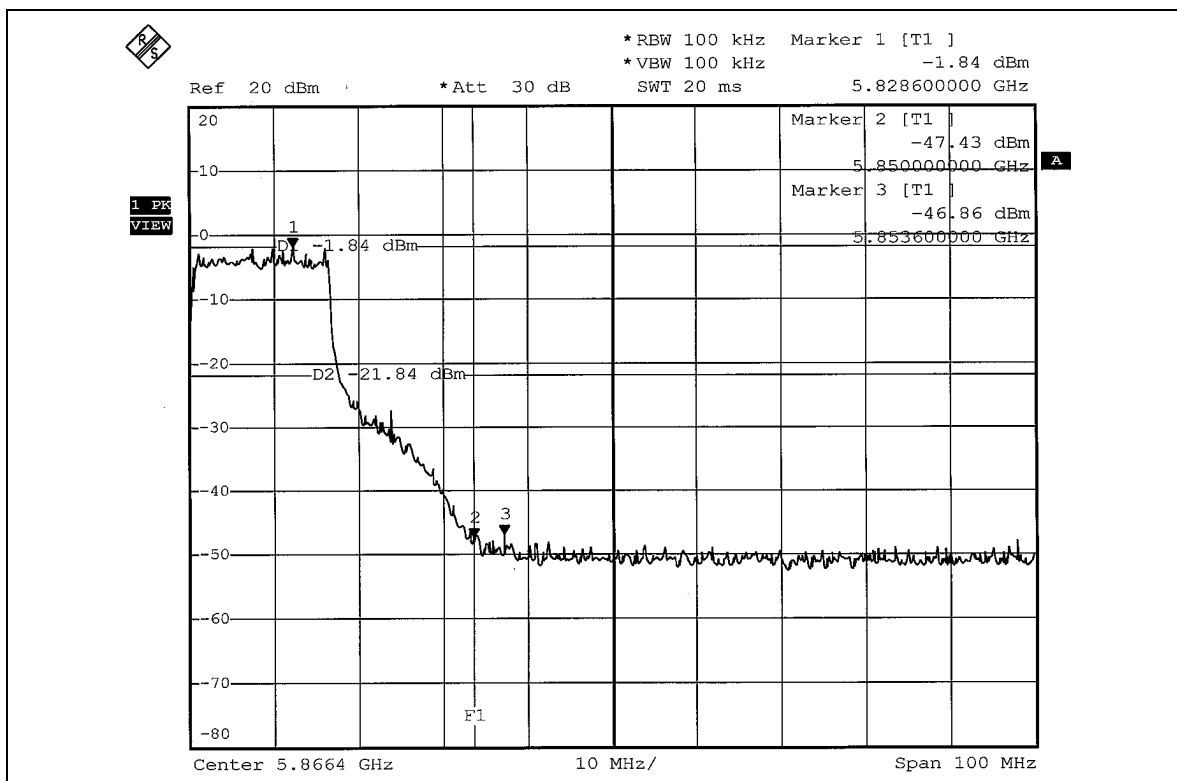
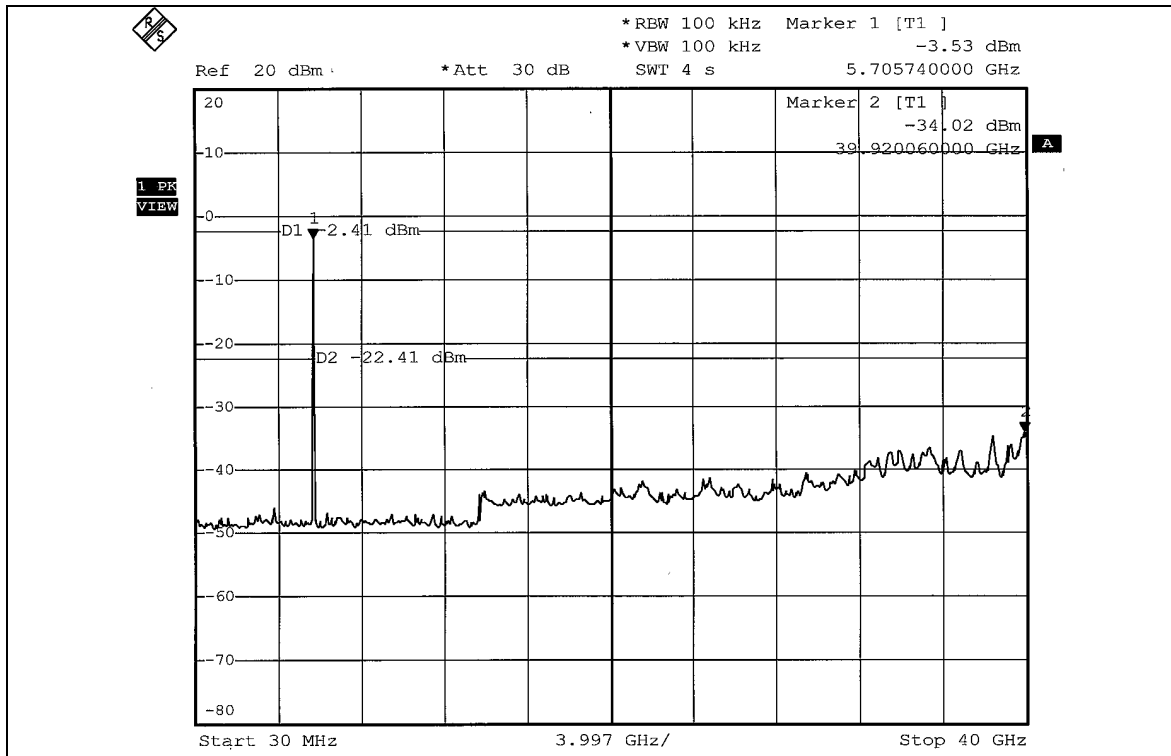


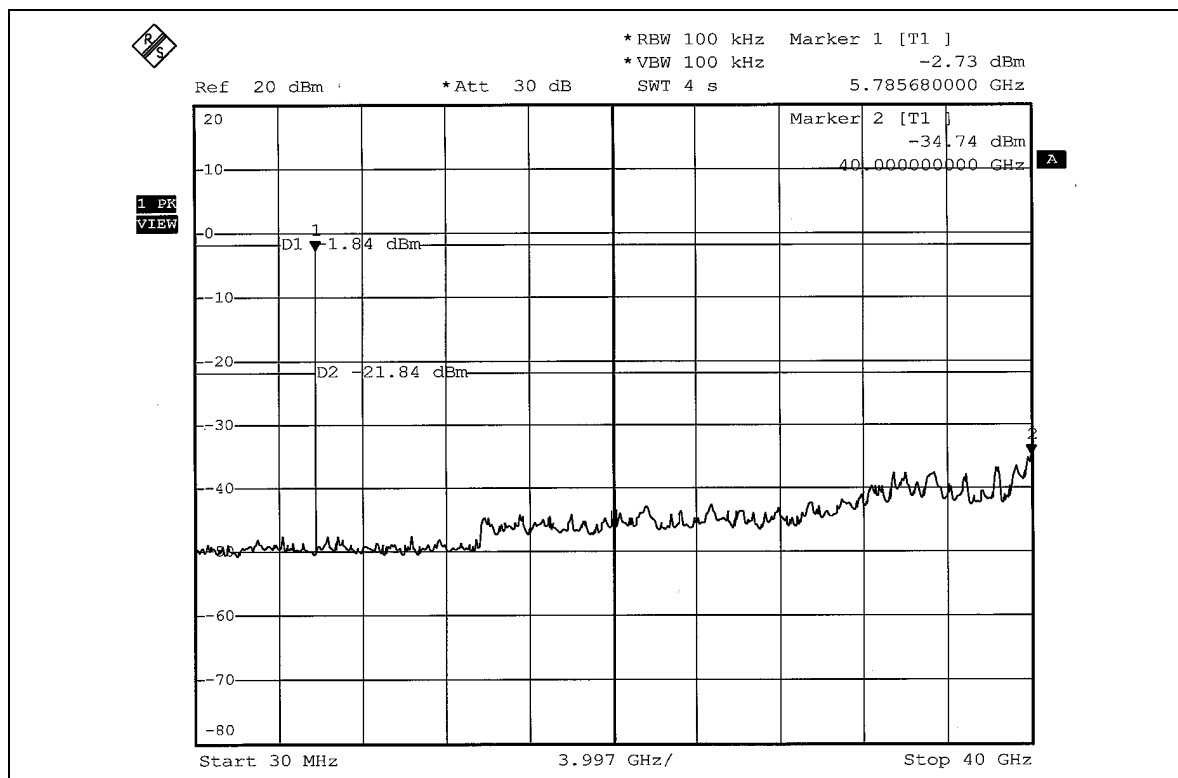
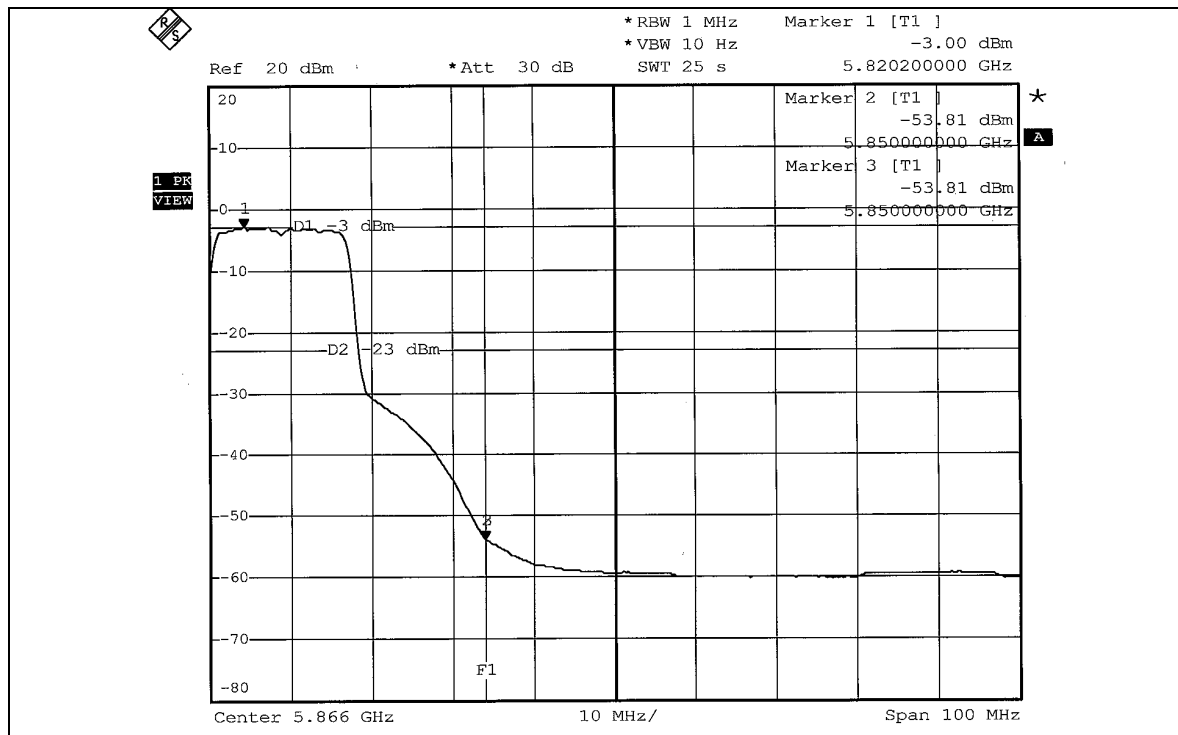




802.11a Turbo OFDM modulation

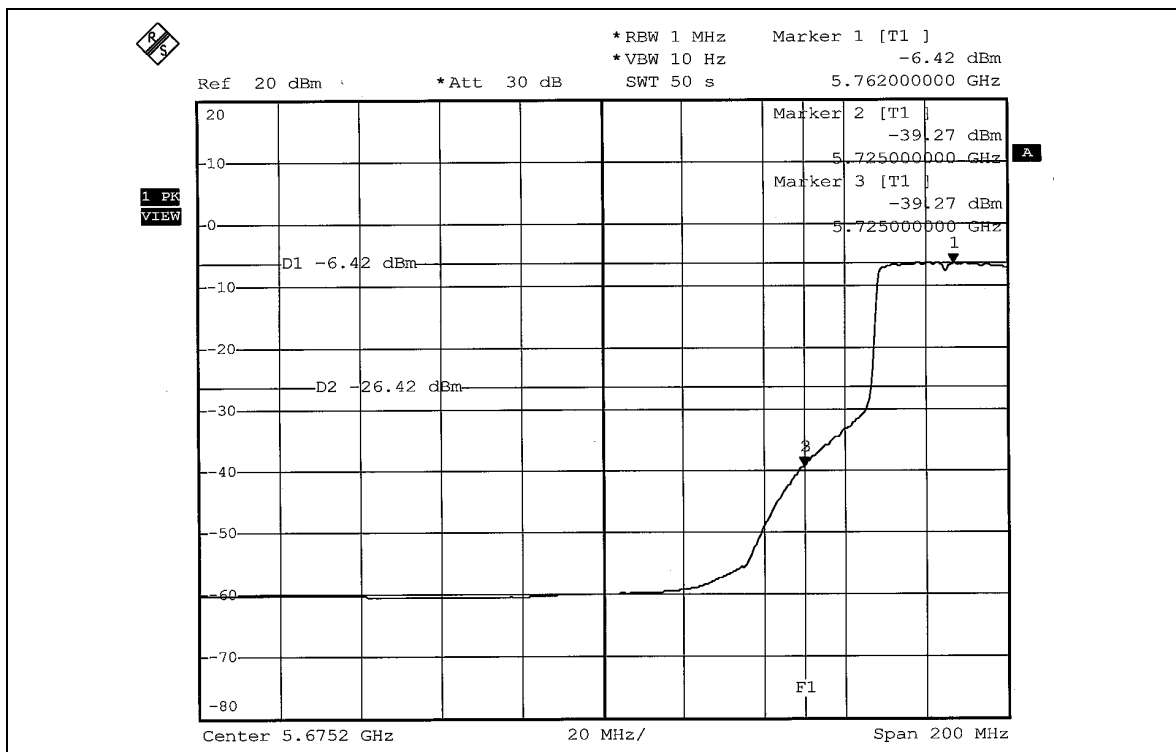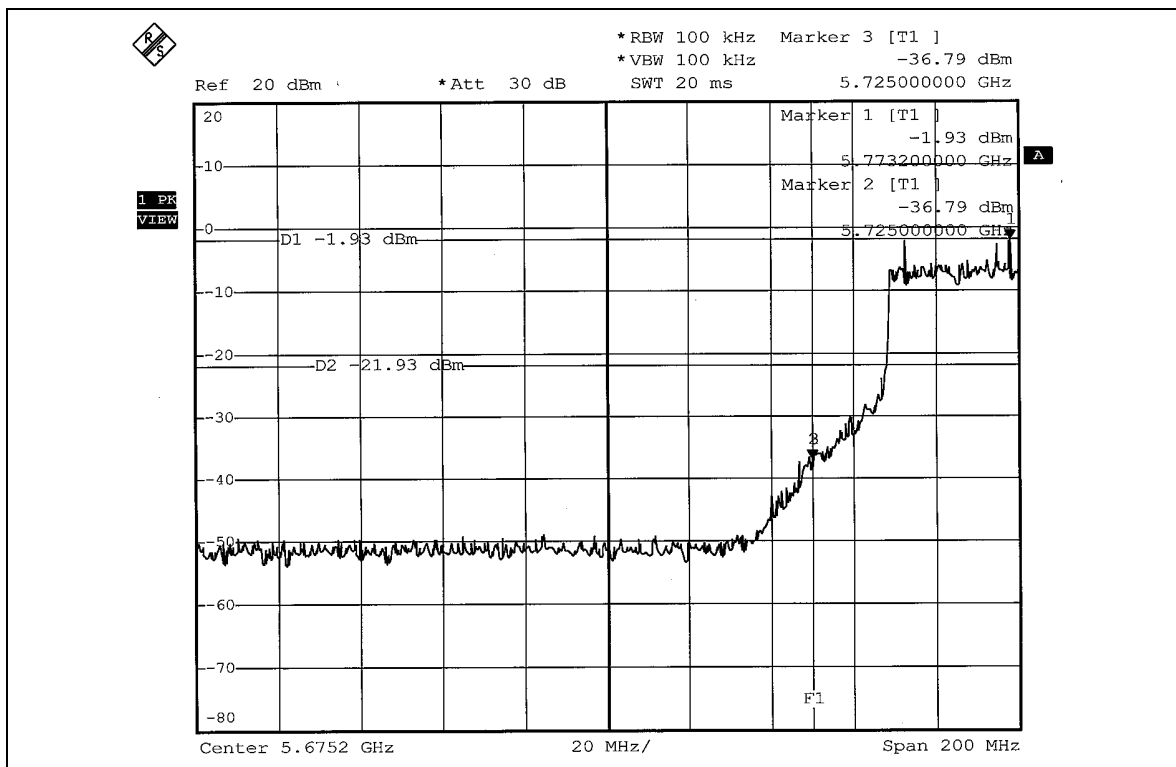

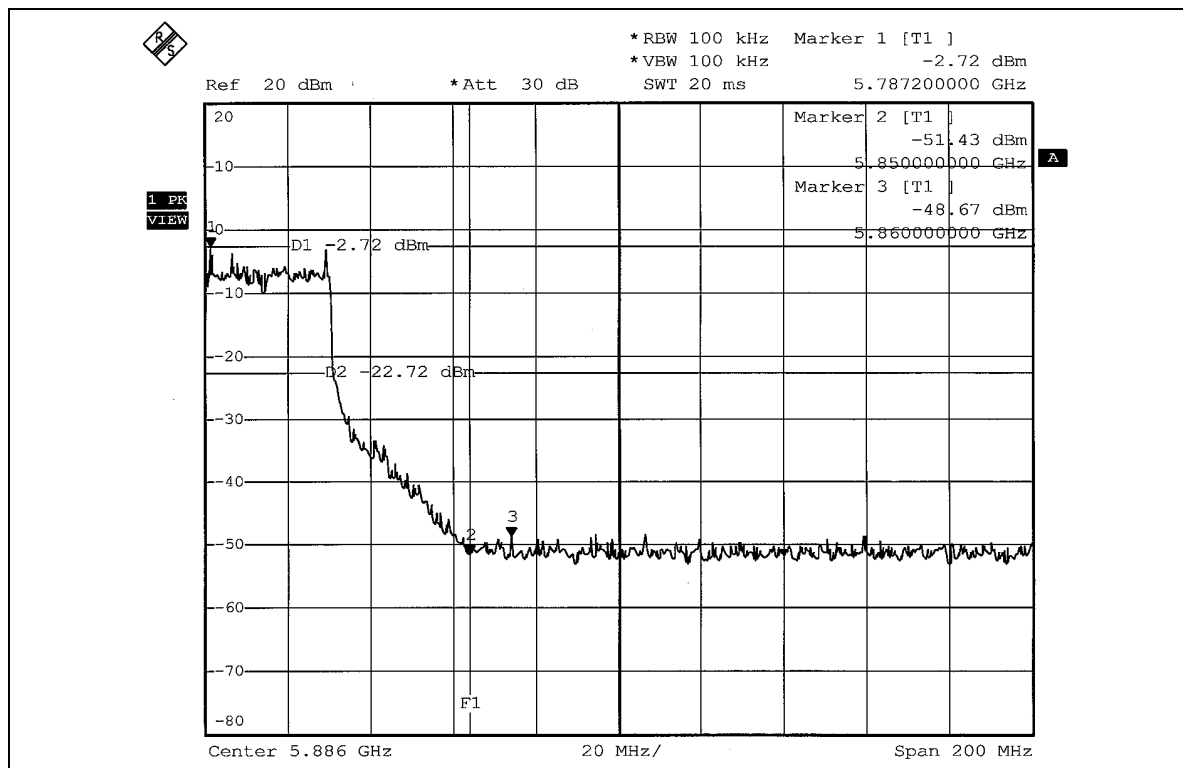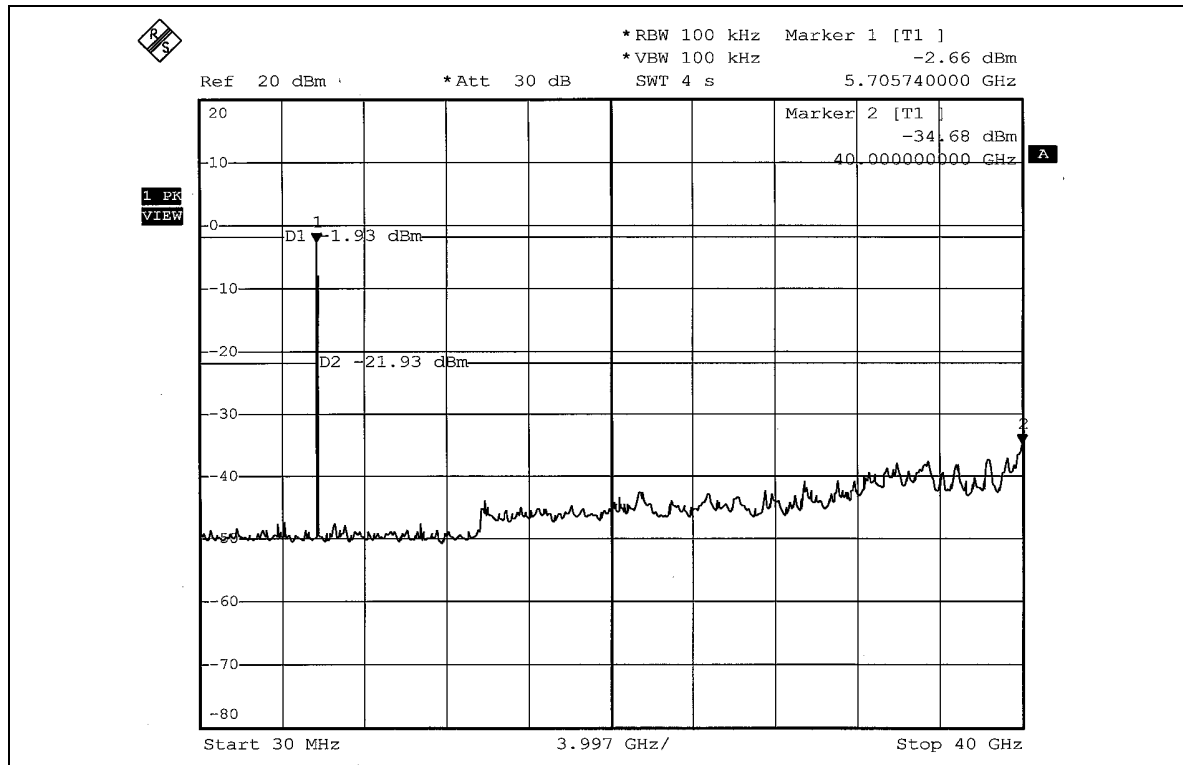

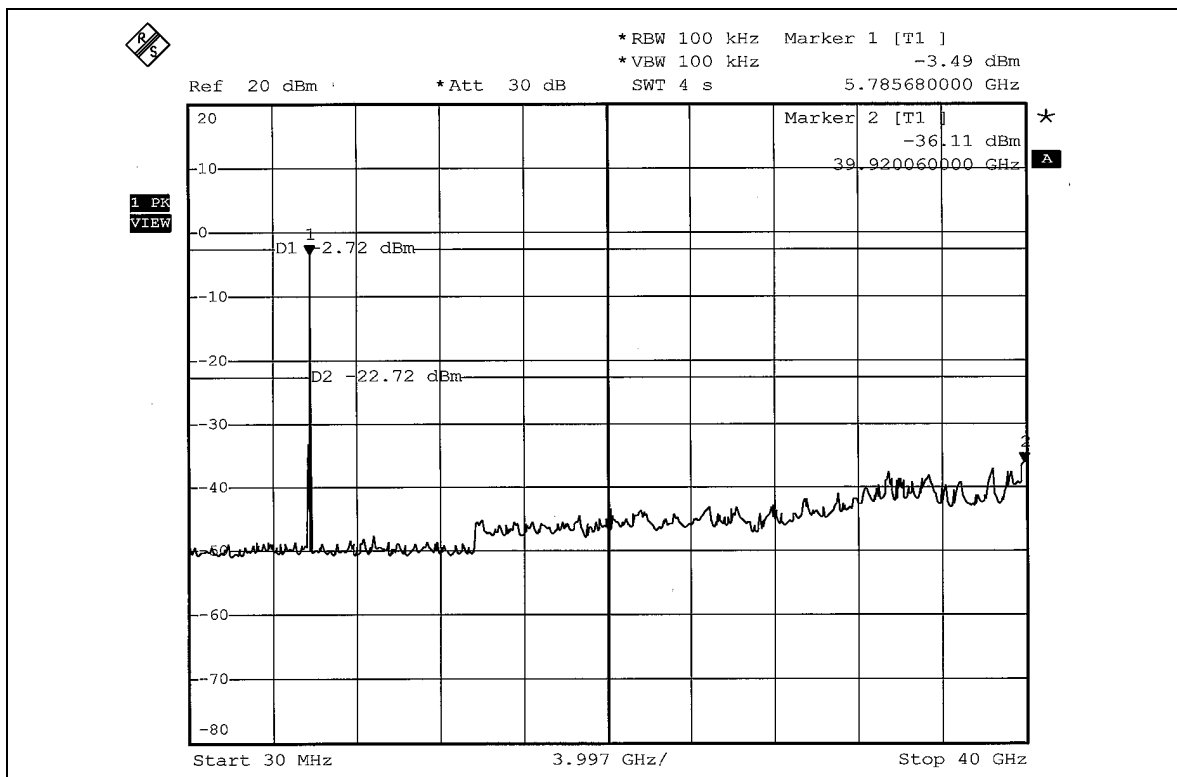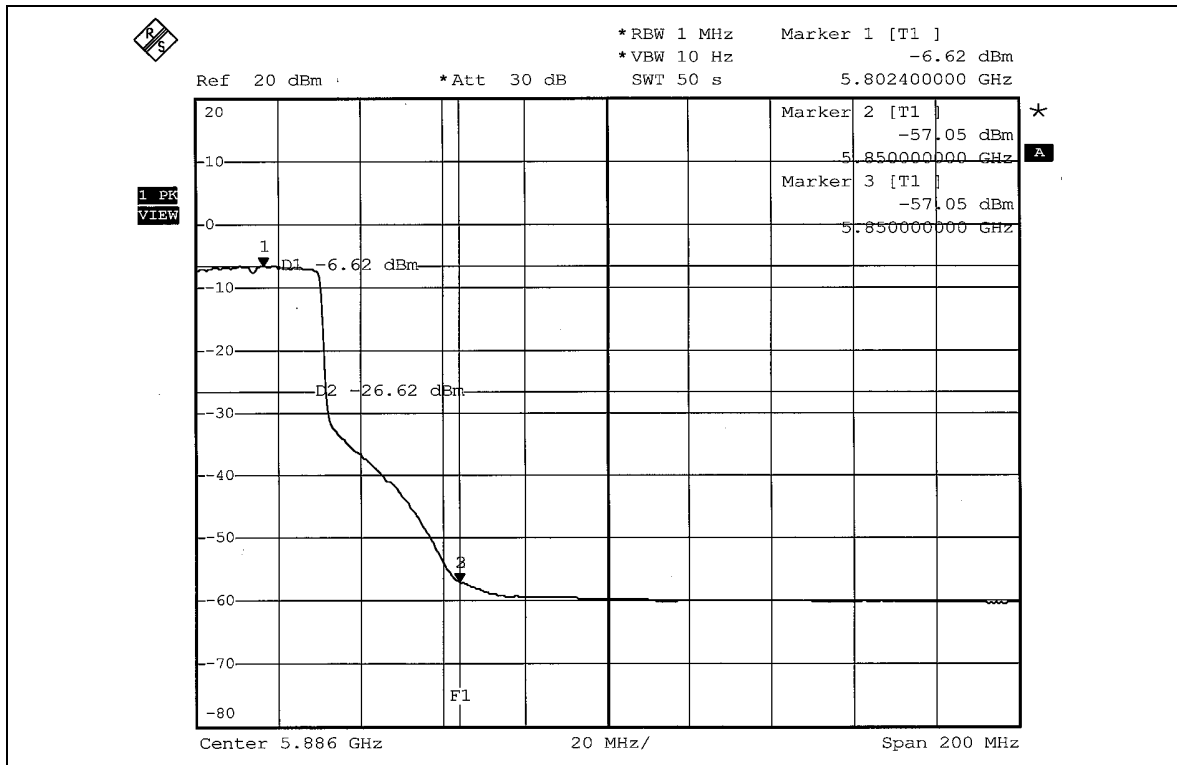



5.7 ANTENNA REQUIREMENT

5.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247(a), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.


5.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Printed antenna without connector. The maximum Gain of the antenna is 3.18dBi.


6. PHOTOGRAPHS OF THE TEST CONFIGURATION

CONDUCTED EMISSION TEST


Test Mode 1

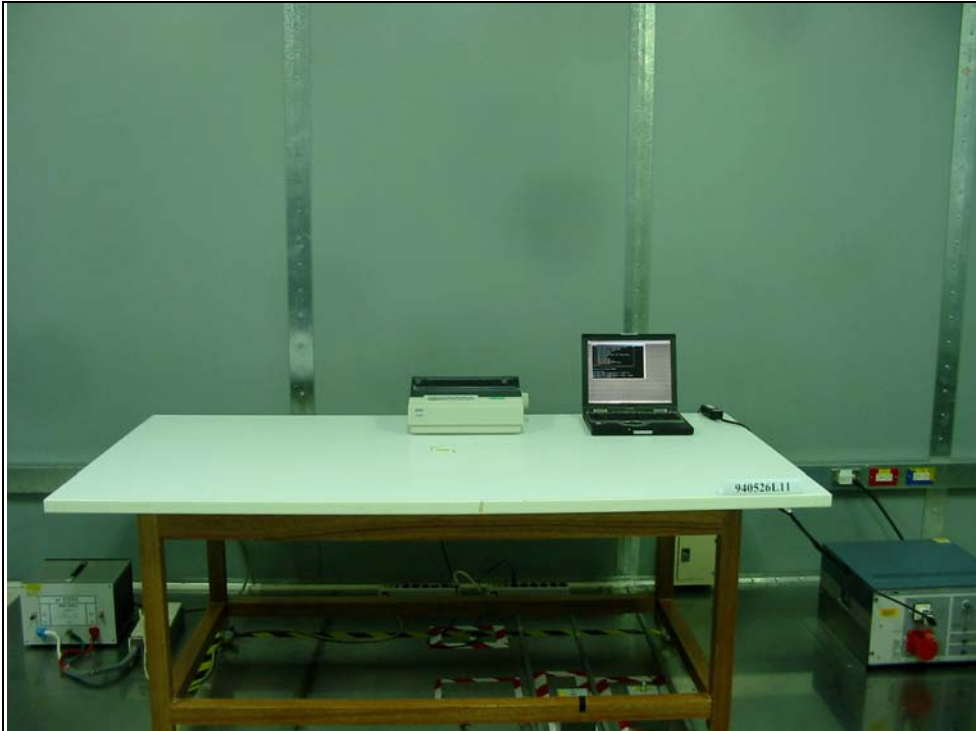


Test Mode 2

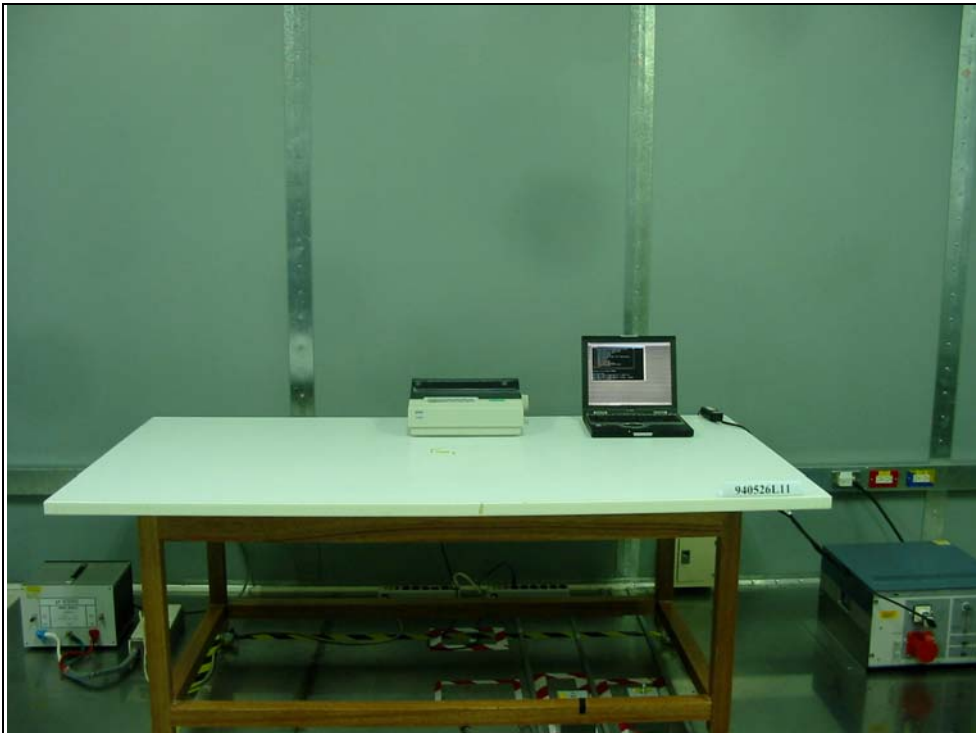

RADIATED EMISSION TEST
Test Mode 1

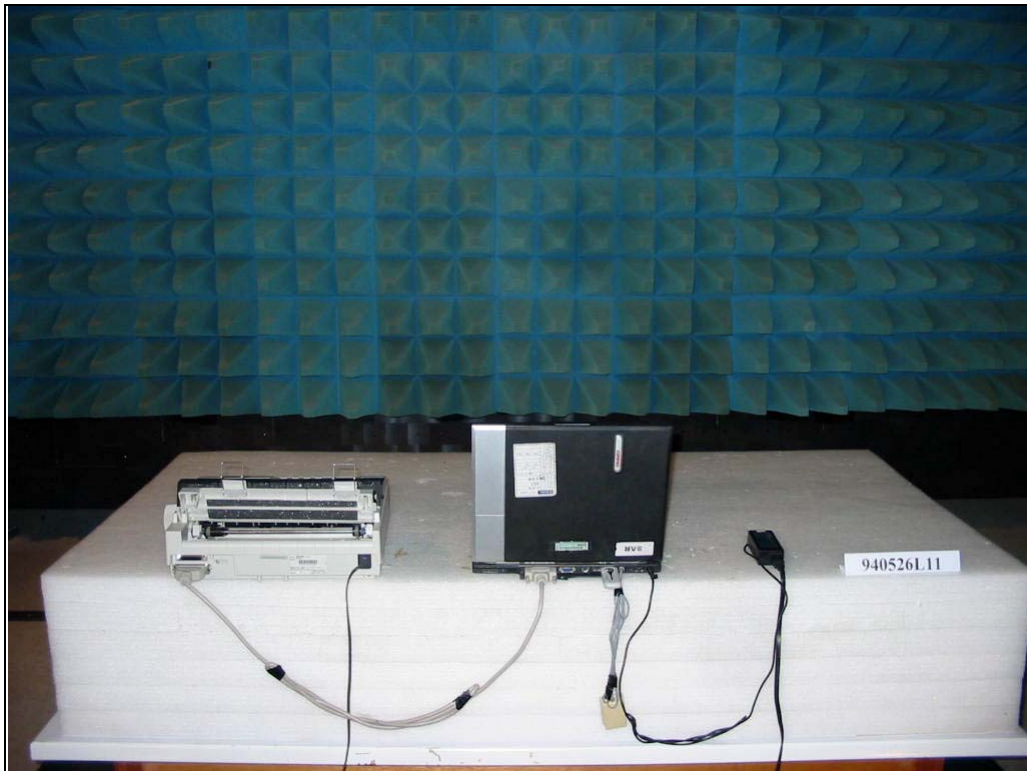

Test Mode 2

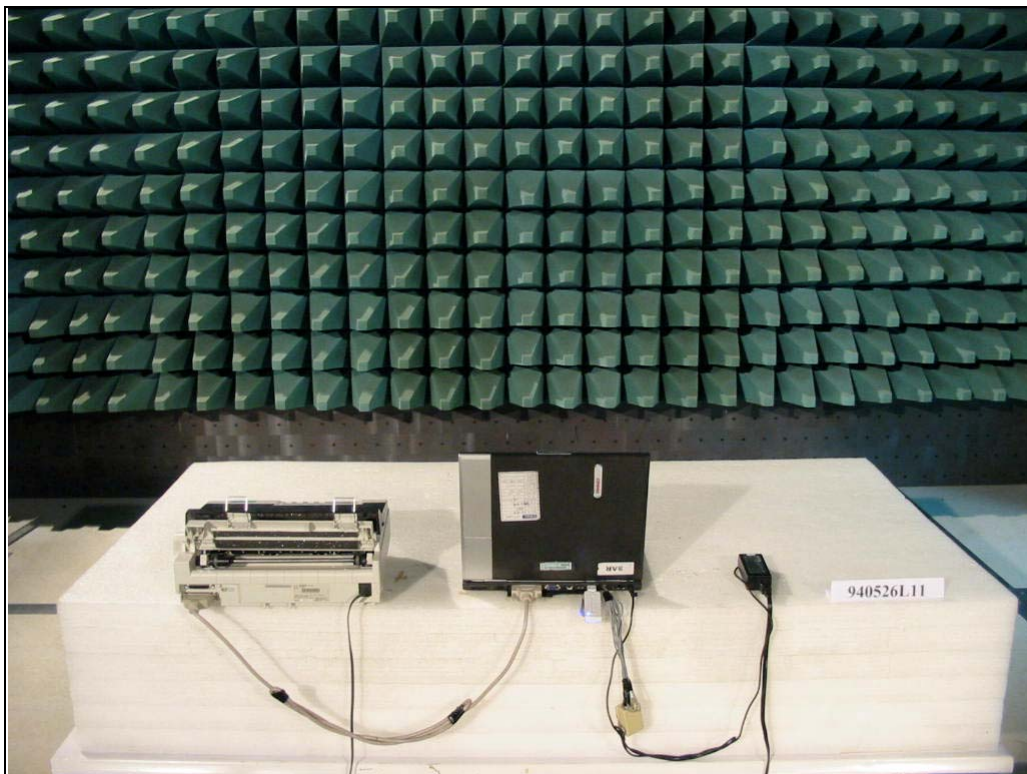



7. INFORMATION ON THE TESTING LABORATORIES

We, ADT Corp., were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP, UL, A2LA
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	CNLA, BSMI, DGT
Netherlands	Telefication
Singapore	PSB , GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Linko RF Lab.

Tel: 886-3-3270910

Fax: 886-3-3270892

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also