

FCC Co-Location Test Report

:	NKRDNXA-GO1
:	802.11 b/g/n 3*3 PCle module
:	DNXA-GO1
:	WNC
:	Wistron NeWeb Corporation
:	20 Park Avenue II, Hsinchu Science Park, Hsinchu 308, Taiwan, R.O.C.
:	47 CFR FCC Part 15.247 47 CFR FCC Part 15.407
:	Jun. 20, 2014
:	Jun. 20, 2014

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:

Gary Chang / Manager





Table of Contents

1	GENERAL DESCRIPTION	.5
1.1	Information	
	The Equipment List	.7
1.3	Test Standards	.8
1.4	Measurement Uncertainty	8
2	TEST CONFIGURATION	9
2.1	Testing Condition	9
2.2	The Worst Test Modes and Channel Details	9
3	TRANSMITTER TEST RESULTS1	0
3.1	Unwanted Emissions into Restricted Frequency Bands1	0
4	TEST LABORATORY INFORMATION1	6



Release Record

Report No.	Version	Description	Issued Date
FR421101-04	Rev. 01	Initial issue	Jun. 24, 2014



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d)			
15.407(b)	Radiated Emissions	[dBuV/m at 3m]: 624.97MHz 39.85 (Margin -6.15dB) – PK	Pass
15.209			



General Description 1

1.1 Information

Specification of the Equipment under Test (EUT) 1.1.1

RF General Information							
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{⊤x})	Data Rate / MCS		
2400-2483.5	b	2412-2462	1-11 [11]	3	1-11 Mbps		
2400-2483.5	g	2412-2462	1-11 [11]	3	6-54 Mbps		
2400-2483.5	n (HT20)	2412-2462	1-11 [11]	3	MCS 0-23		
2400-2483.5	n (HT40)	2422-2452	3-9 [7]	3	MCS 0-23		

Note 1: RF output power specifies that Maximum Conducted (Average) Output Power. Note 2: 802.11b uses a combination of DSSS-DBPSK, DQPSK, CCK modulation. Note 3: 802.11g/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Specific platform Information

Brand Name	Model Name	Product Name	Description
Google	GFRG200	Platform	The platform contains 2 certified wireless modules. One is FCCID: NKRDNXA-GO1 (EUT), the other is FCC ID: NKRDAXA-GO1.

Note: The platform supports simultaneous transmission and separation distance of simultaneous transmitting antennas is less than 20 cm thus evaluation of co-location is required.

Antenna Details of Specific platform 1.1.3

2.4G

3

Brand	Ant. No.	Model	Туре	Gain (dBi)	Connector
	1	1002302	Printed	2.19	UFL
ethertronics	2	1002303	Printed	3.33	UFL
	3	1002304	Printed	4.21	UFL

4.23

Note: Above antennas are certified with wireless modules, FCC ID: NKRDNXA-GO1

5G					
Ant.	Model	Туре	Operating	J Frequencies (N	MHz) / Antenna
No.	model	i ype	5150~5250	5250~5350	5470~5725
1	1002299	Printed	3.88	3.5	4.33
2	1002300	Printed	2.62	3.16	2.46

Printed

4.16 Note: Above antennas are certified with wireless modules, FCC ID: NKRDAXA-GO1

1002301

Connector

UFL

UFL

UFL

Antenna Gain (dBi)

3.65

5725-5850

4.2

4.02

3.43



1.1.4 Accessories of Specific platform

	Accessories					
No.	Equipment	Description				
1	AC adapter	Brand Name: Google Model Name: PB-1600-29 Power Rating: I/P: 100-120Vac, 50-60Hz, 2.0A O/P: 12Vdc, 5A DC 1.75m non-shielded cable w/o core				
2	AC adapter	Brand Name: Google Model Name: OTD018 Power Rating: I/P: 100-120Vac, 50-60Hz, 2.0A O/P: 12Vdc, 5A DC 1.75m non-shielded cable w/o core				



1.2 The Equipment List

Test Item	Radiated Emission						
Test Site	966 chamber1 / (03CH01-WS)						
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until		
Spectrum Analyzer	R&S	FSV40	101498	Jan. 25, 2014	Jan. 24, 2015		
Receiver	R&S	ESR3	101658	Jan. 10, 2014	Jan. 09, 2015		
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-522	Jan. 02, 2014	Jan. 01, 2015		
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Feb. 13, 2014	Feb. 12, 2015		
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Dec. 27, 2013	Dec. 26, 2014		
Preamplifier	Burgeon	BPA-530	SN:100219	Nov. 28, 2013	Nov. 27, 2014		
Preamplifier	Agilent	83017A	MY39501308	Dec. 16, 2013	Dec. 15, 2014		
Preamplifier	WM	TF-130N-R1	923365	Oct. 23, 2013	Oct. 22, 2014		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 16, 2013	Dec. 15, 2014		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 16, 2013	Dec. 15, 2014		
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 16, 2013	Dec. 15, 2014		
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-001	Dec. 16, 2013	Dec. 15, 2014		
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-002	Dec. 16, 2013	Dec. 15, 2014		

Loop Antenna	R&S	HFH2-Z2	100330	Nov. 15, 2012	Nov. 14, 2014		
Note: Calibration Interv	Note: Calibration Interval of instruments listed above is two year.						



1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 47 CFR FCC Part 15.407 ANSI C63.10-2009 FCC KDB 789033 D01 General UNII Test Procedures Old Rules v01r04 FCC KDB 558074 D01 DTS Meas Guidance v03r02

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty					
Parameters	Uncertainty				
Radiated emission < 1GHz	±3.26 dB				
Radiated emission > 1GHz	±4.94 dB				



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	25°C / 62-65%	Anderson Hung Haru Yang

➢ FCC site registration No.: 657002

➤ IC site registration No.: 10807A-1

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Channel	Data rate (Mbps) / MCS	Test Configuration						
Radiated Emissions	2.4G 11n 20 + 5G 11ac VHT40	CH6 + CH159	MCS 0 + MCS 0							
 Note: 1) 2 AC adapters are used for this device, and both had been covered during the pretest in the original report. The worst adapter is AC adapter 2. 2) The selected channel is the maximum power channel of each Wi-Fi module. 										



3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit										
Frequency Range (MHz)	requency Range (MHz) Field Strength (uV/m) Field Strength (dBuV/m)									
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300							
0.490~1.705	24000/F(kHz)	33.8 - 23	30							
1.705~30.0	30	29	30							
30~88	100	40	3							
88~216	150	43.5	3							
216~960	200	46	3							
Above 960	500	54	3							

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.2 Test Procedures


- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at a height of 0.8 m test table above the ground plane.
- Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.



3.1.3 Test Setup

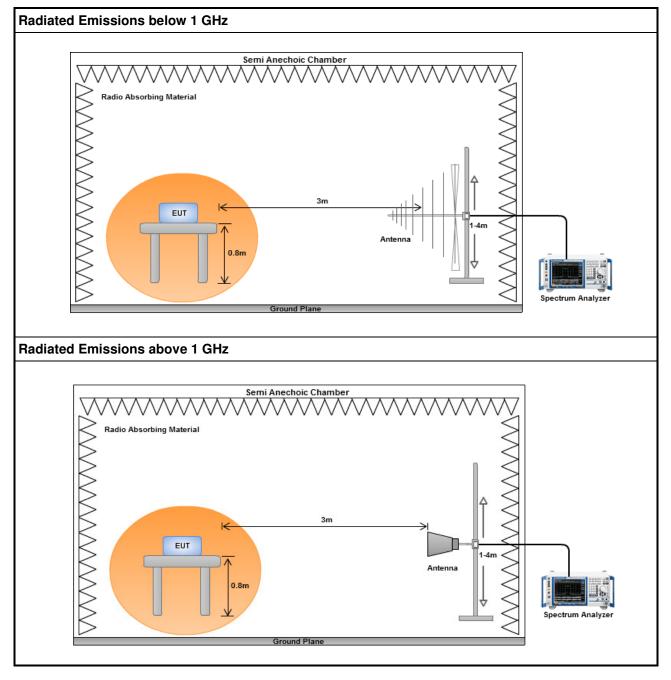




Modulation										
Polarization	Horizontal									
80 Level (d	BuV/m)									
00										
70										
60					FCC CLASS-B					
50										
		3		5	6					
40		2	4	ĭ						
30 1										
JU 1										
20										
10										
0	0. 200. 3	300. 400. 5 00.	600. 700.	800.	900. 100	•				
50 10	u. 200. J	Frequency (800.	900. 100	U				
		on Limit Margin 🤉		Remark	ANT Tur					
	level		ding		-	ble				
	MHz dBuV/m	n dBuV/m dB dB	BuV dB		cm deg	g				
1	63.95 25.93	40.00 -14.07 43	-18.04	Peak						
2			.66 -16.16	Peak						
3			.96 -14.37	Peak						
4			.06 -9.95	Peak						
5			.90 -7.24	Peak						
6	874.91 39.22	2 46.00 -6.78 4	5.05 -5.83	Peak						
Note 1: Emission Level (*Factor includes a Note 2: Margin (dB) = Ei	antenna factor	, cable loss and amp	lifier gain							

3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)



Modulation	ו		2.40	6 11n 20	+ 5G 1	1ac VHT	40 T e	est Char	nnel	CH6 -	+ CH159
Polarizatio	n		Verti	cal							
	80	Level (d	iBuV/m)								
	70										
	60										
										FCC CLAS	SS-B
	50										
	40				2		3	4	5	6	
		1									
	30										
	20										
	10										
	10										
	0	30 10	0. 20	0. 30	0. 4	00. 50)0. 70	0. 800.	900.	1000
			_				ncy (MHz)				_
			Freq. E	mission level	Limit	Margin	SA readin	Factor	Remark	ANT High	Turn Table
			MHz	dBuV/m	dBuV/	m dB	dBuV	в dB		cm	deg
	1					-6.33		-18.26			
	2 3			39.31 39.20		-6.69 -6.80	53.66 49.00				
	4		624.97	39.85	46.00	-6.15		-9.19			
	5					-6.47	46.77				
	6		874.92	39.22	46.00	-6.78	45.05	-5.83	Peak		
Note 1: Em)		
*Fac	tor incl	udes	antenna	factor,	cable lo	oss and a	amplifier	gain			
Note 2: Mai	rgin (de	3) = E	mission	ievel (de	suv/m)	– Limit (aBuV/m	I).			



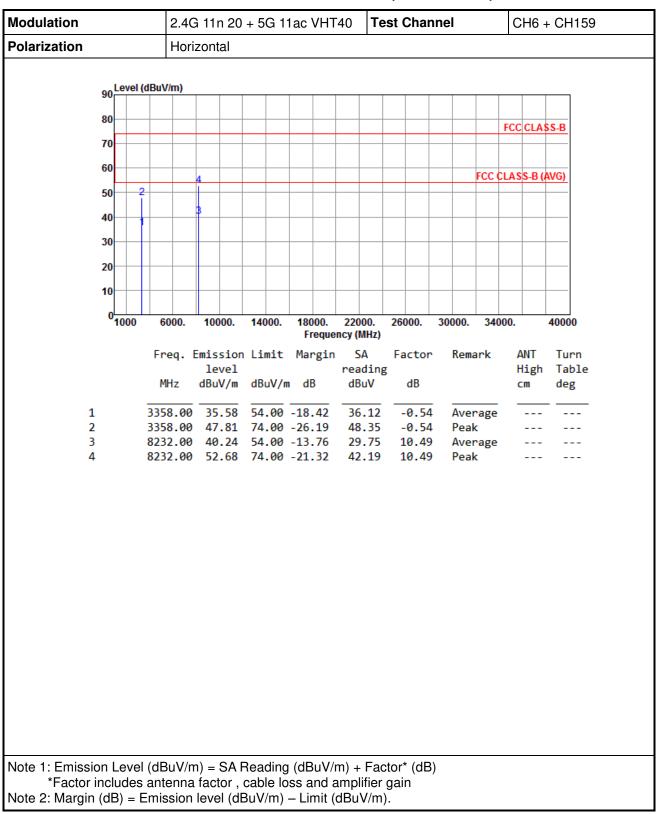

3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)



Modulation 2.4G 11n 20 + 5G 11ac VHT40									Te	st Cha	nne	CH6 + CH159						
Polarization			V	'ertic	al													
		Level	(dBuV/m	1)														
	90																	
	80								_							FCC CI	LASS	S-B
	70					_		-										
	60																	
				4		_		_							FCC C	LASS-	B (A\	/G)
	50		2	3														
	40			Ŧ					_									
	30					_		_										
	20																	
	10																	
	(1000	600	0.	10000). ·	14000.		8000. Freque)00. MH7)	26000.	30	000.	3400	00.	4	40000
			Freq	į. Er			Limit		argin	5	A	Facto	r	Rema	ark	AN		Turn
			MHz		leve		dBuV/	-	dB		ding BuV	dB				Hig cm		Table deg
			11112		JDUV/		ubuv/		ub	u	uv.	ub				CIII		ueg
	1		3358.								.41				rage			
	2 3		3358. 8232.								.33	-0.5 10.4		Peak	k nage			
	4		8232.								2.53			Peak				
lote 1: Emis	sion	Leve	l (dBu	V/m)	= S	A Re	adin	a (c	D. \//	m).	Гоо	tor* (d)	3)					
			anter										-,					



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou	Kwei Shan
Tel: 886-3-2601-1640	Tel: 886-3-271-86
No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C.	No. 3-1, Lane 6, V Hsiang, Tao Yuan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan Hsiang, Tao Yuan Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155 Email: ICC_Service@icertifi.com.tw

—END—