



A D T

RF TEST REPORT

REPORT NO.: RF120221E06

MODEL NO.: EFT-H1

FCC ID: NKREFT-H1

RECEIVED: Feb. 21, 2012

TESTED: Mar. 08 to 15, 2012

ISSUED: Mar. 20, 2012

APPLICANT: Wistron NeWeb Corp.

ADDRESS: 20 Park Avenue II, Hsinchu Science
Park, Hsinchu 308, Taiwan, R.O.C.

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch Hsin Chu Laboratory

LAB ADDRESS : No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (1): No. 81-1, Lu Liao Keng, 9th Ling, Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

TEST LOCATION (2): No. 49, Ln. 206, Wende Rd., Shangshan Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan,
R.O.C.

This test report consists of 61 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product certification, approval, or endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

Table of Contents

RELEASE CONTROL RECORD	4
1. CERTIFICATION	5
2. SUMMARY OF TEST RESULTS	6
2.1 MEASUREMENT UNCERTAINTY	7
3. GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	10
3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	11
3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS	14
3.4 DESCRIPTION OF SUPPORT UNITS	15
3.5 CONFIGURATION OF SYSTEM UNDER TEST	16
4. TEST TYPES AND RESULTS	17
4.1 CONDUCTED EMISSION MEASUREMENT	17
4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT	17
4.1.2 TEST INSTRUMENTS	17
4.1.3 TEST PROCEDURES	18
4.1.4 DEVIATION FROM TEST STANDARD	18
4.1.5 TEST SETUP	19
4.1.6 EUT OPERATING CONDITIONS	19
4.1.7 TEST RESULTS	20
4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT	22
4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	22
4.2.2 TEST INSTRUMENTS	23
4.2.3 TEST PROCEDURES	26
4.2.4 DEVIATION FROM TEST STANDARD	26
4.2.5 TEST SETUP	27
4.2.6 EUT OPERATING CONDITIONS	28
4.2.7 TEST RESULTS	29
4.3 6dB BANDWIDTH MEASUREMENT	42
4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT	42
4.3.2 TEST INSTRUMENTS	42
4.3.3 TEST PROCEDURE	42
4.3.4 DEVIATION FROM TEST STANDARD	42
4.3.5 TEST SETUP	42
4.3.6 EUT OPERATING CONDITIONS	43
4.3.7 TEST RESULTS	44
4.4 CONDUCTED OUTPUT POWER	46



A D T

4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	46
4.4.2	INSTRUMENTS	46
4.4.3	TEST PROCEDURES	46
4.4.4	DEVIATION FROM TEST STANDARD	46
4.4.5	TEST SETUP	46
4.4.6	EUT OPERATING CONDITIONS	46
4.4.7	TEST RESULTS	47
4.5	POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	49
4.5.2	TEST INSTRUMENTS	49
4.5.3	TEST PROCEDURE	49
4.5.4	DEVIATION FROM TEST STANDARD	49
4.5.5	TEST SETUP	49
4.5.6	EUT OPERATING CONDITION	50
4.5.7	TEST RESULTS	51
4.6	CONDUCTED OUT-BAND EMISSION MEASUREMENT	53
4.6.1	LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT	53
4.6.2	TEST INSTRUMENTS	53
4.6.3	TEST PROCEDURE	53
4.6.4	DEVIATION FROM TEST STANDARD	54
4.6.5	TEST SETUP	54
4.6.6	EUT OPERATING CONDITION	54
4.6.7	TEST RESULTS	54
5.	PHOTOGRAPHS OF THE TEST CONFIGURATION	59
6.	INFORMATION ON THE TESTING LABORATORIES	60
7.	APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	61



A D T

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120221E06	Original release	Mar. 20, 2012



A D T

1. CERTIFICATION

PRODUCT: Home Gateway
BRAND NAME: SONY
MODEL NO.: EFT-H1
TEST SAMPLE: ENGINEERING SAMPLE
APPLICANT: Wistron NeWeb Corp.
TESTED: Mar. 08 to 15, 2012
STANDARDS: **FCC Part 15, Subpart C (Section 15.247)**
ANSI C63.10-2009

The above equipment (Model: EFT-H1) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY :  , **DATE:** Mar. 20, 2012
(Elsie Hsu, Specialist)

APPROVED BY :  , **DATE:** Mar. 20, 2012
(May Chen, Deputy Manager)

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC PART 15, SUBPART C (SECTION 15.247)			
STANDARD SECTION	TEST TYPE	RESULT	REMARK
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -8.99dB at 12.62893MHz
15.247(d) 15.209	Radiated Emissions	PASS	Meet the requirement of limit. Minimum passing margin is -0.50dB at 2483.50MHz
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.
15.247(a)(2)	6dB bandwidth	PASS	Meet the requirement of limit.
15.247(b)	Conducted power	PASS	Meet the requirement of limit.
15.247(e)	Power Spectral Density	PASS	Meet the requirement of limit.
15.203	Antenna Requirement	PASS	Antenna connector is IPEX not a standard connector.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Conducted emissions	2.45 dB
Radiated emissions (30MHz-1GHz)	3.89 dB
Radiated emissions (1GHz -18GHz) 966 Chamber G	2.19 dB
Radiated emissions (18GHz -40GHz) 966 Chamber G	2.56 dB
Radiated emissions (1GHz -18GHz) Open Site C	2.49 dB
Radiated emissions (18GHz -40GHz) Open Site C	2.70 dB



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Home Gateway
MODEL NO.	EFT-H1
POWER SUPPLY	DC 12V from power adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: up to 11Mbps 802.11g: up to 54Mbps 802.11n (20MHz, 800ns GI): up to 130Mbps 802.11n (40MHz, 800ns GI): up to 270Mbps 802.11n (20MHz, 400ns GI): up to 144.4Mbps 802.11n (40MHz, 400ns GI): up to 300Mbps
OPERATING FREQUENCY	2412MHz ~ 2462MHz
NUMBER OF CHANNEL	802.11b & 802.11g & 802.11n (20MHz): 13 802.11n (40MHz): 9
MAXIMUM OUTPUT POWER	802.11b: 112.5mW 802.11g: 492.1mW 802.11n (20MHz): 508.2mW 802.11n (40MHz): 385.5mW
ANTENNA TYPE	Please see note
DATA CABLE	NA
I/O PORTS	Refer to user's manual
ASSOCIATED DEVICES	Adapter x 1

NOTE:

1. There are Zigbee technology and WiFi technology used for the EUT. <the Zigbee test data please refer to Report No.: RF120221E06-1>

2. There are three antennas provided to this EUT, please refer to the following table:

Ant.	Gain(dBi)	Antenna Type	Connector Type	Cable Length
Zigbee Antenna 1	2.27	Dipole	IPEX	60mm
WiFi Antenna 2	6.29	Internal Antenna	IPEX	130mm
WiFi Antenna 3	5.09	Internal Antenna	IPEX	150mm

3. The EUT must be supplied with a power supply as below table:

Brand	Model No.	Spec.
SONY	AC-NB12A	AC I/P: 100~240V, 50/60Hz, 0.65A~0.35A AC Input cable (unshielded, 1m) DC O/P: 12V, 2.5A DC output cable (unshielded, 1.07m)

4. Spurious emission of the simultaneous operation (WiFi & Zigbee) has been evaluated and no non-compliance was found.

5. The EUT is 2 * 2 spatial MIMO (2Tx & 2Rx) without beam forming function.

6. When the EUT operating in 802.11n, the software operation, which is defined by manufacturer, MCS (Modulation and Coding Schemes) from 0 to 15.

7. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Eleven channels are provided for 802.11b, 802.11g, 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
3	2422MHz	7	2442MHz
4	2427MHz	8	2447MHz
5	2432MHz	9	2452MHz
6	2437MHz		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO					DESCRIPTION
	PLC	RE < 1G	RE ≥ 1G	APCM	OB	
-	√	√	√	√	√	-

Where **PLC**: Power Line Conducted Emission **RE < 1G**: Radiated Emission below 1GHz
RE ≥ 1G: Radiated Emission above 1GHz **APCM**: Antenna Port Conducted Measurement
OB: Conducted Out-Band Emission Measurement

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11n (20MHz)	1 to 11	6	OFDM	BPSK	6.5



RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5

CONDUCTED OUT-BAND EMISSION MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
802.11n (40MHz)	3 to 9	3, 6, 9	OFDM	BPSK	13.5



A D T

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
PLC	26deg. C, 65%RH	120Vac, 60Hz	Kyle Huang
RE<1G	27deg. C, 69%RH	120Vac, 60Hz	Amos Chuang
RE ³ 1G	21deg. C, 74%RH 23deg. C, 71%RH	120Vac, 60Hz	Robert Cheng
APCM	25deg. C, 60%RH	120Vac, 60Hz	Kent Liu
OB	25deg. C, 60%RH	120Vac, 60Hz	Kent Liu

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	DELL	PP32LA	FSLB32S	FCC DoC
2	iPod	Apple	MC749TA/A	CC4DMFJUDFDM	NA
		Apple	MC749TA/A	CC4DN25WDFDM	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (10m)
2	USB cable (0.1m)

NOTE: All power cords of the above support units are non shielded (1.8m).

3.5 CONFIGURATION OF SYSTEM UNDER TEST

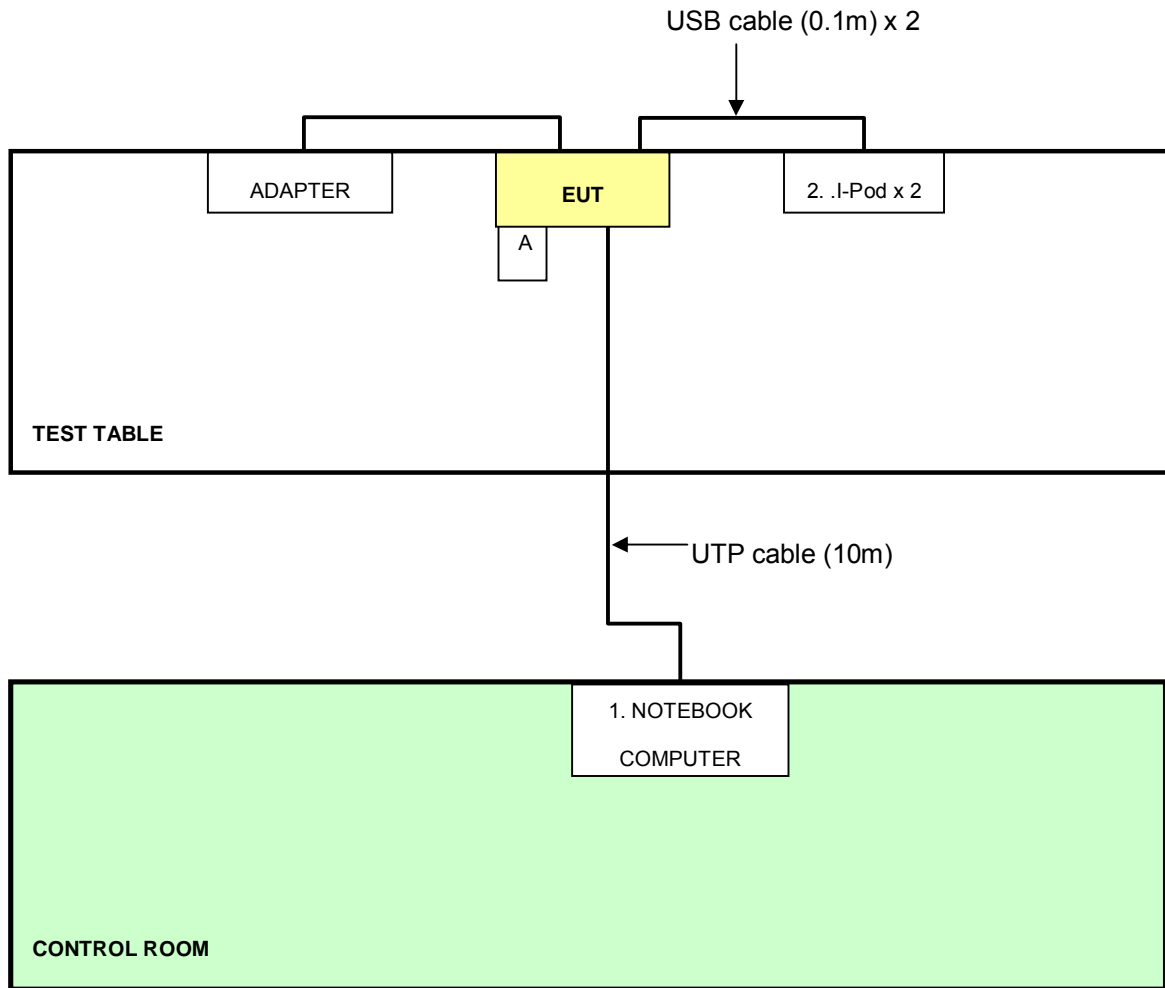

NOTE: Item A is a SD Card.



A D T

4. TEST TYPES AND RESULTS

4.1 CONDUCTED EMISSION MEASUREMENT

4.1.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Test Receiver	ESCS 30	100287	Feb. 29, 2012	Feb. 28, 2013
Line-Impedance Stabilization Network (for EUT)	NSLK 8127	8127-523	Sep. 20, 2011	Sep. 19, 2012
Line-Impedance Stabilization Network (for Peripheral)	ENV-216	100072	June 10, 2011	June 09, 2012
RF Cable (JYEBAO)	5DFB	CONCAB-003	Aug. 05, 2011	Aug. 04, 2012
50 ohms Terminator	50	3	Nov. 02, 2011	Nov. 01, 2012
Software	BV ADT_Cond_V7.3.7	NA	NA	NA

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Shielded Room No. A.
3. The VCCI Con A Registration No. is C-817.
4. Tested Date: Mar. 08, 2012


4.1.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) were not recorded.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation

4.1.5 TEST SETUP

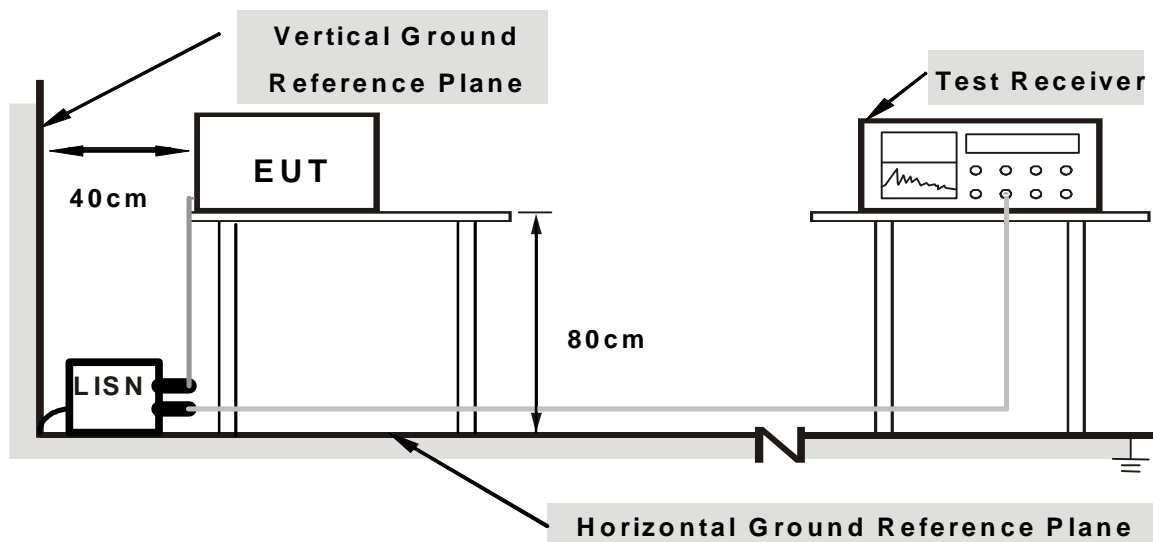

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.1.6 EUT OPERATING CONDITIONS


1. Placed the EUT on testing table.
2. Prepared other computer system (support unit 1) to act as communication partner and placed them outside of testing area.
3. The communication partner ran test program “art.exe v0 9 b34.1 ar928xALL” to enable EUT under transmission/receiving condition continuously via one UTP cable transmission.

4.1.7 TEST RESULTS

PHASE	Line (L)	6dB BANDWIDTH	9 kHz
--------------	----------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value		Emission Level		Limit		Margin	
			[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16561	0.06	51.86	45.38	51.92	45.44	65.18	55.18	-13.26	-9.74
2	0.20857	0.06	45.67	38.01	45.73	38.07	63.26	53.26	-17.53	-15.19
3	0.41561	0.07	34.68	30.84	34.75	30.91	57.54	47.54	-22.78	-16.62
4	1.61789	0.15	29.79	27.25	29.94	27.40	56.00	46.00	-26.06	-18.60
5	4.72655	0.31	34.22	20.16	34.53	20.47	56.00	46.00	-21.47	-25.53
6	12.63284	0.51	41.13	39.75	41.64	40.26	60.00	50.00	-18.36	-9.74


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

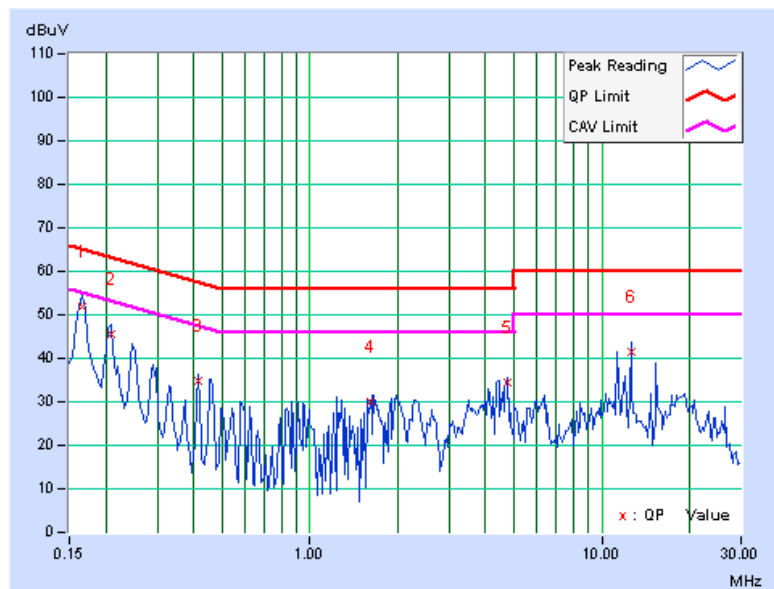

PHASE	Neutral (N)	6dB BANDWIDTH	9 kHz
--------------	-------------	----------------------	-------

No	Freq. [MHz]	Corr. Factor (dB)	Reading Value [dB (uV)]		Emission Level [dB (uV)]		Limit [dB (uV)]		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
			1	0.16561	0.07	52.79	45.76	52.86	45.83	65.18
2	0.20858	0.07	45.79	38.25	45.86	38.32	63.26	53.26	-17.40	-14.94
3	0.41952	0.08	34.25	28.67	34.33	28.75	57.46	47.46	-23.13	-18.71
4	4.38671	0.28	34.22	21.53	34.50	21.81	56.00	46.00	-21.50	-24.19
5	12.62893	0.49	42.08	40.52	42.57	41.01	60.00	50.00	-17.43	-8.99
6	15.35548	0.57	35.83	33.57	36.40	34.14	60.00	50.00	-23.60	-15.86

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. The emission levels of other frequencies were very low against the limit.
 3. Margin value = Emission level - Limit value
 4. Correction factor = Insertion loss + Cable loss
 5. Emission Level = Correction Factor + Reading Value.

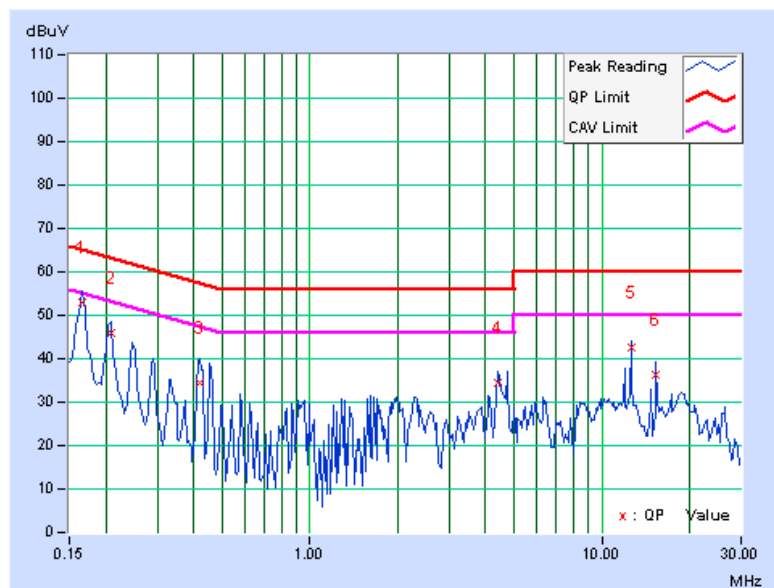



A D T

4.2 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.2.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

Frequencies (MHz)	Field strength (microvolts/meter)	Measurement distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.2.2 TEST INSTRUMENTS

For below 1GHz test

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250253	Aug. 29, 2011	Aug. 28, 2012
Agilent Pre-Selector	N9039A	MY46520310	Aug. 29, 2011	Aug. 28, 2012
Agilent Signal Generator	N5181A	MY49060347	July 25, 2011	July 24, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-04	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02465	Feb. 27, 2012	Feb. 26, 2013
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-361	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000220091110	Nov. 23, 2011	Nov. 22, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-205 RF104-207 RF104-202	Dec. 27, 2011	Dec. 26, 2012
RF Cable	NA	CHHCAB_001	Oct. 08, 2011	Oct. 07, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in 966 Chamber No. H.

4. The FCC Site Registration No. is 797305.

5. The CANADA Site Registration No. is IC 7450H-3.

6. Tested Date: Mar. 09, 2012.



A D T

For above 1GHz test (802.11b & 802.11g)

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY48250254	July 12, 2011	July 11, 2012
Agilent Pre-Selector	N9039A	MY46520311	July 12, 2011	July 11, 2012
Agilent Signal Generator	N5181A	MY49060517	July 12, 2011	July 11, 2012
Mini-Circuits Pre-Amplifier	ZFL-1000VH2B	AMP-ZFL-03	Nov. 15, 2011	Nov. 14, 2012
Agilent Pre-Amplifier	8449B	3008A02578	July 04, 2011	July 03, 2012
SPACEK LABS	SLKKa-48-6	9K16	Nov. 15, 2011	Nov. 14, 2012
SCHWARZBECK Trilog Broadband Antenna	VULB 9168	9168-360	Apr. 14, 2011	Apr. 13, 2012
AISI Horn_Antenna	AIH.8018	0000320091110	Nov. 14, 2011	Nov. 13, 2012
SCHWARZBECK Horn_Antenna	BBHA 9170	9170-424	Oct. 07, 2011	Oct. 06, 2012
RF CABLE	NA	RF104-201 RF104-203 RF104-204	Dec. 26, 2011	Dec. 25, 2012
RF Cable	NA	CHGCAB_001	Oct. 07, 2011	Oct. 06, 2012
Software	ADT_Radiated_V8.7.05	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

- Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The horn antenna, preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
3. The test was performed in 966 Chamber No. G.
4. The FCC Site Registration No. is 966073.
5. The VCCI Site Registration No. is G-137.
6. The CANADA Site Registration No. is IC 7450H-2.
7. Tested Date: Mar. 08, 2012



A D T

For above 1GHz test (802.11n (20MHz) & 802.11n (40MHz))

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 14, 2011	Dec. 13, 2012
Agilent PSA Spectrum Analyzer	E4446A	MY48250113	Nov. 30 , 2011	Nov. 29 , 2012
HP Pre_Amplifier	8449B	300801923	Oct. 31, 2011	Oct. 30, 2012
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Sep. 02, 2011	Sep. 01, 2012
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 14, 2011	Apr. 13, 2012
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 16, 2011	Dec. 15, 2012
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 17, 2012	Jan. 16, 2013
R&S Loop Antenna	HFH2-Z2	100070	Feb. 3, 2012	Feb. 2, 2013
RF Switches	EMH-011	1001	Sep. 24, 2011	Sep. 23, 2012
RF CABLE (Chaintek)	Sucoflex 106	RF106-102	Jan. 27, 2012	Jan. 26, 2013
RF Cable	8DFB	STCCAB-30M-1GHz	Sep. 24, 2011	Sep. 23, 2012
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

7. Tested Date: Mar. 09, 2012

4.2.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at 3 meter chamber room (for below 1GHz test & above 1GHz test (802.11b & 802.11g)) and 3 meters open field site (for above 1GHz test (802.11n (20MHz) & 802.11n (40MHz))). The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.
- f. The test-receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz. If the peak reading value also meets average limit, measurement with the average detector is unnecessary.

NOTE:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 3 MHz for Peak detection (PK) at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 10 Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD


No deviation

4.2.5 TEST SETUP

For below 1GHz test & above 1GHz test (802.11b & 802.11g)

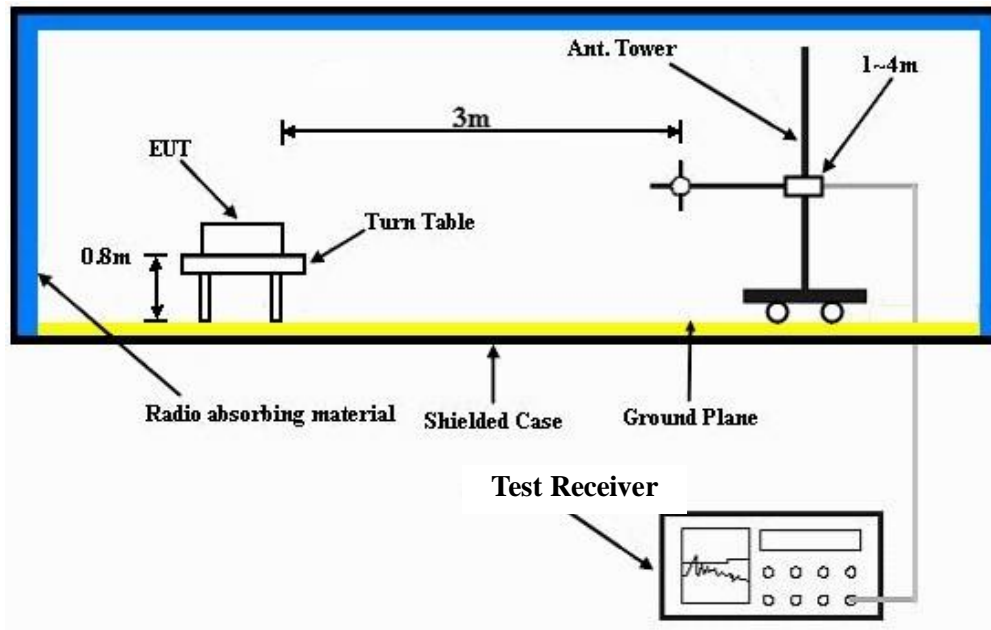

For above 1GHz test (802.11n (20MHz) & 802.11n (40MHz))

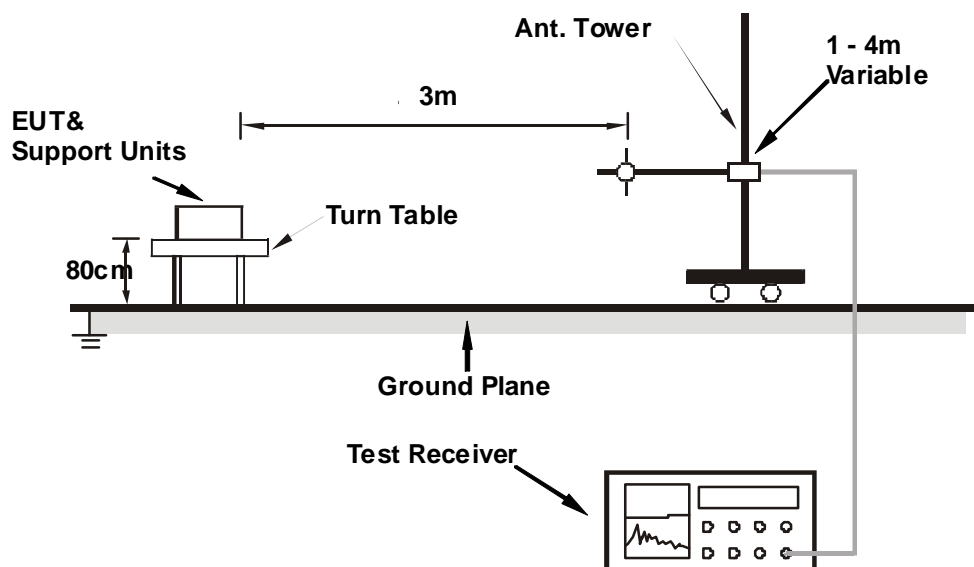

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6

4.2.7 TEST RESULTS

BELOW 1GHz WORST-CASE DATA

802.11n (20MHz)

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Quasi-Peak (QP)
FREQUENCY RANGE	30MHz ~ 1GHz		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	174.20	17.2 QP	43.5	-26.4	1.50 H	298	3.64	13.51
2	250.00	17.2 QP	46.0	-28.8	1.00 H	289	3.88	13.28
3	300.00	20.4 QP	46.0	-25.6	1.00 H	175	4.99	15.40
4	326.04	18.1 QP	46.0	-27.9	1.00 H	6	2.11	15.98
5	600.00	22.4 QP	46.0	-23.6	1.50 H	191	0.13	22.25
6	885.30	25.2 QP	46.0	-20.8	1.50 H	360	-1.56	26.74
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	69.00	16.3 QP	40.0	-23.7	1.00 V	331	4.01	12.30
2	250.00	17.3 QP	46.0	-28.7	2.00 V	200	4.06	13.28
3	600.00	20.7 QP	46.0	-25.3	1.50 V	3	-1.58	22.25
4	772.00	22.8 QP	46.0	-23.2	1.50 V	150	-2.07	24.83
5	910.60	25.6 QP	46.0	-20.4	1.00 V	292	-1.53	27.11
6	948.00	25.6 QP	46.0	-20.4	2.00 V	354	-2.06	27.65

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

ABOVE 1GHz DATA

802.11b

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	60.4 PK	74.0	-13.6	1.55 H	277	28.81	31.59
2	2390.00	46.0 AV	54.0	-8.0	1.55 H	277	14.41	31.59
3	*2412.00	103.3 PK			1.49 H	305	71.64	31.66
4	*2412.00	100.9 AV			1.49 H	305	69.24	31.66
5	4824.00	49.7 PK	74.0	-24.3	1.34 H	38	10.63	39.07
6	4824.00	43.8 AV	54.0	-10.2	1.34 H	38	4.73	39.07

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	58.1 PK	74.0	-15.9	1.75 V	89	26.51	31.59
2	2390.00	44.6 AV	54.0	-9.4	1.75 V	89	13.01	31.59
3	*2412.00	105.1 PK			1.76 V	92	73.44	31.66
4	*2412.00	102.8 AV			1.76 V	92	71.14	31.66
5	4824.00	56.1 PK	74.0	-17.9	1.33 V	158	17.03	39.07
6	4824.00	53.3 AV	54.0	-0.7	1.33 V	158	14.23	39.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.6 PK			1.51 H	324	71.85	31.75
2	*2437.00	101.3 AV			1.51 H	324	69.55	31.75
3	4874.00	49.6 PK	74.0	-24.4	1.31 H	46	10.37	39.23
4	4874.00	43.8 AV	54.0	-10.2	1.31 H	46	4.57	39.23
5	7311.00	55.1 PK	74.0	-18.9	1.00 H	107	8.53	46.57
6	7311.00	42.5 AV	54.0	-11.5	1.00 H	107	-4.07	46.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	103.9 PK			1.74 V	93	72.15	31.75
2	*2437.00	101.2 AV			1.74 V	93	69.45	31.75
3	4874.00	55.6 PK	74.0	-18.4	1.32 V	157	16.37	39.23
4	4874.00	53.0 AV	54.0	-1.0	1.32 V	157	13.77	39.23
5	7311.00	55.5 PK	74.0	-18.5	1.00 V	126	8.93	46.57
6	7311.00	42.9 AV	54.0	-11.1	1.00 V	126	-3.67	46.57

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.9 PK			1.55 H	312	72.07	31.83
2	*2462.00	101.4 AV			1.55 H	312	69.57	31.83
3	2483.50	60.0 PK	74.0	-14.0	1.55 H	292	28.10	31.90
4	2483.50	45.6 AV	54.0	-8.4	1.55 H	292	13.70	31.90
5	4924.00	49.8 PK	74.0	-24.2	1.30 H	51	10.41	39.39
6	4924.00	44.0 AV	54.0	-10.0	1.30 H	51	4.61	39.39
7	7386.00	54.7 PK	74.0	-19.3	1.00 H	111	8.23	46.47
8	7386.00	42.3 AV	54.0	-11.7	1.00 H	111	-4.17	46.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	103.3 PK			1.73 V	86	71.47	31.83
2	*2462.00	100.6 AV			1.73 V	86	68.77	31.83
3	2483.50	59.7 PK	74.0	-14.3	1.72 V	89	27.80	31.90
4	2483.50	46.0 AV	54.0	-8.0	1.72 V	89	14.10	31.90
5	4924.00	56.1 PK	74.0	-17.9	1.30 V	158	16.71	39.39
6	4924.00	53.3 AV	54.0	-0.7	1.30 V	158	13.91	39.39
7	7386.00	55.0 PK	74.0	-19.0	1.00 V	121	8.53	46.47
8	7386.00	42.5 AV	54.0	-11.5	1.00 V	121	-3.97	46.47

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.



A D T

802.11g

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	70.6 PK	74.0	-3.4	1.76 H	291	39.01	31.59
2	2390.00	50.6 AV	54.0	-3.4	1.76 H	291	19.01	31.59
3	*2412.00	105.9 PK			1.53 H	316	74.24	31.66
4	*2412.00	96.1 AV			1.53 H	316	64.44	31.66
5	4824.00	58.3 PK	74.0	-15.7	1.14 H	66	19.23	39.07
6	4824.00	45.5 AV	54.0	-8.5	1.14 H	66	6.43	39.07
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	70.9 PK	74.0	-3.1	1.72 V	61	39.31	31.59
2	2390.00	51.6 AV	54.0	-2.4	1.72 V	61	20.01	31.59
3	*2412.00	107.7 PK			1.73 V	93	76.04	31.66
4	*2412.00	97.1 AV			1.73 V	93	65.44	31.66
5	4824.00	55.2 PK	74.0	-18.8	1.31 V	156	16.13	39.07
6	4824.00	41.8 AV	54.0	-12.2	1.31 V	156	2.73	39.07

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	*2437.00	112.3 PK			1.60 H	300	80.55	31.75
2	*2437.00	102.5 AV			1.60 H	300	70.75	31.75
3	4874.00	58.0 PK	74.0	-16.0	1.15 H	57	18.77	39.23
4	4874.00	45.3 AV	54.0	-8.7	1.15 H	57	6.07	39.23
5	7311.00	54.8 PK	74.0	-19.2	1.12 H	315	8.23	46.57
6	7311.00	42.8 AV	54.0	-11.2	1.12 H	315	-3.77	46.57

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	66.2 PK	74.0	-7.8	1.73 V	95	34.61	31.59
2	2390.00	48.6 AV	54.0	-5.4	1.73 V	95	17.01	31.59
3	*2437.00	112.3 PK			1.74 V	86	80.55	31.75
4	*2437.00	102.1 AV			1.74 V	86	70.35	31.75
5	4874.00	65.7 PK	74.0	-8.3	1.43 V	151	26.47	39.23
6	4874.00	52.4 AV	54.0	-1.6	1.43 V	151	13.17	39.23
7	7311.00	55.0 PK	74.0	-19.0	1.12 V	100	8.43	46.57
8	7311.00	42.7 AV	54.0	-11.3	1.12 V	100	-3.87	46.57

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	105.6 PK			1.56 H	310	73.77	31.83
2	*2462.00	95.9 AV			1.56 H	310	64.07	31.83
3	2483.50	70.8 PK	74.0	-3.2	1.75 H	306	38.90	31.90
4	2483.50	50.9 AV	54.0	-3.1	1.75 H	306	19.00	31.90
5	4924.00	58.2 PK	74.0	-15.8	1.20 H	50	18.81	39.39
6	4924.00	45.5 AV	54.0	-8.5	1.20 H	50	6.11	39.39
7	7386.00	55.1 PK	74.0	-18.9	1.11 H	305	8.63	46.47
8	7386.00	43.1 AV	54.0	-10.9	1.11 H	305	-3.37	46.47

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.3 PK			1.72 V	90	75.47	31.83
2	*2462.00	95.8 AV			1.72 V	90	63.97	31.83
3	2483.50	71.6 PK	74.0	-2.4	1.73 V	87	39.70	31.90
4	2483.50	51.3 AV	54.0	-2.7	1.73 V	87	19.40	31.90
5	4924.00	53.7 PK	74.0	-20.3	1.33 V	154	14.31	39.39
6	4924.00	40.1 AV	54.0	-13.9	1.33 V	154	0.71	39.39
7	7386.00	54.3 PK	74.0	-19.7	1.07 V	93	7.83	46.47
8	7386.00	42.3 AV	54.0	-11.7	1.07 V	93	-4.17	46.47

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.

802.11n (20MHz)

CHANNEL	TX Channel 1	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	72.2 PK	74.0	-1.8	1.54 H	302	40.99	31.21
2	2390.00	52.1 AV	54.0	-1.9	1.54 H	302	20.89	31.21
3	*2412.00	106.8 PK			1.51 H	306	75.53	31.27
4	*2412.00	96.4 AV			1.51 H	306	65.13	31.27
5	4824.00	58.9 PK	74.0	-15.1	1.20 H	35	19.48	39.42
6	4824.00	45.8 AV	54.0	-8.2	1.20 H	35	6.38	39.42
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	73.4 PK	74.0	-0.6	1.73 V	93	42.19	31.21
2	2390.00	52.6 AV	54.0	-1.4	1.73 V	93	21.39	31.21
3	*2412.00	107.0 PK			1.74 V	94	75.73	31.27
4	*2412.00	95.0 AV			1.74 V	94	63.73	31.27
5	4824.00	55.1 PK	74.0	-18.9	1.32 V	169	15.68	39.42
6	4824.00	41.1 AV	54.0	-12.9	1.32 V	169	1.68	39.42

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	112.3 PK			1.59 H	296	80.96	31.34
2	*2437.00	102.5 AV			1.59 H	296	71.16	31.34
3	4874.00	58.4 PK	74.0	-15.6	1.14 H	49	18.78	39.62
4	4874.00	45.6 AV	54.0	-8.4	1.14 H	49	5.98	39.62
5	7311.00	54.9 PK	74.0	-19.1	1.04 H	292	10.80	44.10
6	7311.00	43.3 AV	54.0	-10.7	1.04 H	292	-0.80	44.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	110.5 PK			1.74 V	86	79.16	31.34
2	*2437.00	100.2 AV			1.74 V	86	68.86	31.34
3	4874.00	65.6 PK	74.0	-8.4	1.57 V	157	26.01	39.62
4	4874.00	52.3 AV	54.0	-1.7	1.57 V	157	12.68	39.62
5	7311.00	55.2 PK	74.0	-18.8	1.10 V	114	11.10	44.10
6	7311.00	43.2 AV	54.0	-10.8	1.10 V	114	-0.90	44.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 11	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	106.1 PK			1.62 H	306	74.70	31.40
2	*2462.00	96.1 AV			1.62 H	306	64.70	31.40
3	2483.50	70.6 PK	74.0	-3.4	1.81 H	301	39.14	31.46
4	2483.50	50.6 AV	54.0	-3.4	1.81 H	301	19.14	31.46
5	4924.00	58.2 PK	74.0	-15.8	1.17 H	46	18.38	39.82
6	4924.00	45.3 AV	54.0	-8.7	1.17 H	46	5.48	39.82
7	7386.00	55.0 PK	74.0	-19.0	1.07 H	300	10.82	44.18
8	7386.00	43.3 AV	54.0	-10.7	1.07 H	300	-0.88	44.18

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	104.8 PK			1.72 V	92	73.40	31.40
2	*2462.00	94.9 AV			1.72 V	92	63.50	31.40
3	2483.50	72.0 PK	74.0	-2.0	1.73 V	88	40.54	31.46
4	2483.50	51.4 AV	54.0	-2.6	1.73 V	88	19.94	31.46
5	4924.00	52.9 PK	74.0	-21.1	1.43 V	155	13.08	39.82
6	4924.00	40.2 AV	54.0	-13.8	1.43 V	155	0.38	39.82
7	7386.00	54.4 PK	74.0	-19.6	1.10 V	78	10.22	44.18
8	7386.00	42.8 AV	54.0	-11.2	1.10 V	78	-1.38	44.18

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.



A D T

802.11n (40MHz)

CHANNEL	TX Channel 3	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	70.1 PK	74.0	-3.9	1.76 H	298	38.89	31.21
2	2390.00	51.5 AV	54.0	-2.5	1.76 H	298	20.29	31.21
3	*2422.00	101.2 PK			1.74 H	300	69.90	31.30
4	*2422.00	90.2 AV			1.74 H	300	58.90	31.30
5	4844.00	58.5 PK	74.0	-15.5	1.20 H	58	19.00	39.50
6	4844.00	45.7 AV	54.0	-8.3	1.20 H	58	6.20	39.50
7	7266.00	55.0 PK	74.0	-19.0	1.12 H	285	10.94	44.06
8	7266.00	43.3 AV	54.0	-10.7	1.12 H	285	-0.76	44.06
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTIO N FACTOR (dB/m)
1	2390.00	72.8 PK	74.0	-1.2	1.79 V	89	41.59	31.21
2	2390.00	50.6 AV	54.0	-3.4	1.79 V	89	19.39	31.21
3	*2422.00	101.0 PK			1.74 V	89	69.70	31.30
4	*2422.00	90.1 AV			1.74 V	89	58.80	31.30
5	4844.00	52.9 PK	74.0	-21.1	1.38 V	159	13.40	39.50
6	4844.00	39.6 AV	54.0	-14.4	1.38 V	159	0.10	39.50
7	7266.00	54.0 PK	74.0	-20.0	1.05 V	87	9.94	44.06
8	7266.00	42.3 AV	54.0	-11.7	1.05 V	87	-1.76	44.06

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.



A D T

CHANNEL	TX Channel 6	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.1 PK	74.0	-4.9	1.54 H	304	37.89	31.21
2	2390.00	50.7 AV	54.0	-3.3	1.54 H	304	19.49	31.21
3	*2437.00	103.5 PK			1.83 H	293	72.16	31.34
4	*2437.00	93.6 AV			1.83 H	293	62.26	31.34
5	2483.50	69.5 PK	74.0	-4.5	1.44 H	309	38.04	31.46
6	2483.50	49.6 AV	54.0	-4.4	1.44 H	309	18.14	31.46
7	4874.00	58.9 PK	74.0	-15.1	1.17 H	30	19.28	39.62
8	4874.00	45.8 AV	54.0	-8.2	1.17 H	30	6.18	39.62
9	7311.00	55.3 PK	74.0	-18.7	1.08 H	291	11.20	44.10
10	7311.00	43.6 AV	54.0	-10.4	1.08 H	291	-0.50	44.10

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	71.5 PK	74.0	-2.5	1.77 V	95	40.29	31.21
2	2390.00	52.0 AV	54.0	-2.0	1.77 V	95	20.79	31.21
3	*2437.00	102.1 PK			1.72 V	92	70.76	31.34
4	*2437.00	91.1 AV			1.72 V	92	59.76	31.34
5	2483.50	73.5 PK	74.0	-0.5	1.70 V	83	42.04	31.46
6	2483.50	53.4 AV	54.0	-0.6	1.70 V	83	21.94	31.46
7	4874.00	53.3 PK	74.0	-20.7	1.44 V	157	13.68	39.62
8	4874.00	39.7 AV	54.0	-14.3	1.44 V	157	0.08	39.62
9	7311.00	54.0 PK	74.0	-20.0	1.10 V	93	9.90	44.10
10	7311.00	42.6 AV	54.0	-11.4	1.10 V	93	-1.50	44.10

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * " : Fundamental frequency.



A D T

CHANNEL	TX Channel 9	DETECTOR FUNCTION	Peak (PK)
FREQUENCY RANGE	1GHz ~ 25GHz		Average (AV)

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.1 PK			1.77 H	302	68.72	31.38
2	*2452.00	90.2 AV			1.77 H	302	58.82	31.38
3	2483.50	69.2 PK	74.0	-4.8	1.73 H	306	37.74	31.46
4	2483.50	51.5 AV	54.0	-2.5	1.73 H	306	20.04	31.46
5	4904.00	58.8 PK	74.0	-15.2	1.21 H	35	19.06	39.74
6	4904.00	45.7 AV	54.0	-8.3	1.21 H	35	5.96	39.74
7	7356.00	55.6 PK	74.0	-18.4	1.09 H	291	11.45	44.15
8	7356.00	43.7 AV	54.0	-10.3	1.09 H	291	-0.45	44.15

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	100.4 PK			1.75 V	90	69.02	31.38
2	*2452.00	90.2 AV			1.75 V	90	58.82	31.38
3	2483.50	72.4 PK	74.0	-1.6	1.72 V	89	40.94	31.46
4	2483.50	52.5 AV	54.0	-1.5	1.72 V	89	21.04	31.46
5	4904.00	53.2 PK	74.0	-20.8	1.42 V	163	13.46	39.74
6	4904.00	40.3 AV	54.0	-13.7	1.42 V	163	0.56	39.74
7	7356.00	53.3 PK	74.0	-20.7	1.05 V	77	9.15	44.15
8	7356.00	42.4 AV	54.0	-11.6	1.05 V	77	-1.75	44.15

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. " * ": Fundamental frequency.

4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 15, 2012


4.3.3 TEST PROCEDURE

1. Set resolution bandwidth (RBW) = approximately 1% of the emission bandwidth
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW, Detector = Peak.
3. Trace mode = max hold.
4. Sweep = auto couple.
5. Measure the maximum width of the emission that is constrained by the frequencies associated with the two amplitude points (upper and lower) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission

4.3.4 DEVIATION FROM TEST STANDARD

No deviation

4.3.5 TEST SETUP



4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



4.3.7 TEST RESULTS

802.11b

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	10.67	10.65	0.5	PASS
6	2437	10.89	10.34	0.5	PASS
11	2462	10.72	10.94	0.5	PASS

802.11g

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	16.62	16.57	0.5	PASS
6	2437	16.63	16.59	0.5	PASS
11	2462	16.67	16.61	0.5	PASS

802.11n (20MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
1	2412	17.84	17.86	0.5	PASS
6	2437	17.83	17.87	0.5	PASS
11	2462	17.83	17.86	0.5	PASS



A D T

802.11n (40MHz)

CHANNEL	FREQUENCY (MHz)	6dB BANDWIDTH (MHz)		MINIMUM LIMIT (MHz)	PASS / FAIL
		CHAIN 0	CHAIN 1		
3	2422	36.85	36.58	0.5	PASS
6	2437	36.35	36.87	0.5	PASS
9	2452	36.77	36.33	0.5	PASS



A D T

4.4 CONDUCTED OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

For systems using digital modulation in the 2400–2483.5 MHz band: 1 Watt (30dBm)

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
Peak Power Meter	ML2495A	0824006	May 04, 2011	May 03, 2012
Power Sensor	MA2411B	0738172	May 03, 2011	May 02, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 15, 2012


4.4.3 TEST PROCEDURES

A peak power sensor was used on the output port of the EUT. A power meter was used to read the response of the peak power sensor. Record the peak power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation

4.4.5 TEST SETUP

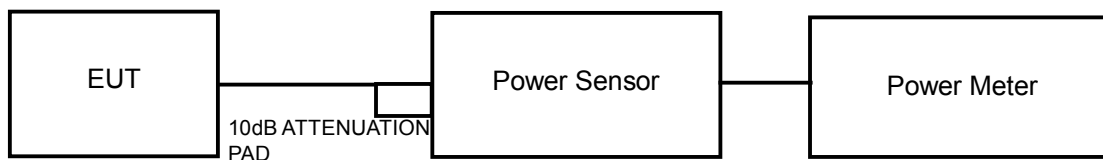

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6

4.4.7 TEST RESULTS

802.11b

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	17.6	17.4	112.5	20.5	27.28	PASS
6	2437	15.7	16.1	77.9	18.9	27.28	PASS
11	2462	14.8	14.9	61.1	17.9	27.28	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$

Effective Legacy Gain (dBi) = 8.72

The effective legacy gain is 8.72dBi, therefore the limit needs to reduce.

802.11g

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.6	22.8	372.5	25.7	27.28	PASS
6	2437	24.2	23.6	492.1	26.9	27.28	PASS
11	2462	21.5	21.4	279.3	24.5	27.28	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$

Effective Legacy Gain (dBi) = 8.72

The effective legacy gain is 8.72dBi, therefore the limit needs to reduce.

802.11n (20MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
1	2412	22.6	22.6	363.9	25.6	29.71	PASS
6	2437	24.1	24.0	508.2	27.1	29.71	PASS
11	2462	21.1	21.3	263.7	24.2	29.71	PASS

NOTE: The directional gain is 6.29dBi, therefore the limit needs to reduce.



A D T

802.11n (40MHz)

CHAN.	FREQUENCY (MHz)	PEAK POWER (dBm)		TOTAL POWER (mW)	TOTAL POWER (dBm)	LIMIT (dBm)	PASS / FAIL
		CHAIN 0	CHAIN 1				
3	2422	21.8	21.5	292.6	24.7	29.71	PASS
6	2437	22.8	22.9	385.5	25.9	29.71	PASS
9	2452	21.6	21.1	273.4	24.4	29.71	PASS

NOTE: The directional gain is 6.29dBi, therefore the limit needs to reduce.



A D T

4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 15, 2012


4.5.3 TEST PROCEDURE

1. Set the RBW = 100 kHz, VBW =300 kHz, Detector = peak.
2. Sweep time = auto couple, Trace mode = max hold, allow trace to fully stabilize.
3. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.
4. Scale the observed power level to an equivalent value in 3 kHz by adjusting (reducing) the measured power by a bandwidth correction factor (BWCF) where $BWCF = 10\log(3 \text{ kHz}/100\text{kHz})$

4.5.4 DEVIATION FROM TEST STANDARD

No deviation

4.5.5 TEST SETUP





A D T

4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.5.7 TEST RESULTS

802.11b

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	5.8	-9.5	3.0	-6.5	5.28	PASS
	6	2437	5.3	-9.9	3.0	-6.9	5.28	PASS
	11	2462	3.5	-11.8	3.0	-8.8	5.28	PASS
1	1	2412	5.2	-10.1	3.0	-7.1	5.28	PASS
	6	2437	4.6	-10.6	3.0	-7.6	5.28	PASS
	11	2462	3.0	-12.2	3.0	-9.2	5.28	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$
 Effective Legacy Gain (dBi) = 8.72
 The effective legacy gain is 8.72dBi, therefore the limit needs to reduce.

802.11g

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	3.3	-11.9	3.0	-8.9	5.28	PASS
	6	2437	6.6	-8.7	3.0	-5.7	5.28	PASS
	11	2462	0.8	-14.5	3.0	-11.5	5.28	PASS
1	1	2412	0.6	-14.6	3.0	-11.6	5.28	PASS
	6	2437	2.8	-12.4	3.0	-9.4	5.28	PASS
	11	2462	-1.3	-16.5	3.0	-13.5	5.28	PASS

Note: Directional gain = $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$
 Effective Legacy Gain (dBi) = 8.72
 The effective legacy gain is 8.72dBi, therefore the limit needs to reduce.

802.11n (20MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	1	2412	0.0	-15.3	3.0	-12.3	7.71	PASS
	6	2437	3.1	-12.1	3.0	-9.1	7.71	PASS
	11	2462	-2.6	-17.8	3.0	-14.8	7.71	PASS
1	1	2412	-0.6	-15.8	3.0	-12.8	7.71	PASS
	6	2437	3.0	-12.2	3.0	-9.2	7.71	PASS
	11	2462	-2.3	-17.6	3.0	-14.6	7.71	PASS

NOTE: The directional gain is 6.29dBi, therefore the limit needs to reduce.

802.11n (40MHz)

TX chain	Channel	FREQ. (MHz)	PSD (dBm/100kHz)	PSD (dBm/3kHz)	10 log (N=2) dB	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	PASS /FAIL
0	3	2422	-5.6	-20.8	3.0	-17.8	7.71	PASS
	6	2437	-3.7	-18.9	3.0	-15.9	7.71	PASS
	9	2452	-6.2	-21.4	3.0	-18.4	7.71	PASS
1	3	2422	-5.9	-21.2	3.0	-18.2	7.71	PASS
	6	2437	-3.4	-18.6	3.0	-15.6	7.71	PASS
	9	2452	-6.2	-21.4	3.0	-18.4	7.71	PASS

NOTE: The directional gain is 6.29dBi, therefore the limit needs to reduce.



A D T

4.6 CONDUCTED OUT-BAND EMISSION MEASUREMENT

4.6.1 LIMITS OF CONDUCTED OUT-BAND EMISSION MEASUREMENT

Below -20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S Spectrum Analyzer	FSP 40	100060	May 11, 2011	May 10, 2012

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Tested date : Mar. 15, 2012

4.6.3 TEST PROCEDURE

MEASUREMENT PROCEDURE REF

1. Set the RBW = 100 kHz.
2. Set the VBW \geq 300 kHz.
3. Detector = peak.
4. Sweep time = auto couple.
5. Trace mode = max hold.
6. Allow trace to fully stabilize.
7. Use the peak marker function to determine the maximum power level in any 100 kHz band segment within the fundamental EBW.


MEASUREMENT PROCEDURE OOB

1. Set RBW = 100 kHz.
2. Set VBW \geq 300 kHz.
3. Set span to encompass the spectrum to be examined
4. Detector = peak.
5. Trace Mode = max hold.
6. Sweep = auto couple.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP



4.6.6 EUT OPERATING CONDITION

Same as Item 4.3.6

4.6.7 TEST RESULTS

The conducted emission test is performed on each TX port of operating mode without summing or adding $10\log(N)$ since the limit is relative emission limit. Only worst data of each operating mode is presented.


The spectrum plots are attached on the following pages. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.




A D T

802.11b


CH 1

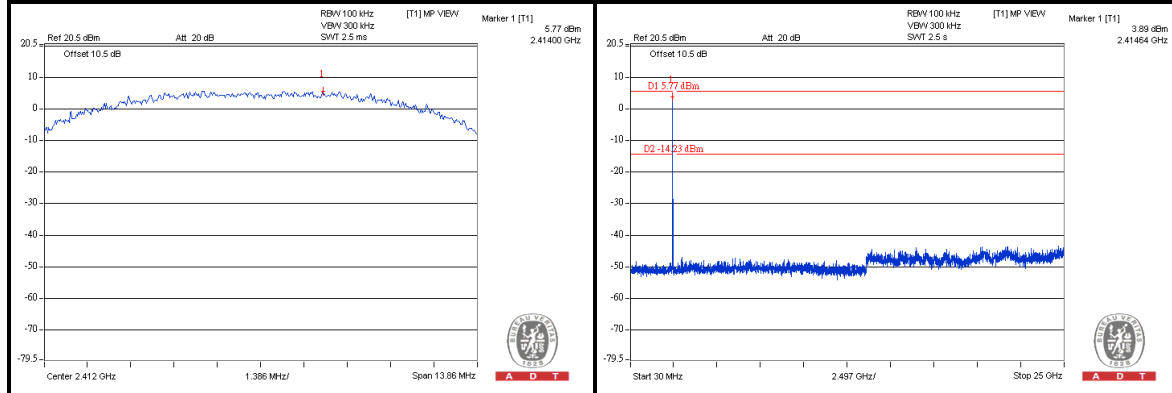

CH 6

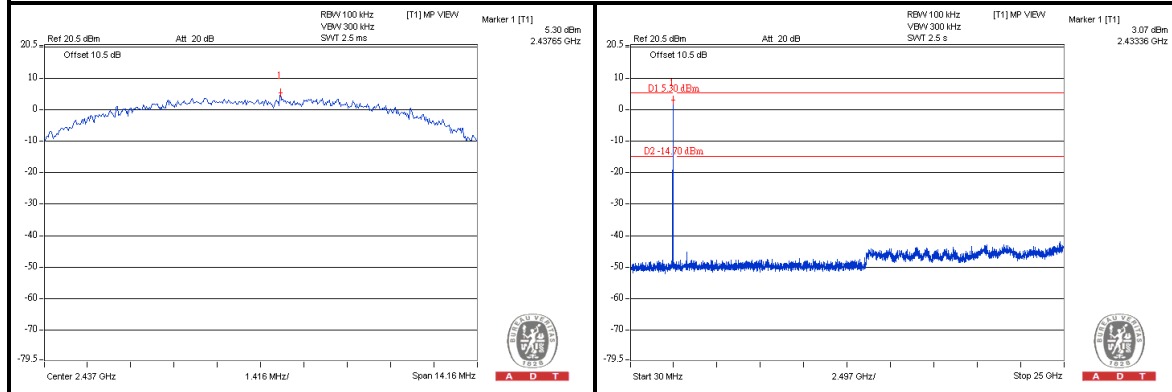

CH 11


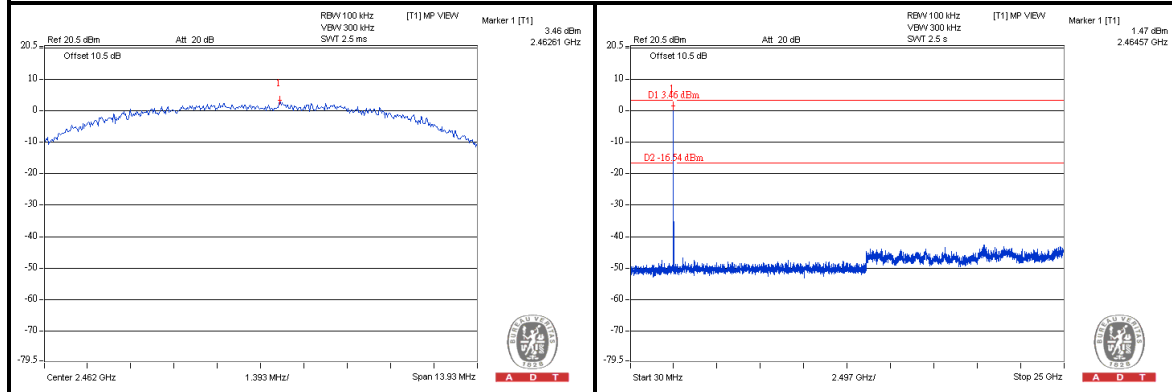






A D T

802.11g



CH 1

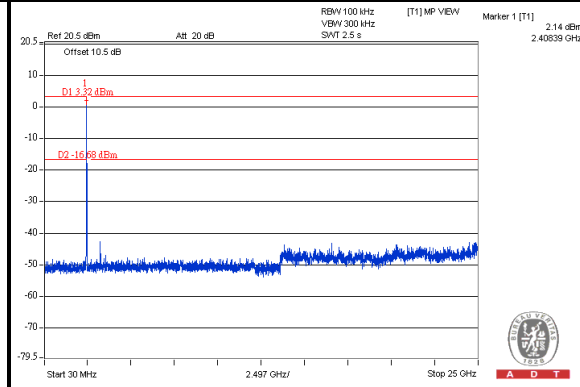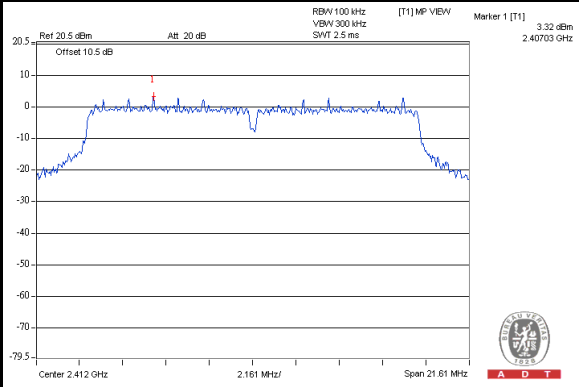

CH 6

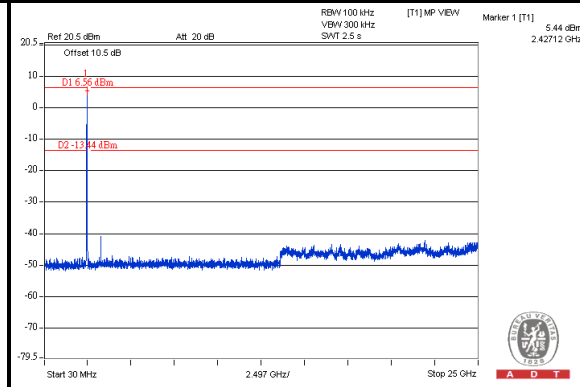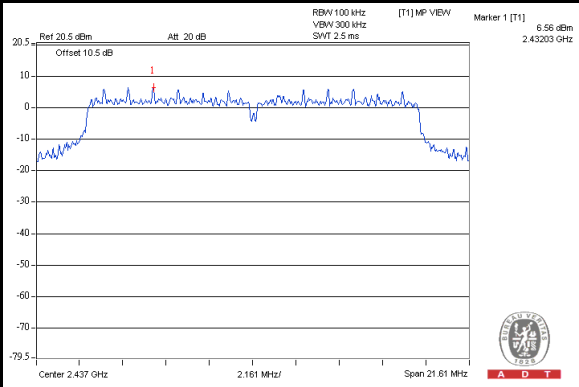

CH 11

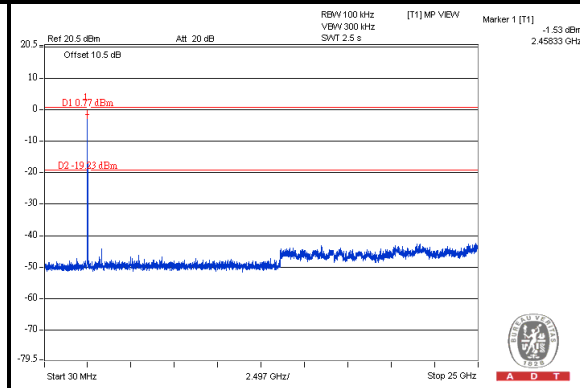
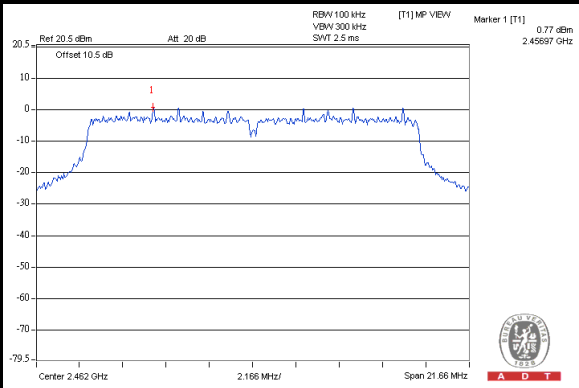






A D T

802.11n (20MHz)



CH 1

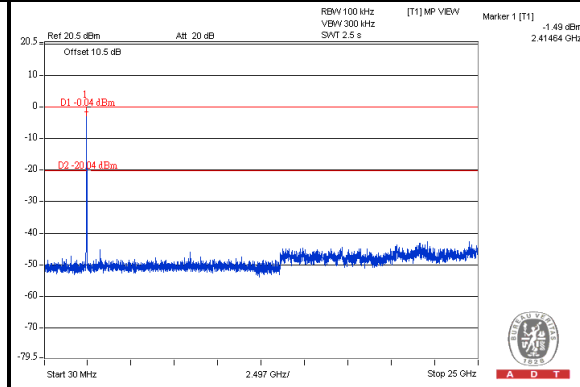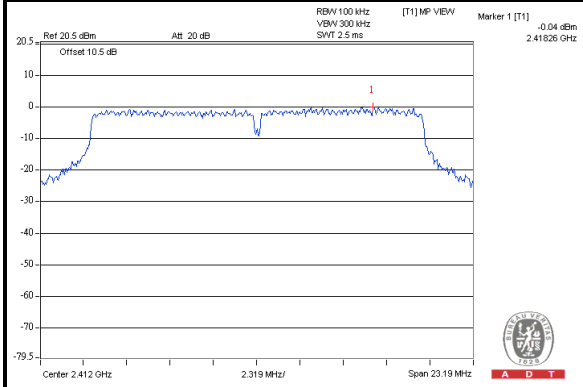

CH 6

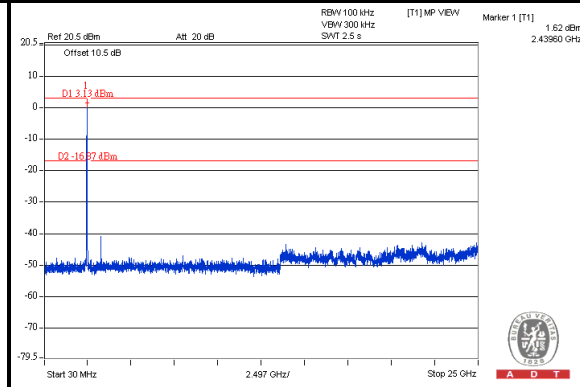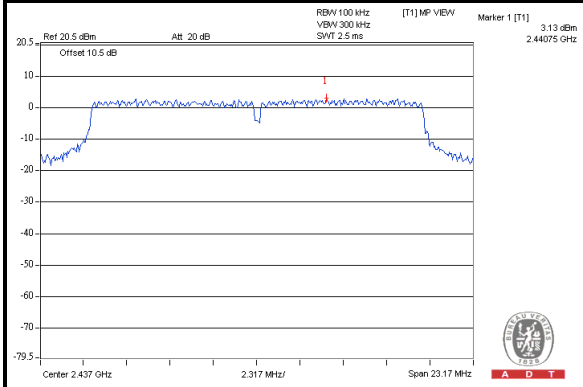

CH 11

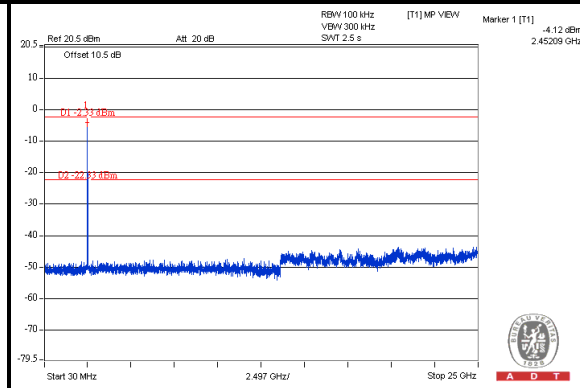
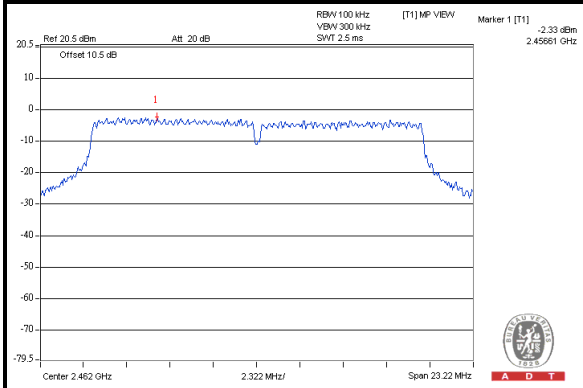






A D T

802.11n (40MHz)



CH 3

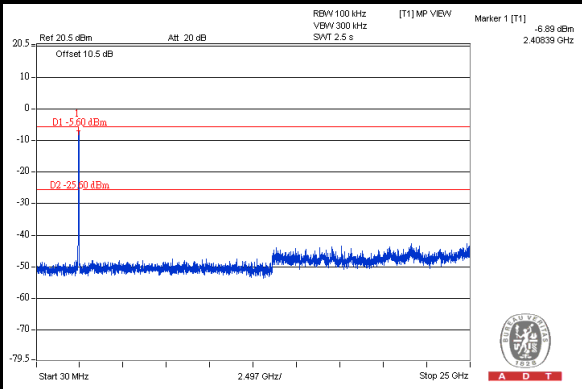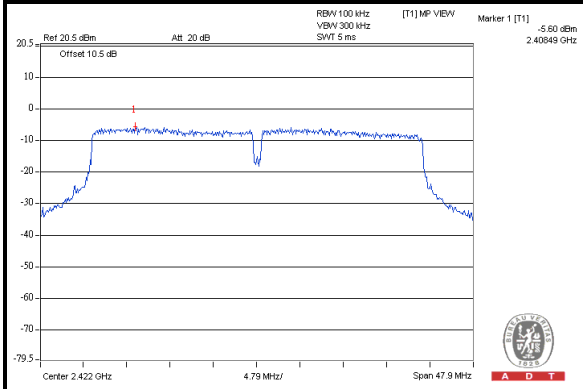

CH 6

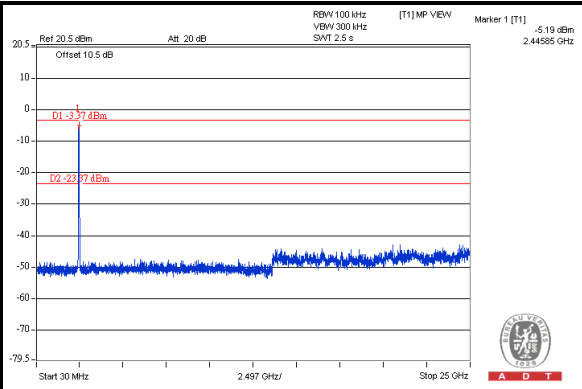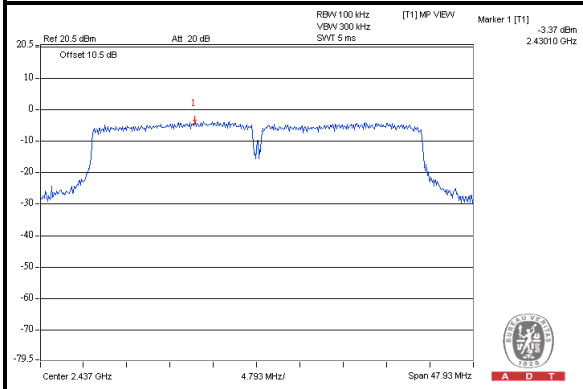

CH 9

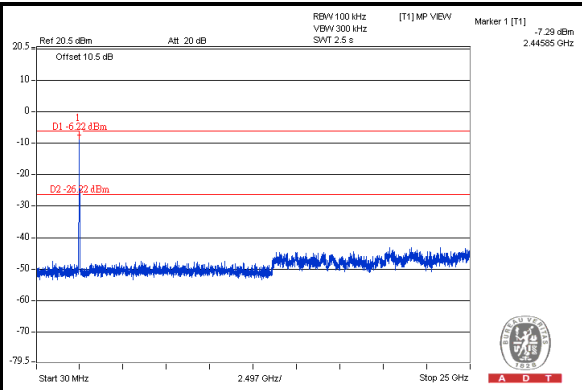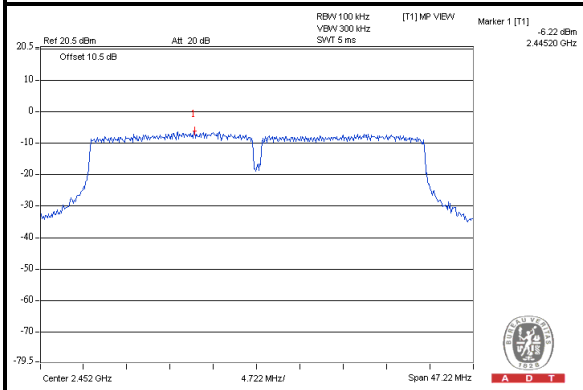



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

Copies of accreditation and authorization certificates of our laboratories obtained from approval agencies can be downloaded from our web site:

www.adt.com.tw/index.5.phtml.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---