

# FCC Test Report

Product Name : LGA module  
Trade Name : WNC  
Model No. : IMQ6  
FCC ID : NKRIMQ6

Applicant : Wistron Neweb Corporation  
Address : 20 Park Avenue II, Hsinchu Science Park, Hsinchu  
308, Taiwan, R.O.C

Date of Receipt : Sep. 24, 2020  
Issued Date : Nov. 30, 2020  
Report No. : 2090881R-E3042110008  
Report Version : V1.0



The test results relate only to the samples tested.  
The test report shall not be reproduced except in full without the written approval of DEKRA Testing and Certification Co., Ltd..


# Test Report Certification

Issued Date : Nov. 30, 2020


Report No. : 2090881R-E3042110008



Product Name : LGA module  
 Applicant : Wistron Neweb Corporation  
 Address : 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308,  
 Taiwan, R.O.C  
 Manufacturer : Wistron Neweb Corporation  
 Address : 20 Park Avenue II, Hsinchu Science Park, Hsinchu 308,  
 Taiwan, R.O.C  
 Model No. : IMQ6  
 FCC ID : NKRIMQ6  
 EUT Voltage : DC 3.8V  
 Testing Voltage : DC 3.8V  
 Trade name : WNC  
 Applicable Standard : FCC CFR Title 47 Part 2, ANSI/TIA-603-D  
 FCC Part 22 Subpart H, FCC Part 24 Subpart E  
 Test Lab : Hsin Chu Laboratory  
 Address : No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu  
 County 310, Taiwan, R.O.C.  
 TEL: +886-3-582-8001 / FAX: +886-3-582-8958  
 Test Result : Complied

Documented By :   
 ( Carol Tsai / Senior Engineering Adm. Specialist )

Tested By :   
 ( Max Chang / Senior Engineer )

Approved By :   
 ( Louis Hsu / Deputy Manager )

### Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	Nov. 30, 2020

## TABLE OF CONTENTS

Description	Page
1. General Information .....	6
1.1. EUT Description .....	6
1.2. Mode of Operation .....	7
1.3. Tested System Details.....	8
1.4. Configuration of Tested System .....	8
1.5. EUT Exercise Software .....	8
1.6. Comments and Remarks .....	9
2. Technical Test .....	10
2.1. Summary of Test Result .....	10
2.2. Test Environment .....	11
2.3. List of Test Equipment.....	12
2.4. Uncertainty .....	14
3. RF Output Power .....	15
3.1. Test Setup .....	15
3.2. Test Procedure .....	15
3.3. Test Method.....	15
3.4. Test Result .....	16
4. Occupied Bandwidth.....	17
4.1. Test Setup .....	17
4.2. Test Procedure .....	17
4.3. Test Method.....	17
4.4. Test Result .....	18
5. Peak To Average Ratio .....	28
5.1. Test Setup .....	28
5.2. Test Procedure .....	28
5.3. Test Method.....	28
5.4. Test Result .....	29
6. Conducted Band Edge.....	39
6.1. Test Setup .....	39
6.2. Test Procedure .....	39
6.3. Test Method.....	39
6.4. Test Result .....	40
7. Spurious Emission .....	52
7.1. Test Setup .....	52
7.2. Test Procedure .....	53

---

7.3.	Test Method.....	53
7.4.	Test Result .....	54
8.	Frequency Stability .....	62
8.1.	Test Setup .....	62
8.2.	Test Procedure .....	62
8.3.	Test Method.....	62
8.4.	Test Result .....	63
Attachment 1.....		67
	Test Setup Photograph.....	67
Attachment 2.....		70
	EUT External Photograph .....	70
Attachment 3.....		74
	EUT Internal Photograph .....	74

## 1. General Information

### 1.1. EUT Description

Product Name	LGA module
Trade Name	WNC
Model No.	IMQ6
Tx Frequency Range/ Channel number	GSM 850: 824.2-848.8 MHz PCS 1900: 1850.2-1909.8 MHz
Rx Frequency Range/ Channel number	GSM 850: 869.2-893.8 MHz PCS 1900: 1930.2-1989.8 MHz
Type of Modulation	GPRS
HW Version	1.0
SW Version	MPSS: IMQ6_v01.04 APSS: IMQ6_v00.04  <pre>at+cgmr MPSS: IMQ6_v01.04 APSS: IMQ6_v00.04</pre>
IMEI No.	015617000298260  <pre>IMEI 015617000298260</pre>

Antenna Information	
MFR. / Model	WIESON TECHNOLOGIES CO., LTD / GY115HT0330-041
Antenna Type	Dipole Antenna
Antenna Gain	GSM 850: 3.20dBi PCS1900: 1.56dBi

#### Note:

1. This module support LTE Cat-M1 Band 2/4/5/12/13 & 2G functions.
2. Regarding frequency band operation, the lowest, middle and highest frequency of channel were selected to perform the test, and the details were shown on this report.
3. The EUT description is from the customer declaration.

## 1.2. Mode of Operation

DEKRA has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:


Test Mode
Mode 1: GSM 850
Mode 2: PCS1900

### 1.3. Tested System Details

The types for all equipment, plus descriptions of all cables used in the tested system (including inserted cards) are:

Product	Manufacturer	Model No.	Serial No.	FCC ID	Power Cord
1 Base Station	R&S	CMW500	157118	DoC	Non-Shielded, 2m
2 Horn Antenna	Schwarzbeck	BBHA 9120D	1640	DoC	--

### 1.4. Configuration of Tested System

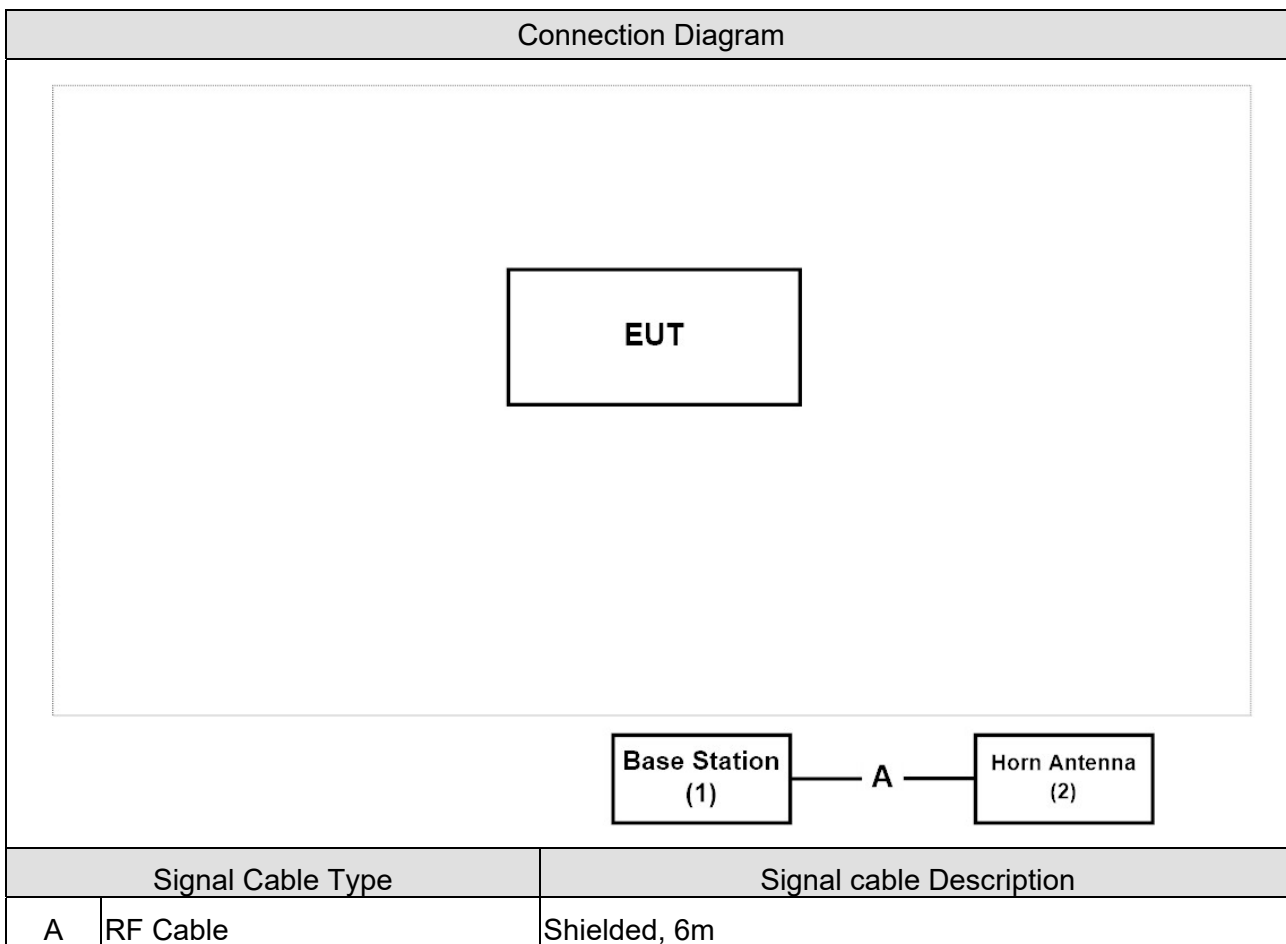

### 1.5. EUT Exercise Software

1	Setup the EUT and simulators as shown on 1.4.
2	Turn on the power of all equipment.
3	The EUT will continue transmit the signal from GSM function.
4	Repeat the above procedure.



## **1.6. Comments and Remarks**

The product specification and testing instructions for the EUT declared in the report are provided by the manufacturer who will take all responsibilities for the accuracy.

## 2. Technical Test

### 2.1. Summary of Test Result

- No deviations from the test standards  
 Deviations from the test standards as below description:

#### For GSM 850 (FCC Part 22 Subpart H)

Performed Item	FCC Rule	Limit	Result
Maximum Output Power	§2.1033	< 7 Watts	Pass
	§2.1046		
	§22.913		
Modulation characteristic	§2.1047	N/A	Pass
Occupied Bandwidth	§2.1049	N/A	Pass
Peak To Average Ratio	§22.913(d)	$\leq$ 13dB	Pass
Conducted Band Edge	§22.917	< -13dBm	Pass
Spurious Emission	§2.1053	< -13dBm	Pass
	§22.917		
Frequency Stability	§2.1055	< $\pm$ 2.5 ppm	Pass
	§22.335		

#### For PCS 1900 (FCC Part 24 Subpart E)

Performed Item	FCC Rule	Limit	Result
Maximum Output Power	§2.1033	< 2 Watts	Pass
	§2.1046		
	§24.232		
Modulation characteristic	§2.1047	N/A	Pass
Occupied Bandwidth	§2.1049	N/A	Pass
Peak To Average Ratio	§24.232(d)	$\leq$ 13dB	Pass
Conducted Band Edge	§24.238	< -13dBm	Pass
Spurious Emission	§2.1053	< -13dBm	Pass
	§24.238		
Frequency Stability	§2.1055	< $\pm$ 2.5 ppm	Pass
	§24.235		

Note: Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

## 2.2. Test Environment

Items	Test Item	Required	Test Site
Temperature (°C)	RF Output Power	15-35	1
Humidity (%RH)		25-75	
Temperature (°C)	Occupied Bandwidth	15-35	1
Humidity (%RH)		25-75	
Temperature (°C)	Peak To Average Ratio	15-35	1
Humidity (%RH)		25-75	
Temperature (°C)	Conducted Band Edge	15-35	1
Humidity (%RH)		25-75	
Temperature (°C)	Spurious Emission	15-35	1
Humidity (%RH)		25-75	
Temperature (°C)	Frequency Stability	15-35	1
Humidity (%RH)		25-75	

Note: Test site information refers to Laboratory Information.

### Laboratory Information

**USA : FCC Registration Number: TW3024**

**Canada : IC Registration Number: 22397-1 / 22397-2 / 22397-3**

The address and introduction of DEKRA Testing and Certification Co., Ltd. laboratories can be founded in our Web site: <http://www.dekra.com.tw>

If you have any comments, please don't hesitate to contact us. Our test sites as below:

Test Laboratory	DEKRA Testing and Certification Co., Ltd.
Address	1. No.372, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C. 2. No.372-2, Sec. 4, Zhongxing Rd., Zhudong Township, Hsinchu County 31061, Taiwan, R.O.C.
Phone number	1. +886-3-582-8001 2. +886-3-582-8001
Fax number	1. +886-3-582-8958 2. +886-3-582-8958
Email address	<a href="mailto:info.tw@dekra.com">info.tw@dekra.com</a>
Website	<a href="http://www.dekra.com.tw">http://www.dekra.com.tw</a>

### 2.3. List of Test Equipment

#### RF Output Power / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22

#### Occupied Bandwidth / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22

#### Peak To Average Ratio / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22

#### Conducted Band Edge / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22

## Conducted Spurious Emissions / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22

## Radiated Spurious Emissions / CB2-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Horn Antenna	Schwarzbeck	BBHA 9120D	639	2020/06/04	2021/06/03
Bilog Antenna	Teseq	CBL6112D	23191	2020/06/12	2021/06/11
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Signal Analyzer	R&S	FSVA40	101455	2020/10/12	2021/10/11
Horn Antenna	Schwarzbeck	BBHA 9170	202	2019/12/27	2020/12/26
Pre-Amplifier	DEKRA	AP-400C	201801231	2019/12/03	2020/12/02
Pre-Amplifier	EMCI	EMC11830I	980366	2019/12/03	2020/12/02
Horn Antenna	Schwarzbeck	BBHA 9120D	01656	2020/10/14	2021/10/13
Pre-Amplifier	DEKRA	AP-025C	12183122	2020/09/03	2021/09/02
Signal Analyzer	R&S	FSV40	101435	2020/06/24	2021/06/23
Wideband Radio Communication Tester	R&S	CMW500	106071	2020/02/03	2021/02/02
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22
Coaxial Cable(13m)	Huber+Suhner	SF104	CB2-H	2020/07/25	2021/07/24
DEKRA Testing System	DEKRA	Version 1.2	CB2-H	NA	NA

## Frequency Stability / SR12-H

Instrument	Manufacturer	Model No.	Serial No.	Cal. Date	Next Cal. Date
Signal & Spectrum Analyzer	R&S	FSV40	101049	2020/03/30	2021/03/29
EXA Signal Analyzer	Keysight	N9010A	MY51440132	2020/02/21	2021/02/20
Spectrum Analyzer	Keysight	N9030B	MY57140404	2020/06/03	2021/06/02
Spectrum Analyzer	Keysight	N9010B	MY57110159	2020/04/15	2021/04/14
Wireless Conn. Tseter	R&S	CMW500	157118	2020/07/23	2021/07/22


Note: All equipment upon which need to calibrated are with calibration period of 1 year.

## 2.4. Uncertainty

Test Item	Uncertainty
RF Output Power	$\pm 1.27$ dB
Occupied Bandwidth	$\pm 10$ Hz
Peak To Average Ratio	In measuring transmissions in this band using an average power technique, the peak to-average ratio (PAR) of the transmission may not exceed 13dB.
Conducted Band Edge	$\pm 1.2$ dB
Spurious Emissions	The measurement uncertainty is defined as $\pm 1.27$ dB for Conducted Measurement. The measurement uncertainty is defined as $\pm 3.2$ dB for Radiated Measurement.
Frequency Stability	$\pm 10$ Hz

### 3. RF Output Power

#### 3.1. Test Setup

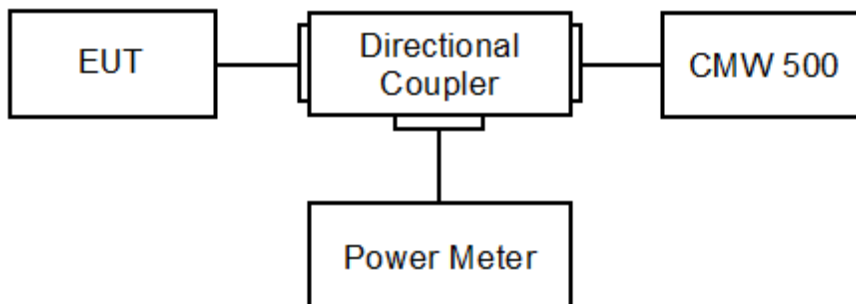

#### 3.2. Test Procedure

- a. The RF output of the transmitter was connected to base station simulator.
- b. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
- c. Set EUT at maximum average power by base station simulator.
- d. Measure lowest, middle, and highest channels for each bandwidth and different modulation.

Effective Isotropic Radiated Power = Conducted Power(dBm) + Antenna Gain(dBi)

Effective Radiated Power = Conducted Power(dBm) + Antenna Gain(dBi) - 2.15dB

#### 3.3. Test Method

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 5.2.4

ANSI C63.26-2015 Sub-clause 5.2.4.2

### 3.4. Test Result

Product	LGA module		
Test Item	RF Output Power		
Test Mode	Mode 1: GSM 850 Mode 2: PCS1900		
Date of Test	2020/09/26	Test Site	SR12-H
Temperature (°C)	25	Humidity (%RH)	64

GSM 850						
Test Mode	Frequency (MHz)	Reading Level (dBm)	Antenna Gain (dBi)	Measure Level (dBm)	Measure Level (W)	Limit (W) ERP
GPRS	824.2	32.42	3.2	33.470	2.223	7
	836.6	32.47	3.2	33.520	2.249	7
	848.8	32.46	3.2	33.510	2.244	7
EGPRS	824.2	32.44	3.2	33.490	2.234	7
	836.6	32.52	3.2	33.570	2.275	7
	848.8	32.49	3.2	33.540	2.259	7

Note: Measure Level (ERP) = Reading Level (Conducted Output Power) + Antenna Gain - 2.15


PCS 1900						
Test Mode	Frequency (MHz)	Reading Level (dBm)	Antenna Gain (dBi)	Measure Level (dBm)	Measure Level (W)	Limit (W) EIRP
GPRS	1850.2	28.69	1.56	30.250	1.059	2
	1880.0	28.70	1.56	30.260	1.062	2
	1909.8	28.56	1.56	30.120	1.028	2
EGPRS	1850.2	28.66	1.56	30.220	1.052	2
	1880.0	28.70	1.56	30.260	1.062	2
	1909.8	28.59	1.56	30.150	1.035	2

Note: Measure Level (EIRP) = Reading Level (Conducted Output Power) + Antenna Gain



#### 4. Occupied Bandwidth

##### 4.1. Test Setup

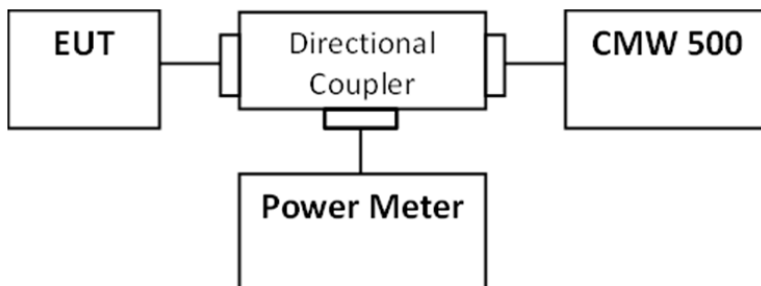

##### 4.2. Test Procedure

1. The EUT was connected to Spectrum Analyzer and Base Station via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The 26 dB bandwidth and 99% occupied bandwidth of the low & middle & high channel for the highest RF powers were measured.

##### 4.3. Test Method

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 4.2 & 4.3  
ANSI C63.26-2015 Sub-clause 5.4.3 & 5.4.4


**4.4. Test Result**

Product	LGA module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 1: GSM 850		
Date of Test	2020/09/26	Test Site	SR12-H
Temperature (°C)	25	Humidity (%RH)	64


GSM 850

Band	Channel No.	Frequency (MHz)	Mode	Measure Level (kHz)		Limit (MHz)
				99% BW	26dB BW	
850	128	824.2	GPRS	243.03	299.30	NA
			EGPRS	242.41	297.20	NA
	190	836.6	GPRS	243.97	299.10	NA
			EGPRS	243.57	299.20	NA
	251	848.8	GPRS	244.01	296.60	NA
			EGPRS	243.63	296.70	NA


### GSM\_850\_CH128\_GPRS

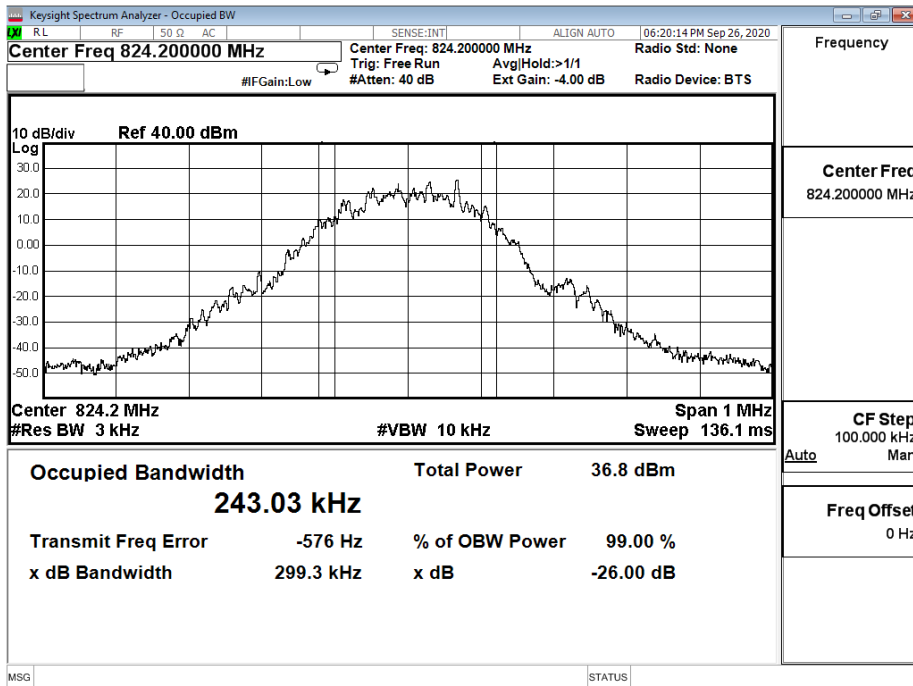


### GSM\_850\_CH190\_GPRS

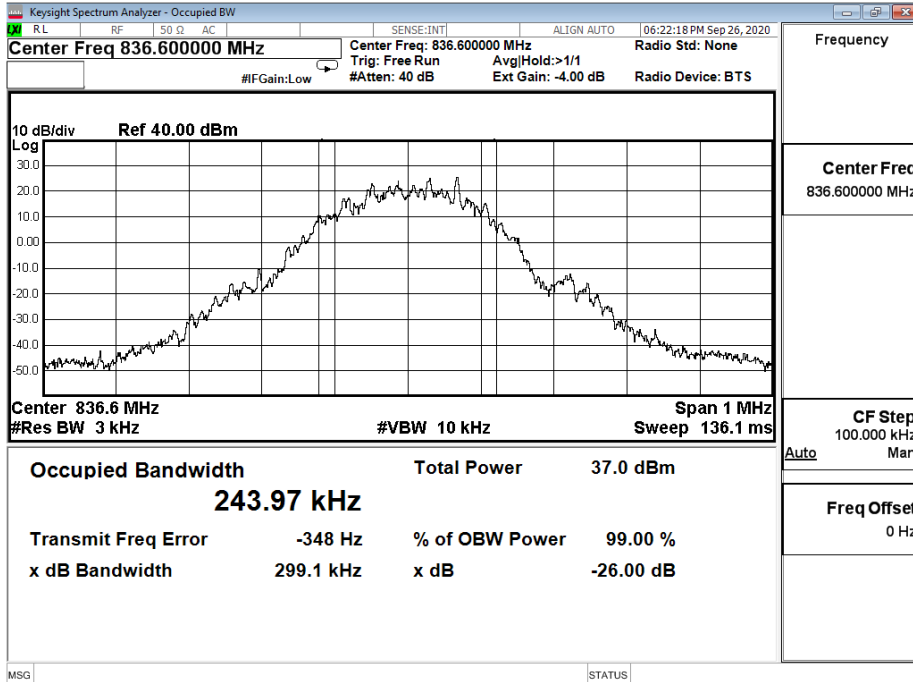


GSM\_850\_CH251\_GPRS

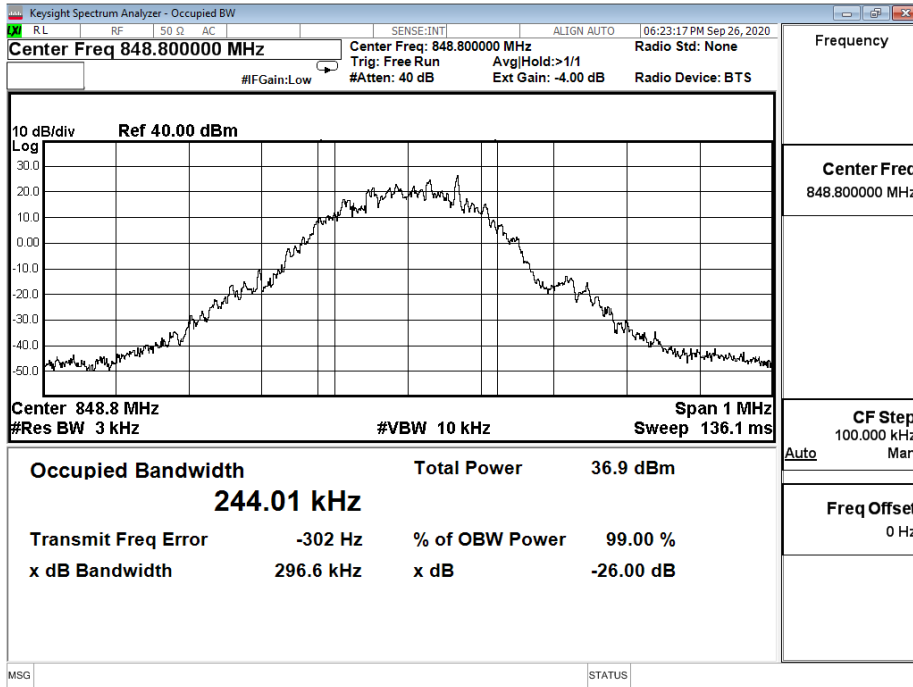


### GSM\_850\_CH128\_EGPRS

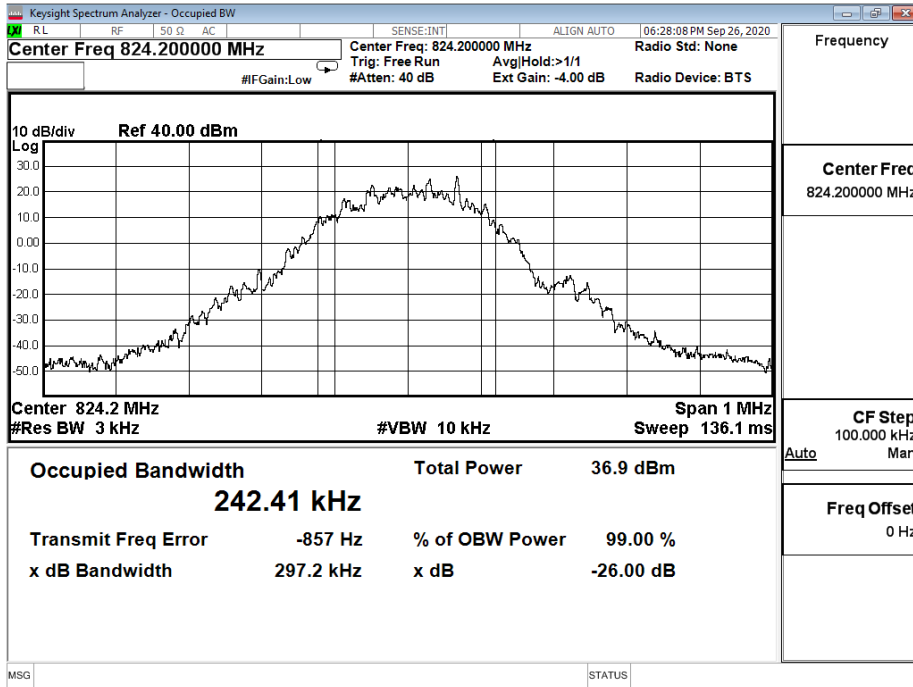

### GSM\_850\_CH190\_EGPRS

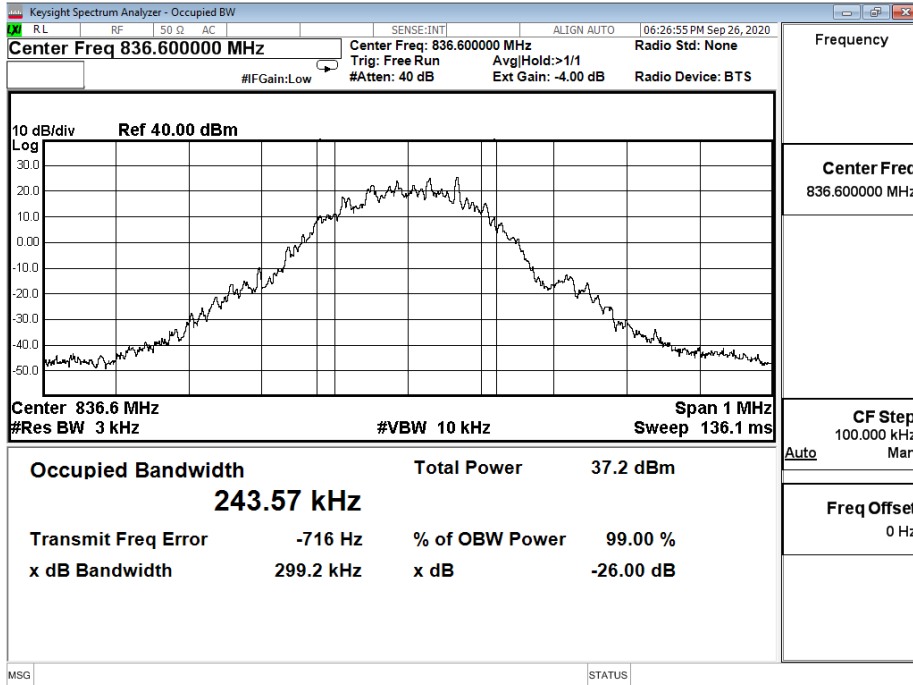

GSM\_850\_CH251\_EGPRS

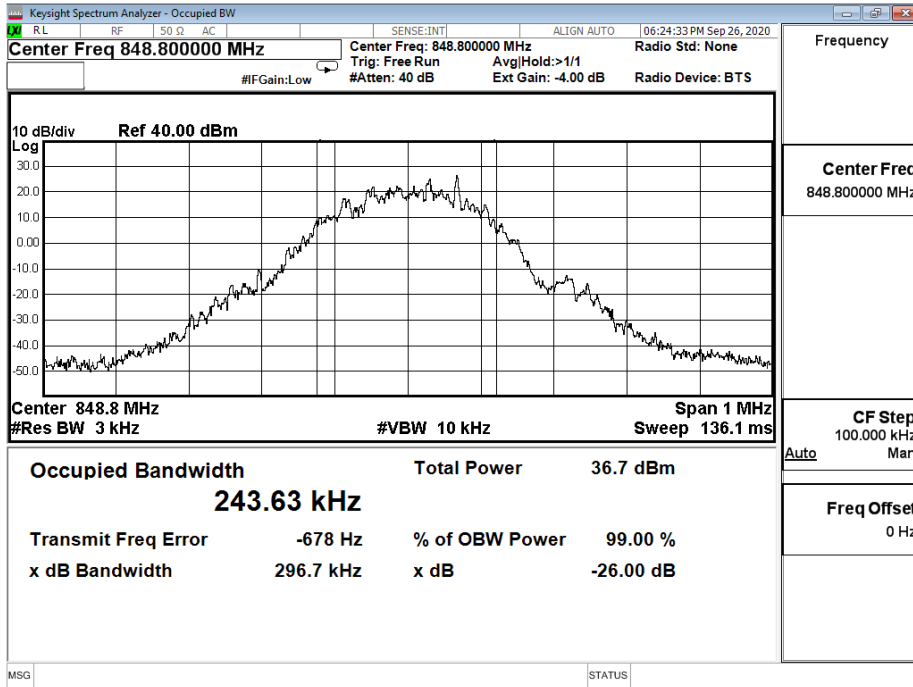


Product	LGA module		
Test Item	Occupied Bandwidth		
Test Mode	Mode 2: PCS1900		
Date of Test	2020/09/26	Test Site	SR12-H
Temperature (°C)	25	Humidity (%RH)	64


PCS 1900

Band	Channel No.	Frequency (MHz)	Mode	Measure Level (kHz)		Limit (MHz)
				99% BW	26dB BW	
1900	512	1850.2	GPRS	243.00	298.10	NA
			EGPRS	243.38	298.90	NA
	661	1880	GPRS	243.35	299.50	NA
			EGPRS	242.45	298.20	NA
	810	1909.8	GPRS	243.06	298.60	NA
			EGPRS	243.44	297.60	NA

### PCS\_1900\_CH512\_GPRS

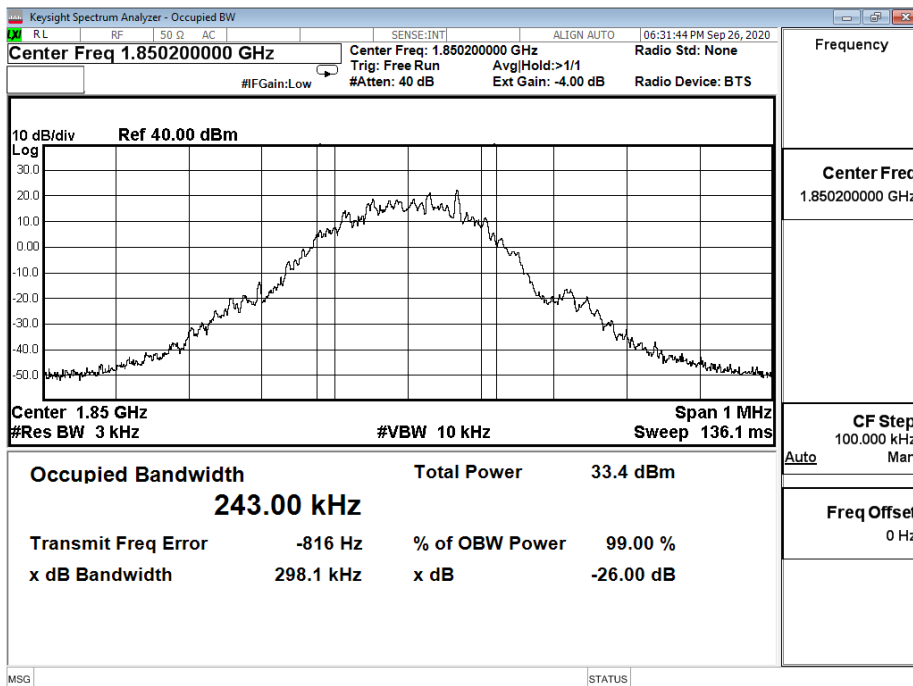


### PCS\_1900\_CH661\_GPRS

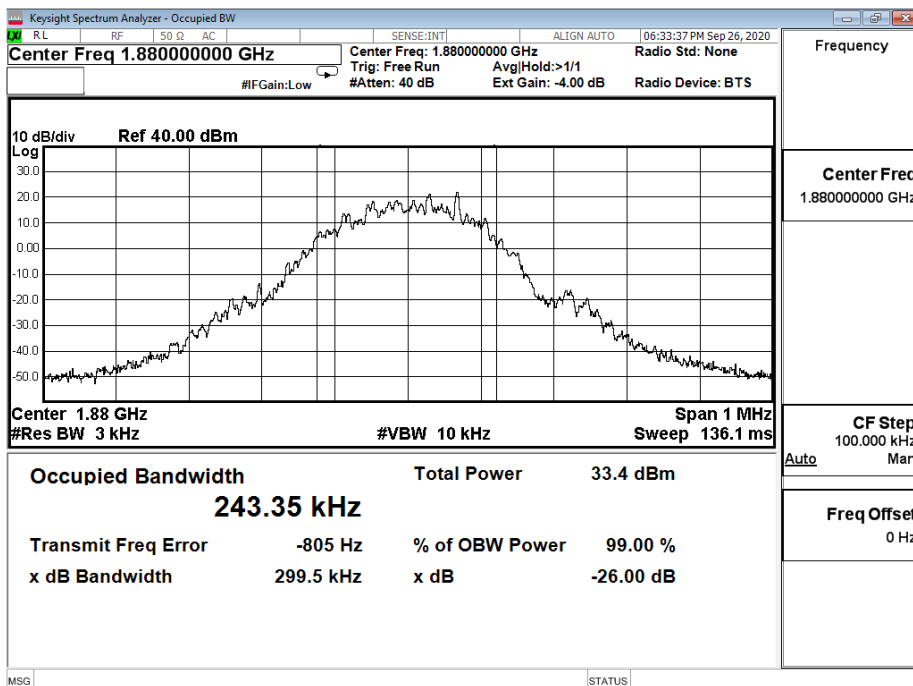





PCS\_1900\_CH810\_GPRS

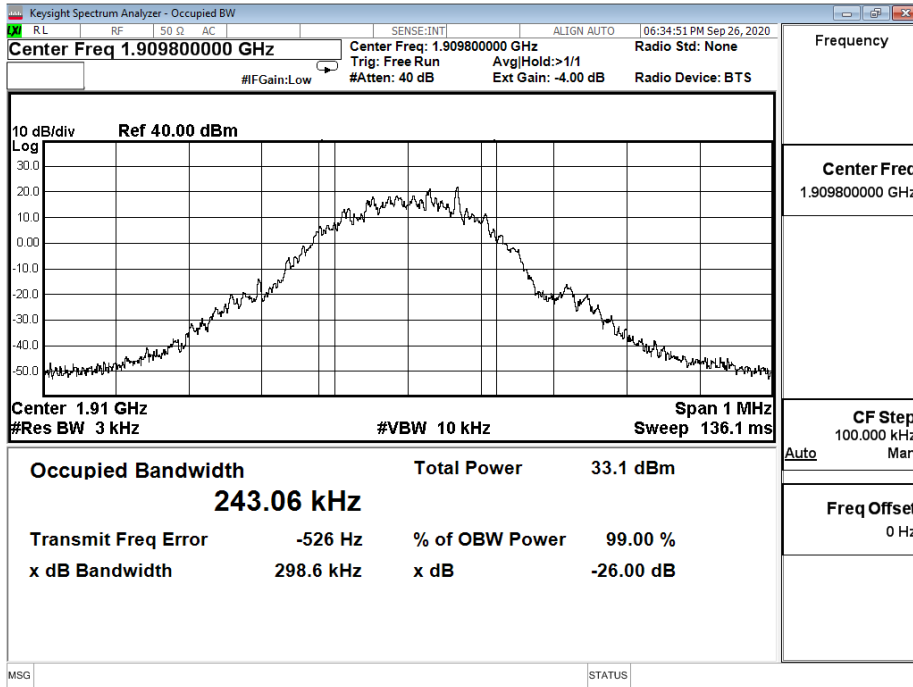


PCS\_1900\_CH512\_EGPRS

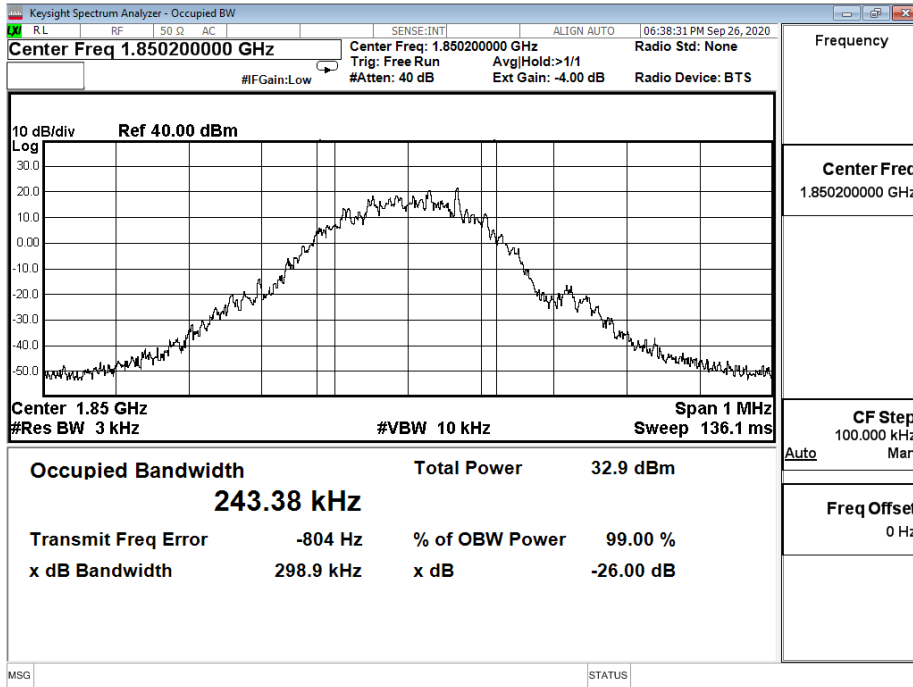

PCS\_1900\_CH661\_EGPRS

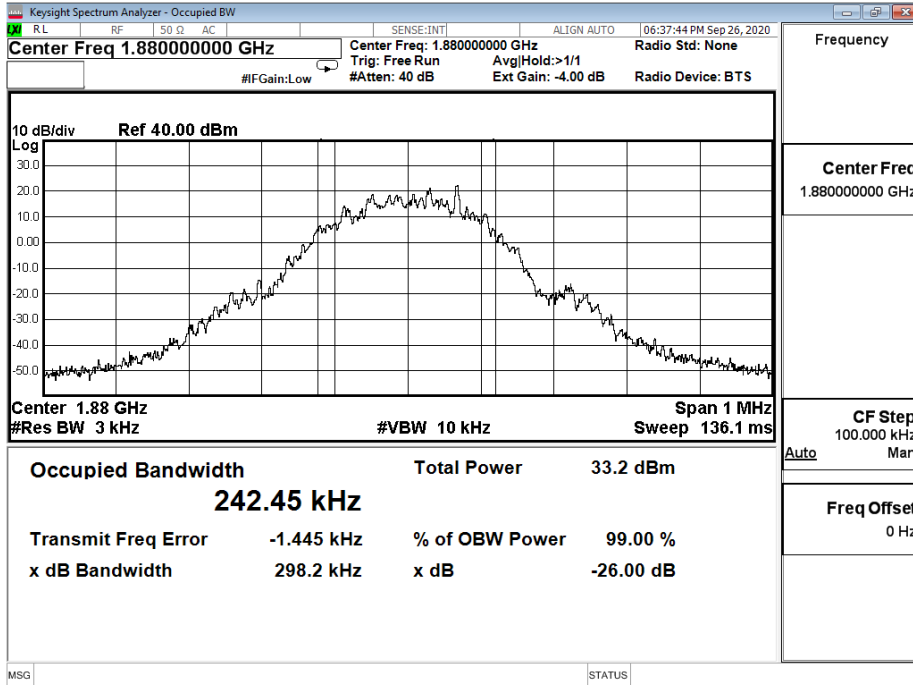


PCS\_1900\_CH810\_EGPRS

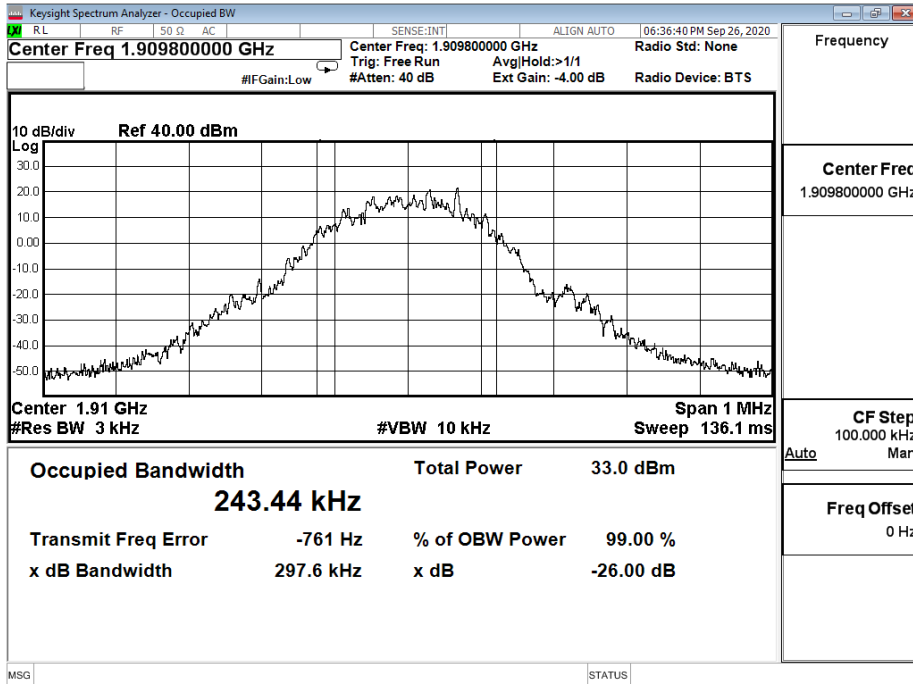

## 5. Peak To Average Ratio

### 5.1. Test Setup

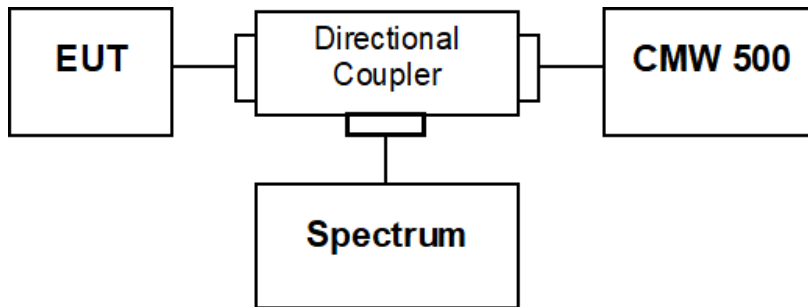

### 5.2. Test Procedure

1. Set resolution/measurement bandwidth  $\geq$  signal's occupied bandwidth.
2. Set the number of counts to a value that stabilizes the measured CCDF curve.
3. Record the maximum PAPR level associated with a probability of 0.1 %.

### 5.3. Test Method

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 5.7.2

ANSI C63.26-2015 Sub-clause 5.2.3.4

#### 5.4. Test Result

Product	LGA module		
Test Item	Peak To Average Ratio		
Test Mode	Mode 1: GSM 850		
Date of Test	2020/09/26	Test Site	SR12-H
Temperature (°C)	25	Humidity (%RH)	64

#### GSM 850


Channel No.	Frequency (MHz)	Modulation	Peak (dBm)	Average (dBm)	PAPR (dB)
128	824.2	GPRS	32.48	27.82	4.72
		EGPRS	32.41	27.76	4.70
190	836.6	GPRS	32.48	27.82	4.72
		EGPRS	32.45	27.79	4.72
251	848.8	GPRS	32.49	27.84	4.72
		EGPRS	32.52	27.87	4.70

### GSM\_850\_CH128\_GPRS



Date: 26.SEP.2020 15:02:38

### GSM\_850\_CH190\_GPRS

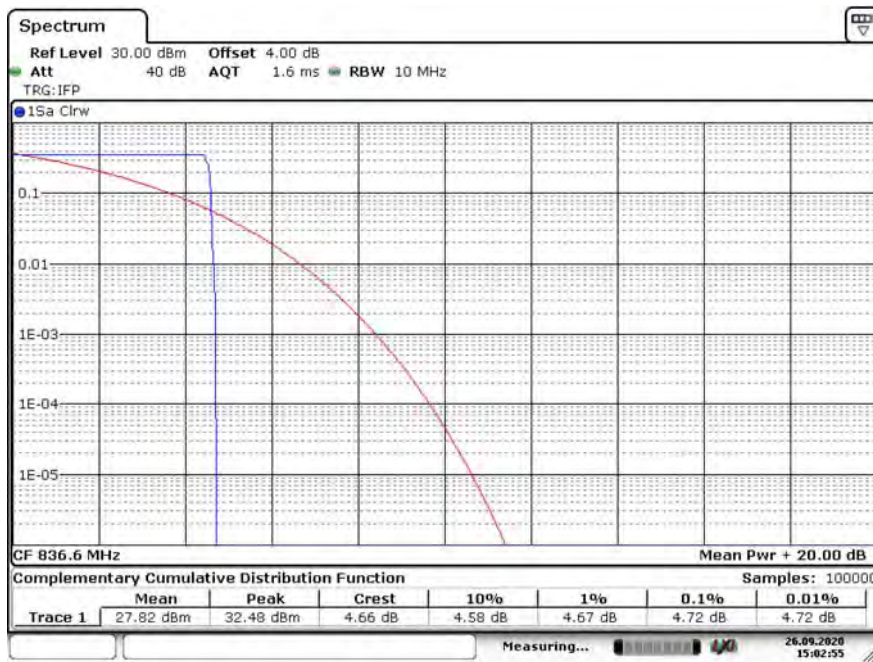

Date: 26.SEP.2020 15:02:55

GSM\_850\_CH251\_GPRS



Date: 26.SEP.2020 15:03:11




### GSM\_850\_CH128\_EGPRS



Date: 26.SEP.2020 15:04:11


### GSM\_850\_CH190\_EGPRS

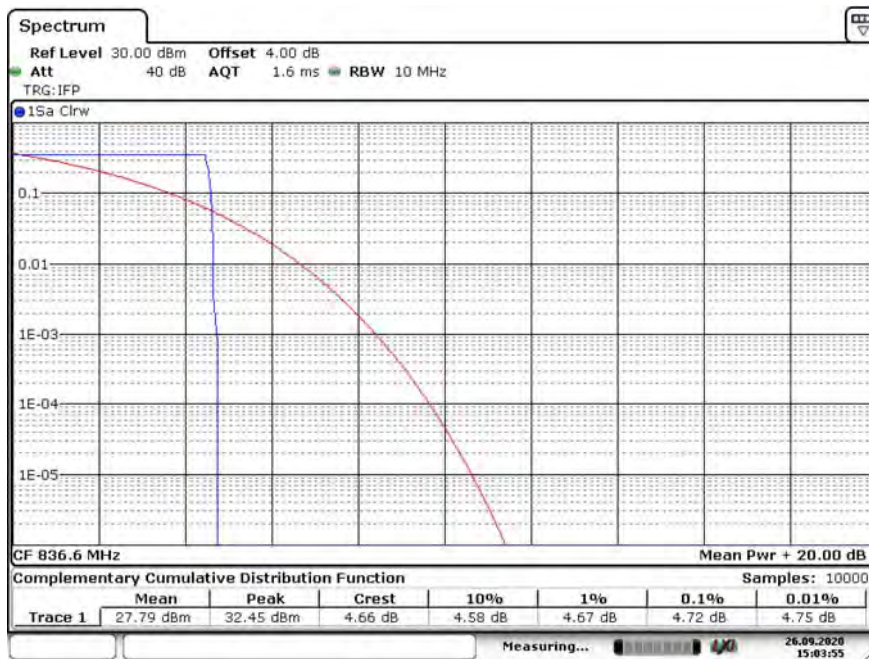

Date: 26.SEP.2020 15:03:55



GSM\_850\_CH251\_EGPRS

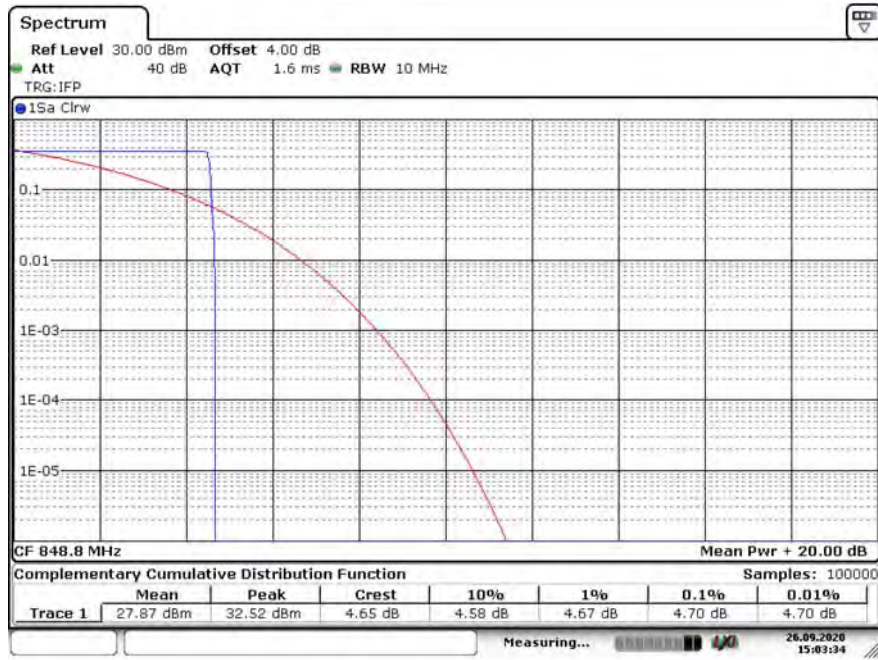

Date: 26.SEP.2020 15:03:34

Product	LGA module		
Test Item	Peak To Average Ratio		
Test Mode	Mode 2: PCS1900		
Date of Test	2020/09/26	Test Site	SR12-H
Temperature (°C)	25	Humidity (%RH)	64

PCS 1900


Channel No.	Frequency (MHz)	Modulation	Peak (dBm)	Average (dBm)	PAPR (dB)
512	1850.2	GPRS	29.11	24.22	4.93
		EGPRS	29.14	24.26	4.90
661	1880	GPRS	29.24	24.37	4.90
		EGPRS	29.18	24.30	4.93
810	1909.8	GPRS	29.19	24.32	4.93
		EGPRS	29.11	24.25	4.90

PCS\_1900\_CH512\_GPRS



Date: 26.SEP.2020 15:01:46

PCS\_1900\_CH661\_GPRS

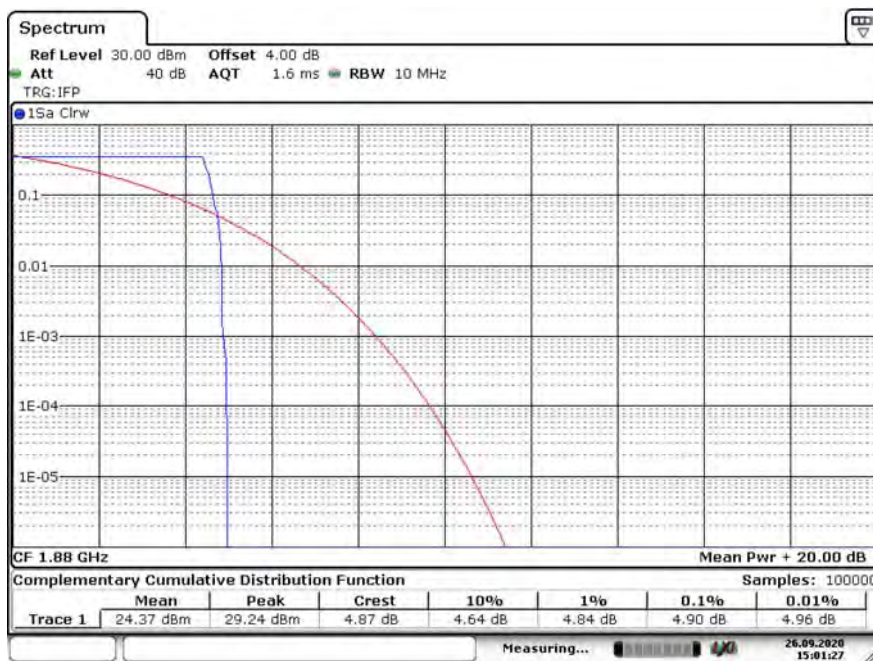

Date: 26.SEP.2020 15:01:28

PCS\_1900\_CH810\_GPRS



Date: 26.SEP.2020 15:01:07




PCS\_1900\_CH512\_EGPRS




Date: 26.SEP.2020 14:57:58

PCS\_1900\_CH661\_EGPRS

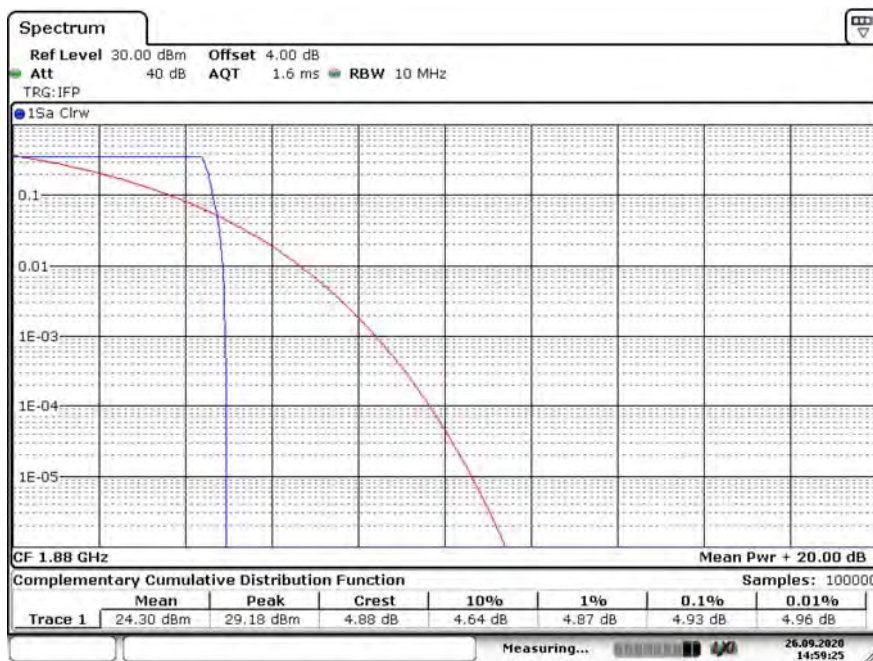

Date: 26.SEP.2020 14:59:25


PCS\_1900\_CH810\_EGPRS

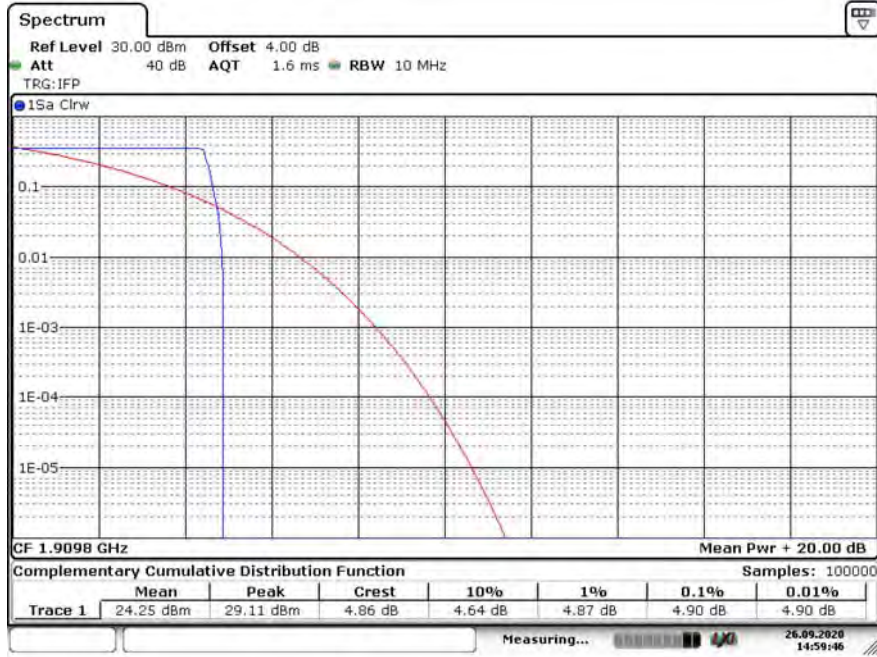

Date: 26.SEP.2020 14:59:46

## 6. Conducted Band Edge

### 6.1. Test Setup

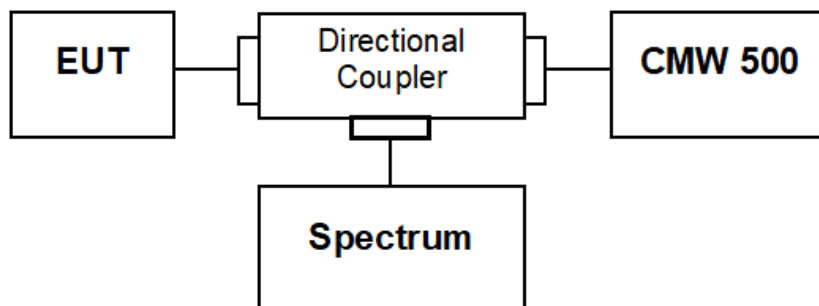

### 6.2. Test Procedure

1. The EUT was connected to spectrum analyzer and System Simulator via power divider.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. The conducted spurious emission for the whole frequency range was taken.
4. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed to measure the out of band Emissions.

### 6.3. Test Method

#### Conducted Spurious Measurement:

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 6.1

ANSI C63.26: 2015 Sub-clause 5.7

#### Radiated Spurious Measurement:


KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 5.8

ANSI C63.26: 2015 Sub-clause 5.5.3.2

### 6.4. Test Result


Product	LGA module		
Test Item	Conducted Band Edge		
Test Mode	Mode 1: GSM 850		
Date of Test	2020/09/30	Test Site	SR12-H
Temperature (°C)	24	Humidity (%RH)	64

GSM\_850\_CH128\_GPRS\_Above 1G

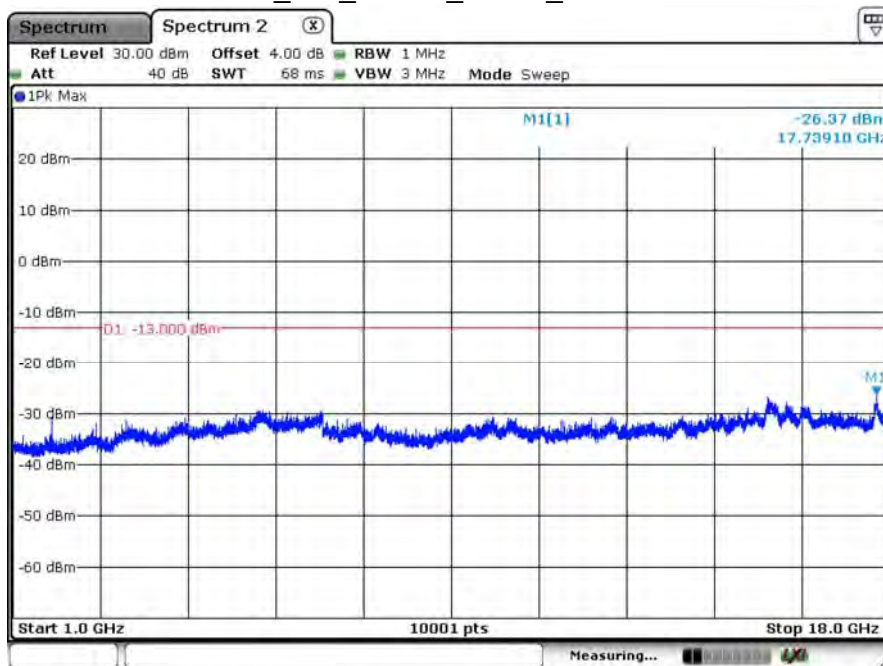

Date: 30.SEP.2020 09:52:55


GSM\_850\_CH128\_GPRS\_Below 1G

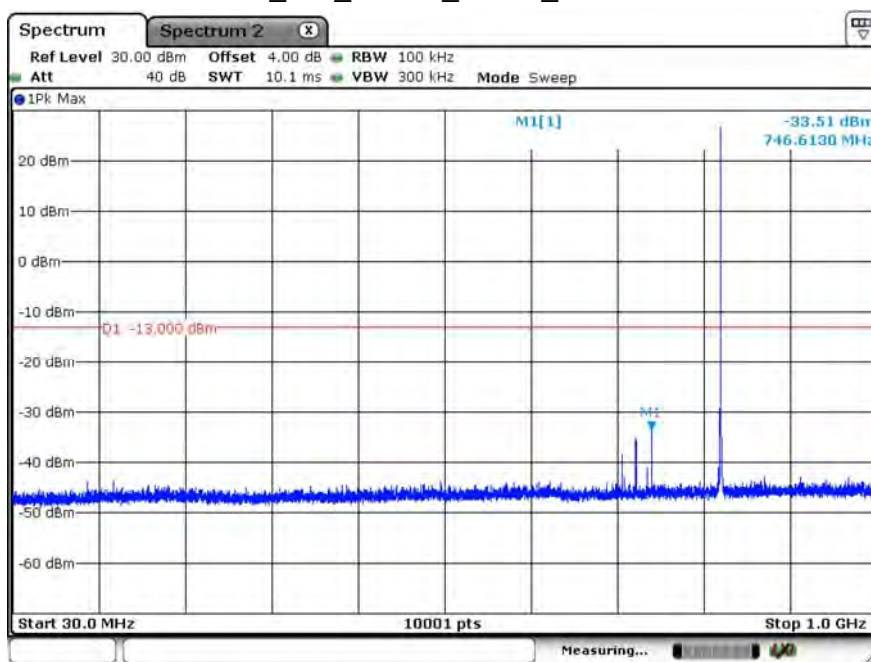

Date: 30.SEP.2020 09:52:18




### GSM\_850\_CH128\_EGPRS\_Above 1G

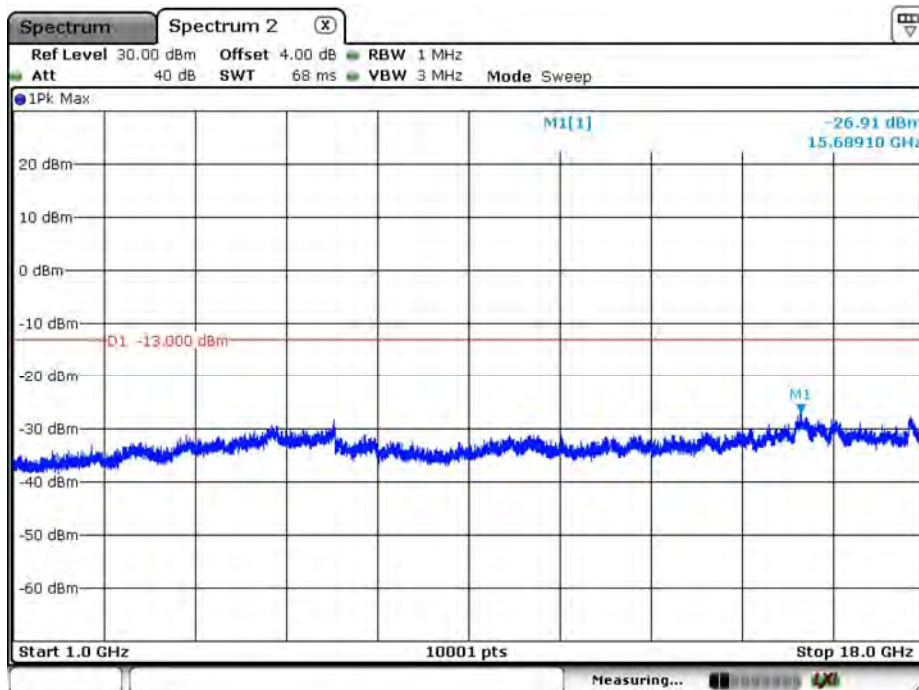


Date: 30.SEP.2020 10:05:27

### GSM\_850\_CH128\_EGPRS\_Below 1G

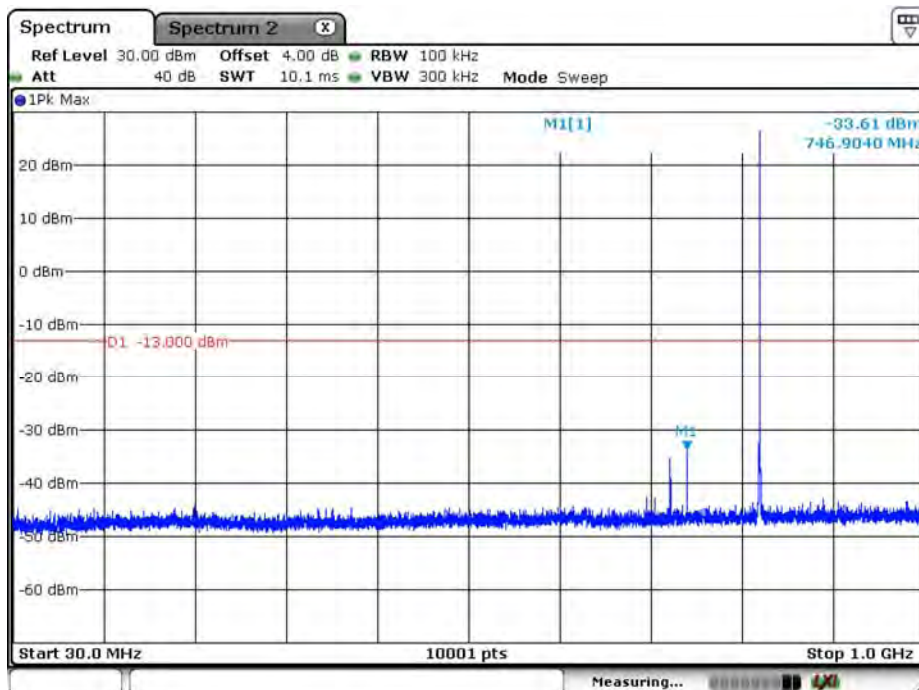


Date: 30.SEP.2020 10:06:05

### GSM\_850\_CH190\_GPRS\_Above 1G

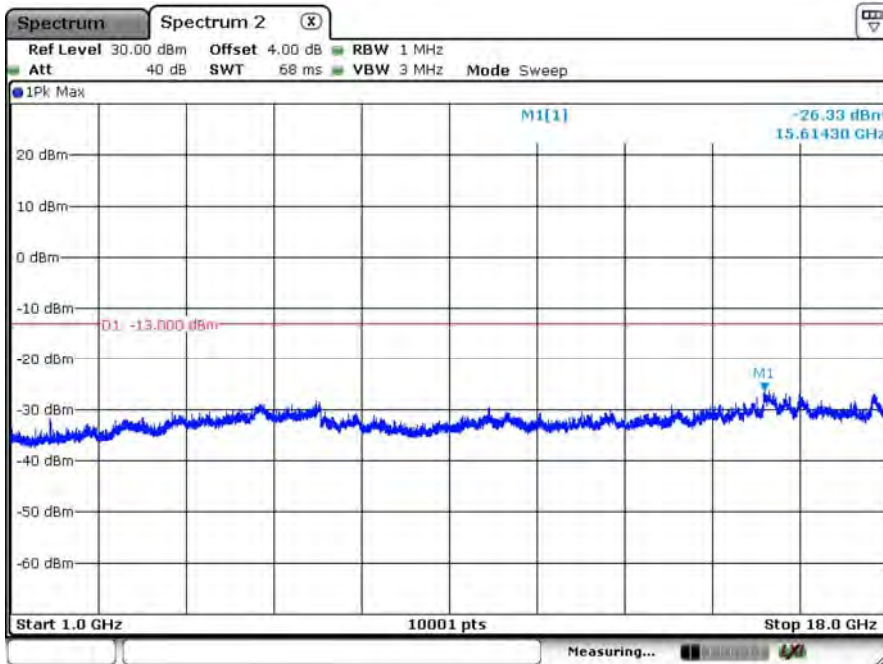


Date: 30 SEP.2020 09:56:33

### GSM\_850\_CH190\_GPRS\_Below 1G

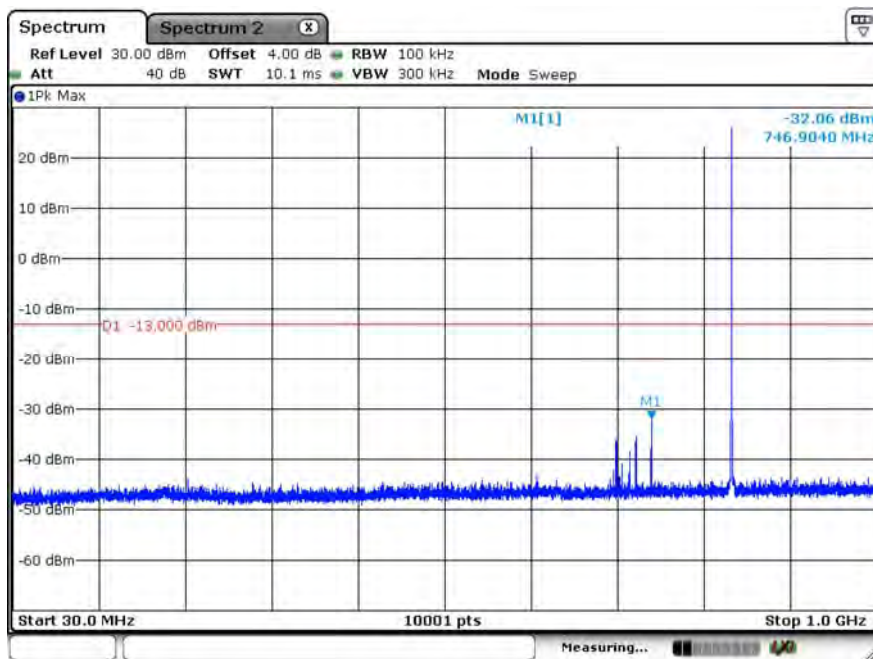


Date: 30 SEP.2020 09:57:22

### GSM\_850\_CH190\_EGPRS\_Above 1G

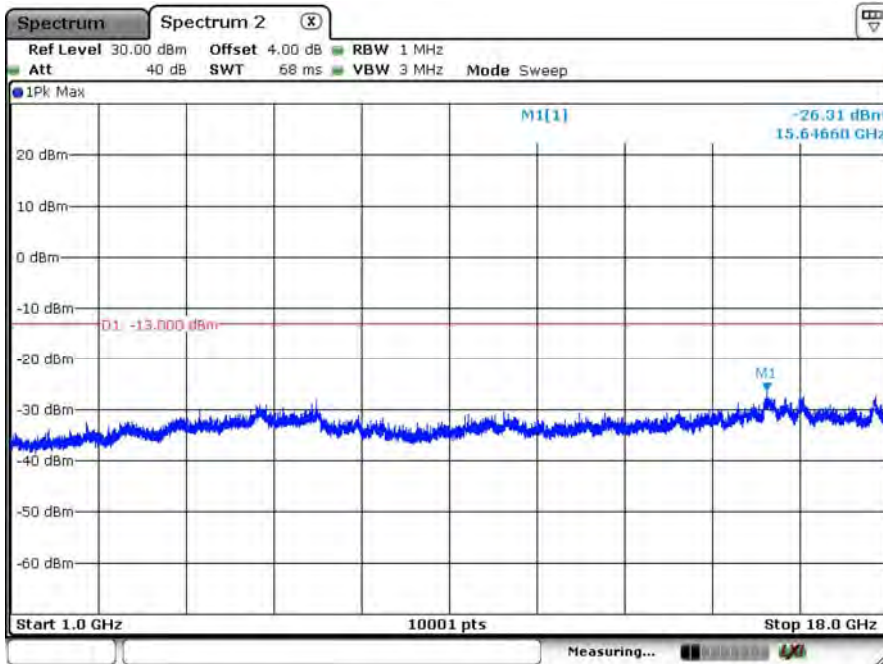


Date: 30.SEP.2020 10:04:47

### GSM\_850\_CH190\_EGPRS\_Below 1G

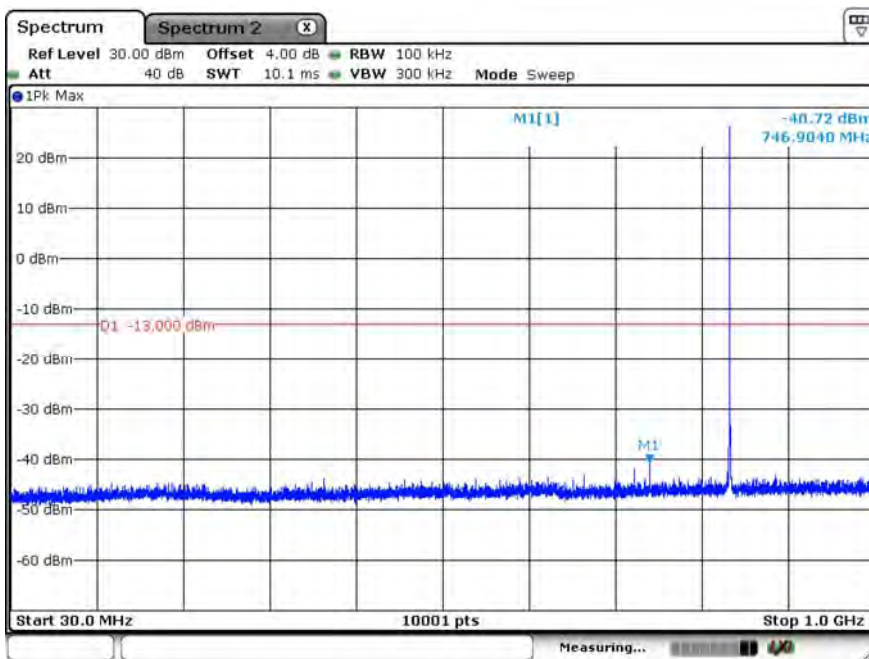


Date: 30.SEP.2020 10:04:08

### GSM\_850\_CH251\_GPRS\_Above 1G

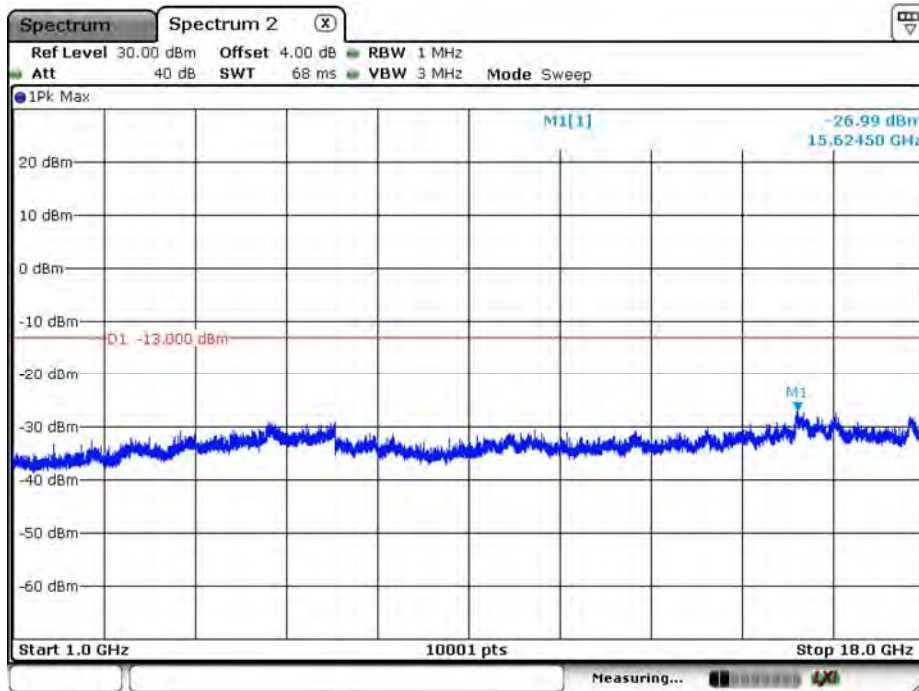

Date: 30.SEP.2020 09:58:45


### GSM\_850\_CH251\_GPRS\_Below 1G

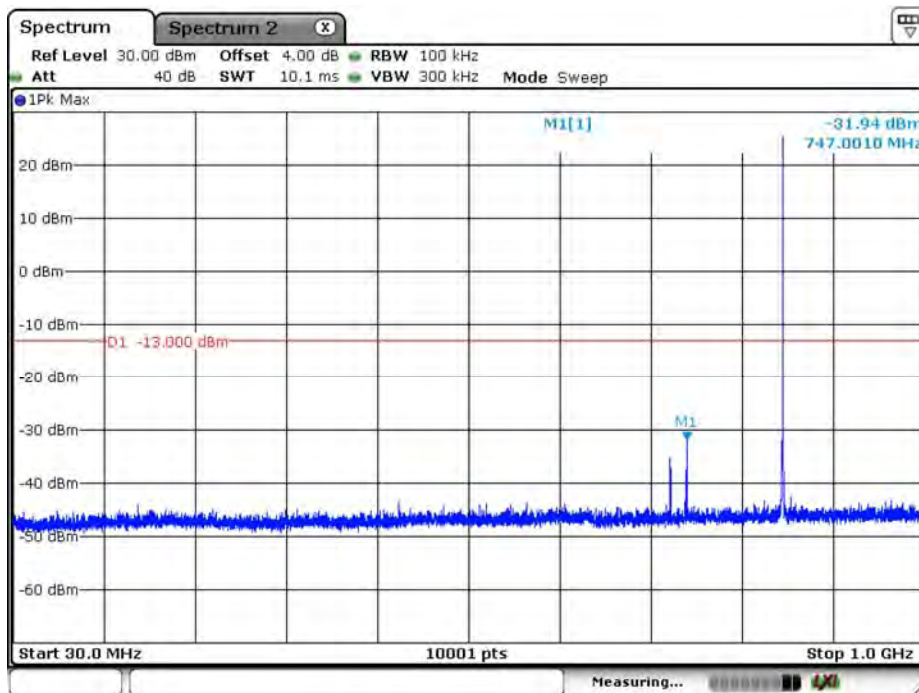

Date: 30.SEP.2020 09:58:13




### GSM\_850\_CH251\_EGPRS\_Above 1G

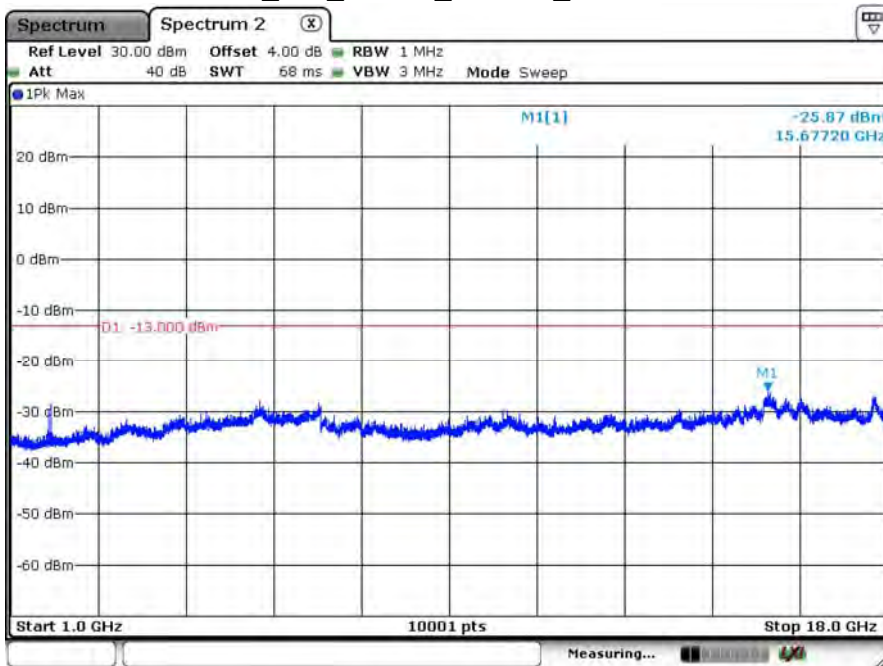

Date: 30.SEP.2020 10:01:58


### GSM\_850\_CH251\_EGPRS\_Below 1G

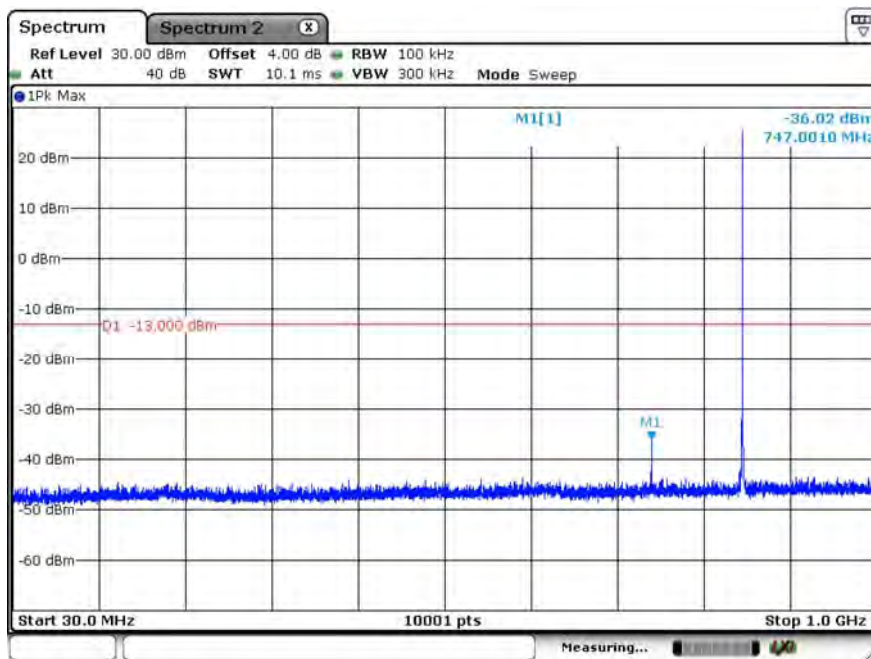


Date: 30.SEP.2020 10:02:57

Product	LGA module		
Test Item	Conducted Band Edge		
Test Mode	Mode 2: PCS1900		
Date of Test	2020/09/30	Test Site	SR12-H
Temperature (°C)	24	Humidity (%RH)	64


PCS\_1900\_CH512\_GPRS\_Above 1G

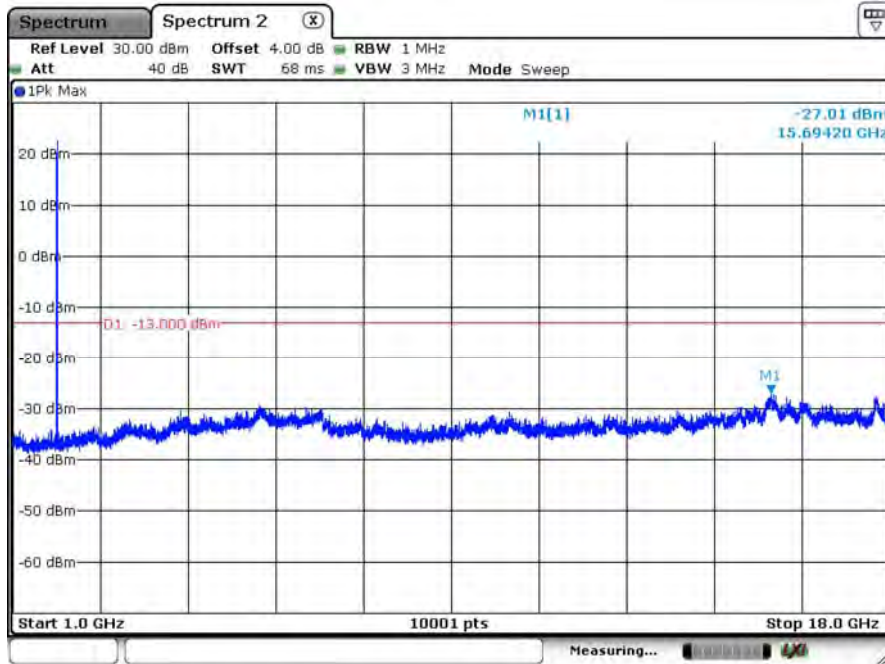

PCS\_1900\_CH512\_GPRS\_Below 1G

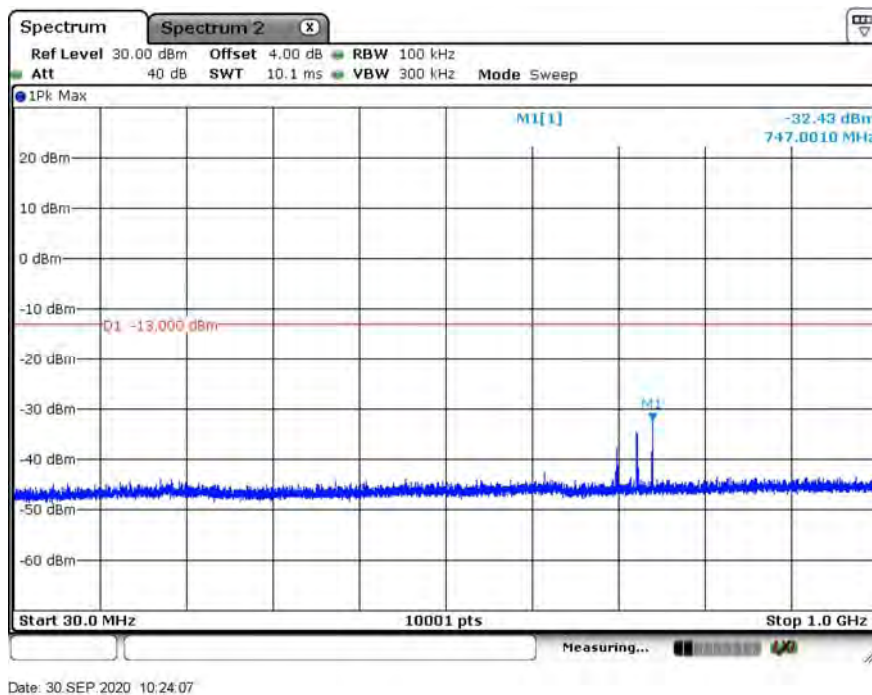


### PCS\_1900\_CH512\_EGPRS\_Above 1G

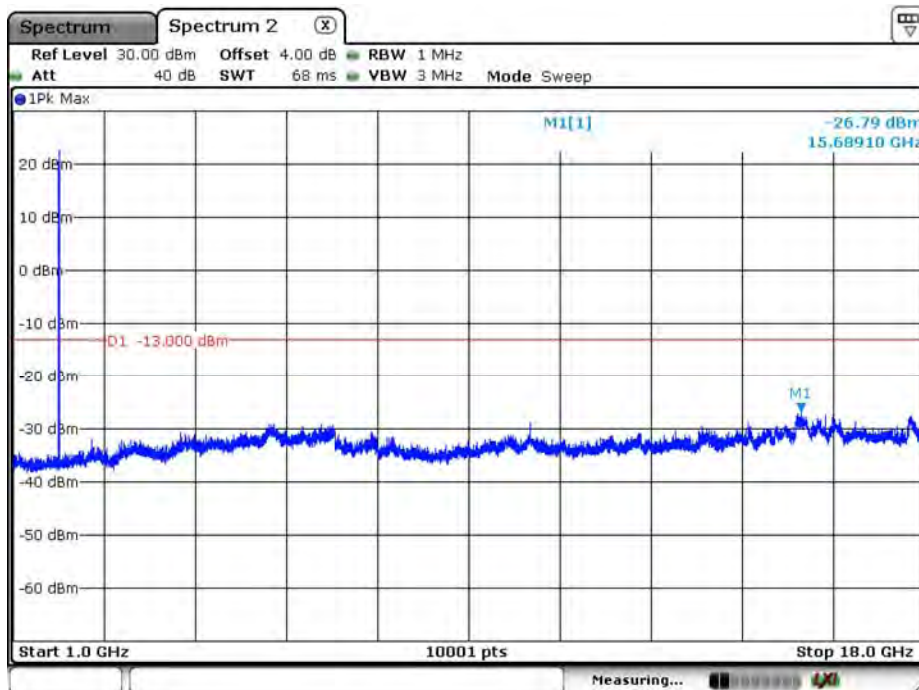


Date: 30.SEP.2020 10:08:30

### PCS\_1900\_CH512\_EGPRS\_Below 1G

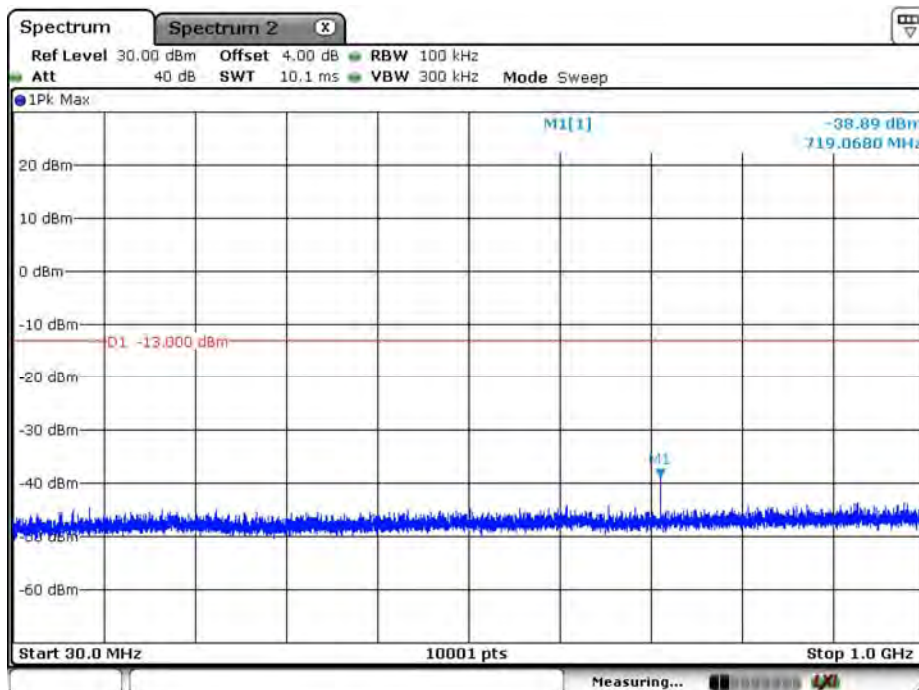


Date: 30.SEP.2020 10:07:37

### PCS\_1900\_CH661\_GPRS\_Above 1G

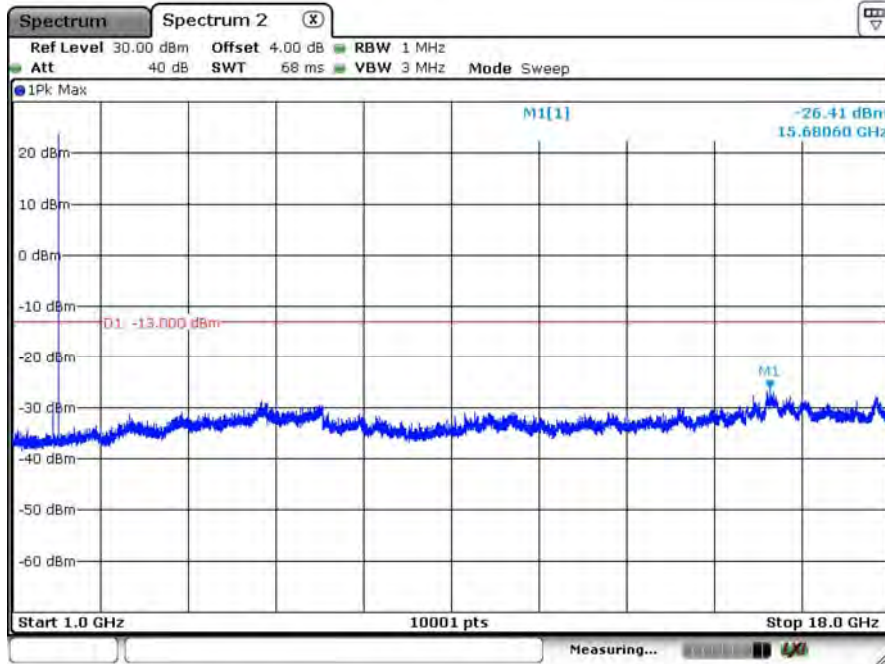

Date: 30.SEP.2020 10:21:24


### PCS\_1900\_CH661\_GPRS\_Below 1G

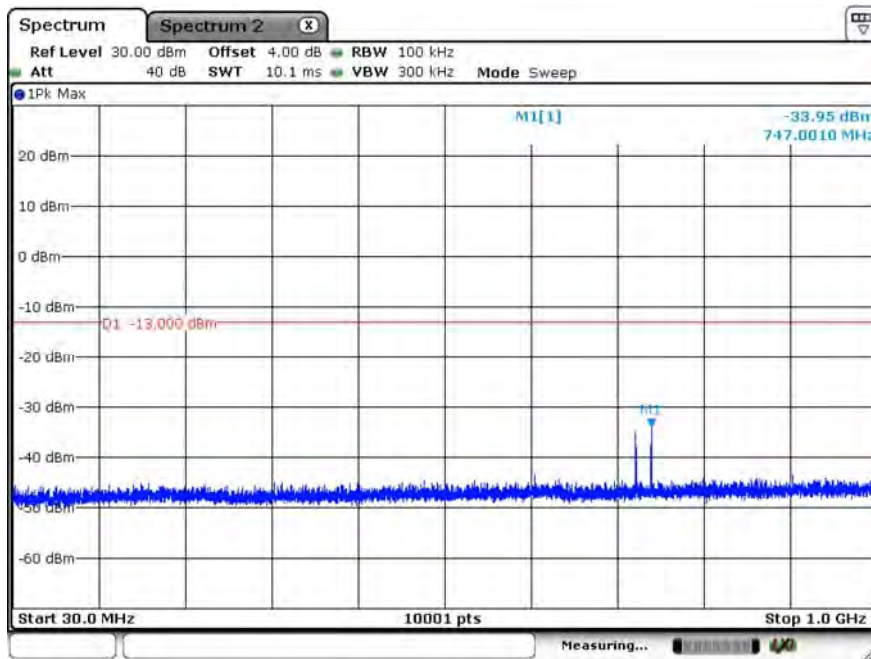

Date: 30.SEP.2020 10:20:41




### PCS\_1900\_CH661\_EGPRS\_Above 1G

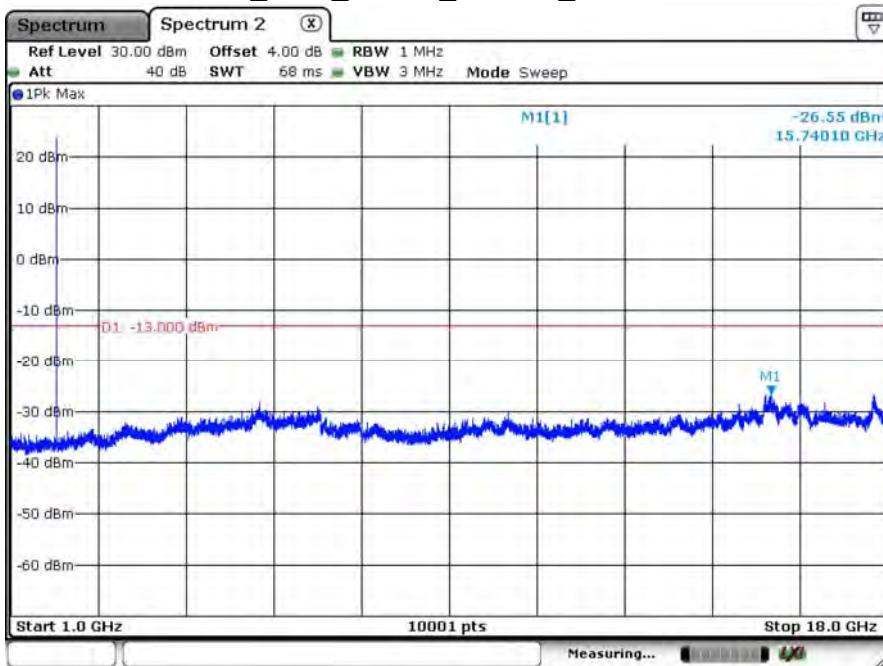


Date: 30.SEP.2020 10:09:19

### PCS\_1900\_CH661\_EGPRS\_Below 1G

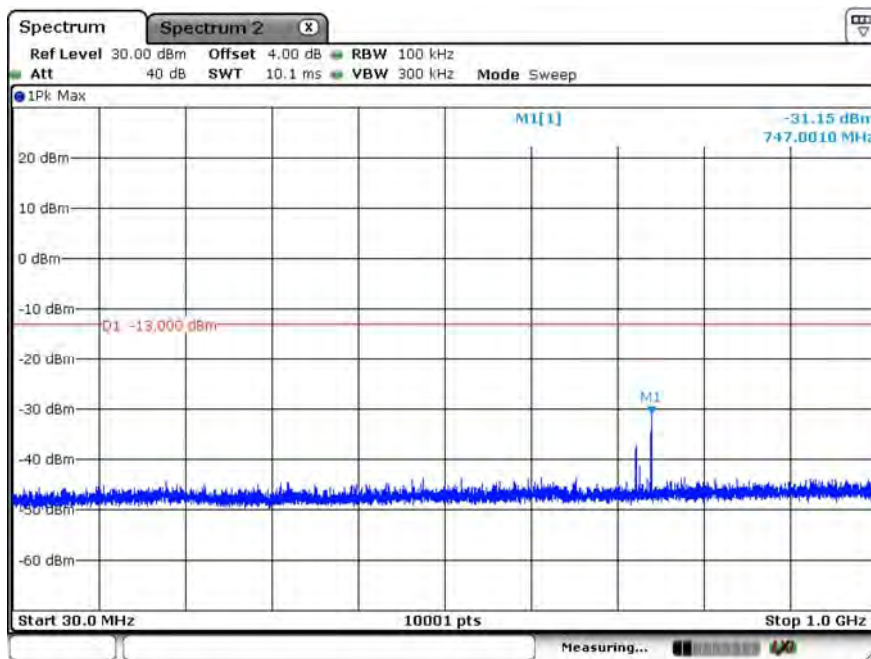


Date: 30.SEP.2020 10:09:48

### PCS\_1900\_CH810\_GPRS\_Above 1G

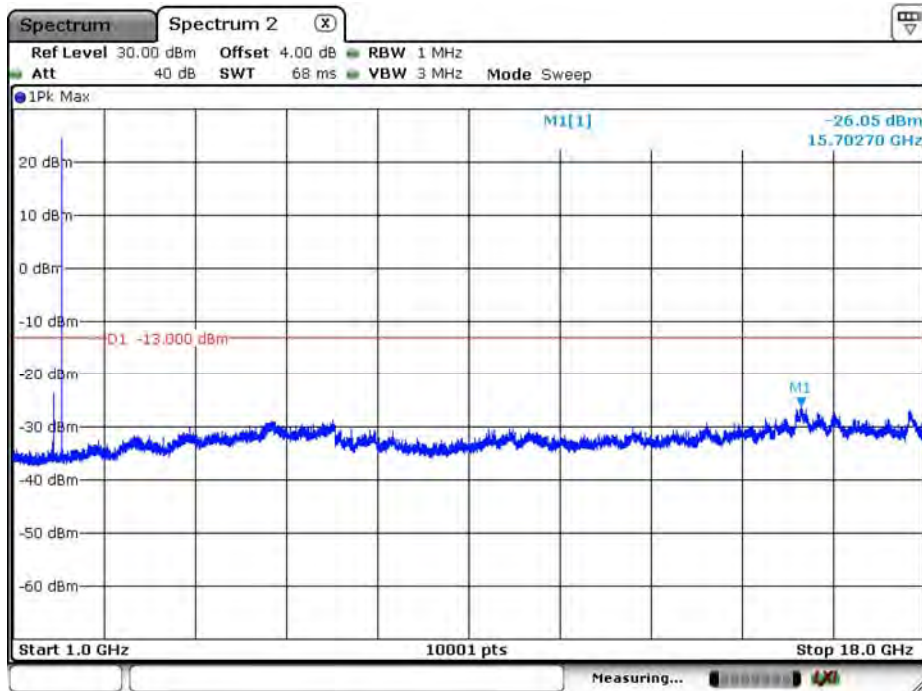


Date: 30.SEP.2020 10:15:52

### PCS\_1900\_CH810\_GPRS\_Below 1G

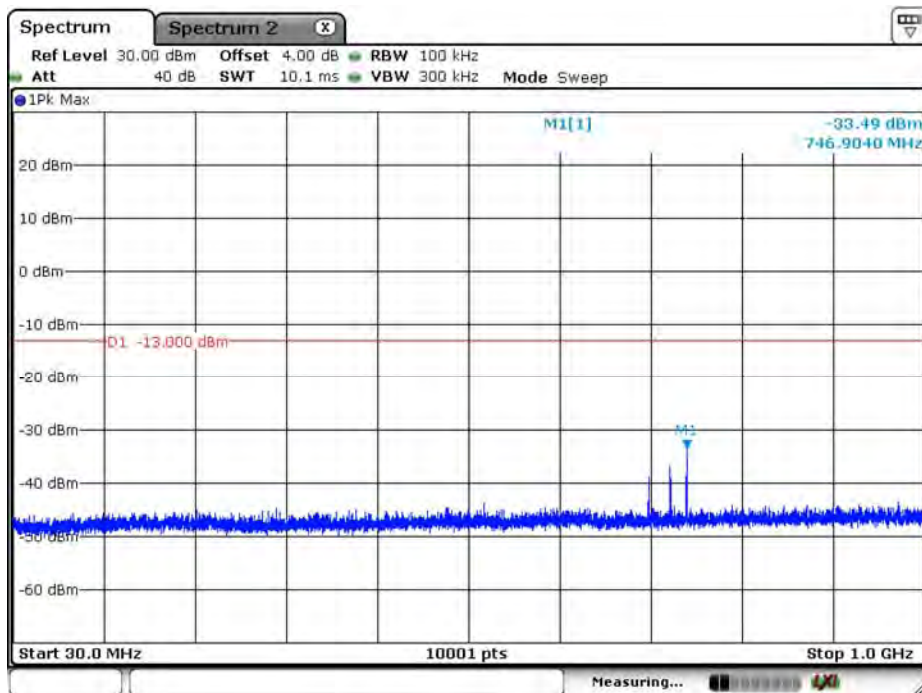


Date: 30.SEP.2020 10:20:09

### PCS\_1900\_CH810\_EGPRS\_Above 1G

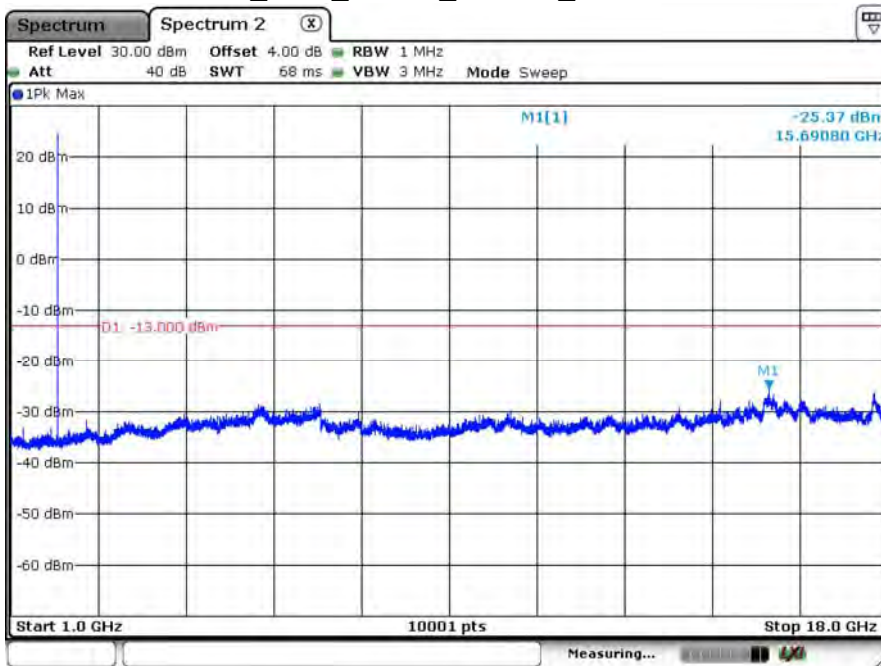

Date: 30.SEP.2020 10:12:59

### PCS\_1900\_CH810\_EGPRS\_Below 1G

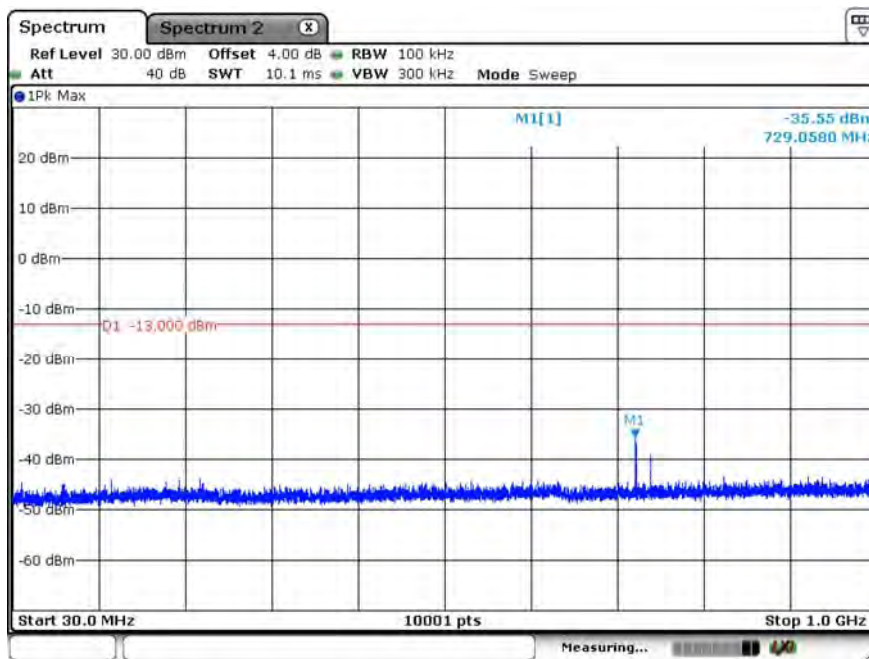


Date: 30.SEP.2020 10:10:32


## 7. Spurious Emission

### 7.1. Test Setup


Conducted Spurious Measurement (below 1GHz)

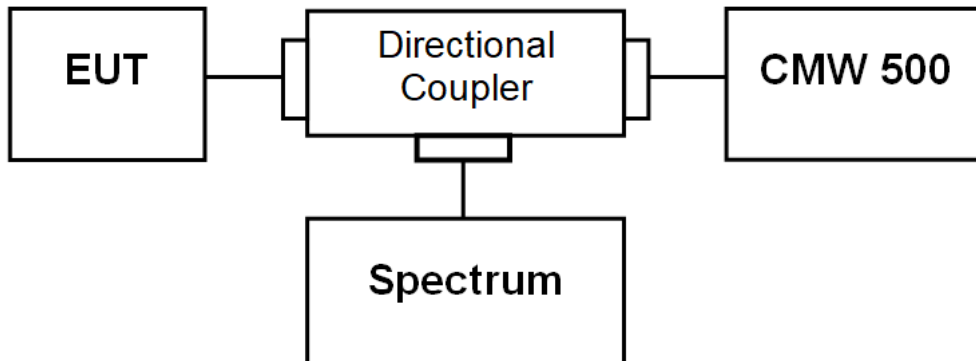

Radiated Spurious Measurement (below 1GHz)

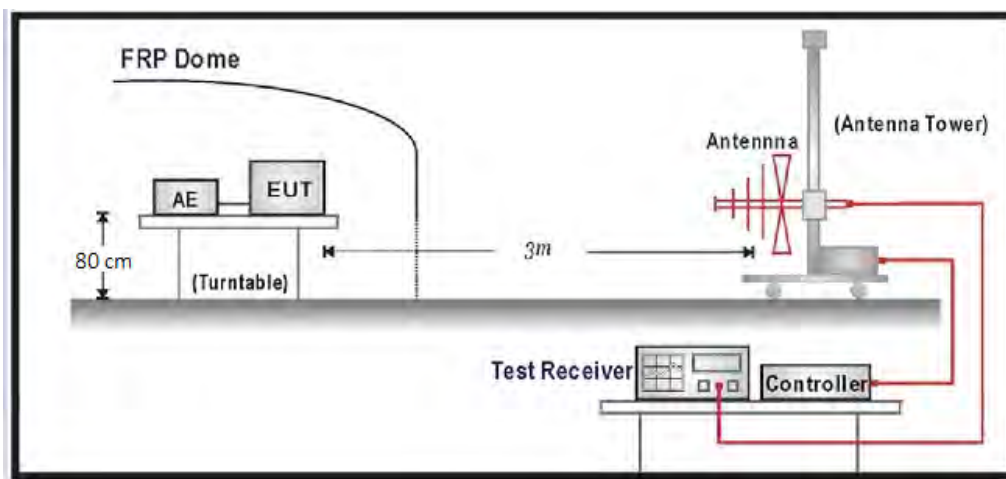

Radiated Spurious Measurement (above 1GHz)

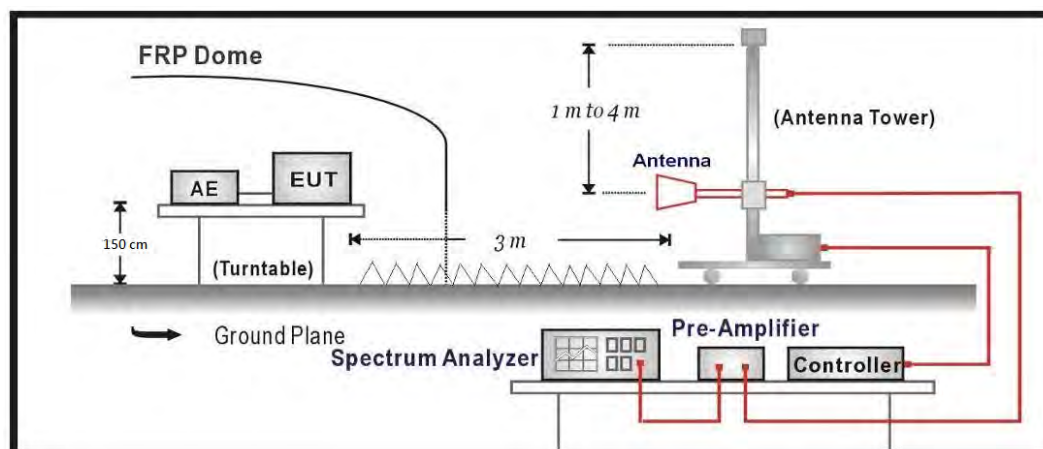

## 7.2. Test Procedure

### Conducted Spurious Measurement:

- a) Place the EUT on a bench and set it in transmitting mode.
- b) Connect a low loss RF cable from the antenna port to a spectrum analyzer and Base station by a Directional Couple.
- c) EUT Communicate with Base station, then select a channel for testing.
- d) Add a correction factor to the display of spectrum, and then test.
- e) The resolution bandwidth of the spectrum analyzer was set at 1 MHz, sufficient scans were taken to show the out of band Emission if any up to 10<sup>th</sup> harmonic.

### Radiated Spurious Measurement:

- a) The EUT was placed on a rotatable wooden table with 1.5 meter above ground.
- b) The EUT was set 3 meters from the receiving antenna, which was mounted on the antenna tower.
- c) The table was rotated 360 degrees to determine the position of the highest spurious emission.
- d) The height of the receiving antenna is varied between one meter and four meters to search the maximum spurious emission for both horizontal and vertical polarizations.
- e) Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 1MHz, Sweep 500ms, Taking the record of maximum spurious emission.
- f) A horn antenna was substituted in place of the EUT and was driven by a signal generator.
- g) Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
- h) Taking the record of output power at antenna port
- i) Repeat step 7 to step 8 for another polarization.
- j)  $EIRP = SG - \text{Cable loss} + \text{Antenna Gain}$

## 7.3. Test Method

### Conducted Spurious Measurement:

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 6.1  
ANSI C63.26-2015 Sub-clause 5.7

### Radiated Spurious Measurement:


KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 5.8  
ANSI C63.26-2015 Sub-clause 5.5.3.2



### 7.4. Test Result


Product	LGA module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 1: GSM 850		
Date of Test	2020/09/26	Test Site	SR12-H
Temperature (°C)	25	Humidity (%RH)	64

GSM\_850\_CH128\_GPRS

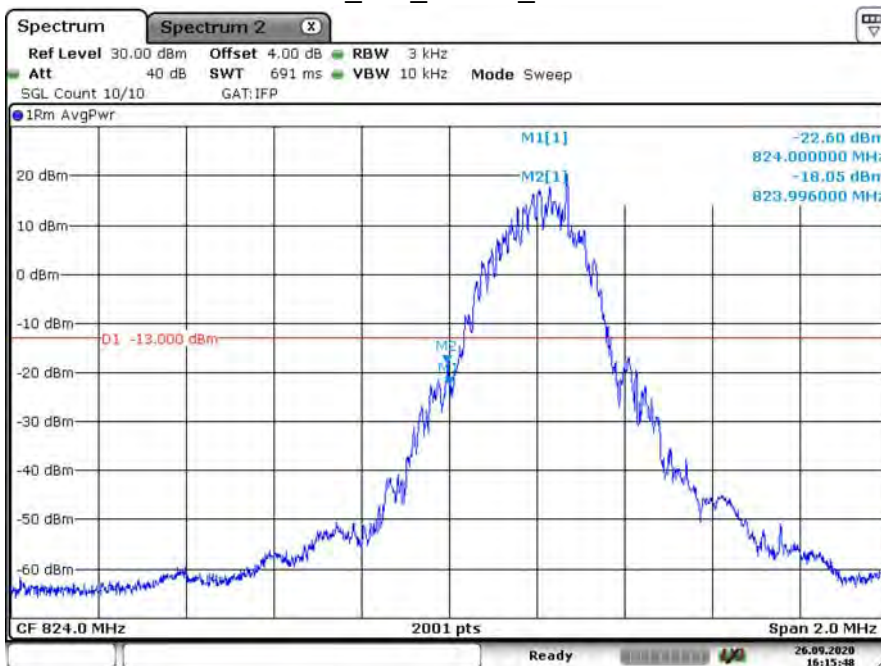


Date: 26.SEP.2020 16:15:48

GSM\_850\_CH251\_GPRS

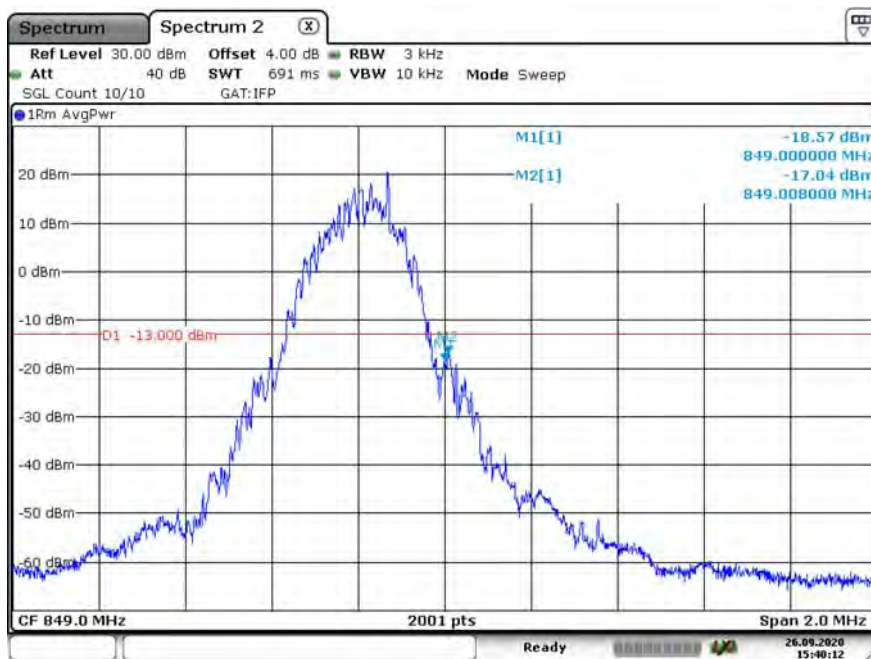


Date: 26.SEP.2020 15:40:12

### GSM\_850\_CH128\_EGPRS

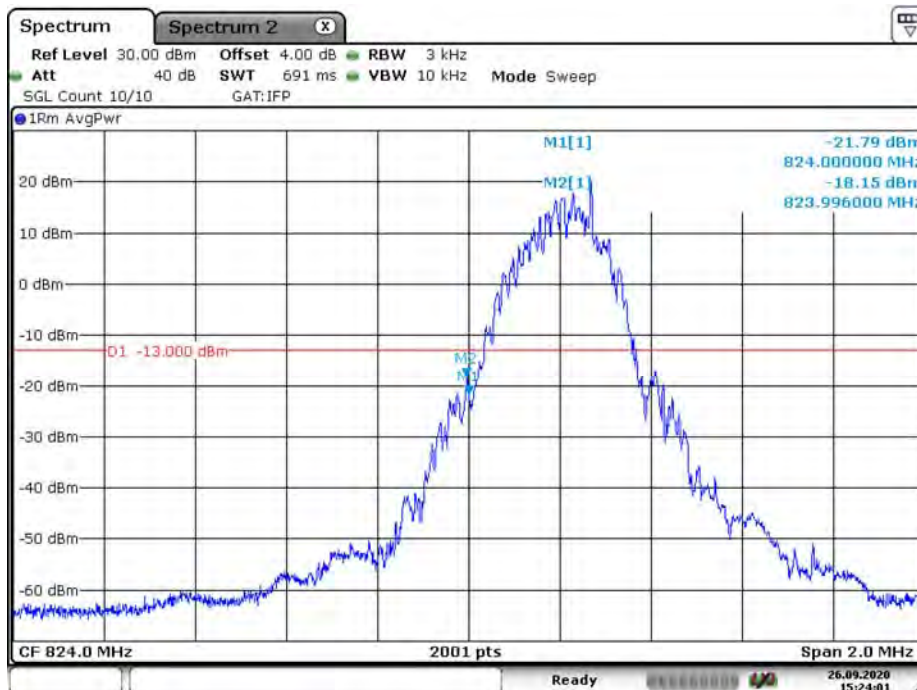

Date: 26 SEP.2020 15:24:01


### GSM\_850\_CH251\_EGPRS

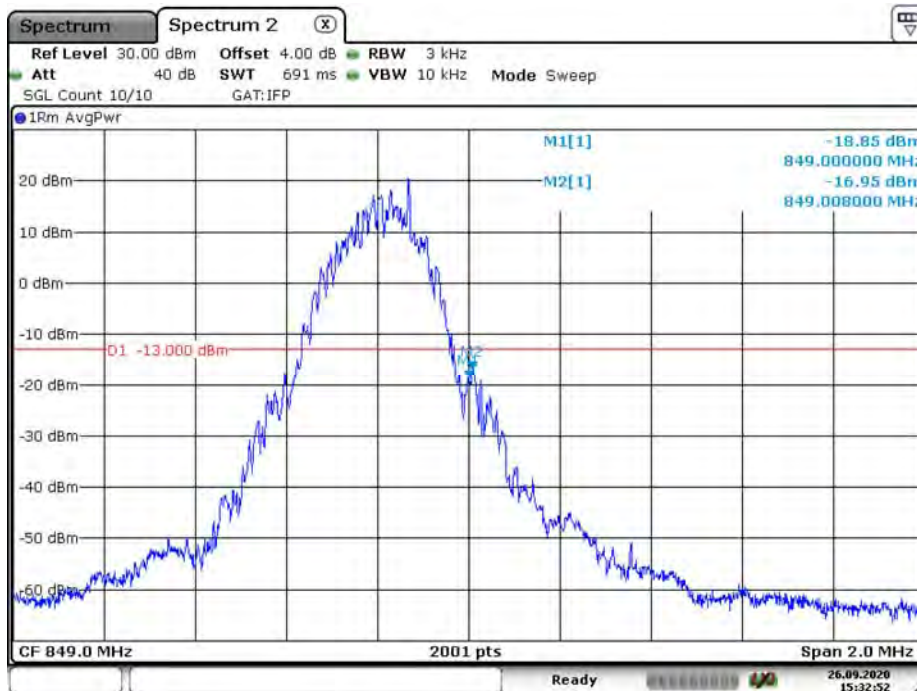

Date: 26 SEP.2020 15:32:53


Product	LGA module		
Test Item	Conducted Spurious Emission		
Test Mode	Mode 2: PCS1900		
Date of Test	2020/09/26	Test Site	SR12-H
Temperature (°C)	25	Humidity (%RH)	64

PCS\_1900\_CH512\_GPRS

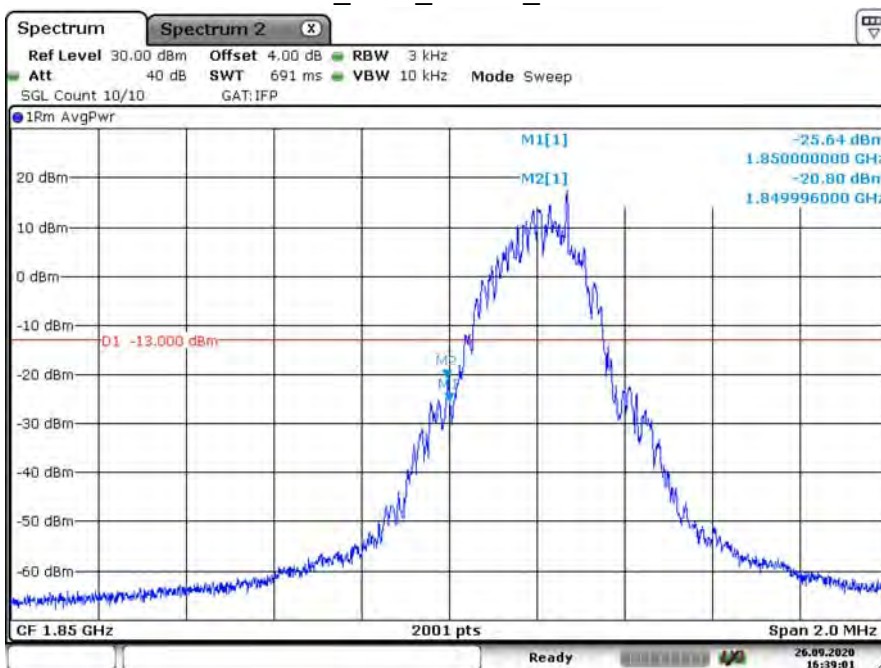

Date: 26.SEP.2020 16:39:01


PCS\_1900\_CH810\_GPRS

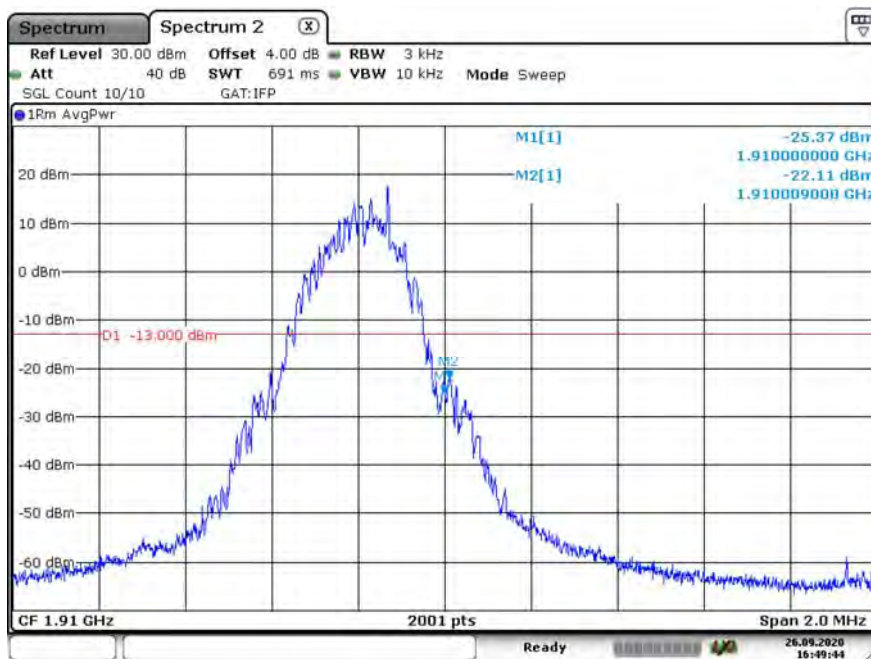

Date: 26.SEP.2020 16:49:44




### PCS\_1900\_CH512\_EGPRS

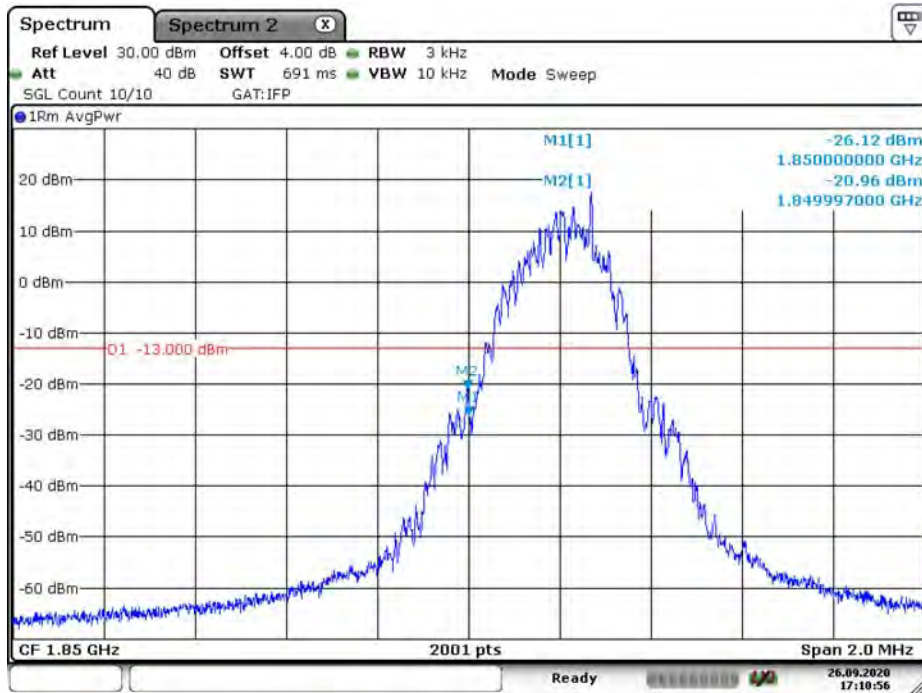

Date: 26 SEP. 2020 17:10:56

### PCS\_1900\_CH810\_EGPRS

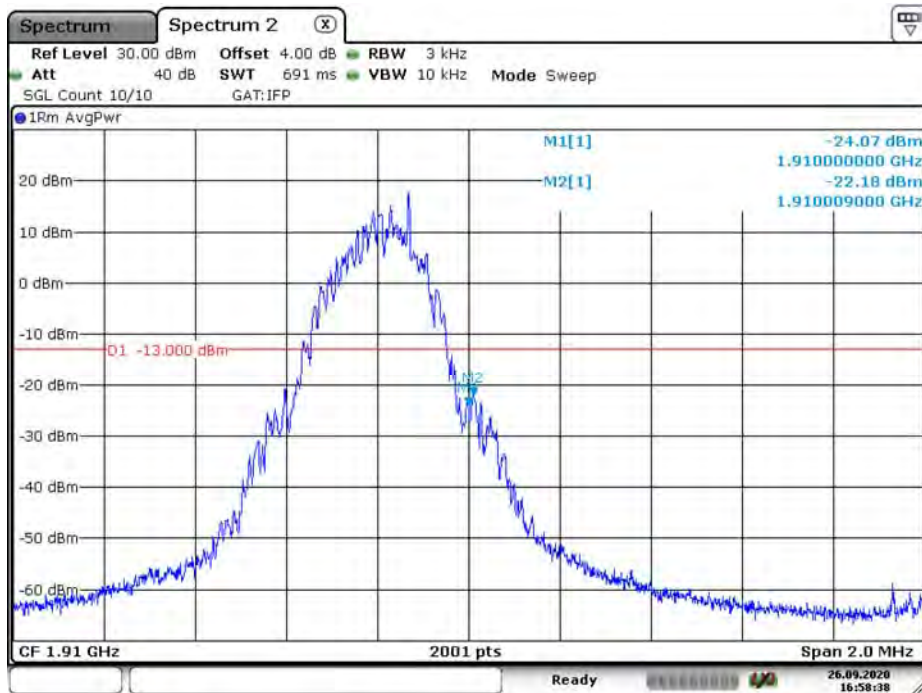

Date: 26 SEP. 2020 16:58:38

Product	LGA module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 1: GSM 850		
Date of Test	2020/10/13	Test Site	CB2-H
Temperature (°C)	25	Humidity (%RH)	55

## CH128\_EGPRS\_GSM850

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1648.400	-51.89	-13	-38.89	-58.19	9.29	2.99
	2472.600	-51.31	-13	-38.31	-58.21	10.59	3.68
	3296.800	-52.03	-13	-39.03	-59.94	12.17	4.26
V	1648.400	-50.71	-13	-37.71	-57.01	9.29	2.99
	2472.600	-46.26	-13	-33.26	-53.16	10.59	3.68
	3296.800	-52.10	-13	-39.10	-60.01	12.17	4.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## CH128\_GPRS\_GSM850

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1648.400	-50.88	-13	-37.88	-57.18	9.29	2.99
	2472.600	-49.41	-13	-36.41	-56.31	10.59	3.68
	3296.800	-51.68	-13	-38.68	-59.59	12.17	4.26
V	1648.400	-50.95	-13	-37.95	-57.25	9.29	2.99
	2472.600	-45.48	-13	-32.48	-52.38	10.59	3.68
	3296.800	-51.44	-13	-38.44	-59.35	12.17	4.26

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## CH190\_EGPRS\_GSM850

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.200	-49.26	-13	-36.26	-55.61	9.36	3.01
	2509.800	-50.22	-13	-37.22	-57.13	10.62	3.71
	3346.400	-51.91	-13	-38.91	-59.89	12.28	4.30
V	1673.200	-48.72	-13	-35.72	-55.07	9.36	3.01
	2509.800	-44.90	-13	-31.90	-51.81	10.62	3.71
	3346.400	-51.30	-13	-38.30	-59.28	12.28	4.30

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## CH190\_GPRS\_GSM850

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1673.200	-50.36	-13	-37.36	-56.71	9.36	3.01
	2509.800	-50.88	-13	-37.88	-57.79	10.62	3.71
	3346.400	-52.31	-13	-39.31	-60.29	12.28	4.30
V	1673.200	-48.46	-13	-35.46	-54.81	9.36	3.01
	2509.800	-45.11	-13	-32.11	-52.02	10.62	3.71
	3346.400	-52.21	-13	-39.21	-60.19	12.28	4.30

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## CH251\_EGPRS\_GSM850

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1697.600	-47.99	-13	-34.99	-54.39	9.44	3.03
	2546.400	-49.33	-13	-36.33	-56.28	10.69	3.74
	3395.200	-51.45	-13	-38.45	-59.50	12.38	4.33
V	1697.600	-48.90	-13	-35.90	-55.30	9.44	3.03
	2546.400	-44.64	-13	-31.64	-51.59	10.69	3.74
	3395.200	-51.77	-13	-38.77	-59.82	12.38	4.33

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## CH251\_GPRS\_GSM850

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	1697.600	-48.13	-13	-35.13	-54.53	9.44	3.03
	2546.400	-49.68	-13	-36.68	-56.63	10.69	3.74
	3395.200	-50.74	-13	-37.74	-58.79	12.38	4.33
V	1697.600	-48.47	-13	-35.47	-54.87	9.44	3.03
	2546.400	-44.47	-13	-31.47	-51.42	10.69	3.74
	3395.200	-51.21	-13	-38.21	-59.26	12.38	4.33

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

Product	LGA module		
Test Item	Radiated Spurious Emission		
Test Mode	Mode 2: PCS1900		
Date of Test	2020/10/13	Test Site	CB2-H
Temperature (°C)	25	Humidity (%RH)	55

## CH512\_EGPRS\_GSM1900

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3700.400	-50.72	-13	-37.72	-58.82	12.61	4.51
	5550.600	-47.61	-13	-34.61	-55.07	13.13	5.67
	7400.800	-43.73	-13	-30.73	-48.45	11.32	6.60
V	3700.400	-48.12	-13	-35.12	-56.22	12.61	4.51
	5550.600	-47.65	-13	-34.65	-55.11	13.13	5.67
	7400.800	-43.73	-13	-30.73	-48.45	11.32	6.60

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## CH512\_GPRS\_GSM1900

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3700.400	-51.25	-13	-38.25	-59.35	12.61	4.51
	5550.600	-47.78	-13	-34.78	-55.24	13.13	5.67
	7400.800	-42.76	-13	-29.76	-47.48	11.32	6.60
V	3700.400	-49.25	-13	-36.25	-57.35	12.61	4.51
	5550.600	-47.76	-13	-34.76	-55.22	13.13	5.67
	7400.800	-42.99	-13	-29.99	-47.71	11.32	6.60

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## CH661\_EGPRS\_GSM1900

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-50.05	-13	-37.05	-58.12	12.60	4.54
	5640.000	-47.50	-13	-34.50	-54.90	13.10	5.70
	7520.000	-42.85	-13	-29.85	-47.47	11.24	6.61
V	3760.000	-47.04	-13	-34.04	-55.11	12.60	4.54
	5640.000	-46.89	-13	-33.89	-54.29	13.10	5.70
	7520.000	-42.87	-13	-29.87	-47.49	11.24	6.61

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## CH661\_GPRS\_GSM1900

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3760.000	-50.72	-13	-37.72	-58.79	12.60	4.54
	5640.000	-47.97	-13	-34.97	-55.37	13.10	5.70
	7520.000	-43.38	-13	-30.38	-48.00	11.24	6.61
V	3760.000	-47.29	-13	-34.29	-55.36	12.60	4.54
	5640.000	-46.89	-13	-33.89	-54.29	13.10	5.70
	7520.000	-42.83	-13	-29.83	-47.45	11.24	6.61

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## CH810\_EGPRS\_GSM1900

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3819.600	-48.52	-13	-35.52	-56.56	12.60	4.57
	5729.400	-46.83	-13	-33.83	-54.18	13.08	5.73
	7639.200	-43.49	-13	-30.49	-48.14	11.24	6.60
V	3819.600	-47.44	-13	-34.44	-55.48	12.60	4.57
	5729.400	-47.06	-13	-34.06	-54.41	13.08	5.73
	7639.200	-43.75	-13	-30.75	-48.40	11.24	6.60

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.


## CH810\_GPRS\_GSM1900

Antenna Polarity	Frequency (MHz)	Emission Level (dBm)	Limit (dBm)	Margin (dB)	SG Level (dBm)	Antenna Gain (dBi)	Cable Loss (dB)
H	3819.600	-50.63	-13	-37.63	-58.67	12.60	4.57
	5729.400	-46.78	-13	-33.78	-54.13	13.08	5.73
	7639.200	-43.31	-13	-30.31	-47.96	11.24	6.60
V	3819.600	-49.61	-13	-36.61	-57.65	12.60	4.57
	5729.400	-47.22	-13	-34.22	-54.57	13.08	5.73
	7639.200	-43.43	-13	-30.43	-48.08	11.24	6.60

Emission Level=SG(Signal Generator) Level+Antenna Gain-Cable Loss.

## 8. Frequency Stability

### 8.1. Test Setup

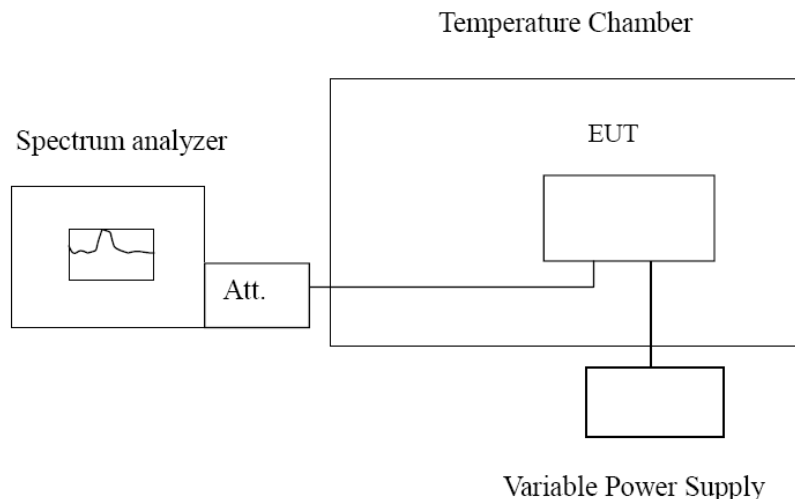

### 8.2. Test Procedure

#### Frequency Stability under Temperature Variations:

The equipment under test was connected to an external AC or DC power supply and input rated voltage. RF output was connected to a frequency counter or spectrum analyzer via feed through attenuators. The EUT was placed inside the temperature chamber. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and measure EUT 20°C operating frequency as reference frequency. Turn EUT off and set the chamber temperature to -30°C. After the temperature stabilized for approximately 30 minutes recorded the frequency. Repeat step measure with 10°C increased per stage until the highest temperature of +50°C reached.

#### Frequency Stability under Voltage Variations:

Set chamber temperature to 20°C. Use a variable AC power supply / DC power source to power the EUT and set the voltage to rated voltage. Set the spectrum analyzer RBW low enough to obtain the desired frequency resolution and recorded the frequency. Reduce the input voltage to specify extreme voltage variation ( $\pm 15\%$ ) and endpoint, record the maximum frequency change.

### 8.3. Test Method

KDB 971168 D01 Power Meas License Digital Systems v03 sub-clause 9  
ANSI C63.26-2015 Sub-clause 5.6

#### 8.4. Test Result

Product	LGA module		
Test Item	Frequency Stability		
Test Mode	Mode 1: GSM 850		
Date of Test	2020/09/26	Test Site	SR12-H
Temperature (°C)	25	Humidity (%RH)	64

GSM 850\_824.2 MHz

Voltage

Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.2	20.77	0.0112
3.8	22.28	0.0120
3.3	22.19	0.0120

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	22.59	0.0122
-20	21.91	0.0118
-10	21.41	0.0116
0	21.15	0.0114
10	21.87	0.0118
20	21.30	0.0115
30	21.54	0.0116
40	21.43	0.0116
50	21.09	0.0114

GSM 850 848.8 MHz

Voltage

Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.2	12.81	0.0069
3.8	13.01	0.0070
3.3	12.62	0.0068

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	12.50	0.0068
-20	13.26	0.0072
-10	12.42	0.0067
0	12.48	0.0067
10	12.97	0.0070
20	12.57	0.0068
30	12.86	0.0070
40	13.19	0.0071
50	12.68	0.0069



Product	LGA module		
Test Item	Frequency Stability		
Test Mode	Mode 2: PCS1900		
Date of Test	2020/09/26	Test Site	SR12-H
Temperature (°C)	25	Humidity (%RH)	64

PCS 1900\_1850.2 MHz

Voltage

Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.2	18.08	0.0098
3.8	18.21	0.0098
3.3	18.00	0.0097

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	18.25	0.0099
-20	18.10	0.0098
-10	17.99	0.0097
0	17.91	0.0097
10	17.23	0.0093
20	18.50	0.0100
30	18.22	0.0098
40	17.73	0.0096
50	17.50	0.0095

PCS 1900\_1909.8 MHz

Voltage

Voltage (VAC)	Frequency Error(Hz)	Frequency Error(ppm)
4.2	-6.86	-0.0037
3.8	-6.88	-0.0037
3.3	-7.20	-0.0039

Temperature

TEMPERATURE	Frequency Error(Hz)	Frequency Error (ppm)
-30	-6.65	-0.0036
-20	-7.77	-0.0042
-10	-6.76	-0.0037
0	-7.88	-0.0043
10	-6.55	-0.0035
20	-7.78	-0.0042
30	-7.99	-0.0043
40	-6.81	-0.0037
50	-7.07	-0.0038