

Test Report

FOR

FCC Part 15 Subpart C

of

WLAN b USB Adapter with Flash Disk

Model:

KU8-M

(Brand:Wistron NeWeb)

Applied by:

Wistron NeWeb Corporation
No. 10-1, Li-hsin Road I,
Science-based Industrial Park Hsinchu 300,
Taiwan, R. O. C.



:



(NVLAP Lab. Code: 200234-0)

Test Performed by

International Standards Laboratory

No. 120, Lane 180, San Ho Tsuen, Hsin Ho Rd.
Lung-Tan Hsiang, Tao Yuan County 325
Taiwan, R.O.C.
Tel:(03)407-1718 Fax:(03)407-1738

Report Number: 03LR018FC

NVLAP Lab. Code: 200234-0; VCCI: R-1435, C-1440; NEMKO Aut. No: ELA 113; BSMI Lab. Code: SL2-IN-E-0013

Test Date: 2003/09/29

9.3.1	Test Equipment List.....	33
9.3.2	Software for Controlling Spectrum/Receiver and Calculating Test Data.....	34
9.4	Appendix D: Layout of EUT and Support Equipment.....	35
9.4.1	General Conducted Test Configuration	35
9.4.2	General Radiation Test Configuration.....	36
9.5	Appendix E: Description of Support Equipment	37
9.5.1	Description of Support Equipment	37
9.5.2	Software for Controlling Support Unit	39
9.5.3	I/O Cable Condition of EUT and Support Units	40
9.6	Appendix F: Accuracy of Measurement.....	41
9.7	Appendix G: Photographs of EUT Configuration Test Set Up	43
9.8	Appendix H: Antenna Spec.....	45

1. . General

1.1 Certification of Accuracy of Test Data

The electromagnetic interference tests which this report describes were conducted by an independent electromagnetic compatibility consultant, International Standards Laboratory in accordance with the test procedure specified in CFR 47 Part 15 Subpart C (Section 15.247) , and ANSI C63.4 Rules.

The test results contained in this report accurately represent the measurements of the EMC characteristics and the energy generated by sample equipment under test at the time of the test.

Equipment Tested: WLAN b USB Adapter with Flash disk, *Model: KU8-M*
Applied by: Wistron NeWeb Corporation

Sample received Date: 2003/09/10

Final test Date : 2003/09/29

Test Site: Chamber 02, Conduction 02

Temperature 23°C(Conduction Test); 30°C (Radiation Test)

Humidity: 48% (Conduction Test); 60% (Radiation Test)

Test Engineer: Jerry Chiou

The results show that the sample equipment tested as described in this report is in compliance with the Class B conducted and radiated emission limits of FCC Rules Part 15 Subpart B, and the limit of Part Subpart C Sec. 15.247.

Approve & Signature


Eddy Hsiung
Director

Test results given in this report apply only to the specific sample(s) tested under stated test conditions. This report shall not be reproduced other than in full without the explicit written consent of ISL. This report totally contains 48 pages, including 1 cover page , 2 contents page, and 45 pages for the test description.
This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

This test data shown below is traceable to NIST or national or international standard.
International Standards Laboratory certifies that no party to this application has been denied the FCC benefits pursuant to Section 5301 of the Anti-Drug Abuse Act of 1988, 21 U.S.C. 853(a).

1.2 Test Results Summary

The 802.11b functions of EUT has been tested to the FCC regulations listed below:

Tested Standards: 47 CFR Part 15 Subpart C			
Standard Section	Test Type	Result	Remarks
15.207	AC Power Line Emissions	Pass	
15.247(a)(2)	Spectrum Bandwidth Of DSSS device	Pass	
15.247(b)	Max. Peak Output Power	Pass	
15.247(c)	Radiated Emissions 30MHz – 25 GHz	Pass	
15.247 (c)	Band Edge Measurement	Pass	
15.247(b)(4)	Radiation Exposure	Pass	
15.247 (d)	Power Spectral Density	Pass	

1.4 Test Standards and Procedure

Test Specification: FCC Part 15 subpart C (Section 15.247) and subpart B and/or CISPR 22/EN55022, RSS210

Test Procedure: ANSI C63.4, CFR 47 Sec. 15.247 as detailed in Appendices

1.5 General Test Conditions

1. During the test, the EUT was set in continuously transmitting mode with a duty cycle of 99% (maximum allowed).
2. The channel 1, 6, 11 of of 802.11b of EUT were all tested.


3. Bandwidth for DSSS [Section 15.247 (a)(2)]

3.1 Test Procedure

The Transmitter output of EUT was connected to the spectrum analyzer through an attenuator. The 6 dB bandwidth of the fundamental frequency was measured. The setting of spectrum analyzer is as follows

Equipment mode: Spectrum analyzer
Detector function: Peak mode
RBW: 100KHz
VBW: 100KHz


3.2 Test Setup

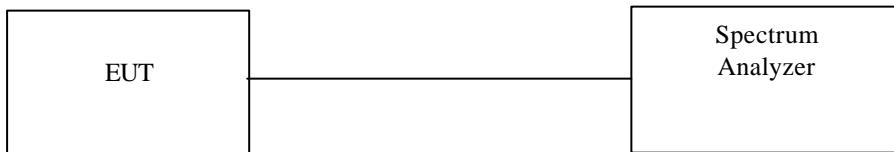


3.3 Test Data

Table 6dB Bandwidth

Chennel	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)	Pass/Fail
1	2412	11.68	0.5	Pass
6	2437	11.76	0.5	Pass
11	2462	11.68	0.5	Pass

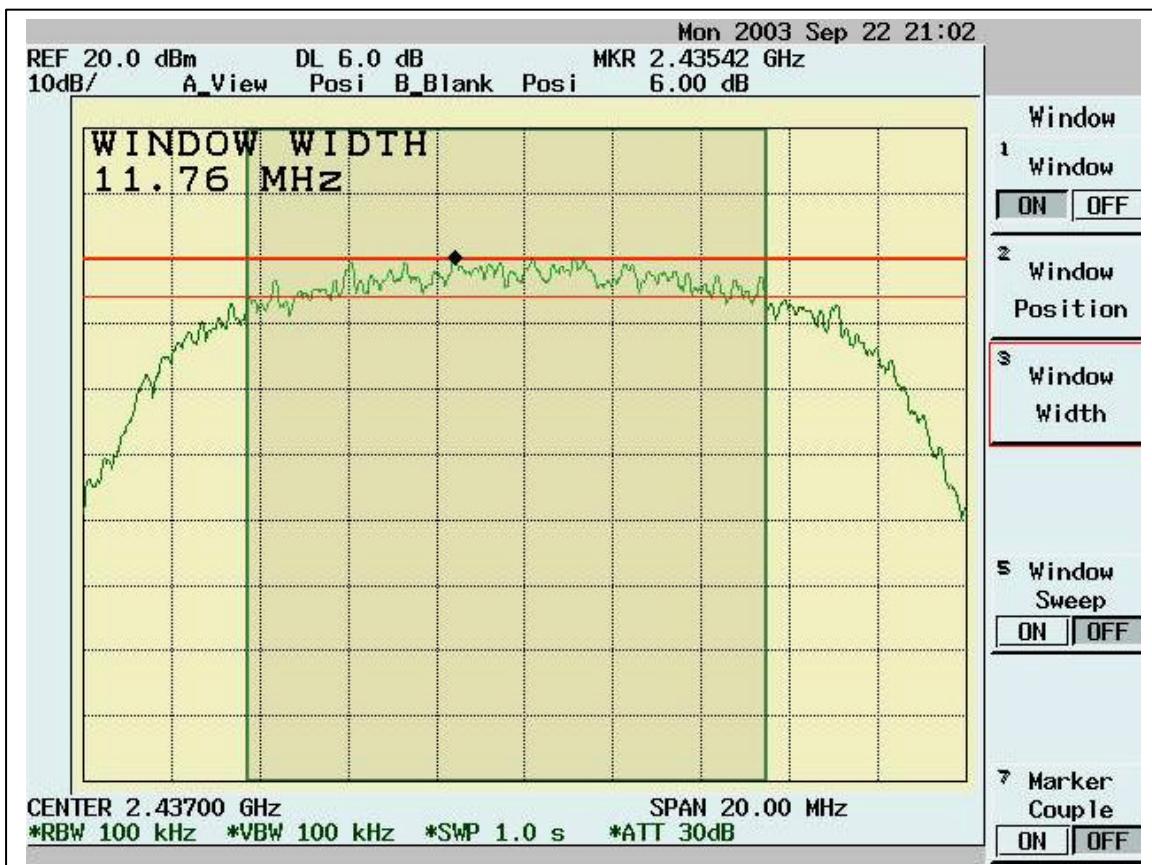

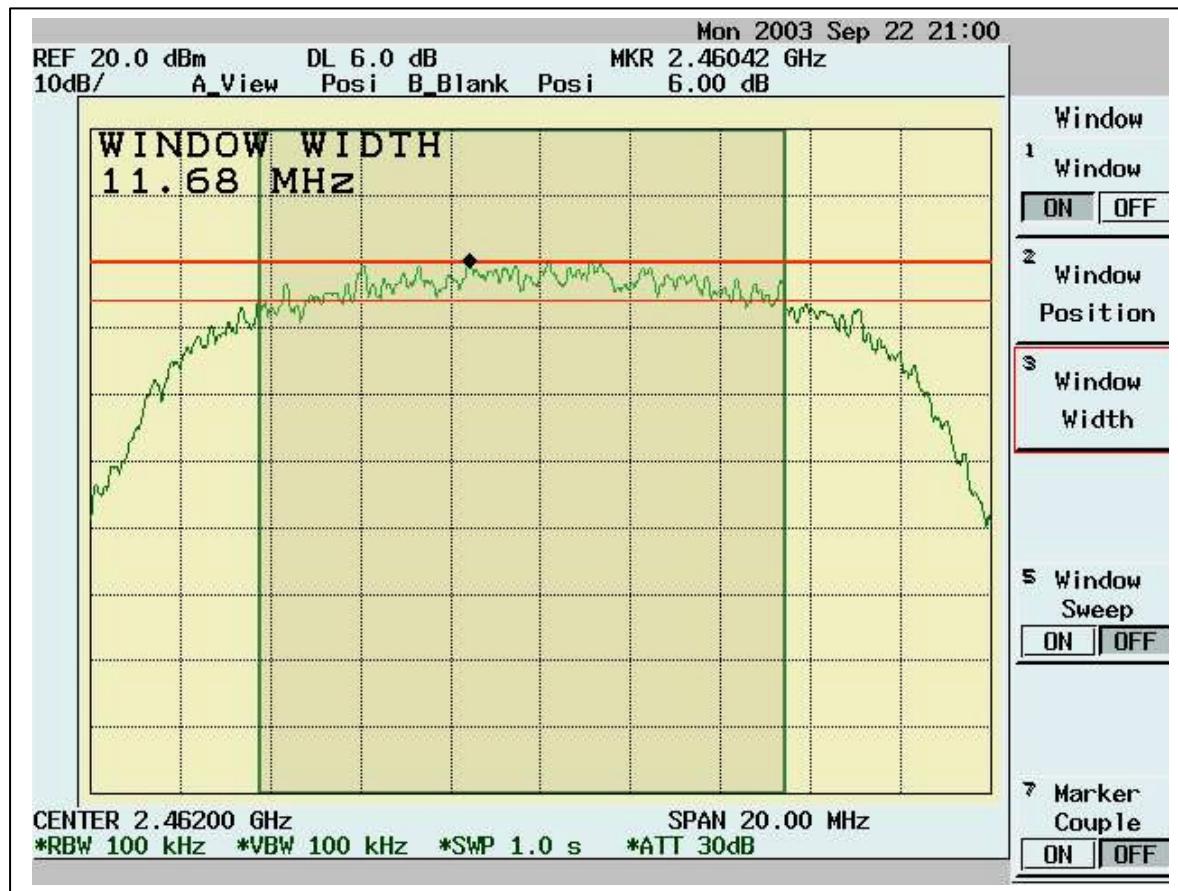


4. DSSS Maximum Peak Output Power [Section 15.247 (b)(1)]

4.1 Test Procedure

1. The Transmitter output of EUT was connected to the peak power analyzer .

4.2 Test Setup

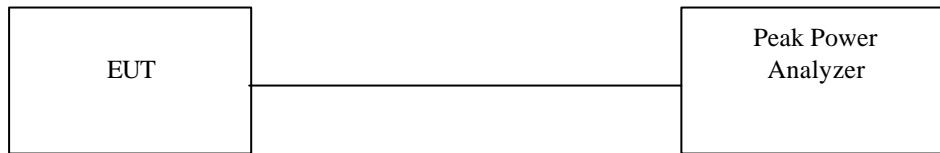

4.3 Test Data:

Maximum Peak Output Power

Chennel	Frequency (MHz)	Analyzer Reading (dBm)	Cable Loss (dB)	Peak Power Output (mW)	Peak Power Output (dBm)	Limit (dBm)	Pass/Fail
1	2412	11.624	1.2	19.16	12.824	30	Pass
6	2437	11.593	1.2	19.02	12.793	30	Pass
11	2462	11.39	1.2	18.16	12.59	30	Pass

6. Band Edge Measurement

6.1 Test Procedure (Conducted)

1. The Transmitter output of EUT was connected to the spectrum analyzer.
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN: 100MHz
RBW: 100KHz
VBW: 100KHz
Center frequency: 2.4GHz, 2.4835GHz.
Sweep time= 200ms sec.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.

6.2 Test Setup (Conducted)



6.3 Test Data:

Table Band Edge measurement (Conducted)

Channel	Frequency (MHz)	Spectrum Reading (dBuV)	Carrier - Outsideband Limit: > 20dB (dB)	Pass/Fail
1	2410.4	107.27	---	---
Outside band	2397.0	74	33.27	Pass
11	2460.4	107.27	---	---
Outside band	2477.3	74.38	32.89	Pass

Band Edge Conducted measurement



Band Edge Conducted Measurement



6.4 Band Edge measurement Test Procedure (Radiated)

1. Antenna and Turntable test procedure same as *Radiated Emission Measurement*
Equipment mode: Spectrum analyzer
Detector function: Peak mode
SPAN:100MHz
RBW: 1MHz
VBW: 1MHz
Center frequency: 2.395GHz, 2.48 GHz.
2. Using Peak Search to read the peak power of Carrier frequencies after Maximum Hold function is completed.
3. Find the next peak frequency outside the operation frequency band.
4. For peak frequency emission level measurement in Restricted Band ,
Change RBW: 1MHz ,
VBW: 10Hz,
Span: 100MHz.
5. Get the spectrum reading after Maximum Hold function is completed.

6.5 Test Setup (Radiated)

Same as *Radiated Emission Measurement*

Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 1)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Peak Mode (Channel 11)



Band Edge measurement for radiated emission in Restricted Band(Radiated)

Average Mode (Channel 11)



7. RF Exposure Measurement [Section 15.247(b)(4) & 1.1307(b)]

7.1 Applied Standards

FCC PART 1.1307, 1.1310, 2.1091, 2.1093 RF EXPOSURE

7.2 Calculation for Maximum Permissible Exposure (MPE)

From FCC 1.1310 Table 1B, the maximum permissible RF exposure for an uncontrolled environment is 1 mW/cm². The actual power density for the EUT with the antenna is calculated as shown below. The EUT is a professionally installed, fixed, point-to-point operating system.

$$S = (P \times G) / (4 \times \pi \times d^2)$$

where:

S = power density

P = transmitter conducted power in (W)

G = antenna numeric gain

d = distance to radiation center (m)

Antenna Manufacturer	Antenna Type	Gain (dBi)	Numeric Gain	Power (dBm)	Power (mW)	Separation Distance (cm)	Power Density (W/m ²)	Power Density (mW/cm ²)
MAG. LAYERS	Multi-layer chip antenna	-2.9	0.5128	12.824	19.16	20	0.01955	0.001955

WARNING:

It is the responsibility of the professional installer to ensure that when using the outdoor antenna kits in the United States (or where FCC rules apply), only the antenna specified above may be used. The use of any other antenna is expressly forbidden in accordance with FCC rules CFR 47 part 15.204.

NOTICE:

FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits for an uncontrolled environment when installed as directed. This equipment should be installed and operated with MAG. LAYERS Corp. chip antenna in a fixed-mount configuration, installed with a maximum of 9.924 dBm of radiated output power during normal operation

8. DSSS Peak Power Spectral Density [Section 15.247(d)]

8.1 Test Procedure

1. The Transmitter output of EUT was connected to the spectrum analyzer.

Equipment mode: Spectrum analyzer

Detector function: Peak mode

SPAN:1.5MHz

RBW: 3KHz

VBW: 30KHz

Center frequency: fundamental frequency tested.

Sweep time= 500 sec.

2. Using Peak Search to read the peak power after Maximum Hold function is completed.


8.2 Test Setup





8.3 Test Data:

Table Maximum Peak Output Power Density

Chennel	Frequency (MHz)	Spectrum Reading (dBm/3KHz)	Cable Loss (dB)	Peak Power Output (dBm/3KHz)	Limit (dBm/3KHz)	Pass/Fail
1	2412	-10.27	1.2	-9.07	8	Pass
6	2437	-11.99	1.2	-10.79	8	Pass
11	2462	-11.90	1.2	-10.7	8	Pass

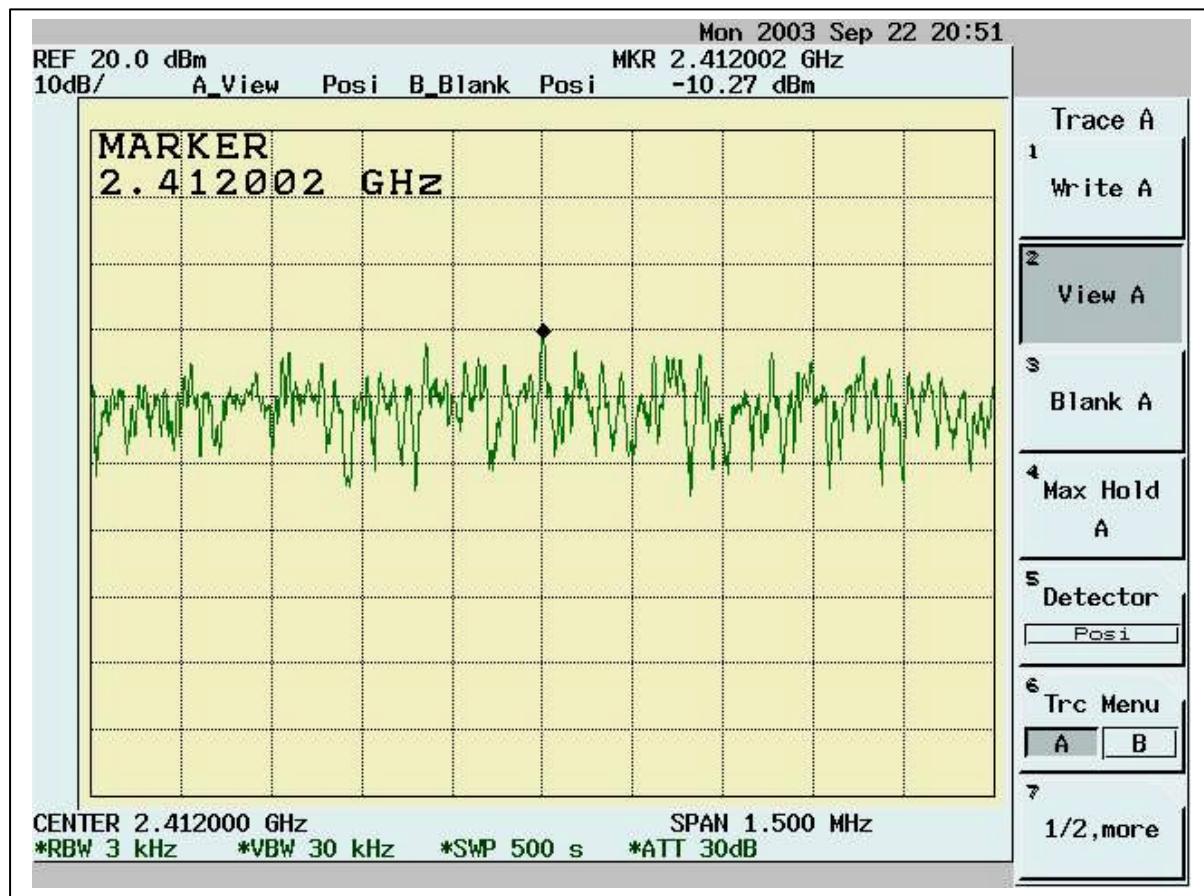

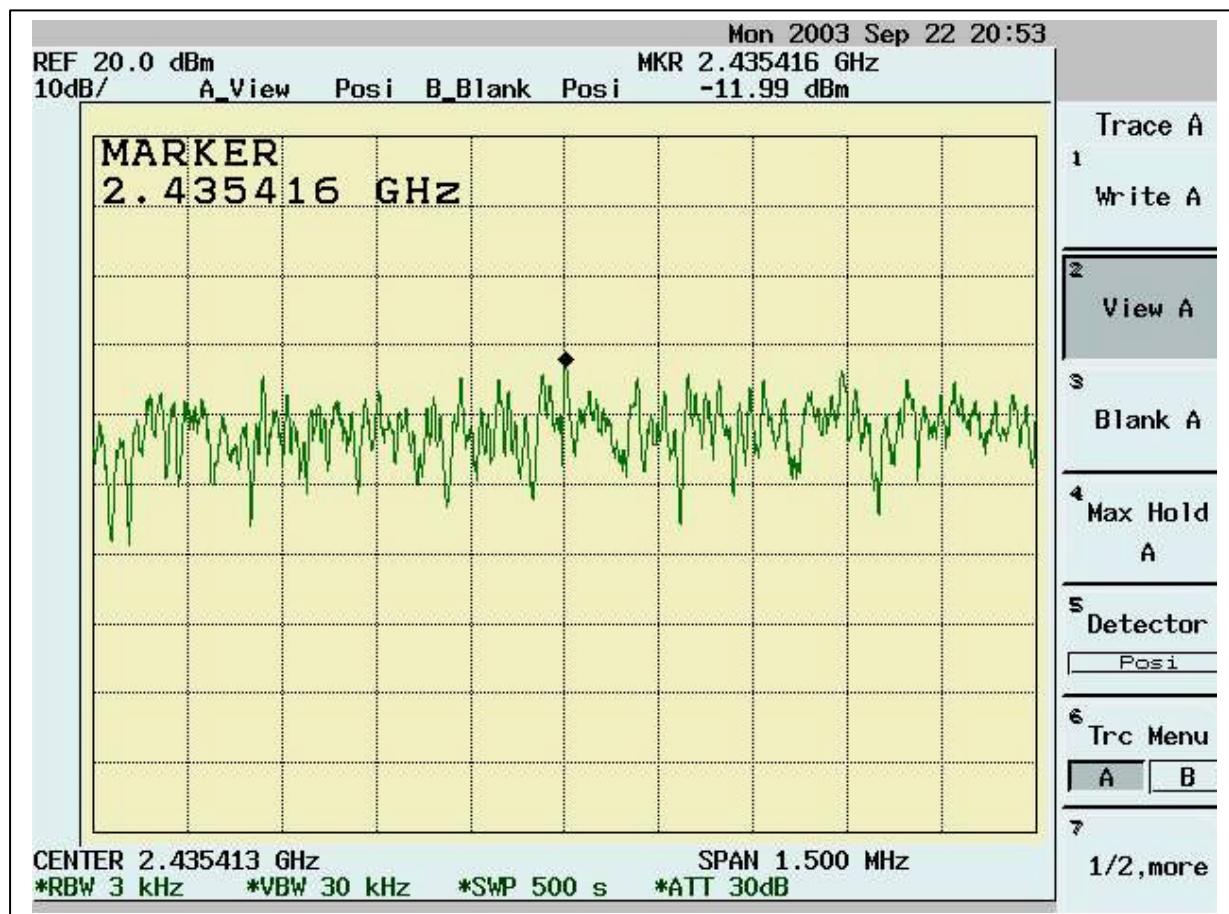

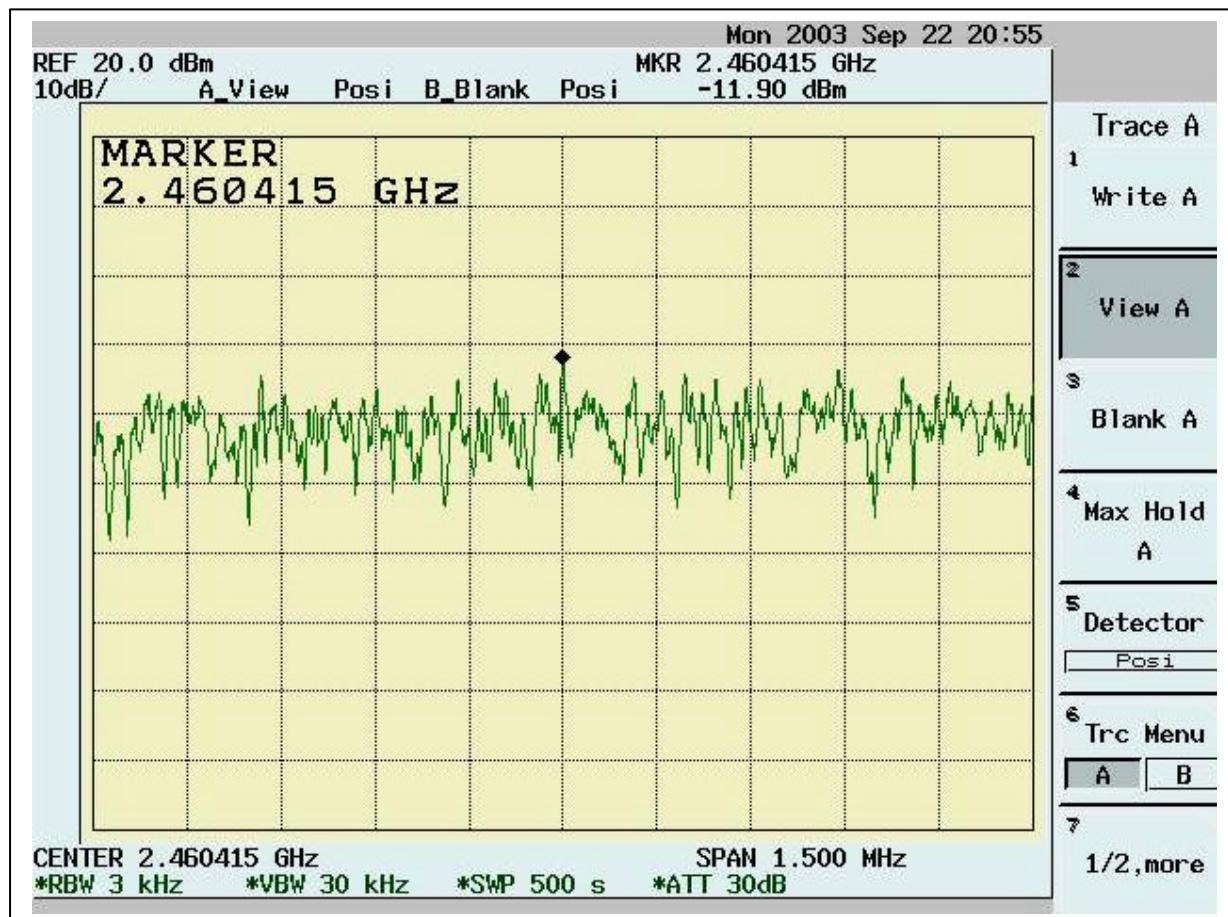

9. Appendix

9.1 Appendix A: Measurement Procedure for Power-line Conducted Emissions

The EUT is set up in accordance with the suggested configuration given in ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. The measurements are performed in a 3.5m x 3.4m x 2.5m shielded room, which referred as Conduction 01 test site, or a 3m x 3m x 2.3m test site, which referred as Conduction 02 test site. The EUT was placed on non-conduction 1.0m x 1.5m table, which is 0.8 meters above an earth-grounded.

Power to the EUT was provided through the LISN which has the Impedance (50ohm/50uH) vs. Frequency Characteristic in accordance with the Figure 1 of the ANSI C63.4-2001 or CISPR16. Power to the LISNs were filtered to eliminate ambient signal interference and these filters were bonded to the ground plane. Peripheral equipment required to provide a functional system (support equipment) for EUT testing was powered from the second LISN through a ganged, metal power outlet box which is bonded to the ground plane at the LISN.

If the EUT is supplied with a flexible power cord, the power cord length in excess of the distance separating the EUT from the LISN shall be folded back and forth at the center of the lead so as to form a bundle not exceeding 40cm in length. If the EUT is provided with a permanently coiled power cord, bundling of the cord is not required. If the EUT is supplied without a power cord, the EUT shall be connected to the LISN by a power cord of the type specified by the manufacturer which shall not be longer than 1 meter. The excess power cord shall be bundled as described above. If a non-flexible power cord is provided with the EUT, it shall be cut to the length necessary to attach the EUT to the LISN and shall not be bundled.

The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Both the line of power cord, hot and neutral, were measured.

The highest emissions were analyzed in details by operating the spectrum analyzer in fixed tuned mode to determine the nature of the emissions and to provide information which could be useful in reducing their amplitude.

9.2 Appendix B: Test Procedure for Radiated Emissions

Preliminary Measurements in the Anechoic Chamber

The radiated emissions are initially measured in the anechoic chamber at a measurement distance of 3 meters. Desktop EUT are placed on a wooden stand 0.8 meter in height. The measurement antenna is 3 meters from the EUT. The test setup in anechoic chamber is the same as open site. The turntable rotated 360°C. The antenna height is varied from 1-2.5m. The primary objective of the radiated measurements in the anechoic chamber is to identify the frequency spectrum in the absence of the electromagnetic environment existing on the open test site. The frequencies can then be pre-selected on the open test site to obtain the corresponding amplitude. The initial scan is made with the spectrum analyzer in automatic sweep mode. The spectrum peaks are then measured manually to determine the exact frequencies.

Measurements on the Open Site or 10m EMC Chamber

The radiated emissions test will then be repeated on the open site or 10m EMC chamber to measure the amplitudes accurately and without the multiple reflections existing in the shielded room. The EUT and support equipment are set up on the turntable of one of the 3 or 10 meter open field sites. Desktop EUT are set up on a wooden stand 0.8 meter above the ground.

For the initial measurements, the receiving antenna is varied from 1-4 meter height and is changed in the vertical plane from vertical to horizontal polarization at each frequency. Both reading are recorded with the quasi-peak detector with 120KHz bandwidth. For frequency between 30 MHz and 1000MHz, the reading is recorded with peak detector or quasi-peak detector. For frequency above 1 GHz, the reading is recorded with peak detector or average detector with 1 MHz bandwidth.

At the highest amplitudes observed, the EUT is rotated in the horizontal plane while changing the antenna polarization in the vertical plane to maximize the reading. The interconnecting cables were arranged and moved to get the maximum according to ANSI C63.4-2001, CFR 47 Part 15 Subpart B; or EN55022:1994/ A1:1995/A2:1997; CISPR 22:1993/A1:1995/A2:1996. Once the maximum reading is obtained, the antenna elevation and polarization will be varied between specified limits to maximize the readings.

Location	Equipment Name	Brand	Model	S/N	Last Cal. Date	Next Cal. Date
RF	Peak Power Analyzer	HP	8990A	3621A01269	09/12/2003	09/12/2004
Rad. Above 1Ghz	Preamplifier 10	MITEQ	JS-26004000-27-5A	818471	02/28/2002	02/28/2004
Rad. Above 1Ghz	Signal Generator 03	Anritsu	MG3642A	6200162550	02/05/2003	02/05/2004
Rad. Above 1Ghz	Signal Generator 04	Anritsu	MG3692A	020311	02/06/2002	02/06/2004
Rad. Above 1Ghz	Spectrum Analyzer 07	Advantest	R3182	110600649	10/17/2002	10/17/2003


Note: Calibration traceable to NIST or national or international standards.

9.3.2 Software for Controlling Spectrum/Receiver and Calculating Test Data



Radiation/Conduction	Filename	Version	Issued Date
Conduction	Tile.exe	1.12E	7/7/2000
Radiation	Tile.exe	1.12C	6/16/2000

9.4 Appendix D: Layout of EUT and Support Equipment

9.4.1 General Conducted Test Configuration

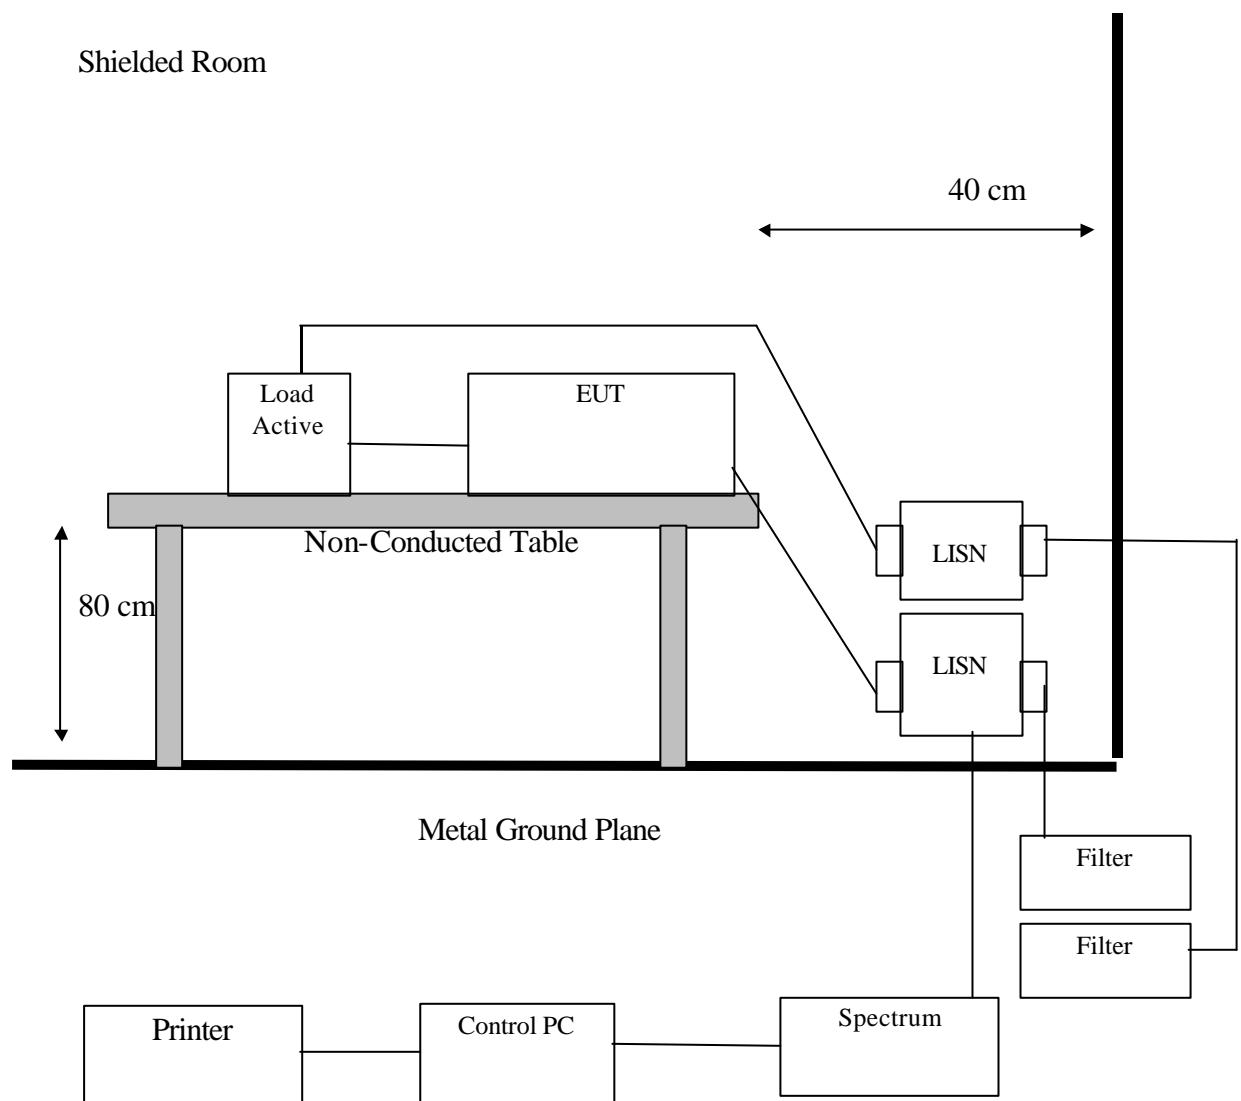

9.4.2 General Radiation Test Configuration

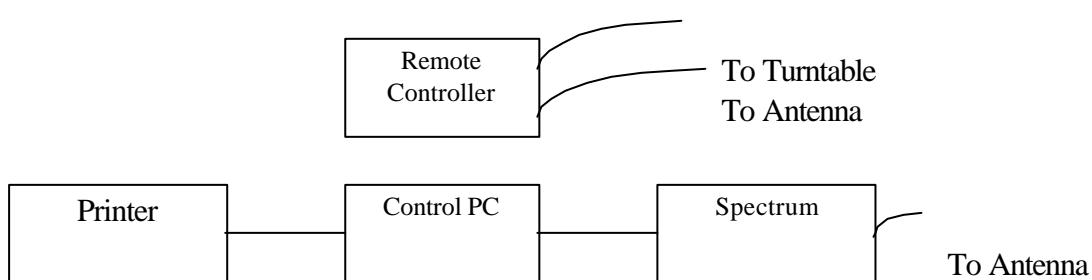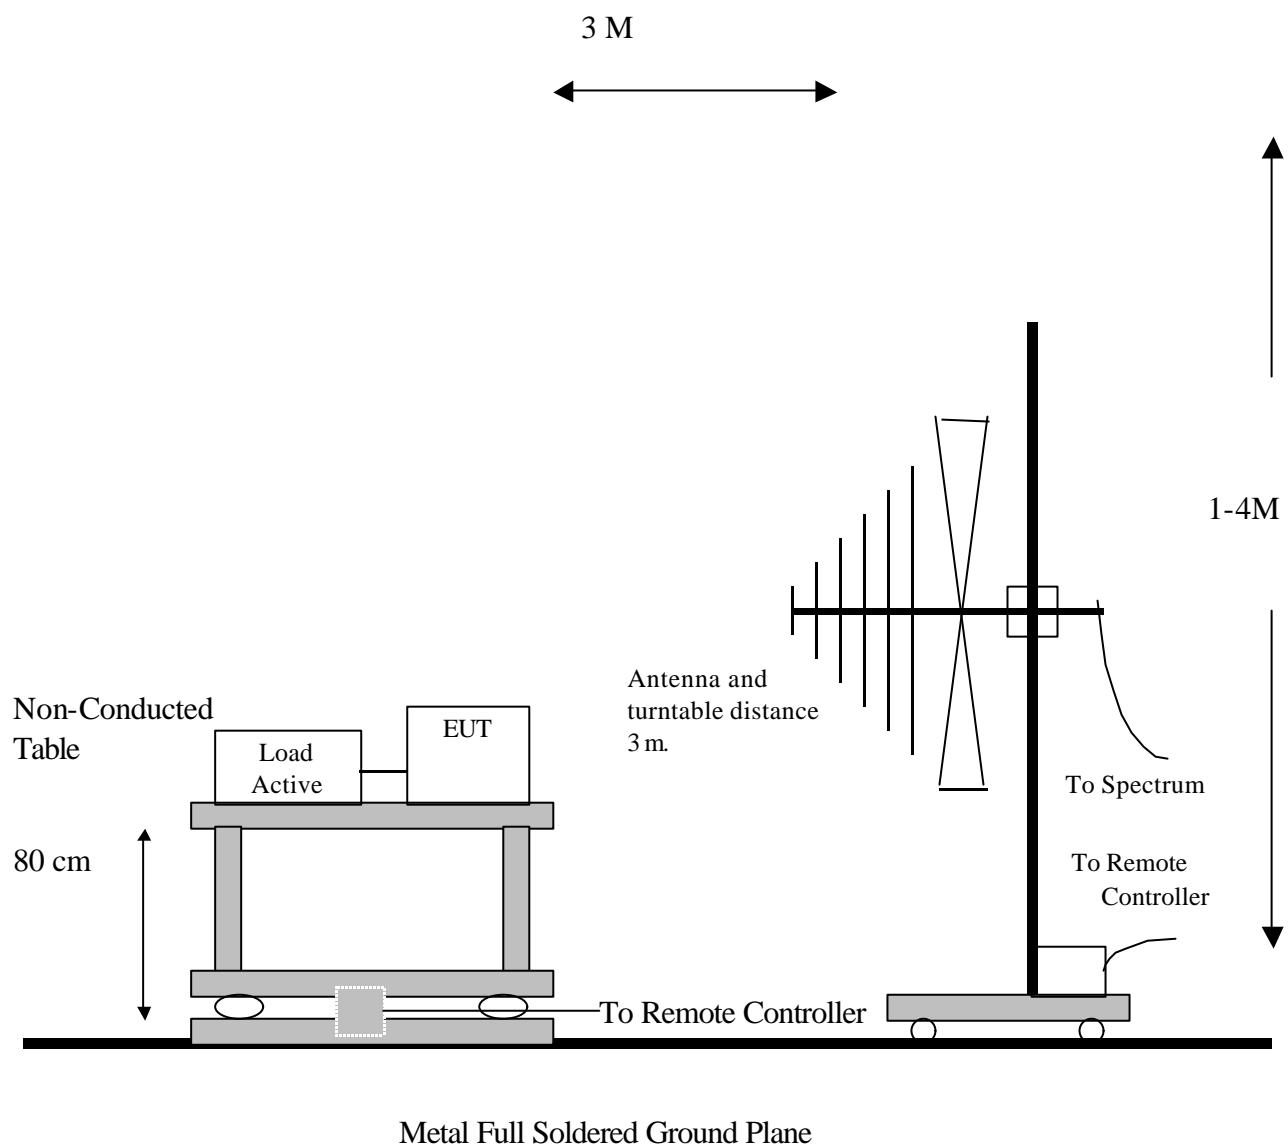

9.5 Appendix E: Description of Support Equipment

9.5.1 Description of Support Equipment

Support Unit 1.

Description:	Logitech USB Mouse
Model Number:	M-u48a
Serial Number:	LZE02050204
Power Supply Type:	N/A
Power Cord:	N/A
FCC ID:	JNZ211360

Support Unit 2.

Description:	Acer Monitor
Model:	G781
Serial Number:	999007101214400445T7AA31T
Power Cord:	Non-shielded, Detachable (Comply with FCC Standards)
FCC ID:	

Support Unit 3.

Description:	Notebook Personal Computer
Brand:	Acer
Condition:	Pre-Production
Model:	Travelmate C300
FCC ID	PU5MS2140B
Serial Number:	N/A
Adapter Type:	Liteon 70W(Model:PA-1700-02) 3pins
SDRAM:	Nanya 128MB (Model: NT128D64SH4BBGM-6K)
Hard Disk Driver:	HGST 20G (Model: IC25N020ATMR04-0)
DVD-ROM:	MKE (Model: SR-8177-BAA3)
CD-ROM:	Mitsumi (Model: SR244W1 A6)
Combo:	Sony (Model: CRX-830)
FDD Driver:	Y-E Data(Model:YD-8U10) (Optional module)
Modem Module:	Ambit (Model: T60M283.10)
Battery:	Sanyo 8 cell Li+ (Model:BTP-63D1)
Power In Port:	one
USB Port:	two 4-pin (USB 2.0)
VGA Port:	one
TV-Out Port	one
1394 Connecter:	one 4-pin
Line Out Port:	one
Line In Port:	one
LAN Connector:	one 8-pin (10Mbps/100Mbps)
Modem Connector:	one
PCMCIA:	one
Mini-PCI:	one
Port Replicator:	one 100-pin
Power Cord:	Shielded
LCD:	CMO 14.1" XGA (Model: CHIME/N141X9-L01) or AU 14.1" XGA (Model: B141XG08)
~	

9.5.2 Software for Controlling Support Unit

A test program which generates a complete line of continuously repeating "H" pattern is used as the software test program. The program was executed as follows:

- A. Read and write to the disk drives.
- B. Send H pattern to the video port device (Monitor)..
- C. Repeat the above steps

	Filename	Issued Date
Monitor	HH.bat	8/20/1991
Printer1	Wordpad.exe	11/11/1999

9.5.3 I/O Cable Condition of EUT and Support Units

Description	Path	Cable Length	Cable Type	Connector Type
AC Power Cord	110V (~240V) to AC Power Cord Inlet (3-pin)	1.8M	Nonshielded, Detachable	Plastic Head
Monitor Data Cable	Monitor to PC VGA port	1.6M	Shielded, Un-detachable	Metal Head
USB Mouse Data Cable	USB Mouse to PC USB port	1.8M	Shielded, Un-detachable	Metal Head

9.6 Appendix F: Accuracy of Measurement

Test Site: Conduction 02

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)	Standard Uncertainty (dB)		
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.104	k=1	0.052
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.330	k=1	0.165
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	LISN Factor Calibration	Normal	k=2	1.200	k=1	0.600
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	0.850
7	Total Uncertainty @95% min. Confidence Level	Normal	k=2	1.701		

Measurement Uncertainty Calculations:

$$U_c(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$
$$U = 2 * U_c(y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :
The treatment of Uncertainty in EMC Measurement.

Test Site: Chamber 02-3M

Item	Source of Uncertainty	Probability Distribution	Total Uncertainties (dB)	Standard Uncertainty (dB)		
1	Systematic Effects: (Assessment from 20 repeat observation; 1 reading on EUT)	Normal	k=2	0.067	k=1	0.034
2	Random Effects: (Assessment from 20 random observations; 1 reading on EUT)	Normal	k=2	0.103	k=1	0.052
3	Receiver Calibration	Rectangular	k=1.73	1.000	k=1	0.577
4	Antenna Factor Calibration	Normal	k=2	1.700	k=1	0.850
5	Cable Loss Calibration	Normal	k=2	1.000	k=1	0.500
6	Combined Standard Uncertainty Uc(y)	Normal			k=1	1.029
7	Total Uncertainty @95% mim. Confidence Level	Normal	k=2	2.059		

Measurement Uncertainty Calculations:



$$U_c(y) = \text{square root} (u_1(y)^2 + u_2(y)^2 + \dots + u_n(y)^2)$$

$$U = 2 * U_c(y)$$

Note: The measurement Uncertainties mentioned above also refer to NIS 81-1994 of NAMAS :
The treatment of Uncertainty in EMC Measurement.

9.7 Appendix G: Photographs of EUT Configuration Test Set Up

The Front View of Highest Conducted Set-up For EUT

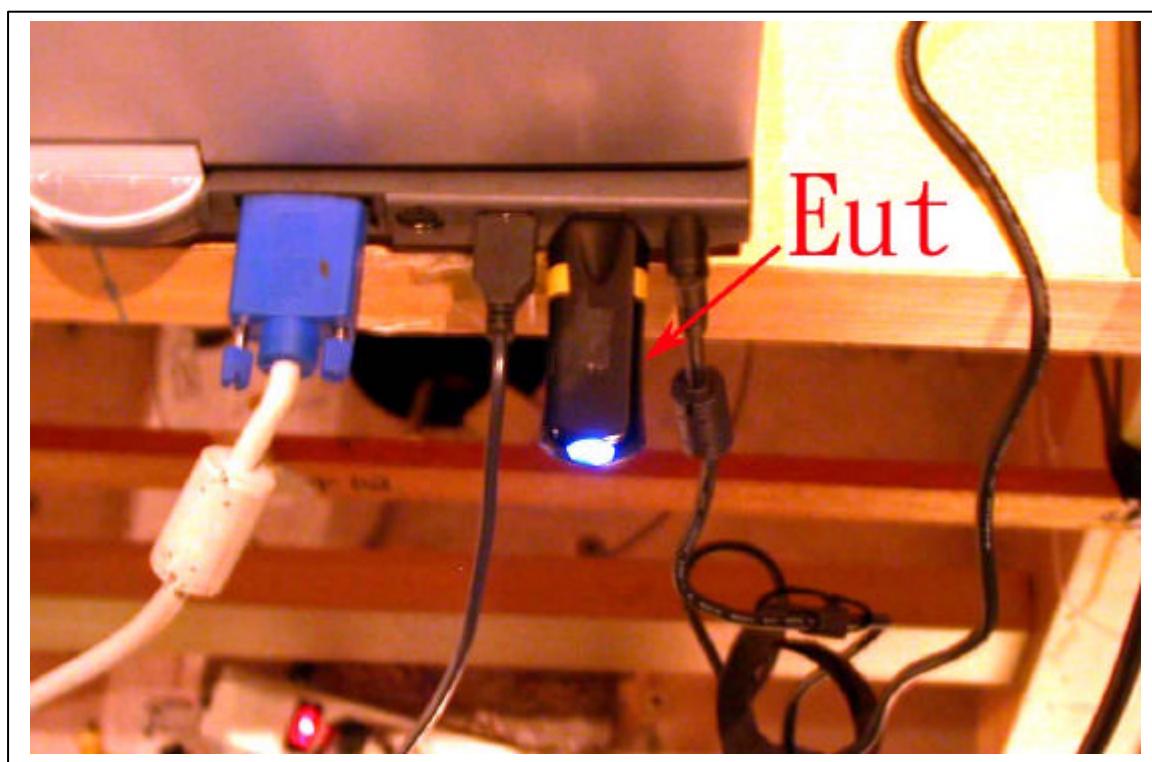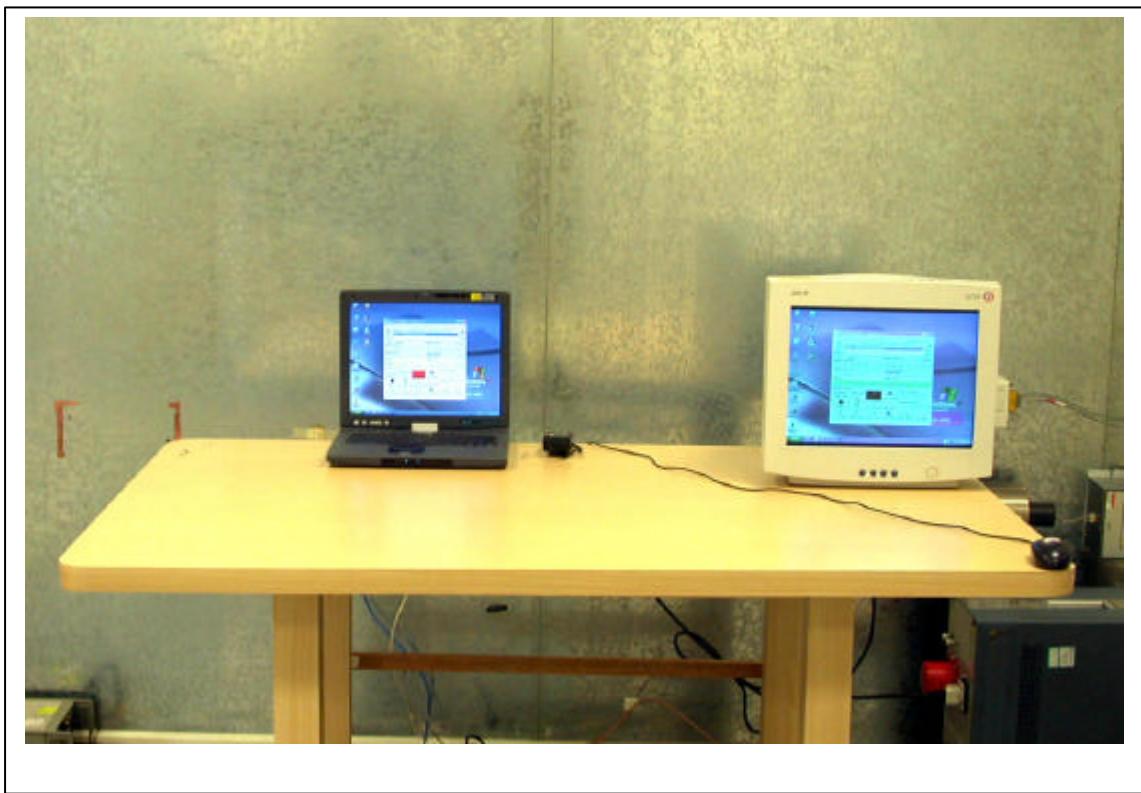

The Front View of Highest Radiated Set-up For EUT



The Back View of Highest Radiated Set-up For EUT



9.8 Appendix H: Antenna Spec.

Please refer to the attached file.