


Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11a,Ch149,5.745G,BW20M	Humidity (%RH)	58.0

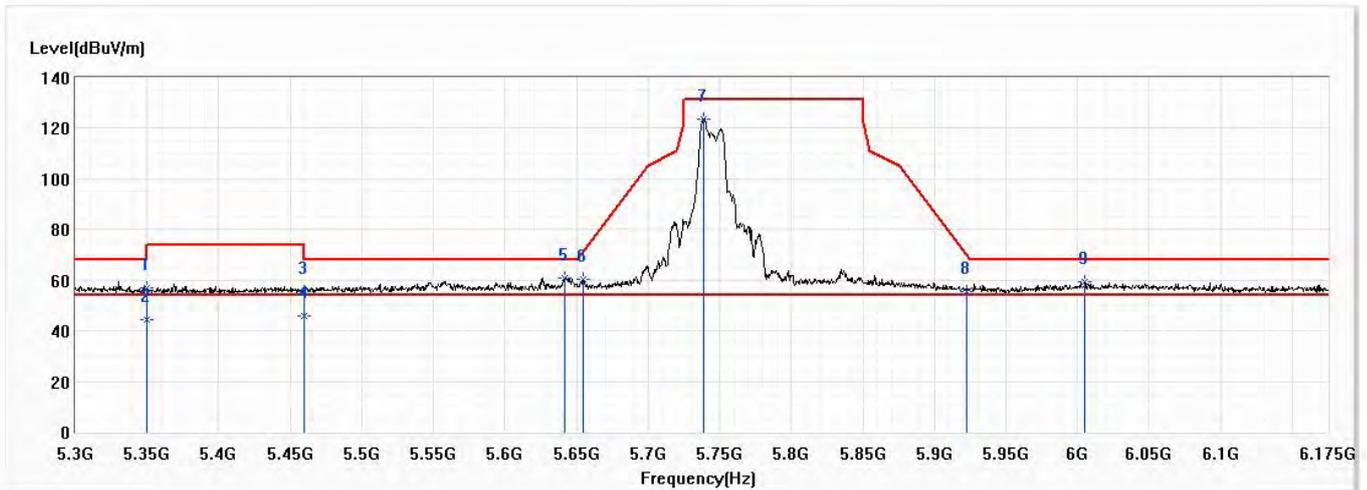


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.86	74.00	-17.14	34.16	22.70	PK
2	5350.000	44.38	54.00	-9.62	21.68	22.70	AV
3	5460.000	55.39	74.00	-18.61	32.58	22.81	PK
4	5460.000	45.69	54.00	-8.31	22.88	22.81	AV
* 5	5642.125	60.79	68.20	-7.41	37.38	23.41	PK
6	5654.375	60.15	71.45	-11.30	36.68	23.47	PK
7	5738.813	123.55	131.20	-7.65	99.76	23.79	PK
8	5922.563	55.39	70.00	-14.61	31.03	24.36	PK
9	6005.250	59.25	68.20	-8.95	34.63	24.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11a,Ch149,5.745G,BW20M	Humidity (%RH)	58.0

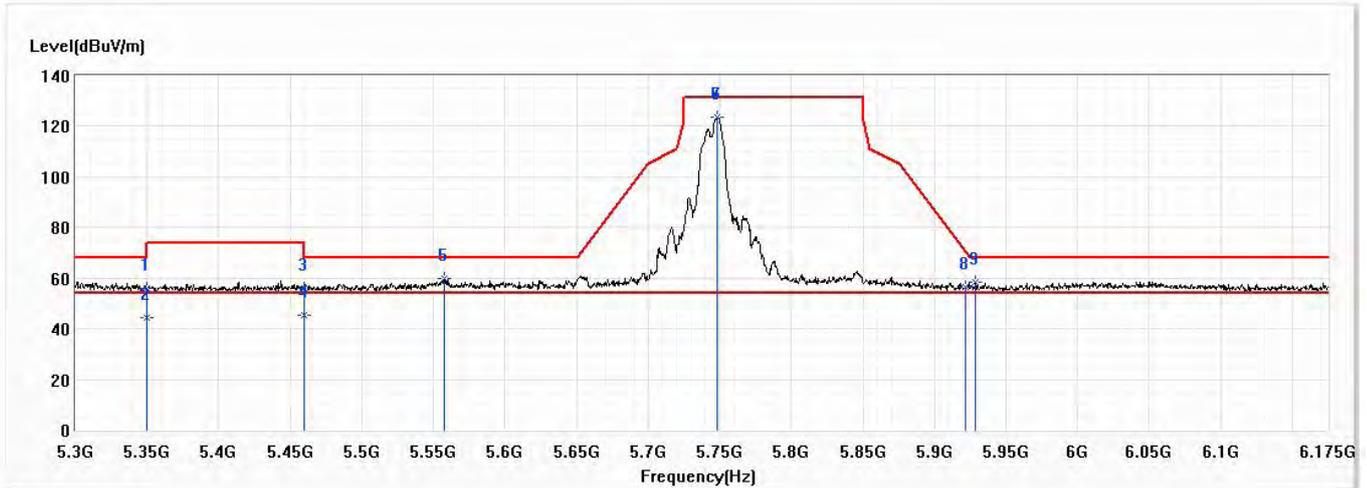


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.14	74.00	-17.86	33.44	22.70	PK
2	5350.000	44.49	54.00	-9.51	21.79	22.70	AV
3	5460.000	55.89	74.00	-18.11	33.08	22.81	PK
4	5460.000	45.61	54.00	-8.39	22.80	22.81	AV
5	5557.688	59.95	68.20	-8.25	36.87	23.08	PK
* 6	5747.990	123.50	131.20	-7.70	99.66	23.84	PK
7	5748.000	123.50	131.20	-7.70	99.66	23.84	PK
8	5921.688	56.68	70.64	-13.96	32.32	24.36	PK
9	5928.688	58.34	68.20	-9.86	33.96	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11a,Ch157,5.785G,BW20M	Humidity (%RH)	58.0

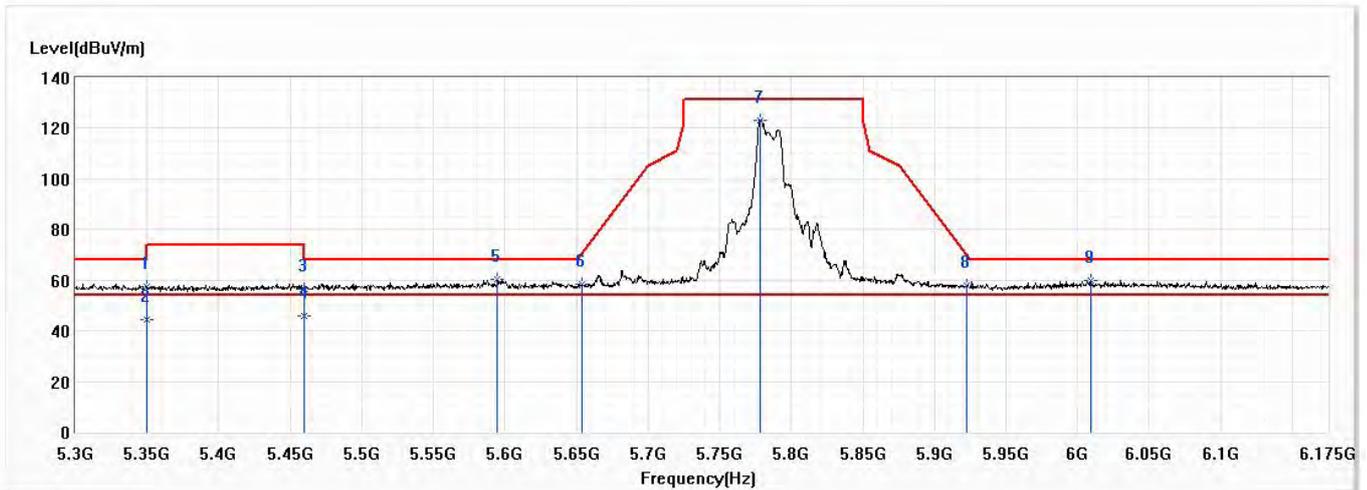


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.25	74.00	-16.75	34.55	22.70	PK
2	5350.000	44.30	54.00	-9.70	21.60	22.70	AV
3	5460.000	56.49	74.00	-17.51	33.68	22.81	PK
4	5460.000	45.68	54.00	-8.32	22.87	22.81	AV
* 5	5594.875	60.26	68.20	-7.94	37.04	23.22	PK
6	5653.500	58.57	70.80	-12.23	35.12	23.45	PK
7	5778.625	123.04	131.20	-8.16	99.11	23.93	PK
8	5922.125	58.10	70.32	-12.22	33.74	24.36	PK
9	6009.188	60.07	68.20	-8.13	35.44	24.63	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11a,Ch157,5.785G,BW20M	Humidity (%RH)	58.0

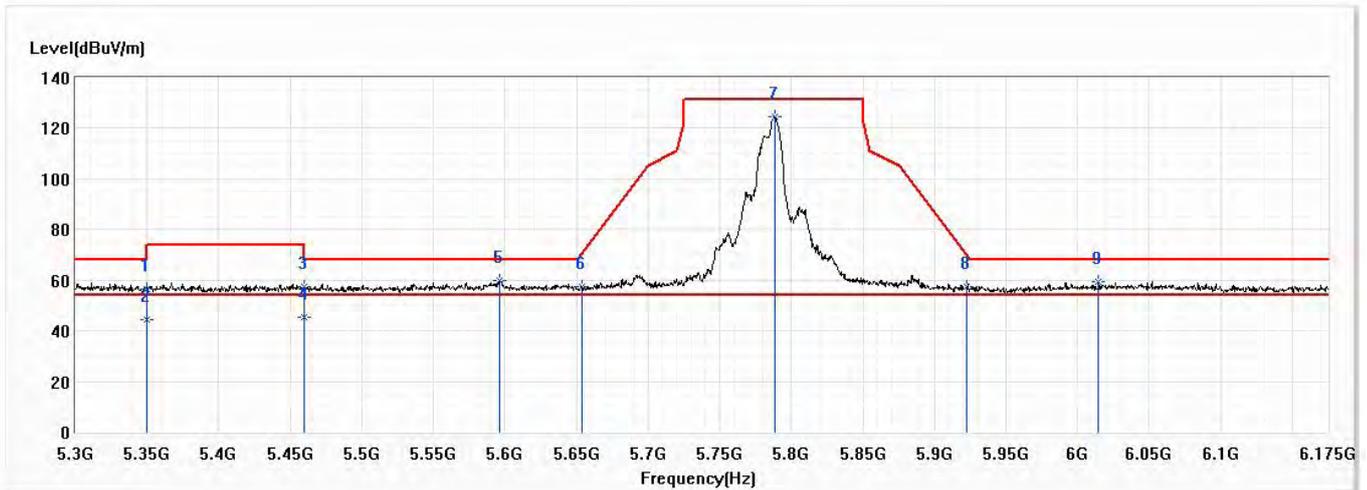


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.26	74.00	-17.74	33.56	22.70	PK
2	5350.000	44.39	54.00	-9.61	21.69	22.70	AV
3	5460.000	57.32	74.00	-16.68	34.51	22.81	PK
4	5460.000	45.58	54.00	-8.42	22.77	22.81	AV
5	5596.188	59.65	68.20	-8.55	36.43	23.22	PK
6	5653.500	57.63	70.80	-13.18	34.18	23.45	PK
* 7	5788.688	124.74	131.20	-6.46	100.79	23.95	PK
8	5922.125	57.41	70.32	-12.91	33.05	24.36	PK
9	6014.438	59.34	68.20	-8.86	34.68	24.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11a,Ch165,5.825G,BW20M	Humidity (%RH)	58.0

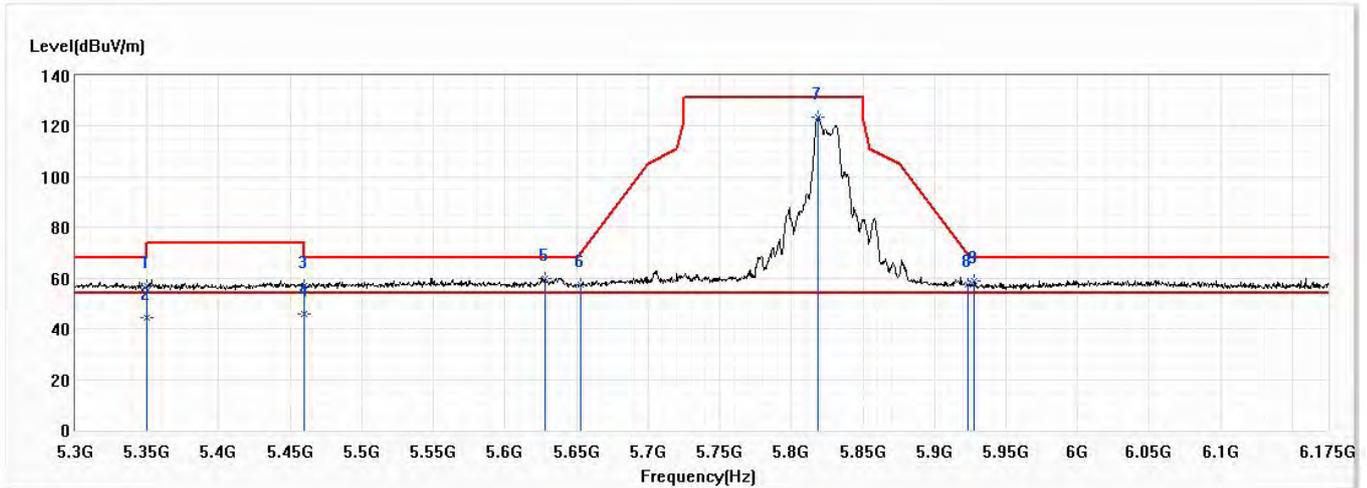


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.73	74.00	-17.27	34.03	22.70	PK
2	5350.000	44.37	54.00	-9.63	21.67	22.70	AV
3	5460.000	57.04	74.00	-16.96	34.23	22.81	PK
4	5460.000	45.78	54.00	-8.22	22.97	22.81	AV
5	5627.688	60.09	68.20	-8.11	36.73	23.36	PK
6	5653.063	57.55	70.48	-12.93	34.10	23.45	PK
* 7	5818.875	123.48	131.20	-7.72	99.42	24.06	PK
8	5923.000	57.57	69.67	-12.10	33.21	24.36	PK
9	5927.813	59.06	68.20	-9.14	34.68	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 1: Transmit CDD Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11a,Ch165,5.825G,BW20M	Humidity (%RH)	58.0

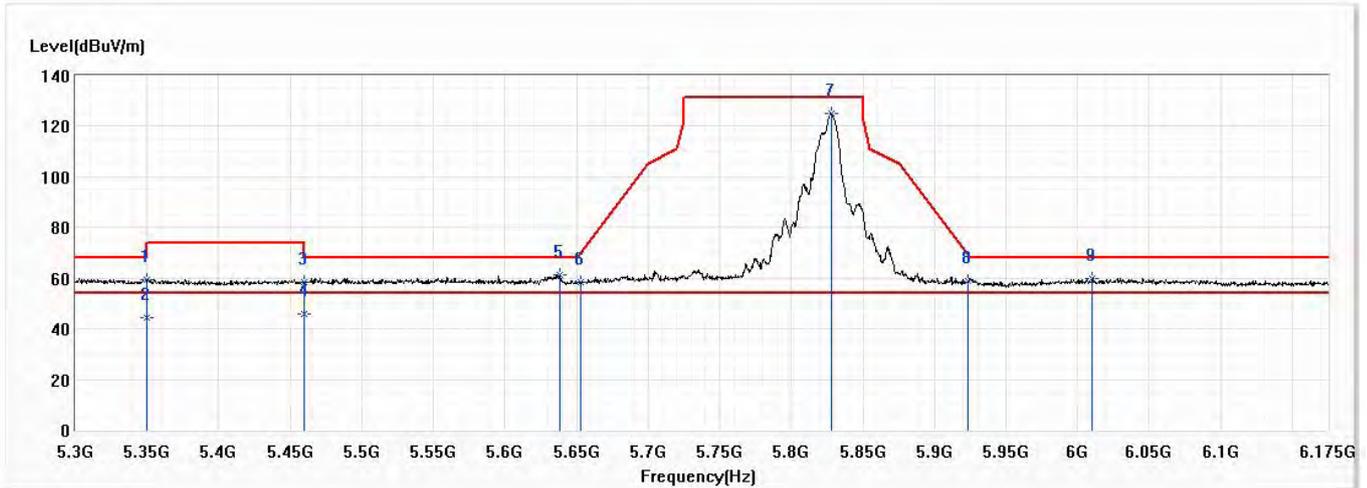


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	59.22	74.00	-14.78	36.52	22.70	PK
2	5350.000	44.52	54.00	-9.48	21.82	22.70	AV
3	5460.000	58.21	74.00	-15.79	35.40	22.81	PK
4	5460.000	45.74	54.00	-8.26	22.93	22.81	AV
5	5638.188	61.13	68.20	-7.07	37.74	23.39	PK
6	5653.063	58.51	70.48	-11.96	35.06	23.45	PK
* 7	5828.063	125.09	131.20	-6.11	101.01	24.08	PK
8	5923.438	59.13	69.35	-10.22	34.77	24.36	PK
9	6010.500	59.89	68.20	-8.31	35.26	24.63	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch149,5.745G,BW20M	Humidity (%RH)	58.0

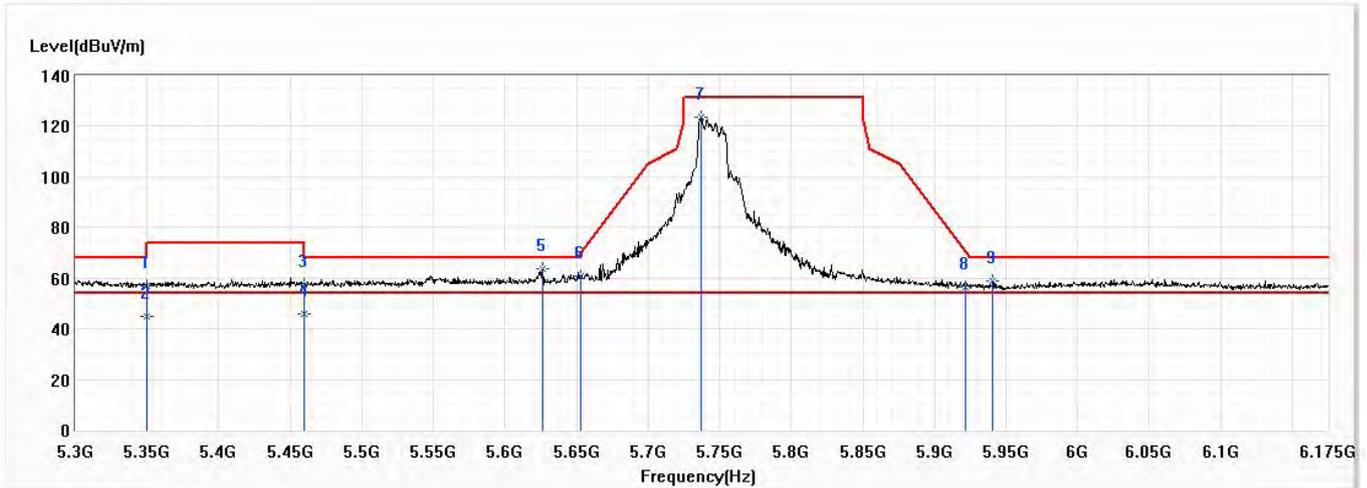


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.80	74.00	-17.20	34.10	22.70	PK
2	5350.000	44.77	54.00	-9.23	22.07	22.70	AV
3	5460.000	57.64	74.00	-16.36	34.83	22.81	PK
4	5460.000	45.68	54.00	-8.32	22.87	22.81	AV
* 5	5625.938	63.51	68.20	-4.69	40.15	23.36	PK
6	5653.063	60.96	70.48	-9.52	37.51	23.45	PK
7	5737.063	123.69	131.20	-7.51	99.91	23.78	PK
8	5921.688	56.43	70.64	-14.21	32.07	24.36	PK
9	5940.938	58.94	68.20	-9.26	34.51	24.43	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch149,5.745G,BW20M	Humidity (%RH)	58.0

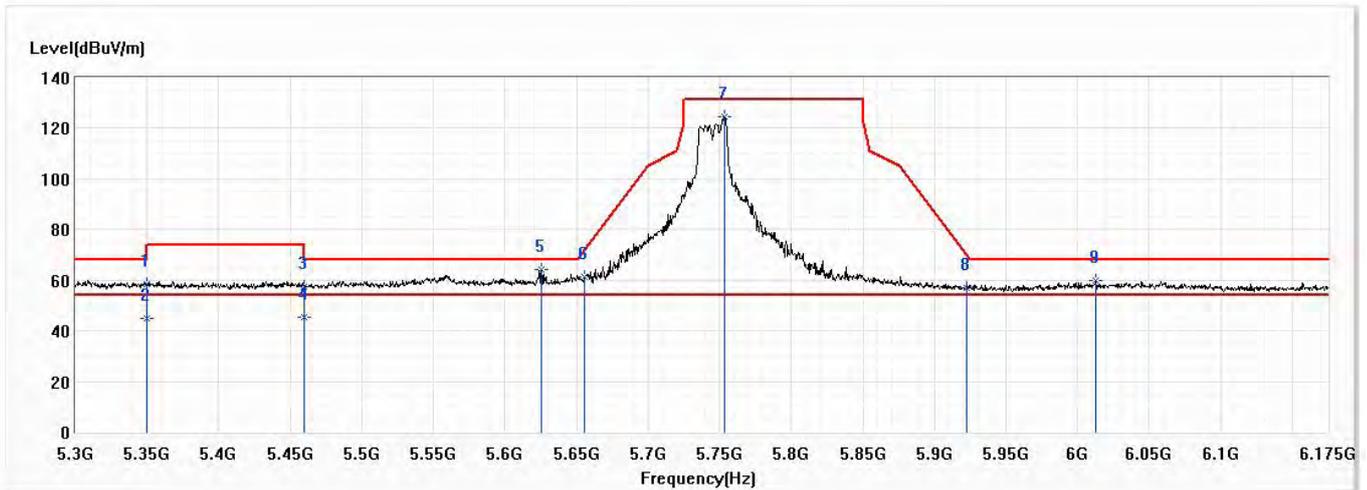


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.28	74.00	-15.72	35.58	22.70	PK
2	5350.000	44.81	54.00	-9.19	22.11	22.70	AV
3	5460.000	57.50	74.00	-16.50	34.69	22.81	PK
4	5460.000	45.37	54.00	-8.63	22.56	22.81	AV
* 5	5625.063	64.34	68.20	-3.86	40.98	23.36	PK
6	5655.688	61.10	72.43	-11.33	37.63	23.47	PK
7	5753.250	124.76	131.20	-6.44	100.92	23.84	PK
8	5922.125	56.97	70.32	-13.35	32.61	24.36	PK
9	6013.125	59.68	68.20	-8.52	35.03	24.65	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch157,5.785G,BW20M	Humidity (%RH)	58.0

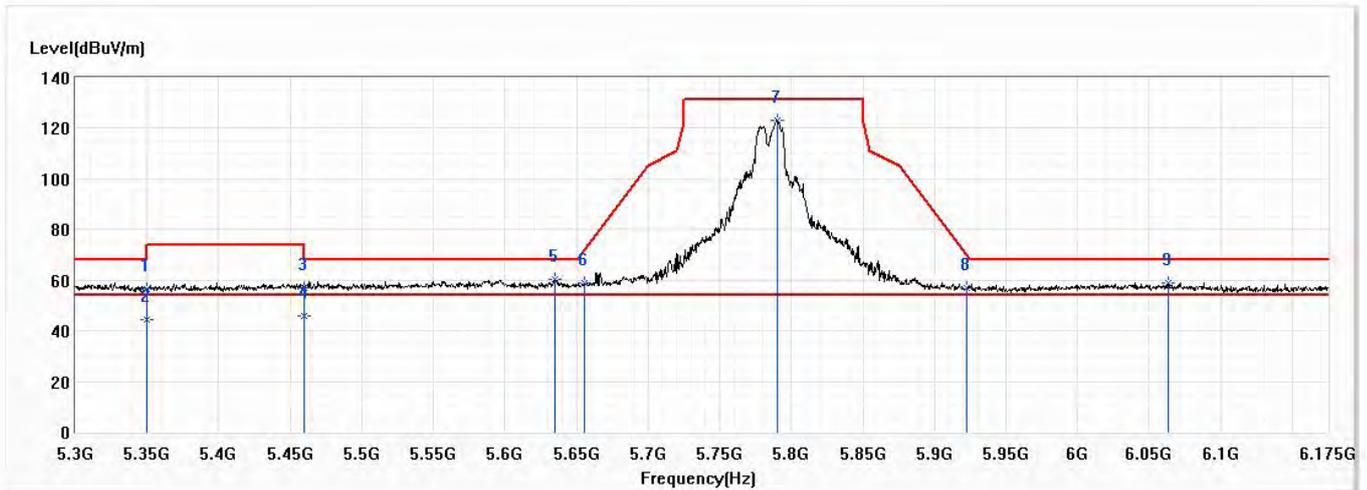


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.51	74.00	-17.49	33.81	22.70	PK
2	5350.000	44.37	54.00	-9.63	21.67	22.70	AV
3	5460.000	56.83	74.00	-17.17	34.02	22.81	PK
4	5460.000	45.68	54.00	-8.32	22.87	22.81	AV
* 5	5635.125	60.12	68.20	-8.08	36.73	23.39	PK
6	5655.250	58.66	72.10	-13.44	35.19	23.47	PK
7	5790.000	122.98	131.20	-8.22	99.01	23.97	PK
8	5922.563	56.99	70.00	-13.01	32.63	24.36	PK
9	6063.438	58.71	68.20	-9.49	33.89	24.82	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch157,5.785G,BW20M	Humidity (%RH)	58.0

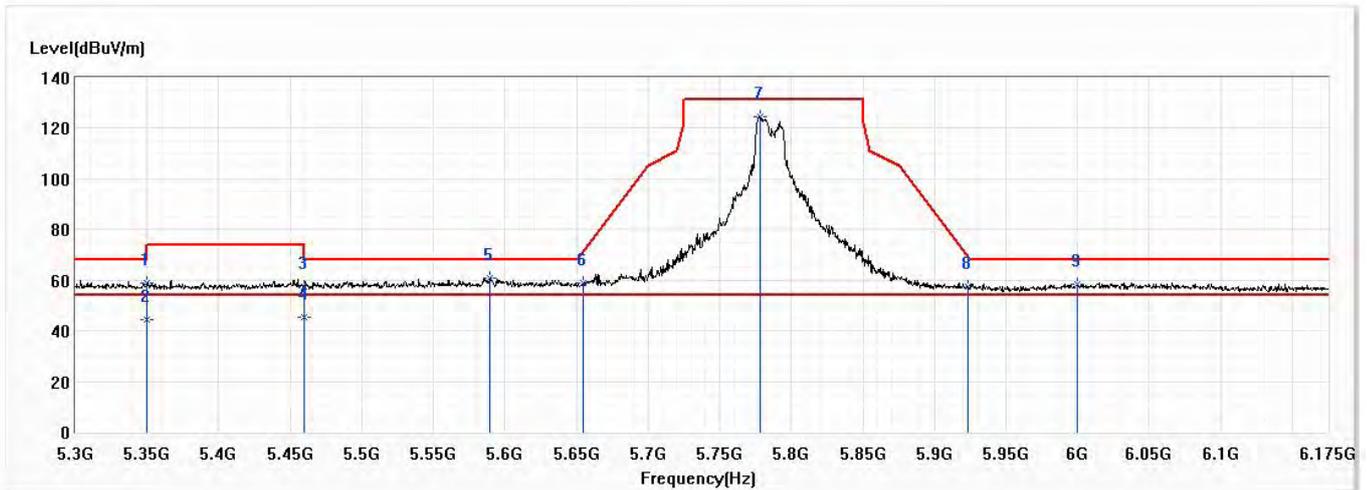


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.91	74.00	-15.09	36.21	22.70	PK
2	5350.000	44.39	54.00	-9.61	21.69	22.70	AV
3	5460.000	57.68	74.00	-16.32	34.87	22.81	PK
4	5460.000	45.61	54.00	-8.39	22.80	22.81	AV
5	5589.625	61.06	68.20	-7.14	37.85	23.21	PK
6	5654.375	58.70	71.45	-12.75	35.23	23.47	PK
* 7	5778.188	124.68	131.20	-6.52	100.75	23.93	PK
8	5923.000	57.62	69.67	-12.05	33.26	24.36	PK
9	6000.000	58.44	68.20	-9.76	33.84	24.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch165,5.825G,BW20M	Humidity (%RH)	58.0

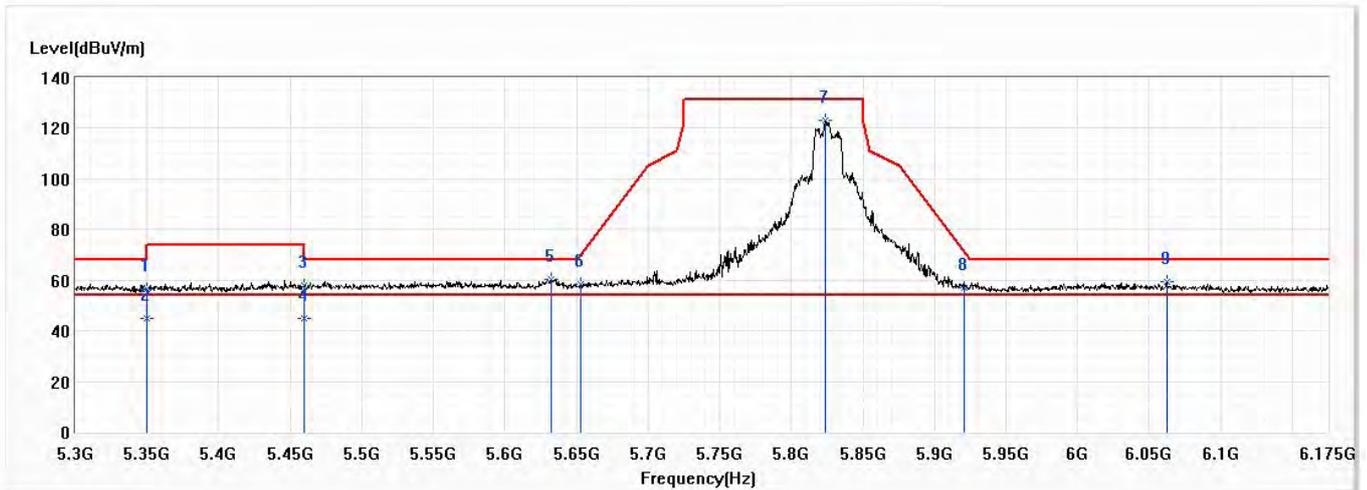


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.36	74.00	-17.64	33.66	22.70	PK
2	5350.000	44.69	54.00	-9.31	21.99	22.70	AV
3	5460.000	57.80	74.00	-16.20	34.99	22.81	PK
4	5460.000	45.12	54.00	-8.88	22.31	22.81	AV
* 5	5632.063	60.40	68.20	-7.80	37.04	23.36	PK
6	5653.063	58.42	70.48	-12.06	34.97	23.45	PK
7	5824.125	122.90	131.20	-8.30	98.84	24.06	PK
8	5921.250	57.02	70.96	-13.94	32.66	24.36	PK
9	6062.125	59.21	68.20	-8.99	34.40	24.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch165,5.825G,BW20M	Humidity (%RH)	58.0

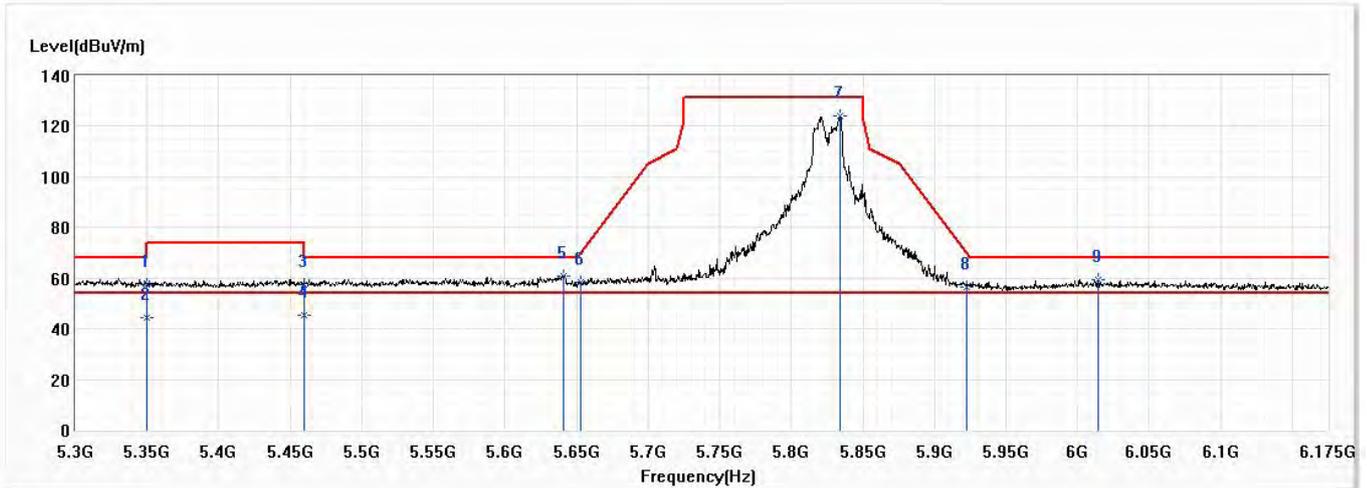


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.63	74.00	-16.37	34.93	22.70	PK
2	5350.000	44.62	54.00	-9.38	21.92	22.70	AV
3	5460.000	57.46	74.00	-16.54	34.65	22.81	PK
4	5460.000	45.37	54.00	-8.63	22.56	22.81	AV
5	5641.250	60.90	68.20	-7.30	37.49	23.41	PK
6	5653.063	58.55	70.48	-11.93	35.10	23.45	PK
* 7	5834.188	124.18	131.20	-7.02	100.08	24.10	PK
8	5922.563	56.53	70.00	-13.47	32.17	24.36	PK
9	6014.000	59.34	68.20	-8.86	34.68	24.66	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch151,5.755G,BW40M	Humidity (%RH)	58.0

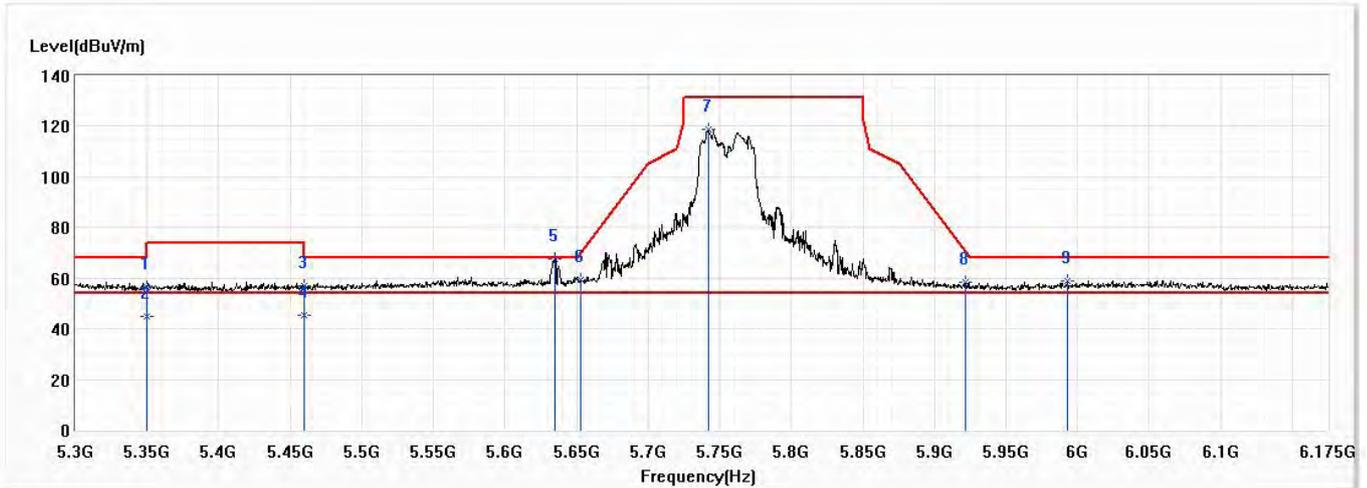


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.49	74.00	-17.51	33.79	22.70	PK
2	5350.000	44.68	54.00	-9.32	21.98	22.70	AV
3	5460.000	56.81	74.00	-17.19	34.00	22.81	PK
4	5460.000	45.31	54.00	-8.69	22.50	22.81	AV
* 5	5635.125	67.58	68.20	-0.62	44.19	23.39	PK
6	5653.063	59.19	70.48	-11.29	35.74	23.45	PK
7	5742.313	118.96	131.20	-12.24	95.15	23.81	PK
8	5921.688	58.29	70.64	-12.35	33.93	24.36	PK
9	5993.000	59.00	68.20	-9.20	34.42	24.58	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch151,5.755G,BW40M	Humidity (%RH)	58.0

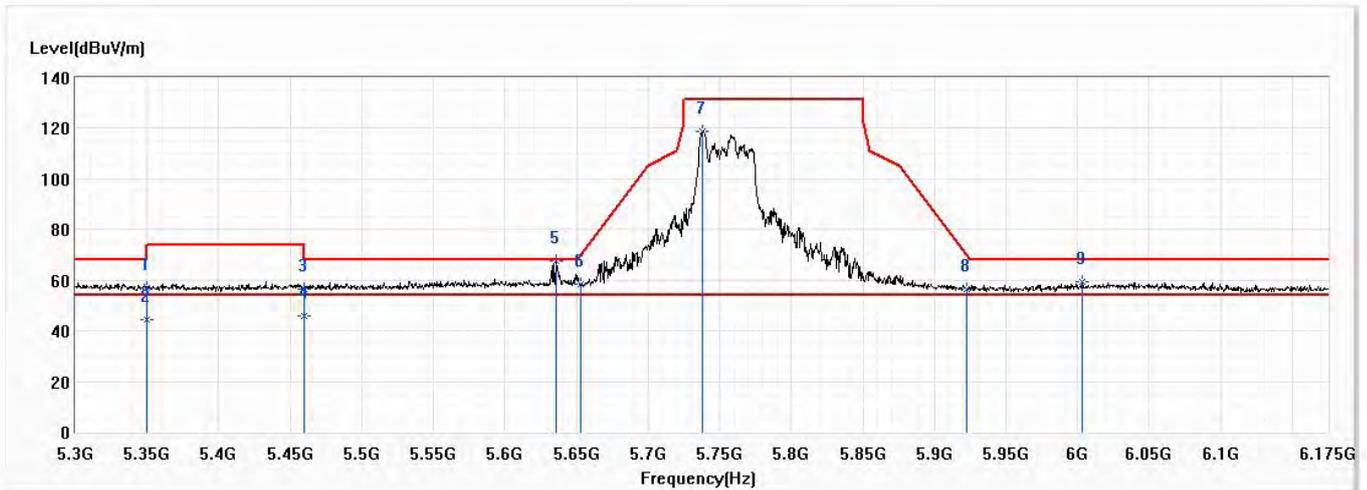


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.10	74.00	-16.90	34.40	22.70	PK
2	5350.000	44.25	54.00	-9.75	21.55	22.70	AV
3	5460.000	56.66	74.00	-17.34	33.85	22.81	PK
4	5460.000	45.63	54.00	-8.37	22.82	22.81	AV
* 5	5636.000	67.59	68.20	-0.61	44.20	23.39	PK
6	5653.063	58.52	70.48	-11.95	35.07	23.45	PK
7	5737.938	118.99	131.20	-12.21	95.20	23.79	PK
8	5922.563	56.70	70.00	-13.29	32.34	24.36	PK
9	6003.500	59.15	68.20	-9.05	34.54	24.61	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11axCh159,5.795G,BW40M	Humidity (%RH)	58.0

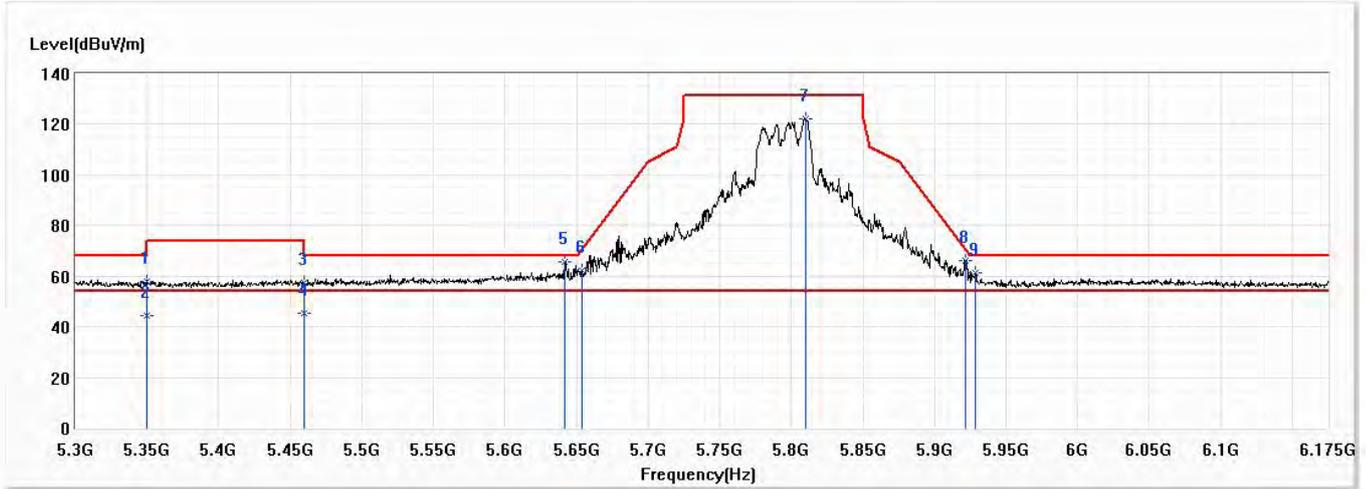


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.96	74.00	-16.04	35.26	22.70	PK
2	5350.000	44.38	54.00	-9.62	21.68	22.70	AV
3	5460.000	57.25	74.00	-16.75	34.44	22.81	PK
4	5460.000	45.48	54.00	-8.52	22.67	22.81	AV
* 5	5642.125	65.69	68.20	-2.51	42.28	23.41	PK
6	5653.938	62.24	71.13	-8.88	38.77	23.47	PK
7	5810.125	122.04	131.20	-9.16	98.03	24.01	PK
8	5921.688	66.13	70.64	-4.52	41.77	24.36	PK
9	5928.688	61.09	68.20	-7.11	36.71	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11axCh159,5.795G,BW40M	Humidity (%RH)	58.0

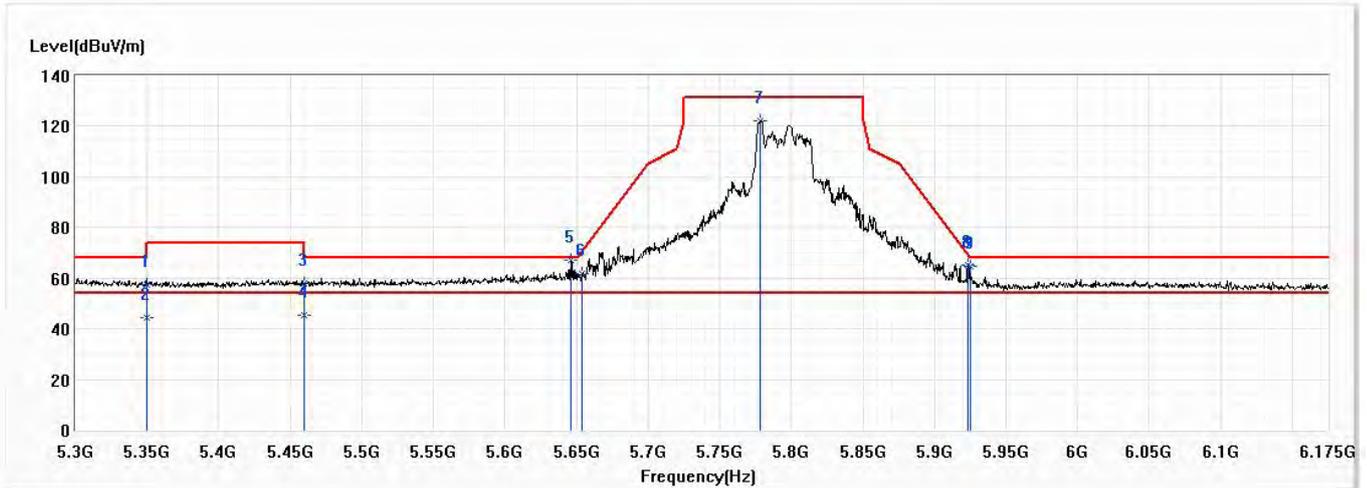


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.64	74.00	-16.36	34.94	22.70	PK
2	5350.000	44.46	54.00	-9.54	21.76	22.70	AV
3	5460.000	57.71	74.00	-16.29	34.90	22.81	PK
4	5460.000	45.39	54.00	-8.61	22.58	22.81	AV
* 5	5645.625	67.32	68.20	-0.88	43.90	23.42	PK
6	5653.938	61.75	71.13	-9.38	38.28	23.47	PK
7	5778.625	122.36	131.20	-8.84	98.43	23.93	PK
8	5923.000	65.01	69.67	-4.66	40.65	24.36	PK
9	5924.750	64.58	68.38	-3.80	40.22	24.36	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch155,5.775G,BW80M	Humidity (%RH)	58.0

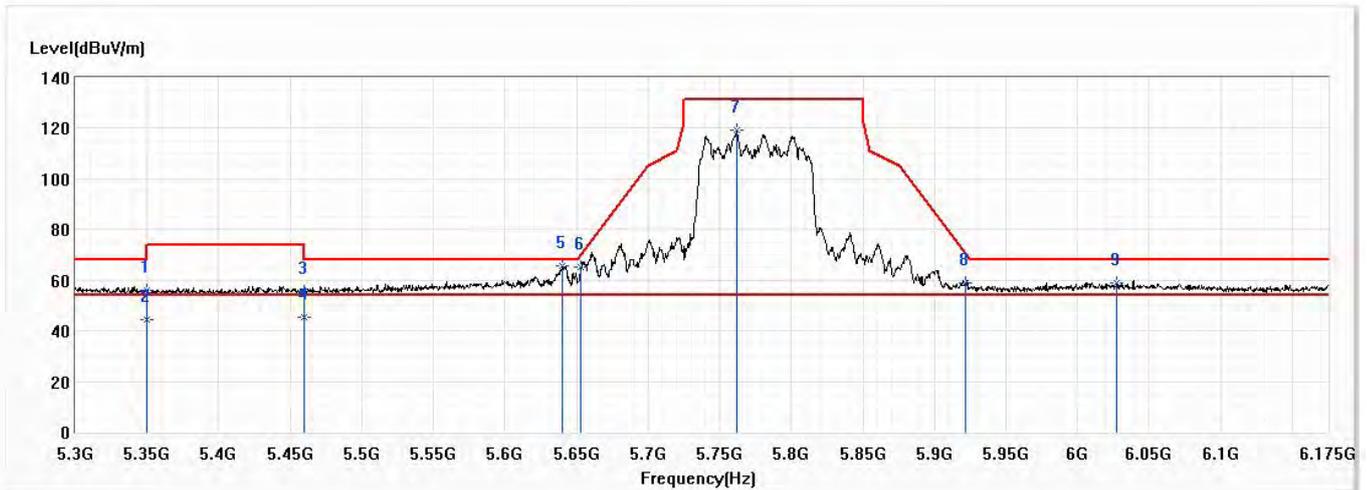


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.14	74.00	-17.86	33.44	22.70	PK
2	5350.000	44.27	54.00	-9.73	21.57	22.70	AV
3	5460.000	55.48	74.00	-18.52	32.67	22.81	PK
4	5460.000	45.45	54.00	-8.55	22.64	22.81	AV
* 5	5640.375	65.83	68.20	-2.37	42.42	23.41	PK
6	5653.063	65.32	70.48	-5.16	41.87	23.45	PK
7	5761.563	119.42	131.20	-11.78	95.54	23.88	PK
8	5921.688	59.03	70.64	-11.61	34.67	24.36	PK
9	6027.563	59.00	68.20	-9.20	34.31	24.69	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 2: Transmit RU Mode_Full	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax, Ch155,5.775G,BW80M	Humidity (%RH)	58.0

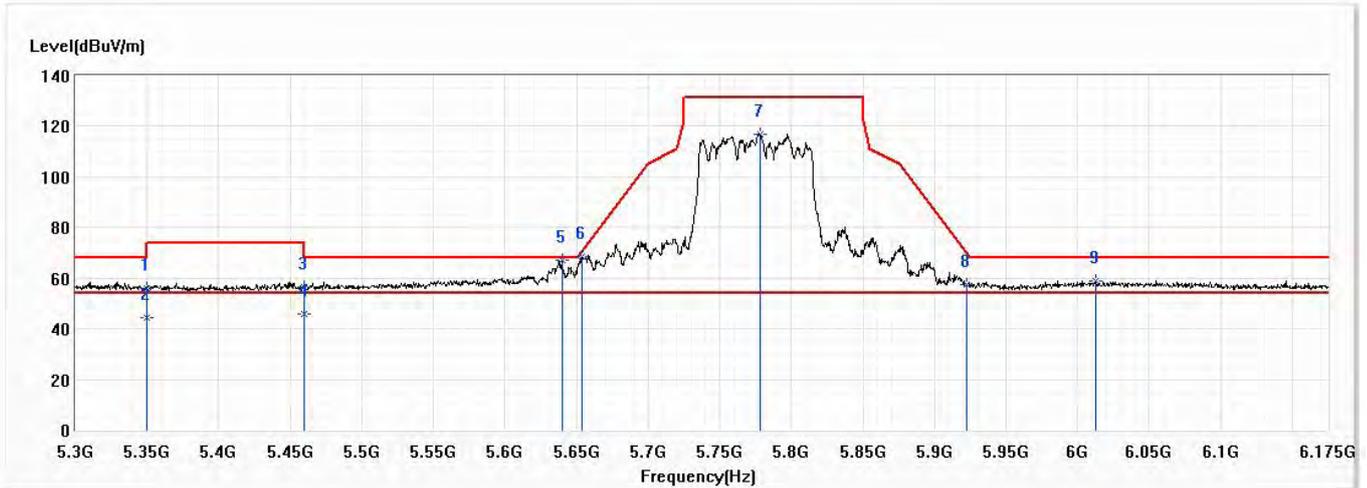


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.16	74.00	-17.84	33.46	22.70	PK
2	5350.000	44.28	54.00	-9.72	21.58	22.70	AV
3	5460.000	56.59	74.00	-17.41	33.78	22.81	PK
4	5460.000	45.76	54.00	-8.24	22.95	22.81	AV
* 5	5639.938	67.31	68.20	-0.89	43.90	23.41	PK
6	5653.938	68.32	71.13	-2.80	44.85	23.47	PK
7	5778.188	117.06	131.20	-14.14	93.13	23.93	PK
8	5922.125	57.55	70.32	-12.77	33.19	24.36	PK
9	6012.688	59.00	68.20	-9.20	34.35	24.65	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/12
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch36,5.18G,BW20M	Humidity (%RH)	58.0

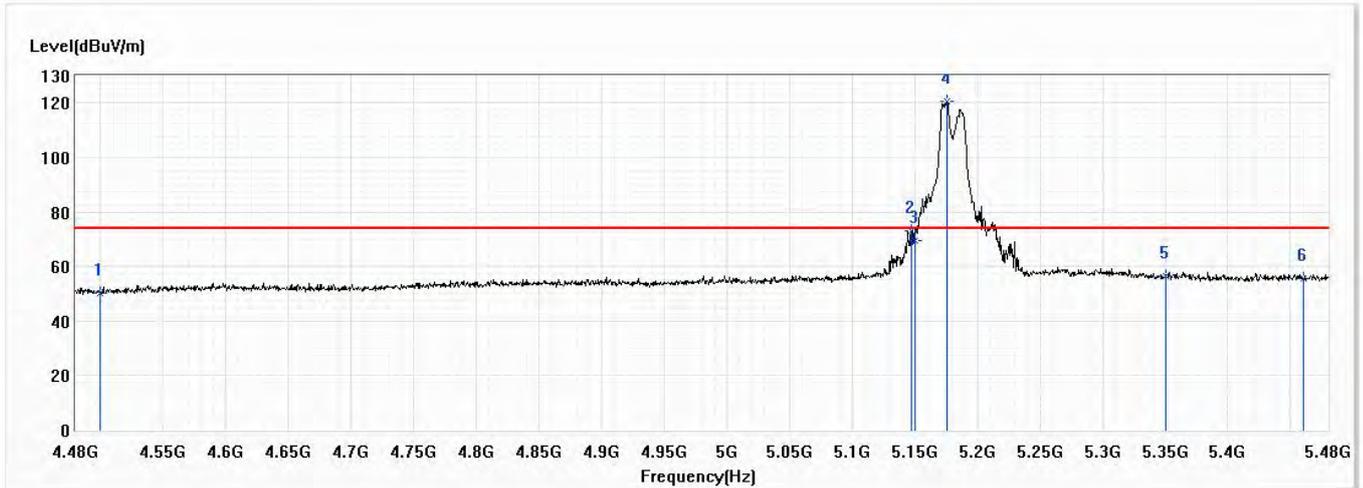


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.28	74.00	-23.72	30.04	20.24	PK
2	5147.500	73.12	74.00	-0.88	50.61	22.51	PK
3	5150.000	69.30	74.00	-4.70	46.79	22.51	PK
! 4	5175.500	120.61	74.00	46.61	98.08	22.53	PK
5	5350.000	56.26	74.00	-17.74	33.56	22.70	PK
6	5460.000	55.70	74.00	-18.30	32.89	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/12
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch36,5.18G,BW20M	Humidity (%RH)	58.0

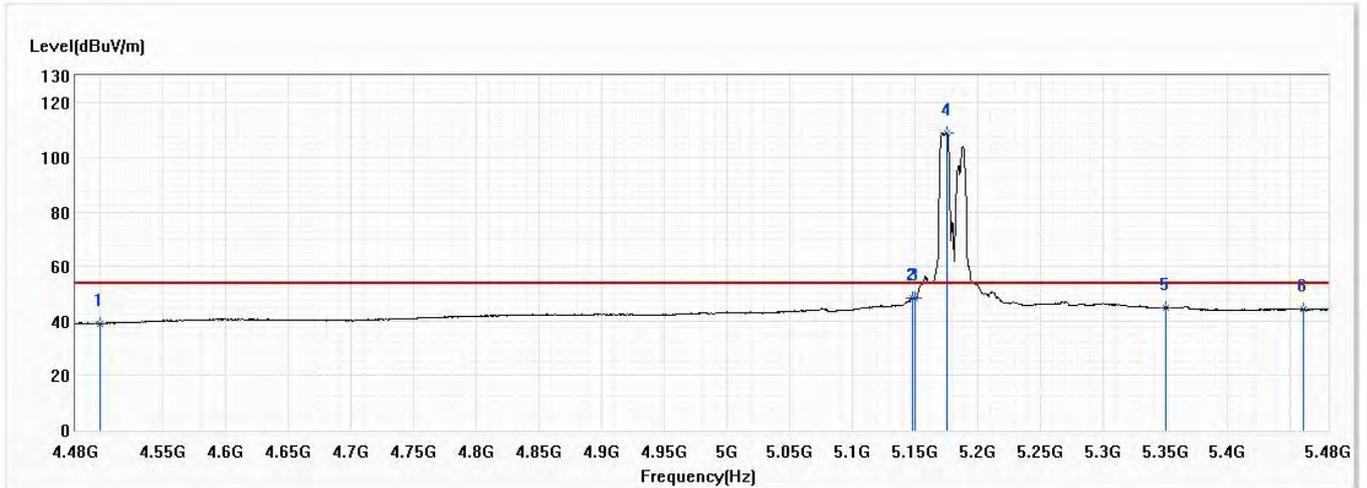


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.09	54.00	-14.91	18.85	20.24	AV
2	5148.000	48.41	54.00	-5.59	25.90	22.51	AV
3	5150.000	48.52	54.00	-5.48	26.01	22.51	AV
! 4	5175.500	109.02	54.00	55.02	86.49	22.53	AV
5	5350.000	44.98	54.00	-9.02	22.28	22.70	AV
6	5460.000	44.23	54.00	-9.77	21.42	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/12
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch36,5.18G,BW20M	Humidity (%RH)	58.0

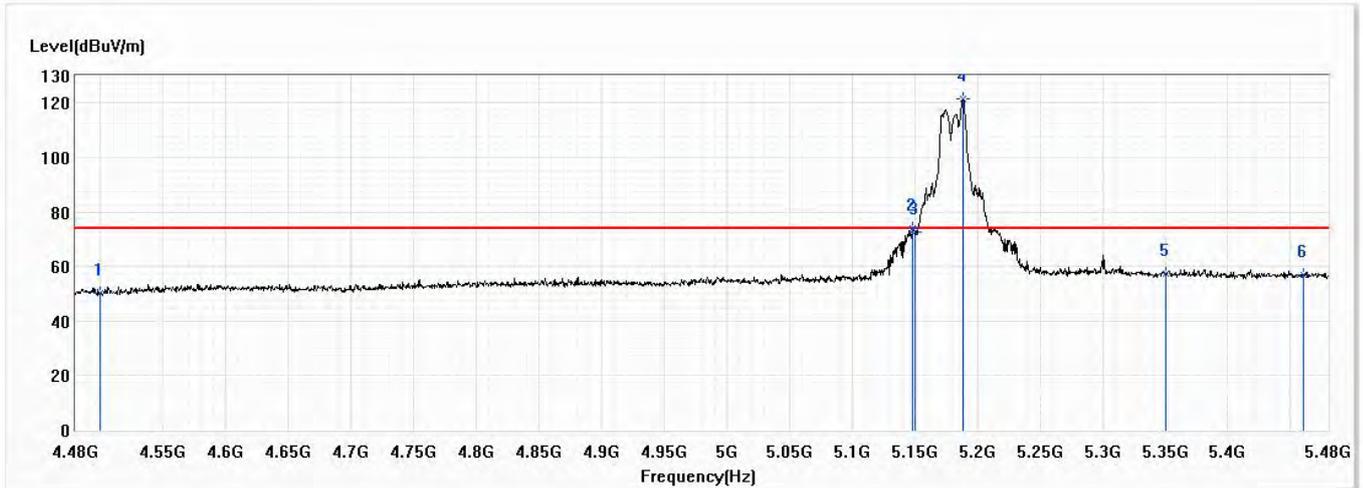


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.07	74.00	-23.93	29.83	20.24	PK
2	5148.500	73.81	74.00	-0.19	51.30	22.51	PK
3	5150.000	72.74	74.00	-1.26	50.23	22.51	PK
! 4	5188.500	121.33	74.00	47.33	98.78	22.55	PK
5	5350.000	57.26	74.00	-16.74	34.56	22.70	PK
6	5460.000	56.90	74.00	-17.10	34.09	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/12
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch36,5.18G,BW20M	Humidity (%RH)	58.0

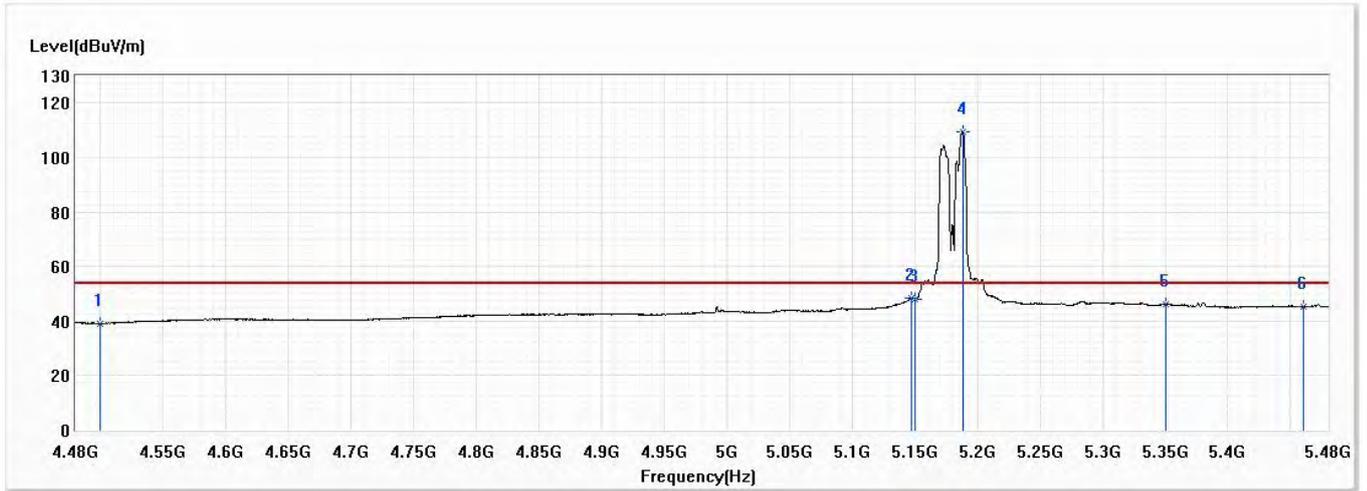


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.07	54.00	-14.93	18.83	20.24	AV
2	5147.500	48.41	54.00	-5.59	25.90	22.51	AV
3	5150.000	48.13	54.00	-5.87	25.62	22.51	AV
! 4	5188.500	109.58	54.00	55.58	87.03	22.55	AV
5	5350.000	45.98	54.00	-8.02	23.28	22.70	AV
6	5460.000	45.35	54.00	-8.65	22.54	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/12
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch44,5.22G,BW20M	Humidity (%RH)	58.0

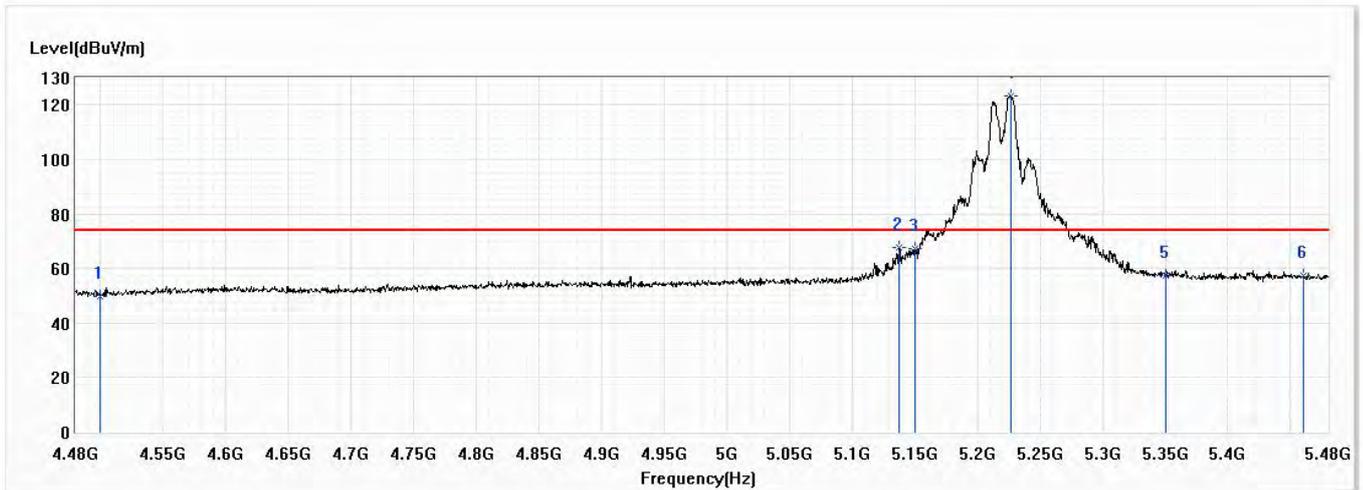


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.75	74.00	-24.25	29.51	20.24	PK
2	5137.500	67.72	74.00	-6.28	45.22	22.50	PK
3	5150.000	67.10	74.00	-6.90	44.59	22.51	PK
! 4	5226.500	123.33	74.00	49.33	100.75	22.58	PK
5	5350.000	57.24	74.00	-16.76	34.54	22.70	PK
6	5460.000	57.38	74.00	-16.62	34.57	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/12
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch44,5.22G,BW20M	Humidity (%RH)	58.0

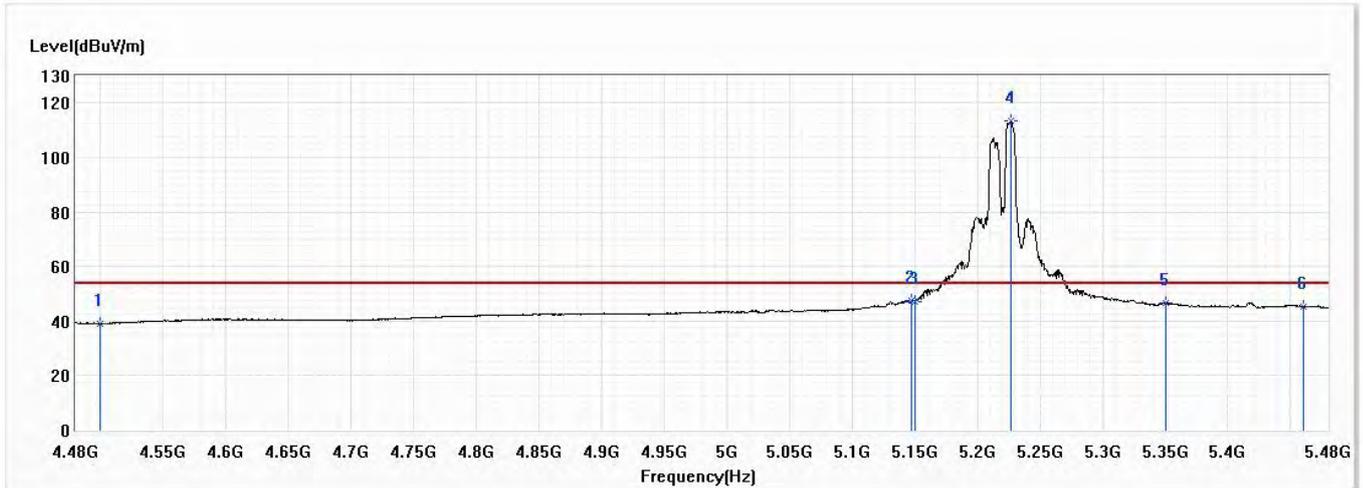


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.12	54.00	-14.88	18.88	20.24	AV
2	5147.500	47.47	54.00	-6.53	24.96	22.51	AV
3	5150.000	47.12	54.00	-6.88	24.61	22.51	AV
! 4	5226.500	113.27	54.00	59.27	90.69	22.58	AV
5	5350.000	46.46	54.00	-7.54	23.76	22.70	AV
6	5460.000	45.32	54.00	-8.68	22.51	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/12
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch44,5.22G,BW20M	Humidity (%RH)	58.0

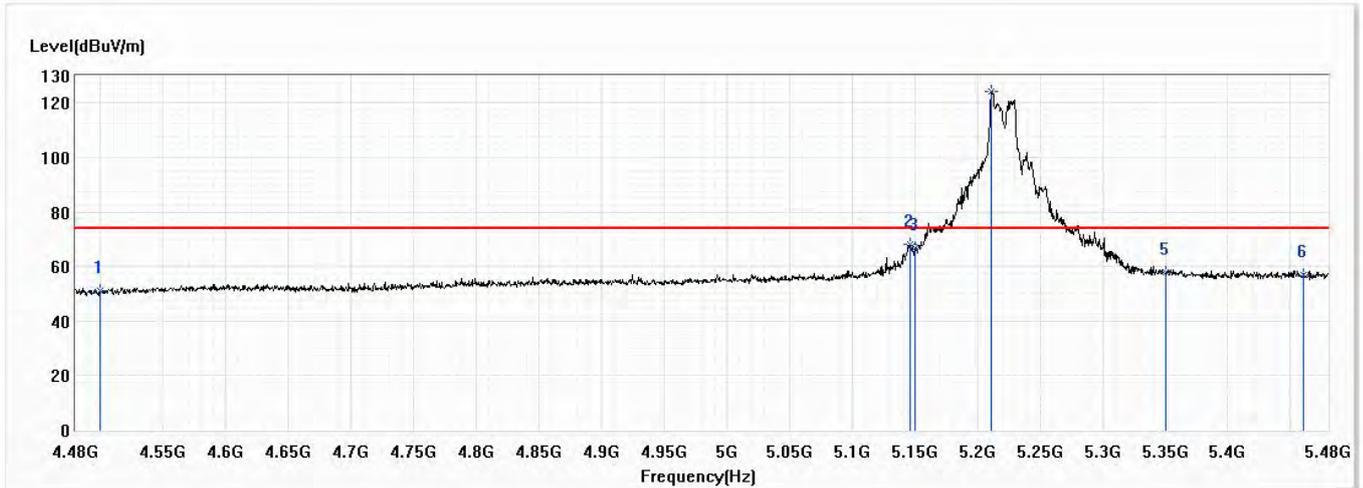


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.95	74.00	-23.05	30.71	20.24	PK
2	5146.000	68.31	74.00	-5.69	45.80	22.51	PK
3	5150.000	66.74	74.00	-7.26	44.23	22.51	PK
! 4	5211.500	124.26	74.00	50.26	101.70	22.56	PK
5	5350.000	57.76	74.00	-16.24	35.06	22.70	PK
6	5460.000	56.95	74.00	-17.05	34.14	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/12
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch44,5.22G,BW20M	Humidity (%RH)	58.0

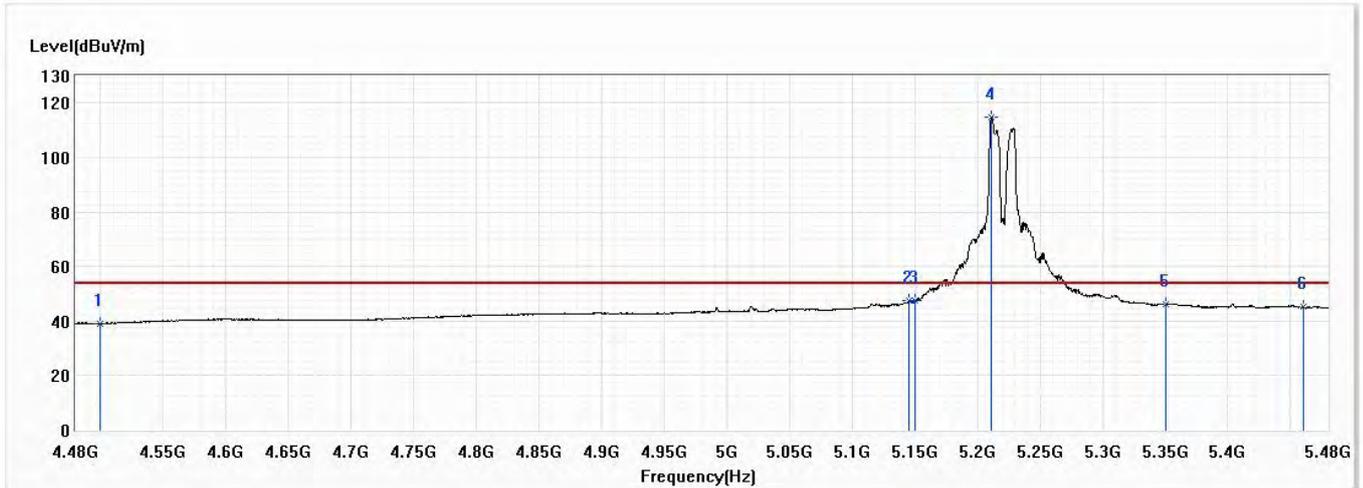


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	38.99	54.00	-15.01	18.75	20.24	AV
2	5145.500	47.33	54.00	-6.67	24.82	22.51	AV
3	5150.000	47.64	54.00	-6.36	25.13	22.51	AV
! 4	5211.500	114.73	54.00	60.73	92.17	22.56	AV
5	5350.000	46.39	54.00	-7.61	23.69	22.70	AV
6	5460.000	45.10	54.00	-8.90	22.29	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch48,5.24G,BW20M	Humidity (%RH)	58.0

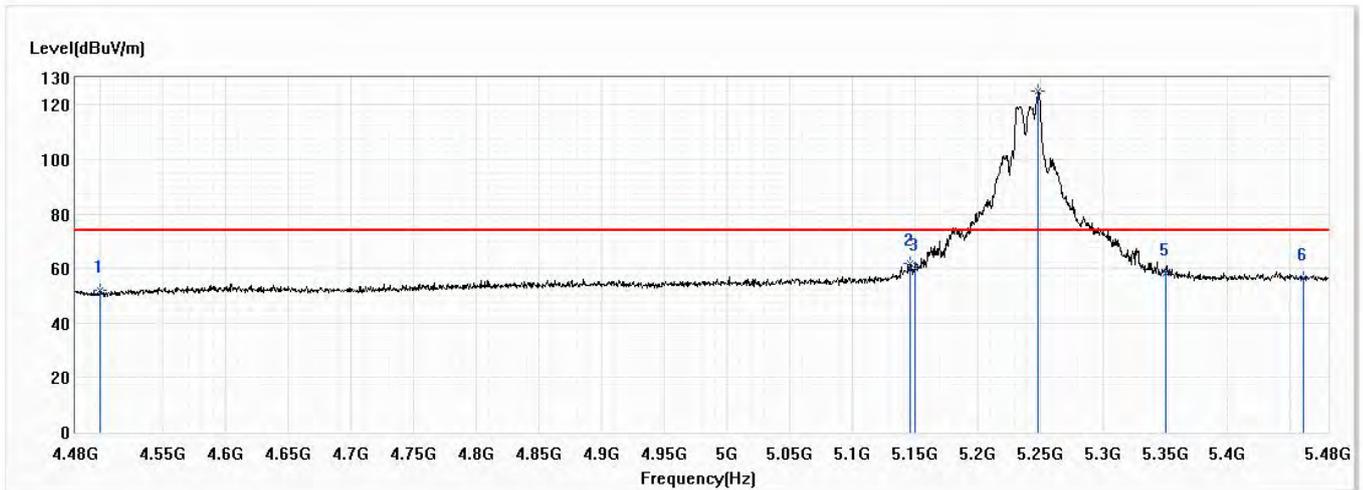


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	52.02	74.00	-21.98	31.78	20.24	PK
2	5146.000	61.82	74.00	-12.18	39.31	22.51	PK
3	5150.000	59.86	74.00	-14.14	37.35	22.51	PK
! 4	5248.500	125.04	74.00	51.04	102.44	22.60	PK
5	5350.000	58.50	74.00	-15.50	35.80	22.70	PK
6	5460.000	56.38	74.00	-17.62	33.57	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch48,5.24G,BW20M	Humidity (%RH)	58.0

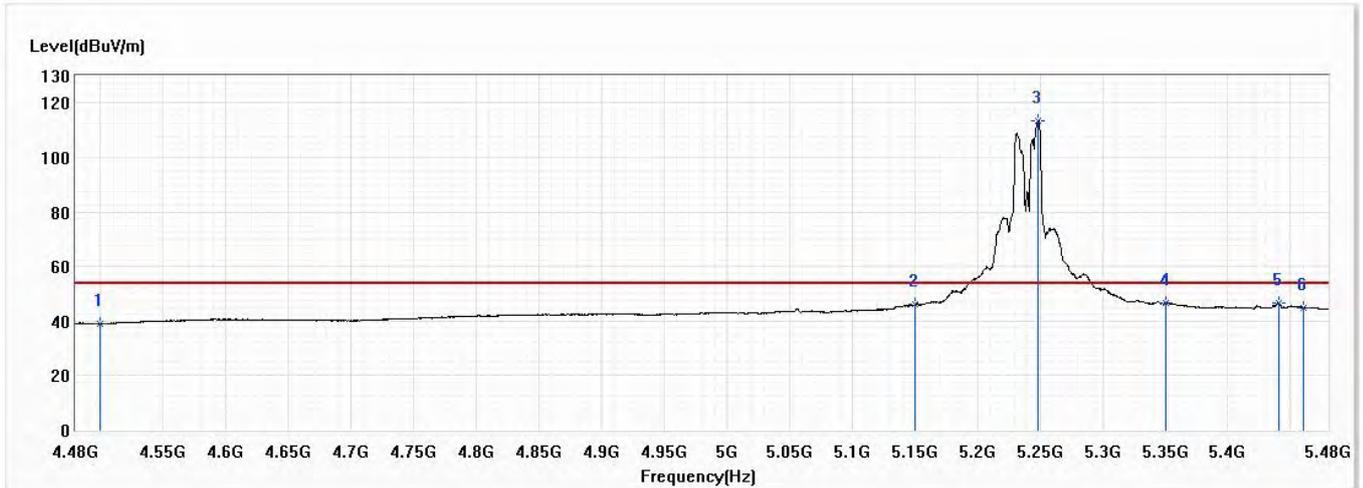


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.05	54.00	-14.95	18.81	20.24	AV
2	5150.000	46.07	54.00	-7.93	23.56	22.51	AV
! 3	5248.500	113.44	54.00	59.44	90.84	22.60	AV
4	5350.000	46.43	54.00	-7.57	23.73	22.70	AV
5	5441.000	46.73	54.00	-7.27	23.94	22.79	AV
6	5460.000	44.85	54.00	-9.15	22.04	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch48,5.24G,BW20M	Humidity (%RH)	58.0

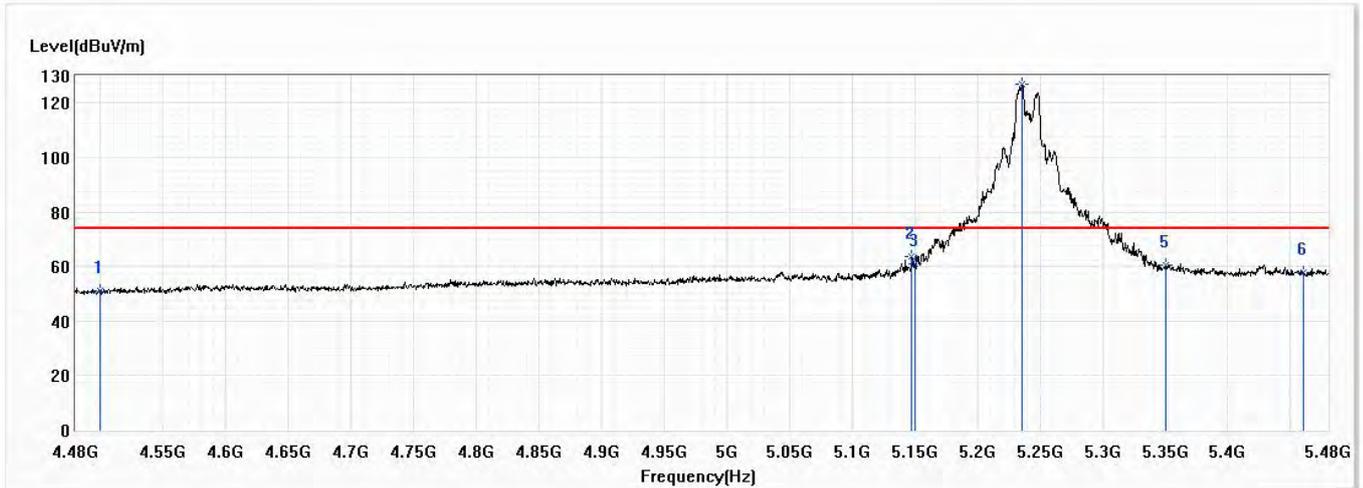


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.89	74.00	-23.11	30.65	20.24	PK
2	5147.500	63.80	74.00	-10.20	41.29	22.51	PK
3	5150.000	60.84	74.00	-13.16	38.33	22.51	PK
! 4	5236.000	126.89	74.00	52.89	104.31	22.58	PK
5	5350.000	60.52	74.00	-13.48	37.82	22.70	PK
6	5460.000	57.69	74.00	-16.31	34.88	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch48,5.24G,BW20M	Humidity (%RH)	58.0

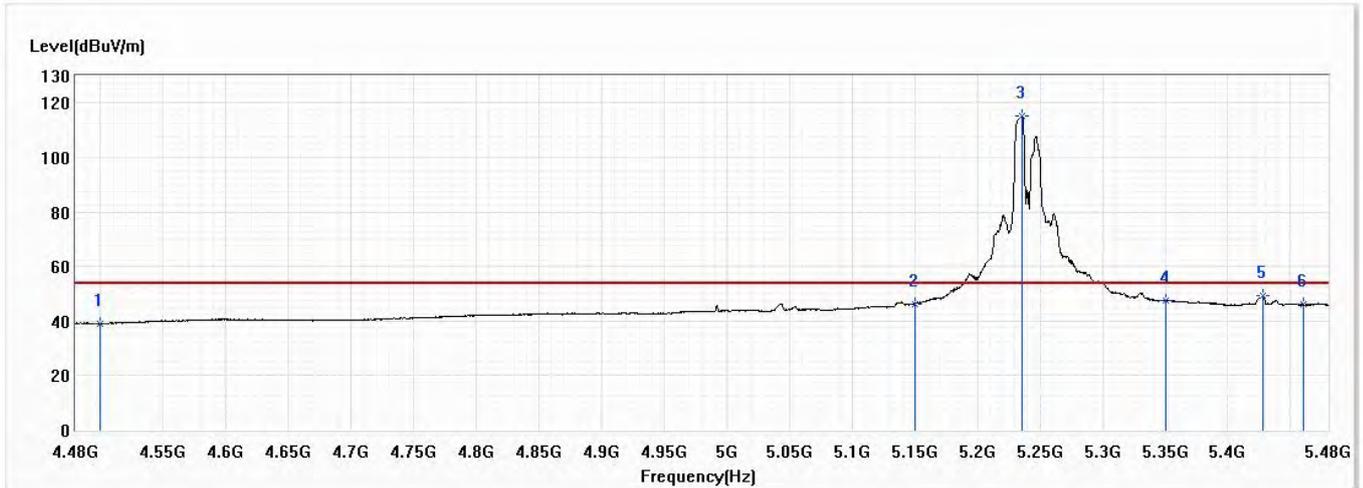


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	38.94	54.00	-15.06	18.70	20.24	AV
2	5150.000	46.39	54.00	-7.61	23.88	22.51	AV
! 3	5236.000	115.15	54.00	61.15	92.57	22.58	AV
4	5350.000	47.62	54.00	-6.38	24.92	22.70	AV
5	5428.000	49.16	54.00	-4.84	26.38	22.78	AV
6	5460.000	45.97	54.00	-8.03	23.16	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch38,5.19G,BW40M	Humidity (%RH)	58.0

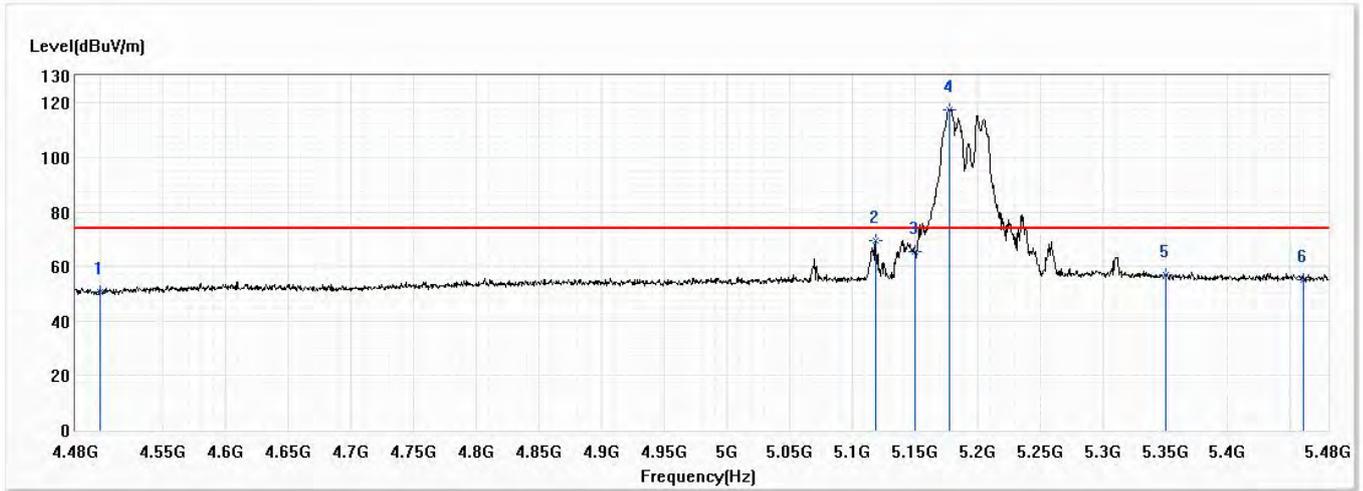


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.64	74.00	-23.36	30.40	20.24	PK
2	5118.500	69.47	74.00	-4.53	46.98	22.49	PK
3	5150.000	65.52	74.00	-8.48	43.01	22.51	PK
! 4	5178.000	117.57	74.00	43.57	95.03	22.54	PK
5	5350.000	57.09	74.00	-16.91	34.39	22.70	PK
6	5460.000	55.33	74.00	-18.67	32.52	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch38,5.19G,BW40M	Humidity (%RH)	58.0

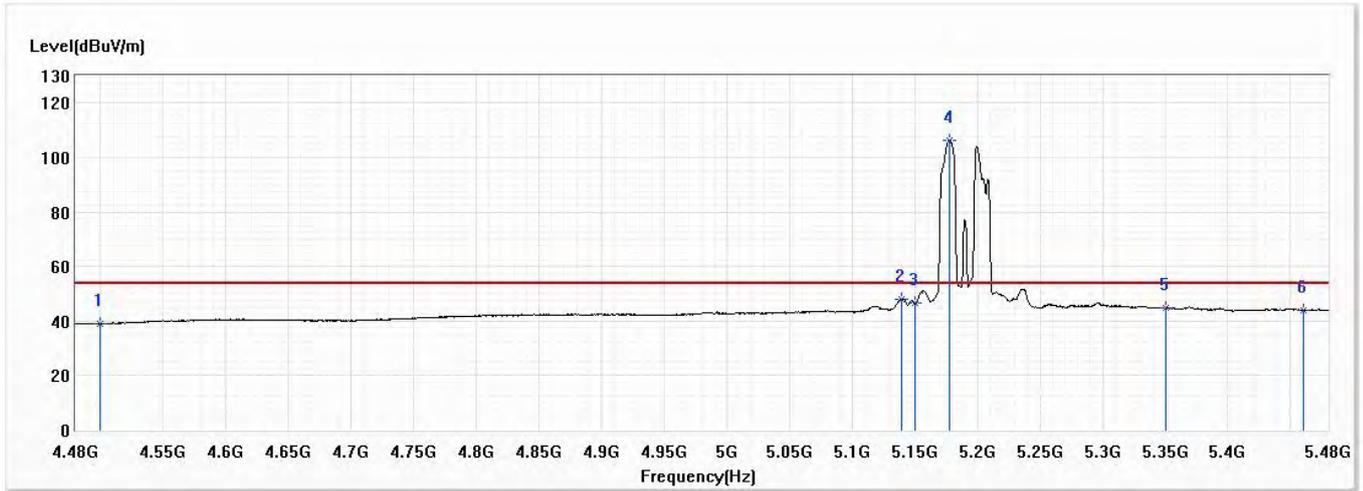


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	38.91	54.00	-15.09	18.67	20.24	AV
2	5139.000	47.96	54.00	-6.04	25.45	22.51	AV
3	5150.000	46.49	54.00	-7.51	23.98	22.51	AV
! 4	5177.500	106.36	54.00	52.36	83.82	22.54	AV
5	5350.000	44.83	54.00	-9.17	22.13	22.70	AV
6	5460.000	43.79	54.00	-10.21	20.98	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch38,5.19G,BW40M	Humidity (%RH)	58.0

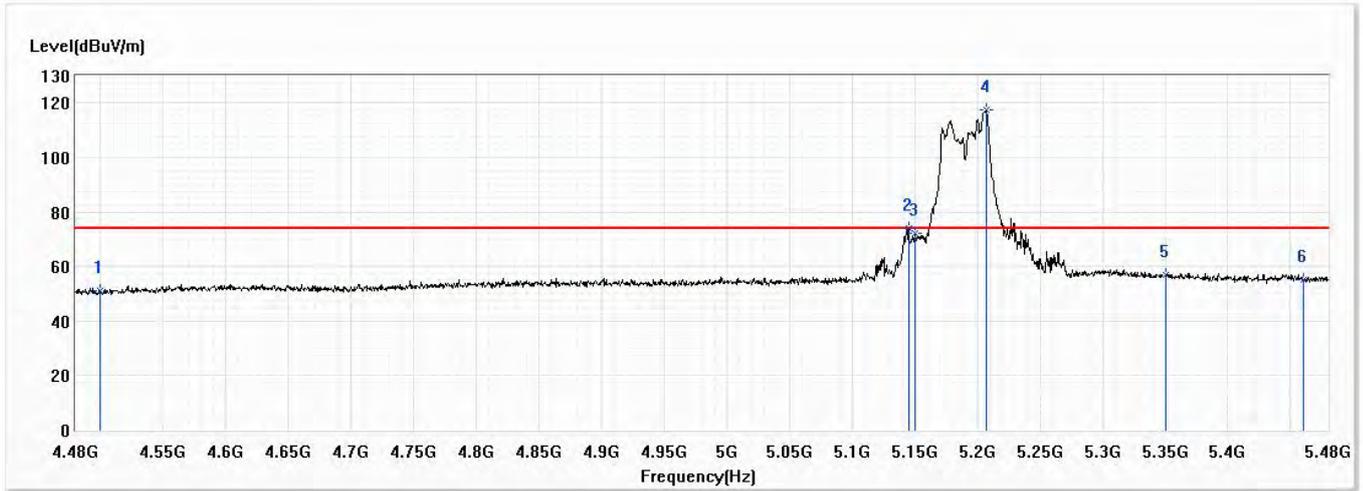


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.95	74.00	-23.05	30.71	20.24	PK
2	5145.000	73.83	74.00	-0.17	51.32	22.51	PK
3	5150.000	72.08	74.00	-1.92	49.57	22.51	PK
! 4	5207.000	117.40	74.00	43.40	94.84	22.56	PK
5	5350.000	56.99	74.00	-17.01	34.29	22.70	PK
6	5460.000	55.34	74.00	-18.66	32.53	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch38,5.19G,BW40M	Humidity (%RH)	58.0

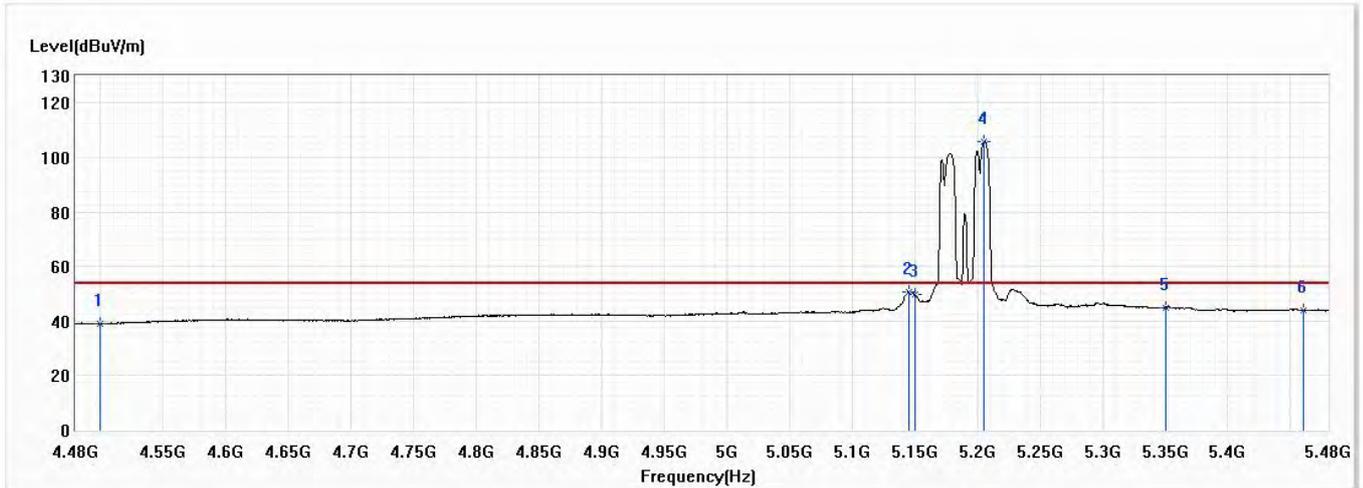


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	38.78	54.00	-15.22	18.54	20.24	AV
2	5145.000	50.54	54.00	-3.46	28.03	22.51	AV
3	5150.000	49.66	54.00	-4.34	27.15	22.51	AV
! 4	5205.500	105.94	54.00	51.94	83.38	22.56	AV
5	5350.000	44.98	54.00	-9.02	22.28	22.70	AV
6	5460.000	44.10	54.00	-9.90	21.29	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch46,5.23G,BW40M	Humidity (%RH)	58.0

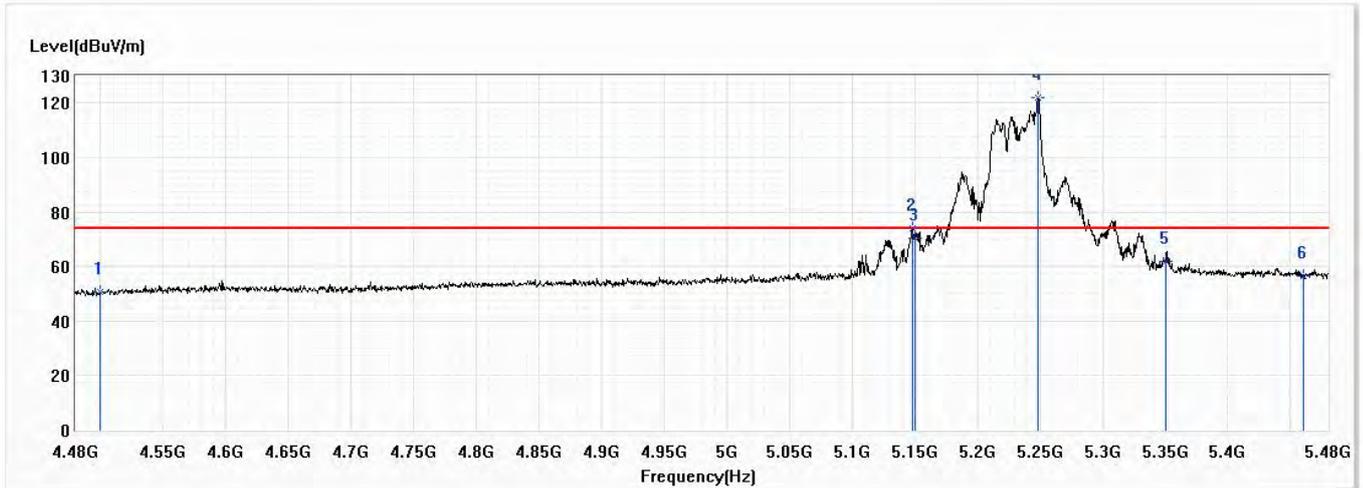


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.48	74.00	-23.52	30.24	20.24	PK
2	5148.000	73.86	74.00	-0.14	51.35	22.51	PK
3	5150.000	70.42	74.00	-3.58	47.91	22.51	PK
! 4	5248.500	121.79	74.00	47.79	99.19	22.60	PK
5	5350.000	61.88	74.00	-12.12	39.18	22.70	PK
6	5460.000	56.56	74.00	-17.44	33.75	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch46,5.23G,BW40M	Humidity (%RH)	58.0

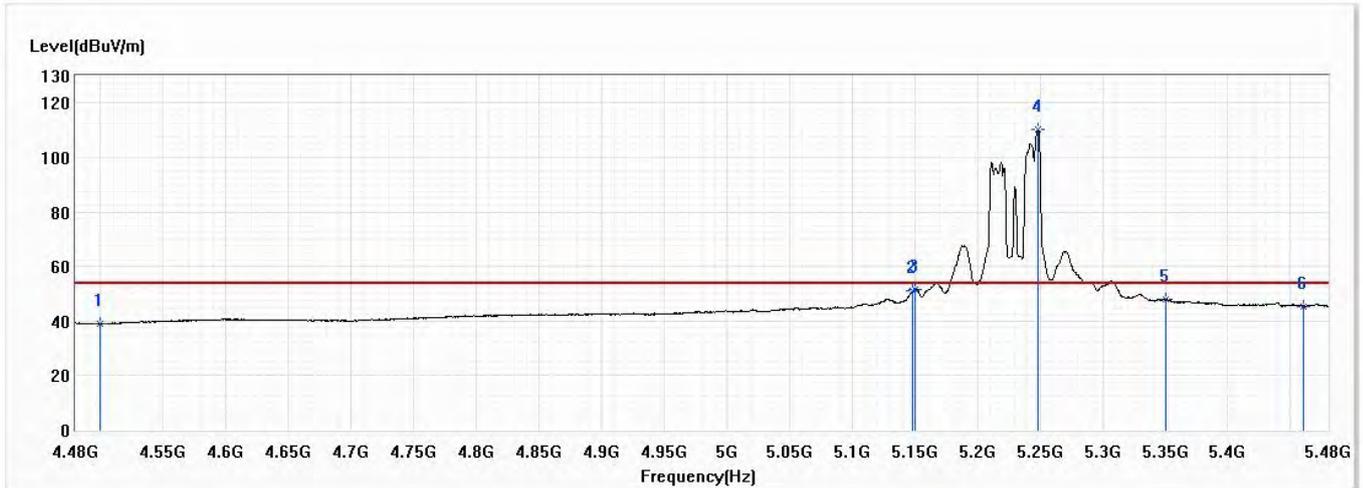


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.02	54.00	-14.98	18.78	20.24	AV
2	5148.500	51.18	54.00	-2.82	28.67	22.51	AV
3	5150.000	51.47	54.00	-2.53	28.96	22.51	AV
! 4	5248.500	110.12	54.00	56.12	87.52	22.60	AV
5	5350.000	47.79	54.00	-6.21	25.09	22.70	AV
6	5460.000	45.48	54.00	-8.52	22.67	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch46,5.23G,BW40M	Humidity (%RH)	58.0

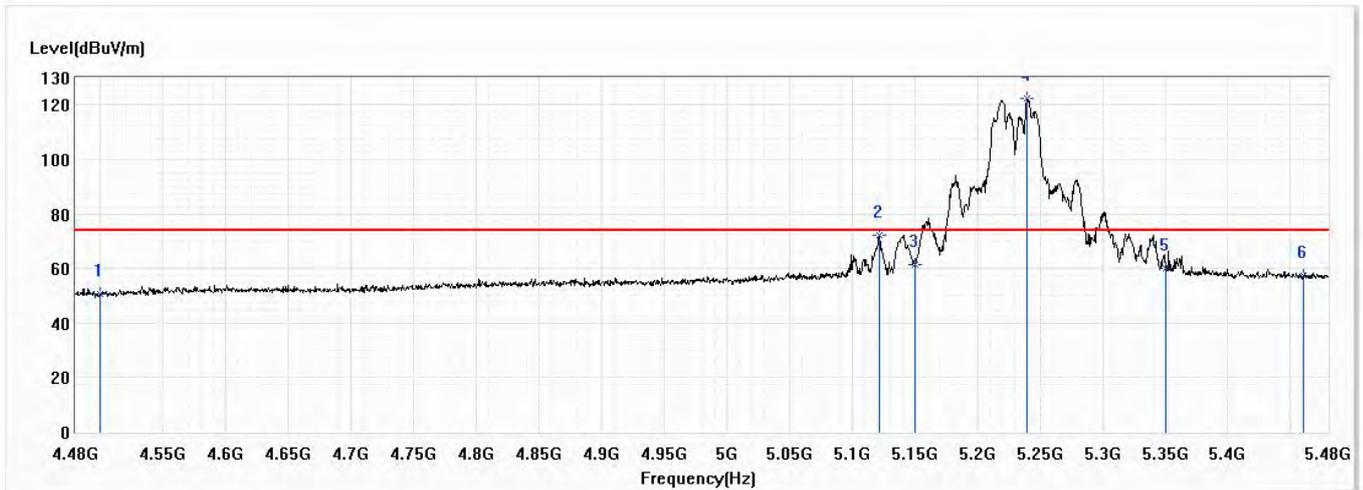


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.74	74.00	-23.26	30.50	20.24	PK
2	5121.500	72.02	74.00	-1.98	49.53	22.49	PK
3	5150.000	61.25	74.00	-12.75	38.74	22.51	PK
! 4	5240.000	122.56	74.00	48.56	99.96	22.60	PK
5	5350.000	60.09	74.00	-13.91	37.39	22.70	PK
6	5460.000	57.58	74.00	-16.42	34.77	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch46,5.23G,BW40M	Humidity (%RH)	58.0

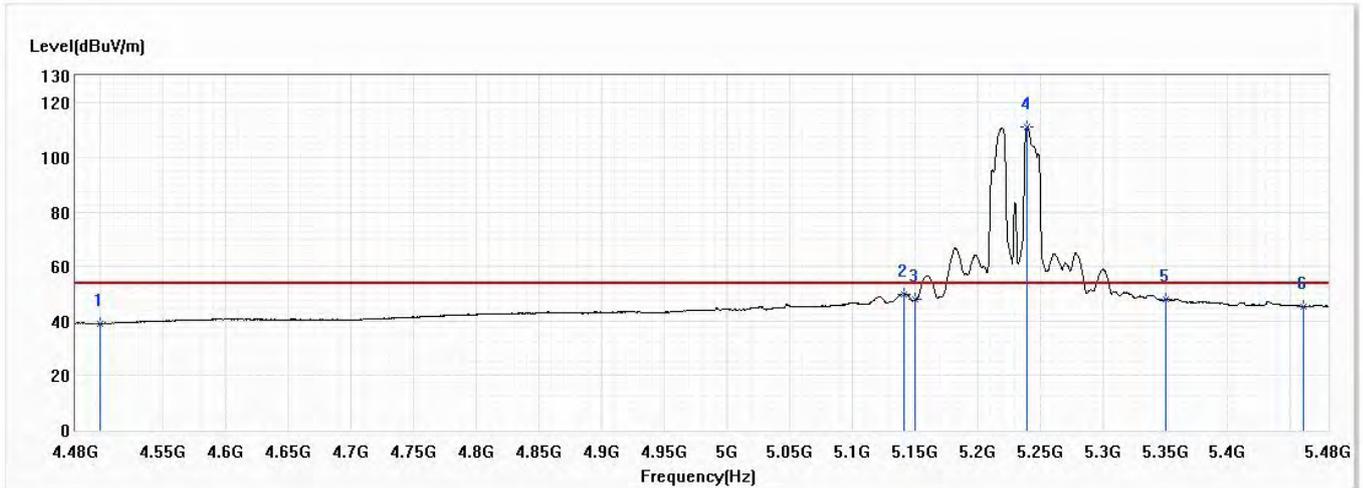


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.08	54.00	-14.92	18.84	20.24	AV
2	5141.000	49.96	54.00	-4.04	27.45	22.51	AV
3	5150.000	47.87	54.00	-6.13	25.36	22.51	AV
! 4	5240.000	111.38	54.00	57.38	88.78	22.60	AV
5	5350.000	47.81	54.00	-6.19	25.11	22.70	AV
6	5460.000	45.40	54.00	-8.60	22.59	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch42,5.21G,BW80M	Humidity (%RH)	58.0

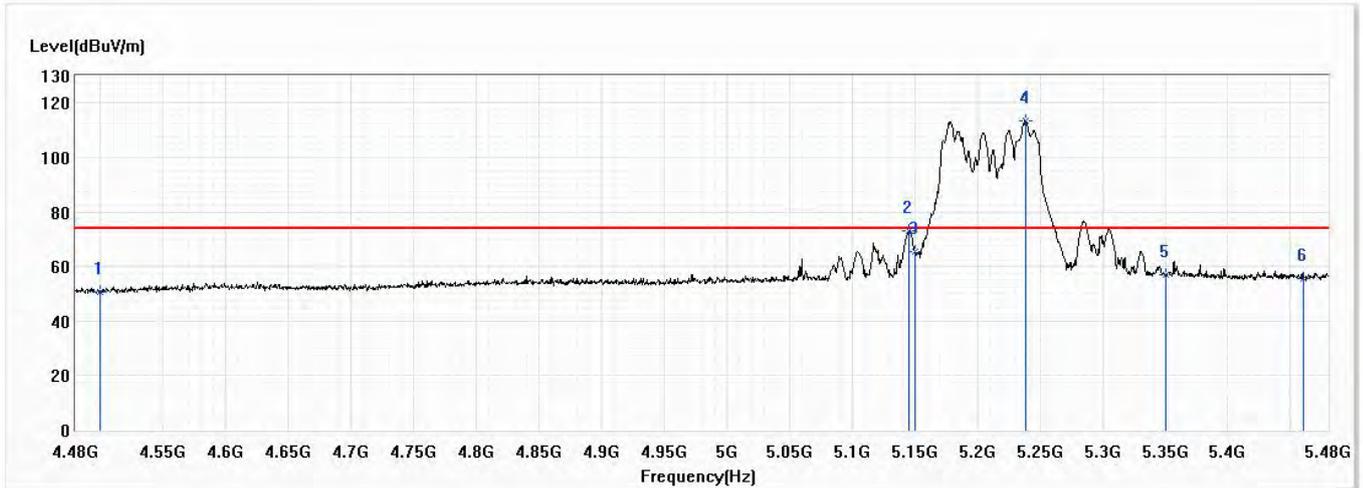


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.83	74.00	-23.17	30.59	20.24	PK
2	5145.500	73.07	74.00	-0.93	50.56	22.51	PK
3	5150.000	65.23	74.00	-8.77	42.72	22.51	PK
! 4	5238.500	113.20	74.00	39.20	90.61	22.59	PK
5	5350.000	57.01	74.00	-16.99	34.31	22.70	PK
6	5460.000	55.79	74.00	-18.21	32.98	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch42,5.21G,BW80M	Humidity (%RH)	58.0

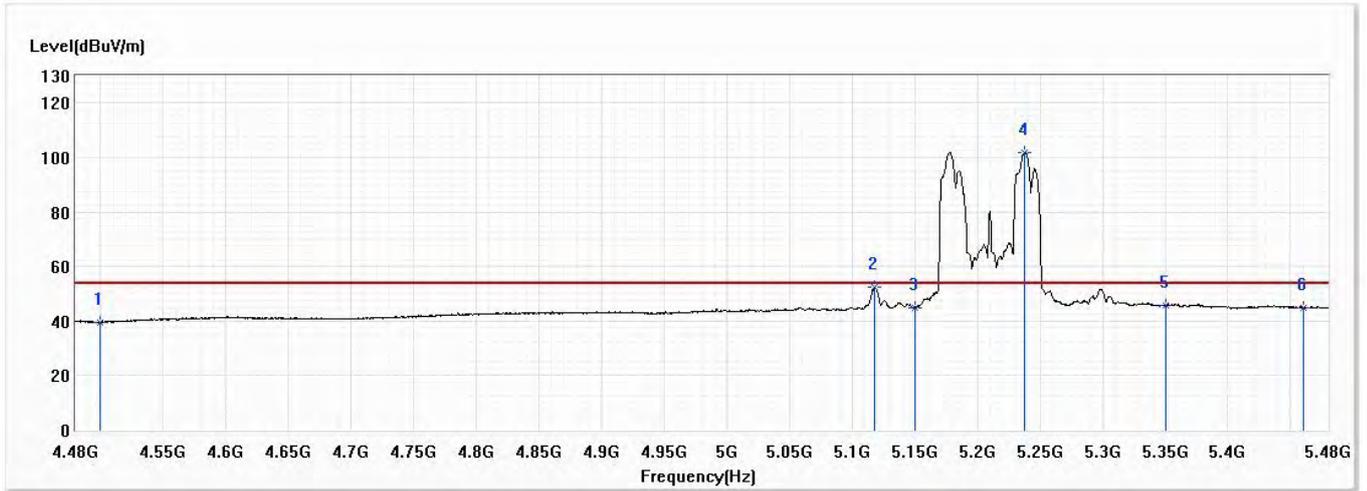


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.65	54.00	-14.35	19.41	20.24	AV
2	5118.000	52.27	54.00	-1.73	29.78	22.49	AV
3	5150.000	44.96	54.00	-9.04	22.45	22.51	AV
! 4	5238.000	101.93	54.00	47.93	79.34	22.59	AV
5	5350.000	45.86	54.00	-8.14	23.16	22.70	AV
6	5460.000	44.99	54.00	-9.01	22.18	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch42,5.21G,BW80M	Humidity (%RH)	58.0

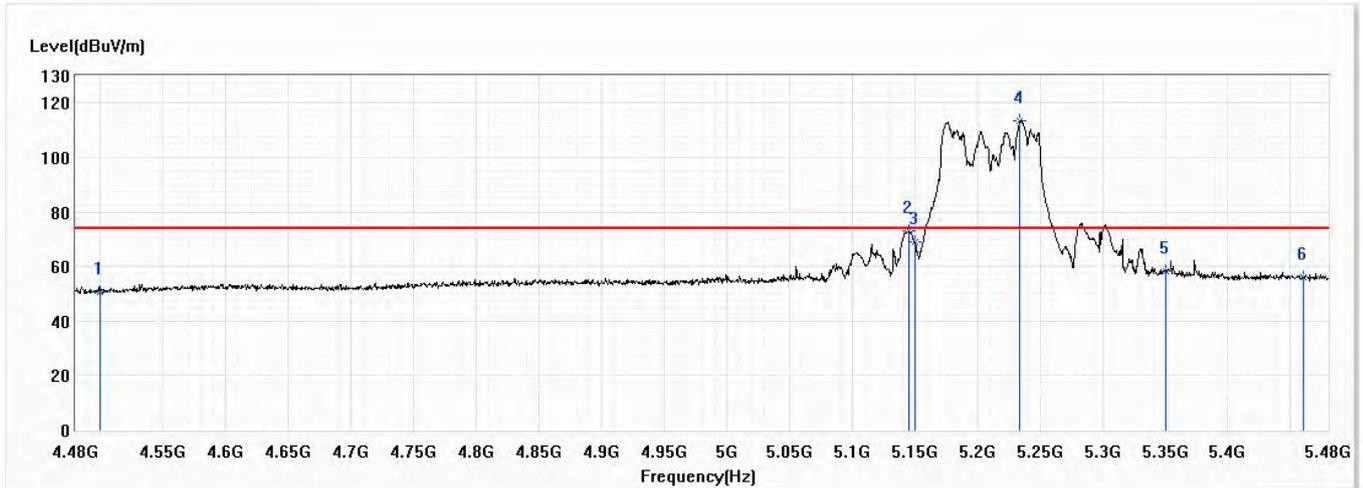


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.75	74.00	-23.25	30.51	20.24	PK
2	5145.500	73.02	74.00	-0.98	50.51	22.51	PK
3	5150.000	68.91	74.00	-5.09	46.40	22.51	PK
! 4	5234.000	113.53	74.00	39.53	90.95	22.58	PK
5	5350.000	58.08	74.00	-15.92	35.38	22.70	PK
6	5460.000	56.25	74.00	-17.75	33.44	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch42,5.21G,BW80M	Humidity (%RH)	58.0

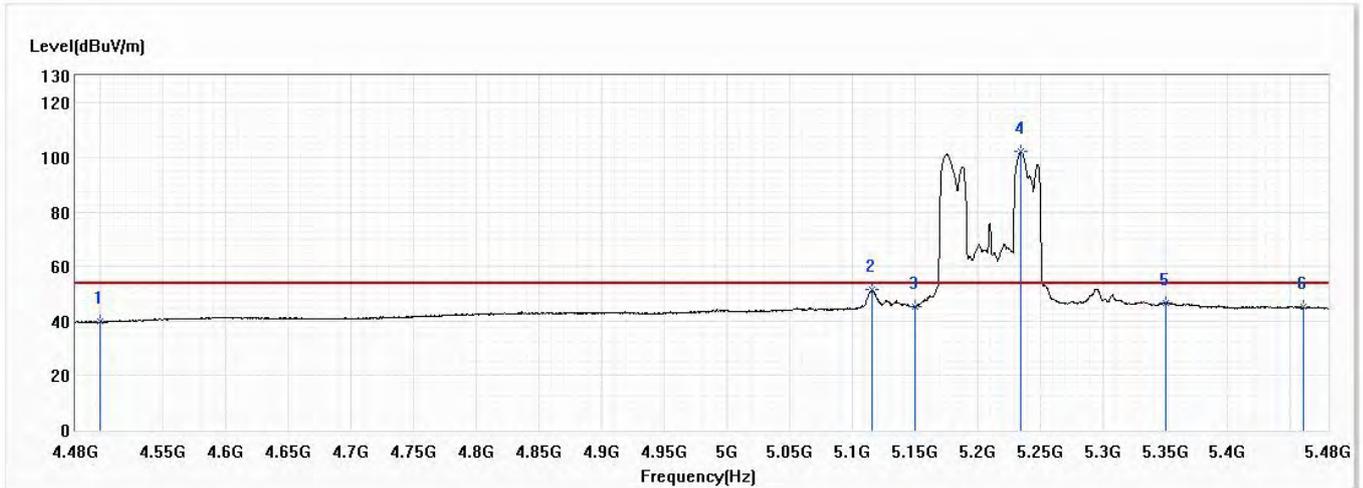


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.72	54.00	-14.28	19.48	20.24	AV
2	5115.500	51.36	54.00	-2.64	28.87	22.49	AV
3	5150.000	45.19	54.00	-8.81	22.68	22.51	AV
! 4	5235.000	102.24	54.00	48.24	79.66	22.58	AV
5	5350.000	46.66	54.00	-7.34	23.96	22.70	AV
6	5460.000	45.06	54.00	-8.94	22.25	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch149,5.745G,BW20M	Humidity (%RH)	58.0

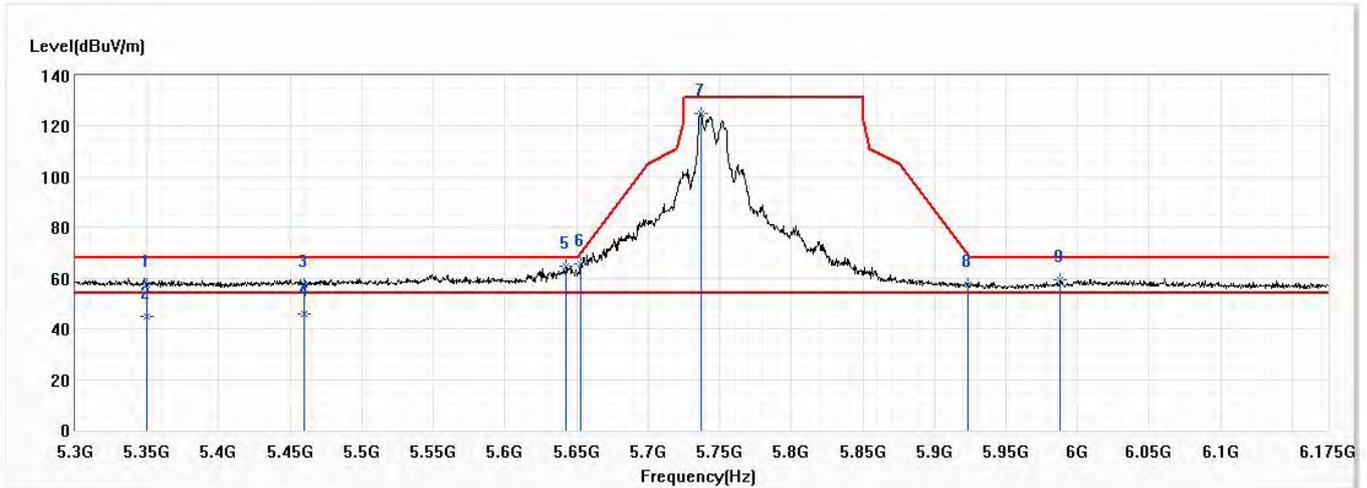


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.25	68.20	-10.95	34.55	22.70	PK
2	5350.000	44.66	54.00	-9.34	21.96	22.70	AV
3	5460.000	57.48	68.20	-10.72	34.67	22.81	PK
4	5460.000	45.69	54.00	-8.31	22.88	22.81	AV
* 5	5643.000	64.73	68.20	-3.47	41.31	23.42	PK
6	5653.063	65.43	70.48	-5.05	41.98	23.45	PK
7	5737.063	125.14	131.20	-6.06	101.36	23.78	PK
8	5923.000	57.58	69.67	-12.09	33.22	24.36	PK
9	5988.188	59.51	68.20	-8.69	34.95	24.56	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch149,5.745G,BW20M	Humidity (%RH)	58.0

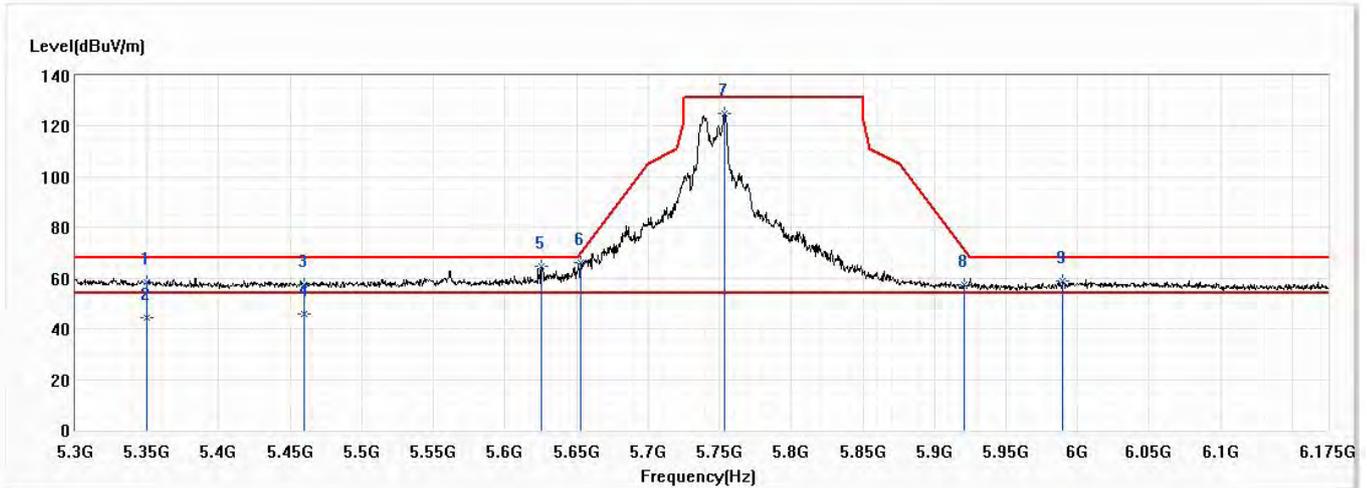


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.25	68.20	-9.95	35.55	22.70	PK
2	5350.000	44.65	54.00	-9.35	21.95	22.70	AV
3	5460.000	57.31	68.20	-10.89	34.50	22.81	PK
4	5460.000	45.68	54.00	-8.32	22.87	22.81	AV
* 5	5625.500	64.61	68.20	-3.59	41.25	23.36	PK
6	5653.063	66.08	70.48	-4.39	42.63	23.45	PK
7	5753.250	124.92	131.20	-6.28	101.08	23.84	PK
8	5921.250	57.33	70.96	-13.64	32.97	24.36	PK
9	5989.938	59.07	68.20	-9.13	34.49	24.58	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,CCh157,5.785G,BW20M	Humidity (%RH)	58.0

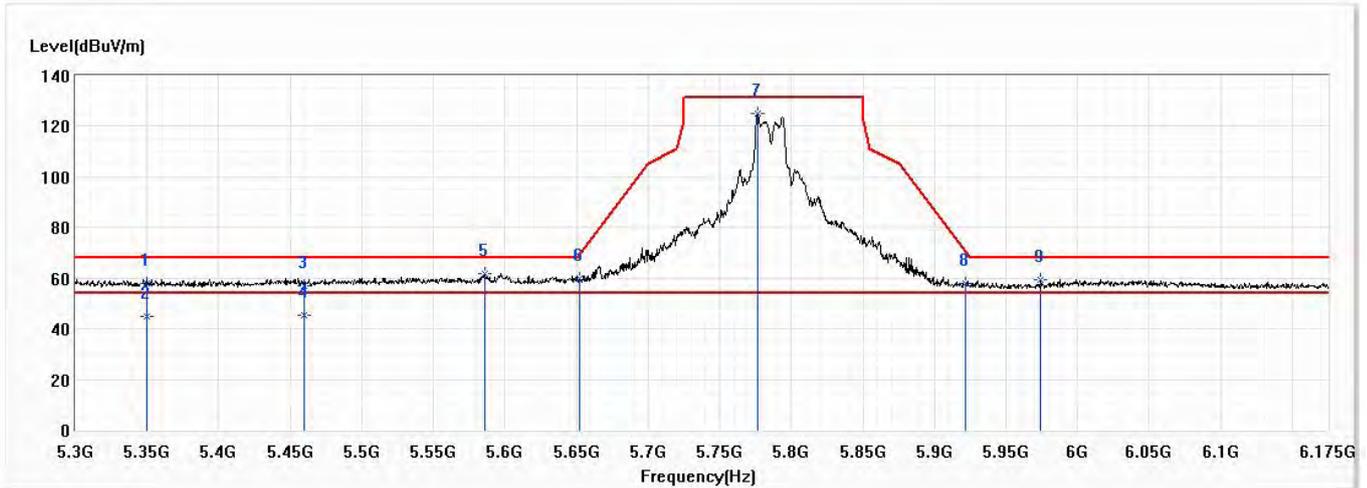


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.77	68.20	-10.43	35.07	22.70	PK
2	5350.000	44.78	54.00	-9.22	22.08	22.70	AV
3	5460.000	57.03	68.20	-11.17	34.22	22.81	PK
4	5460.000	45.47	54.00	-8.53	22.66	22.81	AV
5	5585.688	61.72	68.20	-6.48	38.53	23.19	PK
6	5652.188	59.82	69.83	-10.01	36.37	23.45	PK
* 7	5776.438	125.22	131.20	-5.98	101.29	23.93	PK
8	5921.688	58.05	70.64	-12.59	33.69	24.36	PK
9	5974.188	59.33	68.20	-8.87	34.82	24.51	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,CCh157,5.785G,BW20M	Humidity (%RH)	58.0

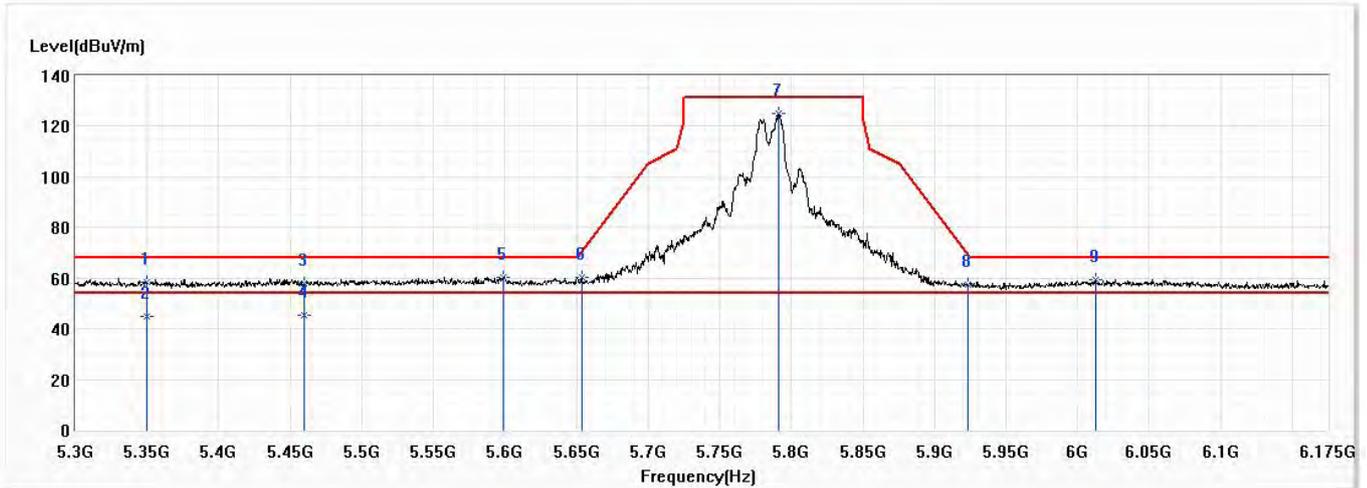


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.31	68.20	-9.89	35.61	22.70	PK
2	5350.000	44.69	54.00	-9.31	21.99	22.70	AV
3	5460.000	57.98	68.20	-10.22	35.17	22.81	PK
4	5460.000	45.61	54.00	-8.39	22.80	22.81	AV
5	5599.250	60.49	68.20	-7.71	37.24	23.25	PK
6	5653.500	60.29	70.80	-10.51	36.84	23.45	PK
* 7	5791.313	124.84	131.20	-6.36	100.87	23.97	PK
8	5923.438	57.59	69.35	-11.76	33.23	24.36	PK
9	6012.688	59.15	68.20	-9.05	34.50	24.65	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch165,5.825G,BW20M	Humidity (%RH)	58.0

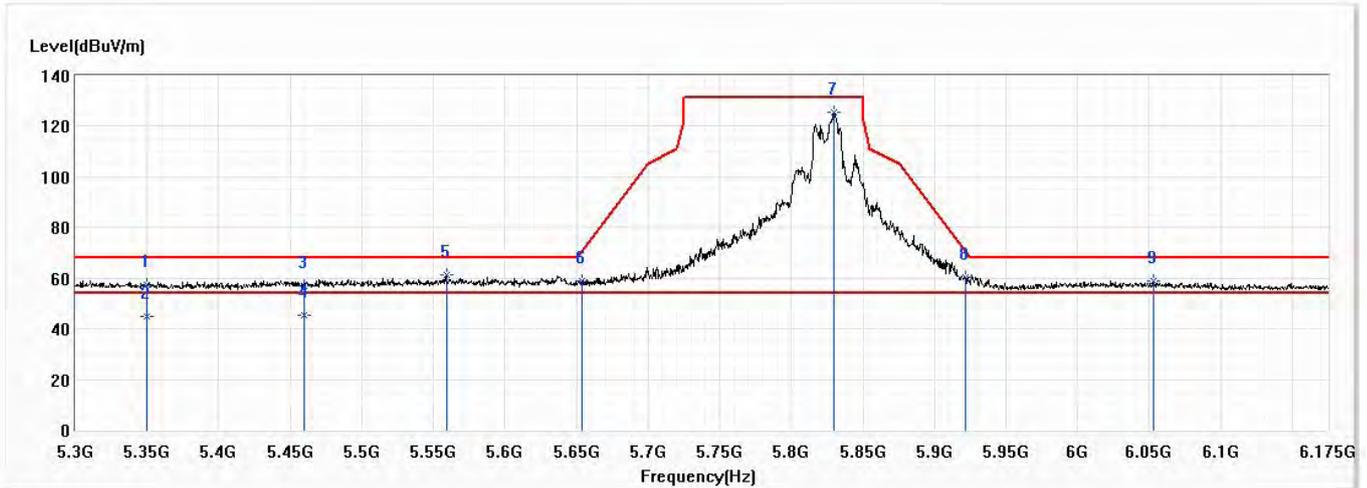


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.52	68.20	-10.68	34.82	22.70	PK
2	5350.000	44.73	54.00	-9.27	22.03	22.70	AV
3	5460.000	57.20	68.20	-11.00	34.39	22.81	PK
4	5460.000	45.58	54.00	-8.42	22.77	22.81	AV
5	5559.000	61.23	68.20	-6.97	38.15	23.08	PK
6	5653.938	59.10	71.13	-12.02	35.63	23.47	PK
* 7	5829.813	125.29	131.20	-5.91	101.21	24.08	PK
8	5921.688	60.17	70.64	-10.48	35.81	24.36	PK
9	6052.938	59.10	68.20	-9.10	34.31	24.79	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch165,5.825G,BW20M	Humidity (%RH)	58.0

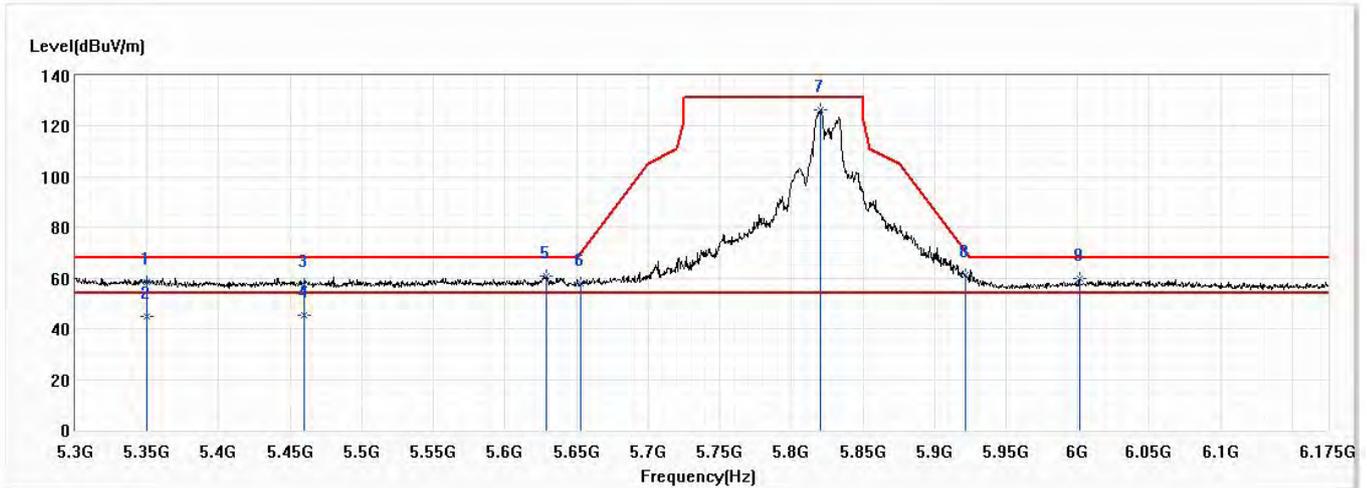


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.27	68.20	-9.93	35.57	22.70	PK
2	5350.000	44.78	54.00	-9.22	22.08	22.70	AV
3	5460.000	57.64	68.20	-10.56	34.83	22.81	PK
4	5460.000	45.62	54.00	-8.38	22.81	22.81	AV
5	5628.563	60.98	68.20	-7.22	37.62	23.36	PK
6	5653.063	58.11	70.48	-12.37	34.66	23.45	PK
* 7	5820.625	126.34	131.20	-4.86	102.28	24.06	PK
8	5921.688	61.39	70.64	-9.25	37.03	24.36	PK
9	6001.313	59.76	68.20	-8.44	35.16	24.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch151,5.755G,BW40M	Humidity (%RH)	58.0

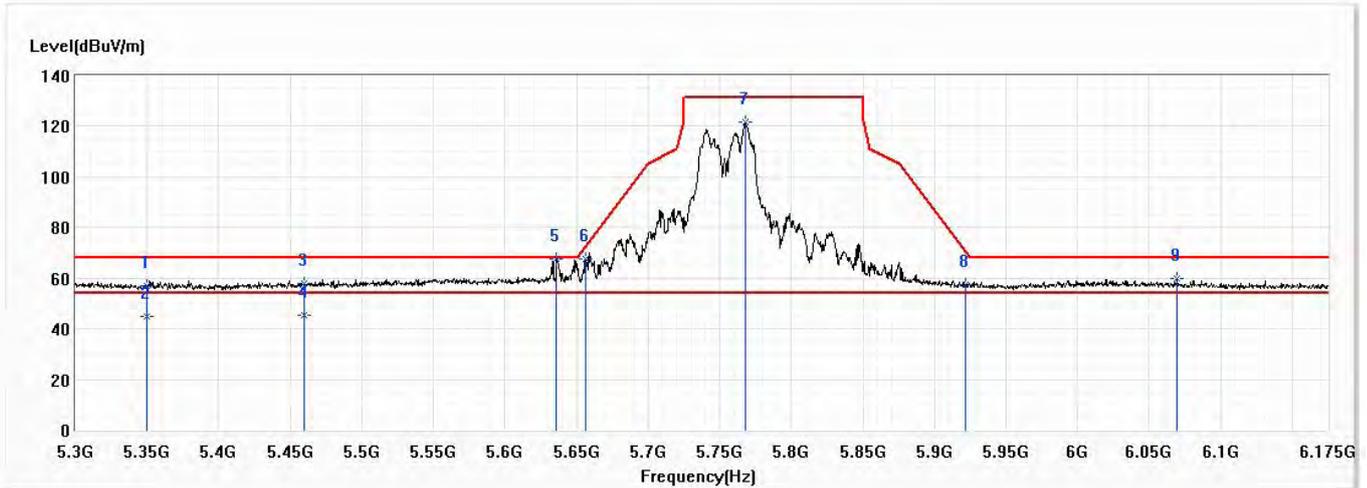


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.10	68.20	-11.10	34.40	22.70	PK
2	5350.000	44.68	54.00	-9.32	21.98	22.70	AV
3	5460.000	57.77	68.20	-10.43	34.96	22.81	PK
4	5460.000	45.58	54.00	-8.42	22.77	22.81	AV
* 5	5636.000	67.78	68.20	-0.42	44.39	23.39	PK
6	5656.125	67.81	72.75	-4.94	44.34	23.47	PK
7	5767.688	121.47	131.20	-9.73	97.59	23.88	PK
8	5921.688	57.65	70.64	-13.00	33.29	24.36	PK
9	6069.563	59.64	68.20	-8.56	34.79	24.85	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch151,5.755G,BW40M	Humidity (%RH)	58.0

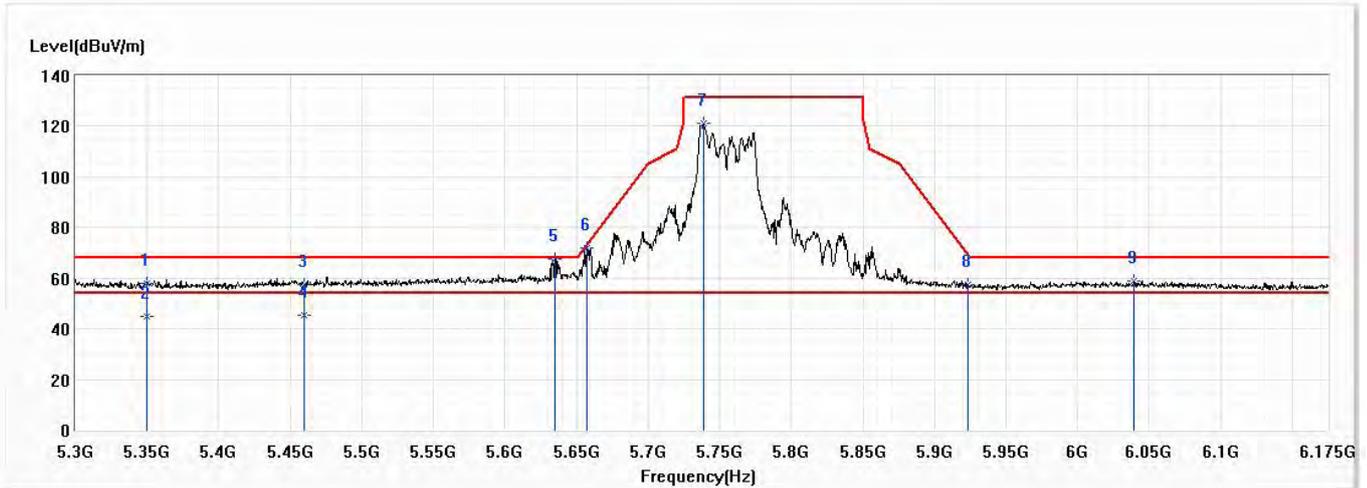


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.97	68.20	-10.23	35.27	22.70	PK
2	5350.000	44.76	54.00	-9.24	22.06	22.70	AV
3	5460.000	57.40	68.20	-10.80	34.59	22.81	PK
4	5460.000	45.39	54.00	-8.61	22.58	22.81	AV
* 5	5634.688	67.81	68.20	-0.39	44.42	23.39	PK
6	5657.438	71.85	73.72	-1.88	48.38	23.47	PK
7	5738.375	121.26	131.20	-9.94	97.47	23.79	PK
8	5923.000	57.50	69.67	-12.18	33.14	24.36	PK
9	6039.375	59.02	68.20	-9.18	34.28	24.74	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch159,5.795G,BW40M	Humidity (%RH)	58.0

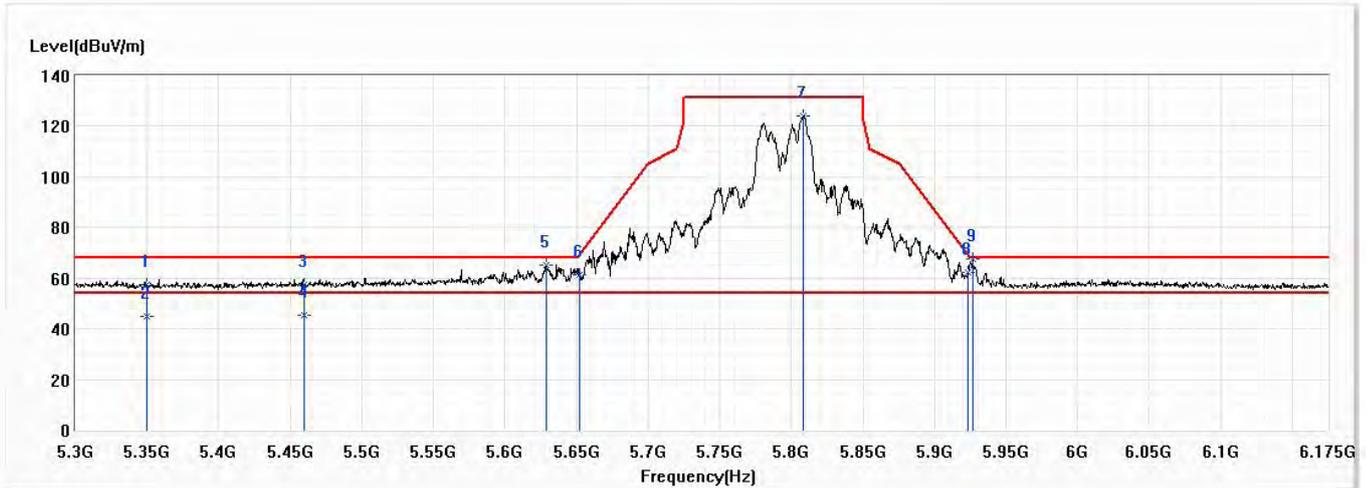


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.27	68.20	-10.93	34.57	22.70	PK
2	5350.000	44.73	54.00	-9.27	22.03	22.70	AV
3	5460.000	57.38	68.20	-10.82	34.57	22.81	PK
4	5460.000	45.55	54.00	-8.45	22.74	22.81	AV
5	5629.000	65.11	68.20	-3.09	41.75	23.36	PK
6	5652.188	61.50	69.83	-8.33	38.05	23.45	PK
7	5808.375	124.05	131.20	-7.15	100.04	24.01	PK
8	5923.438	62.51	69.35	-6.84	38.15	24.36	PK
* 9	5926.500	67.82	68.20	-0.38	43.44	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch159,5.795G,BW40M	Humidity (%RH)	58.0

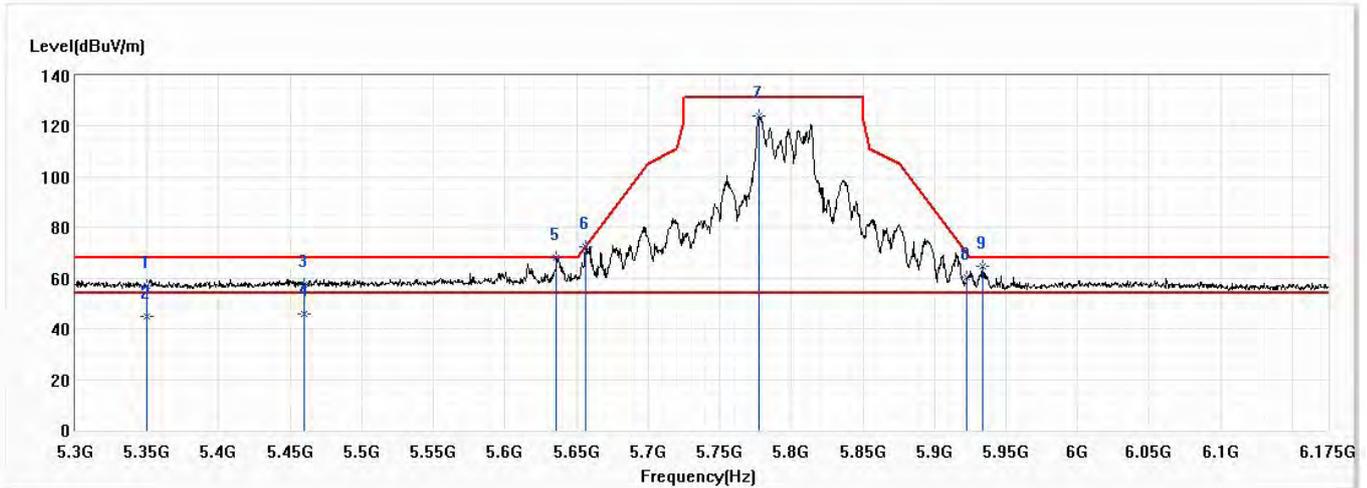


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.78	68.20	-11.42	34.08	22.70	PK
2	5350.000	44.67	54.00	-9.33	21.97	22.70	AV
3	5460.000	57.47	68.20	-10.73	34.66	22.81	PK
4	5460.000	45.68	54.00	-8.32	22.87	22.81	AV
* 5	5636.000	67.90	68.20	-0.30	44.51	23.39	PK
6	5656.125	72.20	72.75	-0.55	48.73	23.47	PK
7	5777.750	124.25	131.20	-6.95	100.32	23.93	PK
8	5922.563	60.48	70.00	-9.52	36.12	24.36	PK
9	5933.500	64.74	68.20	-3.46	40.34	24.40	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	21.0
Test Condition	802.11ax,Ch155,5.775G,BW80M	Humidity (%RH)	58.0

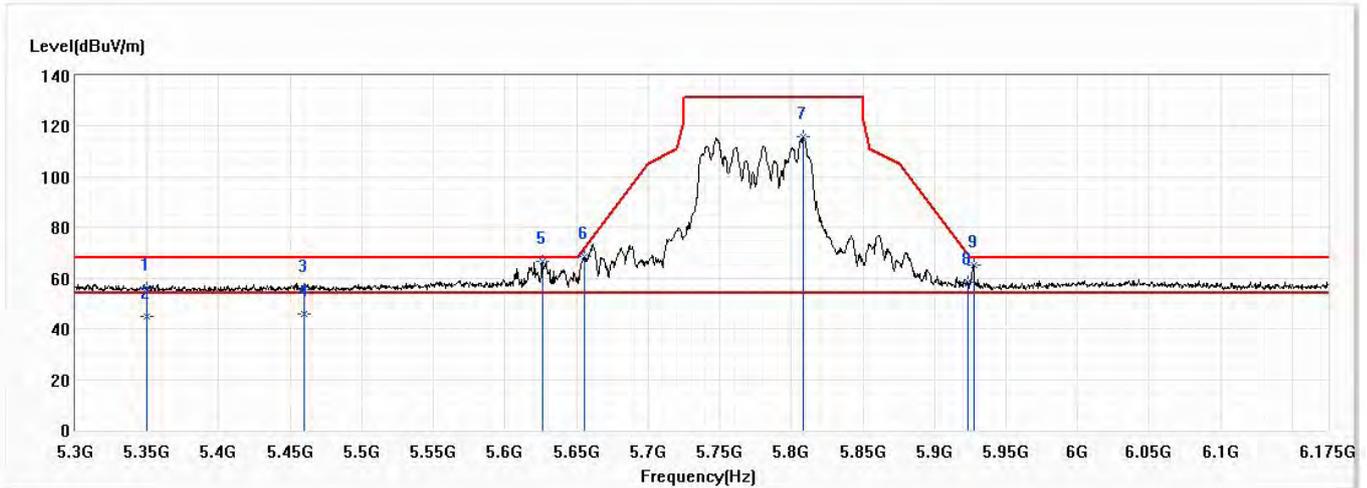


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.99	68.20	-12.21	33.29	22.70	PK
2	5350.000	44.79	54.00	-9.21	22.09	22.70	AV
3	5460.000	55.30	68.20	-12.90	32.49	22.81	PK
4	5460.000	45.72	54.00	-8.28	22.91	22.81	AV
* 5	5625.938	66.59	68.20	-1.61	43.23	23.36	PK
6	5655.250	68.34	72.10	-3.76	44.87	23.47	PK
7	5807.938	115.81	131.20	-15.39	91.80	24.01	PK
8	5923.000	58.24	69.67	-11.43	33.88	24.36	PK
9	5927.375	65.04	68.20	-3.16	40.66	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/13
Test Mode	Mode 2: Transmit RU Mode_Edge	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	21.0
Test Condition	802.11ax,Ch155,5.775G,BW80M	Humidity (%RH)	58.0

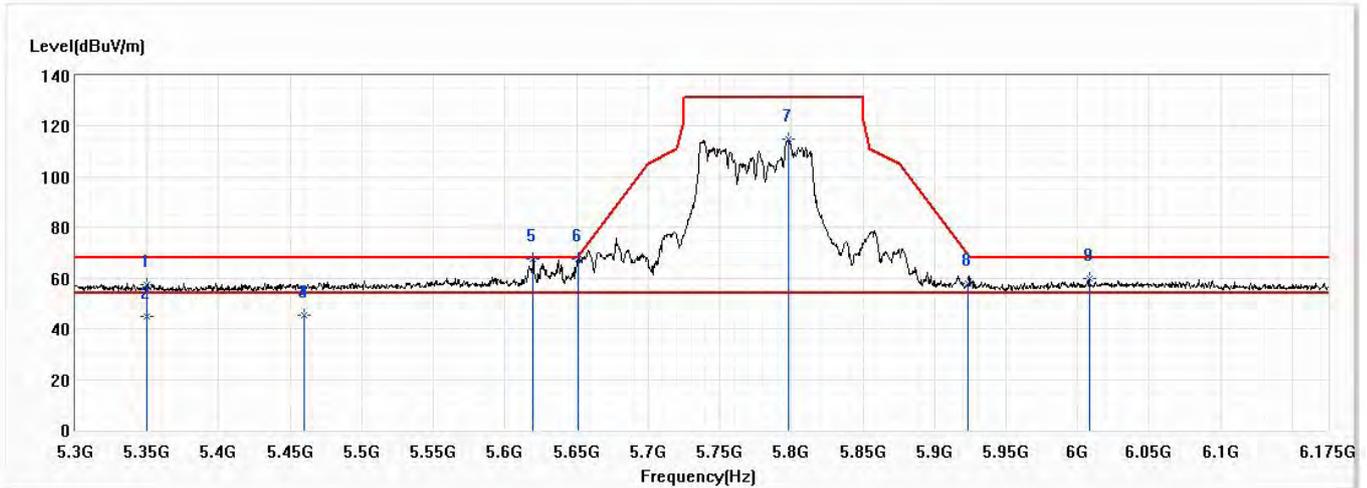


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.59	68.20	-10.61	34.89	22.70	PK
2	5350.000	44.82	54.00	-9.18	22.12	22.70	AV
3	5460.000	45.38	54.00	-8.62	22.57	22.81	AV
4	5460.000	45.54	54.00	-8.46	22.73	22.81	AV
* 5	5619.813	67.57	68.20	-0.63	44.24	23.33	PK
6	5651.313	67.68	69.18	-1.49	44.23	23.45	PK
7	5798.313	115.07	131.20	-16.13	91.08	23.99	PK
8	5923.000	57.90	69.67	-11.78	33.54	24.36	PK
9	6008.313	59.71	68.20	-8.49	35.09	24.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch36,5.18G,BW20M	Humidity (%RH)	58.0

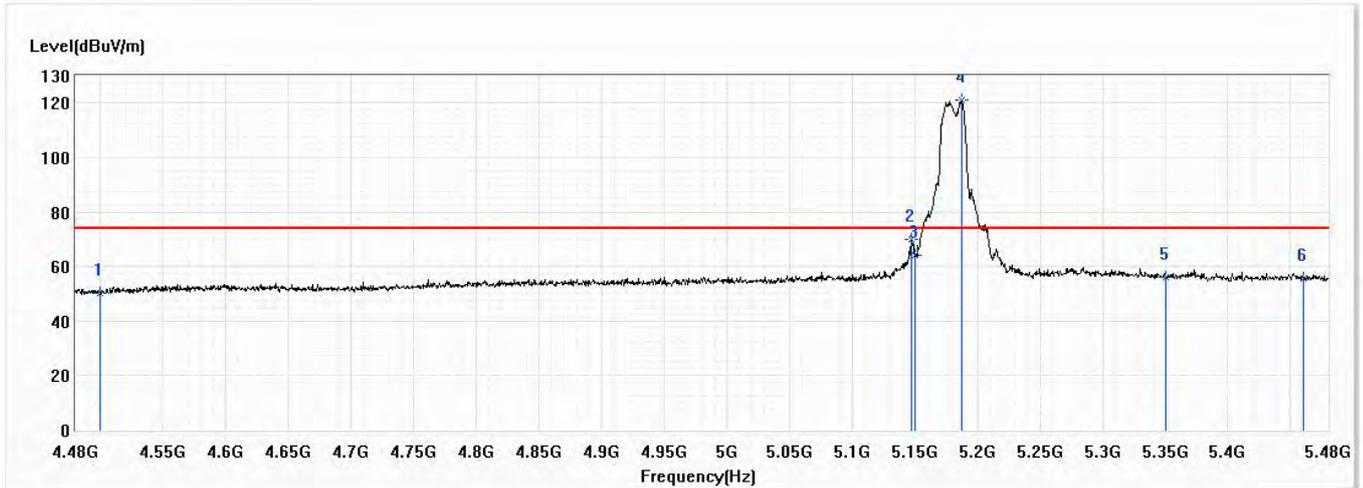


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.03	74.00	-23.97	29.79	20.24	PK
2	5147.500	69.89	74.00	-4.11	47.38	22.51	PK
3	5150.000	63.89	74.00	-10.11	41.38	22.51	PK
! 4	5188.000	120.95	74.00	46.95	98.40	22.55	PK
5	5350.000	56.23	74.00	-17.77	33.53	22.70	PK
6	5460.000	55.69	74.00	-18.31	32.88	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch36,5.18G,BW20M	Humidity (%RH)	58.0

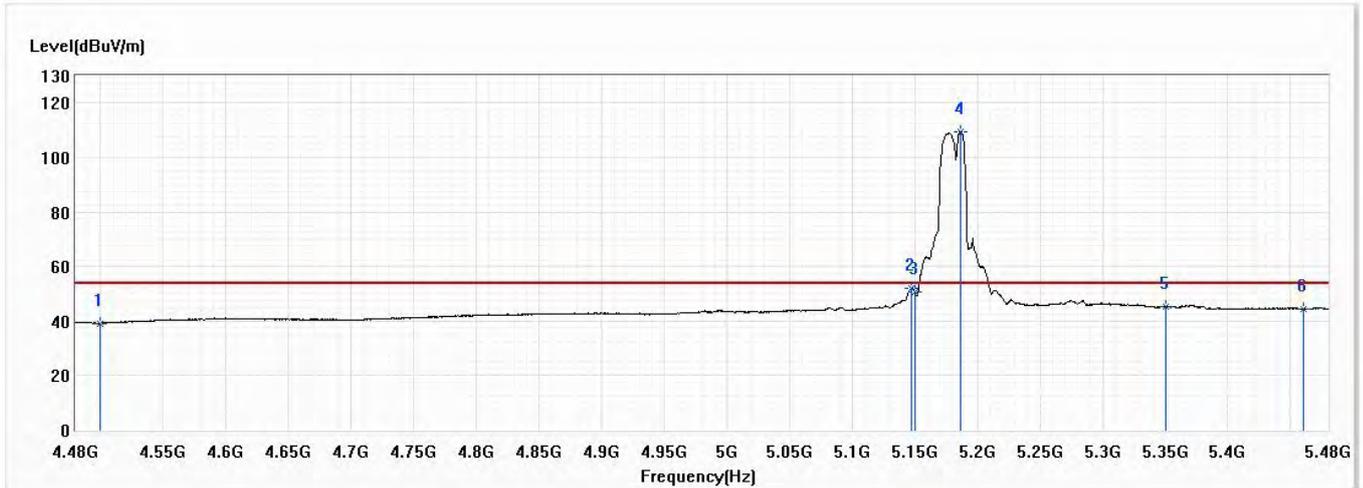


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.21	54.00	-14.79	18.97	20.24	AV
2	5147.000	52.00	54.00	-2.00	29.49	22.51	AV
3	5150.000	50.48	54.00	-3.52	27.97	22.51	AV
! 4	5187.000	109.50	54.00	55.50	86.96	22.54	AV
5	5350.000	45.21	54.00	-8.79	22.51	22.70	AV
6	5460.000	44.39	54.00	-9.61	21.58	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch36,5.18G,BW20M	Humidity (%RH)	58.0

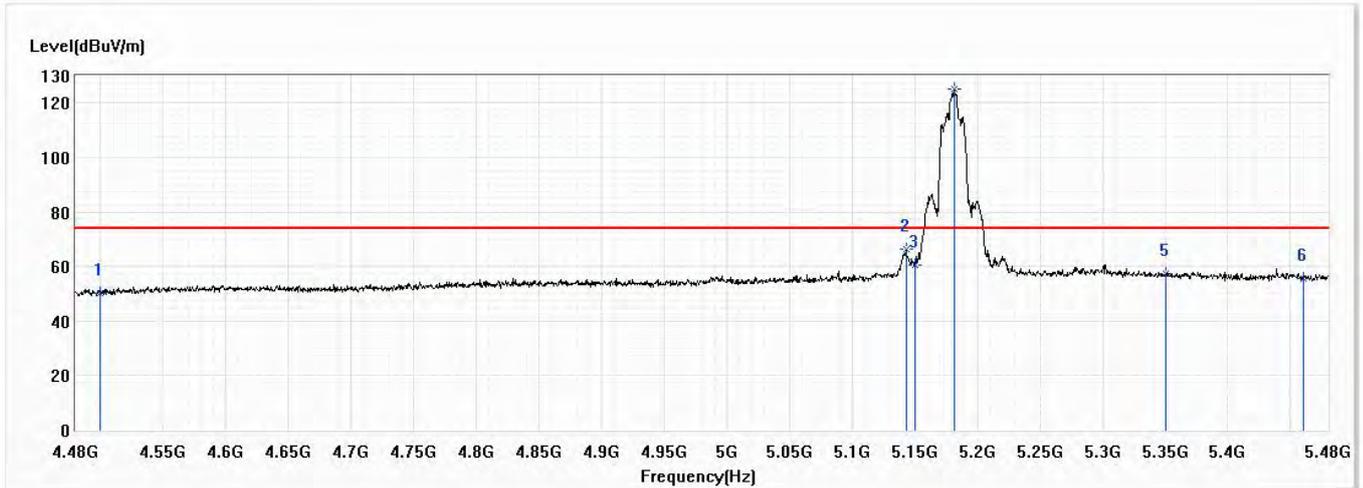


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.06	74.00	-23.94	29.82	20.24	PK
2	5143.000	66.47	74.00	-7.53	43.96	22.51	PK
3	5150.000	60.42	74.00	-13.58	37.91	22.51	PK
! 4	5181.500	124.91	74.00	50.91	102.37	22.54	PK
5	5350.000	57.39	74.00	-16.61	34.69	22.70	PK
6	5460.000	55.67	74.00	-18.33	32.86	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch36,5.18G,BW20M	Humidity (%RH)	58.0

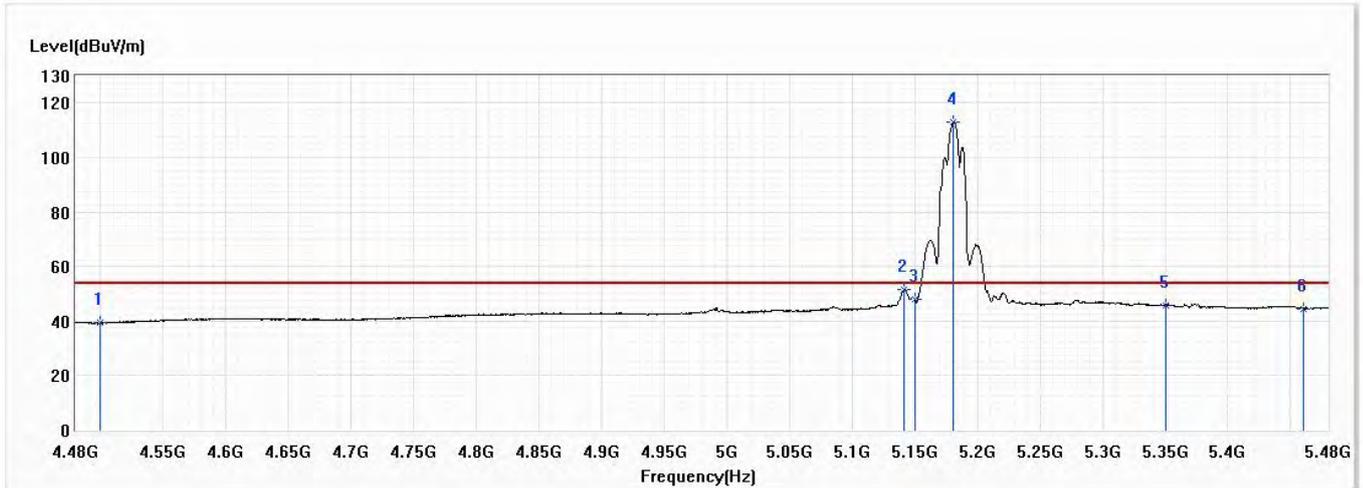


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.26	54.00	-14.74	19.02	20.24	AV
2	5141.500	51.55	54.00	-2.45	29.04	22.51	AV
3	5150.000	47.85	54.00	-6.15	25.34	22.51	AV
! 4	5181.000	112.96	54.00	58.96	90.42	22.54	AV
5	5350.000	45.88	54.00	-8.12	23.18	22.70	AV
6	5460.000	44.51	54.00	-9.49	21.70	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch44,5.22G,BW20M	Humidity (%RH)	58.0

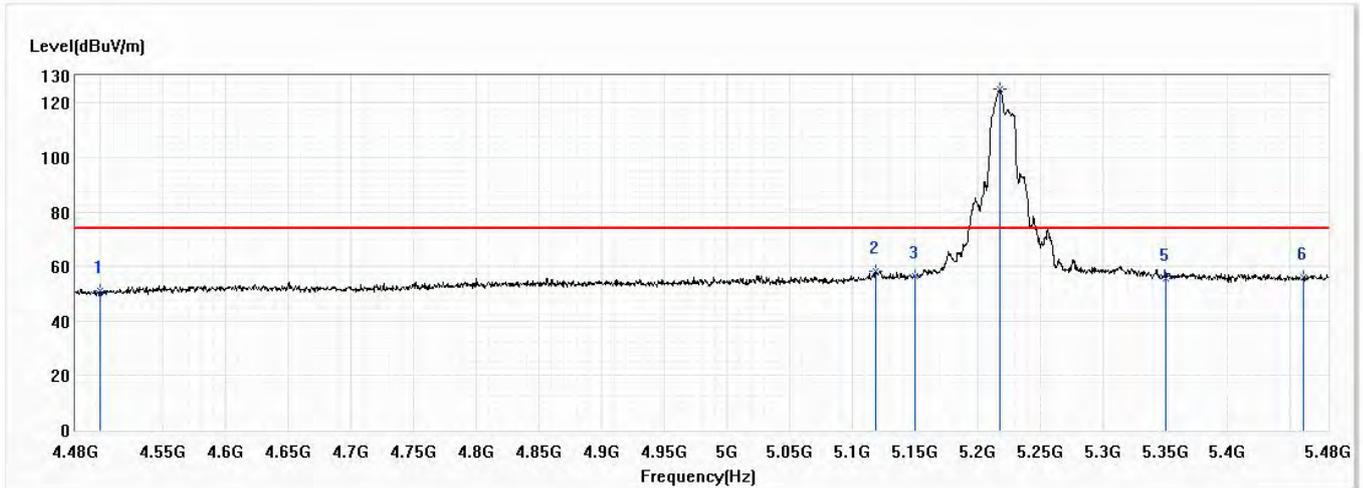


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.18	74.00	-22.82	30.94	20.24	PK
2	5119.000	58.30	74.00	-15.70	35.81	22.49	PK
3	5150.000	56.56	74.00	-17.44	34.05	22.51	PK
! 4	5217.500	125.01	74.00	51.01	102.44	22.57	PK
5	5350.000	55.51	74.00	-18.49	32.81	22.70	PK
6	5460.000	55.98	74.00	-18.02	33.17	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch44,5.22G,BW20M	Humidity (%RH)	58.0

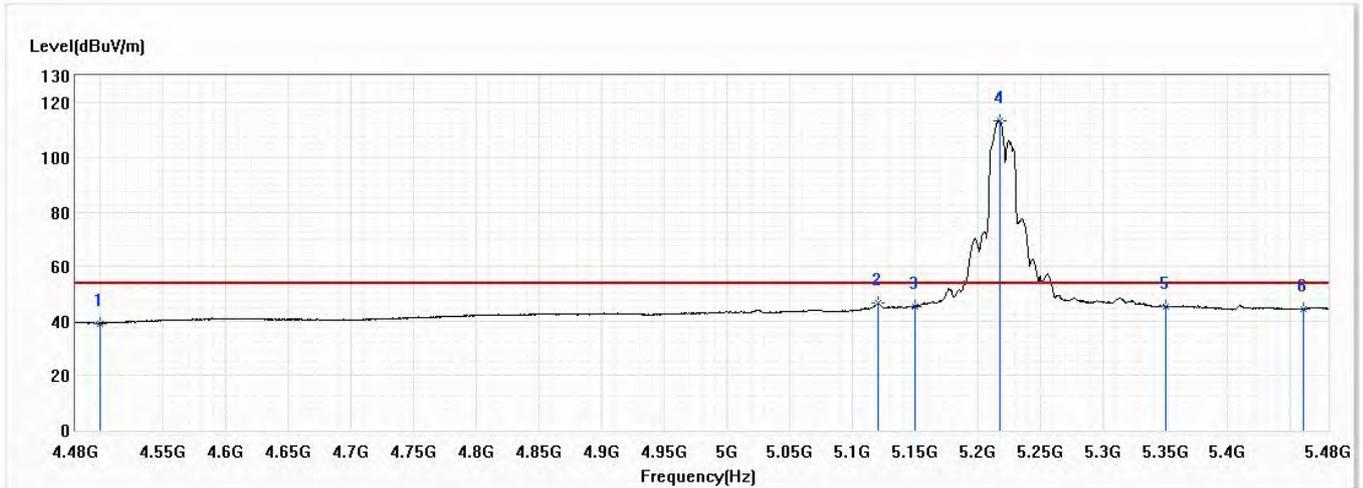


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.13	54.00	-14.87	18.89	20.24	AV
2	5120.500	46.43	54.00	-7.57	23.94	22.49	AV
3	5150.000	45.25	54.00	-8.75	22.74	22.51	AV
! 4	5217.500	113.59	54.00	59.59	91.02	22.57	AV
5	5350.000	45.42	54.00	-8.58	22.72	22.70	AV
6	5460.000	44.44	54.00	-9.56	21.63	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch44,5.22G,BW20M	Humidity (%RH)	58.0

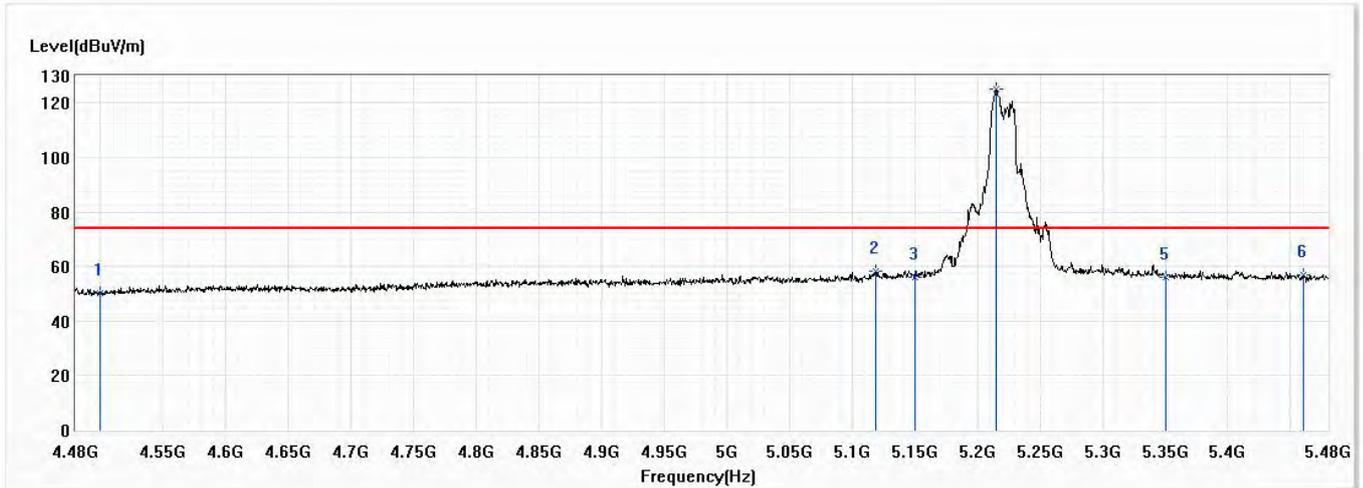


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.18	74.00	-23.82	29.94	20.24	PK
2	5119.000	58.35	74.00	-15.65	35.86	22.49	PK
3	5150.000	56.14	74.00	-17.86	33.63	22.51	PK
! 4	5215.000	125.28	74.00	51.28	102.71	22.57	PK
5	5350.000	56.23	74.00	-17.77	33.53	22.70	PK
6	5460.000	56.99	74.00	-17.01	34.18	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch44,5.22G,BW20M	Humidity (%RH)	58.0

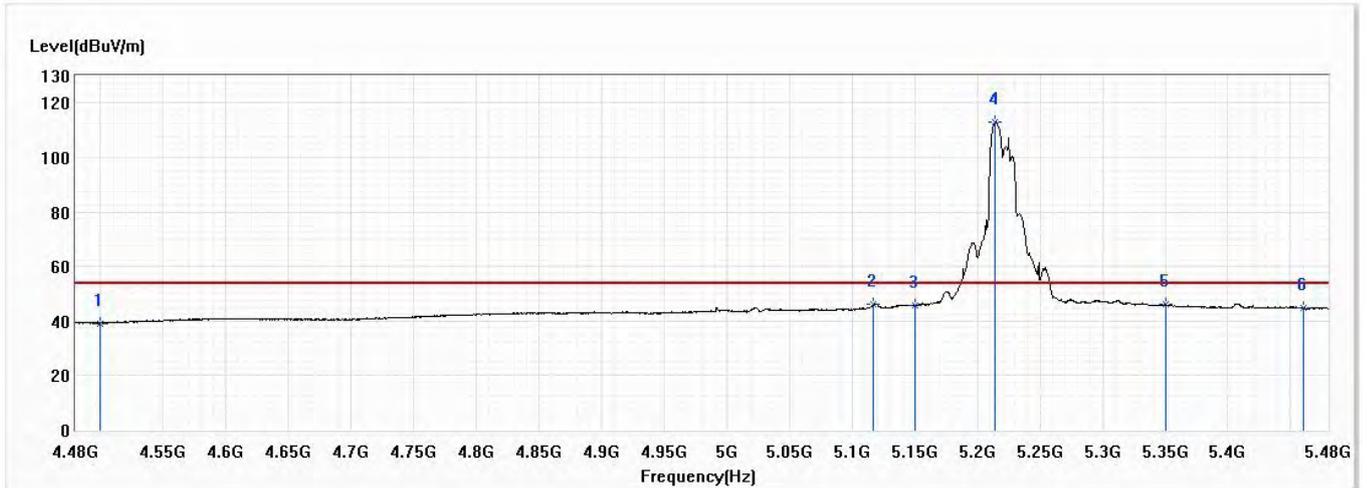


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.19	54.00	-14.81	18.95	20.24	AV
2	5117.000	46.02	54.00	-7.98	23.53	22.49	AV
3	5150.000	45.67	54.00	-8.33	23.16	22.51	AV
! 4	5214.500	113.17	54.00	59.17	90.60	22.57	AV
5	5350.000	45.97	54.00	-8.03	23.27	22.70	AV
6	5460.000	44.78	54.00	-9.22	21.97	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch48,5.24G,BW20M	Humidity (%RH)	58.0

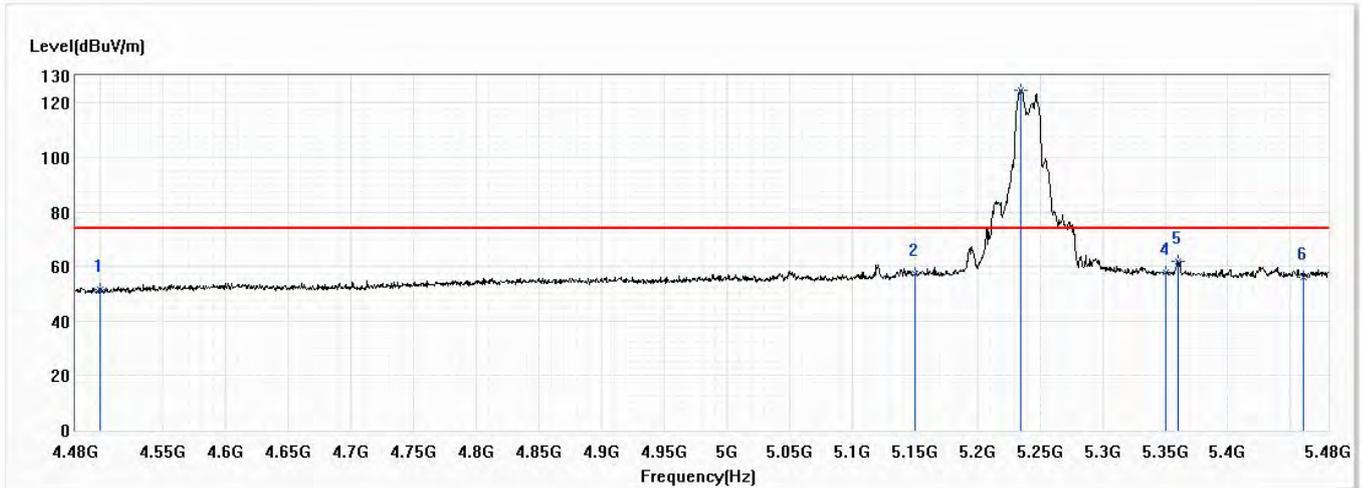


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.69	74.00	-22.31	31.45	20.24	PK
2	5150.000	57.51	74.00	-16.49	35.00	22.51	PK
! 3	5235.000	124.78	74.00	50.78	102.20	22.58	PK
4	5350.000	57.94	74.00	-16.06	35.24	22.70	PK
5	5360.000	62.03	74.00	-11.97	39.32	22.71	PK
6	5460.000	55.96	74.00	-18.04	33.15	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch48,5.24G,BW20M	Humidity (%RH)	58.0

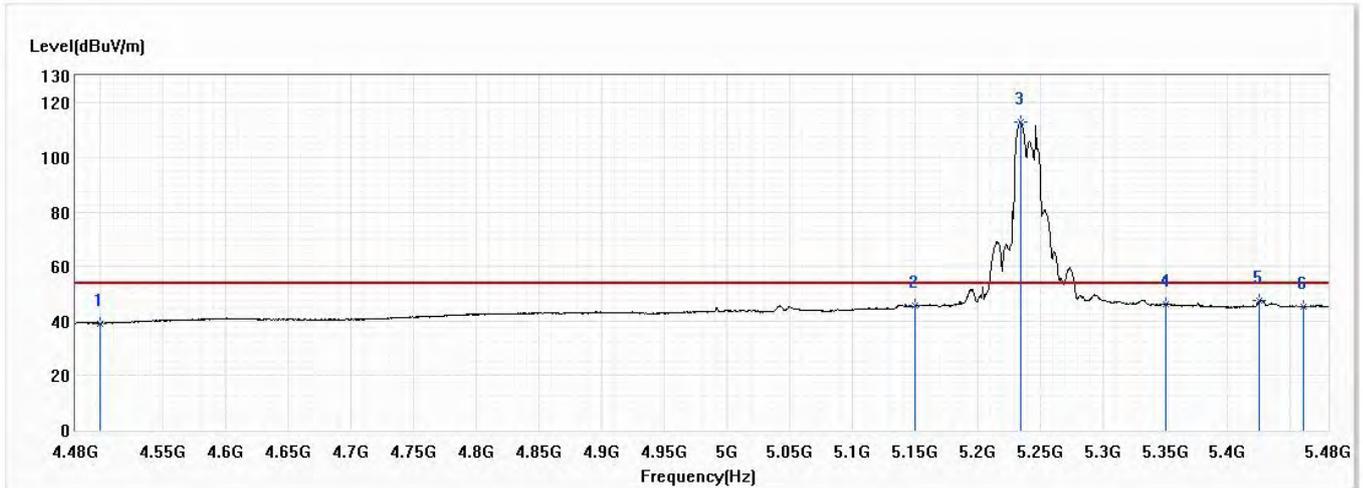


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.08	54.00	-14.92	18.84	20.24	AV
2	5150.000	45.58	54.00	-8.42	23.07	22.51	AV
! 3	5234.500	113.01	54.00	59.01	90.43	22.58	AV
4	5350.000	45.98	54.00	-8.02	23.28	22.70	AV
5	5425.500	47.46	54.00	-6.54	24.68	22.78	AV
6	5460.000	45.43	54.00	-8.57	22.62	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch48,5.24G,BW20M	Humidity (%RH)	58.0

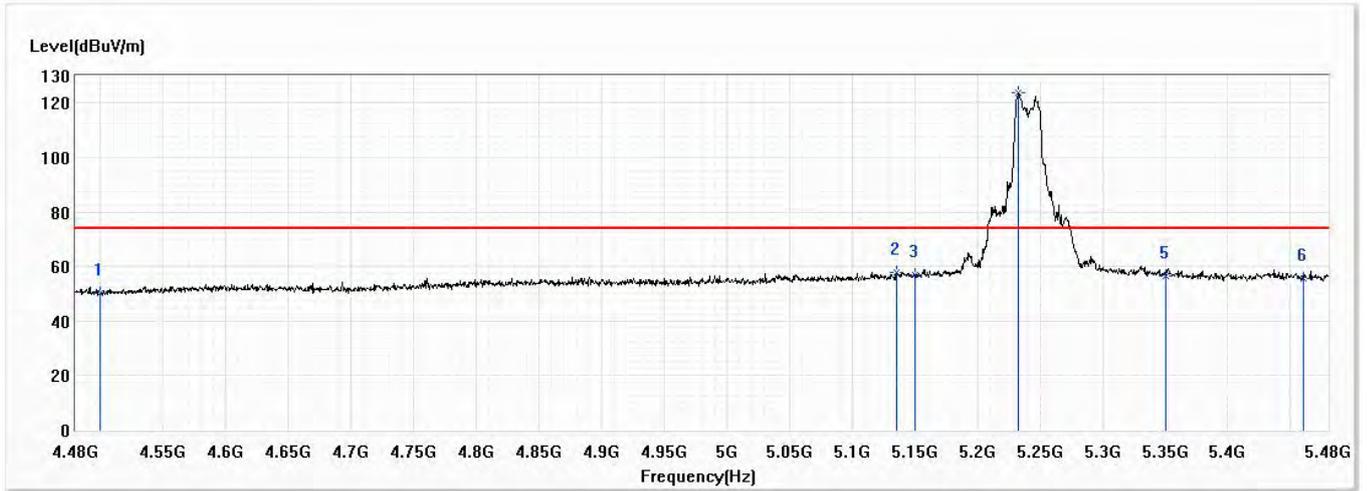


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.06	74.00	-23.94	29.82	20.24	PK
2	5136.000	57.95	74.00	-16.05	35.45	22.50	PK
3	5150.000	57.10	74.00	-16.90	34.59	22.51	PK
! 4	5233.000	123.67	74.00	49.67	101.09	22.58	PK
5	5350.000	56.69	74.00	-17.31	33.99	22.70	PK
6	5460.000	55.66	74.00	-18.34	32.85	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch48,5.24G,BW20M	Humidity (%RH)	58.0

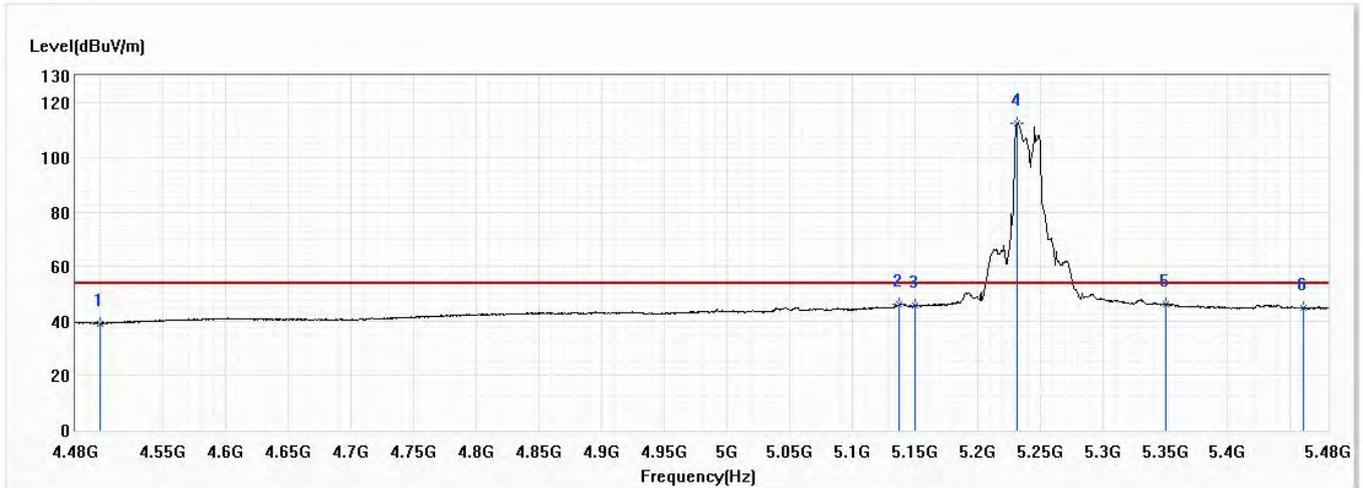


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.12	54.00	-14.88	18.88	20.24	AV
2	5137.500	46.08	54.00	-7.92	23.58	22.50	AV
3	5150.000	45.60	54.00	-8.40	23.09	22.51	AV
! 4	5232.000	112.51	54.00	58.51	89.93	22.58	AV
5	5350.000	45.95	54.00	-8.05	23.25	22.70	AV
6	5460.000	44.71	54.00	-9.29	21.90	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch38,5.19G,BW40M	Humidity (%RH)	58.0

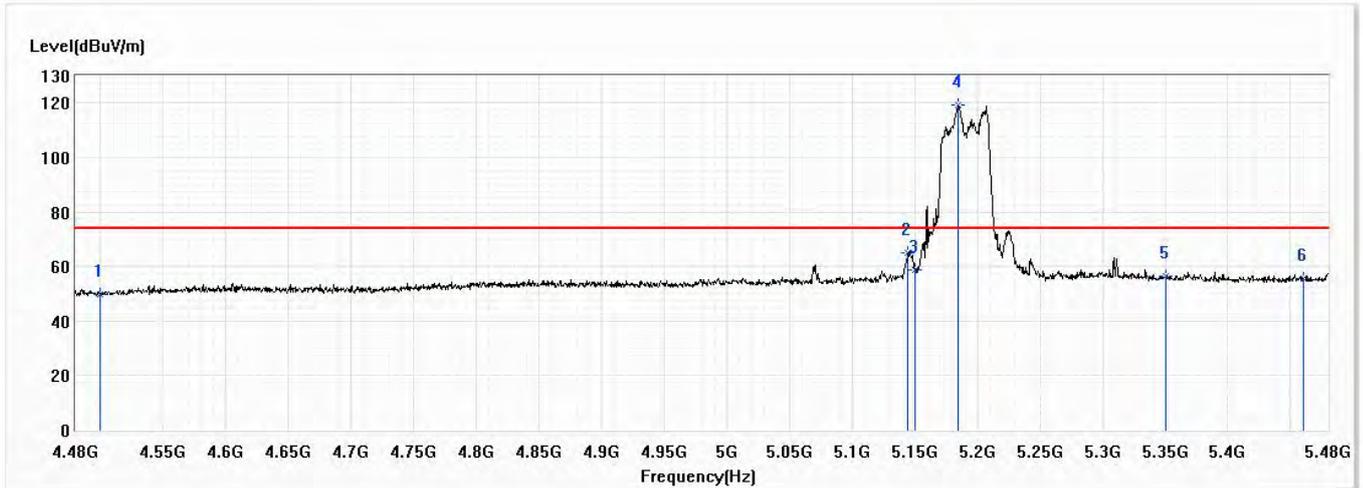


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.97	74.00	-24.03	29.73	20.24	PK
2	5144.500	65.00	74.00	-9.00	42.49	22.51	PK
3	5150.000	58.59	74.00	-15.41	36.08	22.51	PK
! 4	5185.000	119.09	74.00	45.09	96.55	22.54	PK
5	5350.000	56.45	74.00	-17.55	33.75	22.70	PK
6	5460.000	55.67	74.00	-18.33	32.86	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch38,5.19G,BW40M	Humidity (%RH)	58.0

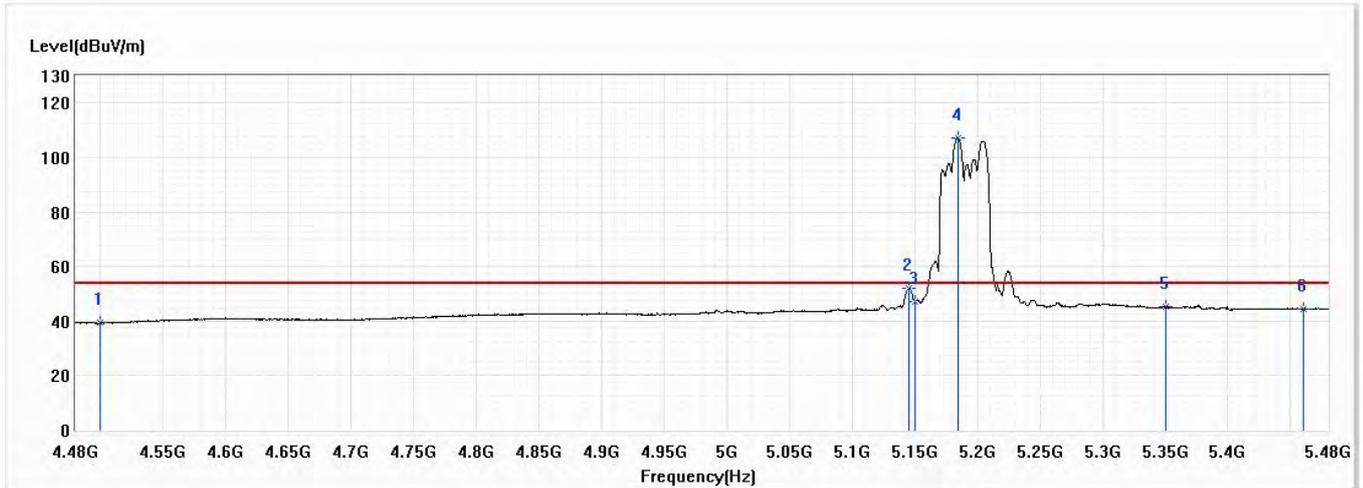


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.38	54.00	-14.62	19.14	20.24	AV
2	5145.500	51.99	54.00	-2.01	29.48	22.51	AV
3	5150.000	46.94	54.00	-7.06	24.43	22.51	AV
! 4	5184.500	107.33	54.00	53.33	84.79	22.54	AV
5	5350.000	45.10	54.00	-8.90	22.40	22.70	AV
6	5460.000	44.40	54.00	-9.60	21.59	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch38,5.19G,BW40M	Humidity (%RH)	58.0

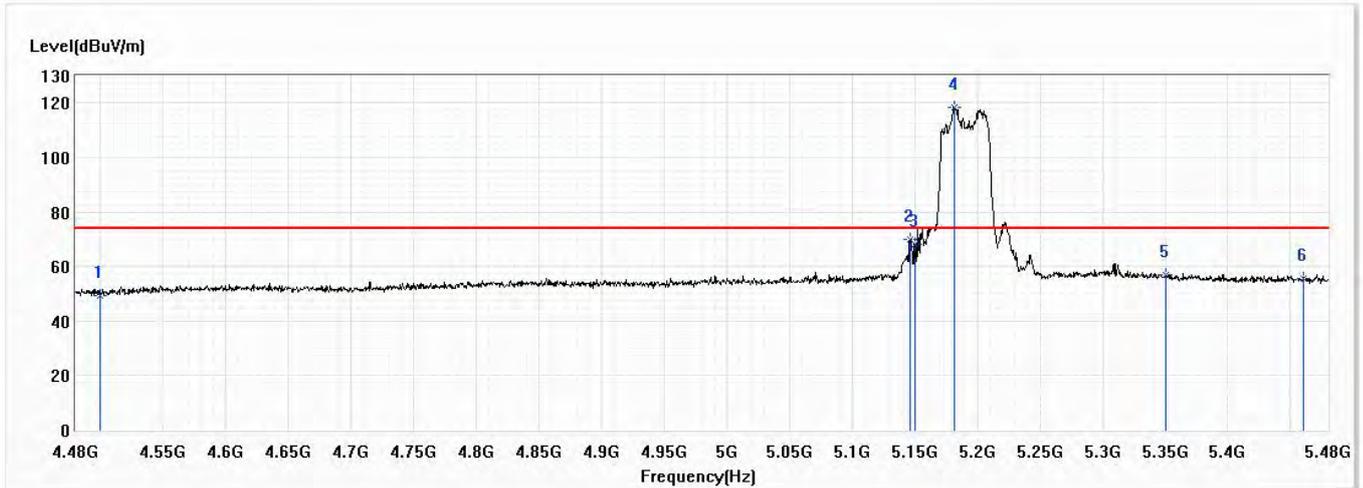


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.30	74.00	-24.70	29.06	20.24	PK
2	5146.000	70.05	74.00	-3.95	47.54	22.51	PK
3	5150.000	68.09	74.00	-5.91	45.58	22.51	PK
! 4	5181.500	118.27	74.00	44.27	95.73	22.54	PK
5	5350.000	57.12	74.00	-16.88	34.42	22.70	PK
6	5460.000	55.52	74.00	-18.48	32.71	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch38,5.19G,BW40M	Humidity (%RH)	58.0

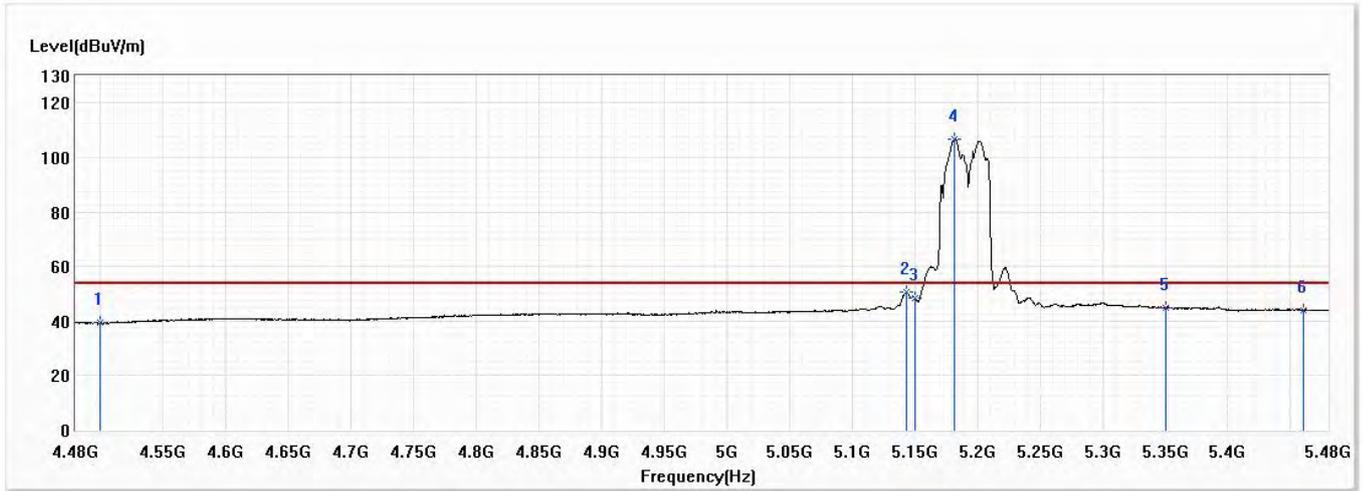


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.39	54.00	-14.61	19.15	20.24	AV
2	5143.500	50.60	54.00	-3.40	28.09	22.51	AV
3	5150.000	48.60	54.00	-5.40	26.09	22.51	AV
! 4	5182.000	106.75	54.00	52.75	84.21	22.54	AV
5	5350.000	45.05	54.00	-8.95	22.35	22.70	AV
6	5460.000	44.09	54.00	-9.91	21.28	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch46,5.23G,BW40M	Humidity (%RH)	58.0

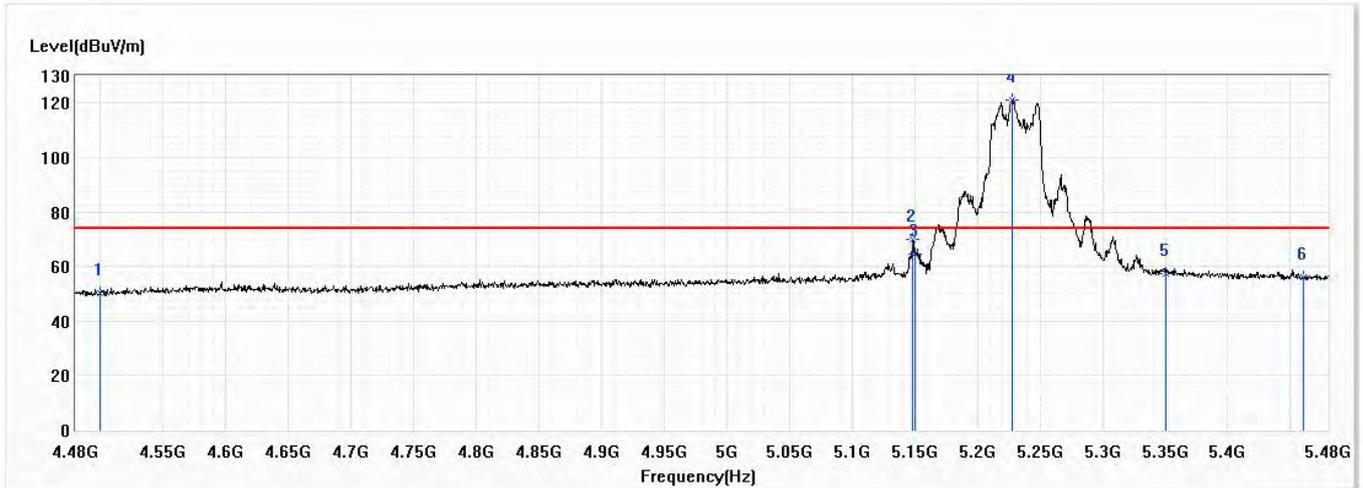


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.32	74.00	-23.68	30.08	20.24	PK
2	5148.500	69.71	74.00	-4.29	47.20	22.51	PK
3	5150.000	64.69	74.00	-9.31	42.18	22.51	PK
! 4	5228.000	121.11	74.00	47.11	98.53	22.58	PK
5	5350.000	57.43	74.00	-16.57	34.73	22.70	PK
6	5460.000	55.99	74.00	-18.01	33.18	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch46,5.23G,BW40M	Humidity (%RH)	58.0

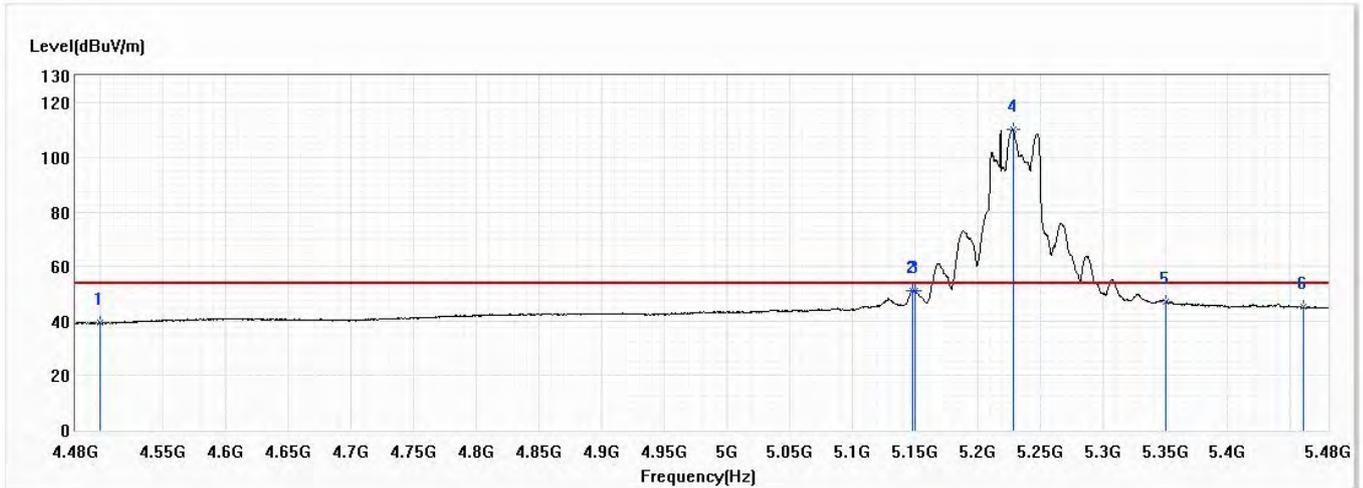


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.27	54.00	-14.73	19.03	20.24	AV
2	5148.500	50.90	54.00	-3.10	28.39	22.51	AV
3	5150.000	51.08	54.00	-2.92	28.57	22.51	AV
! 4	5228.500	110.14	54.00	56.14	87.56	22.58	AV
5	5350.000	47.08	54.00	-6.92	24.38	22.70	AV
6	5460.000	45.31	54.00	-8.69	22.50	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch46,5.23G,BW40M	Humidity (%RH)	58.0

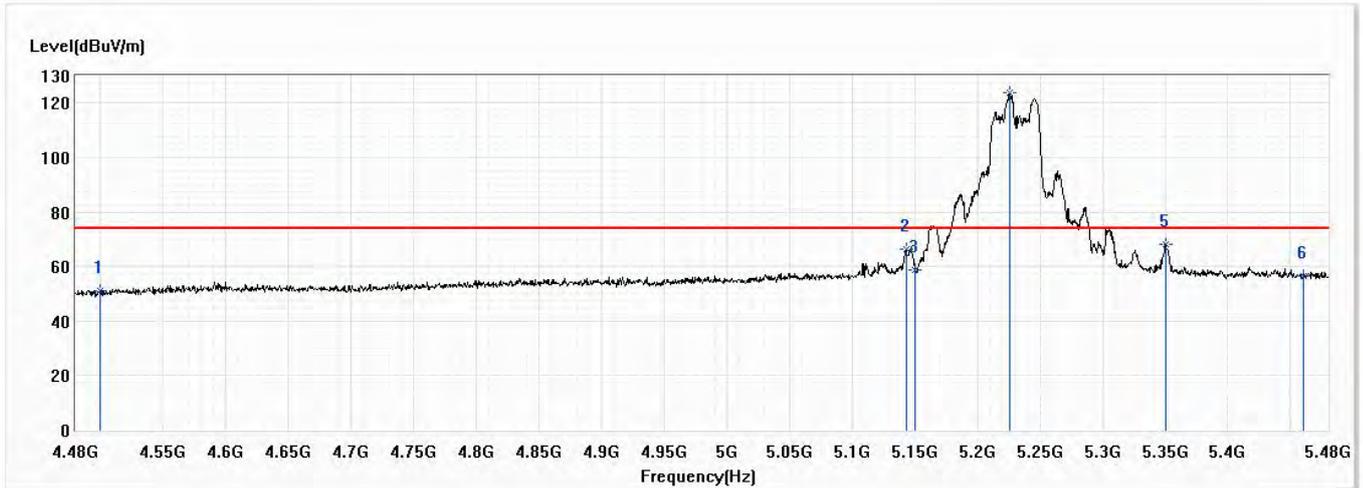


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	51.12	74.00	-22.88	30.88	20.24	PK
2	5143.000	66.23	74.00	-7.77	43.72	22.51	PK
3	5150.000	58.93	74.00	-15.07	36.42	22.51	PK
! 4	5225.500	123.75	74.00	49.75	101.17	22.58	PK
5	5350.000	68.10	74.00	-5.90	45.40	22.70	PK
6	5460.000	56.43	74.00	-17.57	33.62	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch46,5.23G,BW40M	Humidity (%RH)	58.0

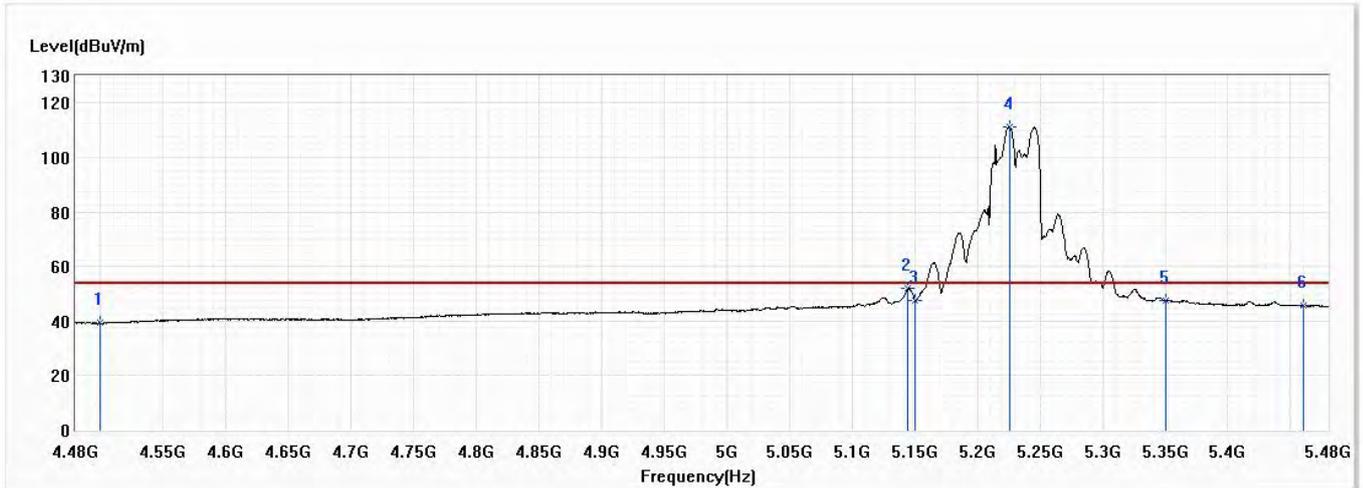


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.28	54.00	-14.72	19.04	20.24	AV
2	5144.500	51.98	54.00	-2.02	29.47	22.51	AV
3	5150.000	47.73	54.00	-6.27	25.22	22.51	AV
! 4	5226.000	111.29	54.00	57.29	88.71	22.58	AV
5	5350.000	47.61	54.00	-6.39	24.91	22.70	AV
6	5460.000	45.51	54.00	-8.49	22.70	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch42,5.21G,BW80M	Humidity (%RH)	58.0

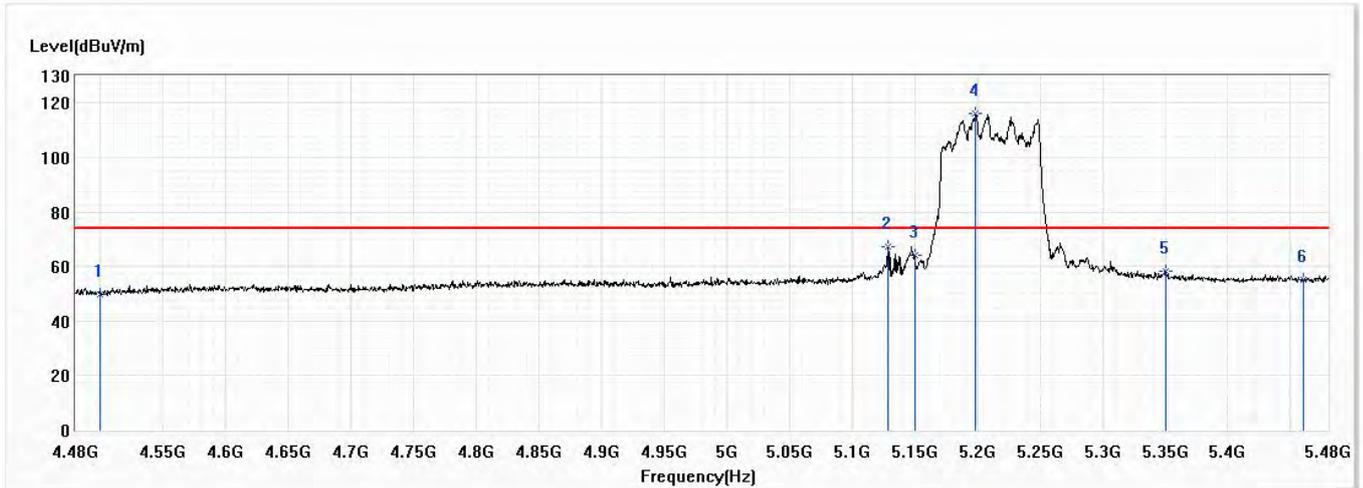


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	49.78	74.00	-24.22	29.54	20.24	PK
2	5128.500	67.06	74.00	-6.94	44.57	22.49	PK
3	5150.000	64.07	74.00	-9.93	41.56	22.51	PK
! 4	5198.500	116.07	74.00	42.07	93.51	22.56	PK
5	5350.000	58.40	74.00	-15.60	35.70	22.70	PK
6	5460.000	54.93	74.00	-19.07	32.12	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch42,5.21G,BW80M	Humidity (%RH)	58.0

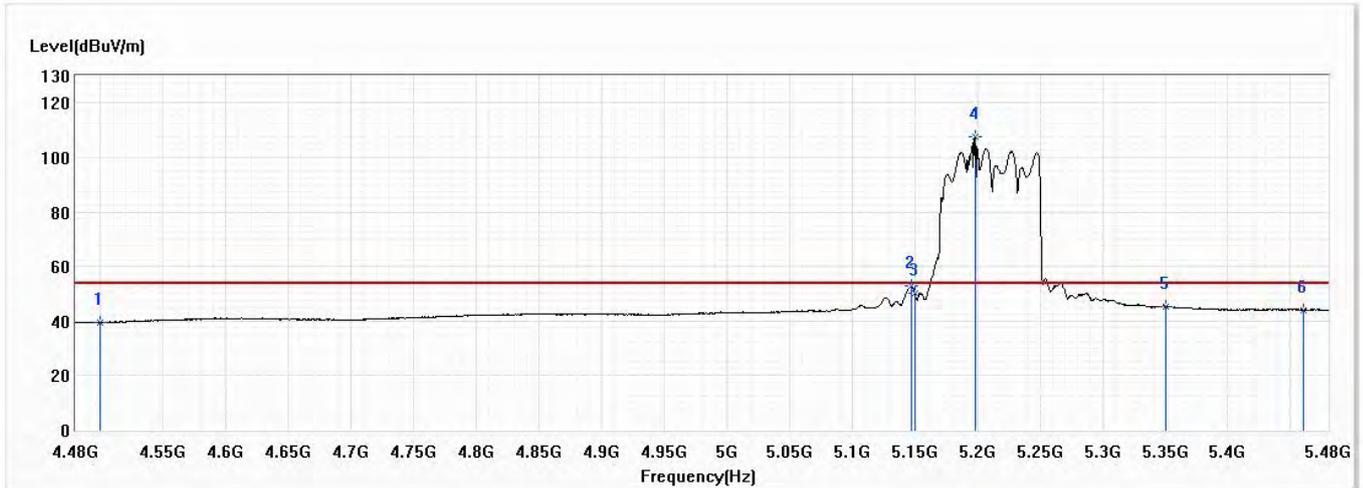


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.41	54.00	-14.59	19.17	20.24	AV
2	5147.000	52.76	54.00	-1.24	30.25	22.51	AV
3	5150.000	50.07	54.00	-3.93	27.56	22.51	AV
! 4	5198.000	107.50	54.00	53.50	84.94	22.56	AV
5	5350.000	45.41	54.00	-8.59	22.71	22.70	AV
6	5460.000	44.05	54.00	-9.95	21.24	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch42,5.21G,BW80M	Humidity (%RH)	58.0

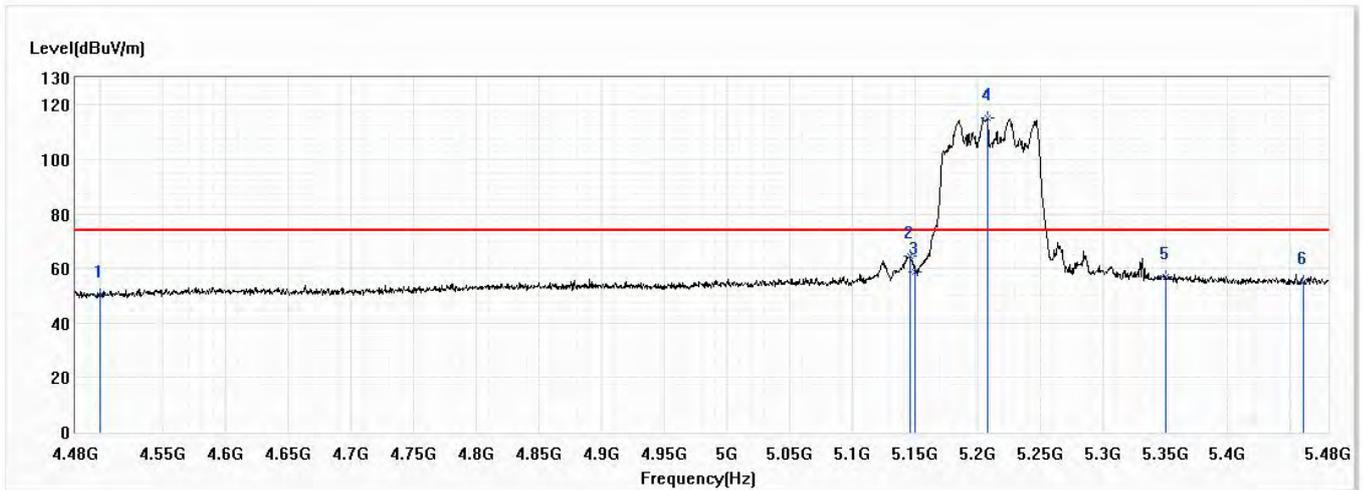


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	50.39	74.00	-23.61	30.15	20.24	PK
2	5146.000	64.68	74.00	-9.32	42.17	22.51	PK
3	5150.000	58.83	74.00	-15.17	36.32	22.51	PK
! 4	5208.000	115.42	74.00	41.42	92.86	22.56	PK
5	5350.000	56.77	74.00	-17.23	34.07	22.70	PK
6	5460.000	55.33	74.00	-18.67	32.52	22.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/17
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch42,5.21G,BW80M	Humidity (%RH)	58.0

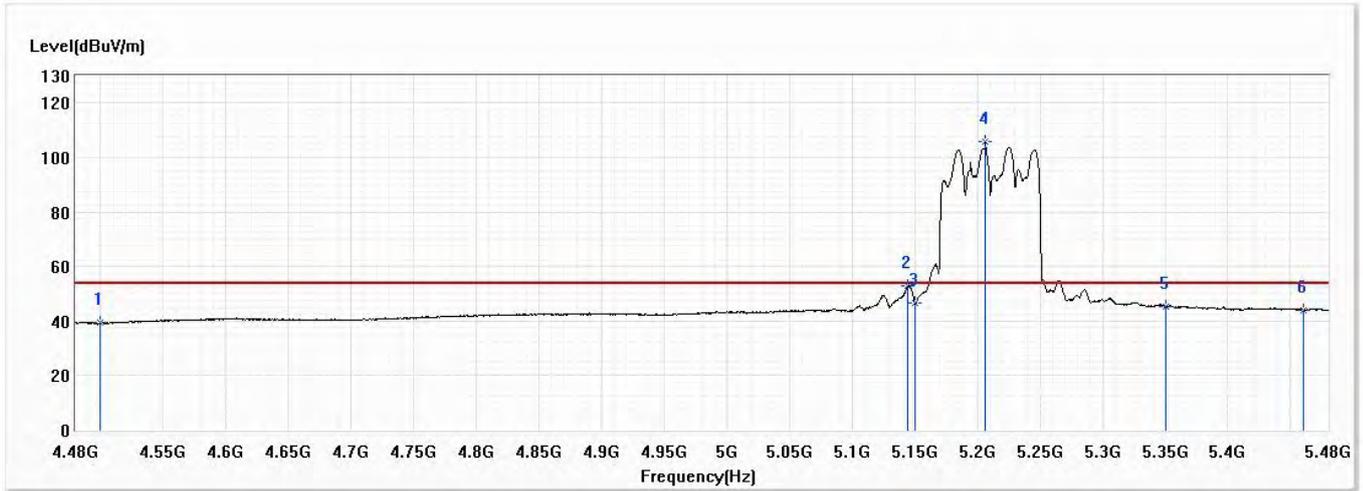


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	4500.000	39.24	54.00	-14.76	19.00	20.24	AV
2	5144.500	52.70	54.00	-1.30	30.19	22.51	AV
3	5150.000	46.79	54.00	-7.21	24.28	22.51	AV
! 4	5206.500	105.58	54.00	51.58	83.02	22.56	AV
5	5350.000	45.37	54.00	-8.63	22.67	22.70	AV
6	5460.000	44.06	54.00	-9.94	21.25	22.81	AV

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch149,5.745G,BW20M	Humidity (%RH)	58.0

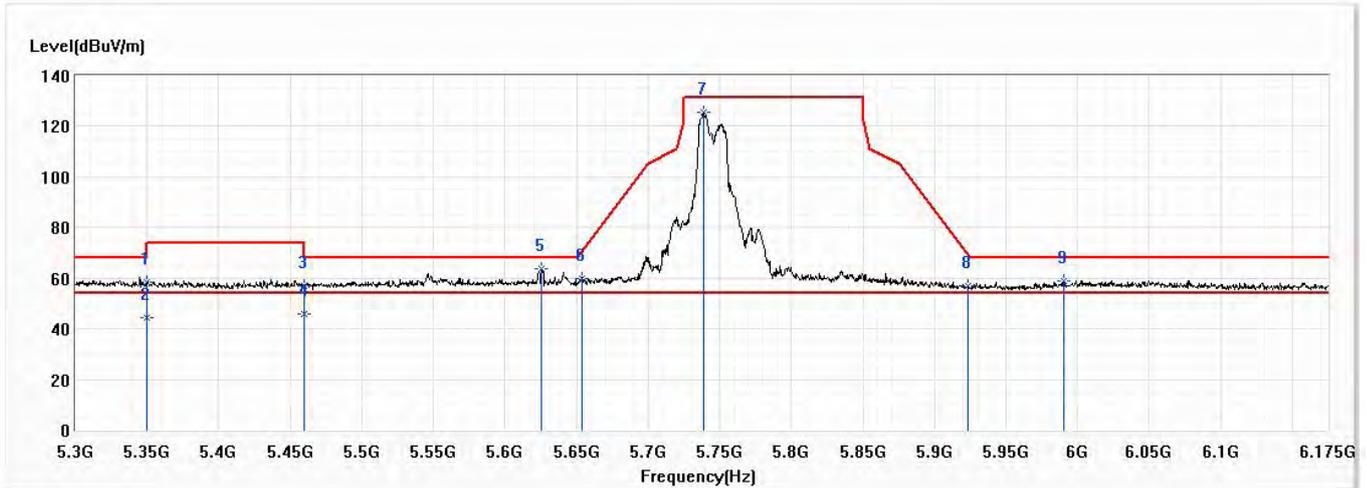


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.40	74.00	-15.60	35.70	22.70	PK
2	5350.000	44.35	54.00	-9.65	21.65	22.70	AV
3	5460.000	56.83	74.00	-17.17	34.02	22.81	PK
4	5460.000	45.76	54.00	-8.24	22.95	22.81	AV
* 5	5625.063	63.69	68.20	-4.51	40.33	23.36	PK
6	5653.500	59.99	70.80	-10.81	36.54	23.45	PK
7	5738.375	125.54	131.20	-5.66	101.75	23.79	PK
8	5923.438	56.99	69.35	-12.36	32.63	24.36	PK
9	5990.375	58.69	68.20	-9.51	34.11	24.58	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch149,5.745G,BW20M	Humidity (%RH)	58.0

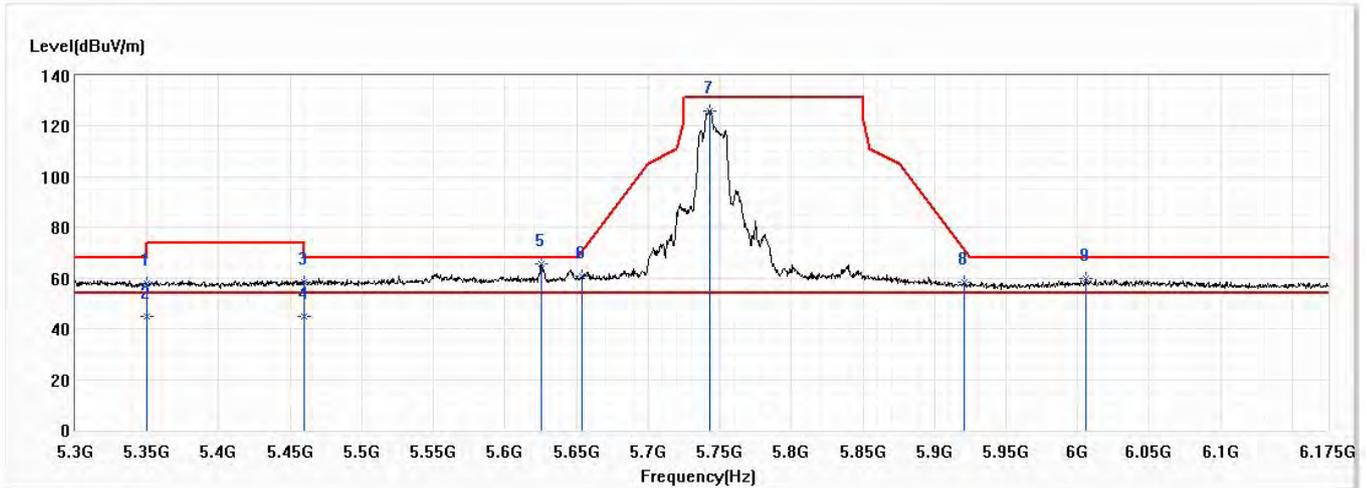


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.78	74.00	-16.22	35.08	22.70	PK
2	5350.000	44.76	54.00	-9.24	22.06	22.70	AV
3	5460.000	58.48	74.00	-15.52	35.67	22.81	PK
4	5460.000	45.08	54.00	-8.92	22.27	22.81	AV
* 5	5625.500	65.52	68.20	-2.68	42.16	23.36	PK
6	5653.500	61.03	70.80	-9.78	37.58	23.45	PK
7	5743.188	126.02	131.20	-5.18	102.21	23.81	PK
8	5921.250	58.28	70.96	-12.68	33.92	24.36	PK
9	6005.688	59.76	68.20	-8.44	35.14	24.62	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch157,5.785G,BW20M	Humidity (%RH)	58.0

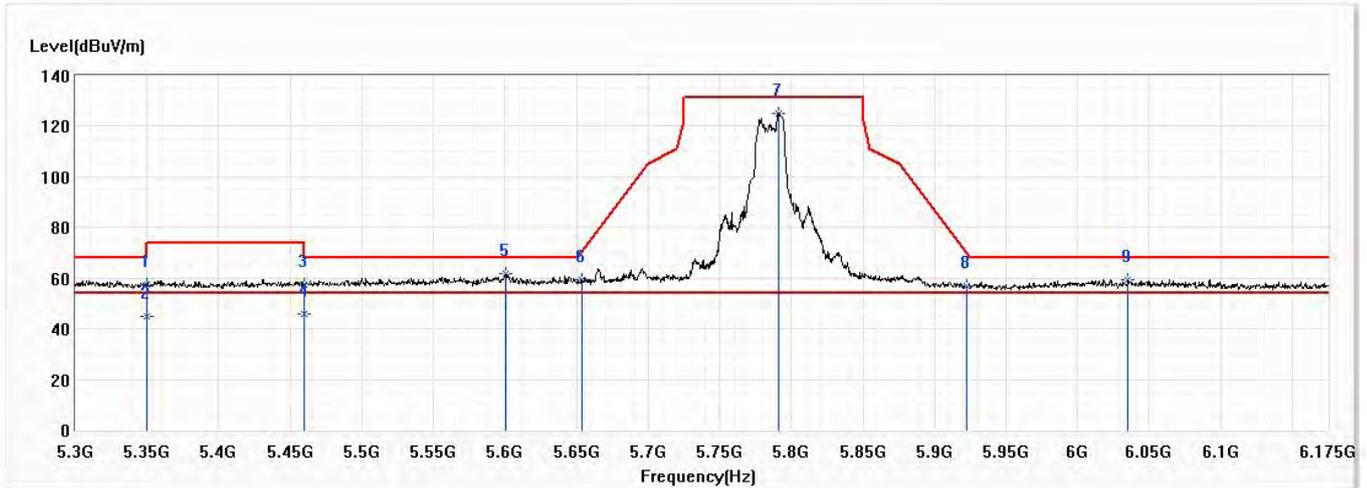


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.52	74.00	-16.48	34.82	22.70	PK
2	5350.000	44.67	54.00	-9.33	21.97	22.70	AV
3	5460.000	57.48	74.00	-16.52	34.67	22.81	PK
4	5460.000	45.89	54.00	-8.11	23.08	22.81	AV
5	5600.563	61.88	68.20	-6.32	38.63	23.25	PK
6	5653.938	59.28	71.13	-11.85	35.81	23.47	PK
* 7	5791.313	124.92	131.20	-6.28	100.95	23.97	PK
8	5922.125	57.05	70.32	-13.27	32.69	24.36	PK
9	6035.438	59.43	68.20	-8.77	34.72	24.71	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch157,5.785G,BW20M	Humidity (%RH)	58.0

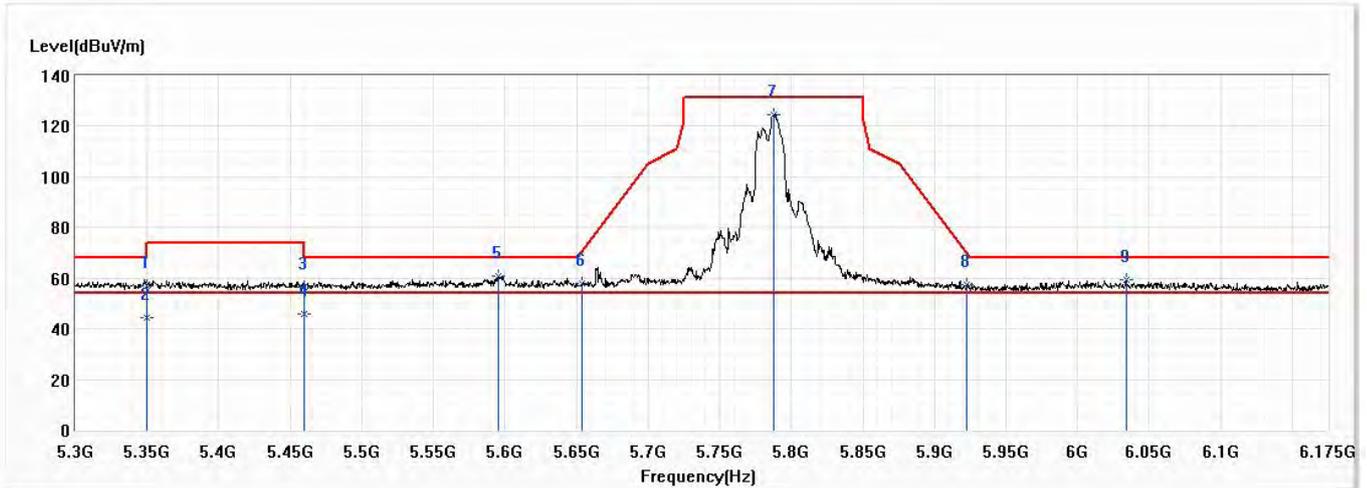


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.83	74.00	-17.17	34.13	22.70	PK
2	5350.000	44.51	54.00	-9.49	21.81	22.70	AV
3	5460.000	56.71	74.00	-17.29	33.90	22.81	PK
4	5460.000	45.74	54.00	-8.26	22.93	22.81	AV
5	5595.313	60.76	68.20	-7.44	37.54	23.22	PK
6	5653.938	58.13	71.13	-12.99	34.66	23.47	PK
* 7	5787.375	124.71	131.20	-6.49	100.76	23.95	PK
8	5922.563	57.42	70.00	-12.58	33.06	24.36	PK
9	6034.125	59.40	68.20	-8.80	34.69	24.71	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch165,5.825G,BW20M	Humidity (%RH)	58.0

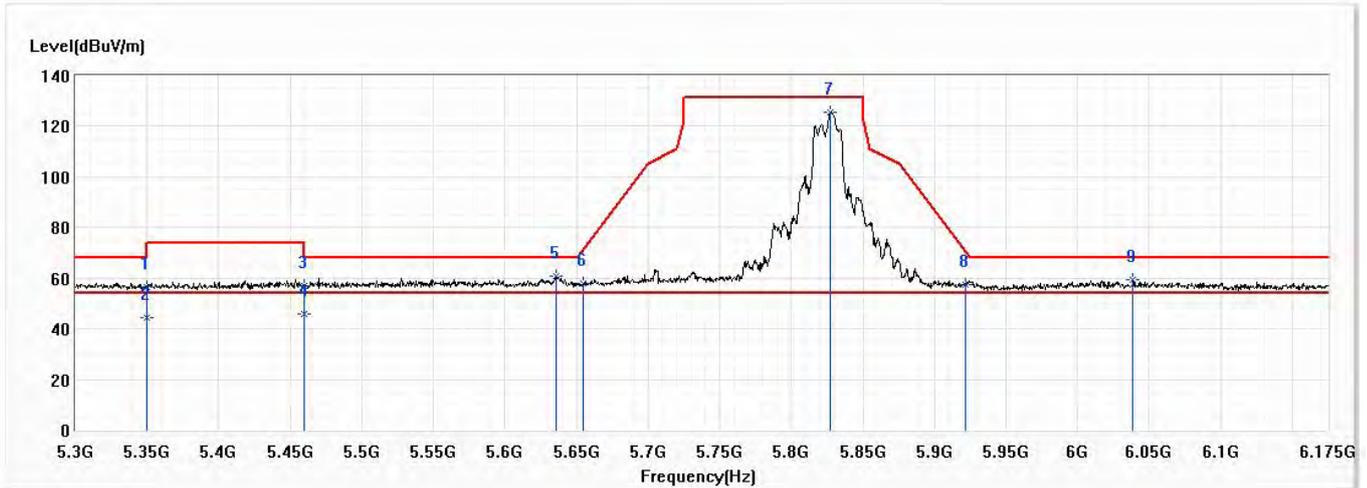


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.46	74.00	-17.54	33.76	22.70	PK
2	5350.000	44.65	54.00	-9.35	21.95	22.70	AV
3	5460.000	56.96	74.00	-17.04	34.15	22.81	PK
4	5460.000	45.78	54.00	-8.22	22.97	22.81	AV
5	5636.000	60.76	68.20	-7.44	37.37	23.39	PK
6	5654.813	58.11	71.78	-13.67	34.64	23.47	PK
* 7	5827.625	125.71	131.20	-5.49	101.63	24.08	PK
8	5921.688	57.57	70.64	-13.07	33.21	24.36	PK
9	6038.500	59.62	68.20	-8.58	34.88	24.74	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch165,5.85G,BW20M	Humidity (%RH)	58.0

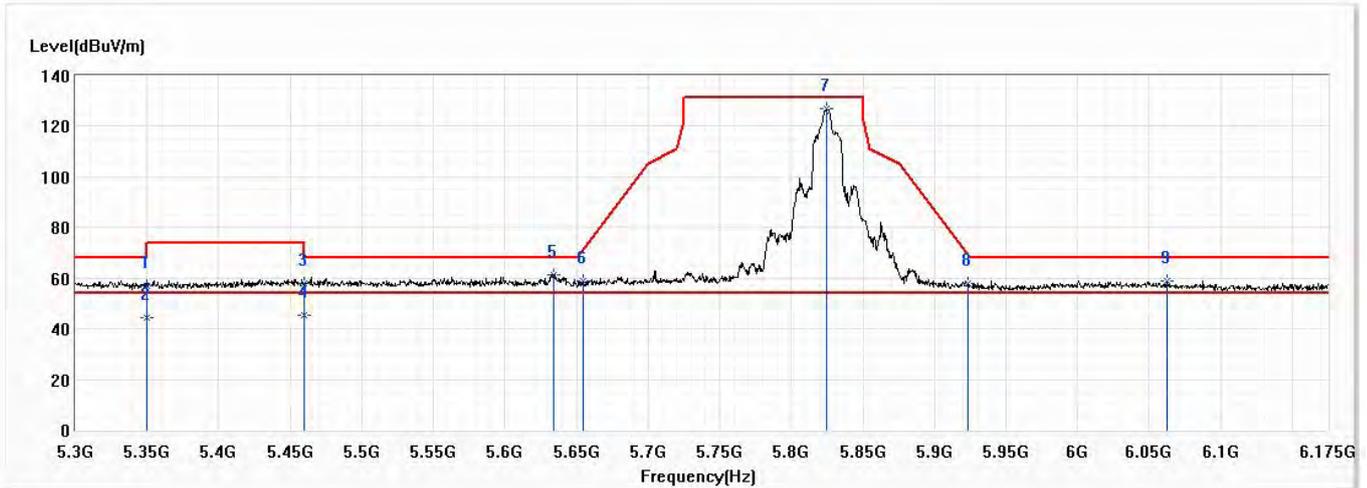


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.00	74.00	-17.00	34.30	22.70	PK
2	5350.000	44.18	54.00	-9.82	21.48	22.70	AV
3	5460.000	57.79	74.00	-16.21	34.98	22.81	PK
4	5460.000	45.57	54.00	-8.43	22.76	22.81	AV
5	5634.250	61.47	68.20	-6.73	38.08	23.39	PK
6	5654.375	58.71	71.45	-12.74	35.24	23.47	PK
* 7	5824.563	126.98	131.20	-4.22	102.92	24.06	PK
8	5923.000	57.72	69.67	-11.95	33.36	24.36	PK
9	6062.125	58.83	68.20	-9.37	34.02	24.81	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch151,5.755G,BW40M	Humidity (%RH)	58.0

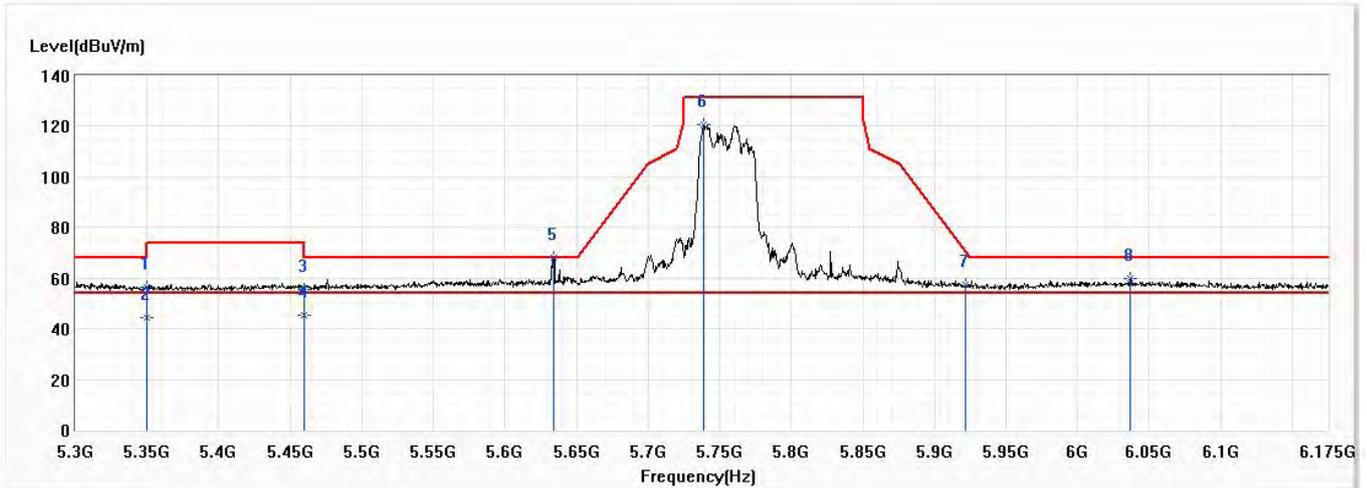


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.45	74.00	-17.55	33.75	22.70	PK
2	5350.000	44.46	54.00	-9.54	21.76	22.70	AV
3	5460.000	55.66	74.00	-18.34	32.85	22.81	PK
4	5460.000	45.58	54.00	-8.42	22.77	22.81	AV
* 5	5634.250	68.09	68.20	-0.11	44.70	23.39	PK
6	5738.375	120.54	131.20	-10.66	96.75	23.79	PK
7	5921.688	57.44	70.64	-13.21	33.08	24.36	PK
8	6036.750	59.80	68.20	-8.40	35.07	24.73	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch151,5.755G,BW40M	Humidity (%RH)	58.0

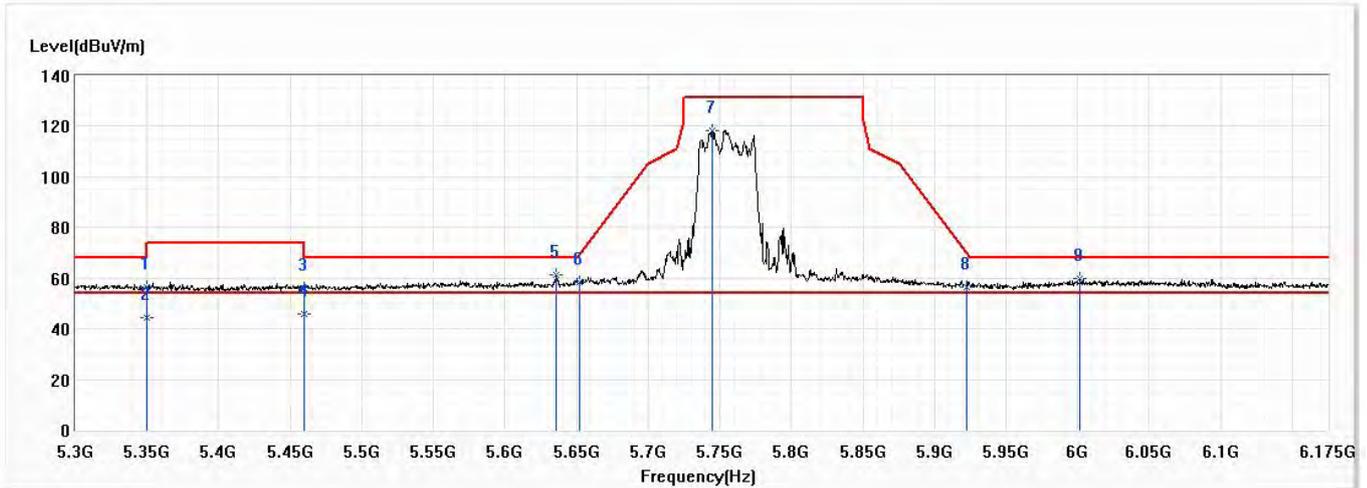


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	56.68	74.00	-17.32	33.98	22.70	PK
2	5350.000	44.57	54.00	-9.43	21.87	22.70	AV
3	5460.000	55.85	74.00	-18.15	33.04	22.81	PK
4	5460.000	45.70	54.00	-8.30	22.89	22.81	AV
* 5	5636.000	61.11	68.20	-7.09	37.72	23.39	PK
6	5652.188	58.51	69.83	-11.31	35.06	23.45	PK
7	5744.500	118.47	131.20	-12.73	94.66	23.81	PK
8	5922.125	56.48	70.32	-13.84	32.12	24.36	PK
9	6001.750	59.65	68.20	-8.55	35.05	24.60	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch159,5.795G,BW40M	Humidity (%RH)	58.0

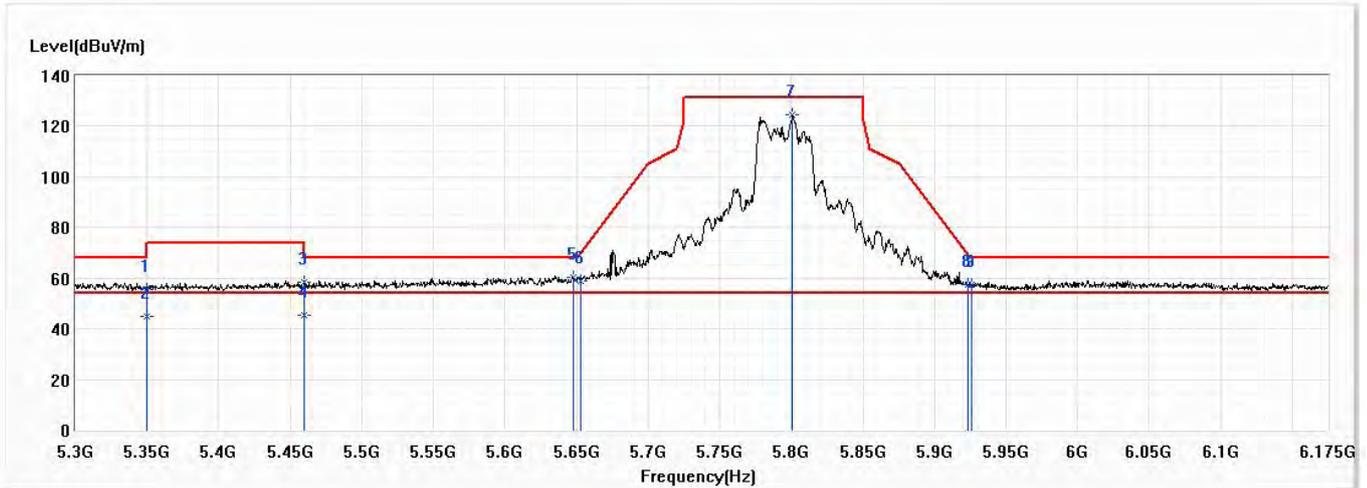


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	55.68	74.00	-18.32	32.98	22.70	PK
2	5350.000	44.68	54.00	-9.32	21.98	22.70	AV
3	5460.000	58.22	74.00	-15.78	35.41	22.81	PK
4	5460.000	45.47	54.00	-8.53	22.66	22.81	AV
5	5647.813	60.43	68.20	-7.77	36.99	23.44	PK
6	5652.625	58.83	70.15	-11.32	35.38	23.45	PK
* 7	5800.938	124.37	131.20	-6.83	100.38	23.99	PK
8	5923.000	57.31	69.67	-12.36	32.95	24.36	PK
9	5925.625	57.60	68.20	-10.60	33.22	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch159,5.795G,BW40M	Humidity (%RH)	58.0

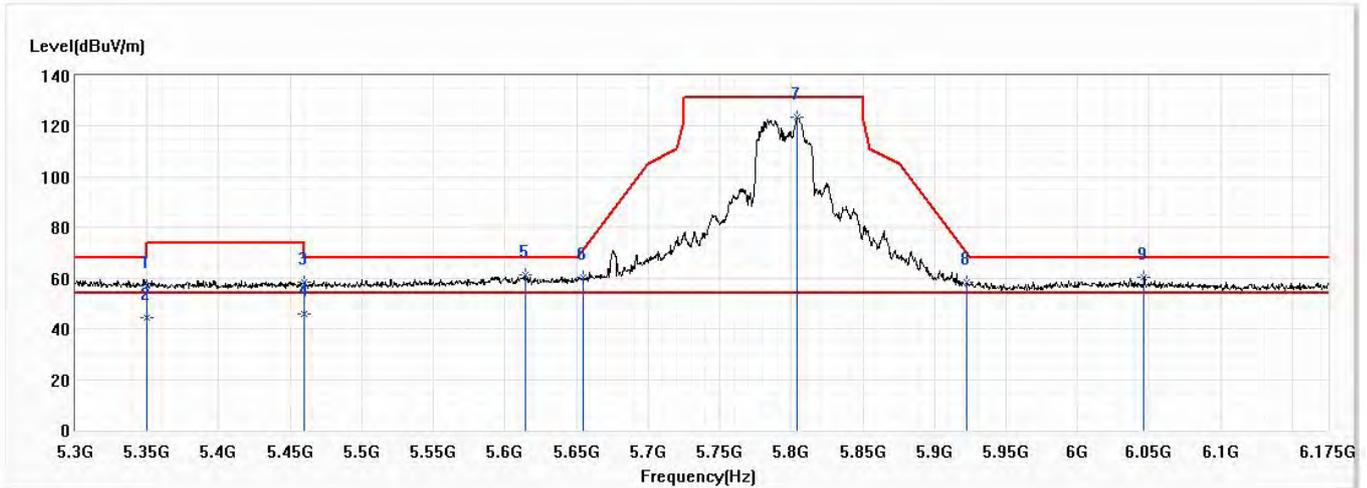


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.07	74.00	-16.93	34.37	22.70	PK
2	5350.000	44.55	54.00	-9.45	21.85	22.70	AV
3	5460.000	58.21	74.00	-15.79	35.40	22.81	PK
4	5460.000	45.71	54.00	-8.29	22.90	22.81	AV
* 5	5614.563	61.25	68.20	-6.95	37.95	23.30	PK
6	5654.375	60.56	71.45	-10.89	37.09	23.47	PK
7	5804.438	123.82	131.20	-7.38	99.81	24.01	PK
8	5922.563	58.27	70.00	-11.73	33.91	24.36	PK
9	6046.375	60.27	68.20	-7.93	35.51	24.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Horizontal	Temperature (°C)	22.0
Test Condition	802.11ax,Ch155,5.775G,BW80M	Humidity (%RH)	58.0

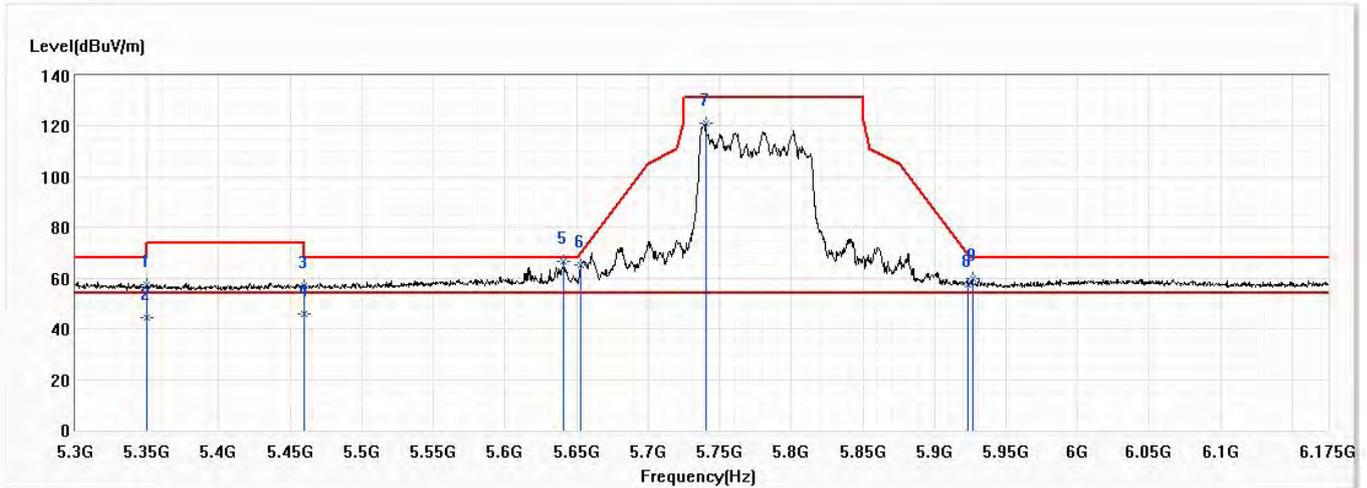


No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	57.23	74.00	-16.77	34.53	22.70	PK
2	5350.000	44.56	54.00	-9.44	21.86	22.70	AV
3	5460.000	56.82	74.00	-17.18	34.01	22.81	PK
4	5460.000	45.74	54.00	-8.26	22.93	22.81	AV
* 5	5641.250	66.61	68.20	-1.59	43.20	23.41	PK
6	5653.063	65.08	70.48	-5.39	41.63	23.45	PK
7	5740.125	121.38	131.20	-9.82	97.57	23.81	PK
8	5923.438	57.51	69.35	-11.84	33.15	24.36	PK
9	5926.500	59.83	68.20	-8.37	35.45	24.38	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.

Model No	CR1000A	Site	CB4-H
Test Voltage	AC 120V/60Hz	Test Date	2020/11/18
Test Mode	Mode 3: Transmit Beamforming Mode	Engineer	Elwin Lin
Polarity	Vertical	Temperature (°C)	22.0
Test Condition	802.11ax,Ch155,5.775G,BW80M	Humidity (%RH)	58.0

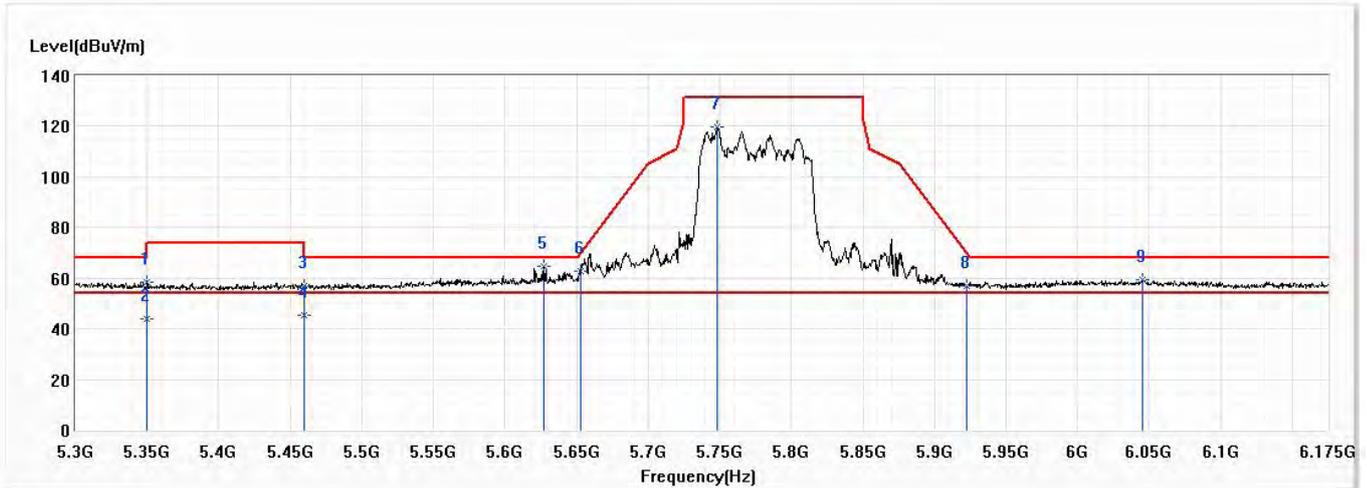

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Reading Level (dBuV)	Correct Factor (dB)	Detector Type
1	5350.000	58.33	74.00	-15.67	35.63	22.70	PK
2	5350.000	44.16	54.00	-9.84	21.46	22.70	AV
3	5460.000	57.03	74.00	-16.97	34.22	22.81	PK
4	5460.000	45.57	54.00	-8.43	22.76	22.81	AV
* 5	5626.813	64.75	68.20	-3.45	41.39	23.36	PK
6	5653.063	62.86	70.48	-7.62	39.41	23.45	PK
7	5748.438	119.64	131.20	-11.56	95.80	23.84	PK
8	5922.125	57.19	70.32	-13.13	32.83	24.36	PK
9	6045.500	59.20	68.20	-9.00	34.44	24.76	PK

Note:

1. All reading above 1GHz is performed with peak and/or average measurements as necessary.
2. Emission Level = Reading Level + Correct Factor.
3. The average measurement was not performed when the peak measured data under the limit of average detection. If the readings given are average, peak measurement should also be supplied.
4. The fundamental for reference only, it's not restricted by unwanted emission limit.