




LTE Band 66 (Channel Bandwidth 1.4MHz)

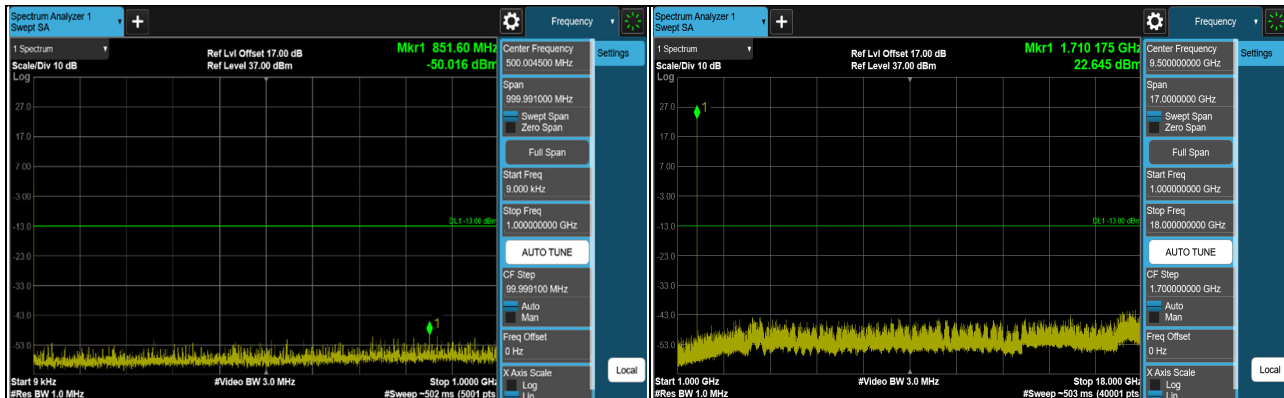

CH 131979 (1710.7MHz)

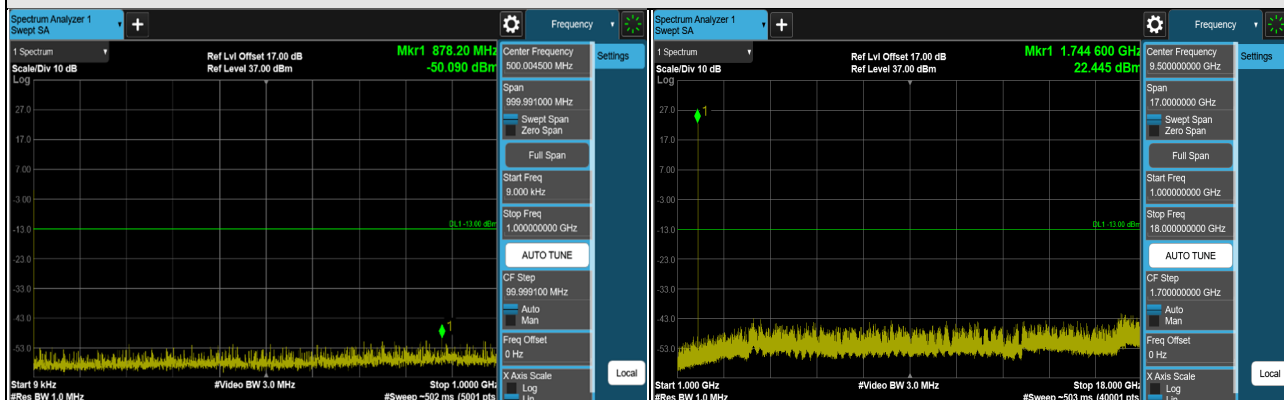


CH 132322 (1745MHz)

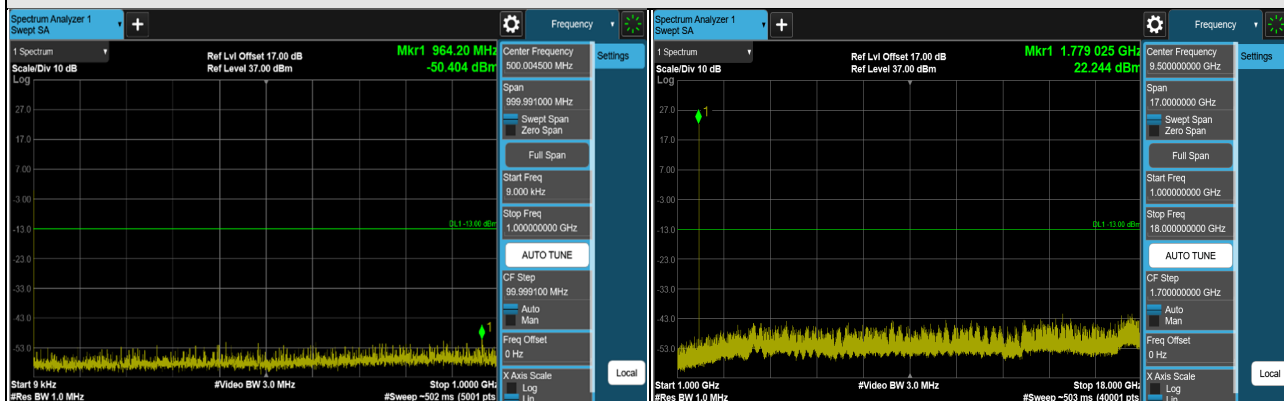


CH 132665 (1779.3MHz)

*The 9kHz signal over the limit is from Spectrum.


LTE Band 66 (Channel Bandwidth 3MHz)

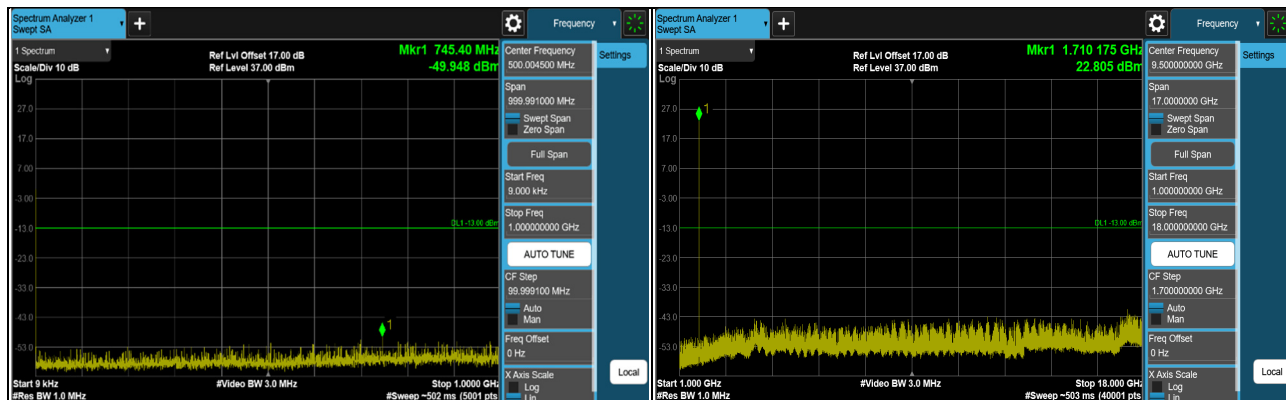

CH 131987 (1711.5MHz)

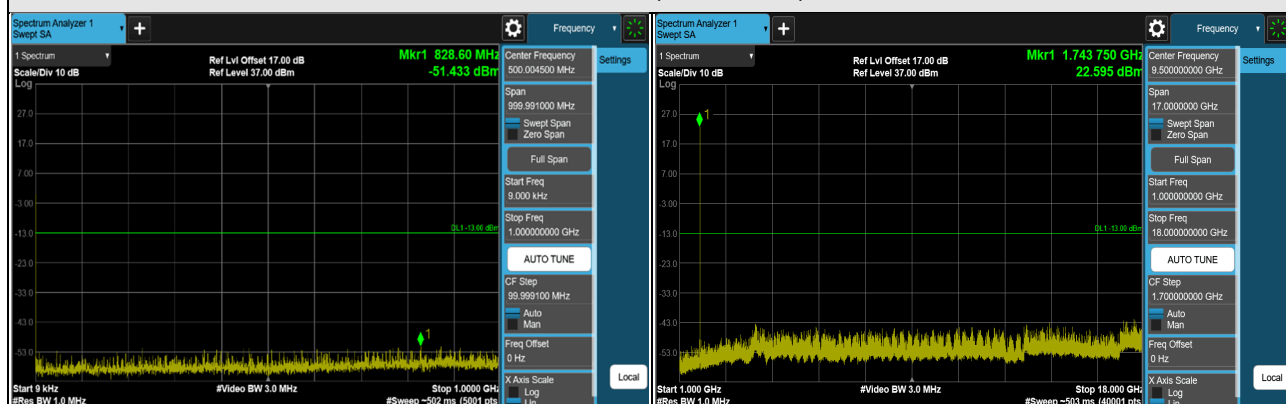


CH 132322 (1745MHz)

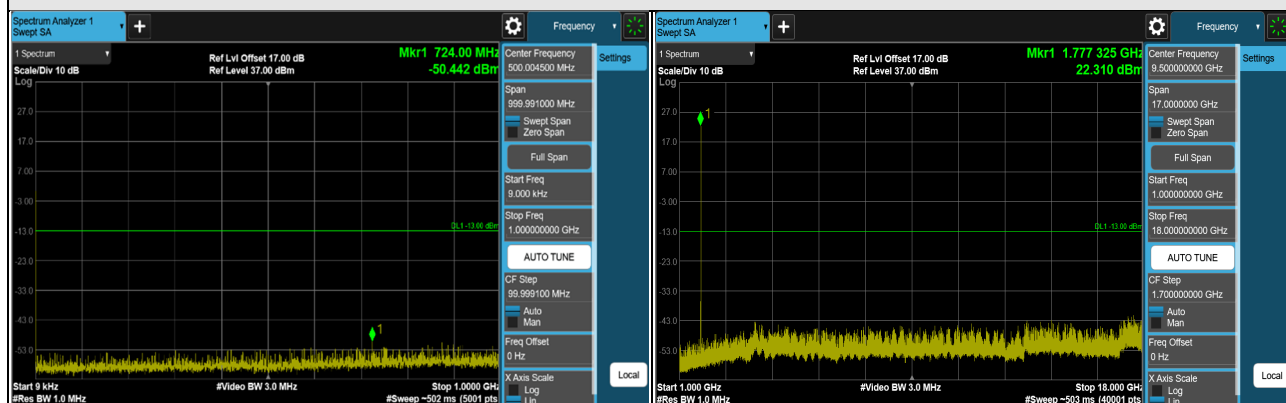


CH 132657 (1778.5MHz)

*The 9kHz signal over the limit is from Spectrum.


LTE Band 66 (Channel Bandwidth 5MHz)

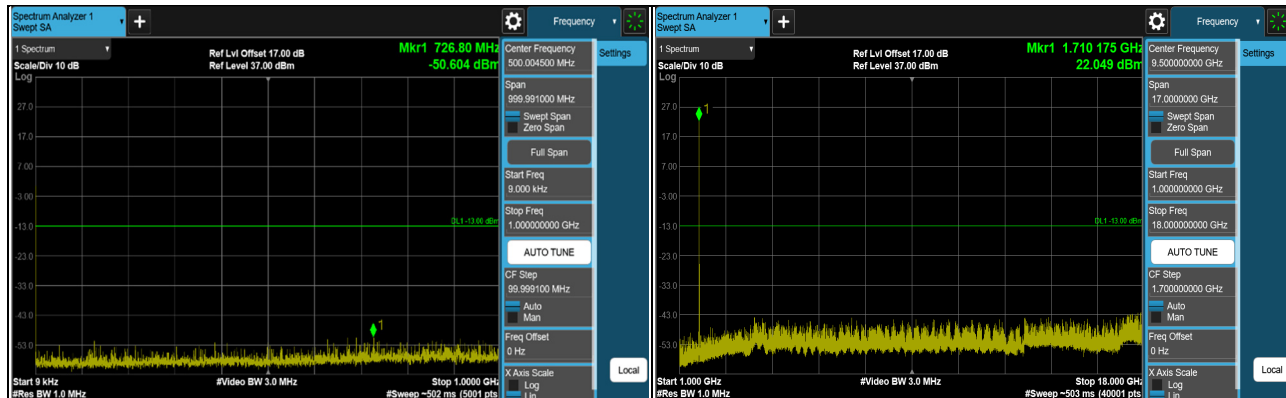

CH 131997 (1712.5MHz)

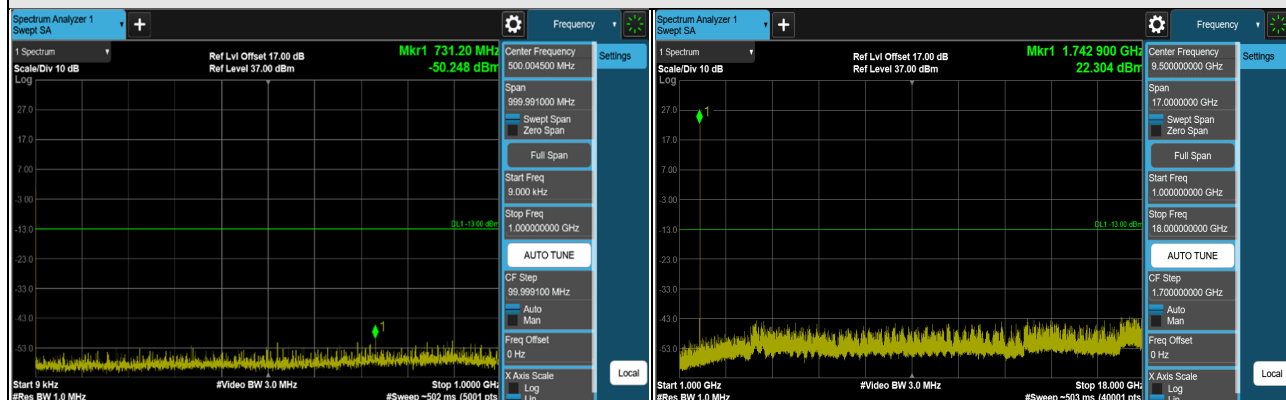


CH 132322 (1745MHz)

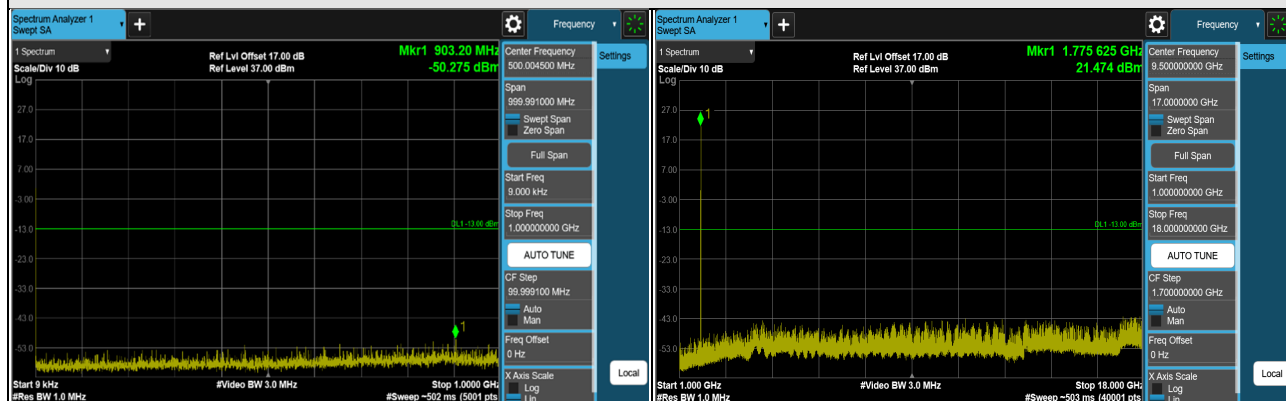


CH 132647 (1777.5MHz)

*The 9kHz signal over the limit is from Spectrum.


LTE Band 66 (Channel Bandwidth 10MHz)

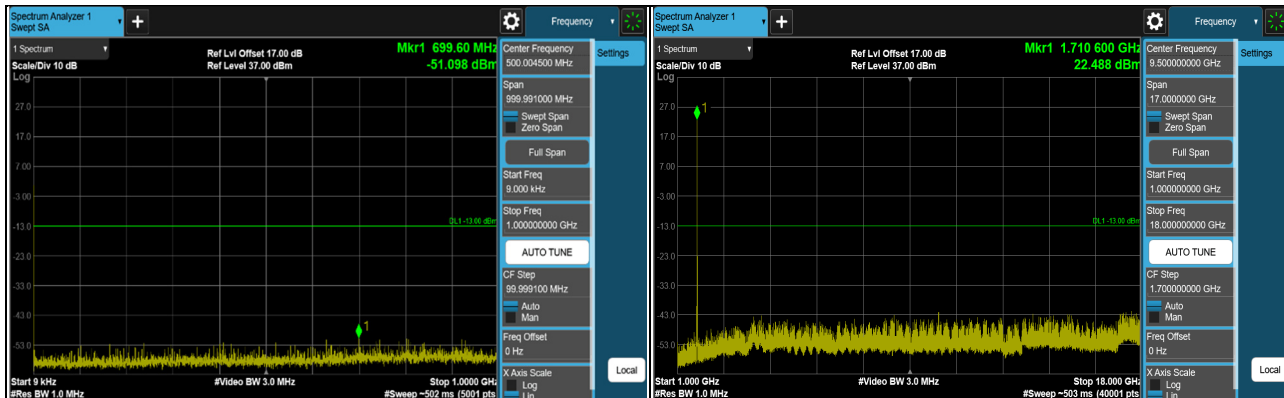

CH 132022 (1715MHz)

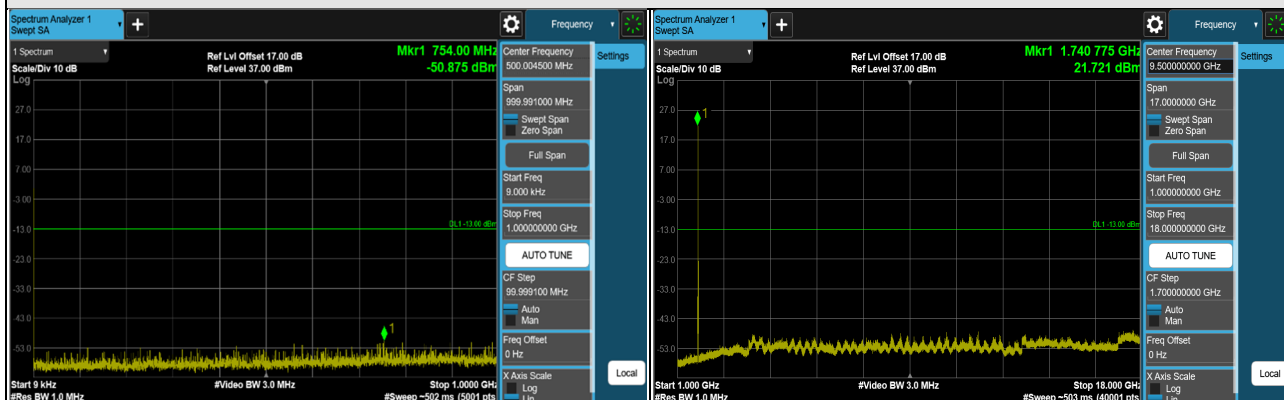


CH 132322 (1745MHz)

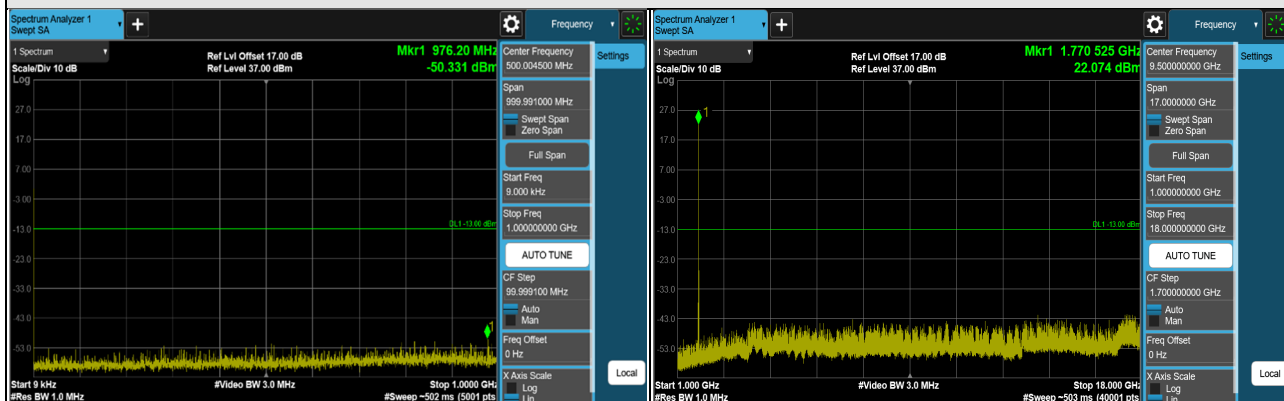

CH 132622 (1775MHz)

*The 9kHz signal over the limit is from Spectrum.


LTE Band 66 (Channel Bandwidth 15MHz)

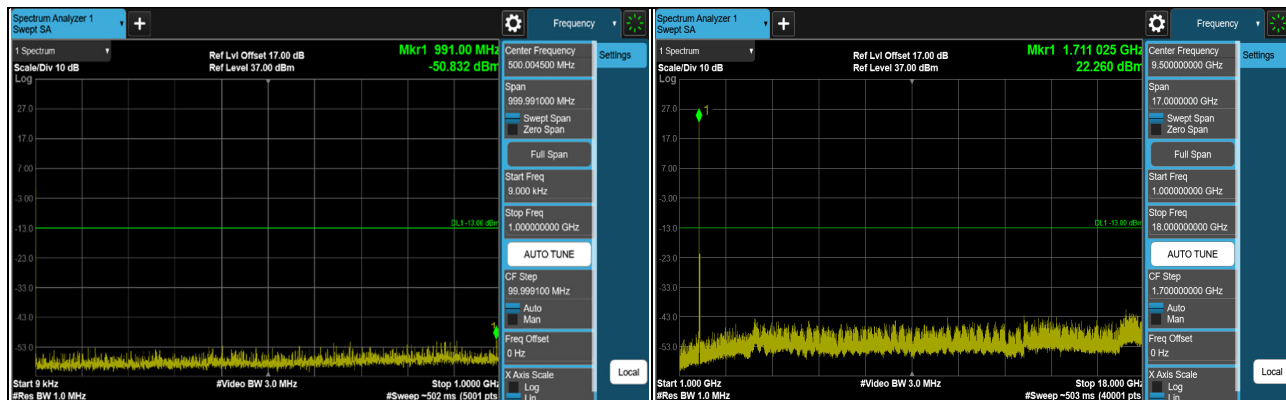

CH 132047 (1717.5MHz)




CH 132322 (1745MHz)

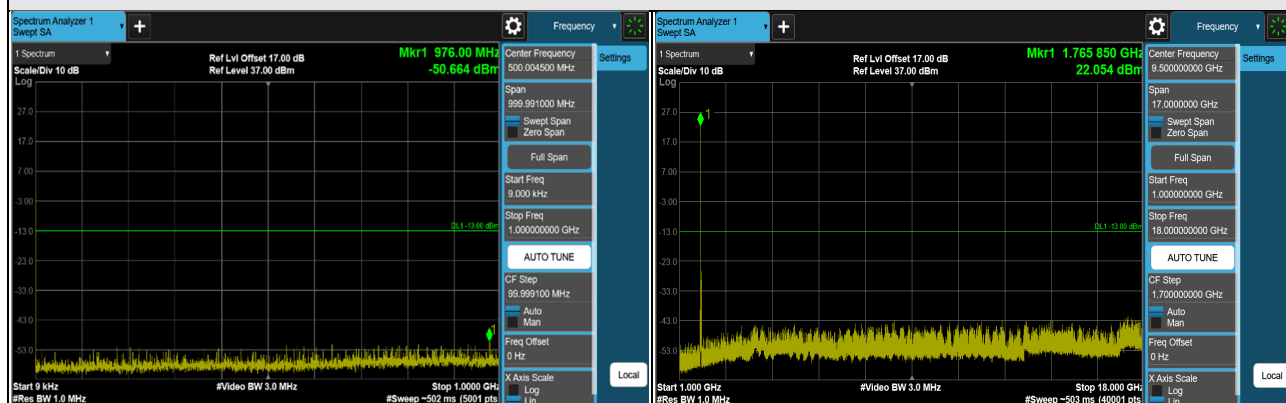


CH 132597 (1772.5MHz)

*The 9kHz signal over the limit is from Spectrum.


LTE Band 66 (Channel Bandwidth 20MHz)

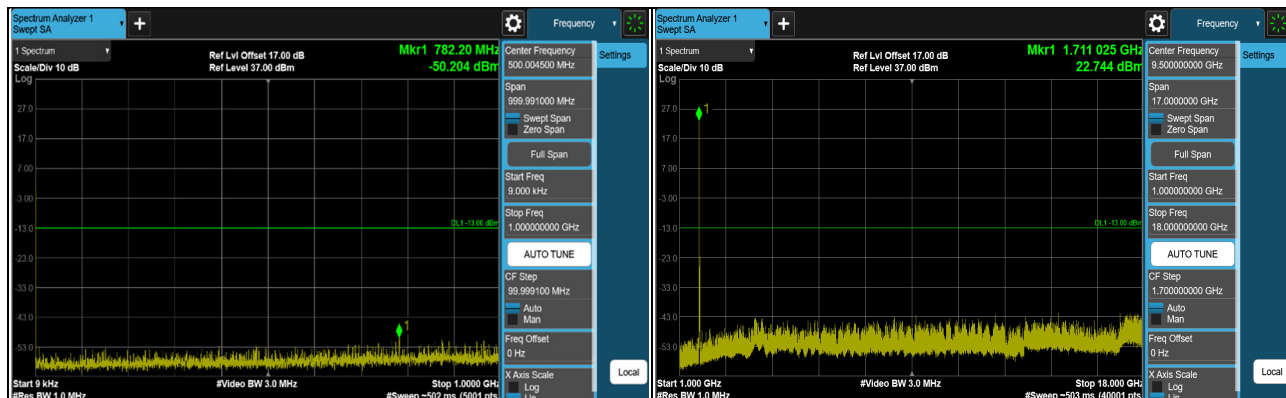

CH 132072 (1720MHz)

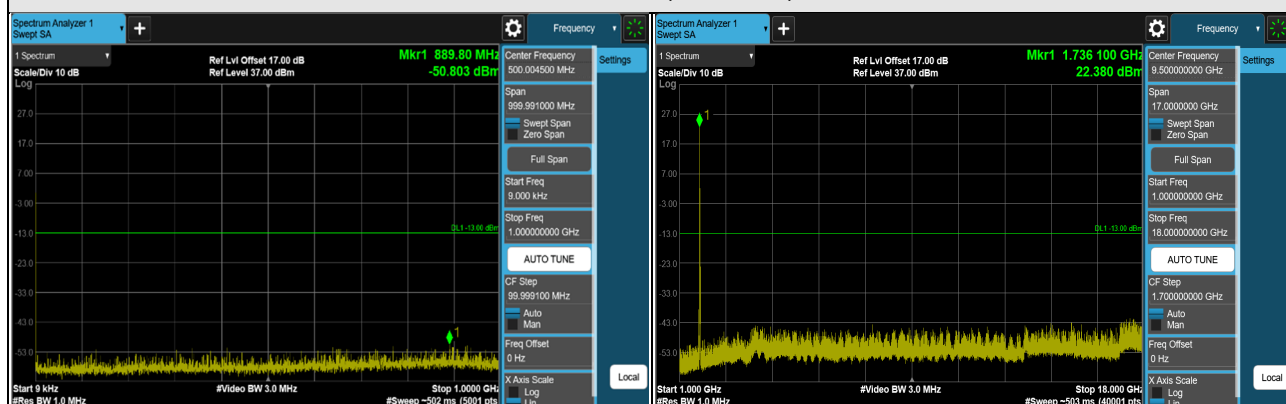

CH 132322 (1745MHz)

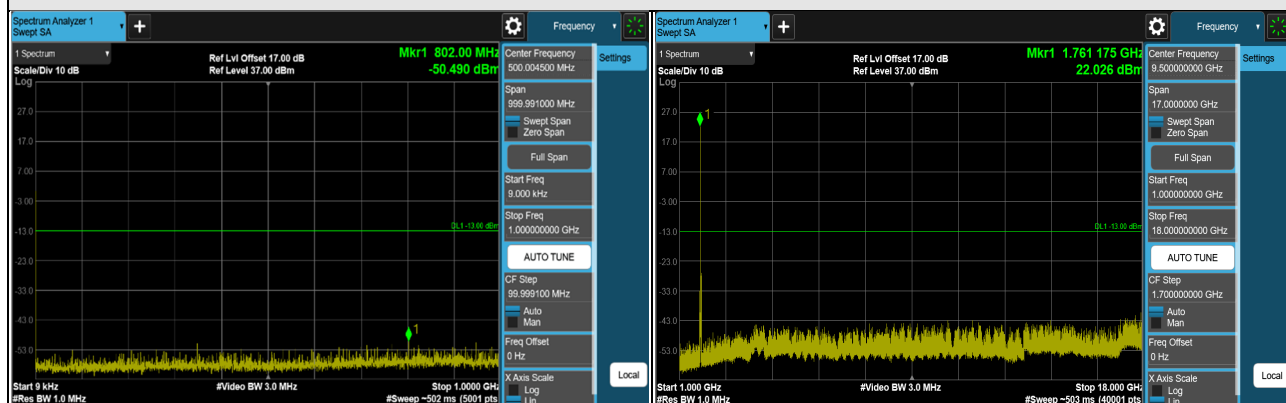

CH 132572 (1770MHz)

*The 9kHz signal over the limit is from Spectrum.

4.8 Radiated Emission Measurement

4.8.1 Limits of Radiated Emission Measurement

For LTE Band 4, LTE Band 66:

According to FCC 27.53(h), for operations in the 1695-1710MHz, 1710-1755MHz, 1755-1780 MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \log (P)$ dB.

For LTE Band 7:

According to FCC 27.53(m)(4), on any frequency outside a licensee's frequency block, The power of any emission shall be attenuated below the transmitter power (P) by at least $55 + 10 \log (P)$ dB. The emission limit equal to -25 dBm.

For LTE Band 12, LTE Band 17:

According to FCC 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log (P)$ dB. The limit of emissions is equal to -13 dBm.

4.8.2 Test Procedure

- a. In the semi-anechoic chamber, EUT placed on the 0.8m (below or equal 1GHz) and/or 1.5m (above 1GHz) height of Turn Table, rotated the table around 360 degrees to search the maximum radiation power and receiver antenna shall be rotated vertical and horizontal polarization and moved height from 1m to 4m to find the maximum polar radiated power. The "Read Value" is the spectrum reading the maximum power value.
- b. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. Perform a field strength measurement and record the worse read value, is the field strength value via a spectrum reading obtained corrected for antenna factor, cable loss and pre-amplifier factor and then mathematically convert the measured field strength level to EIRP/ERP level.
- d. Following C63.26 section 5.5 and 5.2.7
 - $EIRP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8$; where D is the measurement distance (in the far field region) in m.
 - $ERP (dBm) = E (dB\mu V/m) + 20\log(D) - 104.8 - 2.15$; where D is the measurement distance (in the far field region) in m.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1MHz/3MHz.
2. The emission levels were against the limit of frequency range 9 kHz ~ 30 MHz:
The amplitude of spurious emissions attenuated more than 20 dB below the permissible value is not required to be report.

4.8.3 Deviation from Test Standard


No deviation.

4.8.4 Test Setup

For radiated emission 30MHz to 1GHz

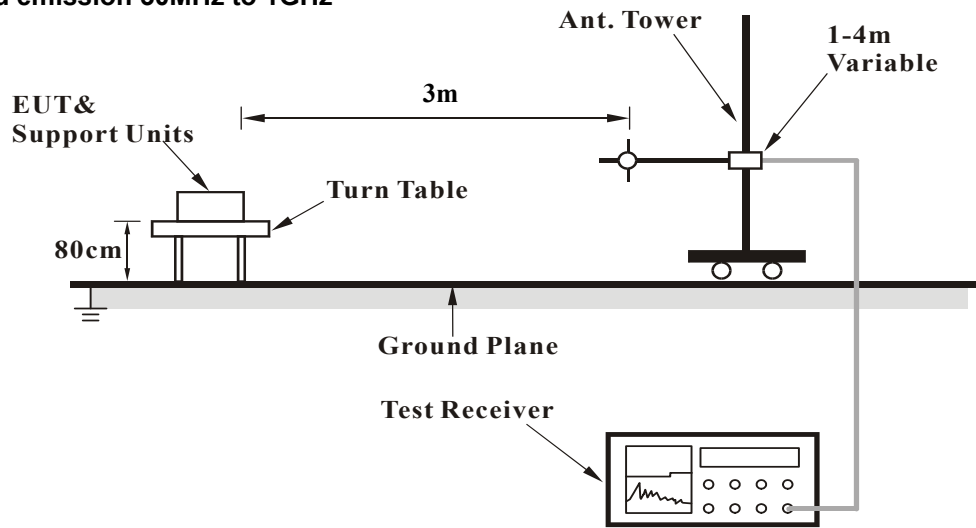

For radiated emission above 1GHz

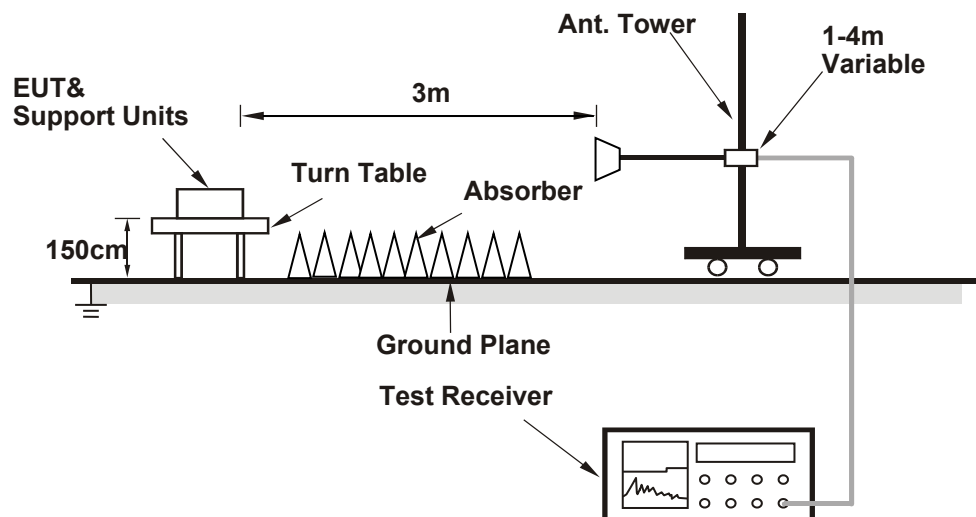

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.8.5 Test Results

Below 1GHz


LTE Band 4 (Channel Bandwidth 20MHz)

Mode	TX channel 20175 (1732.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	59.10	-45.87	-13.00	-32.87	1.27 H	63	62.48	-108.35
2	163.86	-48.58	-13.00	-35.58	2.63 H	71	59.41	-107.99
3	287.05	-63.99	-13.00	-50.99	3.38 H	45	43.94	-107.93
4	542.16	-56.58	-13.00	-43.58	2.57 H	144	43.98	-100.56
5	623.64	-54.35	-13.00	-41.35	1.42 H	13	43.82	-98.17
6	920.46	-48.91	-13.00	-35.91	2.09 H	120	44.27	-93.18

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

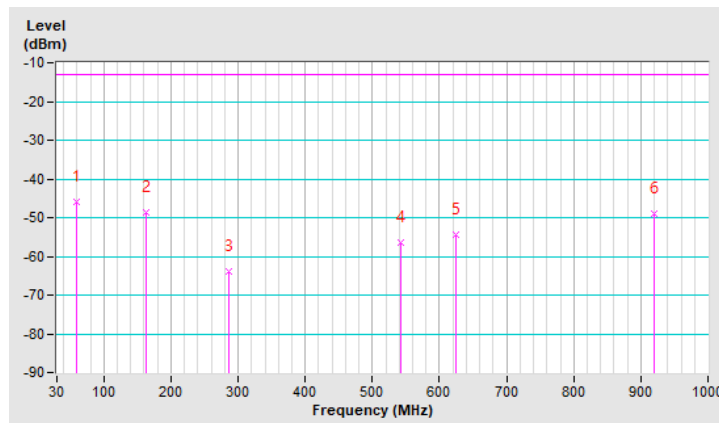


Mode	TX channel 20175 (1732.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3m

No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	91.11	-57.18	-13.00	-44.18	1.63 V	300	56.28	-113.46
2	148.34	-50.09	-13.00	-37.09	2.87 V	34	57.43	-107.52
3	230.79	-64.05	-13.00	-51.05	3.87 V	126	46.91	-110.96
4	412.18	-60.72	-13.00	-47.72	1.58 V	206	43.48	-104.20
5	575.14	-56.51	-13.00	-43.51	2.32 V	4	43.23	-99.74
6	872.93	-49.31	-13.00	-36.31	1.07 V	316	44.61	-93.92

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

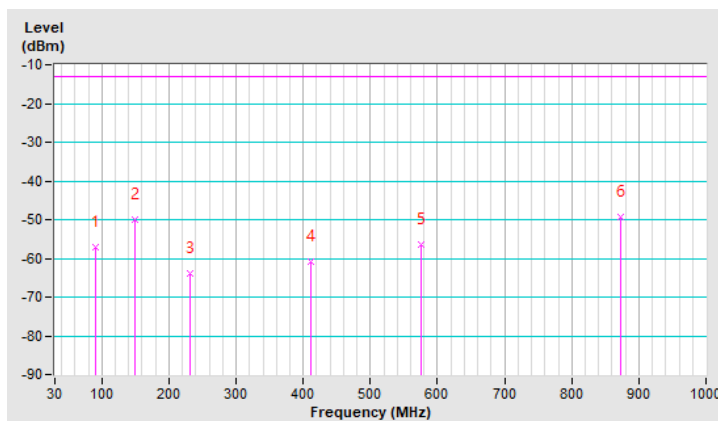


LTE Band 7 (Channel Bandwidth 20MHz)

Mode	TX channel 21350 (2560.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	62.98	-48.44	-25.00	-23.44	1.23 H	67	60.66	-109.10
2	179.38	-55.64	-25.00	-30.64	1.57 H	275	53.79	-109.43
3	319.06	-64.80	-25.00	-39.80	2.52 H	18	41.70	-106.50
4	433.52	-62.70	-25.00	-37.70	3.94 H	46	40.42	-103.12
5	579.99	-58.96	-25.00	-33.96	1.51 H	140	40.55	-99.51
6	797.27	-53.65	-25.00	-28.65	1.29 H	13	41.37	-95.02

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

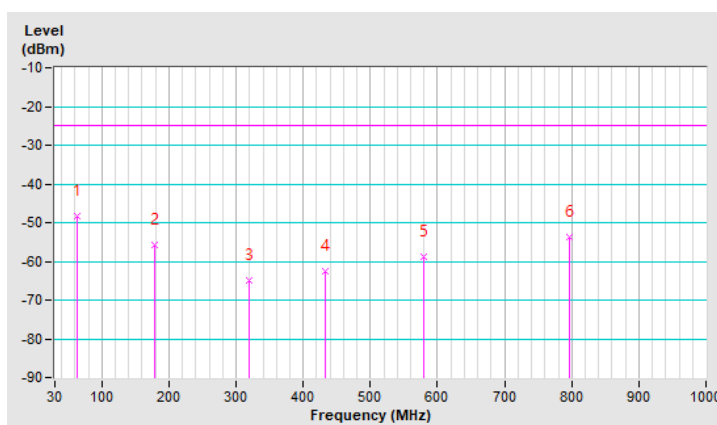


Mode	TX channel 21350 (2560.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	83.35	-44.80	-25.00	-19.80	1.32 V	232	68.61	-113.41
2	121.18	-45.40	-25.00	-20.40	1.24 V	80	64.10	-109.50
3	155.13	-53.04	-25.00	-28.04	1.74 V	64	54.42	-107.46
4	497.54	-60.40	-25.00	-35.40	2.52 V	17	40.99	-101.39
5	779.81	-54.70	-25.00	-29.70	1.97 V	172	40.51	-95.21
6	858.38	-53.35	-25.00	-28.35	2.23 V	309	40.77	-94.12

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

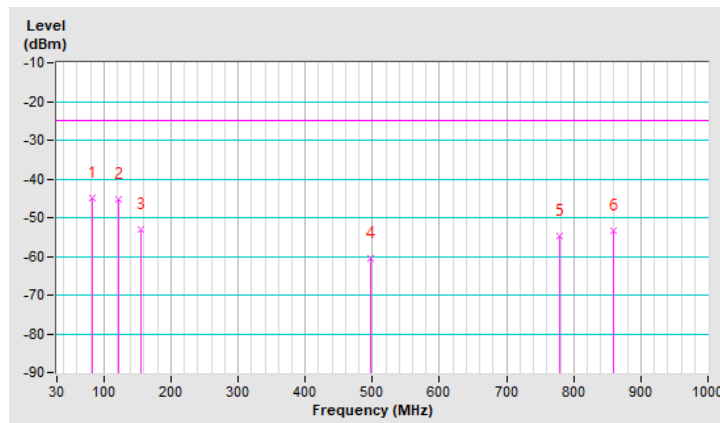


LTE Band 12 (Channel Bandwidth 10MHz)

Mode	TX channel 23095 (707.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	68.80	-53.88	-13.00	-40.88	1.23 H	64	58.45	-112.33
2	181.32	-60.67	-13.00	-47.67	2.35 H	52	51.20	-111.87
3	377.26	-65.77	-13.00	-52.77	1.87 H	142	41.26	-107.03
4	594.54	-59.43	-13.00	-46.43	2.39 H	115	41.62	-101.05
5	837.04	-56.02	-13.00	-43.02	2.52 H	6	40.28	-96.30
6	964.11	-54.14	-13.00	-41.14	1.88 H	160	40.38	-94.52

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

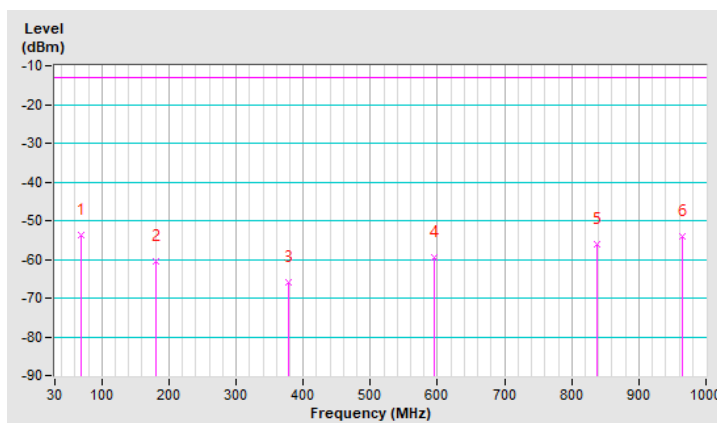


Mode	TX channel 23095 (707.5MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3m

No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	116.33	-56.05	-13.00	-43.05	1.24 V	1	56.01	-112.06
2	211.39	-69.70	-13.00	-56.70	2.37 V	193	43.95	-113.65
3	346.22	-66.43	-13.00	-53.43	2.47 V	175	41.45	-107.88
4	616.85	-59.97	-13.00	-46.97	3.62 V	66	40.54	-100.51
5	862.26	-55.10	-13.00	-42.10	1.52 V	11	41.17	-96.27
6	961.20	-53.84	-13.00	-40.84	1.41 V	18	40.73	-94.57

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

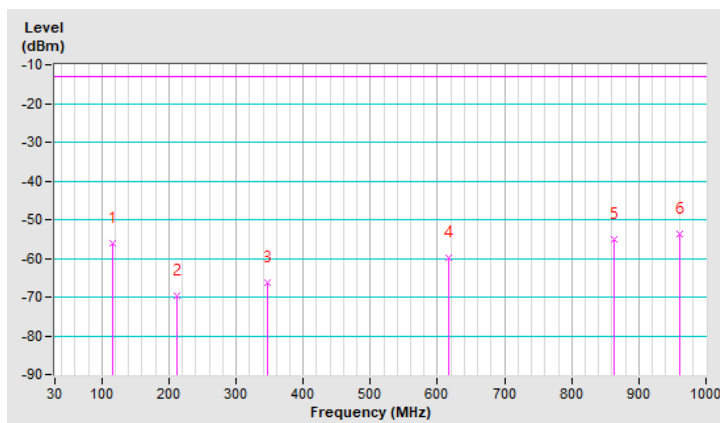


LTE Band 17 (Channel Bandwidth 10MHz)

Mode	TX channel 23800 (711.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	69.77	-53.34	-13.00	-40.34	2.68 H	73	59.02	-112.36
2	206.54	-71.34	-13.00	-58.34	1.74 H	78	42.28	-113.62
3	277.35	-68.34	-13.00	-55.34	1.85 H	296	42.26	-110.60
4	433.52	-65.39	-13.00	-52.39	1.36 H	323	39.88	-105.27
5	643.04	-58.38	-13.00	-45.38	2.08 H	49	41.61	-99.99
6	870.02	-55.38	-13.00	-42.38	1.41 H	182	40.75	-96.13

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

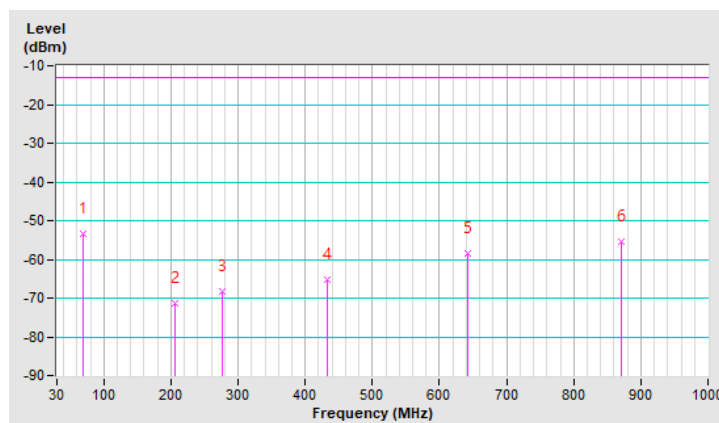


Mode	TX channel 23800 (711.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	133.79	-56.26	-13.00	-43.26	1.23 V	291	54.10	-110.36
2	235.64	-70.35	-13.00	-57.35	1.47 V	67	42.12	-112.47
3	409.27	-65.35	-13.00	-52.35	2.52 V	63	41.07	-106.42
4	500.45	-62.27	-13.00	-49.27	3.89 V	316	41.22	-103.49
5	643.04	-58.65	-13.00	-45.65	1.52 V	81	41.34	-99.99
6	900.09	-54.89	-13.00	-41.89	1.03 V	264	41.00	-95.89

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. Margin value = ERP – Limit value
4. The other ERP levels were very low against the limit.

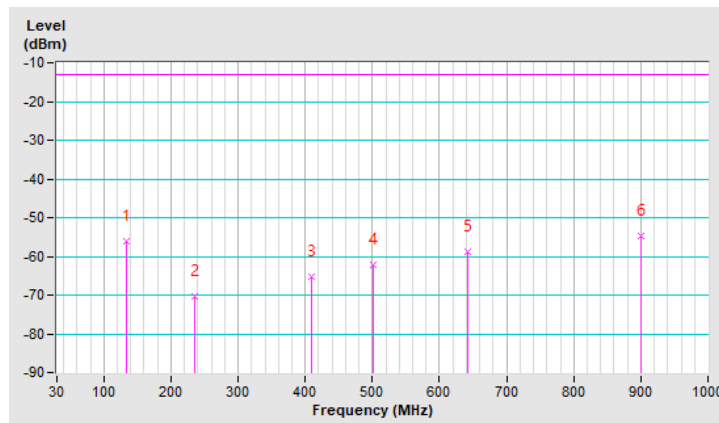


LTE Band 66 (Channel Bandwidth 20MHz)

Mode	TX channel 132572 (1770.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	58.13	-47.34	-13.00	-34.34	1.23 H	54	61.12	-108.46
2	164.83	-48.54	-13.00	-35.54	1.54 H	74	59.44	-107.98
3	295.78	-67.24	-13.00	-54.24	2.08 H	12	40.34	-107.58
4	532.46	-59.61	-13.00	-46.61	1.65 H	40	41.24	-100.85
5	756.53	-54.89	-13.00	-41.89	2.23 H	135	40.87	-95.76
6	920.46	-52.55	-13.00	-39.55	3.17 H	78	40.63	-93.18

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

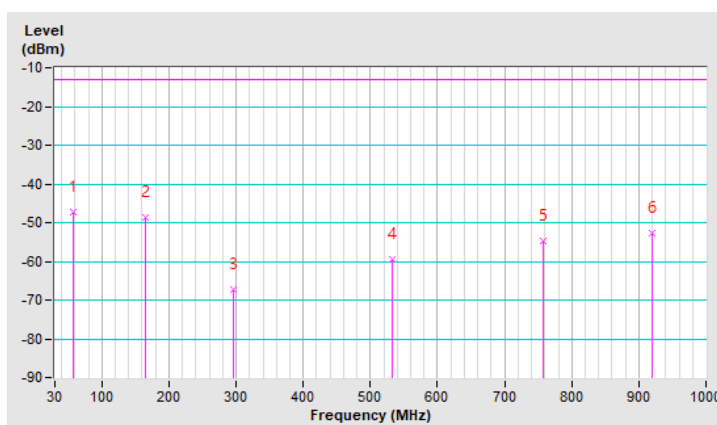


Mode	TX channel 132572 (1770.0MHz)	Frequency Range	Below 1000 MHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Vertical at 3m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	77.53	-41.62	-13.00	-28.62	1.76 V	337	70.60	-112.22
2	161.92	-53.00	-13.00	-40.00	2.01 V	53	54.79	-107.79
3	234.67	-67.44	-13.00	-54.44	3.35 V	31	42.97	-110.41
4	370.47	-64.23	-13.00	-51.23	1.97 V	83	40.86	-105.09
5	610.06	-58.03	-13.00	-45.03	3.63 V	168	40.45	-98.48
6	821.52	-53.92	-13.00	-40.92	1.04 V	199	40.50	-94.42

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

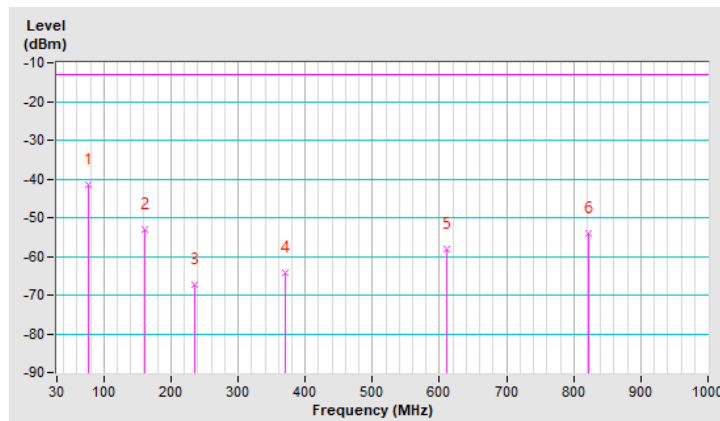

Above 1GHz

LTE Band 4 (Channel Bandwidth 1.4MHz)

Mode	TX channel 19957 (1710.7MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-57.91	-13.00	-44.91	3.23 H	166	58.56	-116.47
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-48.22	-13.00	-35.22	1.55 V	41	68.25	-116.47

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20175 (1732.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-51.69	-13.00	-38.69	3.41 H	29	64.63	-116.32
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-44.00	-13.00	-31.00	2.61 V	133	72.32	-116.32

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20393 (1754.3MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-52.87	-13.00	-39.87	1.60 H	177	63.17	-116.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3508.60	-44.29	-13.00	-31.29	3.50 V	202	71.75	-116.04

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 4 (Channel Bandwidth 5MHz)

Mode	TX channel 19975 (1712.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-57.43	-13.00	-44.43	3.18 H	159	59.03	-116.46
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-47.71	-13.00	-34.71	1.48 V	22	68.75	-116.46

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20175 (1732.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-51.05	-13.00	-38.05	3.36 H	33	65.27	-116.32
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-43.56	-13.00	-30.56	2.53 V	129	72.76	-116.32

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20375 (1752.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-52.41	-13.00	-39.41	1.52 H	171	63.65	-116.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3505.00	-43.87	-13.00	-30.87	3.41 V	191	72.19	-116.06

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 4 (Channel Bandwidth 20MHz)

Mode	TX channel 20050 (1720.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-56.97	-13.00	-43.97	3.21 H	155	59.47	-116.44
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-47.24	-13.00	-34.24	1.42 V	13	69.20	-116.44

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20175 (1732.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-50.56	-13.00	-37.56	3.33 H	29	65.76	-116.32
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3465.00	-43.22	-13.00	-30.22	2.51 V	127	73.10	-116.32

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 20300 (1745.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-52.08	-13.00	-39.08	1.50 H	170	64.08	-116.16
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-43.58	-13.00	-30.58	3.36 V	182	72.58	-116.16

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 7 (Channel Bandwidth 5MHz)

Mode	TX channel 20775 (2502.5MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-55.31	-25.00	-30.31	3.41 H	41	56.84	-112.15
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5005.00	-54.52	-25.00	-29.52	1.81 V	222	57.63	-112.15

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21100 (2535.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-54.50	-25.00	-29.50	3.22 H	23	57.23	-111.73
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-54.16	-25.00	-29.16	1.59 V	24	57.57	-111.73

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21425 (2567.5MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-54.10	-25.00	-29.10	3.23 H	51	57.81	-111.91
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5135.00	-54.49	-25.00	-29.49	1.58 V	76	57.42	-111.91

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 7 (Channel Bandwidth 20MHz)

Mode	TX channel 20850 (2510.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-54.87	-25.00	-29.87	3.45 H	23	57.11	-111.98
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5020.00	-54.00	-25.00	-29.00	1.72 V	214	57.98	-111.98

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21100 (2535.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-54.08	-25.00	-29.08	3.27 H	16	57.65	-111.73
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5070.00	-53.80	-25.00	-28.80	1.55 V	11	57.93	-111.73

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 21350 (2560.0MHz)	Frequency Range	1GHz ~ 26GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-53.49	-25.00	-28.49	3.26 H	34	58.38	-111.87
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	5120.00	-53.89	-25.00	-28.89	1.63 V	83	57.98	-111.87

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

LTE Band 12 (Channel Bandwidth 1.4MHz)

Mode	TX channel 23017 (699.7MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-61.64	-13.00	-48.64	3.13 H	101	59.43	-121.07
2	2099.10	-51.44	-13.00	-38.44	2.13 H	196	68.87	-120.31
3	2798.80	-59.73	-13.00	-46.73	2.41 H	178	59.46	-119.19
4	3498.50	-54.83	-13.00	-41.83	2.65 H	125	63.41	-118.24
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1399.40	-60.66	-13.00	-47.66	3.18 V	171	60.41	-121.07
2	2099.10	-53.08	-13.00	-40.08	2.61 V	240	67.23	-120.31
3	2798.80	-59.91	-13.00	-46.91	1.61 V	109	59.28	-119.19
4	3498.50	-47.19	-13.00	-34.19	2.23 V	199	71.05	-118.24

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23095 (707.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-60.61	-13.00	-47.61	3.06 H	129	60.53	-121.14
2	2122.50	-54.35	-13.00	-41.35	1.74 H	136	65.65	-120.00
3	2830.00	-59.81	-13.00	-46.81	1.85 H	111	59.37	-119.18
4	3537.50	-49.77	-13.00	-36.77	2.34 H	96	68.32	-118.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-60.36	-13.00	-47.36	2.36 V	284	60.78	-121.14
2	2122.50	-55.98	-13.00	-42.98	1.58 V	116	64.02	-120.00
3	2830.00	-58.99	-13.00	-45.99	3.11 V	74	60.19	-119.18
4	3537.50	-40.07	-13.00	-27.07	2.22 V	193	78.02	-118.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23173 (715.3MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-61.49	-13.00	-48.49	3.35 H	25	59.73	-121.22
2	2145.90	-60.37	-13.00	-47.37	2.31 H	166	59.31	-119.68
3	2861.20	-60.16	-13.00	-47.16	2.06 H	322	58.97	-119.13
4	3576.50	-51.62	-13.00	-38.62	2.71 H	294	66.37	-117.99
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1430.60	-60.85	-13.00	-47.85	3.13 V	342	60.37	-121.22
2	2145.90	-58.82	-13.00	-45.82	3.16 V	41	60.86	-119.68
3	2861.20	-59.76	-13.00	-46.76	2.25 V	331	59.37	-119.13
4	3576.50	-42.80	-13.00	-29.80	2.85 V	186	75.19	-117.99

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 12 (Channel Bandwidth 5MHz)

Mode	TX channel 23035 (701.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-61.24	-13.00	-48.24	3.22 H	109	59.84	-121.08
2	2104.50	-50.96	-13.00	-37.96	2.22 H	191	69.27	-120.23
3	2806.00	-59.46	-13.00	-46.46	2.44 H	172	59.73	-119.19
4	3507.50	-54.47	-13.00	-41.47	2.62 H	124	63.73	-118.20
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1403.00	-60.23	-13.00	-47.23	3.15 V	168	60.85	-121.08
2	2104.50	-52.66	-13.00	-39.66	2.55 V	243	67.57	-120.23
3	2806.00	-59.55	-13.00	-46.55	1.56 V	105	59.64	-119.19
4	3507.50	-46.88	-13.00	-33.88	2.50 V	196	71.32	-118.20

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23095 (707.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-60.25	-13.00	-47.25	3.02 H	127	60.89	-121.14
2	2122.50	-53.91	-13.00	-40.91	1.72 H	134	66.09	-120.00
3	2830.00	-59.40	-13.00	-46.40	1.81 H	107	59.78	-119.18
4	3537.50	-49.31	-13.00	-36.31	2.31 H	86	68.78	-118.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1415.00	-60.08	-13.00	-47.08	2.33 V	291	61.06	-121.14
2	2122.50	-55.63	-13.00	-42.63	1.52 V	108	64.37	-120.00
3	2830.00	-58.63	-13.00	-45.63	3.18 V	63	60.55	-119.18
4	3537.50	-39.70	-13.00	-26.70	2.24 V	186	78.39	-118.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23155 (713.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-61.47	-13.00	-48.47	3.32 H	16	59.73	-121.20
2	2140.50	-59.98	-13.00	-46.98	2.29 H	163	59.77	-119.75
3	2854.00	-59.94	-13.00	-46.94	2.01 H	315	59.23	-119.17
4	3567.50	-51.20	-13.00	-38.20	2.74 H	302	66.80	-118.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1427.00	-60.40	-13.00	-47.40	3.29 V	353	60.80	-121.20
2	2140.50	-58.57	-13.00	-45.57	3.11 V	26	61.18	-119.75
3	2854.00	-59.44	-13.00	-46.44	2.22 V	334	59.73	-119.17
4	3567.50	-42.44	-13.00	-29.44	2.82 V	183	75.56	-118.00

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 12 (Channel Bandwidth 10MHz)

Mode	TX channel 23060 (704.0MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-60.89	-13.00	-47.89	3.19 H	106	60.22	-121.11
2	2112.00	-50.49	-13.00	-37.49	2.31 H	194	69.65	-120.14
3	2816.00	-59.15	-13.00	-46.15	2.41 H	169	60.04	-119.19
4	3520.00	-54.01	-13.00	-41.01	2.66 H	117	64.14	-118.15
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1408.00	-59.96	-13.00	-46.96	3.12 V	164	61.15	-121.11
2	2112.00	-52.15	-13.00	-39.15	2.53 V	251	67.99	-120.14
3	2816.00	-59.21	-13.00	-46.21	1.59 V	102	59.98	-119.19
4	3520.00	-46.44	-13.00	-33.44	2.46 V	193	71.71	-118.15

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23095 (707.5MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1415.00	-59.88	-13.00	-46.88	3.15 H	124	61.26	-121.14
2	2122.50	-53.52	-13.00	-40.52	1.69 H	129	66.48	-120.00
3	2830.00	-59.04	-13.00	-46.04	1.76 H	102	60.14	-119.18
4	3537.50	-49.08	-13.00	-36.08	2.27 H	78	69.01	-118.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1415.00	-59.82	-13.00	-46.82	2.37 V	294	61.32	-121.14
2	2122.50	-55.30	-13.00	-42.30	1.47 V	103	64.70	-120.00
3	2830.00	-58.26	-13.00	-45.26	3.21 V	56	60.92	-119.18
4	3537.50	-39.33	-13.00	-26.33	2.21 V	179	78.76	-118.09

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23130 (711.0MHz)	Frequency Range	1GHz ~ 9GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-60.97	-13.00	-47.97	3.36 H	2	60.21	-121.18
2	2133.00	-59.74	-13.00	-46.74	2.25 H	156	60.12	-119.86
3	2844.00	-59.62	-13.00	-46.62	1.96 H	323	59.55	-119.17
4	3555.00	-50.84	-13.00	-37.84	2.78 H	313	67.19	-118.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-60.76	-13.00	-47.76	3.26 V	348	60.42	-121.18
2	2133.00	-58.33	-13.00	-45.33	3.07 V	19	61.53	-119.86
3	2844.00	-58.92	-13.00	-45.92	2.18 V	329	60.25	-119.17
4	3555.00	-42.00	-13.00	-29.00	2.85 V	180	76.03	-118.03

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 17 (Channel Bandwidth 5MHz)

Mode	TX channel 23755 (706.5MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1413.00	-61.40	-13.00	-48.40	3.24 H	36	59.74	-121.14
2	2119.50	-60.04	-13.00	-47.04	2.12 H	309	60.01	-120.05
3	2826.00	-59.70	-13.00	-46.70	1.61 H	215	59.47	-119.17
4	3532.50	-48.53	-13.00	-35.53	2.66 H	137	69.58	-118.11
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1413.00	-61.38	-13.00	-48.38	1.67 V	302	59.76	-121.14
2	2119.50	-58.57	-13.00	-45.57	1.82 V	95	61.48	-120.05
3	2826.00	-59.08	-13.00	-46.08	3.13 V	126	60.09	-119.17
4	3532.50	-40.29	-13.00	-27.29	2.22 V	191	77.82	-118.11

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23790 (710.0MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-61.99	-13.00	-48.99	3.13 H	74	59.18	-121.17
2	2130.00	-60.50	-13.00	-47.50	1.65 H	24	59.39	-119.89
3	2840.00	-58.81	-13.00	-45.81	1.81 H	192	60.37	-119.18
4	3550.00	-48.45	-13.00	-35.45	2.93 H	146	69.59	-118.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1420.00	-61.45	-13.00	-48.45	2.21 V	265	59.72	-121.17
2	2130.00	-59.04	-13.00	-46.04	1.99 V	14	60.85	-119.89
3	2840.00	-58.15	-13.00	-45.15	2.79 V	11	61.03	-119.18
4	3550.00	-40.52	-13.00	-27.52	1.83 V	211	77.52	-118.04

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23825 (713.5MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1427.00	-61.69	-13.00	-48.69	1.46 H	136	59.51	-121.20
2	2140.50	-57.27	-13.00	-44.27	2.41 H	170	62.48	-119.75
3	2854.00	-59.54	-13.00	-46.54	1.66 H	217	59.63	-119.17
4	3567.50	-50.77	-13.00	-37.77	2.11 H	75	67.23	-118.00
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1427.00	-60.97	-13.00	-47.97	2.19 V	85	60.23	-121.20
2	2140.50	-59.39	-13.00	-46.39	3.32 V	61	60.36	-119.75
3	2854.00	-58.98	-13.00	-45.98	3.16 V	93	60.19	-119.17
4	3567.50	-40.23	-13.00	-27.23	1.72 V	202	77.77	-118.00

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 17 (Channel Bandwidth 10MHz)

Mode	TX channel 23780 (709.0MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1418.00	-61.03	-13.00	-48.03	3.32 H	14	60.13	-121.16
2	2127.00	-59.62	-13.00	-46.62	2.09 H	313	60.32	-119.94
3	2836.00	-59.33	-13.00	-46.33	1.57 H	212	59.85	-119.18
4	3545.00	-48.09	-13.00	-35.09	2.64 H	132	69.97	-118.06
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1418.00	-61.16	-13.00	-48.16	1.56 V	309	60.00	-121.16
2	2127.00	-57.88	-13.00	-44.88	1.87 V	96	62.06	-119.94
3	2836.00	-58.71	-13.00	-45.71	3.09 V	116	60.47	-119.18
4	3545.00	-39.96	-13.00	-26.96	2.24 V	187	78.10	-118.06

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23790 (710.0MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1420.00	-61.58	-13.00	-48.58	3.26 H	55	59.59	-121.17
2	2130.00	-60.05	-13.00	-47.05	1.55 H	13	59.84	-119.89
3	2840.00	-58.40	-13.00	-45.40	1.78 H	186	60.78	-119.18
4	3550.00	-48.13	-13.00	-35.13	2.99 H	141	69.91	-118.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	1420.00	-61.00	-13.00	-48.00	2.23 V	268	60.17	-121.17
2	2130.00	-58.81	-13.00	-45.81	1.97 V	2	61.08	-119.89
3	2840.00	-57.96	-13.00	-44.96	2.76 V	2	61.22	-119.18
4	3550.00	-40.21	-13.00	-27.21	1.78 V	210	77.83	-118.04

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

Mode	TX channel 23800 (711.0MHz)	Frequency Range	1GHz ~ 8GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-61.33	-13.00	-48.33	1.43 H	131	59.85	-121.18
2	2133.00	-57.05	-13.00	-44.05	2.38 H	164	62.81	-119.86
3	2844.00	-59.25	-13.00	-46.25	1.69 H	212	59.92	-119.17
4	3555.00	-50.48	-13.00	-37.48	2.33 H	70	67.55	-118.03
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	ERP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	1422.00	-60.60	-13.00	-47.60	2.16 V	81	60.58	-121.18
2	2133.00	-59.16	-13.00	-46.16	3.28 V	53	60.70	-119.86
3	2844.00	-58.63	-13.00	-45.63	3.11 V	82	60.54	-119.17
4	3555.00	-39.95	-13.00	-26.95	1.76 V	200	78.08	-118.03

Remarks:

1. $ERP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8 - 2.15$
3. $Margin\ value = ERP - Limit\ value$
4. The other ERP levels were very low against the limit.

LTE Band 66 (Channel Bandwidth 1.4MHz)

Mode	TX channel 131979 (1710.7MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-58.24	-13.00	-45.24	2.47 H	173	58.23	-116.47
2	5132.10	-54.88	-13.00	-41.88	2.35 H	116	57.02	-111.90
3	6842.80	-53.33	-13.00	-40.33	1.75 H	83	54.76	-108.09
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3421.40	-49.11	-13.00	-36.11	1.45 V	216	67.36	-116.47
2	5132.10	-51.43	-13.00	-38.43	1.39 V	205	60.47	-111.90
3	6842.80	-50.86	-13.00	-37.86	2.06 V	319	57.23	-108.09

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. Margin value = EIRP – Limit value
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-55.62	-13.00	-42.62	1.63 H	165	60.54	-116.16
2	5235.00	-52.31	-13.00	-39.31	3.39 H	307	59.58	-111.89
3	6980.00	-50.12	-13.00	-37.12	3.04 H	88	57.55	-107.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-44.63	-13.00	-31.63	2.56 V	220	71.53	-116.16
2	5235.00	-47.30	-13.00	-34.30	3.23 V	191	64.59	-111.89
3	6980.00	-47.65	-13.00	-34.65	3.23 V	267	60.02	-107.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132665 (1779.3MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-56.64	-13.00	-43.64	3.41 H	209	59.23	-115.87
2	5337.90	-55.74	-13.00	-42.74	2.11 H	314	56.08	-111.82
3	7117.20	-50.44	-13.00	-37.44	2.49 H	175	56.26	-106.70
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3558.60	-43.68	-13.00	-30.68	2.42 V	209	72.19	-115.87
2	5337.90	-52.48	-13.00	-39.48	2.11 V	173	59.34	-111.82
3	7117.20	-51.61	-13.00	-38.61	3.03 V	40	55.09	-106.70

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 66 (Channel Bandwidth 5MHz)

Mode	TX channel 131997 (1712.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-57.81	-13.00	-44.81	2.44 H	169	58.65	-116.46
2	5137.50	-54.60	-13.00	-41.60	2.33 H	111	57.33	-111.93
3	6850.00	-52.92	-13.00	-39.92	1.71 H	81	55.12	-108.04
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3425.00	-48.73	-13.00	-35.73	1.41 V	212	67.73	-116.46
2	5137.50	-51.07	-13.00	-38.07	1.35 V	202	60.86	-111.93
3	6850.00	-50.52	-13.00	-37.52	2.03 V	315	57.52	-108.04

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-55.23	-13.00	-42.23	1.55 H	162	60.93	-116.16
2	5235.00	-51.93	-13.00	-38.93	3.36 H	328	59.96	-111.89
3	6980.00	-49.76	-13.00	-36.76	3.01 H	79	57.91	-107.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-44.30	-13.00	-31.30	2.51 V	212	71.86	-116.16
2	5235.00	-47.01	-13.00	-34.01	3.21 V	183	64.88	-111.89
3	6980.00	-47.32	-13.00	-34.32	3.19 V	264	60.35	-107.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132647 (1777.5MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	3555.00	-56.34	-13.00	-43.34	3.36 H	204	59.54	-115.88
2	5332.50	-55.47	-13.00	-42.47	2.08 H	304	56.37	-111.84
3	7110.00	-49.91	-13.00	-36.91	2.44 H	171	56.78	-106.69
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBUV)	Correction Factor (dB/m)
1	3555.00	-43.35	-13.00	-30.35	2.45 V	203	72.53	-115.88
2	5332.50	-51.88	-13.00	-38.88	2.05 V	169	59.96	-111.84
3	7110.00	-51.24	-13.00	-38.24	2.93 V	31	55.45	-106.69

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

LTE Band 66 (Channel Bandwidth 20MHz)

Mode	TX channel 132072 (1720.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-57.38	-13.00	-44.38	2.41 H	166	59.06	-116.44
2	5160.00	-54.26	-13.00	-41.26	2.37 H	107	57.70	-111.96
3	6880.00	-52.37	-13.00	-39.37	1.68 H	67	55.51	-107.88
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3440.00	-48.44	-13.00	-35.44	1.37 V	209	68.00	-116.44
2	5160.00	-50.72	-13.00	-37.72	1.31 V	198	61.24	-111.96
3	6880.00	-49.85	-13.00	-36.85	2.05 V	307	58.03	-107.88

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132322 (1745.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-54.82	-13.00	-41.82	1.53 H	160	61.34	-116.16
2	5235.00	-51.57	-13.00	-38.57	3.32 H	335	60.32	-111.89
3	6980.00	-49.42	-13.00	-36.42	2.95 H	74	58.25	-107.67
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3490.00	-44.01	-13.00	-31.01	2.46 V	205	72.15	-116.16
2	5235.00	-46.66	-13.00	-33.66	3.33 V	179	65.23	-111.89
3	6980.00	-46.91	-13.00	-33.91	3.15 V	261	60.76	-107.67

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

Mode	TX channel 132572 (1770.0MHz)	Frequency Range	1GHz ~ 18GHz
Environmental Conditions	22deg. C, 64%RH	Input Power	4.0Vdc
Tested By	Vincent Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-55.94	-13.00	-42.94	3.42 H	201	59.99	-115.93
2	5310.00	-55.17	-13.00	-42.17	2.03 H	301	56.74	-111.91
3	7080.00	-49.70	-13.00	-36.70	2.41 H	166	57.12	-106.82
Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	EIRP (dBm)	Limit (dBm)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	3540.00	-43.09	-13.00	-30.09	2.43 V	199	72.84	-115.93
2	5310.00	-51.57	-13.00	-38.57	2.01 V	164	60.34	-111.91
3	7080.00	-51.09	-13.00	-38.09	2.86 V	2	55.73	-106.82

Remarks:

1. $EIRP(dBm) = Raw\ Value(dBuV) + Correction\ Factor(dB/m)$
2. $Correction\ Factor(dB/m) = Antenna\ Factor(dB/m) + Cable\ Factor(dB) - Pre-Amplifier\ Factor(dB) + 20\log(D) - 104.8$
3. $Margin\ value = EIRP - Limit\ value$
4. The other EIRP levels were very low against the limit.

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---