


Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 225° / Mode 1		


Horizontal

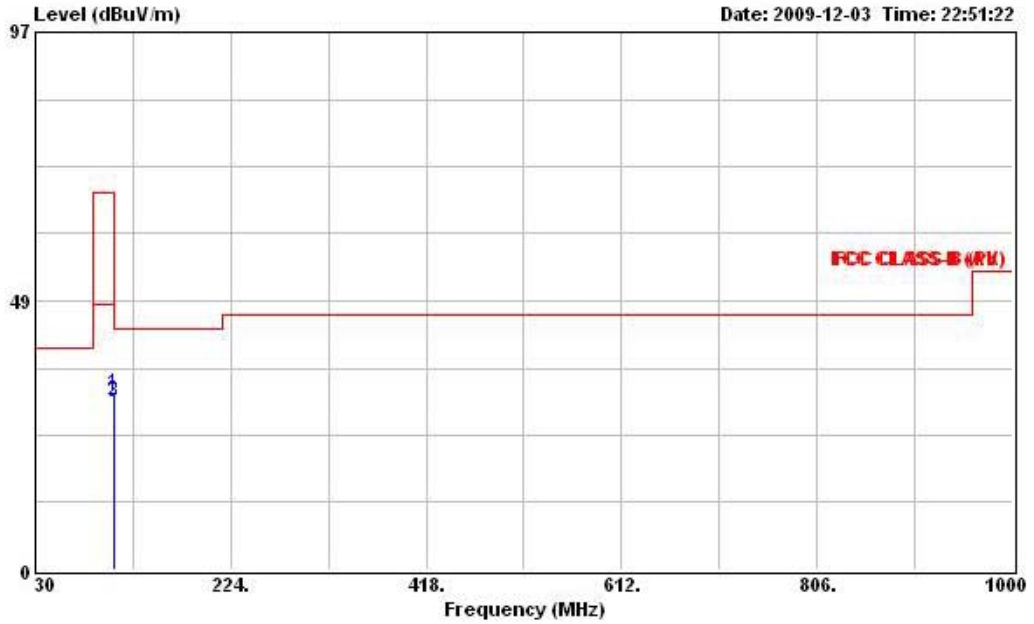

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD MONDEO  
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	31.67	-36.33	68.00	45.08	2.37	12.28	28.06	Peak	400	---
2	107.500	30.63	-37.37	68.00	44.04	2.37	12.28	28.06	QP	400	---
3	107.500	30.29	-17.71	48.00	43.70	2.37	12.28	28.06	Average	400	---

Vertical

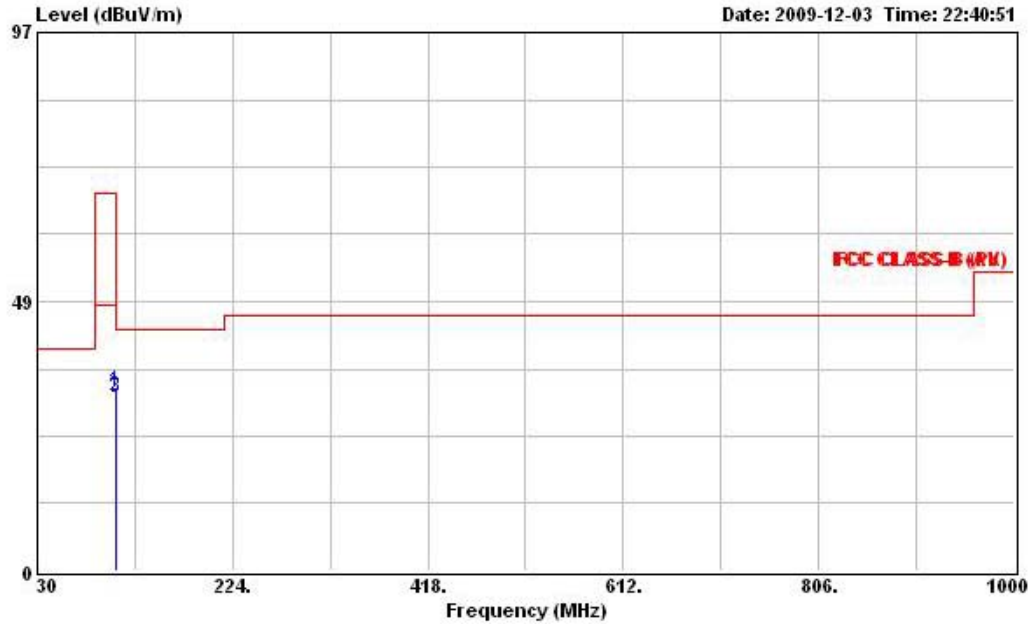


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD MONDEO  
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	32.48	-35.52	68.00	45.89	2.37	12.28	28.06	Peak	100	---
2	107.500	31.55	-36.45	68.00	44.96	2.37	12.28	28.06	QP	100	---
3	107.500	31.23	-16.77	48.00	44.64	2.37	12.28	28.06	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 270° / Mode 1		


Horizontal

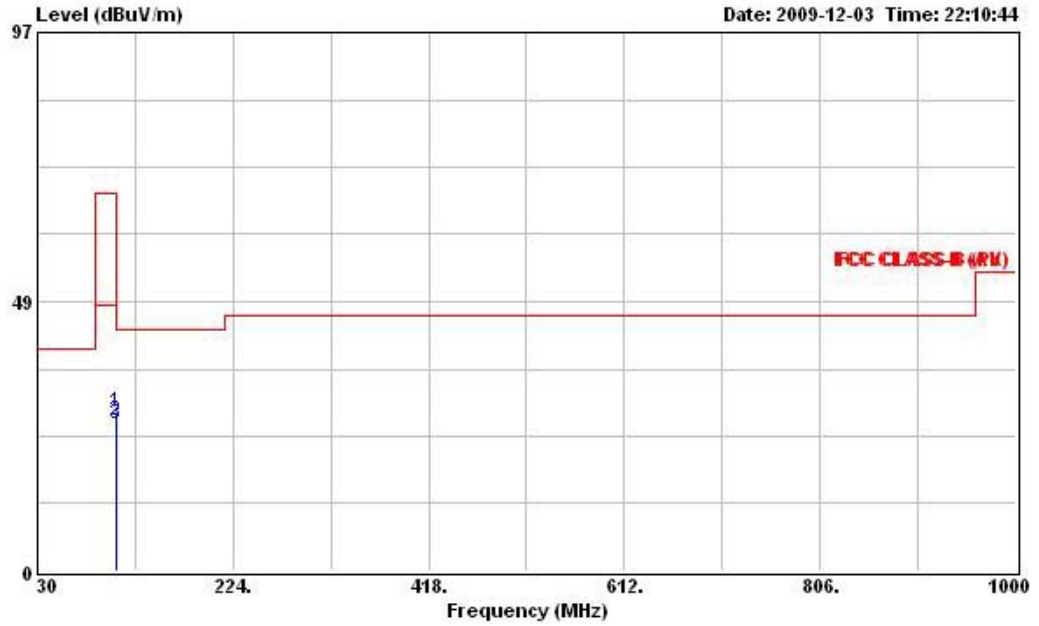

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : FORD MONDEO  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	28.59	-39.41	68.00	42.00	2.37	12.28	28.06	Peak	400	---
2	107.500	27.01	-40.99	68.00	40.42	2.37	12.28	28.06	QP	400	---
3	107.500	26.44	-21.56	48.00	39.85	2.37	12.28	28.06	Average	400	---

Vertical

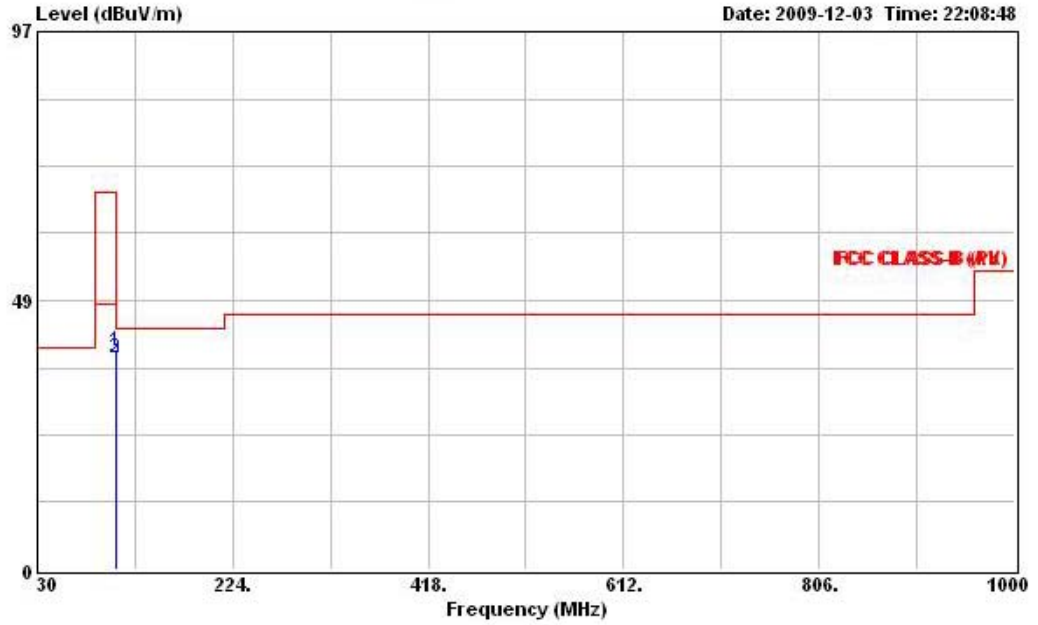


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD MONDEO  
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	39.29	-28.71	68.00	52.70	2.37	12.28	28.06	Peak	100	---
2	107.500	38.21	-29.79	68.00	51.62	2.37	12.28	28.06	QP	100	---
3	107.500	38.05	-9.95	48.00	51.46	2.37	12.28	28.06	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 315° / Mode 1		


Horizontal

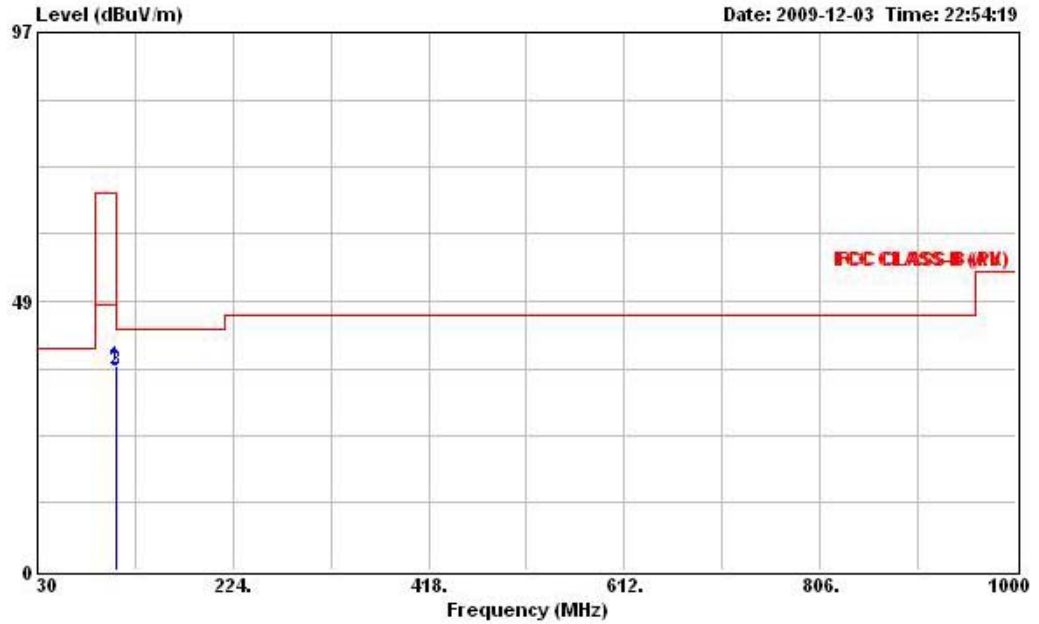

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD MONDEO  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	36.87	-31.13	68.00	50.28	2.37	12.28	28.06	Peak	272	---
2	107.500	36.16	-31.84	68.00	49.57	2.37	12.28	28.06	QP	272	---
3	107.500	35.89	-12.11	48.00	49.30	2.37	12.28	28.06	Average	272	---

Vertical

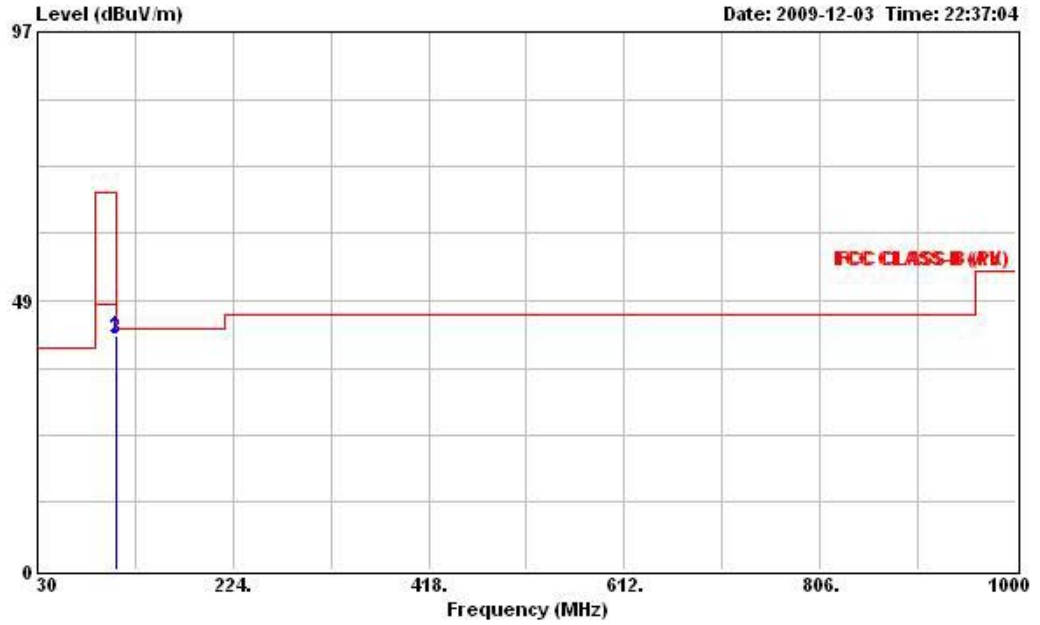


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : FORD MONDEO  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	42.17	-25.83	68.00	55.58	2.37	12.28	28.06	Peak	100	---
2	107.500	41.75	-26.25	68.00	55.16	2.37	12.28	28.06	QP	100	---
3	107.500	41.62	-6.38	48.00	55.03	2.37	12.28	28.06	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 0° / Mode 2		


Horizontal

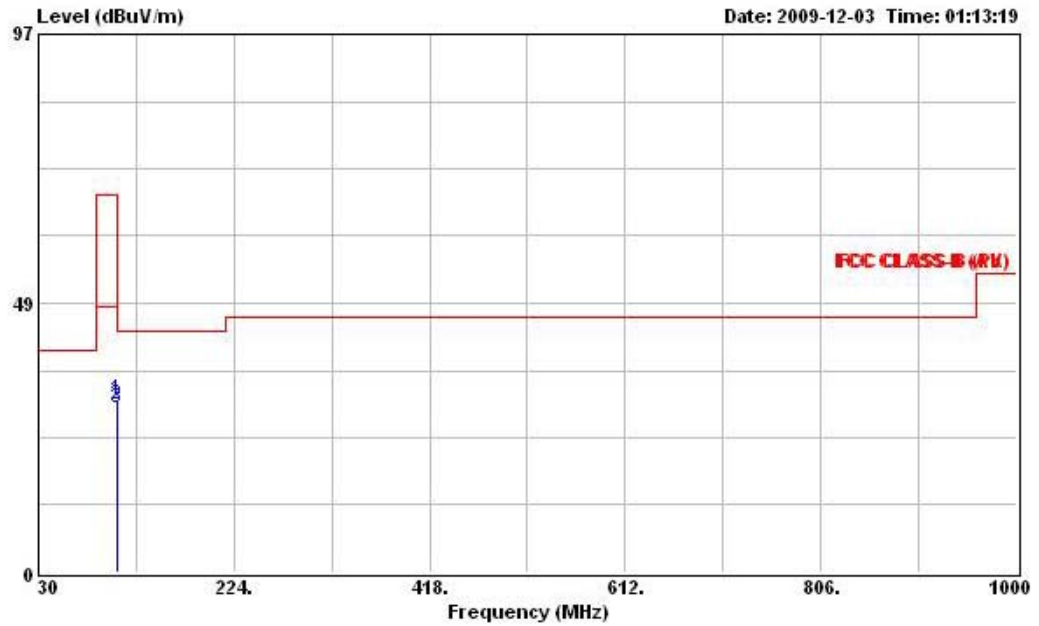

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.490	31.13	-36.87	68.00	44.54	2.37	12.28	28.06	Peak	400	---
2	107.490	30.26	-37.74	68.00	43.67	2.37	12.28	28.06	QP	400	---
3	107.490	29.56	-18.44	48.00	42.97	2.37	12.28	28.06	Average	400	---

Vertical

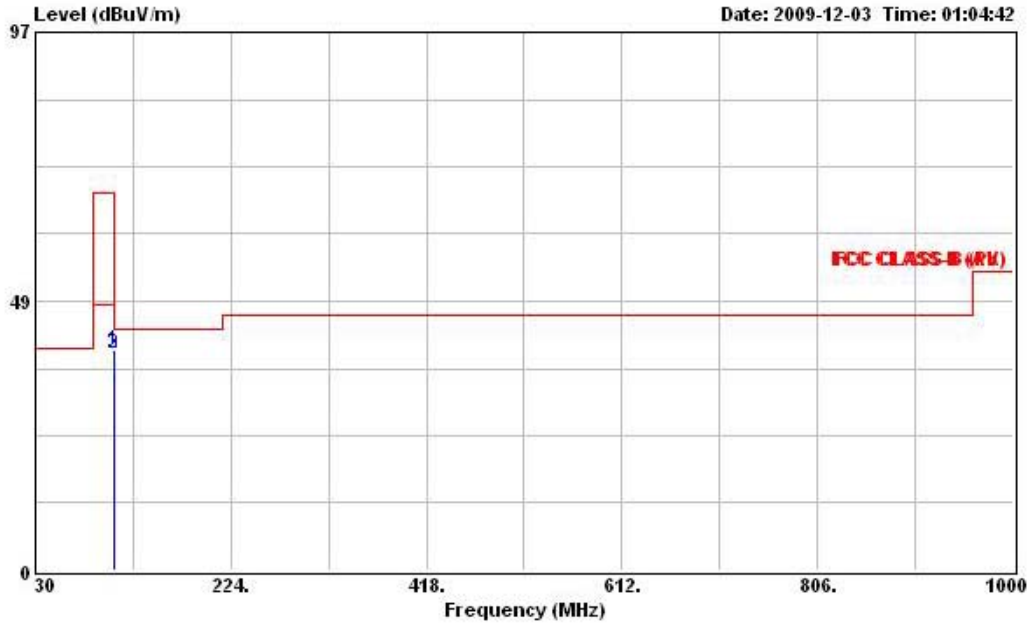


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.490	39.56	-28.44	68.00	52.97	2.37	12.28	28.06	Peak	100	---
2	107.490	39.09	-28.91	68.00	52.50	2.37	12.28	28.06	QP	100	---
3	107.490	39.01	-8.99	48.00	52.42	2.37	12.28	28.06	Average	100	---



Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 45° / Mode 2		


Horizontal

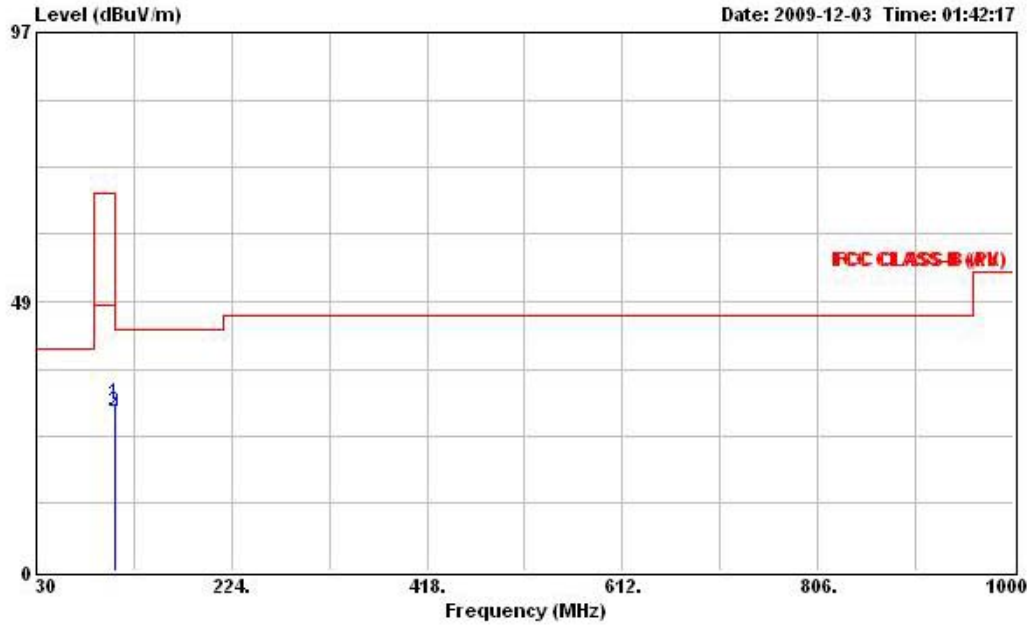

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 45度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.490	30.23	-37.77	68.00	43.64	2.37	12.28	28.06	Peak	237	---
2	107.490	28.59	-39.41	68.00	42.00	2.37	12.28	28.06	QP	237	---
3	107.490	28.53	-19.47	48.00	41.94	2.37	12.28	28.06	Average	237	---

Vertical

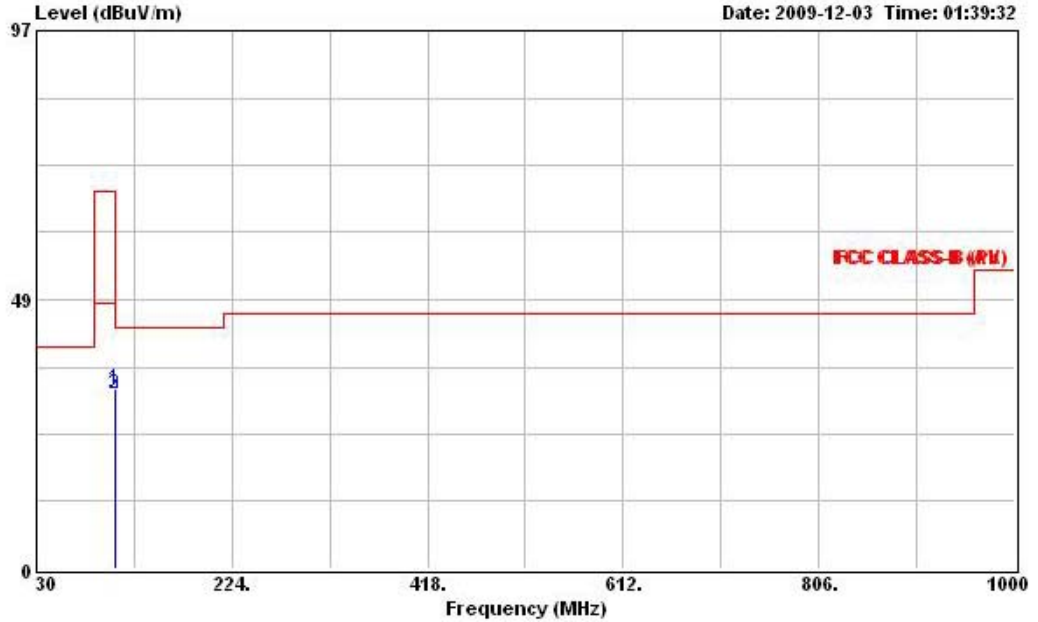


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 45度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.480	32.47	-35.53	68.00	45.88	2.37	12.28	28.06	Peak	400	---
2	107.480	31.59	-36.41	68.00	45.00	2.37	12.28	28.06	QP	400	---
3	107.480	31.35	-16.65	48.00	44.76	2.37	12.28	28.06	Average	400	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 135° / Mode 2		


Horizontal

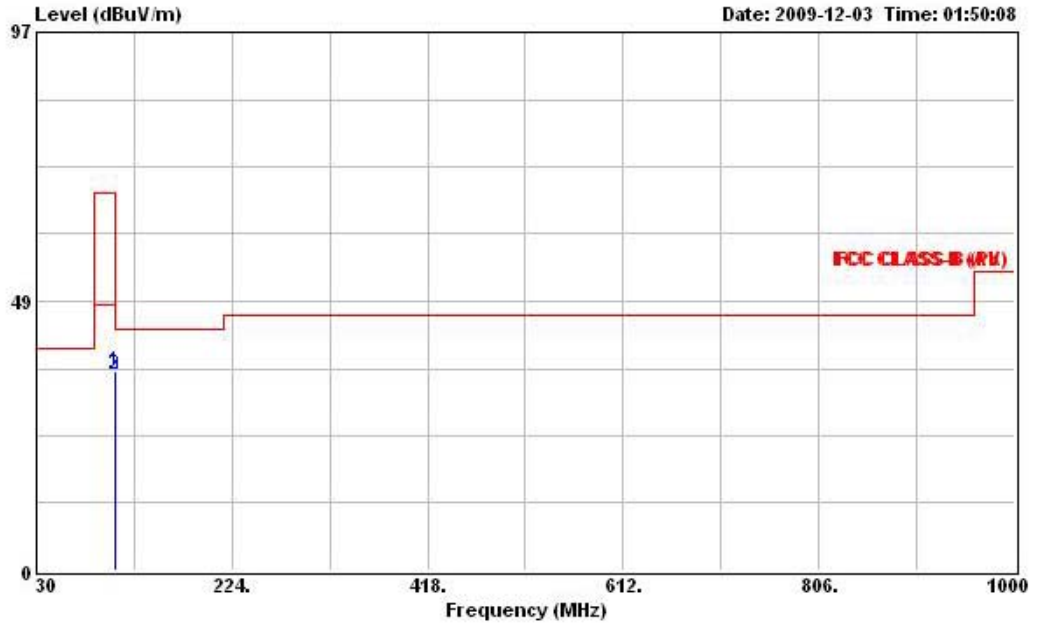

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.480	35.92	-32.08	68.00	49.33	2.37	12.28	28.06	Peak	168	---
2	107.480	35.27	-32.73	68.00	48.68	2.37	12.28	28.06	QP	168	---
3	107.480	35.12	-12.88	48.00	48.53	2.37	12.28	28.06	Average	168	---

Vertical

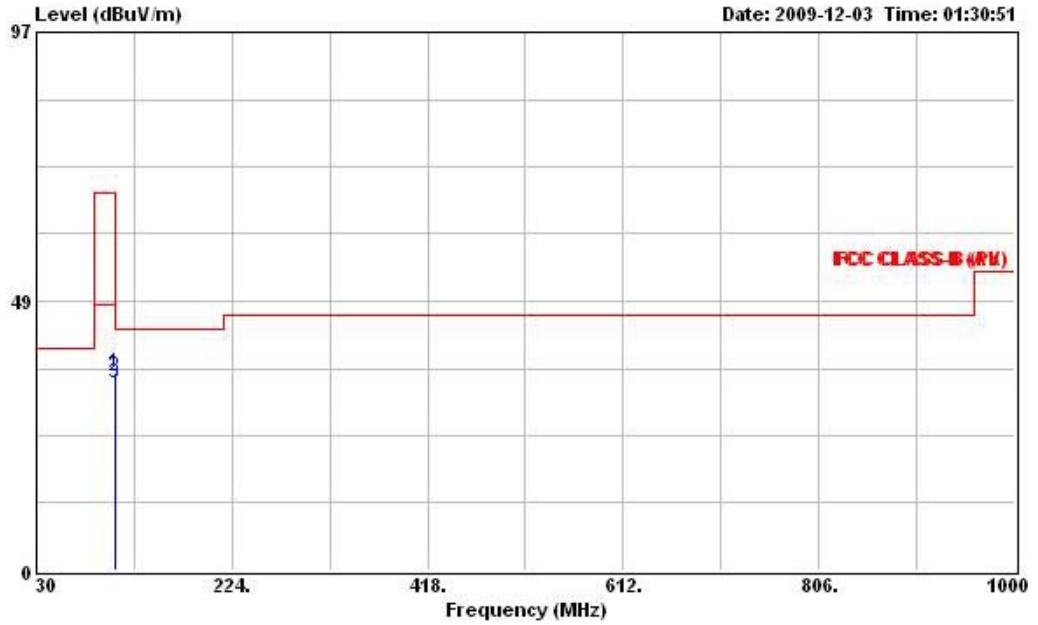


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.490	35.62	-32.38	68.00	49.03	2.37	12.28	28.06	Peak	100	---
2	107.490	34.93	-33.07	68.00	48.34	2.37	12.28	28.06	QP	100	---
3	107.490	33.67	-14.33	48.00	47.08	2.37	12.28	28.06	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 180° / Mode 2		


Horizontal

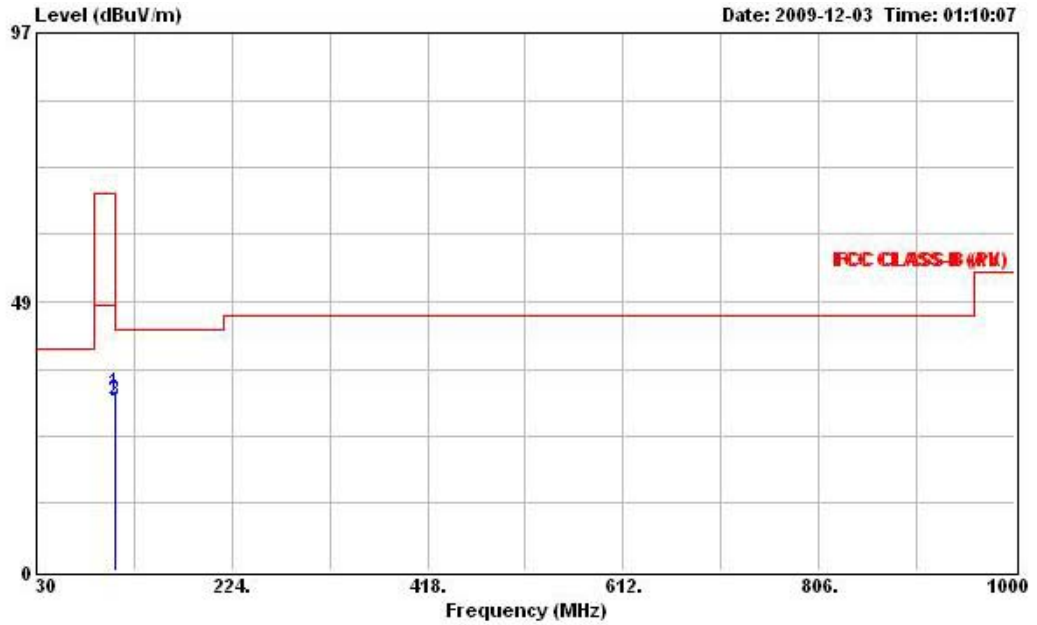

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.490	32.28	-35.72	68.00	45.69	2.37	12.28	28.06	Peak	154	---
2	107.490	30.95	-37.05	68.00	44.36	2.37	12.28	28.06	QP	154	---
3	107.490	30.61	-17.39	48.00	44.02	2.37	12.28	28.06	Average	154	---

Vertical

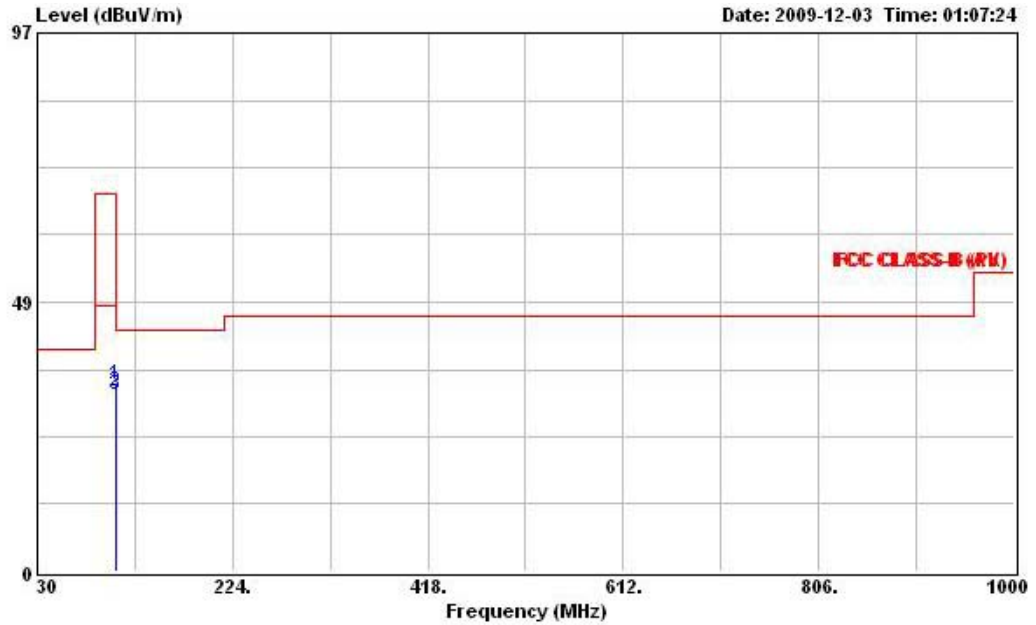


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.490	33.60	-34.40	68.00	47.01	2.37	12.28	28.06	Peak	104	---
2	107.490	32.35	-35.65	68.00	45.76	2.37	12.28	28.06	QP	104	---
3	107.490	31.80	-16.20	48.00	45.21	2.37	12.28	28.06	Average	104	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 225° / Mode 2		


Horizontal

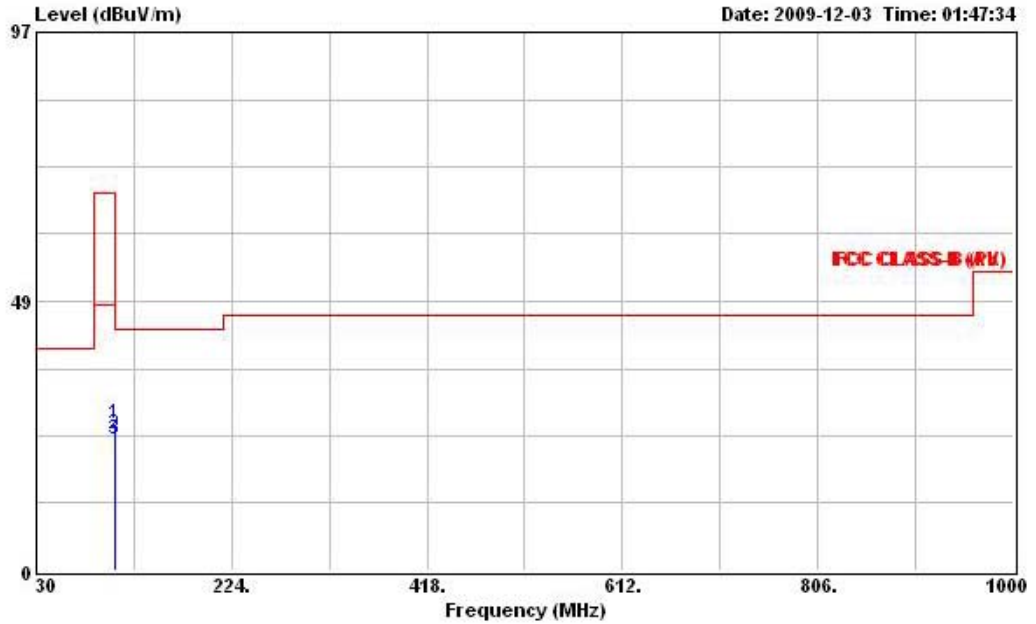

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.490	26.35	-41.65	68.00	39.76	2.37	12.28	28.06	Peak	250	---
2	107.490	24.48	-43.52	68.00	37.89	2.37	12.28	28.06	QP	250	---
3	107.490	23.73	-24.27	48.00	37.14	2.37	12.28	28.06	Average	250	---

Vertical

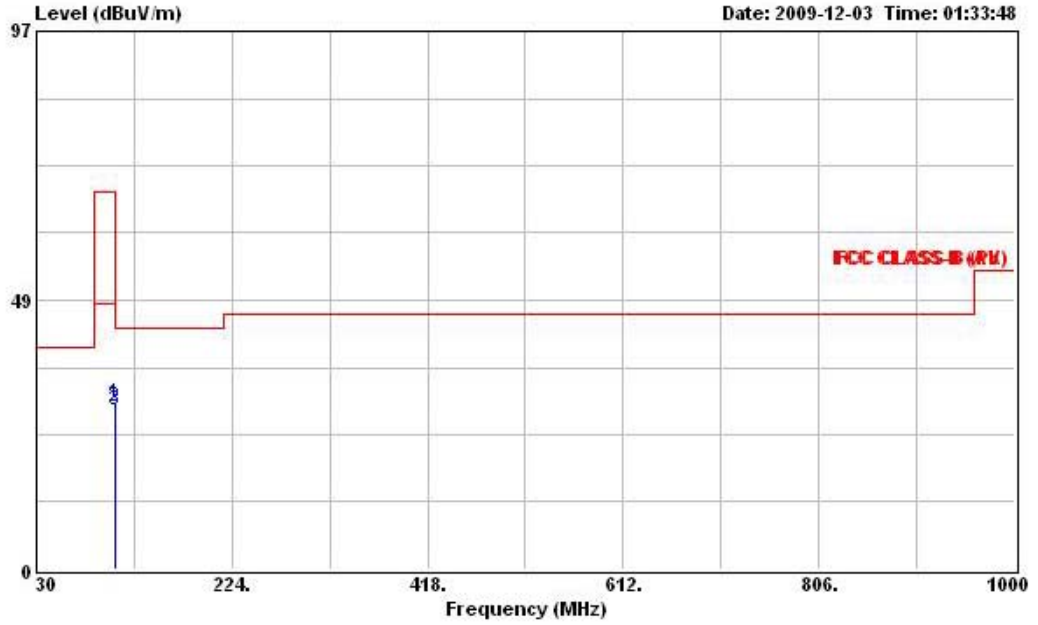


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.480	30.01	-37.99	68.00	43.42	2.37	12.28	28.06	Peak	100	---
2	107.480	29.26	-38.74	68.00	42.67	2.37	12.28	28.06	QP	100	---
3	107.480	28.68	-19.32	48.00	42.09	2.37	12.28	28.06	Average	100	---



Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 270° / Mode 2		


Horizontal

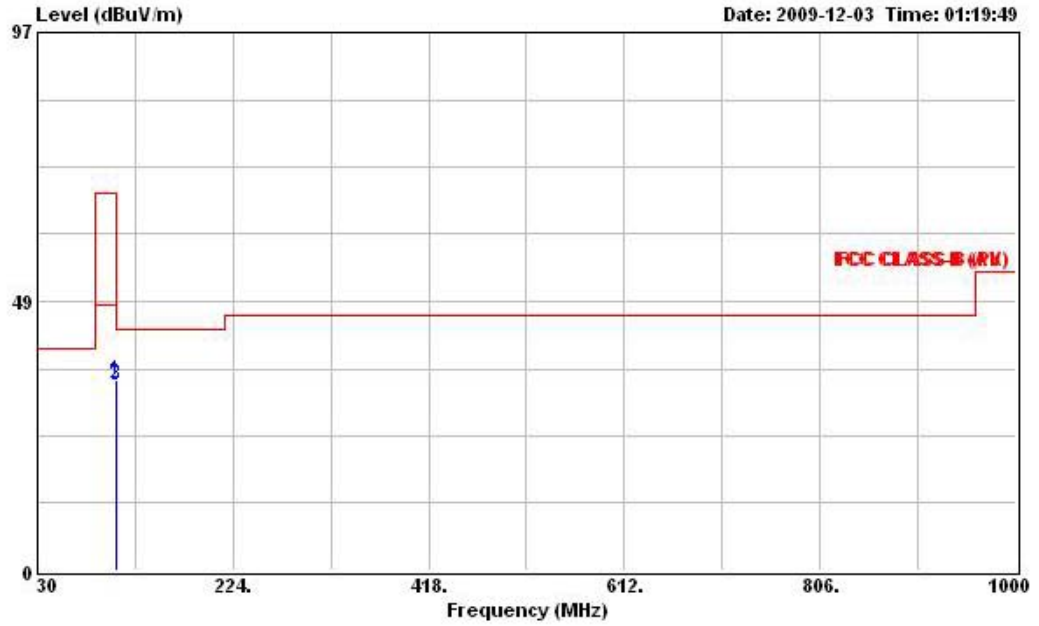

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.480	34.21	-33.79	68.00	47.62	2.37	12.28	28.06	Peak	267	---
2	107.480	33.57	-34.43	68.00	46.98	2.37	12.28	28.06	QP	267	---
3	107.480	33.35	-14.65	48.00	46.76	2.37	12.28	28.06	Average	267	---

Vertical

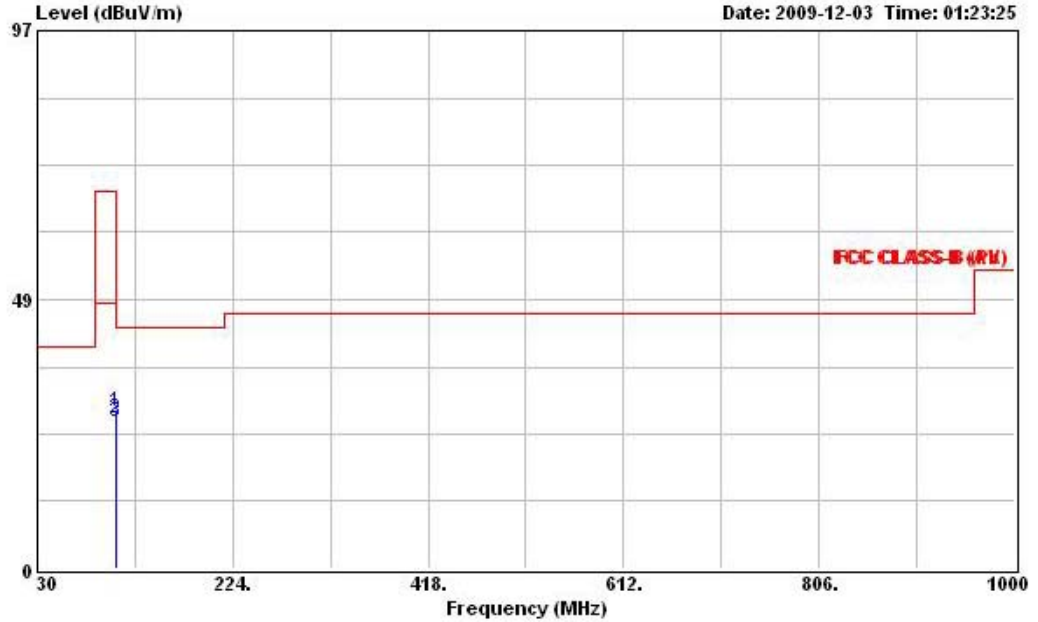


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.490	28.26	-39.74	68.00	41.67	2.37	12.28	28.06	Peak	102	---
2	107.490	27.10	-40.90	68.00	40.51	2.37	12.28	28.06	QP	102	---
3	107.490	26.54	-21.46	48.00	39.95	2.37	12.28	28.06	Average	102	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 315° / Mode 2		


Horizontal

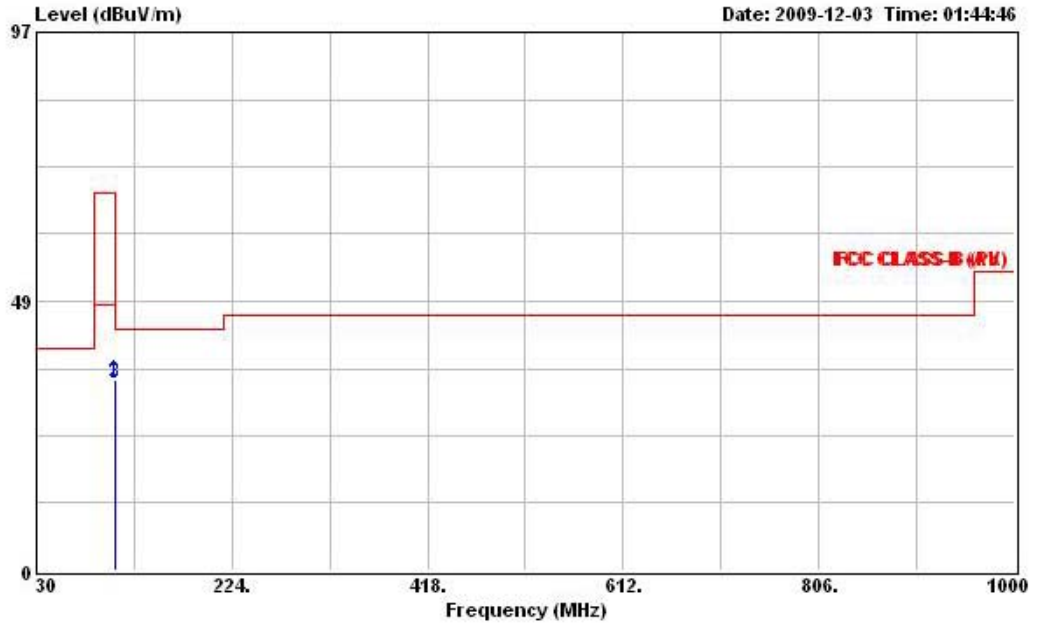

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.480	34.48	-33.52	68.00	47.89	2.37	12.28	28.06	Peak	363	---
2	107.480	34.00	-34.00	68.00	47.41	2.37	12.28	28.06	QP	363	---
3	107.480	33.83	-14.17	48.00	47.24	2.37	12.28	28.06	Average	363	---

Vertical

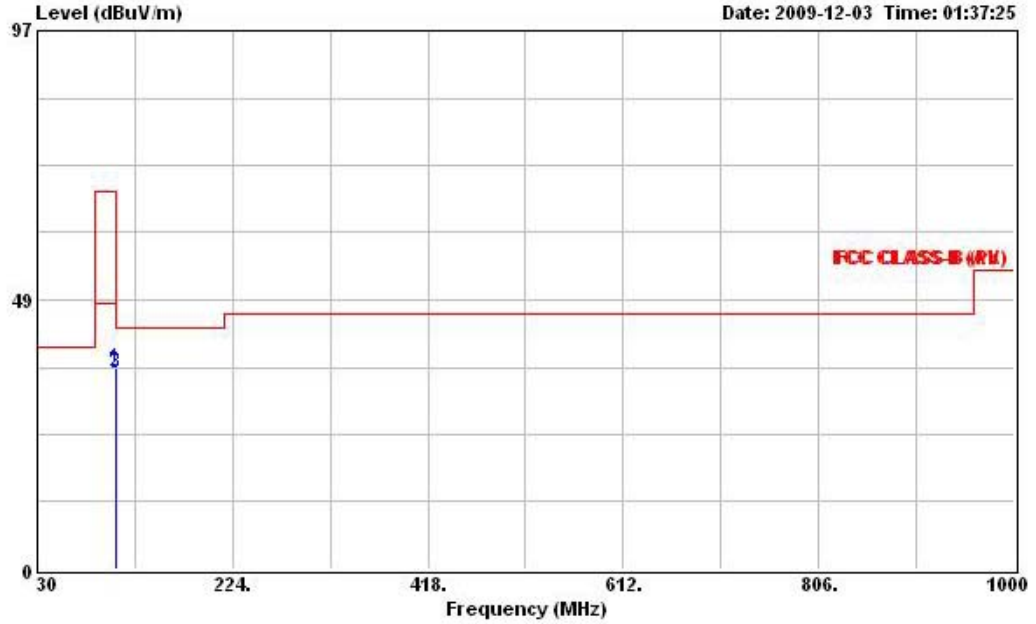


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : TOYOTA COROLLA  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.480	36.21	-31.79	68.00	49.62	2.37	12.28	28.06	Peak	100	---
2	107.480	35.51	-32.49	68.00	48.92	2.37	12.28	28.06	QP	100	---
3	107.480	35.24	-12.76	48.00	48.65	2.37	12.28	28.06	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 0° / Mode 3		


Horizontal

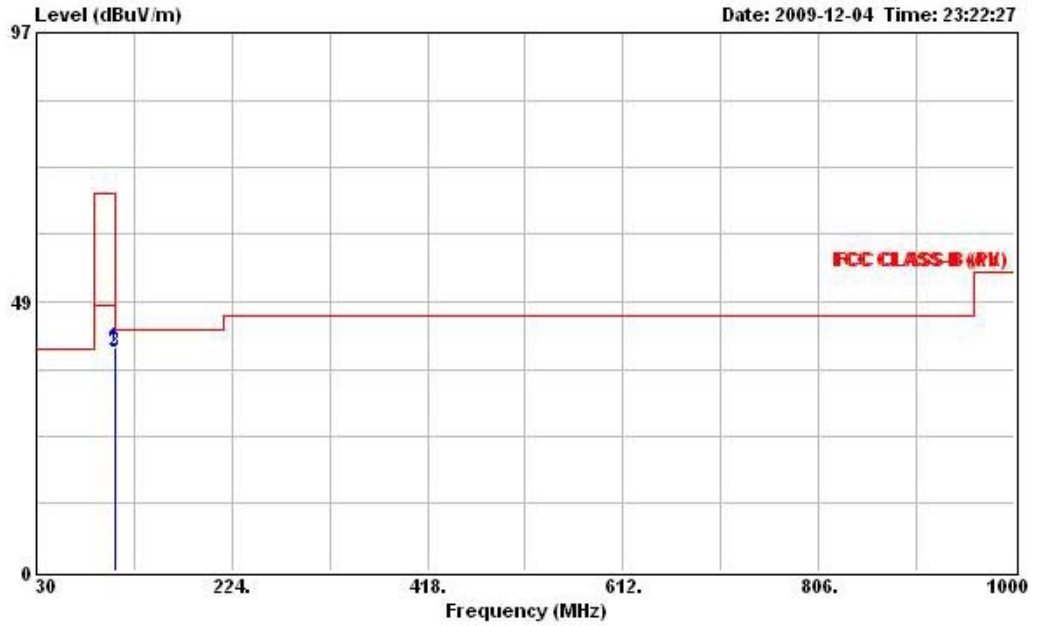

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 0度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	40.17	-27.83	68.00	53.58	2.37	12.28	28.06	Peak	304	---
2	107.500	39.65	-28.35	68.00	53.06	2.37	12.28	28.06	QP	304	---
3	107.500	39.36	-8.64	48.00	52.77	2.37	12.28	28.06	Average	304	---

Vertical

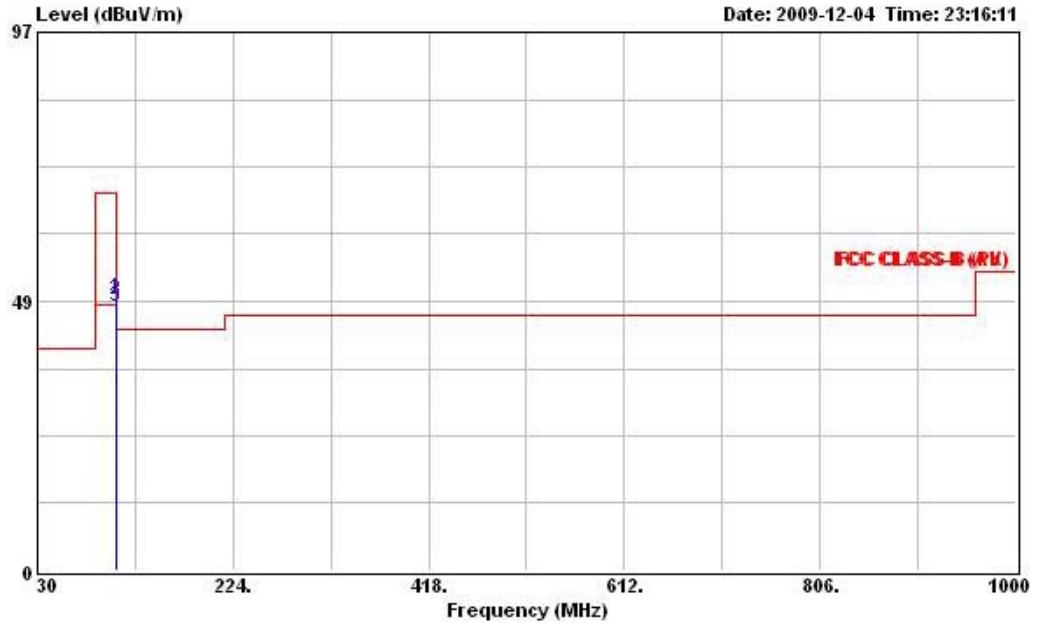


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : FORD EXION  
 Memo : 0度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	49.13	-18.87	68.00	62.54	2.37	12.28	28.06	Peak	100	---
2	107.500	48.82	-19.18	68.00	62.23	2.37	12.28	28.06	QP	100	---
3	107.500	47.43	-0.57	48.00	60.84	2.37	12.28	28.06	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 45° / Mode 3		


Horizontal

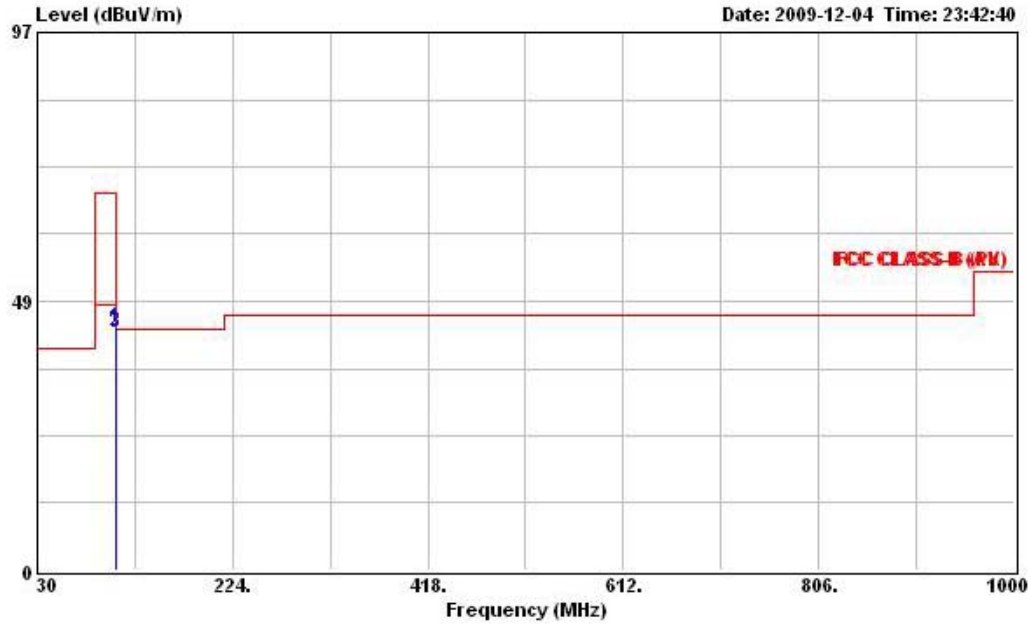

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD EXION  
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	43.68	-24.32	68.00	57.09	2.37	12.28	28.06	Peak	400	---
2	107.500	43.28	-24.72	68.00	56.69	2.37	12.28	28.06	QP	400	---
3	107.500	42.97	-5.03	48.00	56.38	2.37	12.28	28.06	Average	400	---

Vertical

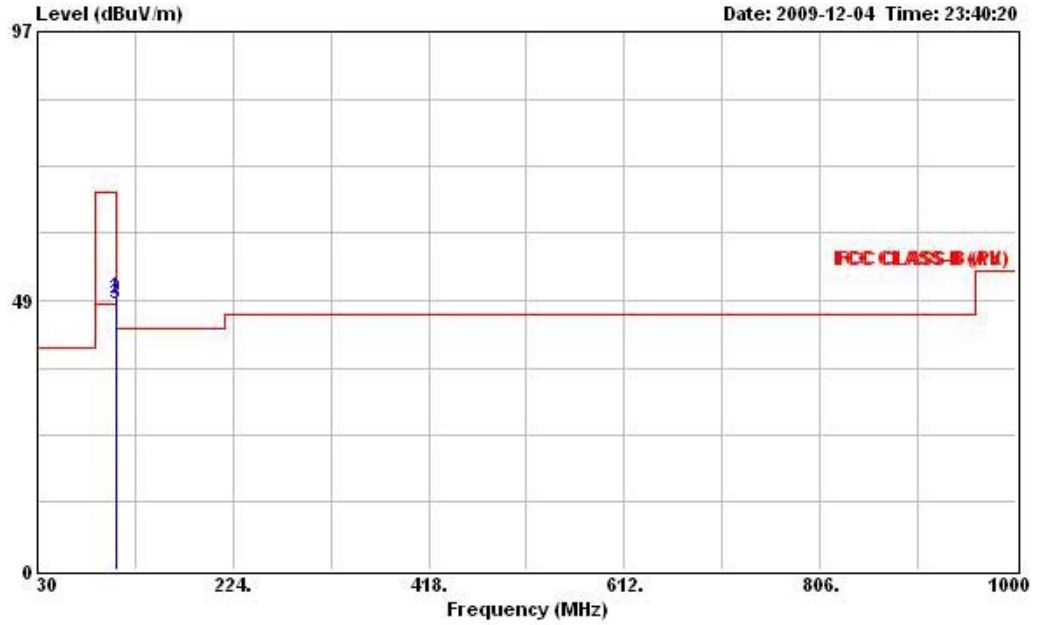


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 45度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	49.03	-18.97	68.00	62.44	2.37	12.28	28.06	Peak	100	---
2	107.500	48.74	-19.26	68.00	62.15	2.37	12.28	28.06	QP	100	---
3	107.500	47.91	-0.09	48.00	61.32	2.37	12.28	28.06	Average	100	---



Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 90° / Mode 3		


Horizontal

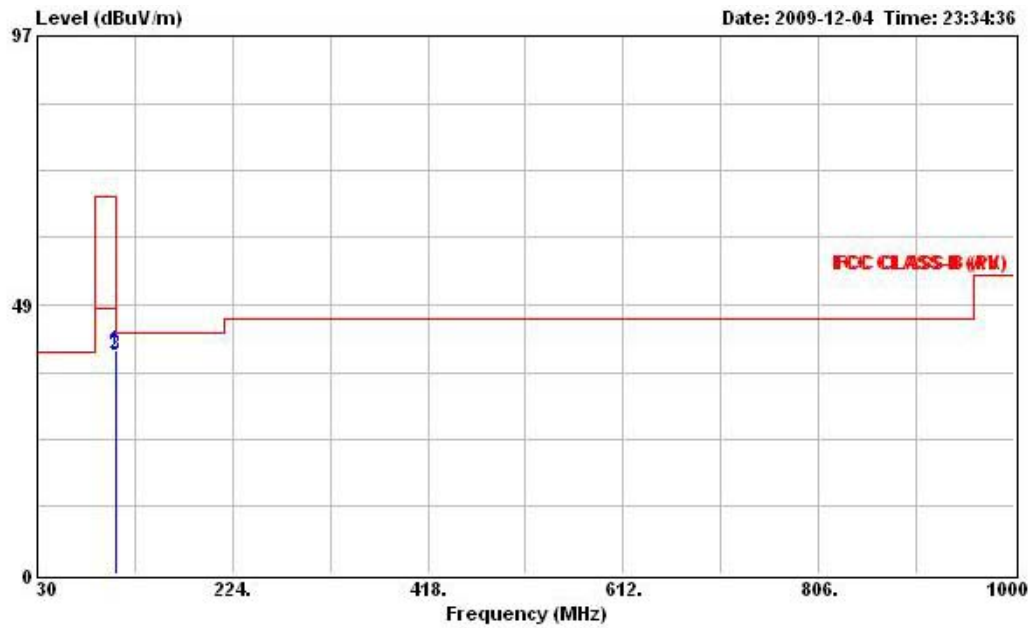

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 90度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	40.18	-27.82	68.00	53.59	2.37	12.28	28.06	Peak	280	---
2	107.500	39.77	-28.23	68.00	53.18	2.37	12.28	28.06	QP	280	---
3	107.500	39.44	-8.56	48.00	52.85	2.37	12.28	28.06	Average	280	---

Vertical

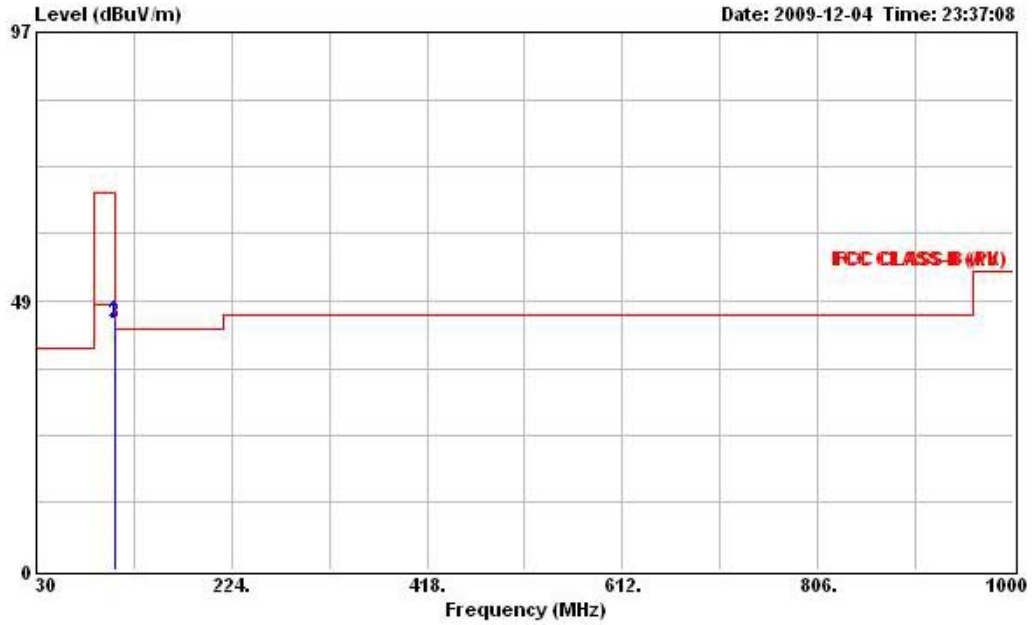


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 90度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	45.11	-22.89	68.00	58.52	2.37	12.28	28.06	Peak	100	---
2	107.500	44.84	-23.16	68.00	58.25	2.37	12.28	28.06	QP	100	---
3	107.500	44.55	-3.45	48.00	57.96	2.37	12.28	28.06	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 135° / Mode 3		


Horizontal

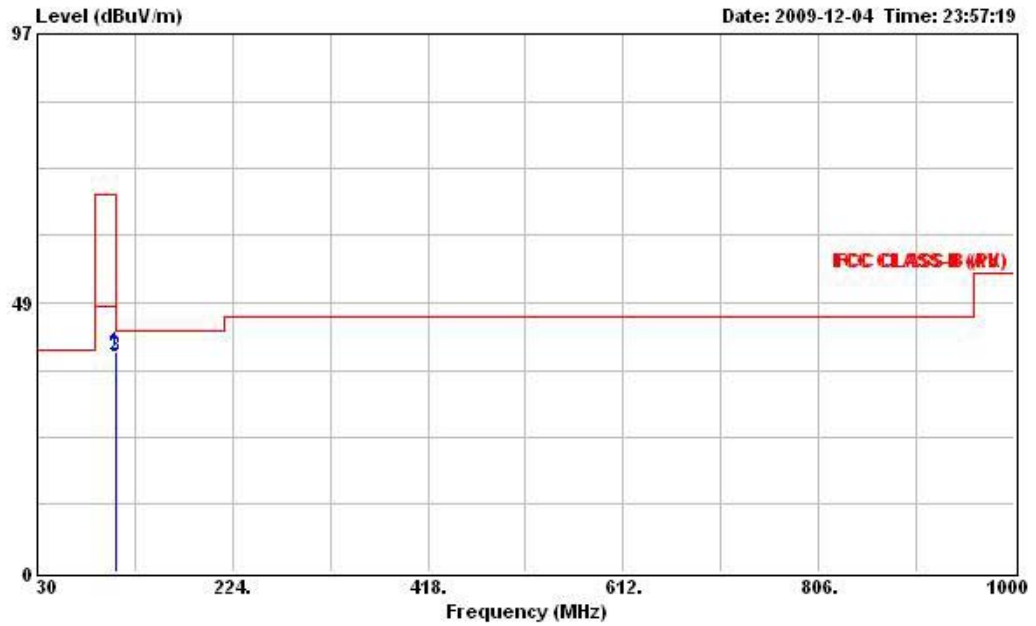

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	39.82	-28.18	68.00	53.23	2.37	12.28	28.06	Peak	312	---
2	107.500	39.15	-28.85	68.00	52.56	2.37	12.28	28.06	QP	312	---
3	107.500	38.85	-9.15	48.00	52.26	2.37	12.28	28.06	Average	312	---

Vertical

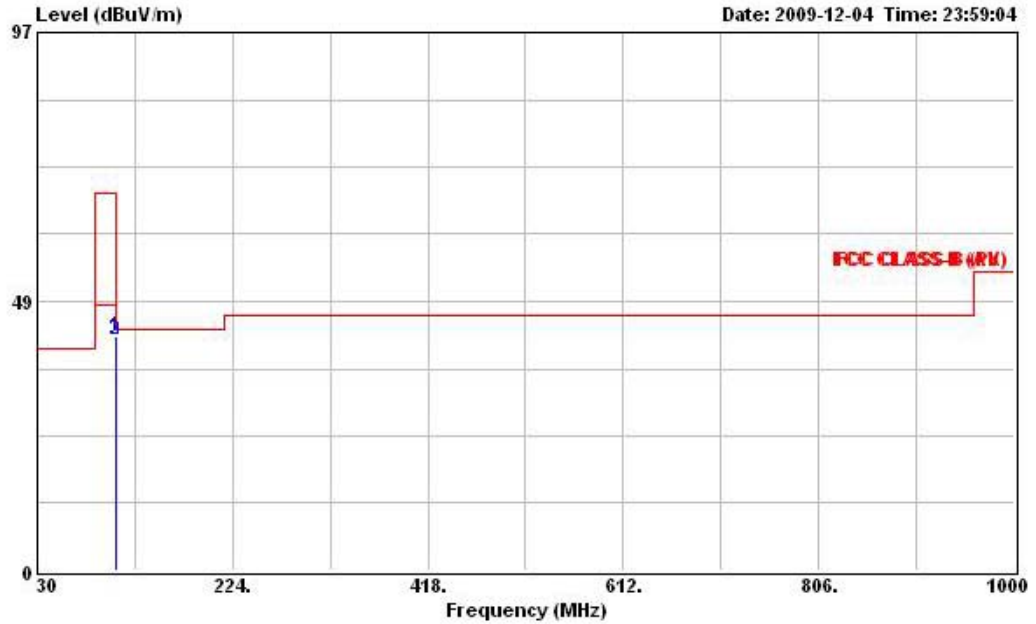


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD EXION  
 Memo : 135度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	42.07	-25.93	68.00	55.48	2.37	12.28	28.06	Peak	100	---
2	107.500	41.72	-26.28	68.00	55.13	2.37	12.28	28.06	QP	100	---
3	107.500	41.43	-6.57	48.00	54.84	2.37	12.28	28.06	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 180° / Mode 3		


Horizontal

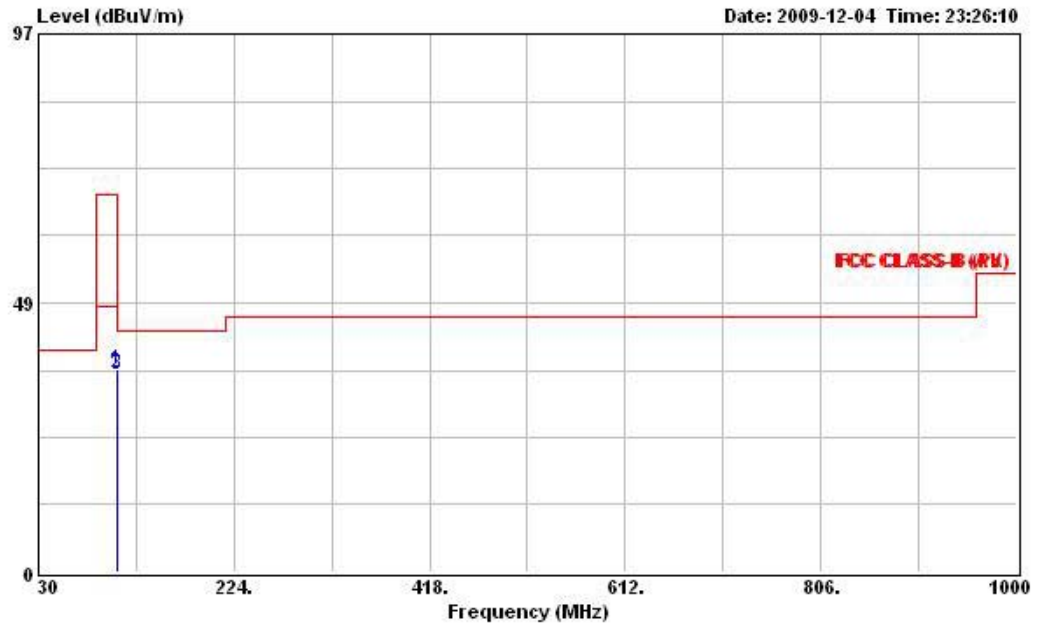

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD EXION  
 Memo : 180度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	36.52	-31.48	68.00	49.93	2.37	12.28	28.06	Peak	314	---
2	107.500	35.90	-32.10	68.00	49.31	2.37	12.28	28.06	QP	314	---
3	107.500	35.51	-12.49	48.00	48.92	2.37	12.28	28.06	Average	314	---

Vertical

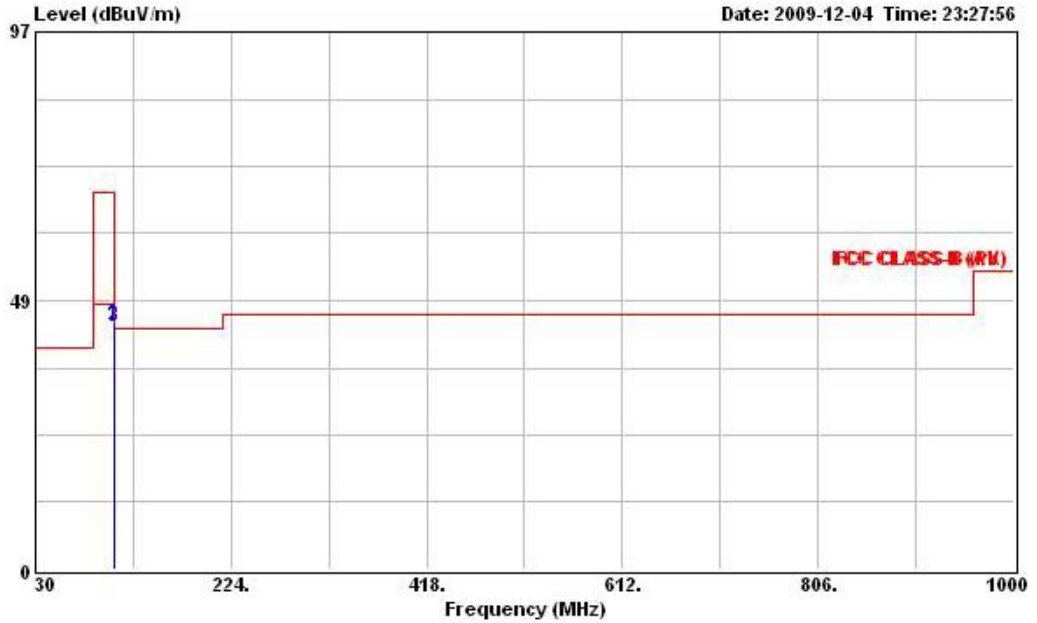


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 180度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	44.34	-23.66	68.00	57.75	2.37	12.28	28.06	Peak	100	---
2	107.500	44.04	-23.96	68.00	57.45	2.37	12.28	28.06	QP	100	---
3	107.500	43.77	-4.23	48.00	57.18	2.37	12.28	28.06	Average	100	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 225° / Mode 3		


Horizontal

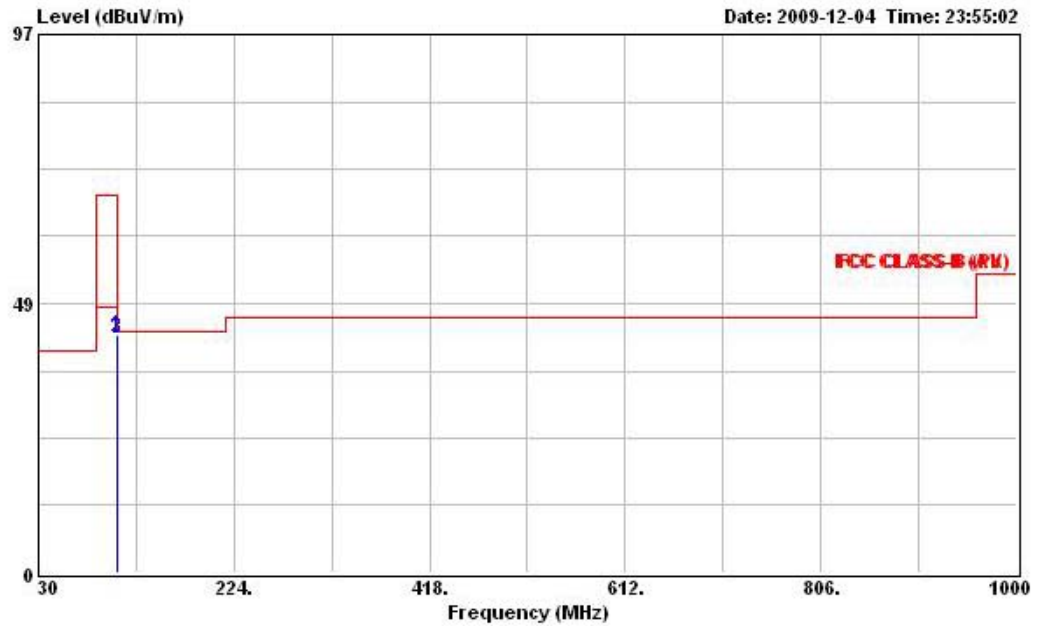

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 225度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	42.74	-25.26	68.00	56.15	2.37	12.28	28.06	Peak	318	---
2	107.500	42.41	-25.59	68.00	55.82	2.37	12.28	28.06	QP	318	---
3	107.500	42.10	-5.90	48.00	55.51	2.37	12.28	28.06	Average	318	---

Vertical

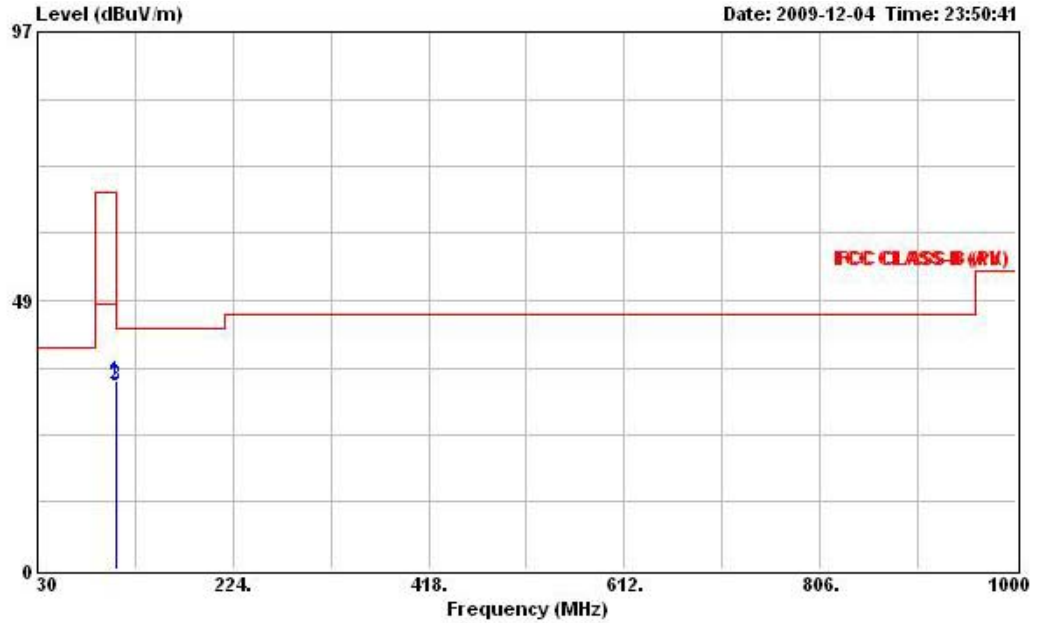


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 225度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	34.17	-33.83	68.00	47.58	2.37	12.28	28.06	Peak	250	---
2	107.500	33.43	-34.57	68.00	46.84	2.37	12.28	28.06	QP	250	---
3	107.500	33.04	-14.96	48.00	46.45	2.37	12.28	28.06	Average	250	---



Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 270° / Mode 3		


Horizontal

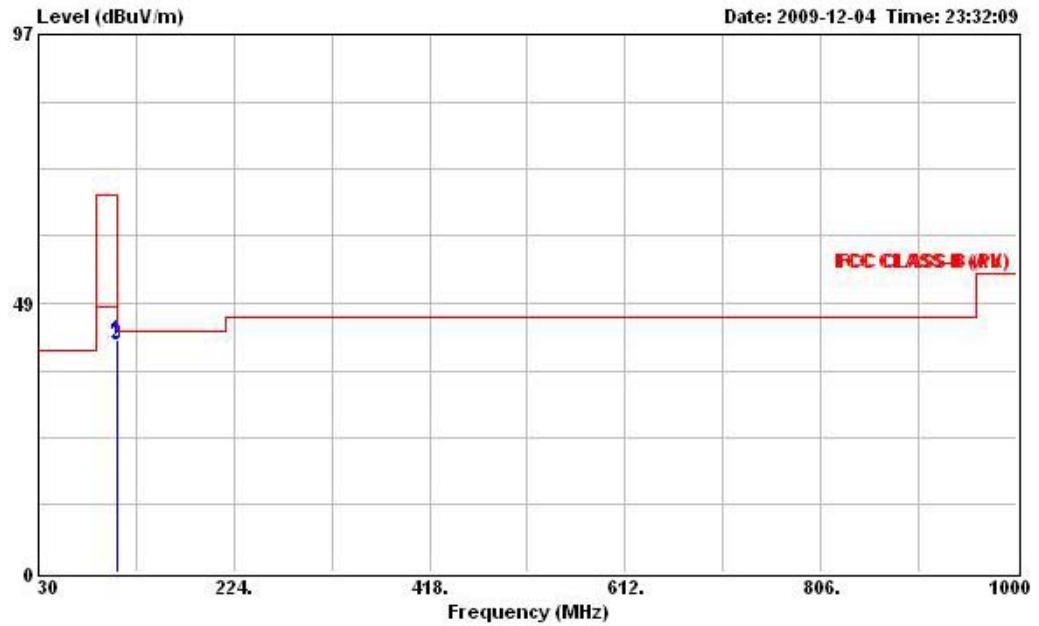

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 270度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	41.83	-26.17	68.00	55.24	2.37	12.28	28.06	Peak	343	---
2	107.500	41.17	-26.83	68.00	54.58	2.37	12.28	28.06	QP	343	---
3	107.500	40.86	-7.14	48.00	54.27	2.37	12.28	28.06	Average	343	---

Vertical

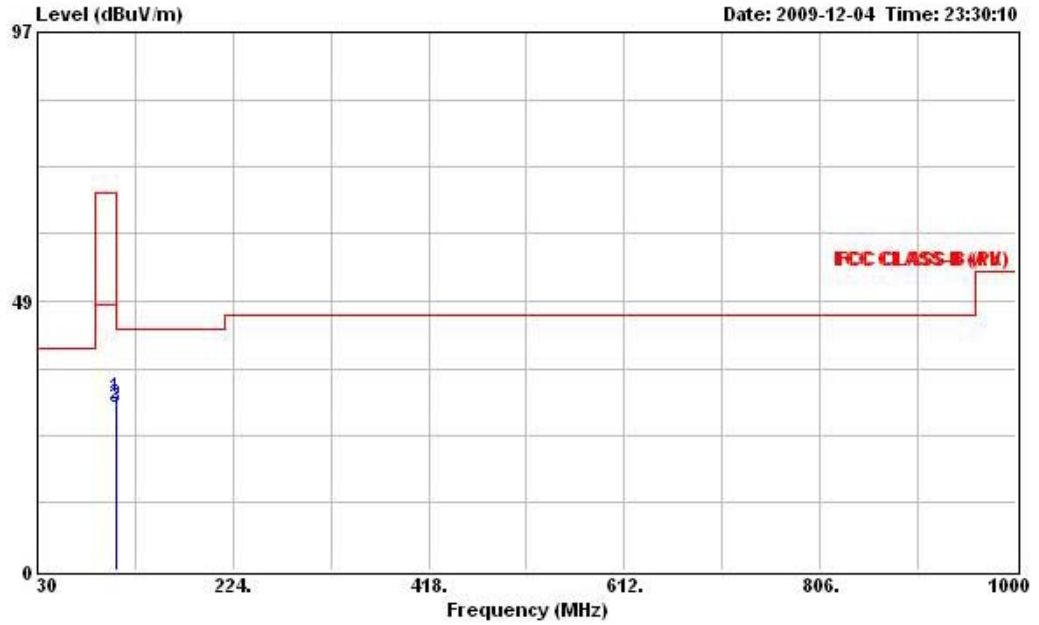


Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : FORD EXION  
 Memo : 270度

	Freq	Level	Over	Limit	Read	Cable	Probe	Preamp	Remark	Ant	Table
	MHz	dBuV/m	Limit	Line	Level	Loss	Factor	Factor		Pos	Pos
			dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	31.15	-36.85	68.00	44.56	2.37	12.28	28.06	Peak	134	---
2	107.500	29.83	-38.17	68.00	43.24	2.37	12.28	28.06	QP	134	---
3	107.500	29.28	-18.72	48.00	42.69	2.37	12.28	28.06	Average	134	---

Temperature	20°C	Humidity	58%
Configurations	107.5 MHz/ 315° / Mode 3		


Horizontal

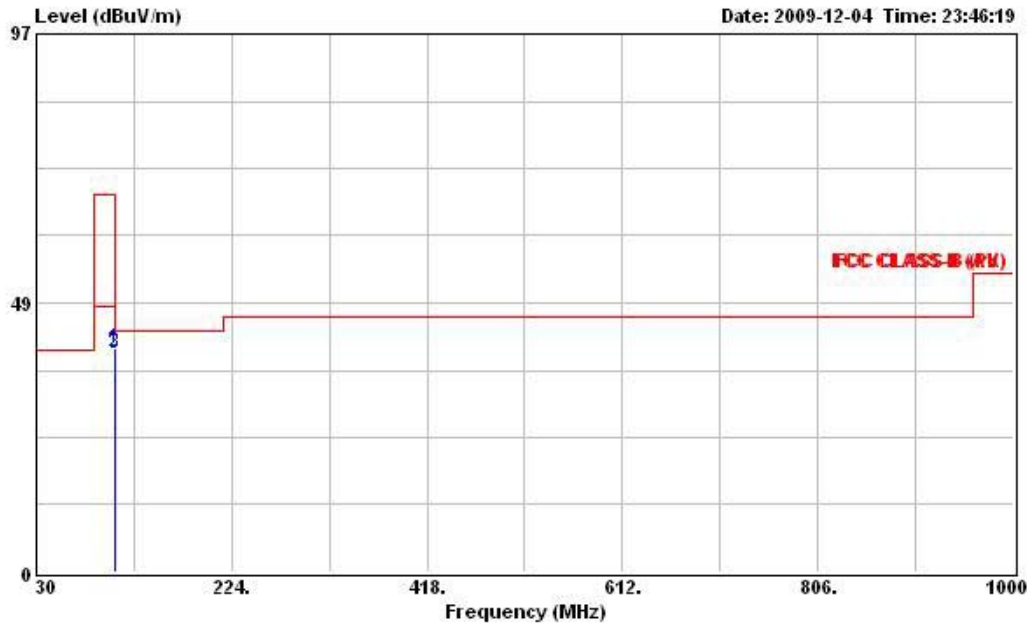

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 HORIZONTAL  
 EUT : Stratus 3  
 Power :  
 model : FM 107.5M  
 Memo : FORD IXION  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	40.36	-27.64	68.00	53.77	2.37	12.28	28.06	Peak	339	---
2	107.500	39.81	-28.19	68.00	53.22	2.37	12.28	28.06	QP	339	---
3	107.500	39.47	-8.53	48.00	52.88	2.37	12.28	28.06	Average	339	---

Vertical

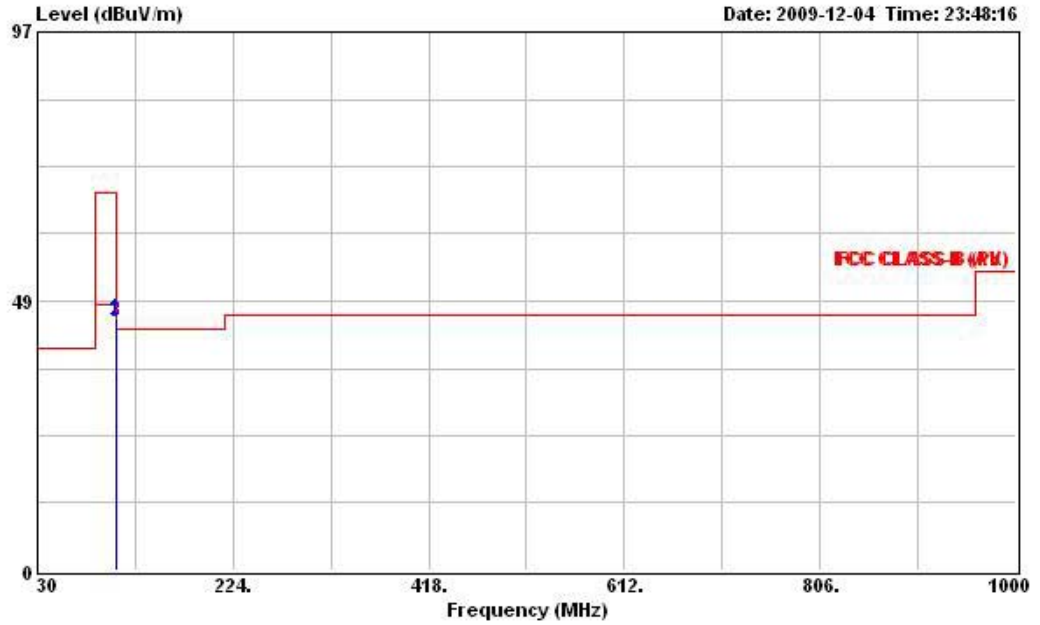

Site : 10CH01-HY  
 Condition : FCC CLASS-B (PK) 3m AT-2681 VERTICAL  
 EUT : Stratus 3  
 Power :  
 model : FM107.5M  
 Memo : FORD IXION  
 Memo : 315度

	Freq	Level	Over Limit	Limit Line	Read Level	Cable Loss	Probe Factor	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	107.500	45.49	-22.51	68.00	58.90	2.37	12.28	28.06	Peak	100	---
2	107.500	45.17	-22.83	68.00	58.58	2.37	12.28	28.06	QP	100	---
3	107.500	44.85	-3.15	48.00	58.26	2.37	12.28	28.06	Average	100	---

#### 4. List of Measuring Equipments

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
10m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-10M	10CH01-HY	30MHz~1GHz 10m, 3m	Apr. 13, 2009	Radiation (10CH01-HY)
Receiver	R&S	ESI7	838496/009	9kHz-7GHz	Apr. 01 2009	Radiation (10CH01-HY)
Amplifier	Agilent	8447D	2944A10825	100kHz – 1.3GHz	May 26, 2009	Radiation (10CH01-HY)
Turn Table	HD	DT 60 RPS	1513/004/00	0 ~ 360 degree	N/A	Radiation (10CH01-HY)
Antenna Mast	HD	MA240	240/556/00	1 m - 4 m	N/A	Radiation (10CH01-HY)
RF Cable-R10m	Suhner Switzerland + Rosenberger	RG223/U + UAA220A-0	CB022-DOOR	30MHz~1GHz	Nov. 24, 2009	Radiation (10CH01-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2681	30MHz –1GHz	Dec. 21 2008	Radiation (10CH01-HY)