


Appendix C. Co-location

1. Results of Radiated Emissions for Co-located


Temperature	21°C	Humidity	63%
Test Engineer	Rion Li	Configurations	2.4GHz Bluetooth + 2.4GHz WLAN

Horizontal

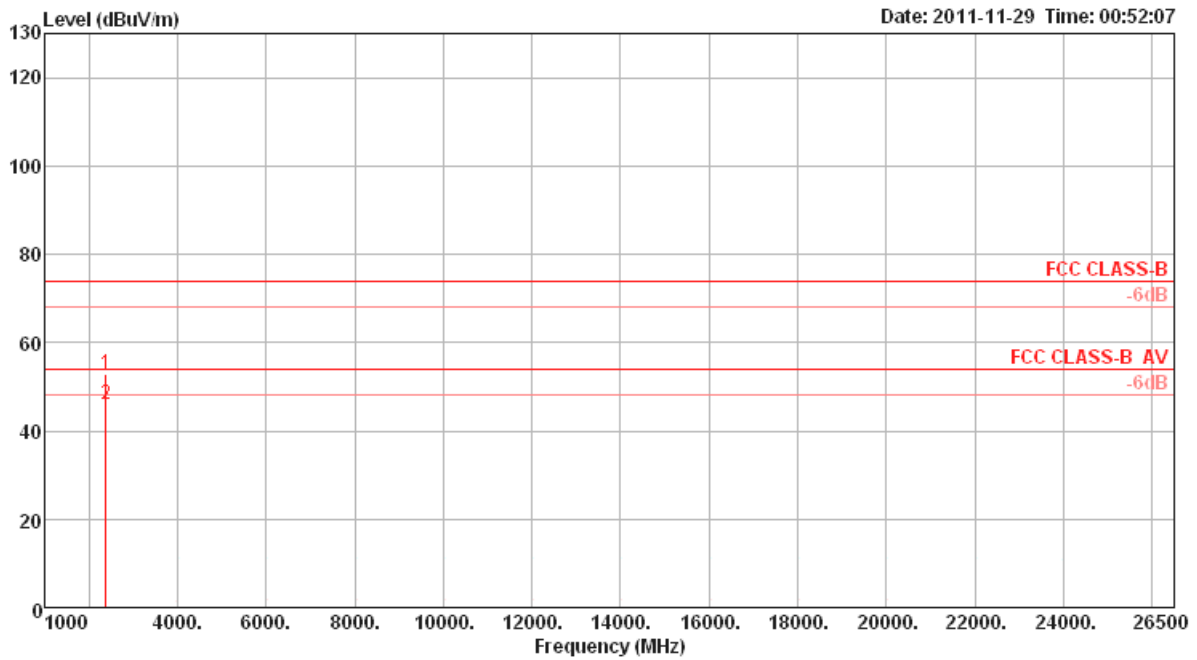

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2381.44	52.89	74.00	-21.11	55.75	4.11	28.01	34.98	100	24	HORIZONTAL
2	2381.98	46.04	54.00	-7.96	48.90	4.11	28.01	34.98	100	24	HORIZONTAL

Vertical

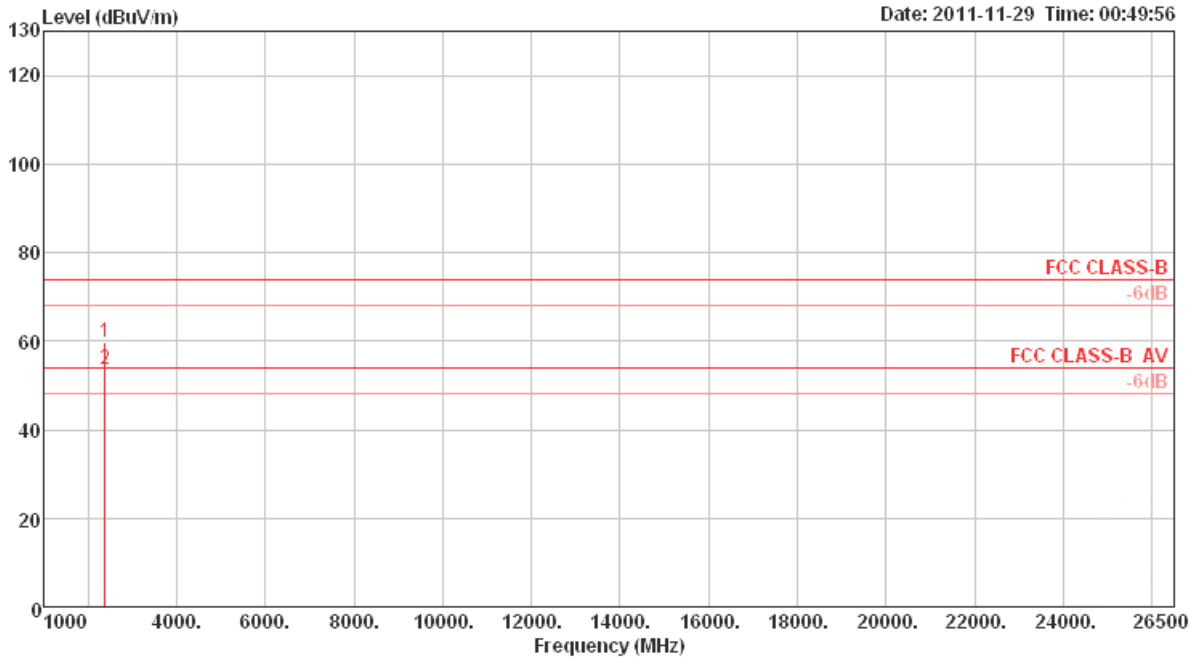

	Freq	Level	Limit	Over	Read	CableAntenna	Preamp		A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	2381.46	59.87	74.00	-14.13	62.73	4.11	28.01	34.98	Peak	100	80 VERTICAL
2	2381.98	53.66	54.00	-0.34	56.52	4.11	28.01	34.98	Average	100	80 VERTICAL