

FCC Part 15.247 Test Report
for
Acer NeWeb Corporation
on the
Wireless LAN PCMCIA Card
Model: WarpLink 2411
FCC ID: NKRNEWARPLINKP



Test Report #: 20244301
Date of Report: September 26, 2000

Job #: J20024430
Date of Test: September 6-9, 2000

Total No. Of Pages Contained in this Report: 19 + data pages



Lab Code: 200201-01

	Bruce Gordon, Test Engineer
	David Chernomordik, Ph.D., EMC Site Manager

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, NA Inc. This report must not be used to claim product endorsement by NVLAP, NIST nor any other agency of the U.S. Government.

FCC Part 15 DSSS Cert. Rev 9/99



Winnock Hensley



emc





Table of Contents

1.0 Summary of Tests.....2

2.0 General Description.....3

2.1 Product Description.....3

2.2 Related Submittal(s) Grants.....3

2.3 Test Methodology4

2.4 Test Facility.....4

3.0 System Test Configuration.....5

3.1 Support Equipment and description.....5

3.2 Block Diagram of Test Setup5

3.3 Justification.....6

3.4 Software Exercise Program6

3.5 Mode of Operation During Test.....6

3.6 Modifications Required for Compliance.....6

3.7 Additions, deviations and exclusions from standards6

4.0 Measurement Results7

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b):7

4.2 6 dB RF Bandwidth, FCC Rule 15.247(a)(2):8

4.3 Power Density Reading, FCC Rule 15.247(d):9

4.4 Out-of-Band Conducted Emissions, FCC Rule 15.247(c):10

4.5 Out of Band Radiated Emissions (for emissions in report section 4.4 that are less than 26 dB below carrier), FCC Rule 15.247(c):11

4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b), (c):12

4.7 AC Line Conducted Emission, FCC Rule 15.207:13

4.8 Radiated Emissions from Digital Section of Transceiver (Transmitter), FCC Ref: 15.109 14

4.9 Radiated Emissions from Receiver Section of Transceiver (L.O. Radiation), FCC Ref: 15.109, 15.111.....15

4.10 Processing Gain Measurements, FCC Rule 15.247(e).....16

4.11 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)17

5.0 List of Test Equipment.....18

6.0 Document History19

Acer NeWeb Corporation, Model No. WarpLink 2411
 FCC ID: NKRWARPLINKP

Date of Test: September 6-9, 2000


1.0 Summary of Tests

MODEL: 2411
FCC ID: NKRWARPLINKP


TEST	REFERENCE	RESULTS
Max. Output power	15.247(b)	Passed
6 dB Bandwidth	15.247(a)(2)	Passed
Max. Power Density	15.247(d)	Passed
Out of Band Antenna Conducted Emission	15.247(c)	Passed
Out of Band Radiated Emission	15.247(c)	Not Applicable*
Radiated Emission in Restricted Bands	15.35(b)(c)	Passed
AC Conducted Emission	15.207	Passed
Radiated Emission from Digital Part	15.109	Passed
Radiated Emission from Receiver L.O.	15.109	Not Applicable**
Processing Gain Measurements	15.247(e)	Provided by applicant
Antenna Requirement	15.203	Passed

*Not Applicable due to Out of Band conducted emissions results.

**Not Applicable because the WARPLINK 2411 operates above 960MHz.

Test Engineer: 
 fe✓ Bruce Gordon

Date: 02/16/01

EMC Site Manager: 
 David Chernomordik, Ph.D.
 EMC Site Manager

Date: 02/16/01



Acer NeWeb Corporation, Model No. WarpLink 2411
FCC ID: NKRNEWARPLINKP

Date of Test: September 6-9, 2000

2.0 General Description

2.1 Product Description

The WARPLINK 2411 is a 2.4 GHz transceiver used for wireless LAN access.

A production version of the sample was received on September 6, 2000 in good condition.

Overview of Wireless LAN Access Point

Applicant	Acer NeWeb Corporation
Trade Name & Model No.	Acer NeWeb Corporation, WarpLink 2411
FCC Identifier	NKRNEWARPLINKP
Use of Product	Wireless LAN communications
Manufacturer & Model of Spread Spectrum Module	Intersil, HWB3163 PC Card
Type of Transmission	Direct Sequence Spread Spectrum
Rated RF Output	15.92 dBm
Frequency Range	2412 to 2462 MHz
Number of Channel(s)	11
Antenna(s) & Gain,	Proprietary, G = 2.5dBi
Processing Gain Measurements	<input checked="" type="checkbox"/> Will be provided to ITS for submission with the application <input type="checkbox"/> Will be provided directly to the FCC reviewing engineer by the client or manufacturer of the spread spectrum module
Antenna Requirement	<input checked="" type="checkbox"/> The EUT uses a permanently connected antenna. <input type="checkbox"/> The antenna is affixed to the EUT using a unique connector which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector. <input type="checkbox"/> The EUT requires professional installation (attach supporting documentation if using this option).
Manufacturer name & address	Acer NeWeb Corporation 399 W. Trimble Rd. San Jose , CA 95131

2.2 Related Submittal(s) Grants



2.3 Test Methodology

Both AC mains line-conducted and radiated emissions measurements were performed according to the procedures in ANSI C63.4 (1992). Radiated tests were performed at an antenna to WARPLINK 2411 distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility

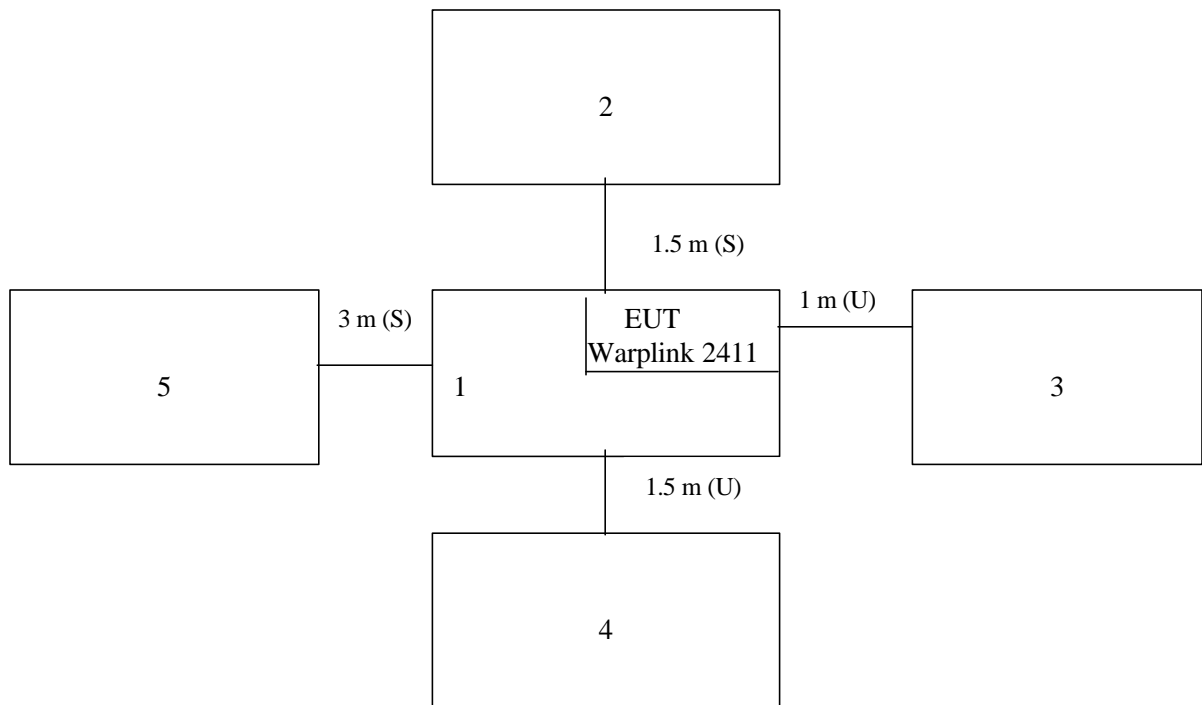
The open area test site and conducted measurement facility used to collect the radiated data is site 2. This test facility and site measurement data have been fully placed on file with the FCC and NVLAP accredited.

3.0 System Test Configuration

3.1 Support Equipment and description

Item #	Description	Model No.	Serial No.	FCC ID
1	Laptop computer	Compaq	PP2010	3J94CBZ1H217
2	Monitor	Dell Computer	D1428-HS	02922CV22495
3	Printer	Hewlett Packard	2225c+	3014S72728
4	Keyboard	Honeywell	101WN	H2073
5	External modem	Datatronics	1200CK	07-305041

3.2 Block Diagram of Test Setup



m: Length in meters

* = EUT	S = Shielded;	F = With Ferrite
** = No ferrites on video cable	U = Unshielded	

3.3 Justification

For emission testing, the equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst case emissions.

For radiated emission measurements, the WARPLINK 2411 is attached to a cardboard box (if necessary) and placed on the wooden turntable. If the WARPLINK 2411 attaches to peripherals, they are connected and operational (as typical as possible). The WARPLINK 2411 is wired to transmit full power without modulation.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for a measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

3.4 Software Exercise Program

The WARPLINK 2411 exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. Care was taken to ensure proper power supply voltages during testing.

WARPLINK 2411 used customer supplied software to exercise the WARPLINK 2411.

3.5 Mode of Operation During Test

The WARPLINK 2411 was operated in two modes, continuous transmission and receive modes.

3.6 Modifications Required for Compliance

The following modifications were installed during compliance testing in order to bring the product into compliance (Please note that this list does not include changes made specifically by Acer NeWeb Corporation prior to compliance testing):

No modifications were installed by Intertek Testing Services.

3.7 Additions, deviations and exclusions from standards

No additions, exclusions, or deviations to the standard were made.

4.0 Measurement Results

4.1 Maximum Conducted Output Power at Antenna Terminals, FCC Rules 15.247(b):

Requirements

For antennas with gains of 6 dBi or less , maximum allowed transmitter output is 1 watt (+30 dBm).
For antennas with gains greater than 6 dBi, transmitter output level must be decreased by an amount equal to (GAIN - 6) dBm.

Procedure

[X] The antenna port of the WARPLINK 2411 was connected to the input of a power meter. Power was read directly and cable loss correction was added to the reading to obtain power at the WARPLINK 2411 antenna terminals.

Test Equipment

Hewlett Packard Peak Power Meter, Model: 8900D, Serial: 3607U00673, Calibration Due: 8/01/2001
Hewlett Packard Power Sensor, Model: 84811A, Serial: 33A8Ao5091, Calibration Due: 12/19/2000

Test Result

Frequency (MHz)	Output in dBm	Output in mWatt
2412.0	13.2	20.9
2437.0	13.3	21.4
2462.0	13.4	21.9



Acer NeWeb Corporation, Model No. WarpLink 2411
FCC ID: NKRNEWARPLINKP

Date of Test: September 6-9, 2000

4.2 6 dB RF Bandwidth, FCC Rule 15.247(a)(2):

Requirements

The minimum 6 dB bandwidth shall be at least 500 kHz

Procedure

The antenna port of the WARPLINK 2411 was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 6 dB lower than PEAK level. The 6 dB bandwidth was determined from where the channel output spectrum intersected the display line.

Test Result

Frequency (MHz)	Min. 6 dB Bandwidth (MHz)
2412 MHz	5.92 MHz

Refer to the following plots for 6 dB RF bandwidth:

- Plot 4.2.a: Low Channel 6 dB RF Bandwidth
- Plot 4.2.b: Middle Channel 6 dB RF Bandwidth
- Plot 4.2.c: High Channel 6 dB RF Bandwidth

Note: The bandwidth is 5.92 MHz for all data rates: 1, 2, 5.5, 11Mbps. Since the chip rate is the same for all data rate operations. This chip rate is combined with coding, I_Q_modulation, and spreading scheme.



4.3 Power Density Reading, FCC Rule 15.247(d):

Requirements

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.

Procedure

The spectrum analyzer RES BW was set to 3 kHz. The START and STOP frequencies were set to the band edges of the maximum output passband. If there is no clear maximum amplitude in any given portion of the band, it may be necessary to make measurements at a number of bands defined by several START and STOP frequency pairs. Total SWEEP TIME is calculated as follows:

$$\text{SWEEP TIME (SEC)} = (\text{Fstop, kHz} - \text{Fstart, kHz})/3 \text{ kHz}$$

Antenna output of the WARPLINK 2411 was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

Test Result

Frequency (MHz)	Power Density (dBm)
2461.5358	-12.1

Frequency Span = 600 kHz

Sweep Time = Frequency Span/3 kHz
= 200 seconds

Refer to the following plots for power density data:

- Plot 4.3.a.1 - 4.3.a.2: Low Channel Power Density
- Plot 4.3.b.1 - 4.3.b.2: Middle Channel Power Density
- Plot 4.3.c.1 - 4.3.c.2: High Channel Power Density



4.4 Out-of-Band Conducted Emissions, FCC Rule 15.247(c):

Requirements

In any 100 kHz bandwidth outside the WARPLINK 2411 passband, the RF power shall be at least 20 dB below that of the maximum in-band 100 kHz emission.

Refer to the following plots for out of band conducted emissions data:

Plot 4.4.a.1 - 4.4.a.8: Low Channel Emissions

Plot 4.4.b.1 - 4.4.b.6: Middle Channel Emissions

Plot 4.4.c.1 - 4.4.c.7: High Channel Emissions



Acer NeWeb Corporation, Model No. WarpLink 2411
FCC ID: NKRNEWARPLINKP

Date of Test: September 6-9, 2000

4.5 Out of Band Radiated Emissions (for emissions in report section 4.4 that are less than 26 dB below carrier), FCC Rule 15.247(c):

For out of band emissions that are close to or that exceed the 20 dB attenuation requirement described in the specification, radiated measurements were performed at a 3 m separation distance to determine whether these emissions complied with the general radiated emission requirement.

- Not required
- See attached data sheet



4.6 Transmitter Radiated Emissions in Restricted Bands, FCC Rule 15.35(b), (c):

Radiated emission measurements were performed from 30 MHz to 24 GHz. Analyzer resolution is 100 kHz or greater for 30 MHz to 1000 MHz, 1 MHz for >1000 MHz.

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with average and peak detection unless otherwise specified.

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

Additional tests were performed to show compliance with the requirement at the band-edge frequency 2483.5 MHz and up to 2500 MHz and at 2390.0 MHz and down to 2310 MHz. The “delta” method was used.

The field strength at 2412 MHz and 2462 MHz was calculated as follows:

$$E_o = \frac{30(EIRP)}{D}$$

Where:

E_o = Volts/meter

EIRP = Watts

D = Distance in meters

OR

$$E_o = EIRP_{dBm} + 95.3$$

$$E_o = \text{dBuV/m}$$

Average output power at the antenna terminal at 2412 MHz is 4.45 dBm (includes antenna gain 2.5 dB)

Average output power at the antenna terminal at 2462 MHz is 4.6 dBm (includes antenna gain 2.5 dB)

The field strength at the Bandedge frequencies was calculated as $E_F = E_o - \Delta$.

Where:

E_F = Field Strength of Bandedge Frequency

E_o = Field Strength of Fundamental Frequency

Δ = Delta between Field Strength of Fundamental Frequency and Field Strength of Bandedge Frequency (see plots 4.4.a.5 for Low Channel and plots 4.4.c.5 for High Channel).

Average Field strength at Low Channel 2412.0 MHz = 4.45 + 95.3 = 99.75 dBuV/m

Field strength at Bandedge 2390.0 MHz = 99.75 – 51.5 = 48.25 dBuV/m

Field strength at High Channel 2462.0 MHz = 4.6 + 95.3 = 99.9 dBuV/m

Field strength at Bandedge 2483.5 MHz = 99.9 – 49.8 = 50.1 dBuV/m



Acer NeWeb Corporation, Model No. WarpLink 2411
FCC ID: NKRNEWARPLINKP

Date of Test: September 6-9, 2000

4.7 AC Line Conducted Emission, FCC Rule 15.207:

Not required; battery operation only

Test data attached



4.8 Radiated Emissions from Digital Section of Transceiver (Transmitter), FCC Ref: 15.109

- Not required - No digital part
- Test results are attached
- Included in the separate DOC report.



- 4.9 Radiated Emissions from Receiver Section of Transceiver (L.O. Radiation), FCC Ref: 15.109, 15.111
- [X] Not required - WARPLINK 2411 operation above 960 MHz only
 - [] Not required - WARPLINK 2411 is transmitter only
 - [] Not performed; exempt until June 1999
 - [] Test results are attached

4.10 Processing Gain Measurements, FCC Rule 15.247(e)

The processing gain shall be determined from the ratio in dB of the signal to noise ratio with the system spreading code turned OFF, to the signal to noise ratio with the system spreading code turned ON, as measured at the demodulated output of the receiver. The processing gain shall be at least 10 dB for a direct sequence spread spectrum system.

	Refer to attached test procedure and data sheets.
X	Refer to circuit analysis and processing gain calculations provided by manufacturer.



4.11 Transmitter Duty Cycle Calculation and Measurements, FCC Rule 15.35(b), (c)

The WARPLINK 2411 antenna output port was connected to the input of the spectrum analyzer. The analyzer center frequency was set to WARPLINK 2411 RF channel carrier. The SWEEP function on the analyzer was set to ZERO SPAN. The transmitter ON time was determined from the resultant time-amplitude display:

$$\text{Duty cycle} = \text{Maximum ON time in } 100 \text{ msec}/100$$

$$\text{Duty cycle correction, dB} = 20 * \log(\text{DC})$$

	See attached spectrum analyzer chart(s) for transmitter timing
	See transmitter timing diagram provided by manufacturer
X	Not Applicable*

* Duty cycle correction factor was not necessary to reach compliance.

Acer NeWeb Corporation, Model No. WarpLink 2411
 FCC ID: NKRWARPLINKP

Date of Test: September 6-9, 2000

5.0 List of Test Equipment

Emissions Test Equipment List

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due	USED
Biconical Antenna, #9	EMCO	3104	3789	12	4/10/01	X
Log Periodic Antenna, #7	EMCO	LPA-25	1079	12	4/10/01	X
Horn Antenna #8	EMCO	3115	9107-3712	12	1/5/01	X
Waveguide Antenna	EMCO	3160-9	001	#	#	X
Pre-Amplifier, #5	Hewlett Packard	8447D	1937A03096	12	4/28/01	X
Pre-Amplifier	CDI	P1000	N/A	12	10/4/00	X
Spectrum Analyzer w/85650 QP Adaptor	Hewlett Packard	8566B	2416A00317 2043A00251	6	2/03/01	X
Spectrum Analyzer	Tektronix	2784	B3020108	12	8/4/01	X
LISN	Solar Electronics	8028-50-TS-24-BNC	980235	12	2/9/01	X
LISN	Solar Electronics	8025-50-TS-24-BNC	912432	12	3/31/01	X
Filter Network	Solar	8907-250-TS-24-BP	806751	12	12/10/00	X

No Calibration Required

Acer NeWeb Corporation, Model No. WarpLink 2411
FCC ID: NKRNEWARPLINKP

Date of Test: September 6-9, 2000

6.0 Document History

Revision/Job Number	Date	Change
1.0 / J20024430	September 26, 2000	Original document